




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification⁶ : G06F 17/21</p>	<p>A1</p>	<p>(11) International Publication Number: WO 97/43723 (43) International Publication Date: 20 November 1997 (20.11.97)</p>
<p>(21) International Application Number: PCT/US97/08483 (22) International Filing Date: 15 May 1997 (15.05.97) (30) Priority Data: 08/649,271 17 May 1996 (17.05.96) US (71) Applicant: AMERITECH CORPORATION [US/US]; 2000 West Ameritech, Center Drive, Hoffman Estates, IL 60116-1025 (US). (72) Inventors: SCHUMACHER, Robert, M.; 1617 Hemstock Avenue, Wheaton, IL 60187 (US). MATTHEWS, James, E.; 1713 W. 99th Street, Chicago, IL 60643 (US). (74) Agent: WEBB, William, A.; Brinks Hofer Gilson & Lione, NBC Tower, Suite 3600, 455 North Cityfront Plaza Drive, Chicago, IL 60611-5599 (US).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published <i>With international search report.</i></p>

(54) Title: STRUCTURED DOCUMENT BROWSER

(57) Abstract

A structured document browser (80) includes a constant user interface (106) for displaying and viewing sections of a document (10) that is organized according to a pre-defined structure. The structured document browser displays documents that have been marked with embedded codes (28, 32) that specify the structure of the document. The tags are mapped to correspond to a set of icons (170). When the icon is selected while browsing a document, the browser will display the section of the structure corresponding to the icon selected, while preserving the constant user interface.

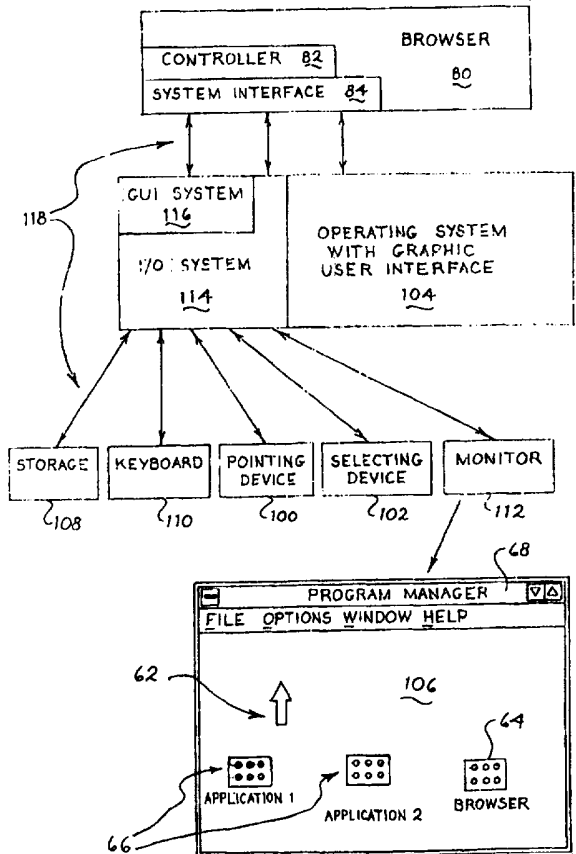

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LJ	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

STRUCTURED DOCUMENT BROWSER

5 A portion of the disclosure of this document
contains material which is subject to copyright
protection. The copyright owner has no objection to
the facsimile reproduction by any one of the patent
10 disclosure as it appears in the Patent and Trademark
Office patent files or records, but otherwise reserves
all rights to copyright protection whatsoever.

FIELD OF THE INVENTION

15 This invention relates to computer
applications for viewing documents, and in particular,
to a computer program for viewing documents having a
predefined structure.

BACKGROUND OF THE INVENTION

20 Current computing environments typically
include a graphical user interface (GUI). IBM personal
computers and IBM compatibles run either OS/2 or
Windows. The Macintosh has always had GUI capabilities
as part of its operating system. Even higher end
computers, including those that run Unix or VAX/VMS
operating systems, are available with components that
25 provide a GUI environment.

GUI's are generated using a set of software
tools that put graphical objects on the computer
display. One of these graphical objects is a screen

pointer that the user controls with a mouse or a trackball. The user moves the mouse to position the pointer on the screen over selected objects on the screen. The user can select an object by using a selecting device which is typically a mouse switch. By selecting an object, the user instructs the operating system or an application to execute the function associated with the object. The GUI objects can include the graphical representation of buttons, menus or any other graphic object.

GUI's are the foundation of hypertext and hypermedia applications. Such applications allow computer users to create interfaces in which graphical objects are configured to correspond, or to link to objects of information. For example, a user may create an interface having the graphical representation of a button to display a motion video by selecting the button with a screen pointer. Similarly, the button can be configured to make a sound, display an image or display a separate text file.

Today's increasing interest in the Internet is due in part to the improvements in hypermedia applications. The World Wide Web is growing dramatically due to the evolution of standard markup languages that allow users to mark documents with links to other documents, and of presenters or viewers that interpret the markup language in the documents allowing the users to view the links.

One of the first markup tools was the Standard Generalized Markup Language (SGML). SGML was developed by the International Standards Organization and has been adopted by the Department of Defense and other government agencies as a way of standardizing documentation. SGML is machine-based in a manner similar to a computer language. An SGML Document Type Definition (DTD) may be defined according to the

specifications of SGML for a given document structure. The DTD defines elements to be embedded in a document. The documents are then viewed using a viewer or browser that interprets the elements in the document according to the data structure defined in the DTD.

The HyperText Markup Language (HTML) is an instance of a DTD defined by SGML. HTML elements or codes are embedded into documents for use with HTML browsers. Browsers display the documents according to stylesheets associated with the embedded codes. The stylesheets contain rules or instructions that dictate the appearance of a document as presented by a browser. Stylesheets may also contain references to other documents in different computers. These references may be used in conjunction with context-sensitive regions of the documents such that a user retrieves the document reference by selecting the region. In this manner, an author links one document to others in a meaningful way such that a viewer may provide a user with access to information in documents that are linked together in a web-like fashion.

One common characteristic of many browsers is that the links to information are presented solely within documents. The links may take the user to other documents or to locations within the same document, but typically, the elements that provide the link control are within the documents.

Having the control to the information links within the documents themselves is adequate where the documents are short and where the purpose is to obtain information in brief, concise statements. But where a document is long, it becomes difficult to browse the document since the only potential access to other destinations are in whatever part of the document is currently being displayed.

Moreover, organizations often work with standardized documents. These documents typically have a carefully defined purpose and are usually characterized by a standard structure. These documents may be long and the main purpose for viewing the documents is often to access information found in a specific section of the well-known structure of the document.

SUMMARY OF THE INVENTION

In view of the above, a structured document browser is provided with a user interface that remains uniform and familiar as the user browses documents according to their structure instead of their contents. The browser uses codes embedded in the document to identify sections of the structure of the document. The user interface includes graphical user interface objects, such as buttons, that are configured to display a standard section of the document structure when selected by the user.

The structured document browser may also include menus that allow a user to select a document from among different documents, or a document structure type from among different structure types.

It is another object of the invention to provide a method for browsing a document by using a screen pointer to select a graphical user interface object and displaying a section of the document that corresponds to the graphical user interface object.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 is a block diagram of a preferred embodiment of the structured document browser showing how it communicates with other components of the computer.

Figure 2 illustrates a sample structure for a document.

(A)-(B)
Figure 3 illustrates a portion of a document having the structure shown in Figure 2 after it has been marked with SGML tags.

(A)-(B)
Figure 4 illustrates an SGML document type definition (DTD) created for use by a structured document browser for a document having the structure shown in Figure 2.

Figure 5 is a representation of an example of a user interface of the structured document browser for Figure 1.

Figure 6 is a flow chart showing the process of retrieving a structured document and illustrates playing the section of a document in response to the selection of a button.

Figure 7 illustrates an example of a bks data structure.

Figure 8 is a diagram that shows the interaction between a button, a map file and bit map file.

Figures 9A & 9B illustrate the operation of the browser of Figure 1.

Figure 10 illustrates one example of an alternative implementation of the user interface.

Figure 11 illustrates a second alternative implementation of the user interface.

Figure 12 illustrates a third alternative implementation of the user interface.

Figure 13 illustrates a fourth alternative implementation of the user interface.

**DETAILED DESCRIPTION OF THE
PRESENTLY PREFERRED EMBODIMENTS**

In the description that follows, reference is made to the drawings where like elements are identified by like numerals throughout.

A presently preferred embodiment of this invention includes an application program called browser.exe that has been developed using the 'c' programming language in the Windows environment. The browser.exe executable file is programmed to make function calls to three dynamic link libraries named sit.dll, cgrmzv.dll and ct13d.dll. These libraries are components of Dynatext Version 2.0, a user interface development system from Electronic Book Technologies, Inc. These Dynatext libraries provide functions that implement the SGML related functions and the graphic input/output functions. Further information regarding the Dynatext program may be obtained by contacting Electronic Book Technologies, Inc. at One Richmond Square, Providence, R.I. 02906.

The browser.exe program uses data structures in several support files that are in the same directory tree as browser.exe. These support files will be described in more detail in the description that follows.

A listing of the present version of browser.exe is attached as Appendix I of this specification. The listing is an octal representation of browser.exe. The presently preferred embodiment may be carried out by converting the octal to a binary executable file using methods that are well known in the art. After conversion, the browser.exe file may be executed from a directory that includes the dynamic link libraries and the support files described in this disclosure.

It is to be understood however, that an embodiment of the present invention may be developed for any computing environment using any suitable development system.

5 The browser application in a presently preferred embodiment is referred to in the following detailed description as the browser 80 as shown in Figure 1. Figure 1 is a block diagram describing at a high level the browser 80 in the computing environment.
10 The components of the browser 80 in its operating environment include the browser 80 itself, an operating system 104 with GUI capabilities, storage media 108, a keyboard 110, a pointing device 100, a selecting device 102 and a monitor 112. The operating system 104
15 further includes an I/O system 114 and a GUI system 116.

 The double headed arrows 118 denote the communication between the respective components. The communication at 118 may entail communication over a
20 network where appropriate.

 The hardware devices 108, 110, 100, 102, 112 may be implemented by choosing from among many alternatives for each device. A pointing device 100 may be implemented using a mouse, a trackball or any
25 other device that controls the position of a screen pointer. A selecting device 102 is typically implemented with mouse buttons or buttons that operate in conjunction with a trackball. In general, any device that may be used to effect the selection of an
30 object at the location of the screen pointer may be used as a selecting device 102. A selecting device 102 may even include a key on the keyboard 110. The storage media 108 is understood to include random access memory (RAM), the temporary storage out of which
35 programs are executed as well as the mass storage devices in which programs are stored. The hardware

devices 108, 110, 100, 102, 112 are understood to include the software drivers necessary for their operation in the computing environment.

5 The browser 80 includes at least a controller 82 and a system interface 84. The system interface 84 is responsible for processing the communication between the browser 80 and the operating system 104, the I/O system 114 and the GUI system 116. The controller 82 receives and interprets requests from the system
10 interface 84 to perform a browser function. For example, the system interface 84 receives signals from the I/O system 114 that the pointing device 100 and the selecting device 102 were used to press a button or icon, to request a display of a section of a document.
15 The controller 82 receives the information from the system interface 84 to determine which document section to display.

In a presently preferred embodiment, the system interface 84 includes the functions provided by the Dynatext development system and any operating
20 system or I/O system functions. The controller 82 in a preferred embodiment is the executable program browser.exe. It is to be understood that the diagram in Figure 1 is by way of illustration and is not
25 intended to limit the software structure chosen to carry out the invention.

The browser 80 operates with documents that have been prepared as described below. Because the browser 80 is designed to navigate documents according
30 to their structure, the utility of the browser 80 is maximized when an organization establishes a standard structure for its key documents. A software engineering group, for example, may find it desirable to maintain a uniform structure for the software
35 requirement specifications that the group develops. A different structure is desirable for the group's design

specifications, and yet a different structure works for the group's test documentation. The group's goal for such documentation is to maintain uniformity.

Referring to Figure 2, a marketing group might maintain product descriptions for its company's product line in documents having the predefined document structure 10. This structure is predefined to have headings 12 that provide overview information, sales information, product availability information, ordering information, billing information, troubleshooting information and product support information. The structure also has sub-headings 14 within each heading where relevant. The overview section 16 has sub-headings 14 for sections devoted to a product description, aliases, product features and instructions on how to use the product.

A specific document of the predefined structure in Figure 2^{(A)-(C)} is marked with codes for viewing with the browser 80. In a preferred embodiment, codes are used to mark the document as shown in Figure 3^{(A)-(B)}. The codes shown in Figure 3^{(A)-(B)} have angle brackets around them. In a preferred embodiment, the codes are SGML elements. These codes may be replaced by elements of other markup tools in alternative embodiments. In the marked document 20, the application identification code 22 indicates that the document has been marked for use by the browser 80. The overall document structure is identified with a product name code 24. Each standard structure component is then marked with an appropriate code or element.

The sections in a document are preferably marked according to a convention. First, the beginning of a section is marked by a code or element. For example, the <OVER> element 26 identifies the beginning of the section of the document that provides an overview of the product. The <OVER> element 26 is

followed by the heading and text that constitute the
Overview section of the document. A begin section name
element 28 indicates that the information that follows
the element 28 specifies the name that will appear in
5 all documents of the same structure for that section.
In the marked document 20 in Figure 3^{(A)-(B)}, the name of the
overview section is "Overview" 30. Immediately after
the name, an end section name element 32 indicates the
end of that section name such that the text between the
10 begin section name element 28 and the end section name
element 32 is the text 30 that will appear in the
heading. Similarly, an end section element 34
indicates the end of the section. In this case, the
element </OVER> 34 marks the end of the overview
15 section. The convention of marking the beginning and
the end of parts of the document is used to mark other
sections (as shown at 36, 38, 39 and 42) that form the
standard document structure.

Begin sub-section elements 38 and end sub-
20 section elements 42 mark the sub-sections of the
document, using the same convention, with the
stipulation that the end elements 39 are in an order
that keeps the sub-sections nested within the sections.
Documents may have sub-sections within sub-sections.

25 In a preferred embodiment, the structure of
documents is defined by a document type definition
(DTD). The DTD 40 in Figure 4^{(A)-(B)} illustrates how a
document structure is represented in SGML. Codes such
as those referenced at 24, 25, 26 and 38, that are used
30 to indicate a section or structure part of the document
as shown in Figure 3^{(A)-(B)}, are defined by setting an element
name, as shown at 42 and 44 in Figure 4^{(A)-(B)}; setting a
heading name, as shown at 47 and 49; and listing sub-
parts as shown at 46. For example, the code for the
35 product name 24 in Figure 3 is defined in the DTD 40 as
the element name 42 for the high level document

structure composed of the list of sections 46. The list of sections 46 comprises the codes defining the sections of the document. The codes used in Figure^s₃^{(A)-(B)} for the begin section codes 25 are defined in the DTD 40 of Figure^s₄^{(A)-(B)} as element names 44 for the respective section level data structures. The respective name codes, such as the begin section name element 27 in Figure^s₃^{(A)-(B)}, is shown as part of a section, as shown at 45 in Figure^s₄^{(A)-(B)}. The name element 45 is also defined at 51. If a section has sub-parts, or sub-sections, the codes for the sub-sections within the section are listed in the definition of the section code as shown at 48. Each sub-section code is then defined individually as shown at 43. More details on the syntax and constructs of SGML may be obtained by referring to the ISO Standard for SGML ISO 8879: 1986/A1: 1988(E).

In a preferred embodiment, a document having a basic word processing format may be converted to a marked document 20, also known as an SGML instance, using an SGML utility. For example, a utility called DYNATAG from Electronic Book Technologies, Inc., uses documents having the structure described in Figure^s₂^{(A)-(C)} to create a DTD 40, illustrated in Figure^s₄^{(A)-(B)}, as well as an SGML instance 20, illustrated in Figure^s₃^{(A)-(B)}. Other SGML utilities may be used to create DTD's and SGML instances. The discussion of the DTD 40 is presented to illustrate how alternative embodiments might implement a program that interprets SGML DTD's to operate with the browser.

An infinite number of DTD's may be used, including common DTD's such as the HTML DTD. In addition, other embodiments of this invention may not use SGML as a markup language. Any other suitable markup language, including a proprietary markup language, may be used as well, provided that the

appropriate software components are available to translate the code. Other embodiments of this invention may be designed to support the use of more than one markup language.

5 Once a document has been marked and converted into a format that is appropriate for the browser 80, the browser 80 may be started on a computer. Referring back to Figure 1, the user invokes the browser 80 by using the pointing device 100 and the selecting device
10 102 to select the browser 80 in a manner dictated by the GUI of the operating system 104. In the preferred embodiment, the operating system 104 is the Windows Operating System (Version 3.1 and later for purposes of this example), the pointing device 100 is a mouse, and
15 the selecting device 102 includes a pair of mouse buttons (left and right buttons). The Windows user interface 106, as it appears on the monitor 112, includes a menu bar 68, icons 66 representing application programs ready for initialization and a
20 screen pointer 62 controlled by the user with the mouse pointing device 100.

 To initialize the browser 80 in the Windows environment, the mouse 100 may be used to place the screen pointer 62 over the browser icon 64 in the
25 operating system interface 106 and the left mouse button may be double-clicked.

 Once the browser 80 has been initialized, the graphical user interface changes from the Windows user interface 106 in Figure 1 to that of the browser user
30 interface as shown at 50 in Figure 5.

 Referring to Figure 5, the user interface 50 of the browser 80 gives the user the capability of selecting a particular document and then selecting different sections of the document for display. The
35 objects used to browse through the documents remain on the user interface 50 regardless of where in a document

a user is browsing. The user interface remains familiar to the user and responsive to the document structure.

The user interface 50 of the browser 80 includes a document menu 52, a document type menu 54, a first row of selectors 56, a second row of selectors 58 and a display window 60.

The user selects a document for browsing by using the document menu 52. The document menu 52 is implemented with standard graphical user interface menu objects such that the user selects a document menu arrow 70 to display the full menu of the documents available. The user then selects the document desired from the menu using the selecting device 102 in combination with the screen pointer 62.

The user interface 50 of the browser 80 is configured in a manner that allows the document types, or standard structures of different types, to be listed in a document type menu 54. The document type is selected by the user in the same manner that the user selects a document. The name of the document type is the name or alias of directories designated by the browser to have documents of a consistent structure. When a different document type is selected, the names listed in the document menu are changed according to the names of the available documents having the new document type.

The selectors 56, 58 are examples of document navigation tools that may be used for browsing documents in a presently preferred embodiment. More specifically, selectors 56, 58 are display regions in the user interface that are configured to perform pre-defined operations when the user places the screen pointer 62 over one of the selectors 56, 58 and then selects it with the selecting device 102. In the presently preferred embodiment, the display regions are

depicted as icons that make them look like buttons with graphic images on them. The image may be designed to convey a sense of the operation to be performed if the icon is selected.

5 The first row of selectors 56 is configured to correspond to the first level of sections in a document. For example, the first selector 68 in the first row 56 is configured to correspond to the Overview section 16 in the document shown in Figure 2.

10 Each selector is configured so that when the user places the screen pointer 62 over the selector and then selects it with the selecting device 102, the system interface 84 (described above with reference to Figure 1) receives data indicating which selector was selected. The system interface 84 may then determine the document section associated with the selector and send the request to display that section to the controller 82 (described above with reference to Figure 1). Alternatively, the system interface 84 may send to the controller 82 the identification of the chosen selector and let the controller 82 determine what section to display. The controller 82 will cause the document to be searched for the document section that matches the selector chosen. When the chosen section is found, the browser 80 displays in the display window 60 the section of the document structure that corresponds to the selector.

25 Once the desired section is in the display window 60, the user may navigate within the section by selecting one of the second row of selectors 58. Each time a selector from the first row of selectors 56 is selected, the second row of selectors 58 is configured to correspond to the sub-sections 14 within the section 12 being displayed (as shown in Figure 2). A document structure having sub-sections within its sub-sections may also be accommodated so that three rows of

selectors might be present in the user interface. The number of sub-sections within sections of a document may be further accommodated with rows of selectors as desired, or as limited by system constraints, such as the size of the display window 60.

The user may also navigate within the section by controlling the display window scroll bar 96 with the screen pointer 62 and the selecting device 102.

To describe the manner in which the selectors 56, 58 in the browser user interface 50 are configured, the initialization of the browser will be described in conjunction with exemplary files or data structures that are utilized during browsing operations. It is to be understood that this is only one implementation of the preferred embodiment, and that the files may be replaced, or integrated, or revised to form different data structures without departing from the scope of the invention. Furthermore, the Dynatext development tools may be replaced by other functionally equivalent tools.

In the presently preferred embodiment, documents are converted into "books" which are actually directory trees that reside in a directory called the "\xyz\books" directory. The terms "book," "collection" and "library" are defined and used according to the specifications of the Dynatext development system.

In order to create the Dynatext books, the documents that have been coded as illustrated in Figure 3 are supplied as input to a utility called DYNATAG which is a component of the Dynatext system. DYNATAG creates a DTD (as shown in Figure 4) and an SGML instance (as shown in Figure 3) of the document. The SGML instance and the DTD are used as input files to MKBOOK, another Dynatext utility. The MKBOOK utility creates a binary instance of the document, a directory tree, or a "book," and some of the support files used by the browser 80. For example, the document for

Widget having the structure for products descriptions defined in Figure 2 is processed with MKBOOK to create the book "\xyz\books\widget," a sub-directory of "\xyz\books."

5 The browser 80 uses a number of data files to define how a document is found and displayed in the browser. These files and their names in the preferred embodiment are 1) the browser executable (browser.exe); 2) an initialization file (browser.ini); 3) a set of
10 dynamic link libraries (sit.dll, cgmzv.dll, & ct13d.dll); 4) a bks file which is an ASCII file that contains information about a book, a library or collection of documents, and names in the browser menus (named *.bks where the * represents the name of a
15 document); 5) a bitmap containing up to 100 regions for icons (named *.bmp or default.bmp) and 6) an ASCII file that provides the linking of the document element names to the icons in the bmp file and for pop-up text in the executable (named *.map or default.map).

20 The execution of the browser 80 will be described with reference to Figure 6 which is a flowchart describing the steps taken to browse a document. When the user starts the structured document browser in the manner described above in reference to
25 Figure 1, the operating system launches the browser.exe executable file as shown at block 120. This file is located in a directory called the "\xyz" directory. When browser.exe is launched it first looks for the three required dynamic link libraries (DLL's) in the
30 same directory as shown at block 122. The DLL's, supplied by Electronic Book Technologies, contain functions related to the user interface, SGML processing and access to the books.

35 If the DLL's are available, the browser then checks for the browser.ini file as shown in 124. If

the browser.ini file is present, the browser 80 reads its contents, as shown at block 126.

As the sample file in Table 1 shows, the browser.ini file contains objects, or data structures that include the [Files] object, the [DTEXT] object, and the [MAP] object. The [FILES] object defines an annotation file. The annotation file is a repository for feedback from users of the browser regarding the documents being reviewed. The [DTEXT] object contains file names that the executable will use to find the location of the data directory, security key, and public and private directories. The [MAP] object provides the file name of the initial map file that is to be loaded (typically, the name is "default.map"). The map file, as discussed in detail below, contains the associations between the document elements and the icons.

TABLE 1: Sample browser.ini File

```
[Files]
AnnotationFile=\xyz\annot.txt
[DTEXT]
DATA_DIR=\xyz\data
DTEXT_AUTH=@\xyz\data\security
PUBLIC_DIR=\xyz\tmp\public
PRIVATE_DIR=\xyz\tmp\private
[MAP]
Icons=default.bmp
```

Referring back to Figure 6, once the browser.ini file is processed at 126, the browser checks for a file called default.bks at block 128. The default.bks file is an ASCII file which provides the browser with the information required to display a standard initial document, such as a document that displays a message of the day.

If a default.bks file is not found, the browser initializes without a book as shown at 130. Otherwise, the contents of default.bks are loaded as

shown at 132 and the user interface is presented on the display to the user as shown at 134.

The bks files will be described by reference to Figure 7. The bks files are ASCII files that
5 contain information about how the book should be loaded into the menus in the browser and which map file to use. The bks file always begins with the [Book] object 140 in Figure 7. The next line identifies the "collection." In a preferred embodiment, a collection,
10 also called a library, refers to the directory containing the books to which the browser 80 has access. In Figure 7, the collection is located in the "\xyz" directory.

The next line in a bks file as shown in
15 Figure 7 identifies the collection title 144 which defines a document type for the document type menu 54. The collection title 144 is an alias for the group of books that will be listed under a heading in the document type menu 54 called "Products."

20 The name of the book 146 is on the next line of the bks file. The book name is actually the name of the directory tree that must be present under the collection path specified in line two 142 of the bks file. The book title at 148 specifies an alias for the
25 book. The book title contains the name the user will see on the document menu 52 (at Figure 5). The map file name 150 is optional. It designates the map file that associates the tag names with the icons in the .bmp file. If specified, the browser will use the file
30 name 152 to access the map file. Otherwise, the browser will assume a file name based on a pre-defined naming convention.

Referring back to Figure 6, a user requests a
35 document 160 by using the document menu 52 or the document type menu 54 in the user interface 50 (shown in Figure 5). When the menu is selected (before a

document is selected), the bks file is read in and the menu lists document and document type names according to the contents of the bks file. When a user requests to receive a document as shown at 160, the browser
5 retrieves the document itself as shown at 162 and the map file associated with that document as shown at 164.

The browser then verifies that the elements in the map file match the SGML DTD and the structure codes in the document as shown at 166. If there are no
10 discrepancies, the browser 80 reads the bmp file as shown at 168 which is specified in the map file. Also, in block 168, the browser 80 locates fly-by text for description of icons. The bmp file allows the browser to display the icons as shown at 170 for the selectors
15 56, 58 (in Figure 5). The browser also displays the text in the chosen document as shown at 170.

Once the selectors on the user interface match the structure requirements of the document, the user may select a section of the document to view by
20 pressing a selector button that corresponds to that section as shown at 172. The correspondence between the selectors 56, 58 and the document structure is established in the map file and in the bmp file. This correspondence will be described with reference to
25 Figure 8.

Figure 8 shows a portion of the map file 200 for the document having the structure in Figure 2, a bmp file 210 and the location on the user interface in which the selectors are placed 220. The first object
30 in the map file is the [MAP] object 180 which identifies the data structure. The next line in the map file is the icon line 182 which is a filename that is used by the browser 80 to obtain the bmp file for the structure corresponding to the map file.

35 The next line in the map file shown in Figure 8 contains the [SECTIONS] object 184. The [SECTIONS]

object 184 marks the beginning of a set of definitions of data structures 186 that help tie the selector icons to the sections in the document. The order of these data structures indicates the order in which the sections appear in the document.

The first item under [sections] is "RBW-DOC, PROD.NAME, OVER=1:Overview" 188. The RBW-DOC,PROD.NAME 190 label indicates that the section identified in this line is in the first or highest level section. The OVER label 192 in the line matches the <OVER> tag 26 used to identify the overview section in the marked structure document shown in Figure 3. The expression OVER=1 192 specifies which icon in the bmp file corresponds to the section identified. The text following the colon at 194 is used in fly-by help or bubble help messages. For example, when the screen pointer 62 is positioned over an icon 222 as shown in Figure 8, a Help message 196 is displayed to indicate the function of the button. The expression OVER=1 192 and the fly-by-help text 194 are read by the browser 80 during block 168 in Figure 6.

An example of the bmp file is shown in Figure 8 at 210. The icons are stored in the bmp file as a single rectangular bitmap. Each icon is 16 pixels wide by 15 pixels high. In the presently preferred embodiment, the icons make the selectors appear to be buttons. The icon index starts at 1 and proceeds from left to right. So the icon index might appear as follows:

1	2	3	4	5	6	7	8	9	10
11	12	13	14	15	16	17	18	19	20
21	22	<etc>							

An example of how the map file relates to the bmp file is given in Figure 8. Assume the user moves the screen pointer 62 to the troubleshooting icon, which is the sixth selector or 222 in the top row of

selectors 56 and then selects it. The sixth button 222 corresponds to the sixth icon 224 in the bmp file. The browser 80 refers to the map file at the line RBW-DOC, PROD.NAME,TROUBL=6:Troubleshooting 226 to determine which element name must be searched. The line at 226 defines the TROUBL element as the element that must be searched when the sixth button in the first row 222 is selected.

While every book could have a separate map file and bmp file, these files relate to all books in a library. In other words, all books in the product library should have the same document structure (i.e., document type definition). Thus, a prd.map provides the mappings for all books in the products (i.e., prd) library and, a prd.bmp provides the icons for all books in the products (i.e., prd) library. The icons should relate to the hierarchical structure of the document structure as specified in the document type definition.

Figures 9A & 9B demonstrate the operation of the browser 80 by illustrating the way in which the user interface 50 changes in response to the pressing of a button. Figure 9A shows the user interface 50 in an initial state with the Overview section 16 of the widget products document from Figure 2 in the display window 60. The selectors 58 of the second row are represented by icons that correspond to the sub-sections 246 of the description section.

The user of the browser 80 may wish to view information that is known to exist in the troubleshooting section 18 of the widget product description. As shown in Figure 2, the troubleshooting section 18 is towards the end of the document. Standard documents may be as short as one printed page or long enough to fill several binders. The browser 80 simplifies the retrieval of information by allowing access to a pre-defined section of a document by

pushing a button. The screen pointer 62 may be moved from an initial position 240 to the position over the icon for the troubleshooting button 222. The user then selects the troubleshooting button 222 by enabling the selecting device 102. The browser 80, using the process illustrated in Figure 8, then searches through the binary instance of the document for the troubleshooting section. The browser 80 displays the found section 242 in the display window 60 as shown in Figure 9B. In addition to displaying the found section 242, the browser 80 updates the second row of selectors 58 to correspond to the sub-sections 248 in the found section 242.

The user interface 50 of the browser 80 may be enhanced by adding objects to give the user more tools with which to view the documents. The user interface 50, shown in Figure 9A, includes a next section button 92, a previous section button 94, a go forward button 72, a go backward button 74 and string search tools 78, 86, 88, 89. These objects may be programmed into the browser 80 along with the software components that provide the indicated functions.

When the next section button 92 is selected with the combined action of the screen pointer 62 and the selecting device 102, a user views the next section in the document. For example, the next section after the Overview section 16 in Figure 9A is the Sales section (See Figure 2). Selecting the next section button 92 in Figure 9A causes the browser 80 to display the Sales section. The previous section button 94 operates in the same manner as the next section button 92 except that the previous section is shown.

The go forward button 72 and go backward button 74 may be used to scroll text in the display window 60.

The user interface 50 as shown in Figure 9A may also include string search tools 78, 86, 88. The string search entry box 78 may be used to input a text string that the user wishes to locate in the document.

5 The next found and previous found buttons 86, 88 may be used to display the locations in the document in which the string was found. The clear search button 89 clears the text in the search entry box 78.

The feedback entry function gives the user

10 the ability to provide feedback on a document for those who may browse the document at a later time. As shown in Figure 9B, by selecting a feedback file in a menu, or by selecting a tools button 90, a text box 260 opens up to allow the user to enter a note. The text box 260

15 may be a compilation of messages to which users append notes, or the contents of the text box 260 may be saved into a separate repository of data periodically. In a preferred embodiment, the compilation of messages may be saved to a SGML-based file for support as a document

20 that may be viewed by implementation of the browser 80. In addition, the textbox 260 may be replaced by a view of the messages in the display window 60.

It is to be understood that the appearance of the user interface 50 shown in Figures 9A & 9B is one

25 example of the user interface in the present invention. The appearance and the choice of graphic objects may be varied to suit the needs of the intended users.

Referring to Figure 10, one example of how the user interface 50 may be altered replaces the

30 buttons 56, 58 with other objects. The buttons are merely display regions of the user interface configured to perform a function when selected with the screen pointer 62 and the selecting device 102. In the presently preferred embodiment of Figure 9A, the

35 selectors are represented by button icons. As shown in Figure 10, these icons may be replaced with words or

phrases 268 that are descriptive of the section that they are configured to display.

Another variation, shown in Figure 11, uses a distributed user interface in which the buttons 288 are located in their own window that is detached from the display window 60. Figure 11 illustrates the separate windows 50, 288 as they might appear on a monitor screen 274.

In another variation shown in Figure 12, keys on the keyboard 110 may be configured as functional equivalents of the screen pointer 62 to select document section selectors 56, 58. Figure 12 illustrates a monitor screen 274 connected to a keyboard 110 via connection 275. In one approach to using the keyboard, the selectors 56, 58 may be mapped to function keys 270 on the keyboard 110. In another approach which may be combined with the first approach, the browser 80 may first, highlight a selector in response to certain keys such as a TAB key 266, or an arrow key 264, and then select the highlighted selector 280 in response to another key such as the ENTER key 272.

The user interface 50 may also be implemented in an environment that lacks a GUI, such as a character-based system interface. In an example of such an implementation shown in Figure 13, the selectors 56, 58 are words or phrases that have features such as a character-based border identifying them as selectors. The user then selects a selector using the keys on the keyboard as described above.

In another example of a character-based user interface 50, the selectors 56, 58 are not used at all and the entire screen is the display window. Function keys 270 on the keyboard 110 are implemented in place of the selectors. The function keys 270 may be mapped according to the labels indicated at 290.

It is to be understood that this specification is provided by way of illustration and that it is only the claims and their equivalents that define the invention.

WE CLAIM:

1. In a computer, a browser for viewing documents having embedded codes that identify parts of documents according to at least one predefined document structure, said browser comprising:

5 a user interface comprising a display window that displays document to a user;

a plurality of input devices;

10 a plurality of display regions that are responsive to said input devices, said display regions accessible to the user regardless of what part of the document is in the display window, and configured to correspond to respective parts of the predefined document structure; and

15 a controller operative to cause a selected part of the document to be displayed on the display window when a user uses one of said input device to enable one of said display regions that corresponds to the selected part.

2. A browser as claimed in Claim 1 wherein said plurality of input devices comprises:

5 a screen pointer that moves on the display window of the user interface and maintains a current position responsive to a user controlled pointing device; and

a selecting device that selects the current position of the screen pointer when enabled by a user;

10 wherein the controller causes a selected part of the document to be displayed on the display window when a user moves the screen pointer to the display region that corresponds to the selected part and enables the selecting device.

3. A browser as claimed in Claim 2 wherein said plurality of input devices further comprises:

5 a first set of keys on a keyboard, each of
said keys configured to highlight one of said display
regions that is next in a sequence of said display
regions as one of said first set of keys is pressed;
and

10 at least one select key on the keyboard
configured to select the highlighted region when said
select key is pressed;

15 wherein the controller causes a selected part
of the document to be displayed on the display window
when a user presses said at least one select key while
the display region that corresponds to the selected
part is highlighted.

4. A browser as claimed in Claim 1 wherein said
plurality of input devices comprises:

5 a set of keys on a keyboard, each of said
keys configured to correspond to a specific part of the
predefined document structure;

wherein the controller causes a specific part
of the document to be displayed in the display window
when a user presses the key that corresponds to the
specific part.

5. A browser as claimed in Claim 1 wherein the
embedded codes that identify parts of the document
conform to a document type definition that has been
prepared according to the Standard Generalized Markup
Language (SGML).

6. A browser as claimed in Claim 1 wherein the
embedded codes that identify parts of the document
according to a predefined structure conform to the
Hyper-Text Markup Language (HTML).

- 28 -

7. A browser as claimed in Claim 1 wherein the embedded codes are elements of SGML and the coded document is an SGML instance according to an SGML document type definition.

8. A browser as claimed in Claim 2 further comprising a document menu that lists documents that the user can select for viewing by moving the screen pointer to the document menu and enabling the selecting device.

9. A browser as claimed in Claim 8 further comprising:

a next part region that has been predefined to display a next part in the document when the next part region is selected by the user by moving the screen pointer to the next part region and enabling the selecting device; and

a previous part region that has been predefined to display a previous part in the document when selected by the user by moving the screen pointer to the previous part region and enabling the selecting device.

10. A browser as claimed in Claim 7 further comprising a document type menu that lists at least one document type having a predefined structure that can be selected to alter the document menu to list documents that conform to the predefined structure of the document type selected by moving the screen pointer to the document type menu and enabling the selecting device.

11. A browser as claimed in Claim 8 further comprising a region on the user interface that is

- 29 -

predefined to correspond to the action of opening a new display window in which the user can input a note.

12. In a computer, a method for browsing a document within the context of a predefined document structure comprising the steps of:

5 initializing a browsing tool having document navigation tools that include a plurality of display regions that remain accessible during browsing said display regions operative to display a respective section of the predefined document structure;

10 displaying a document; and enabling one of said plurality of display regions to display the respective section.

13. The method of browsing a document as claimed in Claim 12 wherein the plurality of display regions are enabled with a set of keys on a keyboard.

14. In a computer comprising a graphical user interface, a method for browsing a document within the context of a predefined document structure comprising the steps of:

5 initializing a browsing tool having document navigation tools that include a plurality of display regions, said document navigation tools remaining accessible during browsing;

10 displaying a document in a display window; and viewing parts of the document by repeating the steps of:

15 moving a screen pointer that maintains a current position on the display window responsive to a user-controlled pointing device over a selected display region of the document navigation tools configured to

- 30 -

correspond to a corresponding part of the
predefined document structure; and
20 selecting the selected display region by
enabling a selecting device.

15. In a computer with graphical user interface
capabilities, a method for browsing a document within
the context of a predefined document structure
comprising the steps of:

5 creating one or more documents having the
predefined document structure;
 embedding codes in the documents to identify
parts of the predefined document structure;
 initializing a browsing tool having document
10 navigation tools that include a plurality of display
regions, said navigation tools remaining accessible
during browsing;
 displaying a document on a display window;
and
15 viewing parts of the document by repeating
the steps of:
 moving a screen pointer that maintains a
current position on the display window
responsive to a user-controlled pointing
20 device over a selected region of the document
navigation tools configured to correspond to
a corresponding part of the predefined
document structure;
 maintaining said selected display region
25 accessible regardless of what part of the
document is in the display window; and
 selecting the selected region by
enabling a selecting device.

- 31 -

16. A method for browsing a document as claimed in Claims 12, 14 or 15 wherein the steps for browsing a document further comprises the steps of:

5 displaying a next part in the predefined document structure of the document by repeating the steps of:

10 moving the screen pointer over a next part region of the document navigation tools configured to display a part of the document that follows a part of the document that is currently displayed in the display window; and

15 selecting the next part region by enabling the selecting device; and

displaying a previous part in the predefined document structure of the document by repeating the steps of:

20 moving the screen pointer over a previous part region of the document navigation tools configured to display a part of the document that follows a part of the document that is currently displayed in the display window; and

25 selecting the previous section region by enabling the selecting device.

17. In a computer comprising a graphical user interface, a browser having a user interface for viewing documents having embedded codes that identify parts of documents according to a predefined document structure, said browser comprising:

5 a display window that displays a portion of the document to a user;

10 a screen pointer that moves on the user interface and maintains a current position responsive to a user controlled pointing device;

- 32 -

a selecting device that selects the current position of the screen pointer when enabled by the user;

15 a document menu that lists documents that the user can select for viewing by moving the screen pointer to the document menu and enabling the selecting device;

20 a document type menu that lists at least one document type having a predefined structure that can be selected to alter the document menu to list documents that conform to the predefined structure of the document type selectable by moving the screen pointer to the document type menu and enabling the selecting device;

25 a plurality of display regions on the user interface, each display region configured to correspond to a respective part of the predefined document structure, and said display regions remaining accessible regardless of what part the document is currently in the display window; and

30

a controller operative to cause a selected part of the document to be displayed on the display window when a user moves the screen pointer to the region that corresponds to the selected part and

35 enables the selecting device.

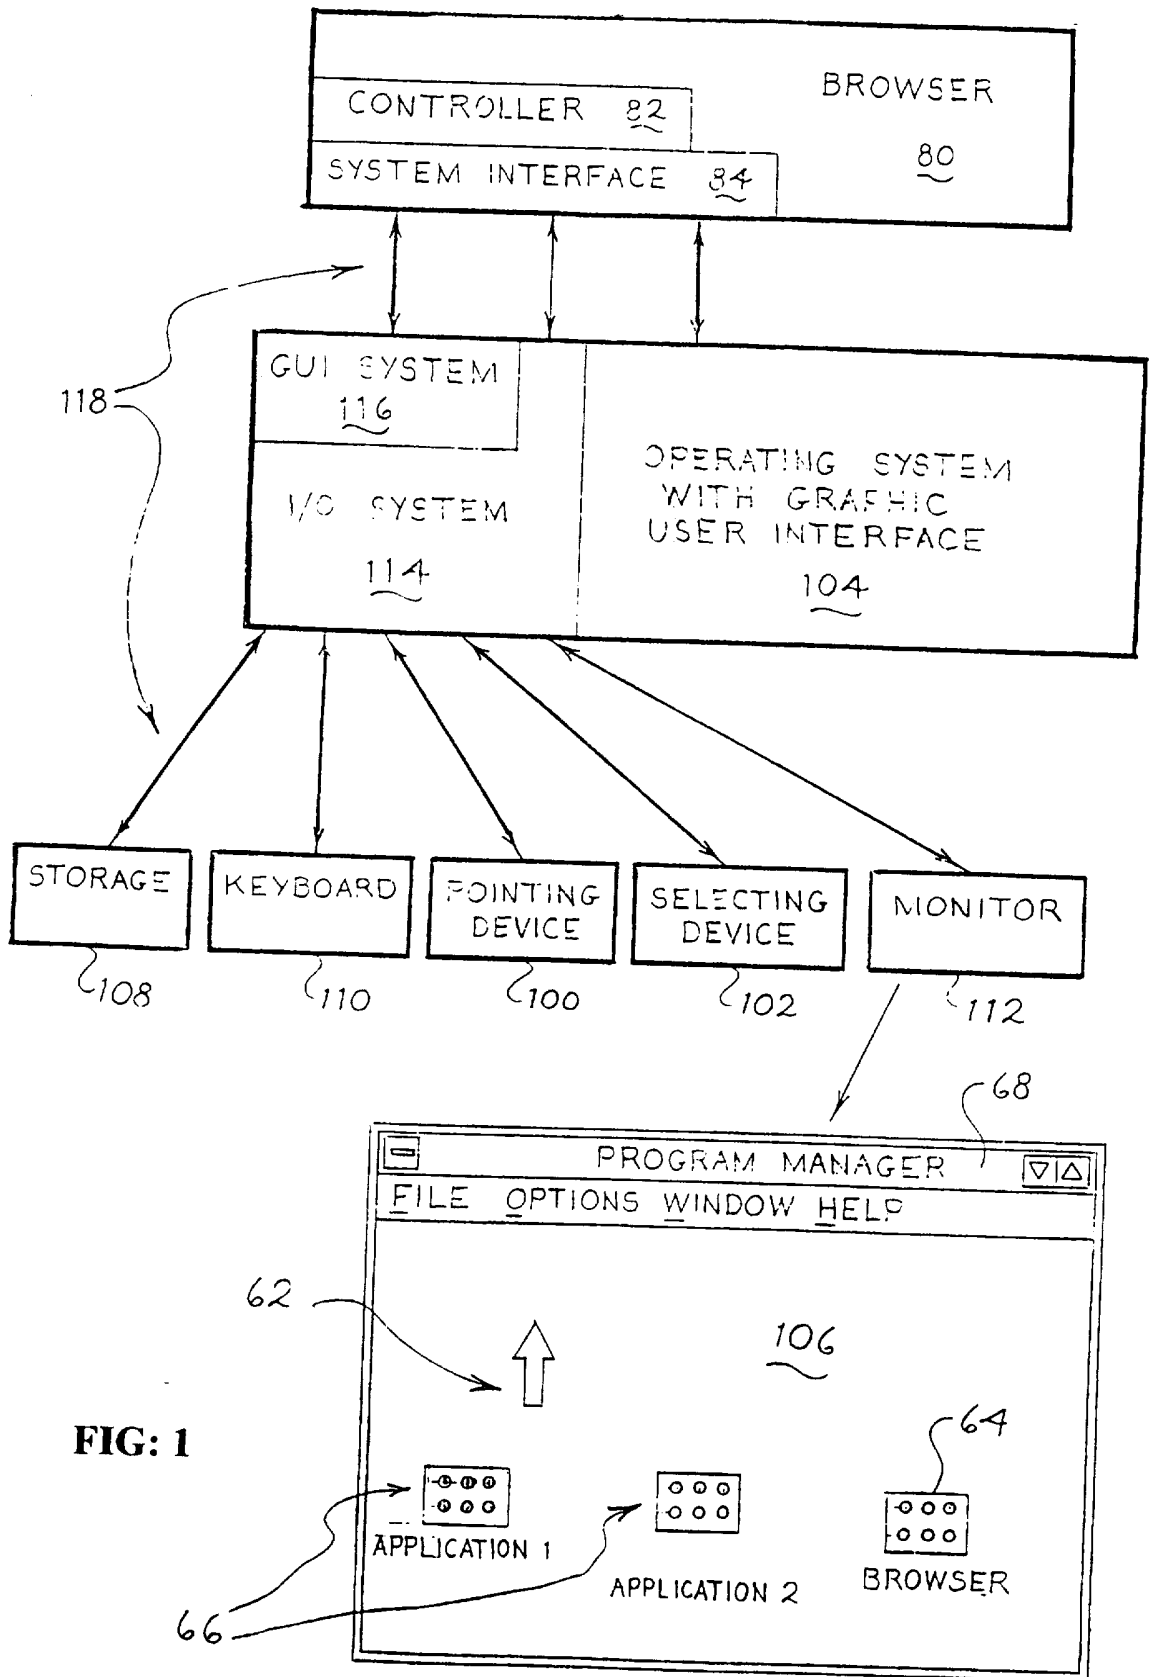


FIG: 1

FIG: 2 (a)


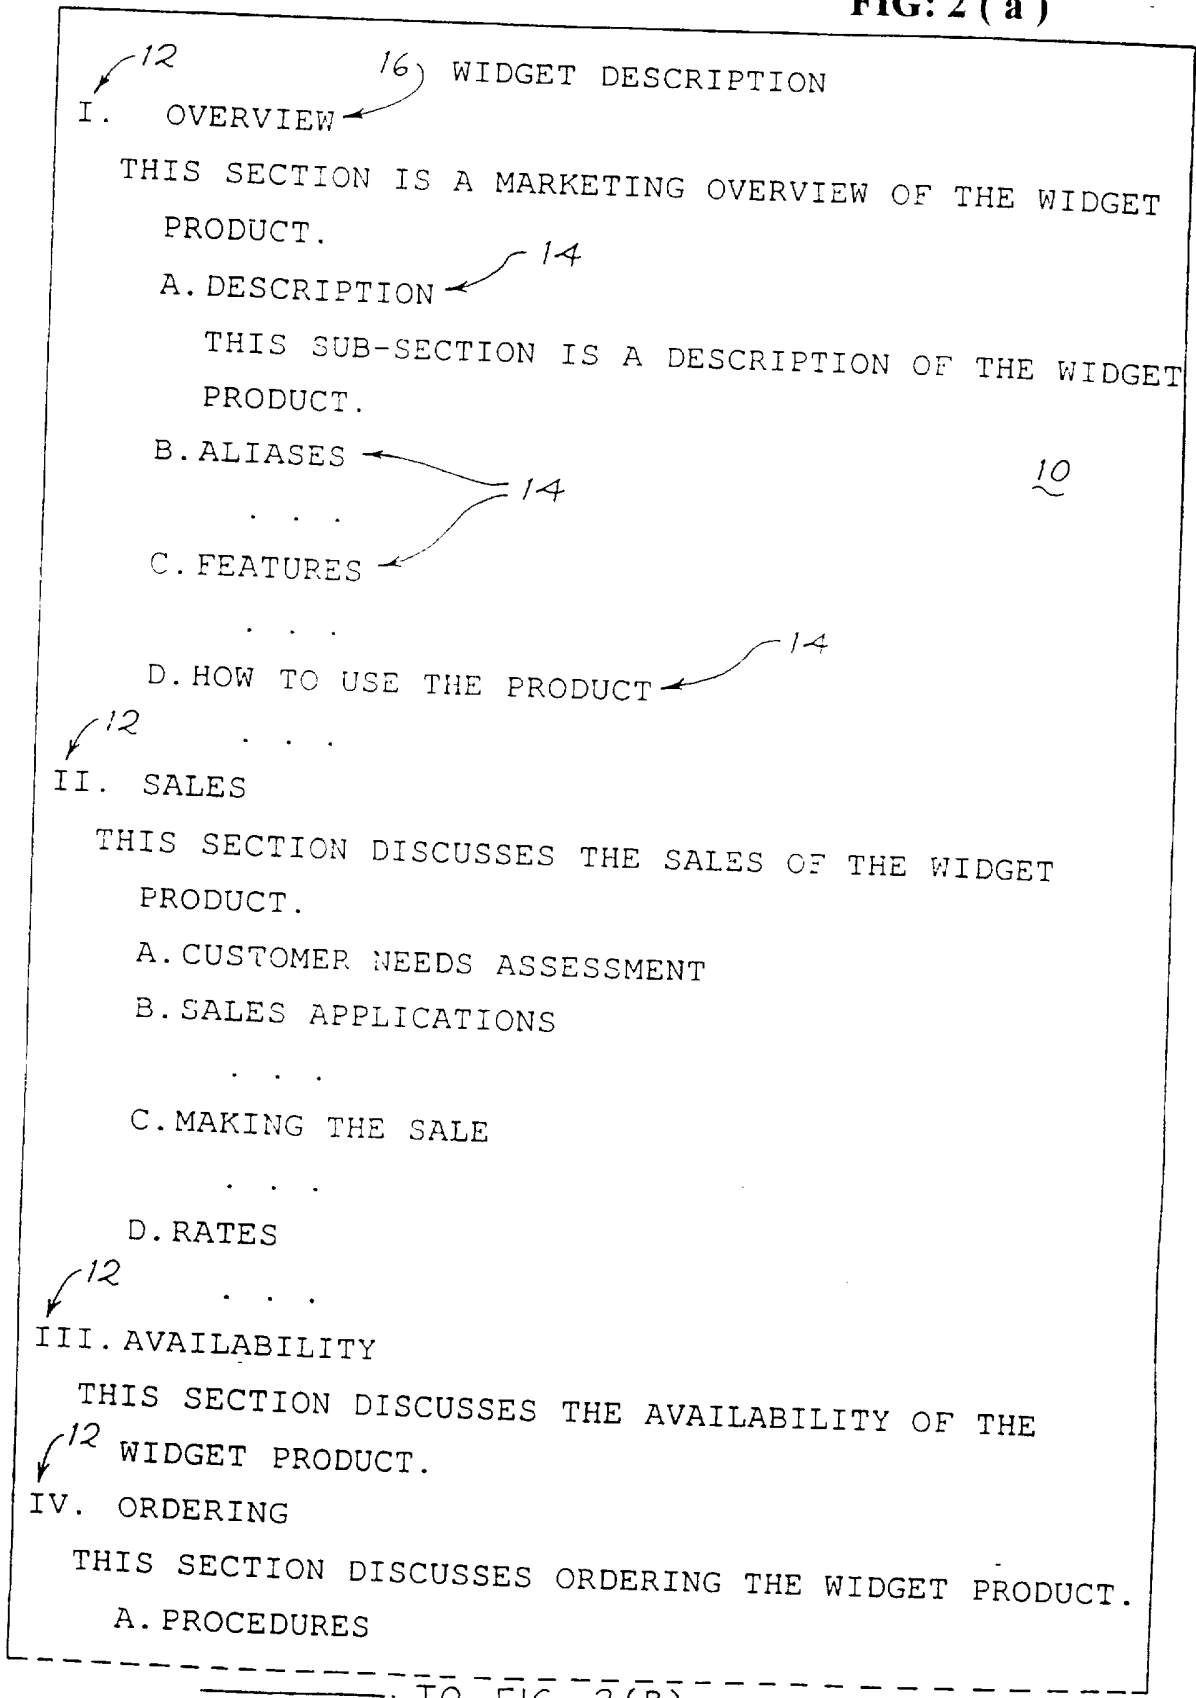


FIG: 2 (b)

TO FIG. 2(A)

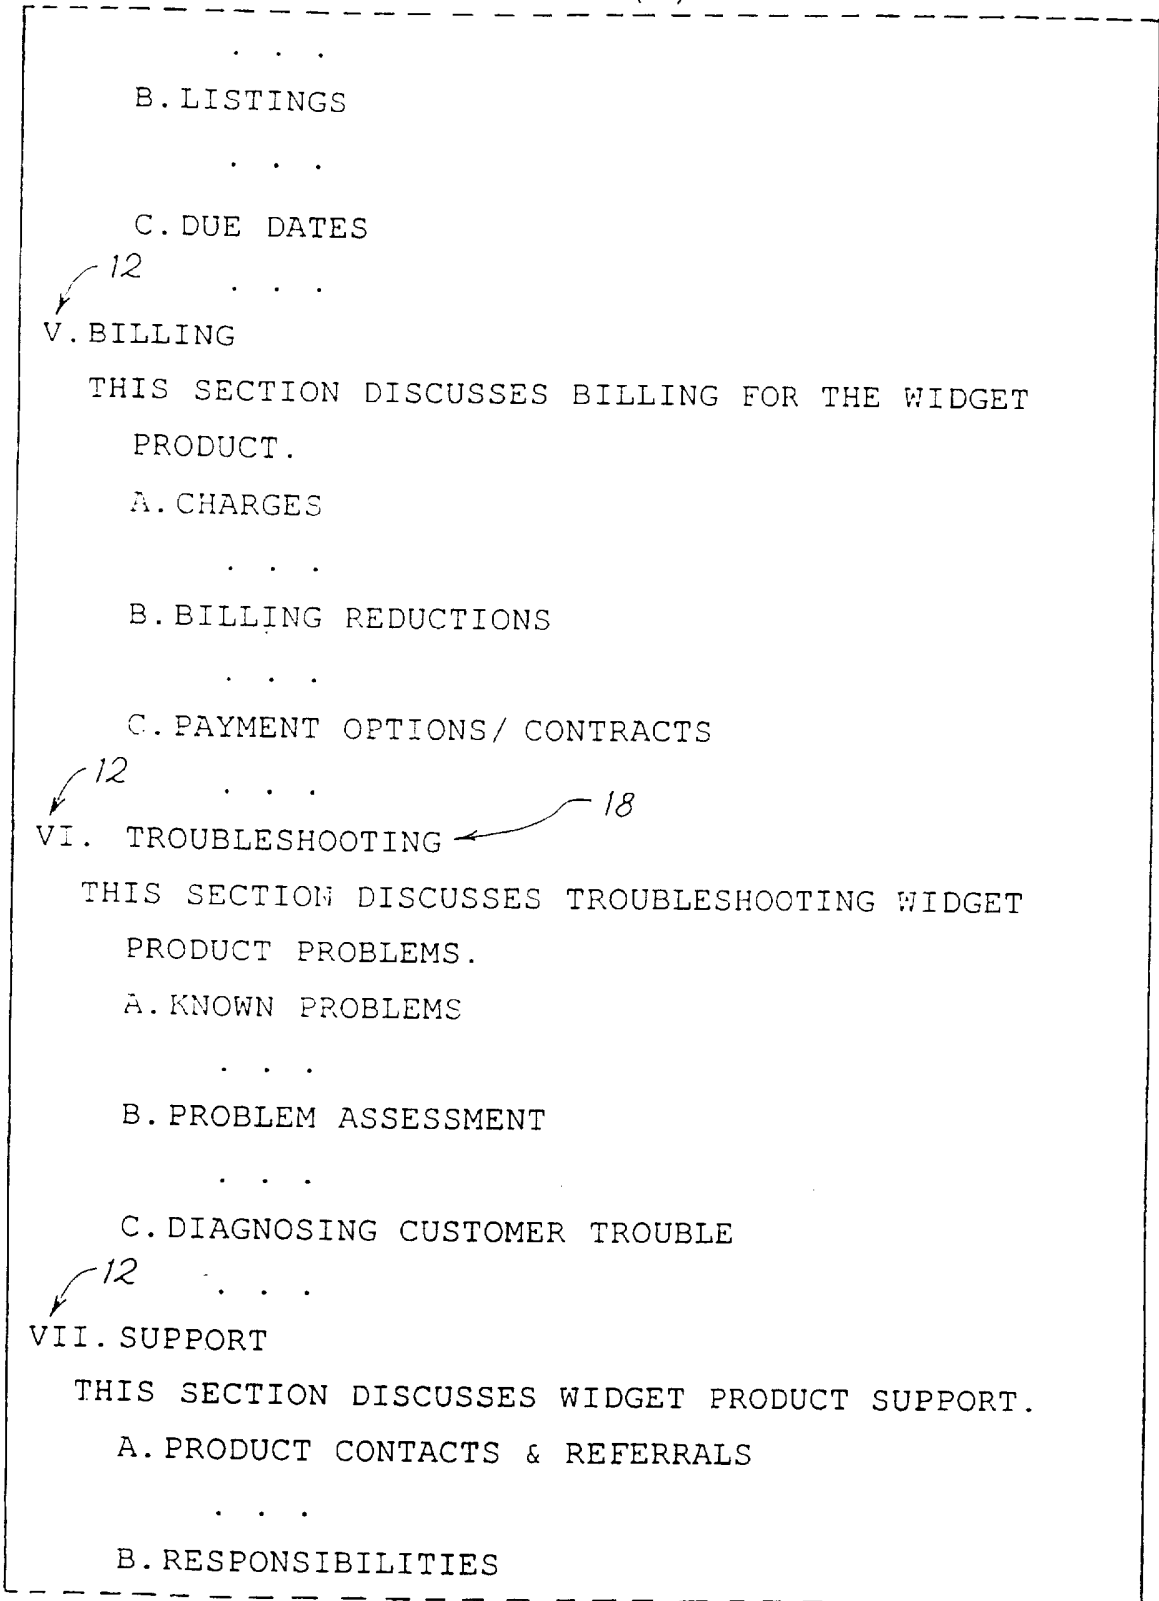

TO FIG. 2(C)

FIG: 2 (c)


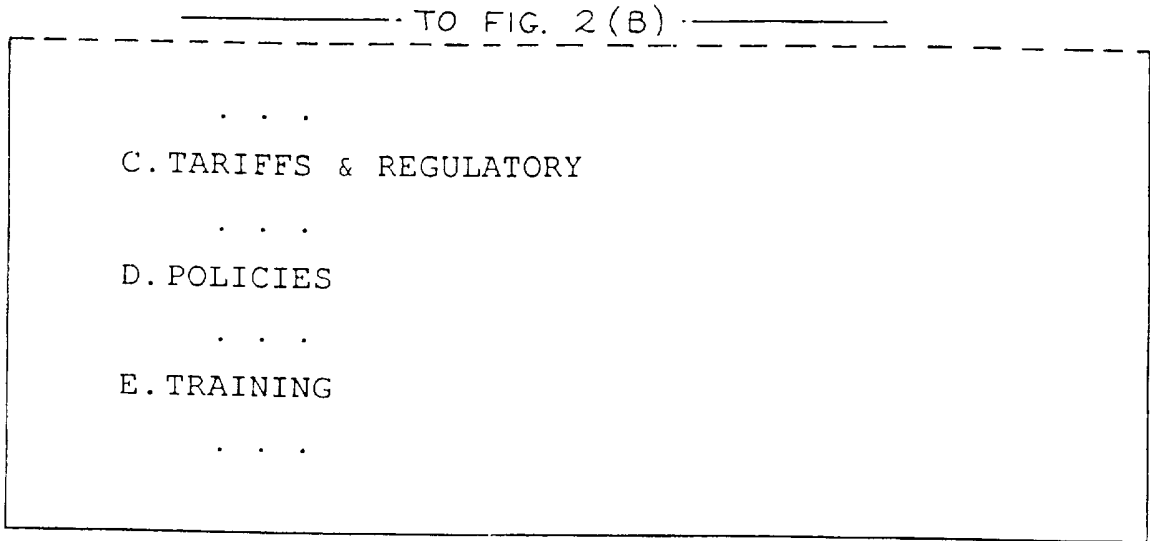


FIG: 3 (a)

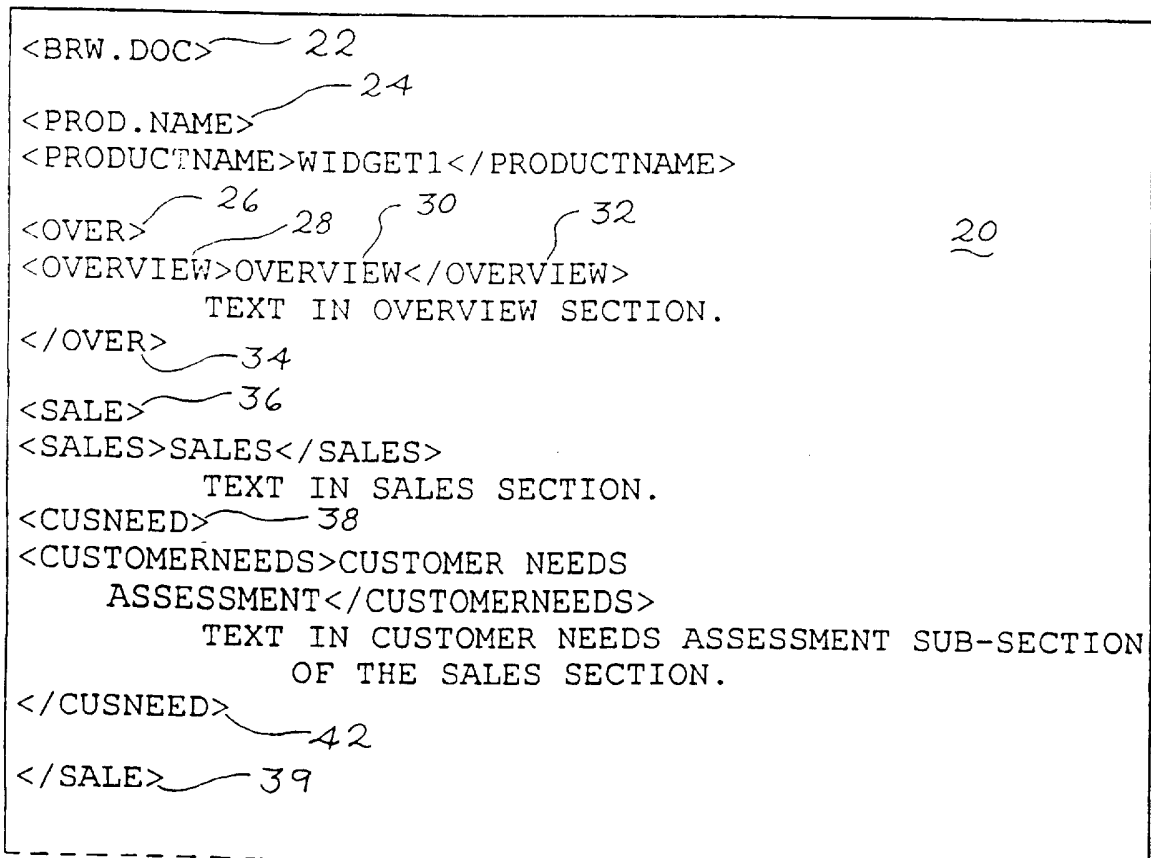

----- TO FIG. 3 (B) -----

FIG: 3 (b)

TO FIG. 3(A)


```
<TROUBL> 25
<TROUBLESHOOTING>TROUBLESHOOTING</TROUBLESHOOTING>
27 TEXT IN TROUBLESHOOTING SECTION.
<TRBL.KNOWPROB>
<TRBLKNOWPROB>KNOWN PROBLEMS>/TRBLKNOWPROB>
TEXT IN THE KNOWN PROBLEMS SUB-SECTION OF THE
TROUBLESHOOTING SECTION.
</TRBL.KNOWPROB>

<TRBL.PROBASSESS>
<TRBLPROBASSESS>PROBLEM ASSESSMENT</TRBLPROBASSESS>
TEXT IN THE PROBLEM ASSESSMENT SUB-SECTION OF
THE TROUBLESHOOTING SECTION.
</TRBL.PROBASSESS>

<TRBL.DIAG>
<TRBLDIAG>DIAGNOSING CUSTOMER TROUBLE</TRBLDIAG>
TEXT IN THE DIAGNOSING CUSTOMER TROUBLE SUB-
SECTION OF THE TROUBLESHOOTING SECTION.
</TRBL.DIAG>

</PROD.NAME>

</BRW.DOC>
```

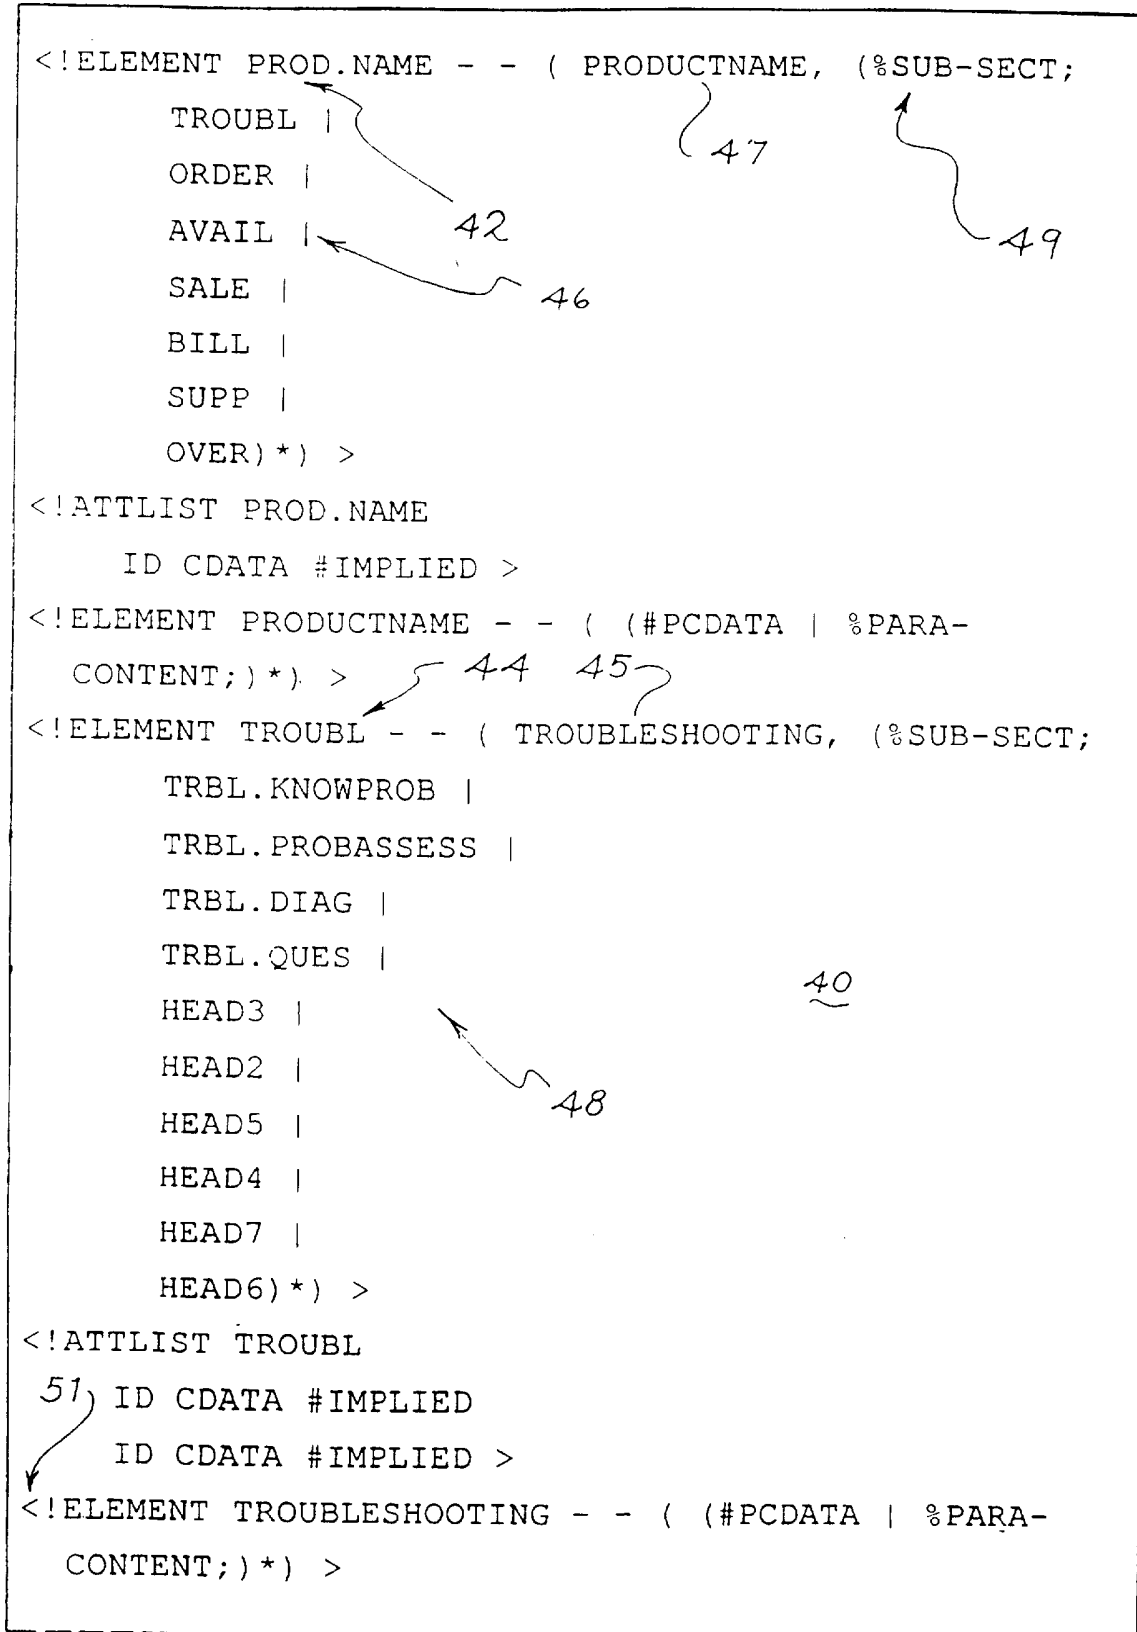

7/16

FIG: 4 (b)

TO FIG. 4(A)

```
<!ELEMENT TRBL.KNOWPROB - - ( TRBLKNOWPROB, (%SUB-
  SECT; |
    HEAD3 |
43 HEAD5 |
    HEAD4 |
    HEAD7 |
    HEAD6)*) >

<!ATTLIST TRBL.KNOWPROB
  ID CDATA #IMPLIED
  TYPE CDATA #IMPLIED >

<!ELEMENT TRBLKNOWPROB - - ( (#PCDATA | %PARA-
  CONTENT;)* ) >

<!ELEMENT TRBL.PROBASSESS - - ( TRBLPROBASSESS,
  (%SUB-SECT; |
43 HEAD3 |
    HEAD5 |
    HEAD4 |
    HEAD7 |
    HEAD6)*) >

<!ATTLIST TRBL.PROBASSESS
  ID CDATA #IMPLIED
  TYPE CDATA #IMPLIED >

<!ELEMENT TRBLPROBASSESS - - ( (#PCDATA | %PARA-
  CONTENT;)* ) >
```

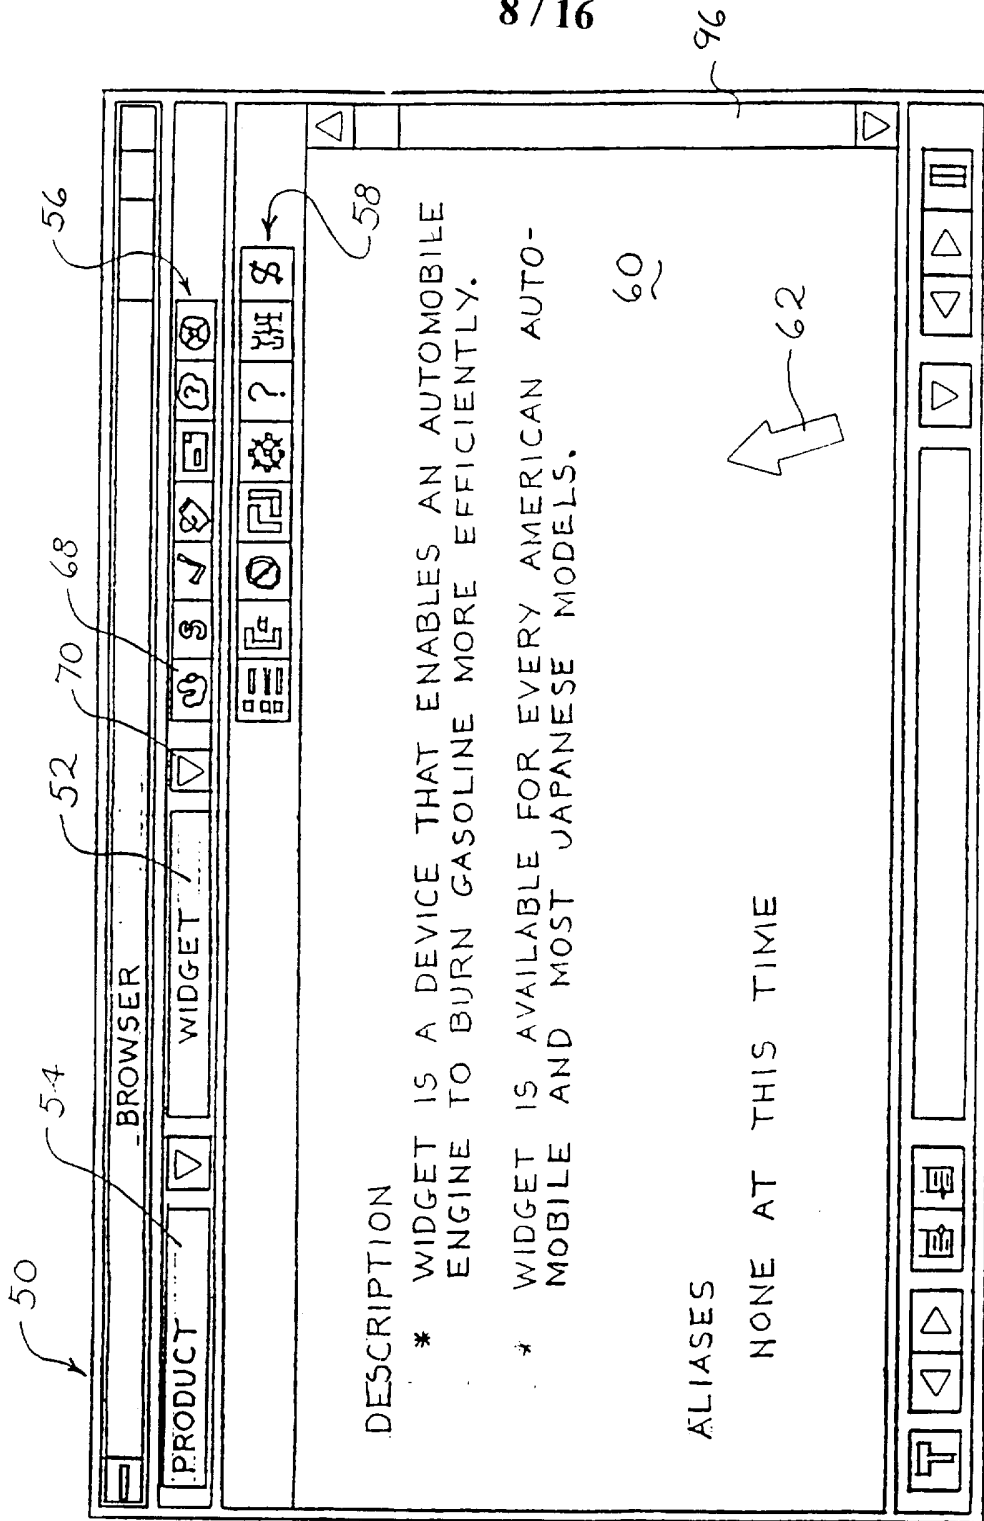


FIG: 5


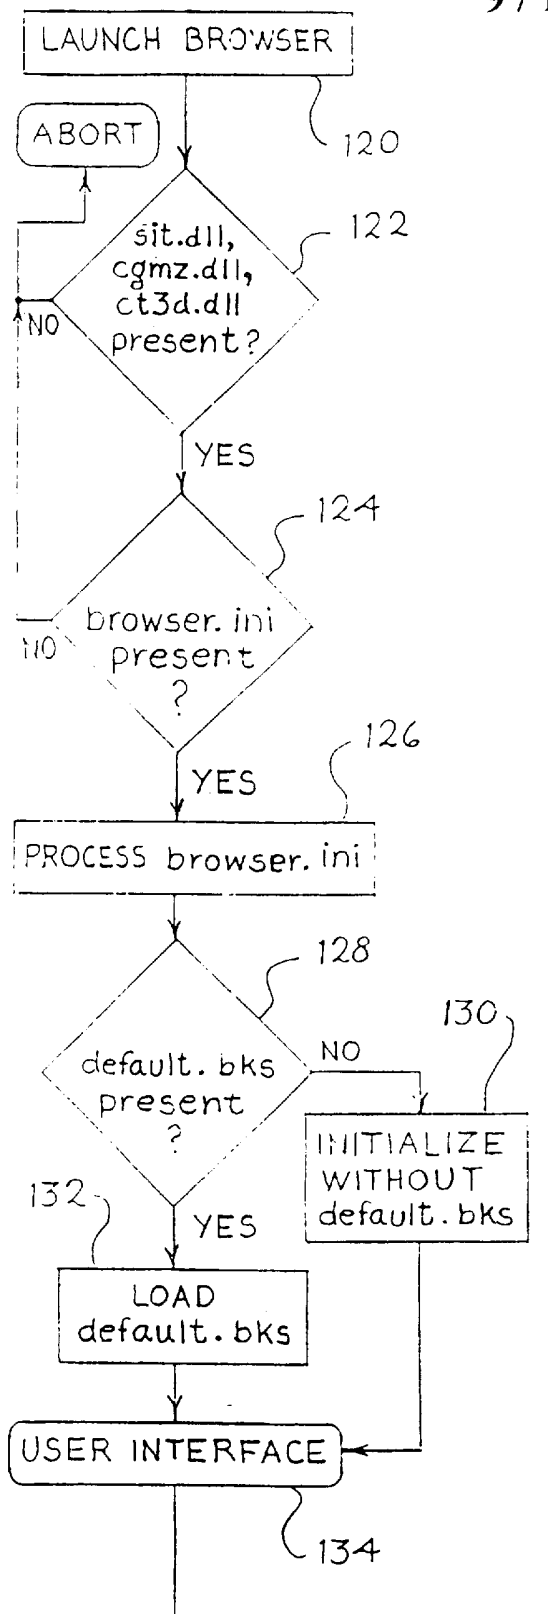


FIG: 6

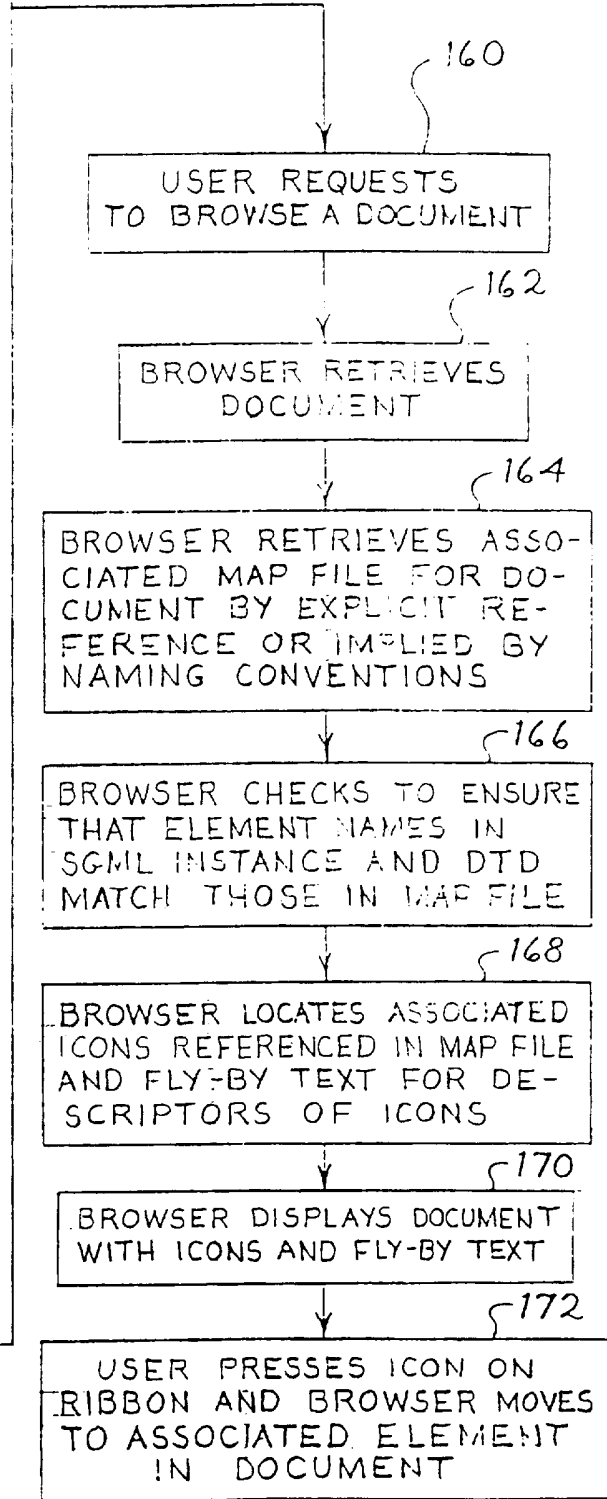

[BOOK] 140
142
144 COLLECTION=\XYZ
146 COLLECTIONTITLE+"PRODUCTS"
148 BOOKNAME=WIDGET
150 BOOKTITLE="WIDGET"
152 MAP=PRD.MAP

FIG: 7

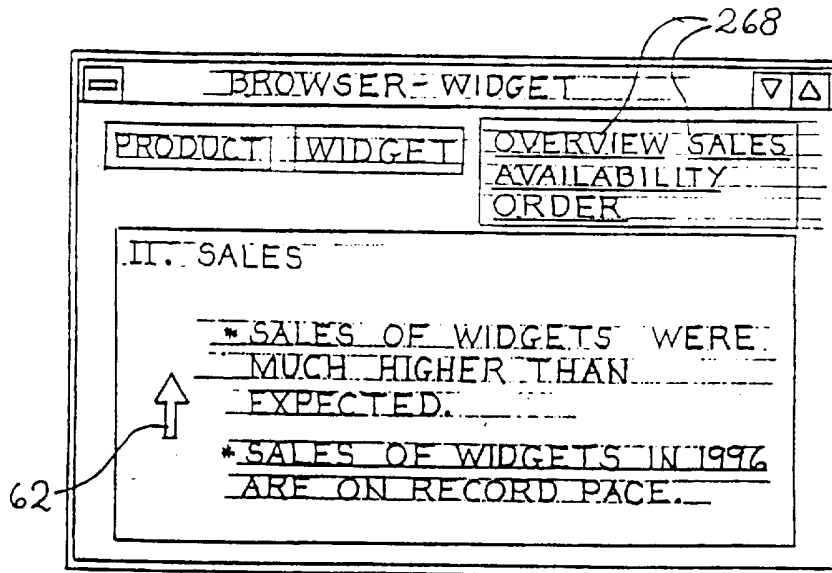


FIG: 10

[MAP] 180

ICONS=DEFAULT.BMP 182

[SECTIONS] 184

RBW-DOC, PROD.NAME, OVER=1:OVERVIEW 190 192 194 188 186

RBW-DOC, PROD.NAME, SALE=2:SALES

RBW-DOC, PROD.NAME, AVAIL=3:AVAILABILITY

RBW-DOC, PROD.NAME, ORDER=4:ORDERING

RBW-DOC, PROD.NAME, BILL=5:BILLING

RBW-DOC, PROD.NAME, TROUBL=6:TROUBLESHOOTING 226

RBW-DOC, PROD.NAME, SUPP=7:SUPPORT

[RBW-DOC, PROD.NAME, OVER]

OVER.DESC=61:DESCRIPTION

OVER.ALIASES=62:ALIASES

OVER.RESTRIC=63:RESTRICTIONS

OVER.INTER=64:INTERACTIONS

OVER.FEAT=65:FEATURES

OVER.HOWTOUSE=66:HOW TO USE THE PRODUCT

OVER.CPE=67:CPE INVOLVEMENT

OVER.RESALE=68:RESALE/SHARING

200

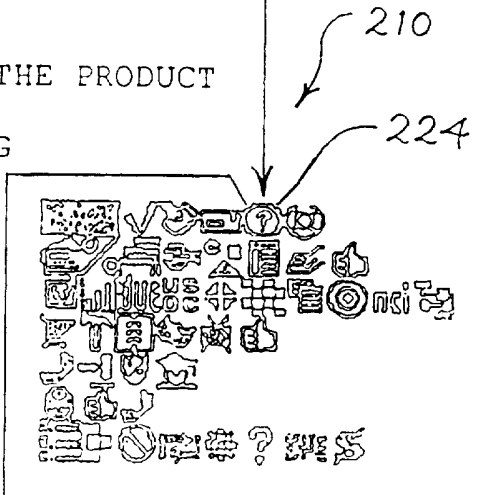
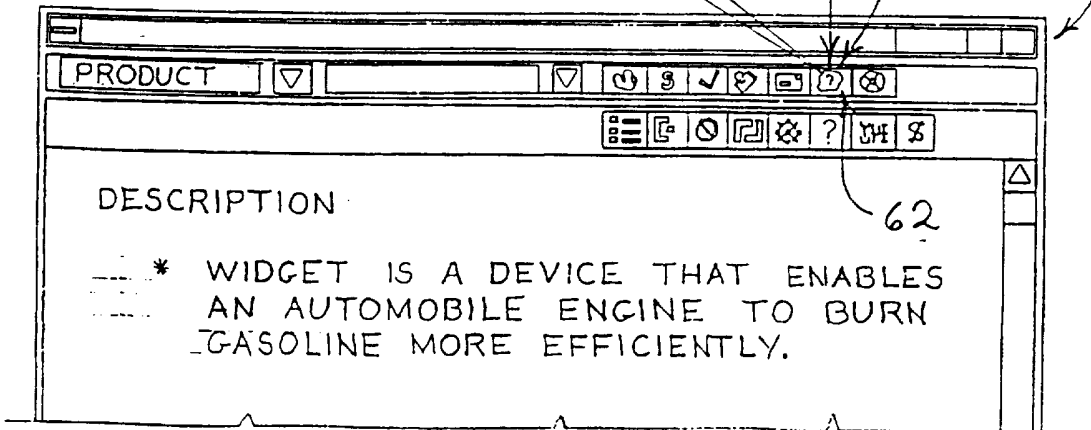


FIG: 8

196

TROUBLESHOOTING



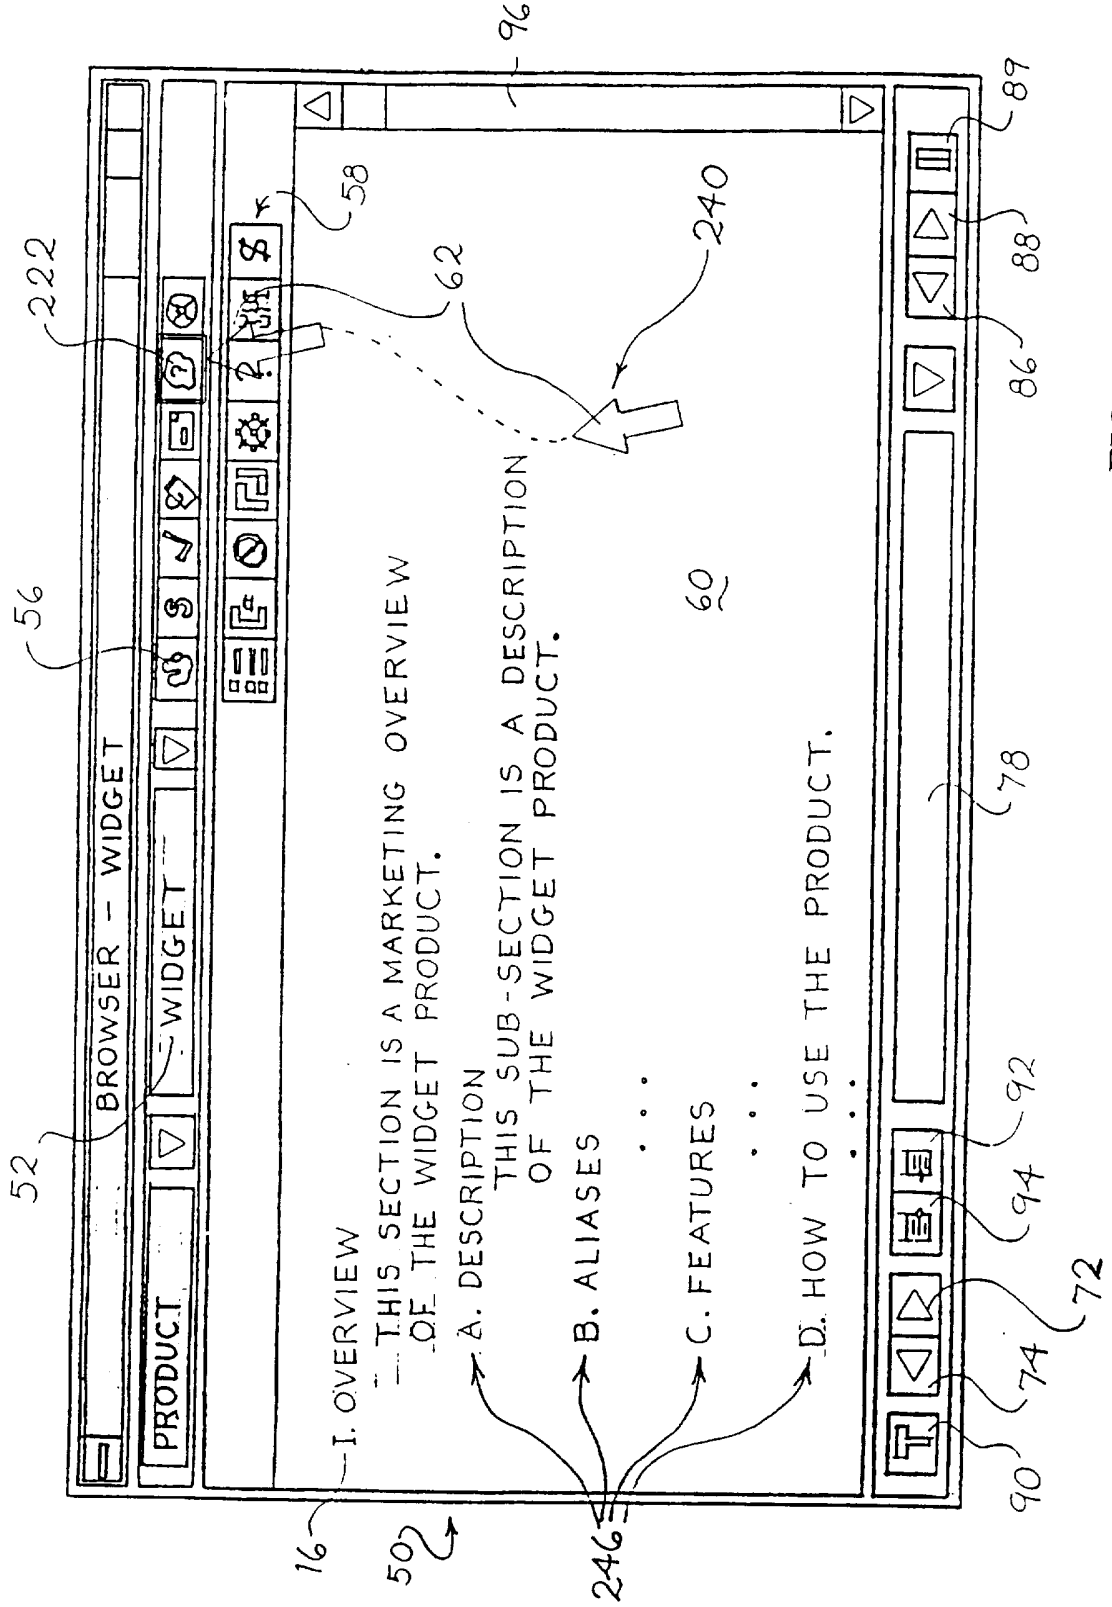


FIG: 9 (a)

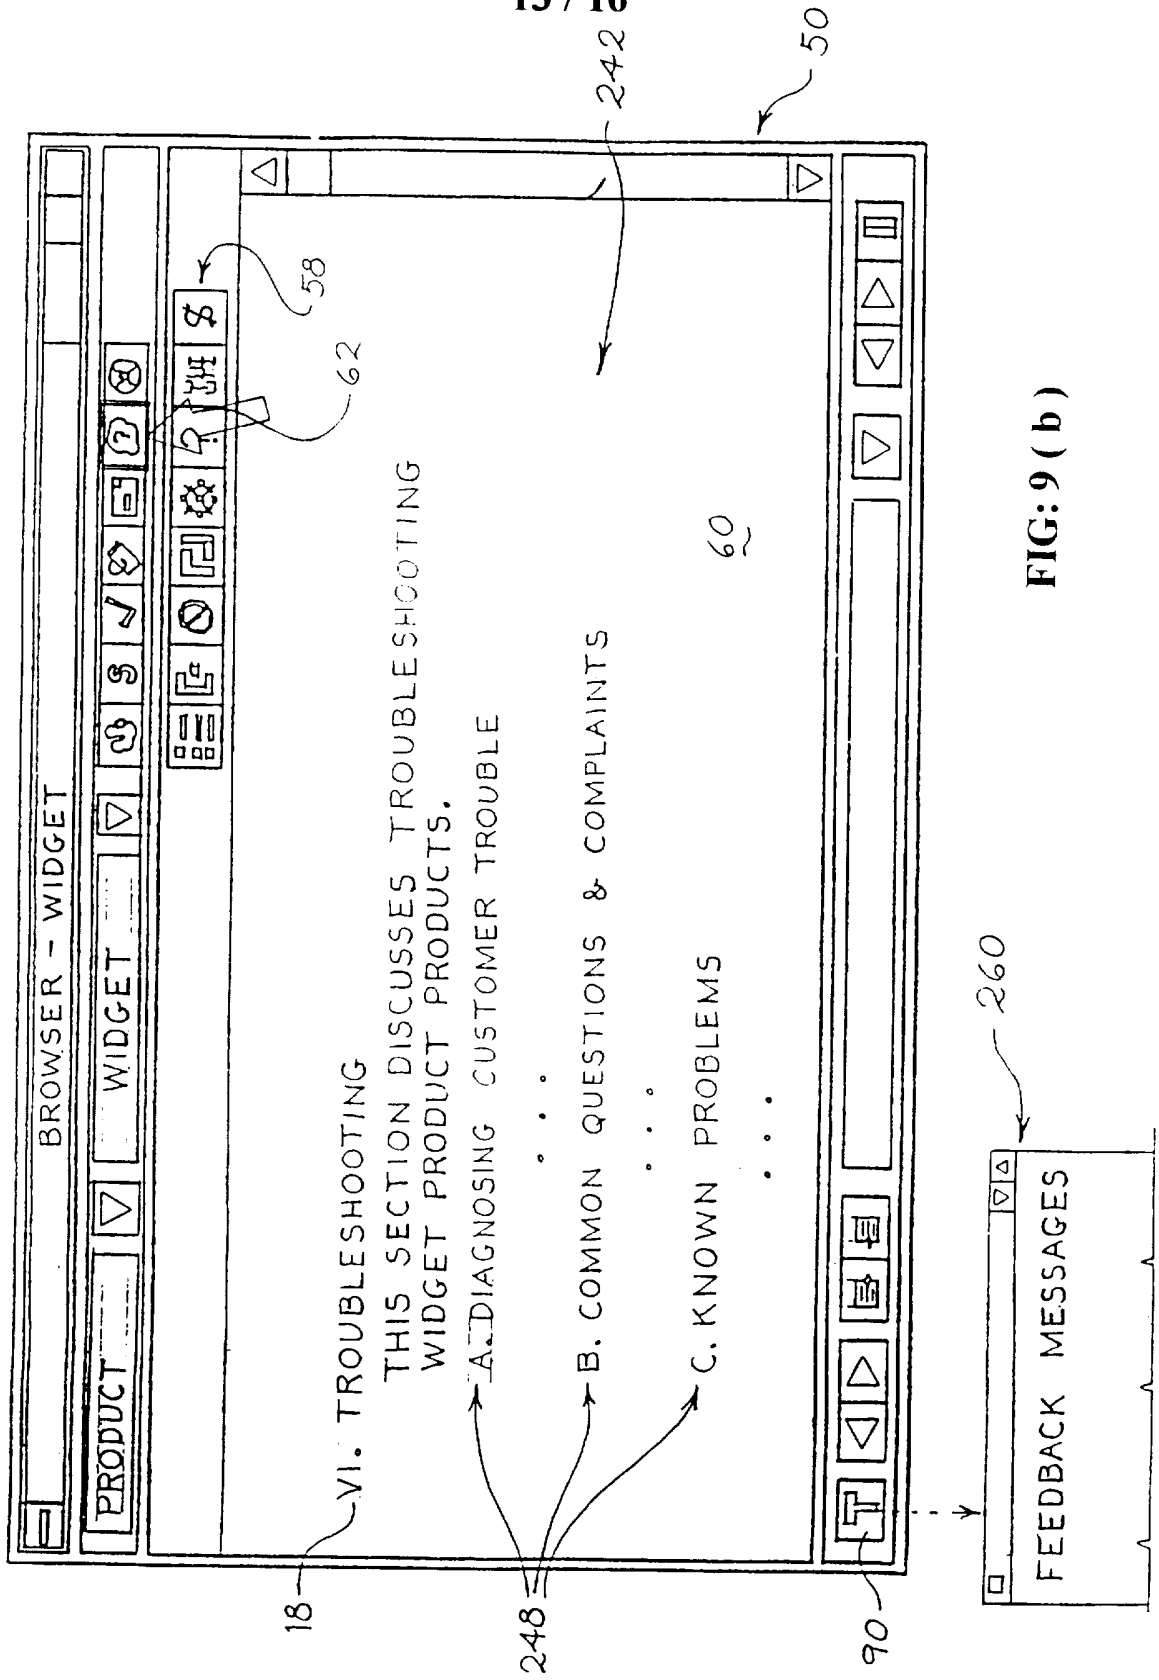


FIG: 9 (b)


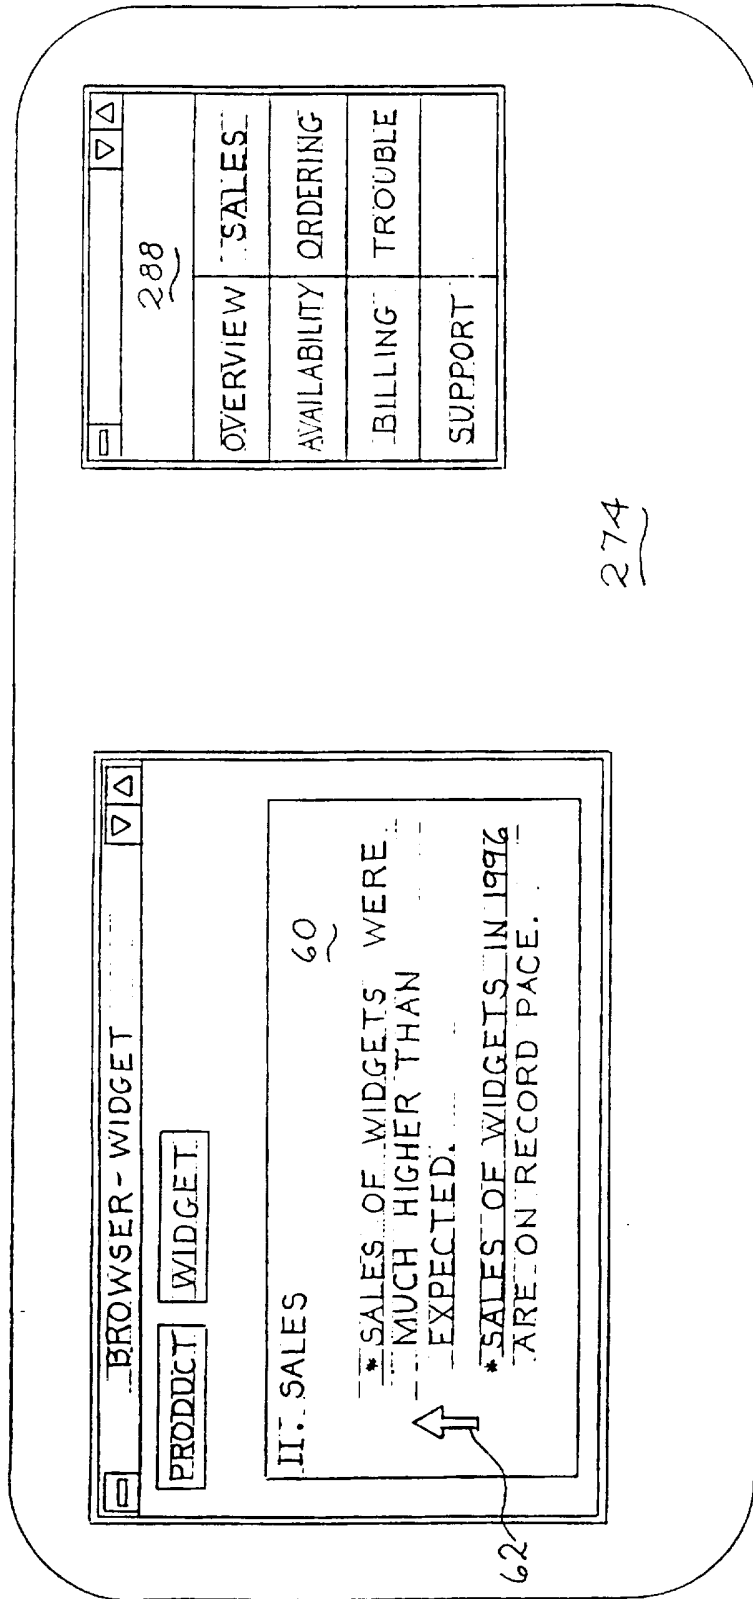



FIG: 11

FIG: 12

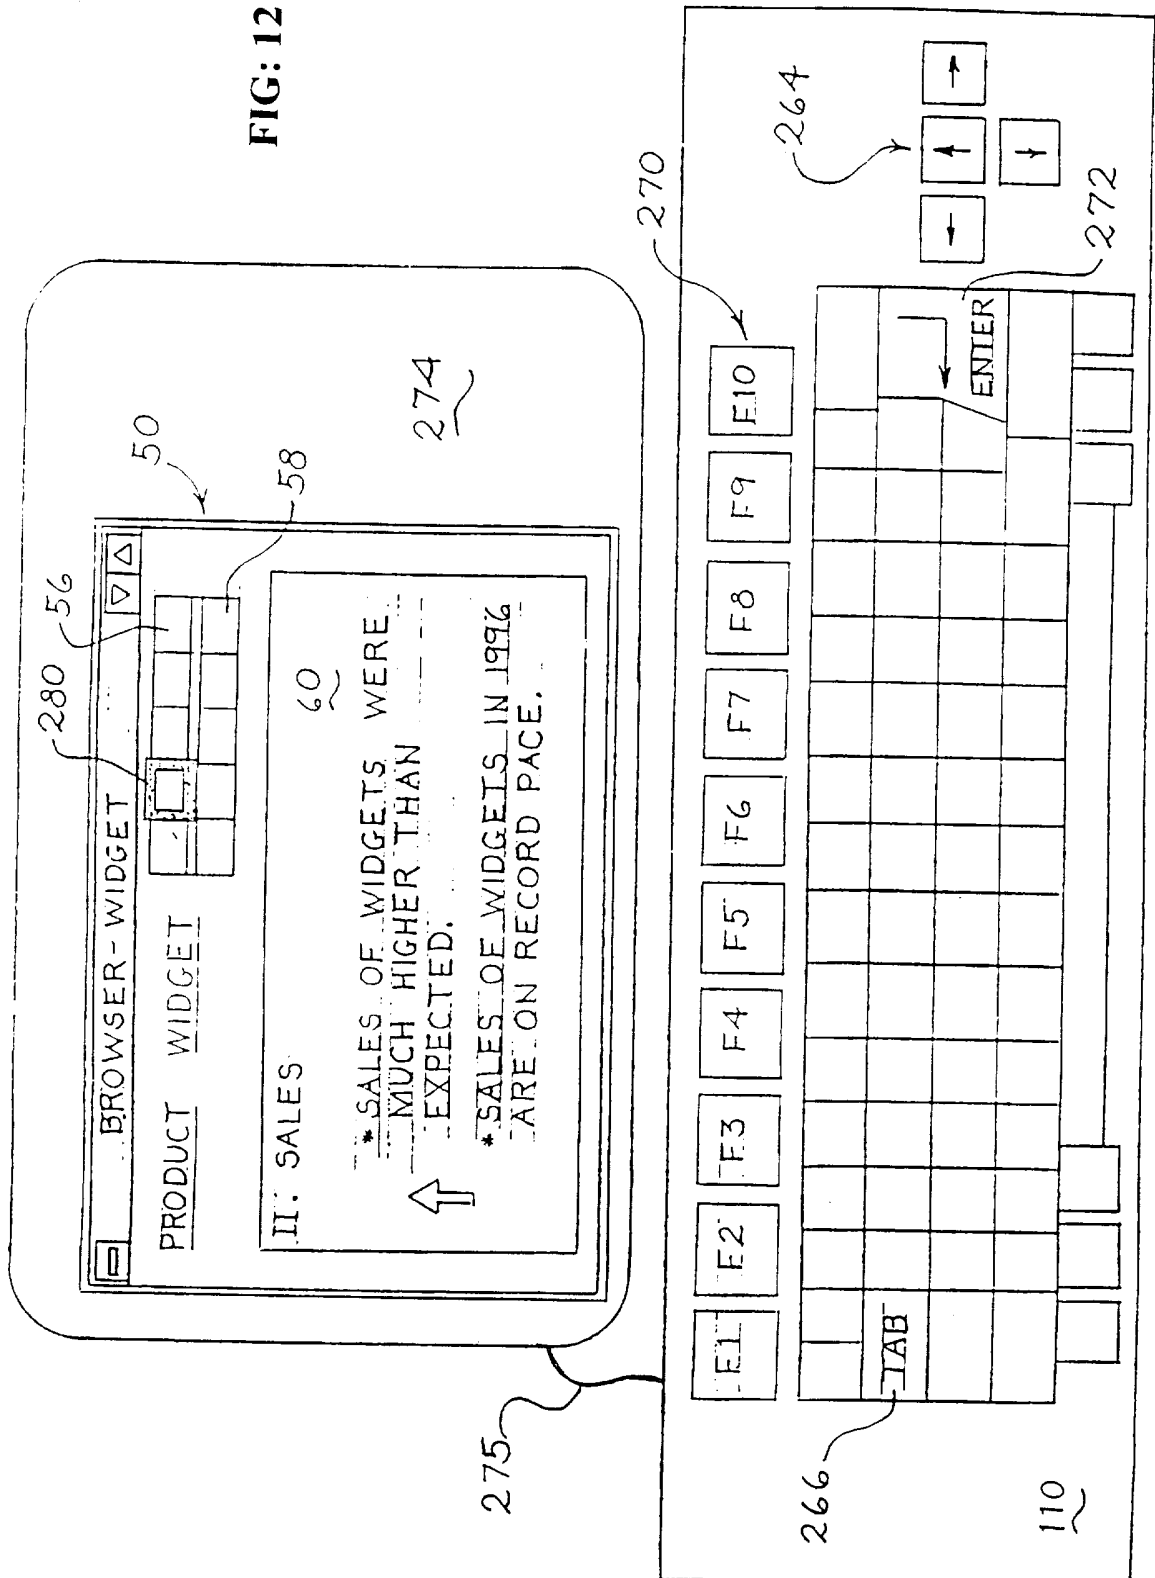

275

FIG: 13

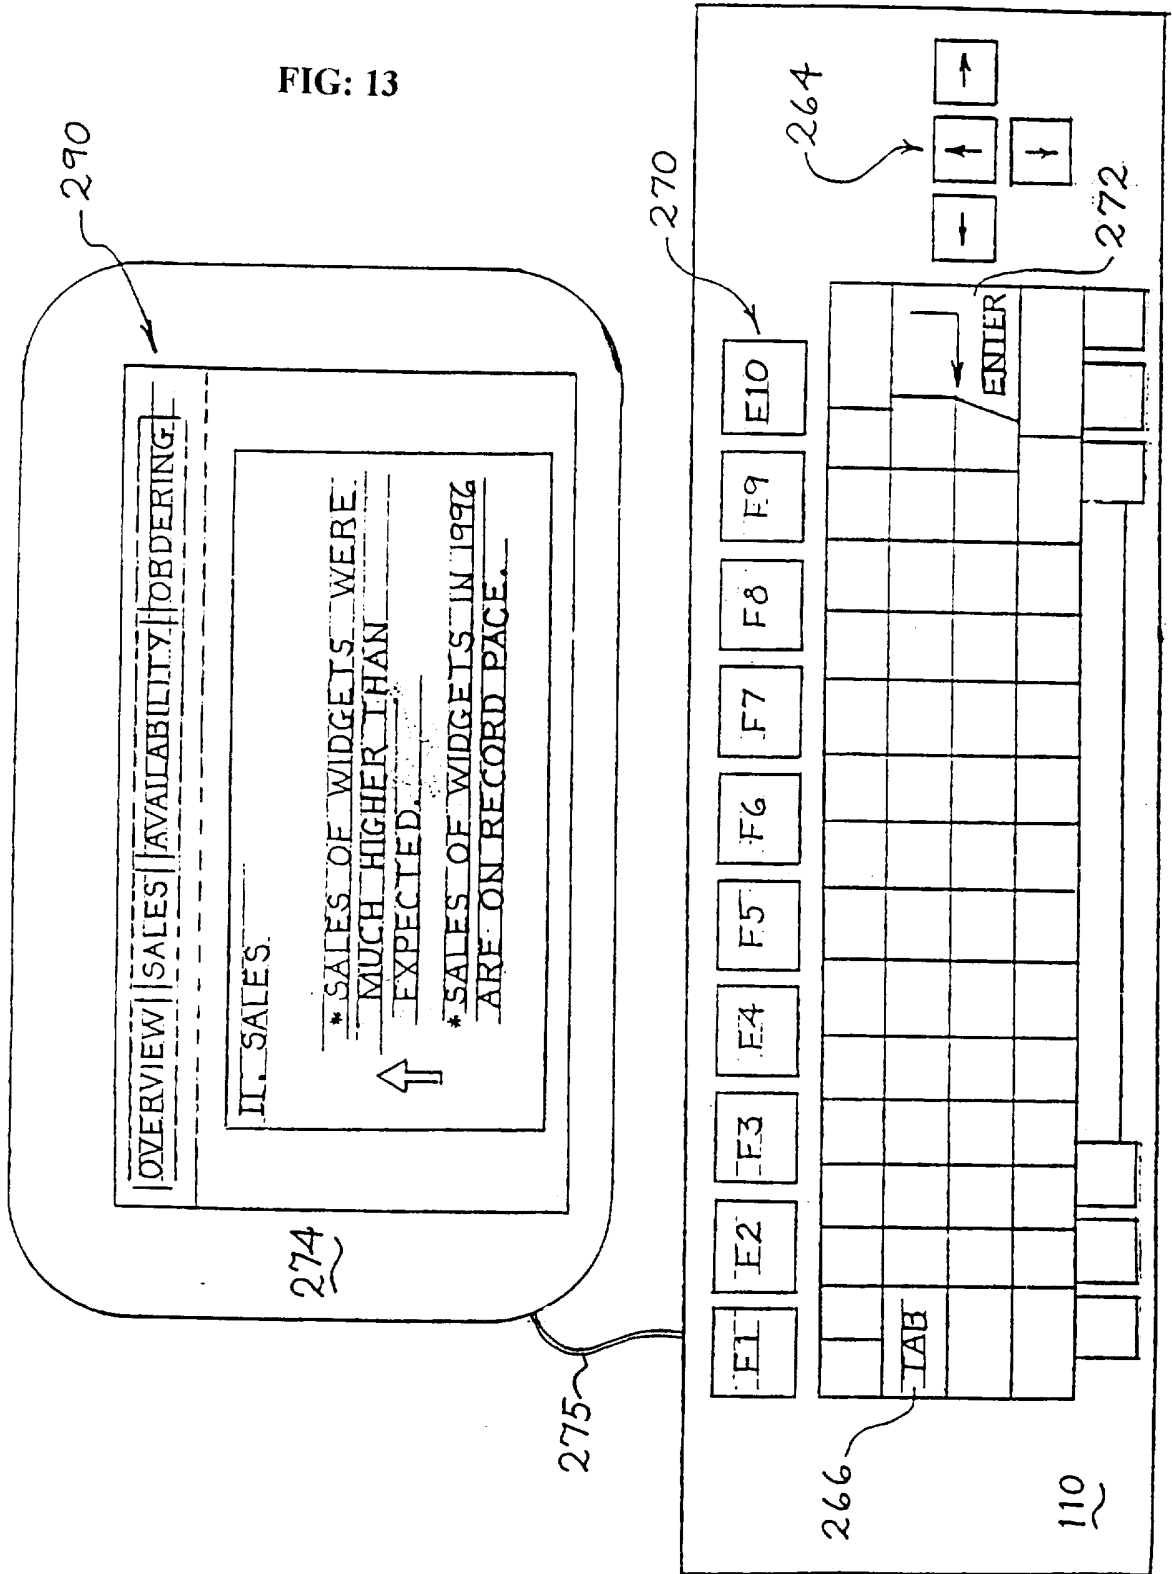

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US97/08483

A. CLASSIFICATION OF SUBJECT MATTER IPC(6) : G06F 17/21 US CL : 395/762 According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) U.S. : 395/762, 761, 774, 776, 777, 348, 349 Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) APS USPAT		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y,P	US 5,572,643 A (JUDSON) 05 November 1996, abstract, figs. 1-8, col. 1-8.	1-17
Y,P	US 5,530,852 A (MESKE, JR ET AL) 25 June 1996, figs. 1-13, col. 1-11.	1-17
Y,P	US 5,625,781 A (CLINE ET AL) 29 April 1997, figs. 2-4, col. 1-6.	1-17
<input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.		
* Special categories of cited documents: *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document published on or after the international filing date *L* document which may throw doubt on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art *&* document member of the same patent family	
Date of the actual completion of the international search 17 JULY 1997		Date of mailing of the international search report 21. 08. 97
Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230		Authorized officer JOSEPH H. FEILD <i>Jose Hill</i> Telephone No. (703) 305-3800