

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
27 December 2007 (27.12.2007)

PCT

(10) International Publication Number
WO 2007/149787 A2

(51) International Patent Classification:
H04L 9/00 (2006.01)

(US). **FAITH, Patrick** [US/US]; 2810 Jones Gate Court,
Pleasanton, CA 94566 (US).

(21) International Application Number:
PCT/US2007/071386

(74) Agents: **JEWIK, Patrick, R.** et al.; Townsend and
Townsend and Crew LLP, Two Embarcadero Center,
Eighth Floor, San Francisco, CA 94111-3834 (US).

(22) International Filing Date: 15 June 2007 (15.06.2007)

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH,
CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG,
ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL,
IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK,
LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW,
MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL,
PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY,
TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/815,059 19 June 2006 (19.06.2006) US
60/815,430 20 June 2006 (20.06.2006) US
60/884,089 9 January 2007 (09.01.2007) US

(71) Applicants (*for all designated States except US*): **VISA
U.S.A. INC.** [US/US]; P.O. Box 8999, San Francisco, CA
94128 (US). **VISA INTERNATIONAL SERVICE AS-
SOCIATION** [US/US]; 900 Metro Center Boulevard, Fos-
ter City, CA 94404 (US).


(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL,
PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors; and

(75) Inventors/Applicants (*for US only*): **HAMMAD, Ayman**
[US/US]; 6048 Corte Montanas, Pleasanton, CA 94566

[Continued on next page]

(54) Title: TERMINAL DATA ENCRYPTION

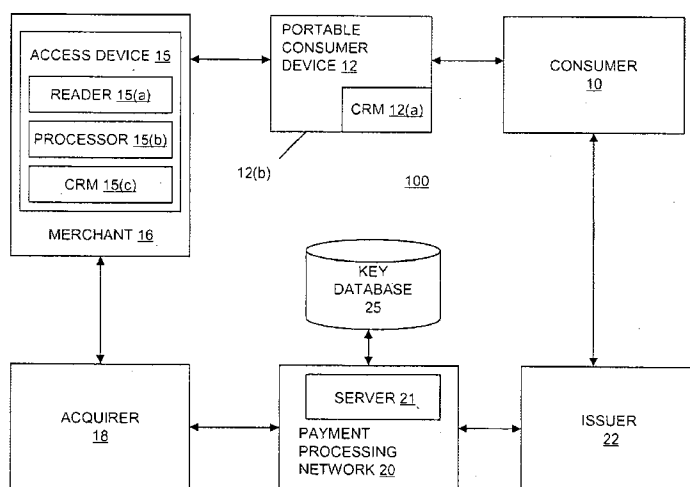

(57) Abstract: A method is disclosed. The method includes generating an initial key after interacting with an access device, storing the initial key at a key storage location, altering the initial key with a public key to form an altered key, and sending the altered key to a server computer along with an identifier for the access device. The altered key is changed to the initial key at the server computer and is stored with the identifier in a database in operative communication with the server computer. The initial keys that are stored at the key storage location and in the database are used to alter and restore transaction data associated with multiple financial transactions that are conducted using the access device.

WO 2007/149787 A2



Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

TERMINAL DATA ENCRYPTION

CROSS-REFERENCES TO RELATED APPLICATIONS

[0001] This application is a non-provisional patent application of and claims the benefit of the filing dates of U.S. Provisional Patent Application No. 60/815,059, filed on June 19, 2006, U.S. Provisional Patent Application No. 60/815,430 filed on June 20, 2006, and U.S. Provisional Patent Application No. 60/884,089 filed on January 9, 2007. All of these applications are herein incorporated by reference in their entirety for all purposes.

BACKGROUND

[0002] In the payment industry, magnetic stripe cards currently have track data elements stored in data tracks (e.g., track 1 or track 2). Examples of track data elements include the cardholder's PAN (personal account number), CVV (card verification value), etc.

[0003] In a typical purchase transaction using a magnetic stripe card, a card is swiped at a point of sale terminal and data on the card are read by the point of sale terminal. The point of sale terminal then sends the data to the issuer of the card in an authorization request message. The authorization request message requests authorization from the issuer to proceed with the transaction. The issuer then receives the authorization request message and then approves or declines the request. An authorization response message including the approval or decline is then sent from the issuer back to the point of sale terminal to inform the merchant as to whether or not the transaction has been approved or declined.

[0004] There is a need to protect data as it is delivered from the point of sale terminal to the issuer. If the data passing between the point of sale terminal and the issuer is intercepted by an unauthorized person, the unauthorized person could conduct unauthorized financial transactions using the transaction data.

[0005] One way to provide greater security is to encrypt transaction data before it is sent from the point of sale terminal to the issuer. For example, in a conventional PIN (personal identification number) based transaction using a

payment card, symmetric keys can be used to encrypt and decrypt a cardholder's PIN as it passes from the point of sale terminal to the issuer. To encrypt the PIN at the point of sale terminal, a symmetric key can be stored in a tamper-resistant HSM (hardware security module) coupled to a point of sale terminal. HSMs are usually in the form of a plug-in card (PCI) or external device. A corresponding symmetric key may be stored at the issuer and the issuer may use the corresponding symmetric key to decrypt the encrypted PIN.

[0006] While such conventional methods of encryption are effective for encrypting PINs, a number of improvements could be made. For example, although HSM modules can be used to encrypt PINs, they typically are specialized and expensive. A specialized terminal may cost on the order of \$300-\$600 in today's dollars. It would be desirable to provide for a security process which could use an HSM module, but does not require one.

[0007] In addition to cost and complexity, key management processes in conventional encryption processes could also be improved. For example, in conventional key management processes, key updates can be sent from the issuer or other entity to a POS terminal every hour or once per day. This can be a burdensome and expensive task as there can be thousands of POS terminals that need to be updated in a regular manner.

[0008] It is more difficult for an issuer or other party to send a symmetric key to a point of sale terminal, than it is to receive it. Point of sale terminals are constantly being installed, updated, modified, and removed, and an issuer (or other party who wants to receive encrypted transaction data) cannot know when all point of sale terminals are available to communicate with the issuer. For example, after a POS terminal is installed, it needs to notify an issuer that it exists. Once the issuer is notified, it can then send a symmetric key to the POS terminal. This process requires two-way communication between the issuer and the terminal in order to install symmetric keys. This two-way communication process increases the processing burden to any payment processing system, especially since there may be thousands of POS terminals being installed on a regular basis.

[0009] To improve the security of financial messages passing through a network, some have suggested generating transaction specific keys in a point of sale

terminal and then sending the keys from the point of sale terminal to a remotely located controller along with transaction request messages for various transactions. While this may be an effective security process, sending a separate key for every transaction can also burden existing payment processing systems. It would also require POS terminals and issuers to maintain and use complex and expensive hardware and software.

[0010] Embodiments of the invention address these problems and other problems, individually and collectively.

BRIEF SUMMARY

[0011] Embodiments of the invention are directed to methods, systems, and computer readable media for allowing financial transactions to be conducted in a secure manner.

[0012] One embodiment of the invention is directed to a method comprising generating an initial key after interacting with an access device, storing the initial key at a key storage location, altering the initial key with a public key to form an altered key, and sending the altered key to a server computer along with an identifier for the access device. The altered key is changed to the initial key at the server computer and is stored with the identifier in a database in operative communication with the server computer. The initial keys that are stored at the key storage location and in the database are used to alter and restore transaction data associated with multiple financial transactions that are conducted using the access device.

[0013] Another embodiment of the invention is directed to a method comprising receiving an altered key and an identifier associated with an access device, wherein the altered key was generated from an initial key after an interaction with the access device. The altered key is changed back to the initial key, and is stored in a database. The initial key is then used to restore altered transaction data received from the access device.

[0014] Another embodiment of the invention is directed to a method comprising identifying a track data element located at a first data location in a data track to encrypt, altering the track data element, placing the altered track data element in a second data location that is different from the first data location, and sending the altered track data element in the second data location to an issuer.

[0015] Another embodiment of the invention is directed to a method comprising identifying a track data element located at a first data location in a data track, concatenating the track data element and a terminal identifier to form a data string, altering the data string; and inserting values from the data string into the first data location. The track data element may comprise a CVV and the first data location may comprise a CVV data field.

[0016] Other embodiments of the invention are directed to computer readable media comprising code for performing the above-described methods as well as systems, apparatuses and devices that perform the methods and/or that use the computer readable media.

[0017] These and other embodiments of the invention are described in further detail below.

BRIEF DESCRIPTION OF THE DRAWINGS

[0018] FIG. 1 shows a block diagram of a system according to an embodiment of the invention.

[0019] FIG. 2 shows components of a computer apparatus.

[0020] FIG. 3 shows a flowchart illustrating a method for providing a key to a server computer.

[0021] FIGS. 4-8 show flowcharts illustrating secure methods for delivering transaction data from an access device to an issuer.

DETAILED DESCRIPTION

[0022] One embodiment of the invention is directed to a method for providing a key to one end of a financial transaction and another key to another end of the financial transaction. In preferred embodiments, an access device (e.g., a POS

terminal) or the like generates an initial key, and then stores it. In a specific example, an initial key, such as a terminal-specific symmetric key, is generated using a secure element (e.g., a secure chip) that is associated with a point of sale terminal. The secure element may generate the initial key after one interacts (e.g., swipes a card through a POS terminal) with the access device. Once generated, the terminal-specific symmetric key is altered (e.g., encrypted) with a public key and the altered, terminal-specific symmetric key is sent to the issuer along with a terminal identifier (e.g., a terminal ID number). Before (or after) it arrives at the issuer, a server computer may receive and change (e.g., decrypt) the altered, terminal-specific symmetric key back to the originally generated initial key. The server computer may then store the initial key in a key database along with a corresponding terminal identifier.

[0023] Once the terminal-specific initial key and the terminal identifier are stored in the database, the server computer may use the terminal-specific symmetric initial key to decrypt transaction data for multiple financial transactions (e.g., payment transactions, money transfers, etc.) conducted using the point of sale terminal. In some embodiments, once decrypted, the transaction data (which may include track data elements such as a PAN, transaction amounts, etc.) can be sent to the various issuers who can approve or disapprove of the financial transactions. Various specific methods for securely passing financial transaction data are also described in detail below.

[0024] As explained in further detail below, an initial key is altered at an access device or other front end transaction location, and the altered key is sent to a back end transaction location such as a remotely located server computer. At the server computer, the altered key is changed back to the initial key. In preferred embodiments, the alteration process preferably uses encryption, and any suitable pre-existing encryption processes may be used in embodiments of the invention. Symmetric or secret-key processes include: digital encryption standard (DES), triple DES, and advanced encryption standard (AES). A well known public key encryption technique is ECC (elliptical curve cryptography). Other encryption techniques can be used as well.

[0025] Embodiments of the invention have a number of advantages. In embodiments of the invention, an initial, terminal-specific key can be generated at a terminal and then sent to a remotely located server computer, and it can thereafter be used to decrypt transaction data. The encryption of such transaction information can allow for the secure passage of transaction data from one end of a financial transaction to another end of the financial transaction. The encryption of such information may also allow an entity such as a payment processing organization or issuer to authenticate a portable consumer device that is being used at an access device. Embodiments of the invention can also be used with PANs of different lengths (e.g., 13, 16, and 19 digits).

[0026] In comparison to conventional encryption systems, embodiments of the invention can transmit a terminal-specific initial key once to a server computer at a remote location. A back and forth process of terminal identification and subsequent key shipment to the terminal is not needed. In addition, a separate key is not required for every transaction that is conducted. Consequently, complex hardware and software are not required in embodiments of the invention.

[0027] I. PAYMENT PROCESSING SYSTEMS

[0028] FIG. 1 shows a system **100** that can be used in an embodiment of the invention. For simplicity of illustration, one merchant, one issuer, one acquirer, one access device, and one consumer are shown. It is understood, however, that embodiments of the invention may include multiple merchants, acquirers, access devices, and/or consumers. In addition, some embodiments of the invention may include fewer than all of the components shown in FIG. 1.

[0029] The system **100** includes a merchant **16** and an acquirer **18** associated with the merchant **16**. In a typical payment transaction, a consumer **10** may purchase goods or services at the merchant **16** using a portable consumer device **12**. The acquirer **18** can communicate with an issuer **22** via a payment processing network **20**.

[0030] The acquirer **18** is typically a bank that has a merchant account. The issuer **22** may also be a bank, but could also be business entity such as a retail

store. Some entities are both acquirers and issuers, and embodiments of the invention include such entities.

[0031] The consumer **10** may be an individual, or an organization such as a business that is capable of purchasing goods or services.

[0032] The portable consumer device **12** may be in any suitable form. For example, suitable portable consumer devices can be hand-held and compact so that they can fit into a consumer's wallet and/or pocket (e.g., pocket-sized). They may include smart cards, ordinary credit or debit cards (with a magnetic strip and without a microprocessor), keychain devices (such as the Speedpass™ commercially available from Exxon-Mobil Corp.), etc. Other examples of portable consumer devices include cellular phones, personal digital assistants (PDAs), pagers, payment cards, security cards, access cards, smart media, transponders, and the like. The portable consumer devices can also be debit devices (e.g., a debit card), credit devices (e.g., a credit card), or stored value devices (e.g., a stored value card).

[0033] As shown in FIG. 1, the portable consumer device **12** may comprise a computer readable medium **12(a)** and a body **12(b)**. The computer readable medium **12(a)** may be on the body **12(b)**, which may be in the form a plastic substrate, housing, or other structure. The computer readable medium **12(a)** may be a memory that stores data and may be in any suitable form. Exemplary computer readable media **12(a)** may be in any suitable form including a magnetic stripe, a memory chip, etc. If the portable consumer device **12** is in the form of a card, it may have an embossed region which is embossed with the primary PAN.

[0034] The payment processing network **20** is located between (in an operational sense) the acquirer **18** and the issuer **22**. It may include data processing subsystems, networks, and operations used to support and deliver authorization services, exception file services, and clearing and settlement services. An exemplary payment processing network may include VisaNet™. Payment processing networks such as VisaNet™ are able to process credit card transactions, debit card transactions, and other types of commercial transactions. VisaNet™, in particular, includes a VIP system (Visa Integrated Payments system) which processes authorization requests and a Base II system which performs clearing and

settlement services. The payment processing network **26** may use any suitable wired or wireless network, including the Internet.

[0035] The payment processing network **20** may include a server computer **21**. A server computer is typically a powerful computer or cluster of computers. For example, the server computer can be a large mainframe, a minicomputer cluster, or a group of servers functioning as a unit. In one example, the server computer may be a database server coupled to a Web server.

[0036] The server computer **21** may comprise a computer readable medium comprising code for receiving an altered key and an identifier associated with an access device, wherein the altered key was generated from an initial key after an interaction with the access device, code for changing the altered key back to the initial key, code for storing the initial key in a database, and code for using the initial key to restore transaction data associated with multiple financial transactions conducted using the access device.

[0037] A key database **25**, which may be operated by or within the payment processing network **20** may be in operative communication with the server computer **21**. The key database **25** may store terminal specific keys generated by the access device **15**. It may also store corresponding terminal specific identifiers (e.g., terminal IDs, merchant IDs, etc.) so that appropriate keys can be retrieved by the server computer **20** when transaction data from various access devices need to be decrypted. Other information that can be stored in the database **25** may include an acquirer BIN, and a merchant ID.

[0038] The merchant **16** may also have an access device **15** that can interact with the portable consumer device **32**. Alternatively, the access device **15** could be a kiosk or a personal computer and need not be located at the merchant **16**, but could be associated with the merchant **16**. Thus, in embodiments of the invention, the access device **15** could be located at any other suitable location.

[0039] The access devices according to embodiments of the invention can be in any suitable form. Examples of access devices include point of sale (POS) devices, cellular phones, PDAs, personal computers (PCs), tablet PCs, handheld specialized readers, set-top boxes, electronic cash registers (ECRs), automated

teller machines (ATMs), virtual cash registers (VCRs), kiosks, security systems, access systems, and the like.

[0040] The access device **15** may comprise a reader **15(a)**, a processor **15(b)** and a computer readable medium **15(c)**. The reader **15(a)** may include any suitable contact or contactless mode of operation. For example, exemplary card readers can include RF (radio frequency) antennas, magnetic stripe readers, etc. to interact with the portable consumer device **12**. The processor **15(b)** may comprise one or more microprocessors. The computer readable medium **15(c)** may comprise any suitable combination of memory devices that store computer code which is executable by the processor. The access device **15** could also comprise an output device (not shown) such as a display screen or a printer. The output device can output data such as transaction amounts, authorization codes, etc.

[0041] The computer readable medium **15(c)** may comprise code for generating an initial key after interacting with an access device, code for storing the initial key at a key storage location (e.g., within the computer readable medium **15(c)** in the access device **15**), code for altering the initial key with a public key to form an altered key, and code for sending the altered key to the server computer **21** along with an identifier for the access device.

[0042] In a typical purchase transaction, the consumer **10** purchases a good or service at the merchant **16** using a portable consumer device **12** such as a credit card. The consumer's portable consumer device **12** can interact with an access device **15** such as a POS (point of sale) terminal at the merchant **16**. For example, the consumer **10** may take a credit card and may swipe it through an appropriate slot in the POS terminal. Alternatively, the POS terminal may be a contactless reader, and the portable consumer device **12** may be a contactless device such as a contactless card.

[0043] An authorization request message is then forwarded to the acquirer **18**. After receiving the authorization request message, the authorization request message is then sent to the payment processing network **20**. The payment processing network **20** then forwards the authorization request message to the issuer **22** of the portable consumer device **12**.

[0044] After the issuer **22** receives the authorization request message, the issuer **22** sends an authorization response message back to the payment processing network **20** to indicate whether or not the current transaction is authorized (or not authorized). The transaction processing network **20** then forwards the authorization response message back to the acquirer **18**. The acquirer **18** then sends the response message back to the merchant **16**.

[0045] After the merchant **16** receives the authorization response message, the access device **15** at the merchant **16** may then provide the authorization response message for the consumer **10**. The response message may be displayed by the access device **15**, or may be printed out on a receipt.

[0046] At the end of the day, a normal clearing and settlement process can be conducted by the transaction processing network **20**. A clearing process is a process of exchanging financial details between an acquirer and an issuer to facilitate posting to a consumer's account and reconciliation of the consumer's settlement position.

[0047] In the above example, activities occurring at the access device **15**, or the merchant **16** may be part of "front end" operations in a financial transaction, whereas activities that occur at the payment processing network **20** or the issuer **22** may be part of "back end" operations.

[0048] FIG. 2 shows typical components or subsystems of a computer apparatus. Such components or any subset of such components may be present in the server computer **21**, access device **15**, or any computer operated by the merchant **16**, acquirer **18**, payment processing network **20**, or issuer **22**. The subsystems shown in FIG. 2 are interconnected via a system bus **775**. Additional subsystems such as a printer **774**, keyboard **778**, fixed disk **779**, monitor **776**, which is coupled to display adapter **782**, and others are shown. Peripherals and input/output (I/O) devices, which couple to I/O controller **771**, can be connected to the computer system by any number of means known in the art, such as serial port **777**. For example, serial port **777** or external interface **781** can be used to connect the computer apparatus to a wide area network such as the Internet, a mouse input device, or a scanner. The interconnection via system bus allows the central processor **773** to communicate with each subsystem and to control the execution of

instructions from system memory **772** or the fixed disk **779**, as well as the exchange of information between subsystems. The system memory **772** and/or the fixed disk **779** may embody a computer readable medium.

[0049] II. KEY GENERATION AND STORAGE PROCESSES

[0050] Embodiments of the invention include key generation and storage processes that are efficient and effective. Keys can be generated and then used at opposite ends of a financial transaction to ensure the secure passage of information between the two ends. Exemplary key generation and storage processes can be described with reference to the flowchart in FIG. 3 and the system block diagram shown in FIG. 1.

[0051] First, a public key may be stored in the reader **15(a)** which is in the access device **15** (step **102**). The reader **15(a)** may include a secure element (e.g., a secure chip comprising memory) that stores the public key. The public key may be sent to the reader **15(a)** by a party such as a payment processing organization after the access device **15** has been installed, and may then be stored therein. Alternatively, the reader **15(a)** may have been manufactured with a memory comprising the public key and the public key be present in the access device **15** upon installation.

[0052] At some point in time, one may interact with the access device **15** to cause the access device **15** generate a terminal-specific symmetric key. For example, the portable consumer device **12** can be used to interact with the access device **15** (step **104**). The interaction with the access device **15** can be the first time that the access device **15** communicates with the server computer **21**. In some embodiments, this first interaction with the access device **15** and the first interaction between the access device **15** and the server computer **21** can be characterized as an "initialization transaction." An initialization transaction can be different than a typical payment transaction, in that the special initialization transaction initially identifies the terminal to a remote server computer **21**.

[0053] During the initialization transaction, a symmetric key can be generated by the secure element in the reader **15(a)** and can be stored in the computer readable medium **15(c)** (step **106**). The place where the symmetric key is stored

may be referred to as a key storage location. It is typically in the access device **15**, but could be present at some other location proximate to or affiliated with the merchant **16** in other embodiments.

[0054] The generated symmetric key is then encrypted with the public key (step **108**). The generated symmetric key may be encrypted at the access device **15** or at any other suitable device at any other suitable front end location.

[0055] Although the public key is preferably stored in the access device **15** and the symmetric key is generated by the access device **15** in this example, in other embodiments, the public key may be stored and the symmetric key may be generated in any other suitable location accessible to the reader **15(a)**. For example, the public key could be stored in a back end host computer (not shown), which is coupled to the access device **15** and is operated by the merchant **16**. The back end host computer could also generate the symmetric key and encrypt the symmetric key. In this example, the symmetric key that is generated at the front end could be a "merchant-specific key" and could be associated with one or more merchant terminals instead of a "terminal-specific key" which is associated with only one terminal.

[0056] The encrypted, terminal-specific symmetric key is sent from the access device **15** to the issuer **22**, via the acquirer **18** and the payment processing network **20** (step **110**). A terminal identifier such as a terminal ID number, merchant ID number, or the like can also be sent from the access device **15** to the payment processing network **20**.

[0057] Before the symmetric key arrives at the issuer **22**, however, the server computer **21** operated by an intermediate payment processing network **20** may receive and then decrypt the encrypted, terminal-specific symmetric key (step **112**). After the received encrypted terminal-specific key is decrypted, the server computer **21** may store the restored initial terminal-specific symmetric key in the key database **25** (step **114**) along with the terminal identifier. Various terminal-specific symmetric keys and their corresponding terminal identifiers may be stored in a lookup table of the like in the key database **25**.

[0058] After the restored, initial terminal-specific key is stored in the key database **25**, it may be subsequently retrieved by the server computer **21** and then

used to restore (e.g., decrypt) previously altered transaction data for multiple financial transactions (e.g., payment transactions) using different portable consumer devices interacting with the access device **15** (step **116**). For example, each time an authorization request message is sent from the access device **15** to the issuer **22**, any portion of it can be encrypted with the symmetric key stored in the access device **15** and then decrypted with the corresponding symmetric key stored in the key database **25**. After decrypting, the decrypted authorization request message may then be sent to the issuer **22** in the format that the issuer **22** normally expects to receive the authorization request message.

[0059] Since the intermediate server computer **21** and the key database **25** are operationally between the issuer **22** and the access device **15**, they can be used to decrypt authorization request messages from numerous different access devices at numerous different merchants. The decrypted messages may then be sent to numerous different issuers. In addition, providing the server computer **21** between the issuer **22** and the access device **15** is desirable, since terminal-specific keys can be maintained in one or a small number of locations. This architecture is simple and efficient, and ensures the secure passage of transaction data between the access device **15** and the server computer **21**.

[0060] In other embodiments, each issuer **22** could maintain a separate key database. Requiring each issuer **22** to maintain a terminal-specific key database would improve security between the access device **15** and each issuer **22**. It would, however, also increase the overall memory storage requirements of the payment processing system **100**.

[0061] III. TRANSACTION DATA ALTERATION PROCESSES

[0062] Once corresponding symmetric keys have been stored in the access device **15** and the key database **25**, transaction data can be altered in various ways to further enhance the security of transaction data transmitted in a payment processing system. Various transaction data alteration processes according to embodiments of the invention can be described with reference to the flowcharts in FIGS. 4-8 and the system block diagram in FIG. 1. As noted below, some data alteration processes use keys and some need not use keys.

[0063] FIG. 4 illustrates a process for encrypting a track data element such as a CVV and then inserting the encrypted CVV in the data location where the CVV normally resides (e.g., the CVV or discretionary data field in track 1 or track 2). Referring to FIG. 4 and FIG. 1, track data are read from a portable consumer device **12** (step **202**). The track data may comprise data in track 1, 2, or 3.

[0064] There are up to three tracks on magnetic cards used for financial transactions, known as tracks 1, 2, and 3. Track 3 is currently virtually unused by the major worldwide networks such as Visa. Point-of-sale card readers almost always read track 1, or track 2, and sometimes both, in case one track is unreadable. The minimum cardholder account information needed to complete a transaction is present on both tracks. Track 1 has a higher bit density (210 bits per inch vs. 75), is the only track that may contain alphabetic text, and hence is the only track that contains the cardholder's name.

[0065] The access device **15** then identifies at least one track data element to encrypt (step **204**). Typical data elements on track one include: primary account number - up to 19 characters; name - two to 26 characters; service code - three characters; discretionary data (e.g., may include Pin Verification Key Indicator (PVKI, 1 character), Pin Verification Value (PVV, 4 characters), and Card Verification Value or Card Verification Code (CVV or CVK, 3 characters). Typical data elements in track 2 include primary account number - up to 19 characters; expiration date - four characters; service code - three characters; and discretionary data - as in track one. Any of these data elements, other data elements, or combinations thereof may be encrypted by the access device **15**.

[0066] In preferred embodiments, the access device **15** encrypts a track data element such as a CVV value using a symmetric key (step **206**). The CVV is particularly desirable to encrypt. If the CVV is altered, track data may be sent through an existing payment processing system without changing the existing payment processing system.

[0067] The access device **15** then overwrites the CVV in the data track with the encrypted CVV (step **208**). The encrypted CVV value can be placed in the data track location where the unaltered CVV value would normally be present.

[0068] The encrypted CVV and other transaction data (e.g., amount of the purchase, PAN, etc.) are sent from the access device **15** to the issuer **22** (step **210**). As they are sent to the issuer **22**, the transaction data then pass through the merchant **16** and the acquirer **18** (step **212**).

[0069] The encrypted CVV is then received and decrypted by the server computer **21** at the payment processing network **20** (step **214**). The server computer **21** determines that the received transaction data came from the access device **15** by using a terminal identifier or the like. After the access device **15** is identified, the appropriate symmetric key is retrieved from the key database **25**, and the key is used to change or restore the previously encrypted CVV key to its original form. The server computer **21** then inserts the unencrypted CVV into the location that previously stored the encrypted CVV, and then passes the transaction data including the unencrypted CVV to the issuer **22** (step **216**).

[0070] The issuer **22** then processes the transaction as described above (step **218**). That is, the authorization request message is reviewed to determine if the consumer is authorized to conduct the transaction. The issuer **22** then approves or declines the request, and an authorization response message is sent back to the access device **15** as described above.

[0071] FIG. 5 shows another embodiment of the invention. In this example, an altered track data element is placed in a data location other than the data location where the original track data element resided. In addition, in this example, a public or private key may be used to alter data.

[0072] Referring to FIG. 5 and FIG. 1, track data are read from a portable consumer device **12** (step **302**). The access device **15** then identifies at least one track data element to encrypt (step **304**). The access device **15** then encrypts a track data element such as a CVV value using a symmetric or public key (step **306**). Steps **302**, **304**, and **306** can be similar to steps **202**, **204**, and **206** described above.

[0073] The access device **15** then overwrites the CVV with the encrypted CVV. It may also insert the encrypted CVV in a data location other than where the original CVV was obtained. An example of another location is a discretionary data field or field 55 (step **308**). Field 55 can include up to 32 bytes of data.

[0074] The transaction data including the encrypted CVV that is located in the CVV field and the discretionary data field are sent from the access device **15** to the issuer **22** (step **310**). The transaction data then pass through the merchant **16** and the acquirer **18** (step **312**).

[0075] The transaction data including the encrypted CVV that is located in the CVV field and the discretionary data field are then received and decrypted by the server computer **21** at the payment processing network **20** (step **314**). A public or symmetric key, as appropriate, may be used to decrypt the encrypted CVVs.

[0076] The server computer **21** determines that the received transaction data came from the access device **15** by using a terminal identifier or merchant identification value. After the access device **15** is identified, the appropriate key is retrieved from the key database **25**. The server computer **21** then decrypts the encrypted CVVs in the CVV field and the discretionary data field, and then inserts the unencrypted CVV into the normal CVV data field, and then passes the transaction data including the unencrypted CVV to the issuer **22** (step **316**).

[0077] The issuer **22** then processes the transaction as described above (step **318**). That is, the authorization request message is reviewed to determine if the consumer is authorized to conduct the transaction. The issuer **22** then approves or declines the request, and an authorization response message is sent back to the access device **15** as described above.

[0078] FIG. 6 shows another embodiment of the invention where a data element for alteration is identified. The data element is then altered and is then moved to a location other than the location where the data element normally resides. The location where the data element normally resides is left blank. Moving altered track element data to another location allows for more flexibility, since other locations may not have the same data storage limitations that are present in track 1 or track 2. In addition, in the embodiment in FIG. 6, at least two track data elements can be combined, relocated, and then altered (encrypted). This further improves the security of embodiments of the invention.

[0079] A method according to an embodiment of the invention comprises identifying a track data element located at a first data location (e.g., a first data field) in a data track to encrypt, altering the track data element, placing the altered track

data element in a second data location (e.g., a second data field) that is different from the first data location, and sending the altered track data element in the second data location to an issuer.

[0080] Referring to FIG. 6 and FIG. 1, track data are read from a portable consumer device **12** (step **402**). The access device **15** then identifies at least one track data element to encrypt (step **404**). The access device **15** then encrypts track data elements such as a CVV and PAN value using a symmetric or public key (step **406**). The CVV and PAN may or may not be concatenated. Steps **402**, **404**, and **406** can be similar to steps **202**, **204**, and **206** described above.

[0081] The access device **15** then encrypts the CVV and PAN places them in a data location other than where the original CVV and PAN were obtained, and the original data location for the CVV (i.e., the CVV and PAN data fields) is left blank. An example of another data location is a supplemental data field such as a discretionary data field, track 3, or field 55 (step **408**).

[0082] The encrypted track data elements including the encrypted CVV and PAN in the supplemental data field are sent from the access device **15** to the issuer **22** (step **410**). If desired, a fast Fourier transformation of track data elements and magnetic signature data may also be present in the supplemental data field to provide further security. The transaction data then pass through the merchant **16** and the acquirer **18** (step **412**).

[0083] The encrypted CVV and PAN in the supplemental data field are then received and are then decrypted by the server computer **21** at the payment processing network **20** (step **414**). A public or symmetric key, as appropriate, may be used to decrypt the encrypted CVV. In some cases, the blank CVV field in the received transaction data may indicate to the server computer **21** that it needs to look to the supplemental data field for the real CVV.

[0084] The server computer **21** determines that the received transaction data came from the access device **15** by using a terminal identifier or merchant identification value. After the access device **15** is identified, the appropriate key is retrieved from the key database **25**. After the server computer **21** decrypts the CVV and PAN in the supplemental data field, it inserts the unencrypted CVV into the correct CVV data field in the data track, and then passes the transaction data

including the unencrypted CVV to the issuer **22** (step **416**). The additional piece of information embodied by the encrypted and subsequently unencrypted PAN may be also used by the server computer **21** to verify the authenticity of the portable consumer device being used.

[0085] The issuer **22** then processes the transaction as described above (step **418**). That is, the authorization request message is reviewed to determine if the consumer is authorized to conduct the transaction. The issuer **22** then approves or declines the request, and an authorization response message is sent back to the access device **15** as described above.

[0086] FIG. 7 shows an example that does not require the use of keys. Instead of keys, a data alteration process such as a fast Fourier transformation process can be used to alter a transaction data element such as a CVV. Other data transformation processes could be used in other embodiments of the invention.

[0087] Referring to FIG. 7 and FIG. 1, track data are read from a portable consumer device **12** (step **502**). The access device **15** then identifies at least one track data element to encrypt (step **504**). Steps **502** and **504** are similar to steps **202** and **204** above.

[0088] However, instead of encryption using a key, the access device **15** then processes a track data element such as a CVV using a fast Fourier transformation process (step **406**). The access device **15** then alters the CVV track data element and then places it in a data location other than where the original CVV was obtained, and the original location is left blank. An example of another location is a supplemental data field such as a discretionary data field, field 55, or a field in track 3 (step **408**).

[0089] The transaction data including the altered CVV that is located in the supplemental data field is sent from the access device **15** to the issuer **22** (step **510**). The transaction data then pass through the merchant **16** and the acquirer **18** (step **512**).

[0090] The altered CVV that is located in the supplemental data field is then received and is restored by the server computer **21** at the payment processing network **20** (step **414**).

[0091] The server computer **21** determines that the received transaction data came from the access device **15** by using a terminal identifier or merchant identification value. After the access device **15** is identified, the appropriate algorithm is retrieved from the database **25** (in this case, the "key database" may be an "algorithm database"). The server computer **21** then restores the altered CVV using the appropriate algorithm, and then inserts the restored CVV into the data location that normally stores the CVV, and then passes the transaction data including the unaltered CVV to the issuer **22** (step **516**).

[0092] The issuer **22** then processes the transaction as described above (step **518**). That is, the authorization request message is reviewed to determine if the consumer is authorized to conduct the transaction. The issuer **22** then approves or declines the request, and an authorization response message is sent back to the access device **15** as described above.

[0093] FIG. 8 shows a flowchart of an embodiment of the invention whereby one or more track data elements may be combined with a terminal identifier to form a data string, which may be encrypted and then further processed.

[0094] Referring to FIG. 8 and FIG. 1, track data are read from a portable consumer device **12** (step **602**). The access device **15** then identifies at least one track data element to encrypt (step **604**). Steps **602** and **604** are similar to steps **202** and **204** above.

[0095] However, in this example, track data elements and a terminal identifier are concatenated (step **606**). For example, the consumer's PAN, CVV, and a terminal identifier could be concatenated to form a data string, which is subsequently altered (e.g., encrypted) using a symmetric key or some other algorithm to form a 256 bit value. The last three digits of the string are then extracted and inserted into the CVV data field in the location where the original CVV value was obtained (step **608**).

[0096] The transaction data including the altered CVV is sent from the access device **15** to the issuer **22** (step **610**). The transaction data then pass through the merchant **16** and the acquirer **18** (step **612**).

[0097] The altered CVV is then received and is restored by the server computer **21** at the payment processing network **20** (step **614**).

[0098] The server computer **21** determines that the received transaction data came from the access device **15** by using a terminal identifier or merchant identification value. After the access device **15** is identified, the appropriate algorithm is retrieved from the database **25** (in this case, the "key database" may be an "algorithm database"). The server computer **21** then restores the CVV using the selected algorithm, inserts the restored CVV into the data location that previously stored the altered CVV, and passes the transaction data including the unaltered CVV to the issuer **22** (step **616**).

[0099] The issuer **22** then processes the transaction as described above (step **618**). That is, the authorization request message is reviewed to determine if the consumer is authorized to conduct the transaction. The issuer **22** then approves or declines the request, and an authorization response message is sent back to the access device **15** as described above.

[0100] It should be understood that the present invention as described above can be implemented in the form of control logic using computer software in a modular or integrated manner. Based on the disclosure and teachings provided herein, a person of ordinary skill in the art will know and appreciate other ways and/or methods to implement the present invention using hardware and a combination of hardware and software.

[0101] Any of the software components or functions described in this application, may be implemented as software code to be executed by a processor using any suitable computer language such as, for example, Java, C++ or Perl using, for example, conventional or object-oriented techniques. The software code may be stored as a series of instructions, or commands on a computer readable medium, such as a random access memory (RAM), a read only memory (ROM), a magnetic medium such as a hard-drive or a floppy disk, or an optical medium such as a CD-ROM. Any such computer readable medium may reside on or within a single computational apparatus, and may be present on or within different computational apparatuses within a system or network.

[0102] The above description is illustrative and is not restrictive. Many variations of the invention will become apparent to those skilled in the art upon review of the disclosure. The scope of the invention should, therefore, be

determined not with reference to the above description, but instead should be determined with reference to the pending claims along with their full scope or equivalents.

[0103] One or more features from any embodiment may be combined with one or more features of any other embodiment without departing from the scope of the invention.

[0104] A recitation of "a", "an" or "the" is intended to mean "one or more" unless specifically indicated to the contrary.

WHAT IS CLAIMED IS:

1. A method comprising:
generating an initial key after interacting with an access device;
storing the initial key at a key storage location;
altering the initial key with a public key to form an altered key; and
sending the altered key to a server computer along with an identifier for the access device,
wherein the altered key is changed to the initial key at the server computer and is stored with the identifier in a database in operative communication with the server computer, and
wherein the initial keys that are stored at the key storage location and in the database are used to alter and restore transaction data associated with multiple financial transactions that are conducted using the access device.
2. The method of claim 1 wherein the key is a symmetric key and wherein the key storage location is in the access device, and wherein generating, altering, and sending are conducted the first time that the access device communicates with the server computer.
3. The method of claim 1 further comprising:
altering the identifier to form an altered identifier; and
sending the altered identifier to the server computer,
wherein sending the altered key and the altered identifier data to a server computer is part of a special initialization transaction that is different from a normal purchase transaction.
4. The method of claim 1 wherein interacting with the access device comprises using a portable consumer device to interact with the access device, and wherein altering comprises encrypting.

5. A computer readable medium comprising:
code for generating an initial key after interacting with an access device;
code for storing the initial key at a key storage location;
code for altering the initial key with a public key to form an altered key;
and
code for sending the altered key to a server computer along with an identifier for the access device,
wherein the altered key is changed to the initial key at the server computer and is stored with the identifier in a database in operative communication with the server computer, and
wherein the initial keys that are stored at the key storage location and in the database are used to alter and restore transaction data associated with multiple financial transactions that are conducted using the access device.

6. The computer readable medium of claim 5 further comprising code for storing the altered key in the key storage location.

7. The computer readable medium of claim 5 wherein the portable consumer device is a payment card, and wherein the access device comprises a point of sale device.

8. An access device comprising the computer readable medium of claim 7.

9. The access device of claim 8 wherein the access device is a point of sale terminal.

10. A method comprising:
receiving an altered key and an identifier associated with an access device, wherein the altered key was generated from an initial key after an interaction with the access device;
changing the altered key back to the initial key;
storing the initial key in a database; and

using the initial key to restore transaction data associated with multiple financial transactions conducted using the access device.

11. The method of claim 10 wherein the identifier is a terminal ID.

12. The method of claim 10 wherein the altered key is an encrypted symmetric key that was encrypted using a public key.

13. The method of claim 10 wherein the portable consumer device is a payment card.

14. A computer readable medium comprising code for performing the method of claim 10.

15. A server computer comprising the computer readable medium of claim 10.

16. A method comprising:
identifying a track data element located at a first data location in a data track to encrypt;
altering the track data element;
placing the altered track data element in a second data location that is different from the first data location; and
sending the altered track data element in the second data location to an issuer.

17. The method of claim 16 further comprising, before the altered track data in the second data location arrives at the issuer:
changing altered track data element to its original form;
placing the altered track data element in the first data location; and
forwarding the altered track data element to the issuer.

18. The method of claim 16 wherein altering the track data element comprises using a fast Fourier transform process to alter the track data element.

19. The method of claim 16 wherein altering the track data element comprises using a symmetric key to alter the track data element.

20. The method of claim 16 wherein altering the track data element comprises using a public key to alter the track data element.

21. The method of claim 16 wherein the second data location is field 55.

22. The method of claim 16 wherein the second data location is an issuer discretionary data field.

23. The method of claim 16 wherein the first data location is blank when the altered track data element in the second data location is sent to the issuer.

24. The method of claim 16 further comprising:
placing the altered track data element in the first data location.

25. A computer readable medium comprising:
code for identifying a track data element located at a first data location in a data track to encrypt;
code for altering the track data element using a key;
code for placing the altered track data element in a second data location that is different from the first data location; and
code for sending the altered track data element in the second data location to an issuer.

26. An access device comprising the computer readable medium of claim 25.

27. The access device of claim 25 wherein the apparatus is a point of sale terminal.

28. A method comprising:

receiving a track data element in a second data location that is different from a first data location, wherein the track data element is in altered form in the second data location and wherein the track data element originally resided in the first data location in an unaltered form; and

restoring the track data element in its unaltered form in the first data location,

wherein the restored track data element is subsequently reviewed to determine if a portable consumer device associated with the track data element is authentic.

29. The method of claim 28 wherein the second data location comprises a discretionary data field or field 55.

30. The method of claim 28 wherein the track data element is a card verification value (CVV).

31. The method of claim 28 wherein the altered form is an encrypted form.

32. A computer readable medium comprising code for performing the method of claim 28.

33. A server computer comprising the computer readable medium of claim 32.

34. A method comprising:
identifying a track data element located at a first data location in a data track;
concatenating the track data element and a terminal identifier to form a data string;
altering the data string; and
inserting values from the data string into the first data location.

35. A computer readable medium comprising code for performing the method of claim 34.

1/8

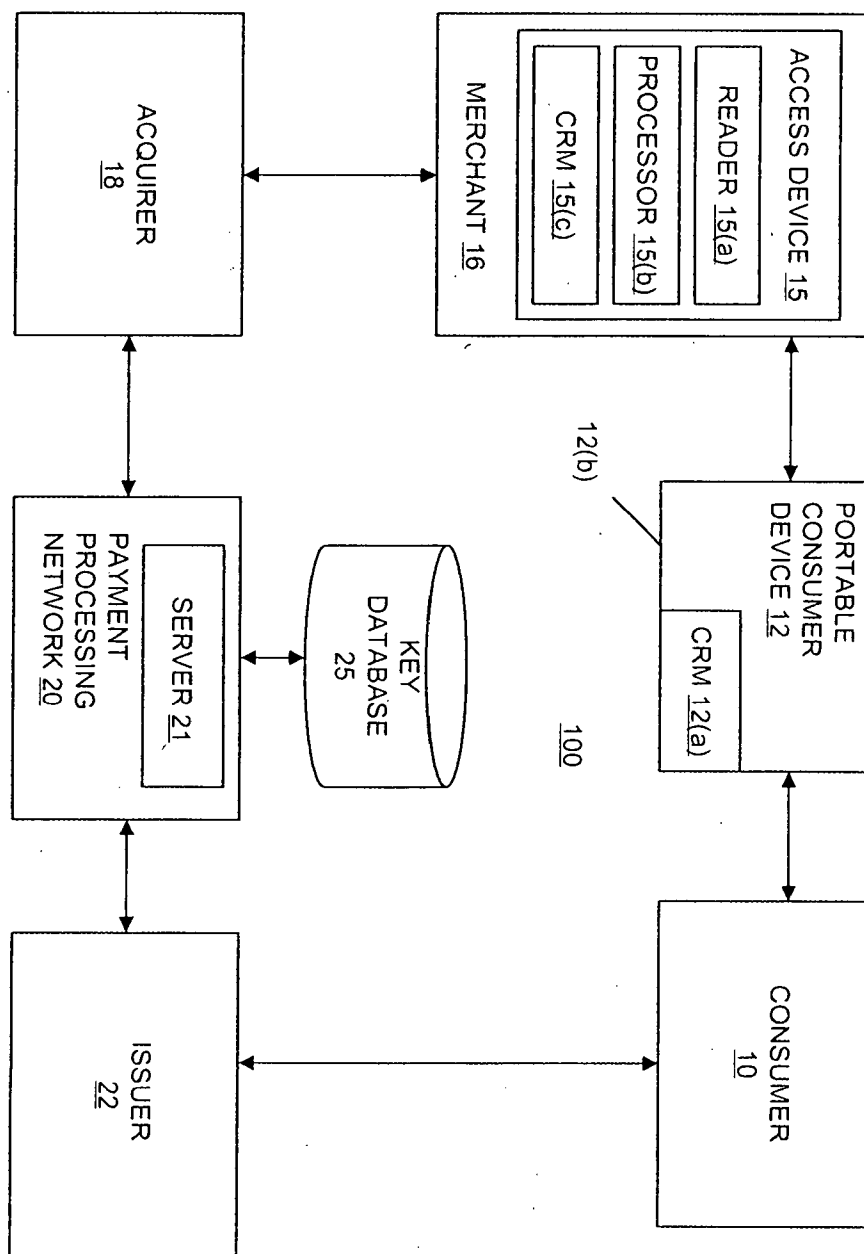


FIG. 1

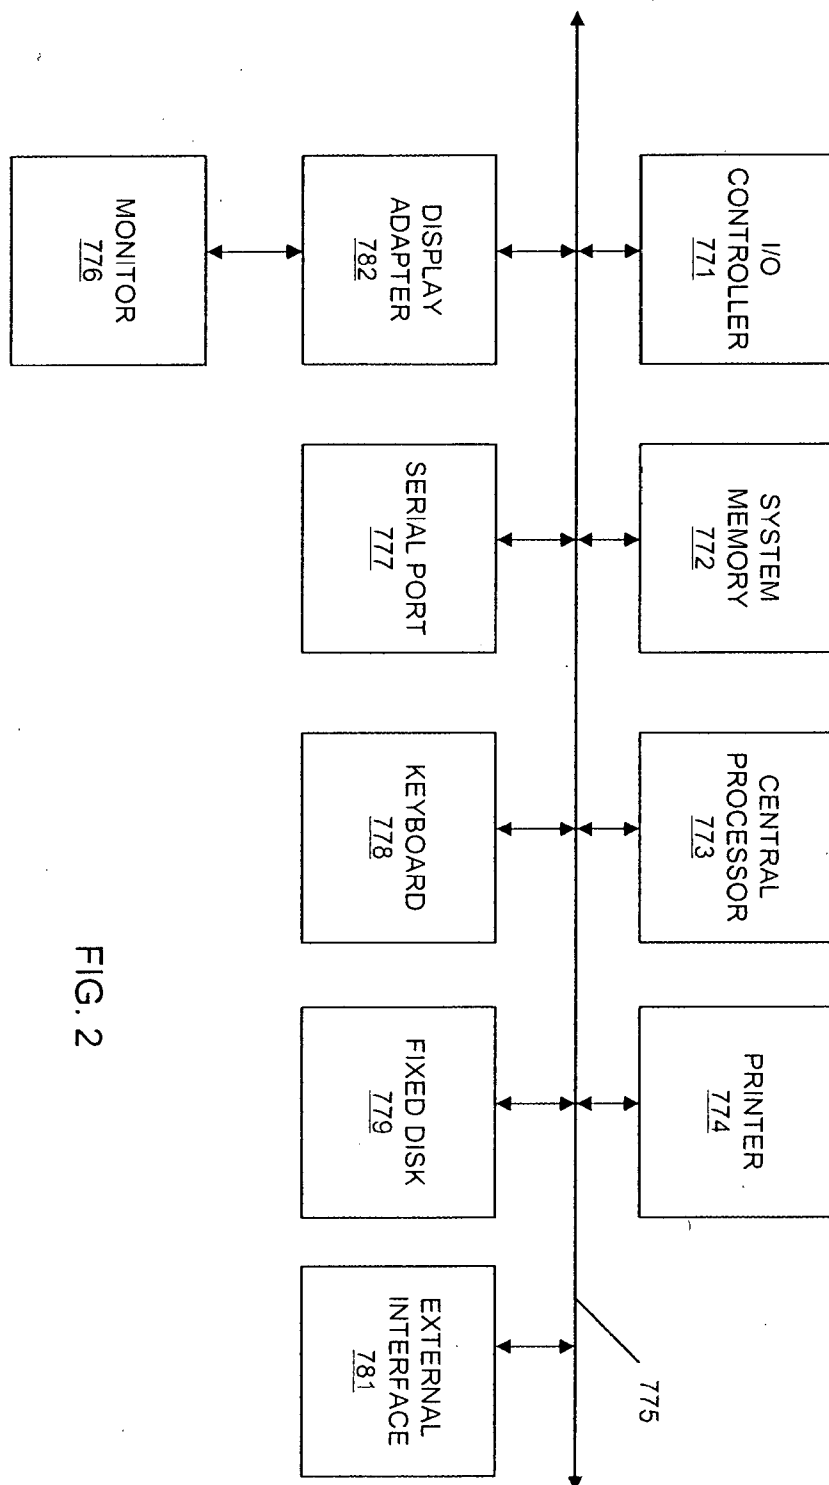


FIG. 2

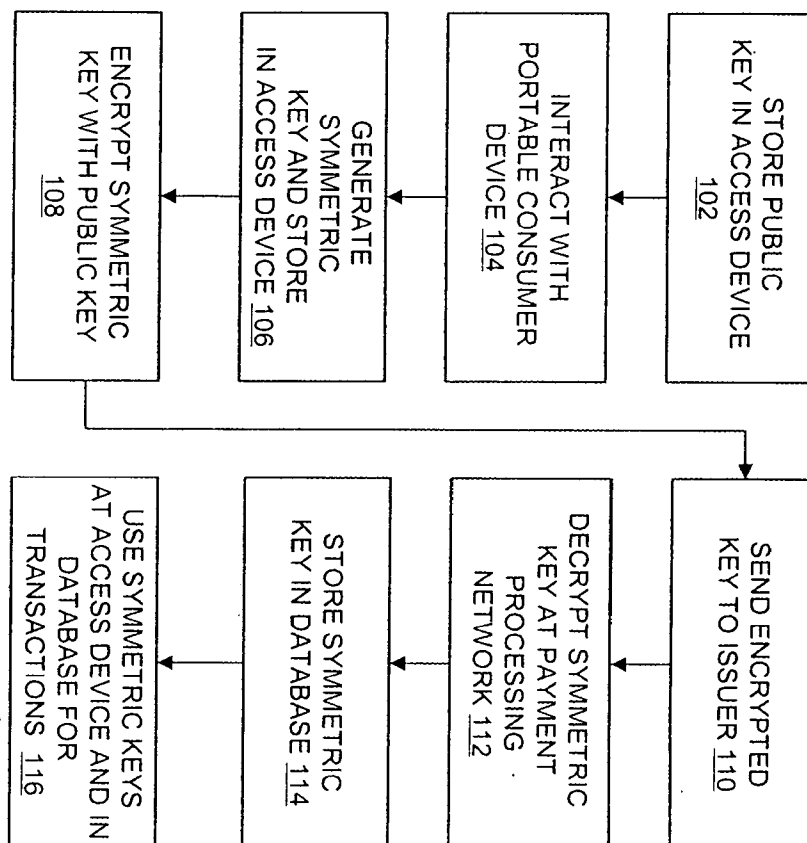


FIG. 3

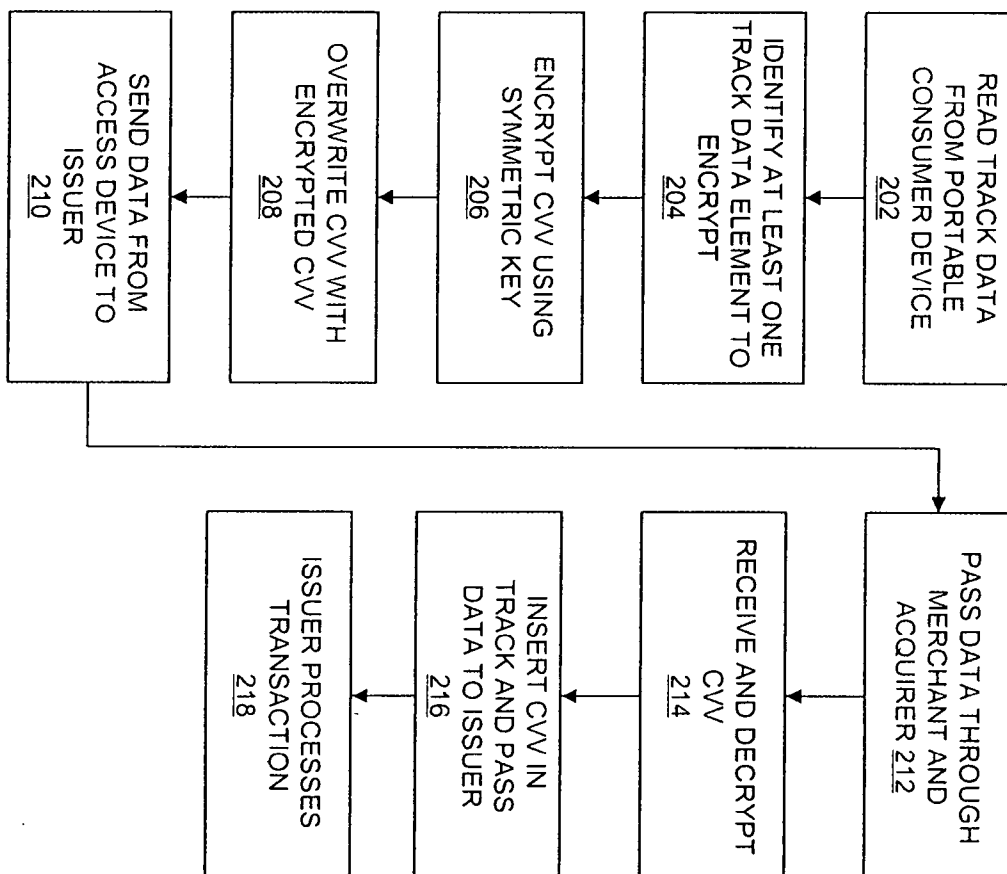


FIG. 4

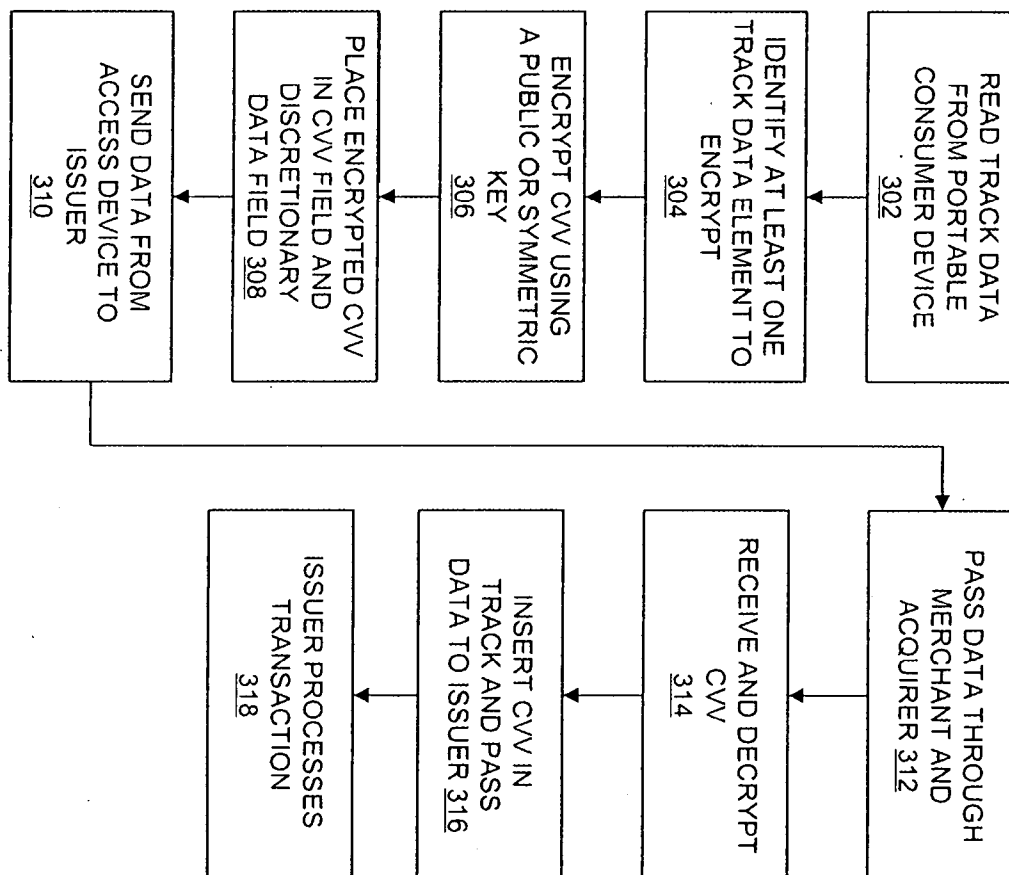


FIG. 5

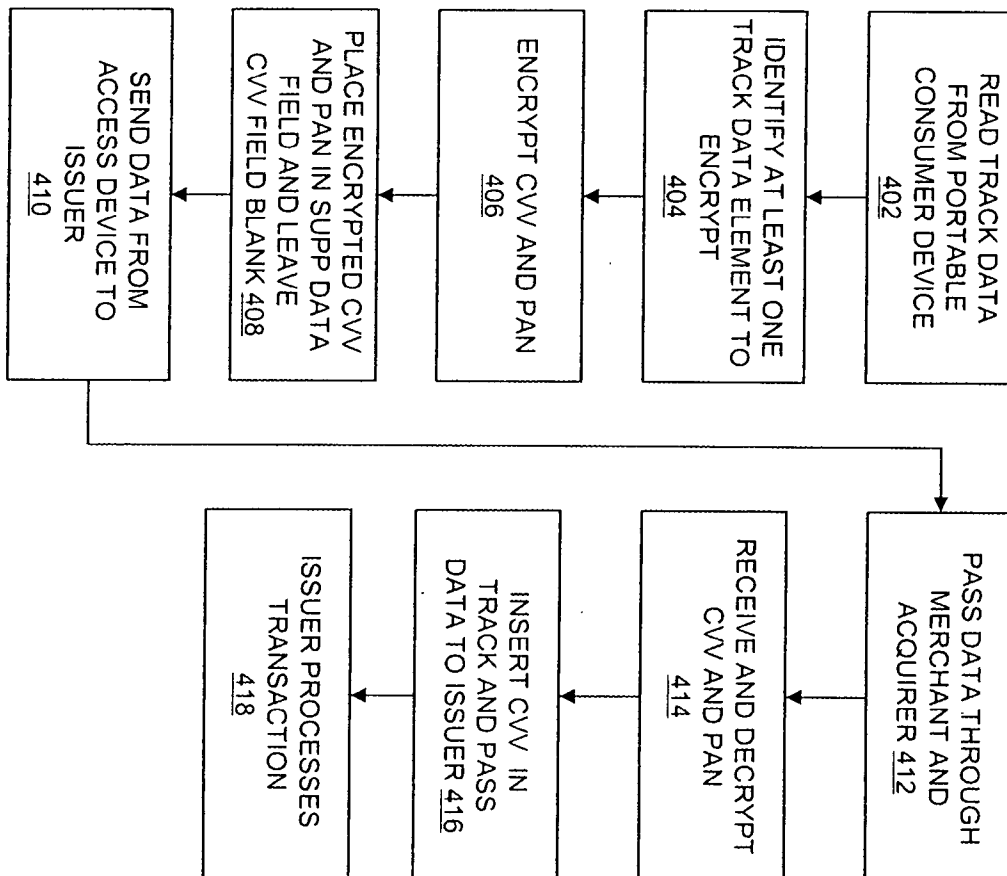


FIG. 6

7/8

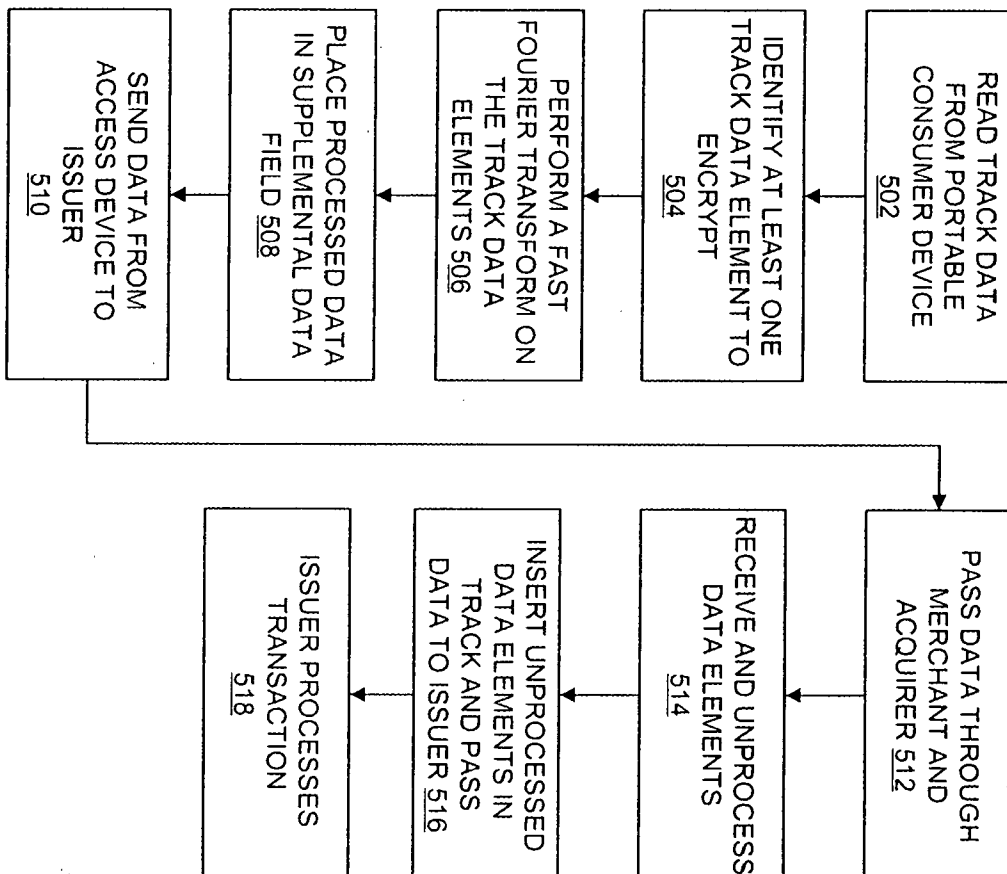


FIG. 7

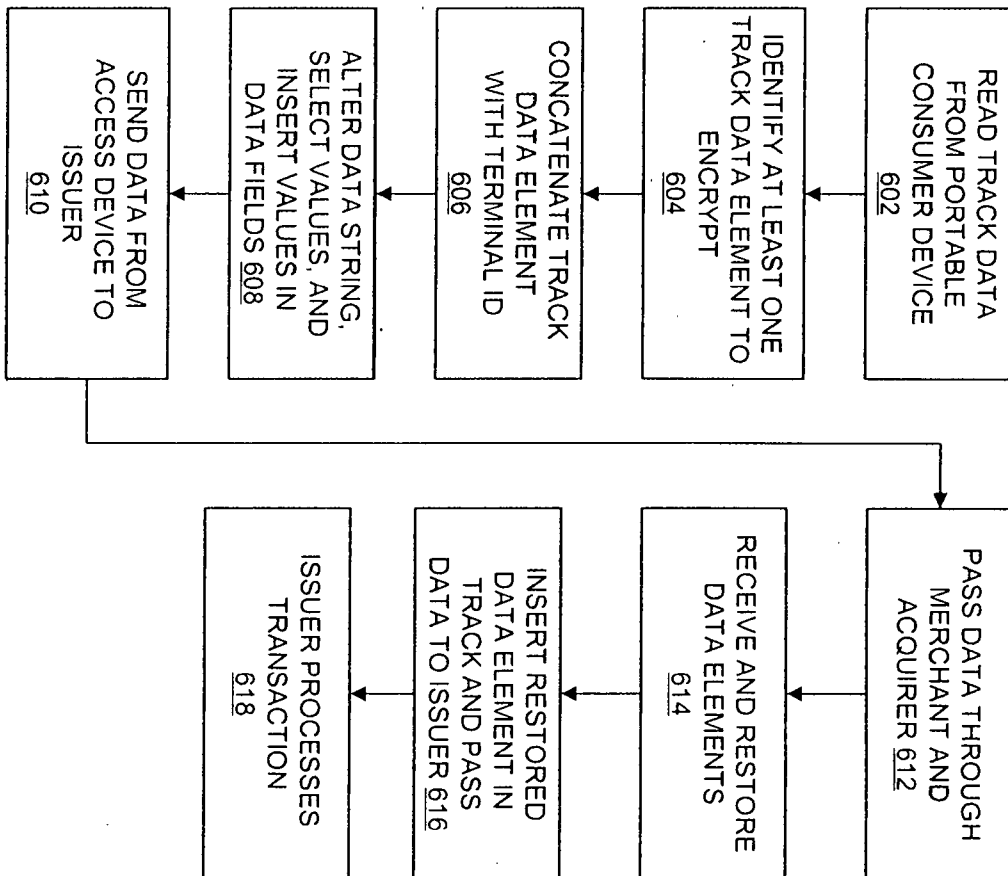


FIG. 8