(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
19 July 2007 (19.07.2007)

PCT

(10) International Publication Number
WO 2007/081677 A1

(51) International Patent Classification:
G06F 17/40 (2006.01) *G06F 17/00* (2006.01)
G06F 17/30 (2006.01)

(21) International Application Number:
PCT/US2007/000016

(22) International Filing Date: 3 January 2007 (03.01.2007)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/326,358 4 January 2006 (04.01.2006) US

(71) Applicant *(for all designated States except US)*: **MICROSOFT CORPORATION** [US/US]; One Microsoft Way, Redmond, Washington 98052-6399 (US).

(72) Inventors: **IYER, Raju R.**; One Microsoft Way, Redmond, Washington 98052-6399 (US). **VISHNUMURTY, Rajendra H.**; One Microsoft Way, Redmond, Washington 98052-6399 (US). **BHAT, Sudin**; One Microsoft Way, Redmond, Washington 98052-6399 (US).

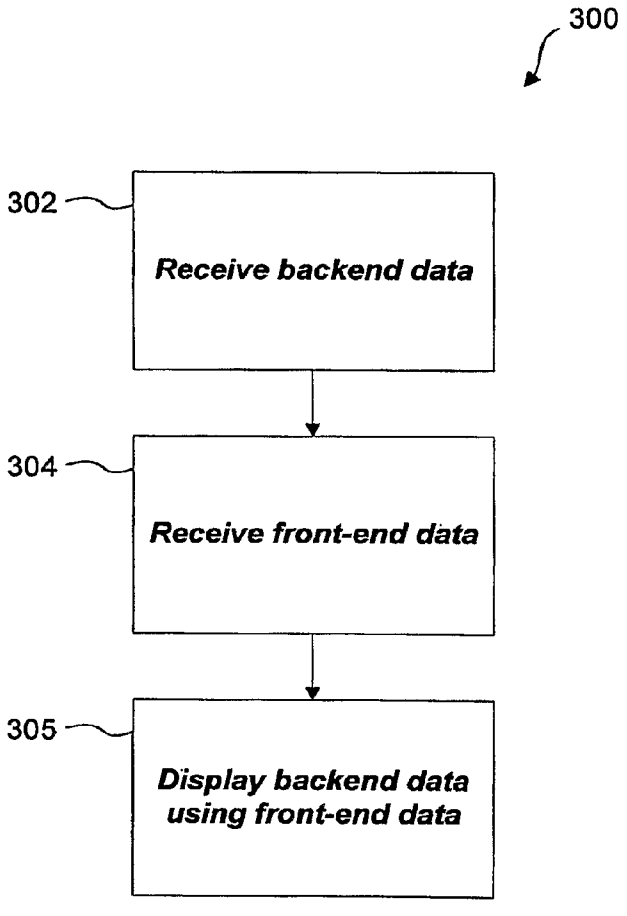
(81) Designated States *(unless otherwise indicated, for every kind of national protection available)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States *(unless otherwise indicated, for every kind of regional protection available)*: ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: STRUCTURED DATA STORAGE

(57) Abstract: Structured data storage allows for efficient searching and loading of data. The structured format allows data to be efficiently received by a program and relatively quickly presented to a user requesting the data through a program interface.



WO 2007/081677 A1

Declarations under Rule 4.17:

— *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*

— *as to the applicant's entitlement to claim the priority of the earlier application (Rule 4.17(iii))*

Published:

— *with international search report*

— *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

STRUCTURED DATA STORAGE

BACKGROUND

Computer systems typically comprise short-term memory and long-term memory. Short-term memory typically uses dynamic RAM, which typically provides quick access to data stored within the RAM. Long-term memory, such as that provided by a hard disk, provides relatively slow access to stored data, but normally retains the data even after power has been turned off. Accordingly, computers use data stored in short-term memory to manipulate and process the data, and use long-term memory to store the data when the data is not being processed.

Users (including various computer processes) typically save the data to disk when finished working with the program and data. Also, users load the stored data from the disk to short-term memory so that the data can be viewed and/or manipulated. However, as the amount of data becomes more voluminous and complex, these operations can require considerable amounts of time to save and to load.

SUMMARY

This summary is provided to introduce a selection of concepts in a simplified form that are further described below in the Detailed Description Section. This summary is not intended to identify key features or essential features of the claimed subject matter, nor is it intended to be used as an aid in determining the scope of the claimed subject matter.

According to aspects of various described embodiments, implementations are provided for a method for implementing structured data storage. Backend data is "core" or "backbone" information that is typically central to the task that a user is trying to accomplish. Backend data can be received from a computer program product such as a hard disk or other long term data storage. The backend data is structured using nodes that are associated with a unique identifier such as a GUID. The nodes are addressable using the unique identifier, and backend data items are associated with corresponding addressable nodes such that the backend nodes can be quickly accessed. Front-end data is typically more related to how the backend data is obtained, used, and presented. Front-end data can be received from a computer program product such as a

hard disk or other long term data storage. The front-end data is structured using nodes that are associated with a unique identifier such as a GUID. The nodes are addressable using the unique identifier, and front-end data items are associated with corresponding addressable nodes such that the front-end nodes can be quickly accessed.

According to another aspect, a system for implementing structured data storage includes a file writer for saving backend data from a computer program to a computer program product, a backend data loader for receiving backend data from a computer program product, a front-end data loader for receiving front-end data from a computer program product, and a display module for displaying the particular backend data item in response to received front-end data for displaying the particular data item.

BRIEF DESCRIPTION OF THE DRAWINGS

Non-limiting and non-exhaustive embodiments are described with reference to the following figures, wherein like reference numerals refer to like parts throughout the various views unless otherwise specified.

FIGURE 1 illustrates an example computing device that may be used according to an embodiment;

FIGURE 2 illustrates an example data storage format for structured data storage; and

FIGURE 3 illustrates an example operational flow 300 for structured data storage.

DETAILED DESCRIPTION

Various embodiments are described more fully below with reference to the accompanying drawings, which form a part hereof, and which show specific exemplary embodiments for practicing the invention. However, embodiments may be implemented in many different forms and should not be construed as limited to the embodiments set forth herein; rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey the scope of the invention to those skilled in the art. Embodiments may be practiced as methods, systems or devices. Accordingly, embodiments may take the form of a hardware implementation, an entirely software implementation or an implementation combining

software and hardware aspects. The following detailed description is, therefore, not to be taken in a limiting sense.

Embodiments may be implemented as a computer process, a computer system (including mobile hand-held computing devices) or as an article of manufacture such as a computer program product. The computer program product may be a computer storage medium readable by a computer system and encoding a computer program of instructions for executing a computer process. The computer program product may also be a propagated signal on a carrier readable by a computing system and encoding a computer program of instructions for executing a computer process.

The logical operations of the various embodiments are implemented (1) as a sequence of computer implemented steps running on a computing system and/or (2) as interconnected machine modules within the computing system. The implementation is a matter of choice dependent on the performance requirements of the computing system implementing the embodiment. Accordingly, the logical operations making up the embodiments described herein are referred to alternatively as operations, steps or modules.

FIGURE 1 illustrates an example computing device that may be used according to an embodiment. The example system for implementing the invention includes a computing device, such as computing device 100. Computing device 100 may be configured as a client, a server, a mobile device, or any other computing device that interacts with data in a network based collaboration system. In a very basic configuration, computing device 100 typically includes at least one processing unit 102 and system memory 104. Depending on the exact configuration and type of computing device, system memory 104 may be volatile (such as RAM), non-volatile (such as ROM, flash memory, etc.) or some combination of the two. System memory 104 typically includes an operating system 105, one or more applications 106, and may include program data 107. In accordance with this embodiment, a server queuing system 108, which is described in detail below, is typically implemented within applications 106.

Computing device 100 may have additional features or functionality. For example, computing device 100 may also include additional data storage devices (removable and/or non-removable) such as, for example, magnetic disks, optical disks,

or tape. Such additional storage is illustrated in FIGURE 1 by removable storage 109 and non-removable storage 110. Computer storage media may include volatile and nonvolatile, removable and non-removable media implemented in any method or technology for storage of information, such as computer readable instructions, data structures, program modules, or other data. System memory 104, removable storage 109 and non-removable storage 110 are all examples of computer storage media. Computer storage media includes, but is not limited to, RAM, ROM, EEPROM, flash memory or other memory technology, CD-ROM, digital versatile disks (DVD) or other optical storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other medium which can be used to store the desired information and which can be accessed by computing device 100 using file writers and loaders. Any such computer storage media may be part of device 100. Computing device 100 may also have input device(s) 112 such as keyboard, mouse, pen, voice input device, touch input device, etc. Output device(s) 114 such as a display, speakers, printer, etc. may also be included.

Computing device 100 also contains communication connections 116 that allow the device to communicate with other computing devices 118, such as over a network. Networks include local area networks and wide area networks, as well as other large-scale networks including, but not limited to, intranets and extranets. Communication connection 116 is one example of communication media. Communication media may typically be embodied by computer readable instructions, data structures, program modules, or other data in a modulated data signal, such as a carrier wave or other transport mechanism, and includes any information delivery media. The term "modulated data signal" means a signal that has one or more of its characteristics set or changed in such a manner as to encode information in the signal. By way of example, and not limitation, communication media includes wired media such as a wired network or direct-wired connection, and wireless media such as acoustic, RF, infrared and other wireless media. The term computer readable media as used herein includes both storage media and communication media.

FIGURE 2 illustrates an example data storage format for structured data storage. Window 200 comprises an example file structure that is used in structured data storage. Node 210 is a root node, which typically comprises subordinate nodes in a tree-like structure. For example, node 210 comprises node 220 (which is used to

store "backend" data) and node 250 (which is used to store "front-end" data). Additional subordinate (or "child") nodes can be used to store attributes and other information that are related to a superior (or "parent") node.

Each node is typically associated with a GUID (e.g., a unique identifier) that allows nodes to be uniquely specified and addressed. As an example, a GUID for a node can be "hashed" to provide an address for a unique key such that the physical address of the node can be quickly located. Child nodes can be related to parent nodes by associating any child node GUIDs with a parent node (so that the resulting structure can be, for example, traversed by following associated links). The nodes can contain information for accessing elements within fixed-length and variable-length structures. Accordingly, the resulting structure can be quickly accessed to implement efficient searching and loading of data.

Saving and retrieving information to and from a disk is typically time consuming, and is usually at least an inconvenience for the user who often has to wait for the information to be loaded. Storing the data in a structured format allows data to be efficiently received by a program and relatively quickly presented to a user requesting the data through the program interface.

As demonstrated in window 200, the data to be manipulated by a user of an application program is organized as backend data and front-end data. The application program can be a program such as a project management tool. As such, a user can manage a project by using both the back-end data and the front-end data, which are typically entered by the user, manipulated and organized using the program, and stored on disk for later retrieval. The data is structured such that a program accessing the data typically loads the backend information first, followed by the front-end information (which typically is used for interfacing with the backend data).

Backend data (such as represented by node 250) is "core" or "backbone" information that is typically central to the task that a user is trying to accomplish. (In comparison, front-end data, discussed below, is more related to how the backend data is obtained, used, and presented). For example, backend data of a project management program comprises information (typically stored as child nodes 222 of parent node 220) such as task name, resources calendars, assignments, lookup tables, constraints, and the like.

Task names can comprise a name (or number) of a task that is associated with a project. Resources can comprise people (or other resources) that are associated with the task. Calendars can be used to specify dates and/or times for the task, assignments can be used to associate resources with tasks. Lookup tables can be used to store, for example, heuristics or other types of organized knowledge related to accomplishing the task. Constraints can be used to limit when, for example, certain resources are available.

The contents of node 224 (related to "tasks") have been exposed to show further child nodes. The child nodes can be used to represent fixed data for a given property, table indexes, actual data (such as the task name), GUID-based hash location, and indexes to data (from hashed locations or other indexes). Both the GUID hash and indexes to child nodes of back-end data can be pre-computed and then stored such that the pre-computed hashes and indexes can be used (without substantial computation, such as computing the hash function for the GUID) as the data is being loaded by the program.

Front-end data (such as represented by node 250) is more related to how the backend data is obtained, used, and presented. For example, front-end information used by a project management program comprises information (typically stored as child nodes 252 of parent node 250) information such as external data links, import/export map information, forms, macro language programs, front-end tables, views, and filters, project reports, groups, toolbars, custom field information and the like.

For example, external data links, import map information (e.g., from a spread sheet), and forms can be used to obtain backend data. Macro language programs, filters, and groups can be used to manipulate the obtained backend data. Forms, tables, filters, project reports, groups, toolbars, and custom field information can be used to control how the backend data is displayed. (Combinations of the above functions can be accomplished, such as manipulating and displaying data by filtering.)

The various views (e.g., the front-end information for displaying backend data) can be stored in node 254. Which of the views are visible (at the time the program is closed, for example) can be stored in node 256. The information stored in nodes 254 and 256 are used by the program to determine which view was last used such that the program can quickly search for and locate the particular backend data that was last

being used by the user. The program can thus quickly restore the view because (for example) the backend data has already been loaded into memory, and the related hashes of the GUIDs and related indexes have been pre-computed for quick referencing.

FIGURE 3 illustrates an example operational flow 300 for structured data storage. At operation 302, backend data is received. The backend data can be received from a computer program product such as a hard disk or other long term data storage. The backend data is structured using nodes that are associated with a unique identifier such as a GUID. The nodes are addressable using the unique identifier, and backend data items are associated with corresponding addressable nodes such that the backend nodes can be quickly accessed.

The backend data items can be located using a pre-computed hash value for the data item. The pre-computed hash values can be located with other backend data. Additionally, the backend data items can be located using pre-computed and predetermined indexes for the data item. The pre-computed indexes can be located with other backend data.

At operation 304, front-end data is received. The front-end data can be received from a computer program product and is typically stored in association with the backend data. The backend data and front-end data can also be sibling nodes The front-end data is structured using nodes that are associated with a unique identifier such as a GUID. The nodes are addressable using the unique identifier, and front-end data items are associated with corresponding addressable nodes such that the front-end nodes can be quickly accessed.

The front-end data also comprises information for displaying a particular backend data item of received backend data. The display information can comprise information such as display information related to a view of a particular backend data item when last viewed by a user.

The front-end data items can be located using a pre-computed hash for the data item. The pre-computed hash can be located with other backend data. Additionally, the front-end data items can be located using pre-computed and predetermined indexes for the data item. The pre-computed indexes can be located with other front-end data.

At operation 306, backend data is displayed using information from the front-end data. In general, the front-end information describes how the backend data can be displayed. For example, the front-end information can store information related to a view of backend data as last viewed by a user. Also, in various embodiments, the backend data can be displayed before loading all of the front-end data. Additionally, the receiving order of the front-end data can be set by heuristics, such as "load in order of most recently viewed," and "load front-end data that can be navigated to by the last view saved."

Reference has been made throughout this specification to "one embodiment," "an embodiment," or "an example embodiment" meaning that a particular described feature, structure, or characteristic is included in at least one embodiment of the present invention. Thus, usage of such phrases may refer to more than just one embodiment. Furthermore, the described features, structures, or characteristics may be combined in any suitable manner in one or more embodiments.

One skilled in the relevant art may recognize, however, that the invention may be practiced without one or more of the specific details, or with other methods, resources, materials, etc. In other instances, well known structures, resources, or operations have not been shown or described in detail merely to avoid obscuring aspects of the invention.

While example embodiments and applications of the present invention have been illustrated and described, it is to be understood that the invention is not limited to the precise configuration and resources described above. Various modifications, changes, and variations apparent to those skilled in the art may be made in the arrangement, operation, and details of the methods and systems of the present invention disclosed herein without departing from the scope of the claimed invention.

CLAIMS

What is claimed is:

1. A computer-implemented method for receiving structured data, comprising:

receiving backend data from a computer program product, wherein the backend data is structured using nodes, wherein the nodes are associated with a unique identifier and the nodes are addressable using the unique identifier, and wherein particular back-end data items are associated with corresponding addressable nodes;

receiving front-end data from a computer program product; wherein the front-end data is structured using nodes, wherein the nodes are associated with a unique identifier and the nodes are addressable using the unique identifier, and wherein the front-end data comprises information for displaying a particular backend data item of the received backend data; and

displaying the particular backend data item in response to received front-end data for displaying the particular data item.

2. The method of Claim 1, wherein the received front-end data for displaying the particular backend data item is addressed using a unique identifier that is associated with the received front-end data for displaying the particular data item.

3. The method of Claim 1, wherein the displayed particular backend data item is located using a pre-computed hash for the data item, wherein the pre-computed hash is located within the received backend data.

4. The method of Claim 1, wherein the received particular backend data items are addressable using pre-computed hash function results that are stored in the received backend data.

5. The method of Claim 1, wherein the received particular backend data items are addressable using pre-computed indexes that are stored in the received backend data.

6. The method of Claim 1, wherein the backend data is received before the front-end data is received.

7. The method of Claim 1, wherein the information for displaying a particular backend data item comprises information relating to a last used view of backend information.

8. A system for receiving structured data, comprising:

a file writer for saving backend data from a computer program to a computer program product, wherein the backend data is structured using nodes, wherein the nodes are associated with a unique identifier and the nodes are addressable using the unique identifier, and wherein particular back-end data items are associated with corresponding addressable nodes, and for saving front-end data, wherein the front-end data is structured using nodes, wherein the nodes are associated with a unique identifier and the nodes are addressable using the unique identifier, and wherein the front-end data comprises information for displaying a particular backend data item of the received backend data;

a backend data loader for receiving backend data from a computer program product;

a front-end data loader for receiving front-end data from a computer program product; and

a display module for displaying the particular backend data item in response to received front-end data for displaying the particular data item.

9. The system of Claim 8, wherein the received front-end data for displaying the particular backend data item is addressed using a unique identifier that is associated with the received front-end data for displaying the particular data item.

10. The system of Claim 8, wherein the displayed particular backend data item is located using a pre-computed hash for the data item, wherein the pre-computed hash is located within the received backend data.

11. The system of Claim 8, wherein the received particular backend data items are addressable using pre-computed hash function results that are stored in the received backend data.

12. The system of Claim 8, wherein the received particular backend data items are addressable using pre-computed indexes that are stored in the received backend data.

13. The system of Claim 8, wherein the backend data is received before the front-end data is received.

14. The system of Claim 8, wherein the information for displaying a particular backend data item comprises information relating to a last used view of backend information.

15. A system for receiving structured data, comprising:

means for receiving backend data from a computer program product, wherein the backend data is structured using nodes, wherein the nodes are associated with a unique identifier and the nodes are addressable using the unique identifier, and wherein particular back-end data items are associated with corresponding addressable nodes;

means for receiving front-end data from a computer program product; wherein the front-end data is structured using nodes, wherein the nodes are associated with a unique identifier and the nodes are addressable using the unique identifier, and wherein the front-end data comprises information for displaying a particular backend data item of the received backend data; and

means for displaying the particular backend data item in response to received front-end data for displaying the particular data item.

16. The system of Claim 15, wherein the received front-end data for displaying the particular backend data item is addressed using a unique identifier that is associated with the received front-end data for displaying the particular data item.

17. The system of Claim 15, wherein the received particular backend data items are addressable using pre-computed hash function results that are stored in the received backend data.

18. The system of Claim 15, wherein the received particular backend data items are addressable using pre-computed indexes that are stored in the received backend data.

19. The system of Claim 15, wherein the backend data is received before the front-end data is received.

20. The system of Claim 15, wherein the information for displaying a particular backend data item comprises information relating to a last used view of backend information.

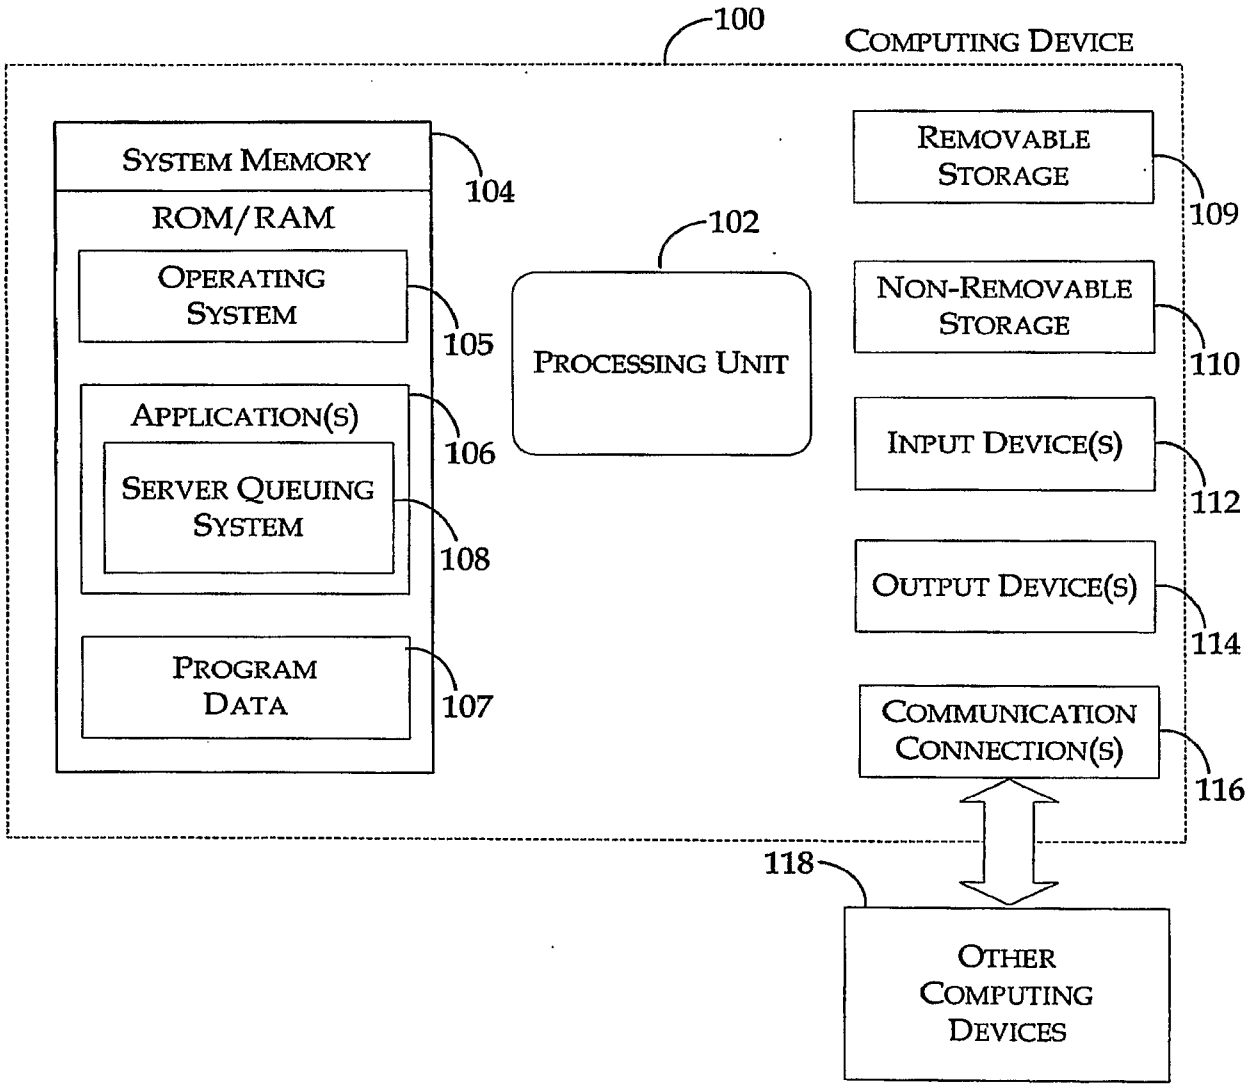

100
COMPUTING DEVICE
SYSTEM MEMORY
104
ROM/RAM
OPERATING SYSTEM
105
APPLICATION(S)
106
SERVER QUEUING SYSTEM
108
PROGRAM DATA
107
102
PROCESSING UNIT
REMOVABLE STORAGE
109
NON-REMOVABLE STORAGE
110
INPUT DEVICE(S)
112
OUTPUT DEVICE(S)
114
COMMUNICATION CONNECTION(S)
116
118
OTHER COMPUTING DEVICES

Fig. 1

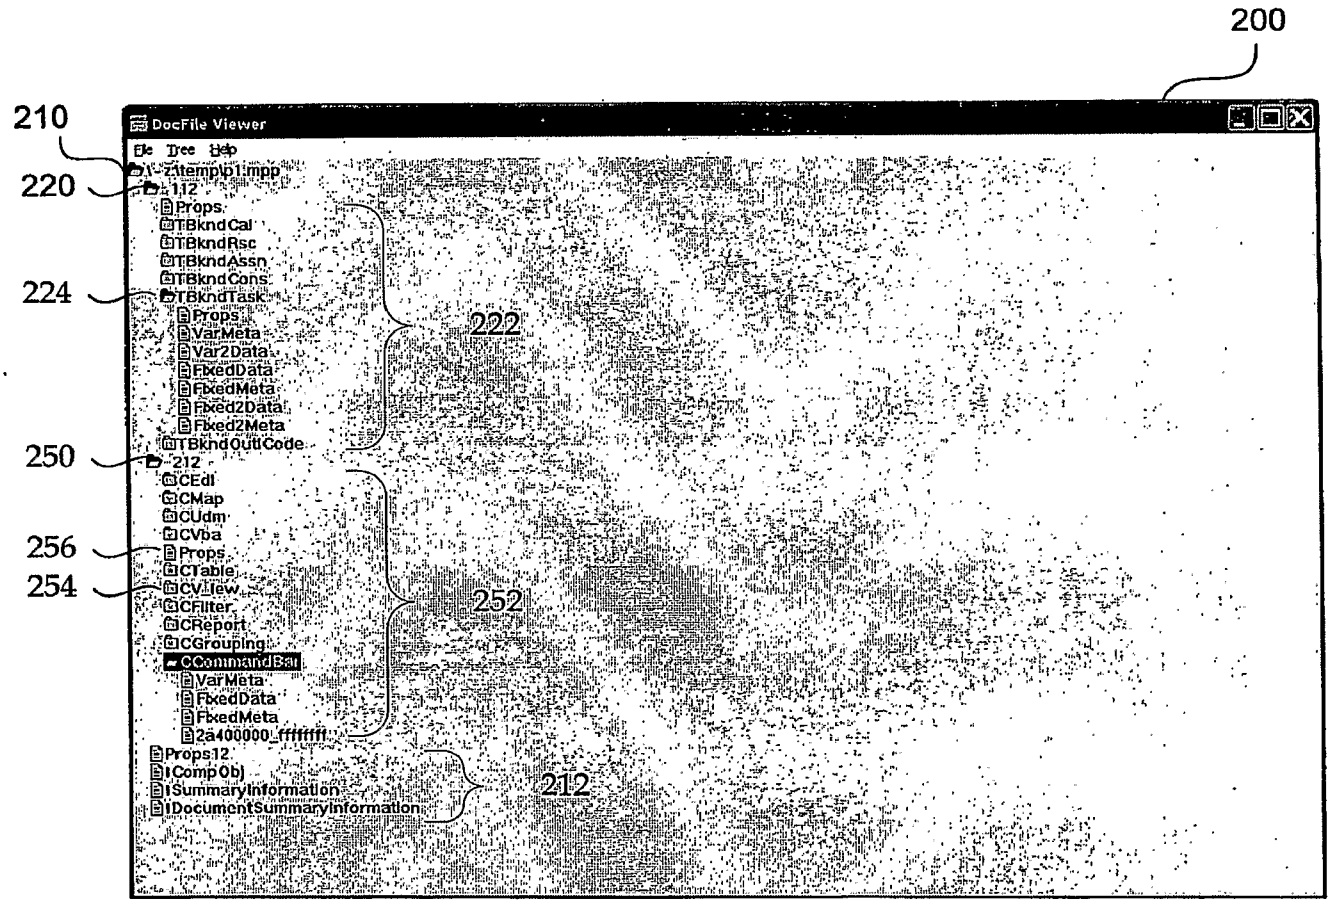

200
210
220
224
250
256
254
DocFile Viewer
File Tree Help
z:\temp\p1.mpp
112
Props
TBkndCal
TBkndRsc
TBkndAssn
TBkndCons
TBkndTask
Props
VarMeta
Var2Data
FixedData
FixedMeta
Fixed2Data
Fixed2Meta
TBkndOutlCode
212
CEdl
CMap
CUdm
CVba
Props
CTable
CView
CFilter
CReport
CGrouping
CCommandBar
VarMeta
FixedData
FixedMeta
2a400000_ffffffff
Props12
\1CompObj
\5SummaryInformation
\5DocumentSummaryInformation
222
252
212

Fig. 2

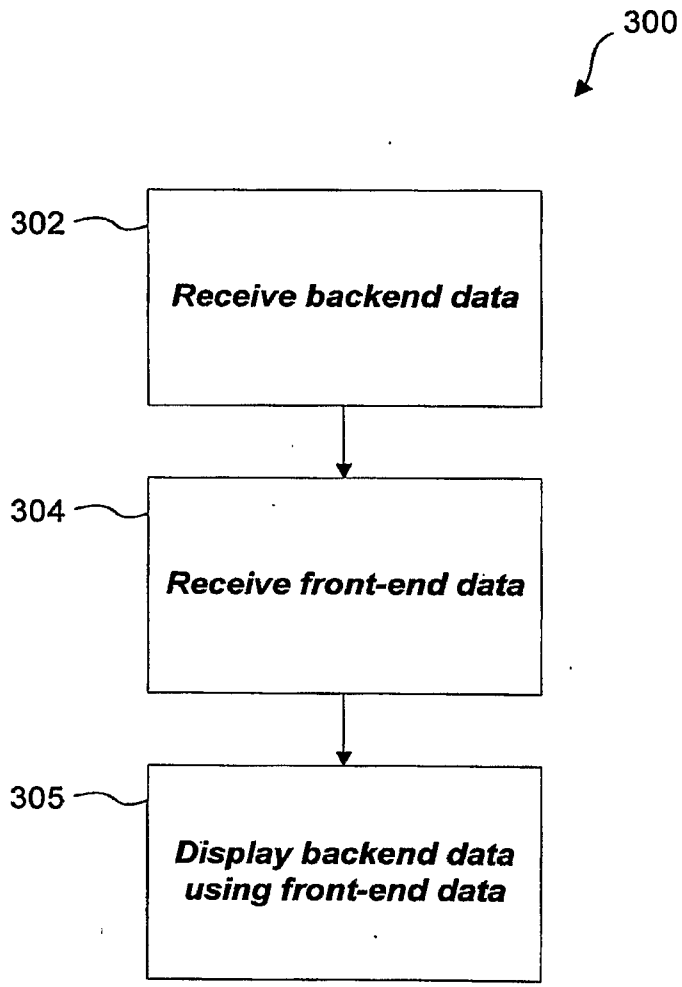

300
302
Receive backend data
304
Receive front-end data
305
Display backend data using front-end data

Fig. 3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2007/000016

A. CLASSIFICATION OF SUBJECT MATTER

G06F 17/40(2006.01)i, G06F 17/30(2006.01)i, G06F 17/00(2006.01)i

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 8: G06F G06Q G06T

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched
KOREAN PATENTS AND APPLICATIONS FOR INVENTIONS SINCE 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
PAJ, FPD, USPAT, eKIPASS, IEEE, YAHOO, GOOGLE "STRUCTRED""DATA""NODE""TREE""IDENTIFIER"

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 6314434 B1 (FUJITSU LIMITED) 6 NOVEMBER 2001 (2001-11-06) see the abstract, figure 1, column 4 line 18-column 5 line 55	1-5, 8-12, 15-18
A		6-7, 13-14, 19-20
Y	US 6516320 B1 (PLIANT TECHNOLOGIES, INC.) 04 FEBURARY 2003 (2003-02-04) see the abstract, figure 2, column 3 line 15 - column 13 line 17	1-5, 8-12, 15-18
A		6-7, 13-14, 19-20
A	US 6516390 B1 (EMC CORPORATION) 04 FEBRUARY 2003 (2003-02-04) see the abstract, figures 3 and 5, column 6 line 45 - column 7 line 43	1-20
A	US 2004/0218203 A1 (IBM CORPORATION) 04 NOVEMBER 2004 (2004-11-04) see the abstract, figure 1, paragraph [0025] - [0045]	1-20

☐ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:
"A" document defining the general state of the art which is not considered to be of particular relevance
"E" earlier application or patent but published on or after the international filing date
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)
"O" document referring to an oral disclosure, use, exhibition or other means
"P" document published prior to the international filing date but later than the priority date claimed
"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents,such combination being obvious to a person skilled in the art
"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
30 MAY 2007 (30.05.2007)	**31 MAY 2007 (31.05.2007)**

Name and mailing address of the ISA/KR
Korean Intellectual Property Office
920 Dunsan-dong, Seo-gu, Daejeon 302-701,
Republic of Korea
Facsimile No. 82-42-472-7140

Authorized officer
CHEKAL Hyun
Telephone No. 82-42-481-5667

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.
PCT/US2007/000016

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US06314434	06.11.2001	JP11296544A2	29.10.1999
		US6314434BA	06.11.2001
US06516320	04.02.2003	AU200035163A1	28.09.2000
		AU200035163A5	28.09.2000
		EP01159692A1	05.12.2001
		US6516320B1	04.02.2003
		US6516320BA	04.02.2003
		W0200054184A1	14.09.2000
US06516390	04.02.2003	US6516390B1	04.02.2003
		US6516390BA	04.02.2003
US20040218203A1	04.11.2004	CA2523427AA	11.11.2004
		CA2523427A1	11.11.2004
		CN1781073A	31.05.2006
		EP01623315A2	08.02.2006
		JP18525566	09.11.2006
		JP2006525566T2	09.11.2006
		KR1020060008306	26.01.2006
		KR2006008306A	26.01.2006
		US2004218203A1	04.11.2004
		US2004218203AA	04.11.2004
		W02004097620A2	11.11.2004
		W02004097620A3	14.07.2005