

(19) **DANMARK**



Patent- og
Varemærkestyrelsen

(10) **DK/EP 3176779 T3**

(12) **Oversættelse af
europæisk patentskrift**

-
- (51) Int.Cl.: *G 06 F 17/30 (2006.01)* *G 06 F 21/32 (2013.01)* *G 06 F 21/60 (2013.01)*
G 06 F 21/62 (2013.01) *G 06 Q 10/10 (2012.01)* *G 06 Q 20/34 (2012.01)*
G 06 Q 20/38 (2012.01) *G 06 Q 20/40 (2012.01)*
- (45) Oversættelsen bekendtgjort den: **2019-04-08**
- (80) Dato for Den Europæiske Patentmyndigheds bekendtgørelse om meddelelse af patentet: **2019-01-02**
- (86) Europæisk ansøgning nr.: **16159545.9**
- (86) Europæisk indleveringsdag: **2016-03-10**
- (87) Den europæiske ansøgnings publiceringsdag: **2017-06-07**
- (30) Prioritet: **2015-12-02 IN 4552MU2015**
- (84) Designerede stater: **AL AT BE BG CH CY CZ DE DK EE ES FI FR GB GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO PL PT RO RS SE SI SK SM TR**
- (73) Patenthaver: **Tata Consultancy Services Limited, Nirmal Building, 9th Floor , Nariman Point , Maharashtra, 400021 Mumbai, Indien**
- (72) Opfinder: **MONDAL, Sutapa, Tata Consultancy Services Limited, Tata Research Development & Design Centre, 54-B, Hadapsar Industrial Estate, Hadapsar, 411013 Pune, Maharashtra, Indien**
MANJUNATH, Sumesh, Tata Consultancy Services Limited, Tata Research Development & Design Centre, 54, Hadapsar Industrial Estate, Hadapsar, 411013 Pune, Maharashtra, Indien
SAXENA, Rohit, Tata Consultancy Services Limited, Tata Research Development & Design Centre, 54, Hadapsar Industrial Estate, Hadapsar, 411013 Pune, Maharashtra, Indien
SHUKLA, Manish, Tata Consultancy Services Limited, Tata Research Development & Design Centre, 54, Hadapsar Industrial Estate, Hadapsar, 411013 Pune, Maharashtra, Indien
RADADIA, Purushotam Gopaldas, Tata Consultancy Services Limited, Tata Research Development & Design Centre, 54, Hadapsar Industrial Estate, Hadapsar, 411013 Pune, Maharashtra, Indien
KARANDE, Shirish Subhash, Tata Consultancy Services Limited, Tata Research Development & Design Centre, 54, Hadapsar Industrial Estate, Hadapsar, 411013 Pune, Maharashtra, Indien
LODHA, Sachin Premsukh, Tata Consultancy Services Limited, Tata Research Development & Design Centre, 54, Hadapsar Industrial Estate, Hadapsar, 411013 Pune, Maharashtra, Indien
- (74) Fuldmægtig i Danmark: **Plougmann Vingtoft A/S, Strandvejen 70, 2900 Hellerup, Danmark**
- (54) Benævnelse: **SYSTEMER OG FREMGANGSMÅDER TIL SENSITIV AUDIOZONE OMARRANGERING**
- (56) Fremdragne publikationer:
US-A1- 2008 144 787
US-A1- 2012 150 748
US-A1- 2015 127 538

DESCRIPTION

CROSS-REFERENCE TO RELATED APPLICATIONS AND PRIORITY

[0001] This patent application claims priority to India Patent Application 4552/MUM/2015, filed on December 2, 2015, the entirety of which is hereby incorporated by reference.

TECHNICAL FIELD

[0002] The embodiments herein generally relate to media processing systems, and, more particularly, to systems and methods for sensitive audio zone rearrangement.

BACKGROUND

[0003] Data privacy is a major concern in any industry where majority of user information deal with sensitive information for example, user details, credit card number, CVV number, account number, and the like, which essentially indicate use of sensitive content connected with data privacy. In a Payment Card Industry (PCI) scenario it is very common to have a phone based customer care support for authentication and query processing, wherein Customer Care Representative (CCR) or agent normally require customer's credit card number and some additional personal information to validate them. Taking into account budget constraints and profitability margins, these setups normally have few or negligible controls which discourage the agents from using customer data for malicious use.

[0004] Moreover, for compliance, audit and training purposes these setups employ call recording facilities, which in turn increase data leakage issue manifolds. Customer access their account information or perform transactions either through web portals or interactive voice response (IVR) gateways. Web portal network traffic is normally encrypted and transmitted on secure channels. Apart from the customer, no other human involvement is required. Although this is not applicable to an IVR based system, sometimes, depending on the transaction type or query requirement, an agent needs to be present to assist the customer. The agent can either request the customer to input the credit card number using keypad, which consists of in band DTMF signals to convey data, or speak it out. In both the input mediums the information being conveyed is structured and is of limited dictionary size. Typically, in the PCI customer care support, authentication and query processing is normally backed by a web or desktop based application, wherein additional customer details are entered, for example, date of birth or phone number, for verification purposes, or customer specific information is displayed for further processing and query answering. This may lead to privacy attacks thereby resulting in targeted advertisement, personal data loss, monetary loss, and, high chance of identity theft for customer. Similarly, the fallout of such data leakage leads to the service provider loss in

reputation, customer loss and monetary losses in the form of settlements.

SUMMARY

[0005] The following presents a simplified summary of some embodiments of the disclosure in order to provide a basic understanding of the embodiments. This summary is not an extensive overview of the embodiments. It is not intended to identify key/critical elements of the embodiments or to delineate the scope of the embodiments. Its sole purpose is to present some embodiments in a simplified form as a prelude to the more detailed description that is presented below.

[0006] In view of the foregoing, an embodiment herein provides system and method for sensitive information rearrangement.

[0007] In one aspect, a system for sensitive information rearrangement is provided. The system comprising: a memory storing instructions; a sensitive information processor coupled to the memory, wherein the sensitive information processor is configured by the instructions to: obtain, in real time, an input specific to at least one of a transaction and a query initiation from a user, wherein the input is at least one of a speech or dual tone multi frequency (DTMF) tones corresponding to an identity (e.g., an identity card) associated with the user, extract, in the real time, sensitive information specific to the identity of the user from the input, and generate in the real time, a virtual user identifier corresponding to the sensitive information, wherein the virtual user identifier is specific to at least one of the transaction being performed by the user and the query initiation in the real time.

[0008] The sensitive information processor performs a honey encryption technique on the sensitive information to generate the virtual user identifier based on a derived key obtained from a master key that is used to perform the encryption, a session identifier specific to the transaction, and cumulative energy of the user in the speech. In an alternative embodiment, the sensitive information processor is further configured by the instructions to perform a cipher block chaining message authentication code (CBCMAC) on the sensitive information to obtain a tag, and perform format preserving encryption, operating in a counter (CTR) and CBCMAC mode, on the sensitive information to generate the virtual user identifier based on a counter value derived from cumulative energy of the user in the speech, and the tag.

[0009] The system further comprises a speech engine that comprises a speech regeneration module configured to regenerate the virtual user identifier using a corresponding user speech model each time the user performs a transaction or initiates a query for processing. The speech regeneration module is further configured to extract (i) a first set of letters from the input present in the identity, and (ii) a second set of letters from the input to obtain the sensitive information, generate a remapping table based on the first set of letters and the second set of letters, and rearrange, using the remapping table, the sensitive information to generate the virtual user identifier for performing the transaction. The virtual user identifier is generated as

at least one of a speech of the user and DTMF tones each time the user performs a transaction or initiates a query for processing. The sensitive information is extracted using a keyword spotting technique.

[0010] The system further comprises a notification agent that is configured to compute a score for the speech obtained in real time, perform a comparison of the score with a corresponding user speech model, and trigger an action based on the comparison, wherein the action comprises a notification message being communicated to a communication device associated with the user. The user is authenticated when the score is greater than a predefined threshold.

[0011] In another aspect, a method for sensitive information rearrangement is provided. The method comprising: obtaining, in real time, a using sensitive information processor, an input specific to at least one of a transaction and a query initiation from a user, wherein the input is at least one of a speech or dual tone multi frequency (DTMF) tones corresponding to an identity associated with the user; extracting, in the real time, sensitive information specific to the identity of the user from the input; and generating in the real time, a virtual user identifier corresponding to the sensitive information, wherein the virtual user identifier is specific to the at least one of the transaction being performed by the user and the query initiation in the real time.

[0012] The computer implemented method further comprises performing, using the sensitive information processor, a honey encryption technique on the sensitive information to generate the virtual user identifier based on a derived key obtained from a master key that is used to perform the encryption, a session identifier specific to the transaction, and cumulative energy of the user in the speech. The computer implemented method further comprises performing a cipher block chaining message authentication code (CBCMAC) on the sensitive information to obtain a tag; and performing format preserving encryption, operating in a counter (CTR) and CBCMAC mode, on the sensitive information to generate the virtual user identifier based on a counter value derived from cumulative energy of the user in the speech, and the tag.

[0013] The computer implemented method further comprises regenerating, using a speech regeneration module stored in a speech engine, the virtual user identifier using a corresponding user speech model each time the user performs a transaction or initiates a query for processing. The computer implemented method further comprises extracting, using the speech regeneration module, (i) a first set of letters from the input present in the identity, and (ii) a second set of letters from the input to obtain the sensitive information; generating a remapping table based on the first set of letters and the second set of letters; and rearranging, using the remapping table, the sensitive information to generate the virtual user identifier for performing the transaction or for initiating the query for processing.

[0014] The virtual user identifier is generated as at least one of a speech of the user and DTMF tones each time the user performs a transaction and/or initiates a query for processing. The sensitive information is extracted using a keyword spotting technique. The computer implemented method further comprises computing using notification agent, a score for the

speech obtained in real time; performing a comparison of the score with a corresponding user speech model; and triggering an action based on the comparison, wherein the action comprises a notification message being communicated to a communication device associated with the user. The user is authenticated when the score is greater than a predefined threshold.

[0015] In yet another aspect, one or more non-transitory machine readable information storage mediums comprising one or more instructions is provided, which when executed by one or more hardware processors causes sensitive information rearrangement by obtaining, in real time, using a sensitive information processor, an input specific to at least one of a transaction and a query initiation from a user, wherein the input is at least one of a speech or dual tone multi frequency (DTMF) tones corresponding to an identity associated with the user; extracting, in the real time, sensitive information specific to the identity of the user from the input; and generating in the real time, a virtual user identifier corresponding to the sensitive information, wherein the virtual user identifier is specific to at least one of the transaction being performed by the user and the query initiation in the real time.

[0016] The one or more instructions, which when executed by one or more hardware processors further causes performing, using the sensitive information processor, a honey encryption technique on the sensitive information to generate the virtual user identifier based on a derived key obtained from a master key that is used to perform the encryption, a session identifier specific to the transaction, and cumulative energy of the user in the speech. The one or more instructions, which when executed by one or more hardware processors further causes performing a cipher block chaining message authentication code (CBCMAC) on the sensitive information to obtain a tag; and performing format preserving encryption, operating in a counter (CTR) and CBCMAC mode, on the sensitive information to generate the virtual user identifier based on a counter value derived from cumulative energy of the user in the speech, and the tag.

[0017] The one or more instructions, which when executed by one or more hardware processors further causes regenerating, using a speech regeneration module stored in a speech engine, the virtual user identifier using a corresponding user speech model each time the user performs a transaction or initiates a query for processing. The one or more instructions, which when executed by one or more hardware processors further causes extracting, using the speech regeneration module, (i) a first set of letters from the input present in the identity, and (ii) a second set of letters from the input to obtain the sensitive information; generating a remapping table based on the first set of letters and the second set of letters; and rearranging, using the remapping table, the sensitive information to generate the virtual user identifier for performing the transaction or initiates the query for processing.

[0018] The virtual user identifier is generated as at least one of a speech of the user and DTMF tones each time the user performs a transaction or initiates a query for processing. The sensitive information is extracted using a keyword spotting technique. The one or more instructions, which when executed by one or more hardware processors further causes computing using notification agent, a score for the speech obtained in real time; performing a

comparison of the score with a corresponding user speech model; and triggering an action based on the comparison, wherein the action comprises a notification message being communicated to a communication device associated with the user. The user is authenticated when the score is greater than a predefined threshold.

[0019] It should be appreciated by those skilled in the art that any block diagram herein represent conceptual views of illustrative systems embodying the principles of the present subject matter. Similarly, it will be appreciated that any flow charts, flow diagrams, state transition diagrams, pseudo code, and the like represent various processes which may be substantially represented in computer readable medium and so executed by a computing device or processor, whether or not such computing device or processor is explicitly shown.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] The embodiments herein will be better understood from the following detailed description with reference to the drawings, in which:

FIG. 1 is a block diagram of a sensitive information rearrangement system according to one or more embodiments of the present disclosure;

FIG. 2 illustrates an implementation of the sensitive information rearrangement system of FIG. 1 in a financial institute transaction scenario according to one or more embodiments of the present disclosure;

FIG. 3 an implementation of the sensitive information rearrangement system of FIG. 1 in a transaction processing scenario based on Honey Encryption according to one or more embodiments of the present disclosure;

FIG. 4 illustrates an implementation of the sensitive information rearrangement system of FIG. 1 in a transaction processing scenario based on Format Preserving Encryption according to one or more embodiments of the present disclosure; and

FIG. 5 is a flow diagram illustrating a sensitive information rearrangement method using the sensitive information rearrangement system of FIG. 1 according to one or more embodiments of the present disclosure.

DETAILED DESCRIPTION OF EMBODIMENTS

[0021] The embodiments herein and the various features and advantageous details thereof are explained more fully with reference to the non-limiting embodiments that are illustrated in the accompanying drawings and detailed in the following description. The examples used

herein are intended merely to facilitate an understanding of ways in which the embodiments herein may be practiced and to further enable those of skill in the art to practice the embodiments herein. Accordingly, the examples should not be construed as limiting the scope of the embodiments herein.

[0022] The words "comprising," "having," "containing," and "including," and other forms thereof, are intended to be equivalent in meaning and be open ended in that an item or items following any one of these words is not meant to be an exhaustive listing of such item or items, or meant to be limited to only the listed item or items.

[0023] It must also be noted that as used herein and in the appended claims, the singular forms "a," "an," and "the" include plural references unless the context clearly dictates otherwise. Although any systems and methods similar or equivalent to those described herein can be used in the practice or testing of embodiments of the present disclosure, the preferred, systems and methods are now described.

[0024] Some embodiments of this disclosure, illustrating all its features, will now be discussed in detail. The disclosed embodiments are merely exemplary of the disclosure, which may be embodied in various forms.

[0025] Before setting forth the detailed explanation, it is noted that all of the discussion below, regardless of the particular implementation being described, is exemplary in nature, rather than limiting.

[0026] Referring now to the drawings, and more particularly to FIG. 1 through 5, where similar reference characters denote corresponding features consistently throughout the figures, there are shown preferred embodiments and these embodiments are described in the context of the following exemplary system and/or method.

[0027] FIG. 1 is a block diagram of a sensitive information rearrangement system 100 according to one or more embodiments of the present disclosure. The sensitive information rearrangement system 100 comprises a memory 102, a sensitive information processor 104, and a speech engine 106. The terms "sensitive information rearrangement system" and system may be interchangeably used herein. The memory 102 stores instructions, and optionally, one or more speeches specific to one or more users. The sensitive information processor 104 is coupled to the memory 102. The sensitive information processor 104 is configured by the instructions to obtain, in real time, an input from a user. The input is at least one of a speech or dual tone multi frequency (DTMF) tones corresponding to an identity (e.g., identity card) or information associated with the user. The sensitive information processor 104 extracts, in real time, sensitive information specific to the user from the input, and further generates in real time, a virtual user identifier corresponding (or specific) to the sensitive information. The virtual user identifier is specific to a transaction being performed by the user in real time. The virtual user identifier can be utilized in query processing during the transaction.

[0028] The sensitive information rearrangement system 100 includes a virtual audio driver (not shown in FIG. 1), which redirects the audio packets (e.g., speech) or the DTMF tones to the sensitive information processor 104. The virtual audio driver operates in a kernel space, whereas the sensitive information processor 104 operates in a user space where an input audio buffer (not shown in FIG. 1) takes the audio packets (e.g., speech) or the DTMF tones coming from the kernel space and an output audio buffer (not shown in FIG. 1) is responsible for routing out the processed audio to a playback device.

[0029] The sensitive information processor 104 extracts the sensitive information from the input by performing keyword spotting technique on the input. The sensitive information processor 104 includes a keyword spotting module 104A that detects one or more sensitive threads (or sensitive information) in an audio. A number of approaches can be followed for detecting the sensitive information. The sensitive information comprises, but is not limited to, a payment card identifier such as a debit card number, an ATM card number, a credit card number, a loyalty card number, a user identifier from an identity card such as permanent account number, bank account number, national security number, driving license number, a product number, a mobile number, and the like.

[0030] The sensitive information processor 104 implements the keyword spotting module 104A which when executed in real time filters out the incoming audio packets thereby improving the system performance. Consider where the user enters a payment card number (e.g., a credit card number) when the user initiates a call with a service provider (e.g., a financial institution). The user enters or voices out the credit card number. For example, in case of credit card, the credit card number being the sensitive, keyword spotting could be utilized to identify (or extract) the sensitive information (e.g., the credit card number be in terms of speech or DTMF tones) which may lie between two keywords, for example, asterisk (*), and hash (#), etc. Therefore, when the first special character (e.g., asterisk (*)) is encountered, the keyword spotting module 104A is turned on and when the last character is encountered it is turned off. Thus, the keyword spotting module 104A extracts the original credit card number. The sensitive information (e.g., the original credit card number) is detected based on the length of the sensitive field and at the same time monitoring the sequence of keywords for identification, thereby maintaining a real time performance for detection.

[0031] The sensitive information processor 104 further comprises a virtual user identifier generation module 104B that maintains the privacy and security of the system 100. Information like credit card number, is sensitive data for the user (e.g., a customer) and the leakage of this information will cost loss to the customer. Therefore, the virtual user identifier generation module 104B generates a virtual user identifier (e.g., a virtual credit card number) corresponding to the credit card number to safeguard the original credit card number such that the corresponding transaction or query processing is carried out smoothly without revealing original information to customer care executives. Likewise, the virtual user identifier generation module 104B generates virtual user identifiers for other sensitive information extracted by the sensitive information rearrangement system 100. The sensitive information rearrangement

system 100 implements one or more approaches (or techniques) as described below for generating the virtual user identifier:

[0032] The sensitive information rearrangement system 100 implements a pseudo random number generator for generating sequence of numbers whose properties approximate the properties of sequences of random numbers. Initially, the sensitive information rearrangement system 100 requires a seed value to generate the random number which means for every different seed value a corresponding random number is generated. The sensitive information rearrangement system 100 implements the pseudo random number generator methodology for generating seed value each time to generate a virtual user identifier in the following way:

$$Seed = s \oplus z \oplus E,$$

where, s is a session identifier (SID), z represents user identifier (e.g., a registered phone number, and E is cumulative speech energy of the user. The cumulative speech energy is the total speech energy involved in the conversation before the user enters or speaks out the user identifier (e.g., a credit card number). It is to be noted, that this energy may vary (or differ) for each instance of transaction hence ensuring a good entropy. The sensitive information processor 104 performs a honey encryption technique on the sensitive information to generate the virtual user identifier based on a derived key obtained from a master key that is used to perform encryption, a session identifier specific to the transaction, and cumulative energy of the user in the speech.

[0033] The sensitive information processor 104 performs the honey encryption technique to prevent an attacker from attempting to decrypt messages (or sensitive information) using incorrect key. This makes difficult for the attacker to guess the correct message. Key 'K' used for encryption is termed as master Key and keys ' k_i ' are termed as derived keys, which are derived using following function $f(x)$:

$$k_i = F(x),$$

[0034] $F(x) = K \oplus s \oplus E$, where s is the session ID and E is the cumulative speech energy. Thus, with honey encryption technique being the baseline, each time a new virtual user identifier is generated by using at least one derived key which is different from the master key.

[0035] Similarly, the sensitive information processor 104 is configured by the instructions to perform a cipher block chaining message authentication code (CBCMAC) on the sensitive information to obtain a tag, and perform Format Preserving Encryption (FPE) on the sensitive information to generate the virtual user identifier based on cumulative energy of the user in the speech, and the tag. The sensitive information processor 104 implements the FPE technique (or a FPE generator) to improve its performance using a CCM (Counter with CBCMAC) mode of operation for block ciphers and incorporating cumulative speech energy in order to enhance security. Below example, illustrates a pseudo code which is used by the virtual user identifier generation module 104B to generate a virtual user identifier specific to a user to perform one or more transactions, and query processing.

Function perform FPE (E, S, Z, UID)

[0036] Input: E - Speech Energy

S - Session ID

Z - user registered mobile/telephone number

UID - user identifier (e.g., credit card number (CC))

Returns: VUID, virtual user identifier (e.g., virtual credit card number (VCC))

1. Tag	← Perform CBCMAC (CC)
2. K	← GetKey()
3. Counter	← $E \oplus Z \oplus S$
4. N	← FPEGenerator (Counter, CC, Tag, K)
5. If $N \notin R$, Range of N having n-digit numbers then	
Counter	← Counter + 1
Go to 4	
6. VUID	← N
7. Return VUID	
8. End	

[0037] As described in the above pseudo code, the sensitive information processor 104 takes the credit card number as an input and performs a cipher block chaining message authentication code on it. GetKey enables to retrieve a secret key shared between the sensitive information rearrangement system 100 and a financial institution. The FPEGenerator takes a counter value, the credit card number, calculated tag, and the key as input to perform format preserving encryption on the original credit card in CCM mode. Following pseudo code is provided for virtual user identifier (VCC) generation:

Function GenerateVCC (CC)

[0038] Input: User identifier (e.g., credit card number (CC))

Returns: virtual user identifier (VUID) (e.g., a virtual credit card number (VCC))

1. E	← GetSpeechEnergy()
2. S	← GetSessionID()
3. Z	← GetUserAttribute()
4. VUID	← PerformMapping(E, S, Z, UID)
5. Return VUID	
6. End	

[0039] The speech engine 106 performs one or more speech analytics on speech of the user. The speech engine 106 comprises a speech regeneration module 106A that is configured to regenerate the virtual user identifier using a corresponding user speech model each time the user performs a transaction or initiates a query for processing. The corresponding user speech model may either be stored in a local memory (e.g., the memory 102), or stored in the speech engine 106. Alternatively, the corresponding user speech model may be obtained from one or more sources (e.g., from the cloud, or any external entity who is authorized by an issuing entity to store speech models of one or more users).

[0040] As can be seen from the above pseudo code, the PerformMapping method is where any of the approaches can be plugged in as per the system scenario to generate virtual user identifier (e.g., a virtual credit card number). The above mentioned approaches do take into consideration that a speech synthesis model is present which is able to regenerate any letter (e.g., digit) in respective user's voice in the virtual credit card number.

[0041] Apart from the above mentioned approaches, the sensitive information rearrangement system 100 considers a realization of generating the virtual user identifier based on the fact that the user speech for the original identity card (e.g., credit card number) is reused to rearrange the sensitive information (e.g., sensitive audio part each time the user visits for transaction). The mapping of the original credit card number to virtual credit card number is based on reutilization of digits contained in the user speech. Thus, the sensitive information rearrangement system 100 implements the speech regeneration module 106B that is further configured to extract (i) a first set of letters (e.g., digits in case of credit card, alphanumeric in case on PAN, and the like) from the input present in the identity card, and (ii) a second set of letters from the input to obtain the sensitive information, generate a remapping table based on the first set of letters and the second set of letters, and then further rearrange, using the remapping table, the sensitive information to generate the virtual user identifier for performing the transaction.

[0042] Assuming that the sensitive information rearrangement system 100 initially does not hold any speech synthesis model for each and every user registered with the system 100. In such cases, the sensitive information rearrangement system 100 generates a virtual user identifier in a manner that the rearrangement of the digits in the original credit card number is done based on remapping table generated. This way the rearrangement of the sensitive information (e.g., sensitive audio zone) is achieved by reusing and rearranging speech input of the user. Below example illustrates pseudo code for implementing speech remap technique and generating remapping table to rearrange the speech input of the user:

Function SpeechRemap (User identity Card (UID) - CC)

[0043] Input: CC - Original Credit card number

Returns: VUID - such as VCC, Virtual credit card number

1. Create array num[]	
2. Initialize num[]	← StoreDigitsInCC (CC)
3. Create array minus[]	
4. Initialize minus[]	← StoreDigitsNotInCC (num[], minus[])
5. RemapTable[]	← GenerateRemapTable(minus[])
6. VCC	← Rearrangement(RemapTable[], CC)
7. Returns VCC	
8. End.	

[0044] As described in the above pseudo code, the speech regeneration module 106A extracts a first set of letters (e.g., digits) present in the credit card and stores them in an array. The speech regeneration module 106A further extracts a second set of letters (e.g., digits) not present in the credit card and stores them in another array. The speech regeneration module 106A then generates the remapping table to obtain the virtual credit card number using the first set of letters and/or the second set of letters. The remapping table is then utilized by the speech regeneration module 106A to perform the final mapping on the original credit number by performing the rearrangement based on the remapping table. Similarly, the speech regeneration module 106A extracts letters accordingly based on the type of identity card (e.g., other than credit card such as PAN, driver license, and the like). Example of pseudo code for generating a remapping table is given below:

Function GenerateRemapTable (minus[])

[0045] Input: minus [] - an array containing letters (e.g., digits) not in identity card (e.g., Credit Card)

Returns: RemapTable [] - an array containing mapping for virtual user identifier (e.g., virtual credit card number (VCC)) 1. Initialize L ← 10 2. Set RemapLength = L - LengthOf(minus[]) 3. Create array RemapTable[RemapLength] 4. For i = 0 to RemapLength-1 y = i; do { x = random (10); } while (! FixDigit (x, minus, y)); RemapTable[i] = x; 5. Return RemapTable 6. End

[0046] As depicted from the above pseudo code, FixDigit method (or technique) ensures the mapping in such a manner that the digits not present in the original credit card number are not set for the mapping of current digit, and the current digit is not mapped to itself. Example of pseudo code for the FixDigit technique used herein is as below:

Function FixDigit (x, minus, y)

[0047] Inputs: x - the random number generated

minus - an array containing letters not in identity card, y,

y - current number for mapping

Returns: Boolean 1. Initialize ctr ← 0 2. For j = 0 to length (minus)-1 If (x == minus.Get(j) || x == y) { Return false; } 3. Return true 4. End

[0048] As can be seen from the above implementation of pseudo code, the virtual user identifier (e.g., virtual credit card number) is generated as at least one of a speech of the user and DTMF tones each time the user performs a transaction. The sensitive information is extracted using a keyword spotting technique for the one or more approaches/techniques described above (e.g., pseudo random number generator, honey encryption, format preserving encryption, and the like) to rearrange the sensitive information and generate the virtual user identifier.

[0049] The speech engine 106 further includes a notification agent 106B that computes a score for the speech, and performs a comparison of the score with a corresponding user speech model. Based on the comparison, the notification agent 106B triggers an action. The action comprises, but is not limited to, a notification message being communicated to a communication device (e.g., a mobile communication device, a personal computer, and the like) associated with the user. The notification message is transmitted via at least one network using one or more messaging services (e.g., email, short message service (SMS), multimedia message service (MMS), a call, an audio, a video, and the like). The speech engine 106 authenticates the user when the score is greater than a predefined threshold stored in the speech engine 106 (or the memory 102). The predefined threshold may be obtained from the one or more sources (as described above). The notification agent 106B generates event(s) in a form of an alert code to be transmitted to the communication device of the user (e.g., the customer's registered phone number) when there is a denial in authentication. The user is authenticated during a transaction or while he/she initiates a query for processing.

[0050] The notification agent 106B enables and implements a security feature by way of above authentication where thefts done by stolen identity cards can be minimized as well as mitigates masquerade attacks. This ensures that the user is registered to the sensitive information rearrangement system 100 to prevent theft(s) and malicious attack(s). The users' speech samples may be collected (or obtained) at the time of registration with the sensitive information rearrangement system 100 (or with a service provider issuing identity card) to create one or more user speech models. Moreover, each time the user revisits for any subsequent transactions, the user speech model is enhanced by capturing additional speech features from the corresponding successful transactions. Further, the sensitive information rearrangement system 100 performs auditing because of the session management performed at individual level, which maintains the references of the entities involved in the transaction or query processing. Thus easy detection of a malicious entity is possible.

[0051] During an implementation of the above approach, one assumption being made is that only few digits are missing in the original credit card number. In order to formulate this assumption, a coupon collector technique is implemented as below:

[0052] Suppose that the length of credit card number is m , and let n be the distinct digit in credit card of length m then,

$$n \ln n = m$$

[0053] Therefore, with n distinct digits present in credit card number the possible number of remap tables for each credit card number is given by $(n - 1)^n$. Since the remapping table is chosen randomly, the probability of generating the same remapping table is

$$\frac{1}{(n-1)^n}$$

hence the chances of generating the same virtual credit card number is negligible.

[0054] The keyword spotting module 104A, the virtual user identifier generation module 104B, the speech regeneration module 106A, and the notification agent 106B are implemented as at least one of a logically self-contained part of a software program, a self-contained hardware component, and/or, a self-contained hardware component, with a logically self-contained part of a software program embedded into each of the hardware component that when executed perform the above method described herein, in one embodiment. Although, for better understanding of the embodiments described herein, the present disclosure illustrate credit card number by way of example and implementation of the sensitive information rearrangement system 100 in achieving data privacy for financial solutions in financial institutions, the sensitive information rearrangement system 100 can be implemented in other sectors/industries (or technological domains), and are not limited to, for example, Income Tax (IT) Department for query processing on, or transactions related to, IT returns, gas distribution systems, water supplying systems, utility bill payments, educational institutes, background verification of candidates/employees, and the like, where protecting sensitive information pertaining to a user is critical.

[0055] FIG. 2, with reference to FIG. 1, illustrates an implementation of the sensitive information rearrangement system 100 in a financial institute transaction scenario according to one or more embodiments of the present disclosure. In particular, FIG. 2 depicts a query processing financial institute scenario where a user 202 (e.g., a customer) initiates a call for query related to an identity card (e.g., a credit card), where the user 202 is requested to either enter user identifier (e.g., credentials such as credit card number) on keypad (DTMF tones) or speak out the credentials. The sensitive information rearrangement system 100 receives the credit card details through an Electronic Private Automatic Branch Exchange (EPABX) 204, and then generates a virtual credit card number. The financial institution 208 then decrypts the VCC with shared secret key. Further, the financial institution 208 sends a confirmation to an agent 206 for transaction verification. The implementation of the sensitive information rearrangement system 100 in the financial institute transaction scenario (or any transaction scenario) enables to obfuscate the sensitive information such that the agent 206 (at the receiving end such as a customer executive representative) is unaware of confidential sensitive information (e.g., the original credit card number) and the query processing is successfully completed based on the generated information mapped to the sensitive information.

[0056] FIG. 3, with reference to FIG. 1 and 2, an implementation of the sensitive information rearrangement system 100 in a transaction processing scenario based on Honey Encryption according to one or more embodiments of the present disclosure. The sensitive information rearrangement system 100 incorporates a LookUp table (or a LookUp cache) 302 which retains the cipher text obtained from the honey encryption performed on the original user identifier (e.g., original credit card number) along with the customer ID and session ID. Therefore, when the user 202 revisits or initiates a call for transaction or query processing, the sensitive information rearrangement system 100 can retrieve information from the LookUp table 302 and generate a corresponding virtual user identifier, and further updates the LookUp table 302 with a current session ID, wherein the virtual user identifier (e.g., the VCC) is sent to the agent 206. The agent 206 in order to complete the transaction sends the VCC to a corresponding financial institution (e.g., the financial institution 208) based on the information populated on a display screen pertaining to the user. The financial institution 208 then decrypts the VCC with shared secret key and sends a confirmation to the agent 206 for transaction verification. This scenario is therefore flexible enough to be deployed at any of transaction or query processing systems (e.g., at agent's desktop such as customer executive representative end or EPBAX, or at financial institution's end).

[0057] FIG. 4, with reference to FIGS. 1 through 3, illustrates an implementation of the sensitive information rearrangement system 100 in a transaction processing scenario based on Format Preserving Encryption according to one or more embodiments of the present disclosure. The above scenario includes the EPBAX 204, the sensitive information rearrangement system 100, an accountability server 402, the agent 206, and the financial institution 208. As depicted in FIG. 4, it could be deployed at EPBAX end and the agent's desktop end. This provides the flexibility to act as a third party where the secret key sharing is done for each customer between the sensitive information rearrangement system 100 and the financial institution 208 for each transaction. Hence, this discards the possibility of reusing the key therefore mitigating various attacks. This scenario plays vital role where transaction is taking place using credit card number and financial institution 208 being the third party. The sensitive information rearrangement system 100 being independent of the financial institution 208 complete the transaction without revealing the original credit card number. In order to accomplish the transaction, the virtual credit card number is considered as an operable data in the network keeping the original credit card number secure, thereby maintaining privacy.

[0058] The accountability server 402 in the above scenario performs verification and authentication of the virtual credit card number generated by the sensitive information rearrangement system 100. A secure connection may be established between the accountability server 402 and the financial institution 208 in order to mitigate various attacks.

[0059] As described above, the sensitive information rearrangement system 100 generates a virtual user identifier (e.g., the VCC in this case), and calculates tag/Hash of original credit card number. The tag is then sent along with Customer ID and Session ID to the accountability server 402, whereas the VCC is sent to the agent 206 (e.g., a customer executive

representative). The agent 206 in order to complete the transaction sends the VCC to a corresponding financial institution (e.g., the financial institution 208) based on the information populated on a display screen pertaining to the user. The financial institution 208 then decrypts the VCC with shared secret key and calculates the tag. The tag is then verified by the accountability server 402. The accountability server 402 transmits a response message indicative of authentication or denial. Further, the financial institution 208 sends a confirmation to the agent 206 for transaction verification. This ensures that the transaction is completed successfully where the operable data being the VCC number. Although, FIGS. 2 through 4, depict the sensitive information rearrangement system 100 between the EPBAX 204 and the agent 208, the sensitive information rearrangement system 100 can reside or be deployed on an interactive voice response (IVR), can be maintained by a financial institution, or may reside at the agent's side.

[0060] FIG. 5, with reference to FIGS. 1 through 4, is a flow diagram illustrating a sensitive information rearrangement method using the sensitive information rearrangement system 100 of FIG. 1 according to one or more embodiments of the present disclosure. The method includes: obtaining (502), in real time, using the sensitive information processor 104, an input specific to a transaction and/or a query initiation from a user. The input is at least one of a speech or dual tone multi frequency (DTMF) tones corresponding to an identity associated with the user. The method further includes extracting (504), in the real time, sensitive information specific to the identity of the user from the input; and generating (506), in the real time, a virtual user identifier corresponding to the sensitive information. The virtual user identifier is specific to the transaction being performed and/or the query initiated by the user in the real time.

[0061] The method further includes performing, using the sensitive information processor 104, a honey encryption technique on the sensitive information to generate the virtual user identifier based on a derived key obtained from the master key used in encryption, a session identifier specific to the transaction, and cumulative energy of the user in the speech. The method further performing a cipher block chaining message authentication code (CBCMAC) on the sensitive information to obtain a tag; and performing format preserving encryption on the sensitive information to generate the virtual user identifier based on a counter value derived from cumulative energy of the user in the speech, and the tag.

[0062] The method further includes regenerating, using the speech regeneration module 106A stored in the speech engine 106, the virtual user identifier using a corresponding user speech model each time the user performs a transaction and/or initiates a query for processing. The method further includes extracting, using the speech regeneration module 106A, (i) a first set of letters from the input present in the identity, and (ii) a second set of letters from the input to obtain the sensitive information; generating a remapping table based on the first set of letters and the second set of letters; and rearranging, using the remapping table, the sensitive information to generate the virtual user identifier for performing the transaction and/or for initiating the query for processing.

[0063] The virtual user identifier is generated as at least one of a speech of the user and DTMF tones each time the user performs a transaction and/or initiates a query for processing. The sensitive information is extracted using a keyword spotting technique that is implemented using the keyword spotting module 104A. The method further includes computing using a notification agent 106B, a score for the speech obtained in real time; performing a comparison of the score with a corresponding user speech model; and triggering an action based on the comparison. The action includes a notification message that is communicated to a communication device associated with the user. The user is authenticated when the score is greater than a predefined threshold.

[0064] The written description describes the subject matter herein to enable any person skilled in the art to make and use the embodiments. The scope of the subject matter embodiments is defined by the claims and may include other modifications that occur to those skilled in the art. Such other modifications are intended to be within the scope of the claims if they have similar elements that do not differ from the literal language of the claims or if they include equivalent elements with insubstantial differences from the literal language of the claims.

[0065] The embodiments of the present disclosure provides a sensitive information rearrangement system and method for generating a virtual user identifier for a specific transaction or query processing associated with a user (e.g., customer). The sensitive information rearrangement system 100 implements the virtual user identifier generation module 104B that generates a virtual user identifier in real time specific to a transaction or query processing. The sensitive information rearrangement system 100 further implements the speech regeneration module 106A recreates the customer voice to playback the virtual user identifier generated by the sensitive information rearrangement system 100. The speech regeneration module 106A utilizes one or more speech data models of the customer (residing in the speech engine 106) for the recreation of the speech/audio corresponding to the virtual user identifier generated by the sensitive information rearrangement system 100.

[0066] Further, it can be visualized as a layer of text to speech engine performing the customer speech regeneration only for the part of speech containing the user identifier. It helps ensuring the adaptability of the sensitive information rearrangement system 100 in the current scenario which makes the sensitive information rearrangement system 100 in its entirety more realistic. A simple implementation of it can be where all pre-recorders of the numbers from 0-9 in customer voice is stored in the sensitive information rearrangement system 100 to synthesize a number string in customer voice. Hence, speech regeneration module 106A acts as a privacy enhancer where an agent is unaware of original sensitive information related to customer instead he/she is dealing with a pseudo information.

[0067] The sensitive information rearrangement system 100 protects the confidential and sensitive information (e.g., credit card number of customers) during query processing and authentication, by implementing a real-time technique that can either generate or permute the actual card numbers in a privacy preserving manner. Further it rearranges the sensitive audio which can be either DTMF or speech of the customer as well as avoids data inconsistency by

displaying the generated virtual information. Therefore, in terms of audio and visual feel, the suggested technique also maintain the user experience on both the ends. The sensitive information rearrangement system 100 keeps track of one or more entities (e.g., customer, financial institution, agent(s), and the like) in the scenario in order to trace any kind of malicious activity taking place. Moreover, the sensitive information rearrangement system 100 does not store any confidential information of the customer and it also raises notifications to the user in case of authentication denial.

[0068] It is, however to be understood that the scope of the protection is extended to such a program and in addition to a computer-readable means having a message therein; such computer-readable storage means contain program-code means for implementation of one or more steps of the method, when the program runs on a server or mobile device or any suitable programmable device. The hardware device can be any kind of device which can be programmed including e.g. any kind of computer like a server or a personal computer, or the like, or any combination thereof. The device may also include means which could be e.g. hardware means like e.g. an application-specific integrated circuit (ASIC), a field-programmable gate array (FPGA), or a combination of hardware and software means, e.g. an ASIC and an FPGA, or at least one microprocessor and at least one memory with software modules located therein. Thus, the means can include both hardware means and software means. The method embodiments described herein could be implemented in hardware and software. The device may also include software means. Alternatively, the embodiments may be implemented on different hardware devices, e.g. using a plurality of CPUs.

[0069] The embodiments herein can comprise hardware and software elements. The embodiments that are implemented in software include but are not limited to, firmware, resident software, microcode, etc. The functions performed by various modules described herein may be implemented in other modules or combinations of other modules. For the purposes of this description, a computer-usable or computer readable medium can be any apparatus that can comprise, store, communicate, propagate, or transport the program for use by or in connection with the instruction execution system, apparatus, or device.

[0070] The medium can be an electronic, magnetic, optical, electromagnetic, infrared, or semiconductor system (or apparatus or device) or a propagation medium. Examples of a computer-readable medium include a semiconductor or solid state memory, magnetic tape, a removable computer diskette, a random access memory (RAM), a read-only memory (ROM), a rigid magnetic disk and an optical disk. Current examples of optical disks include compact disk-read only memory (CD-ROM), compact disk-read/write (CD-R/W) and DVD.

[0071] A data processing system suitable for storing and/or executing program code will include at least one processor coupled directly or indirectly to memory elements through a system bus. The memory elements can include local memory employed during actual execution of the program code, bulk storage, and cache memories which provide temporary storage of at least some program code in order to reduce the number of times code must be retrieved from bulk storage during execution.

[0072] Input/output (I/O) devices (including but not limited to keyboards, displays, pointing devices, etc.) can be coupled to the system either directly or through intervening I/O controllers. Network adapters may also be coupled to the system to enable the data processing system to become coupled to other data processing systems or remote printers or storage devices through intervening private or public networks. Modems, cable modem and Ethernet cards are just a few of the currently available types of network adapters.

[0073] A representative hardware environment for practicing the embodiments may include a hardware configuration of an information handling/computer system in accordance with the embodiments herein. The system herein comprises at least one processor or central processing unit (CPU). The CPUs are interconnected via system bus to various devices such as a random access memory (RAM), read-only memory (ROM), and an input/output (I/O) adapter. The I/O adapter can connect to peripheral devices, such as disk units and tape drives, or other program storage devices that are readable by the system. The system can read the inventive instructions on the program storage devices and follow these instructions to execute the methodology of the embodiments herein.

[0074] The system further includes a user interface adapter that connects a keyboard, mouse, speaker, microphone, and/or other user interface devices such as a touch screen device (not shown) to the bus to gather user input. Additionally, a communication adapter connects the bus to a data processing network, and a display adapter connects the bus to a display device which may be embodied as an output device such as a monitor, printer, or transmitter, for example.

[0075] The preceding description has been presented with reference to various embodiments. Persons having ordinary skill in the art and technology to which this application pertains will appreciate that alterations and changes in the described structures and methods of operation can be practiced without meaningfully departing from the principle, spirit and scope.

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- IN4552MUM2015 [0001]

Patentkrav**1. System omfattende:**

en hukommelse som lagrer instruktioner;

5 en sensitiv informationsprocessor koblet til hukommelsen, hvor den sensitive informationsprocessor er konfigureret af instruktionerne til at:

opnå, i realtid, et input specifikt for en transaktion eller en forespørgselsinitiering fra en bruger, hvor inputtet er mindst et af en tale eller dobbelttonemultifrekvens (DTMF)-toner svarende til en identitet associeret med brugeren,

10 ekstrahere, i realtiden, sensitiv information specifik for identiteten af brugeren fra dette input, og

generere i realtiden, en virtuel bruger-identifikator svarende til den sensitive information under anvendelse af en tilsvarende brugertalemmodel når brugeren udfører transaktionen eller initierer forespørgslen for behandling, hvor den virtuelle identifikator generes ved at,

15 ekstrahere (i) et første sæt bogstaver fra dette input til stede i identiteten, og (ii) et andet sæt bogstaver fra dette input for at opnå den sensitive information,

20 generere en omafbildningstabel baseret på det første sæt bogstaver og det andet sæt bogstaver, og

om-arrangere, under anvendelse af omafbildningstabellen, den sensitive information for at generere den virtuelle bruger-identifikator for at udføre transaktionen eller til at initiere forespørgslen til behandling, hvor den virtuelle bruger-identifikator er specifik for transaktionen som udføres af brugeren eller
25 forespørgselsinitieringen i realtiden.

2. Systemet ifølge krav 1, hvor den sensitive informationsprocessor udfører en honey-krypteringsteknik på den sensitive information for at generere den virtuelle bruger-identifikator baseret på en afledt nøgle opnået fra en masternøgle anvendt til at

udføre krypteringen, en sessions-identifikator der er specifik for denne transaktion, og kumulativ energi af brugeren i denne tale.

3. Systemet ifølge krav 1, hvor den sensitive informationsprocessor er yderligere konfigureret af instruktionerne til at udføre en cipher block chaining message authentication code (CBCMAC) på den sensitive information for at opnå et mærke, og udføre formatbevarende kryptering på den sensitive information for at generere den virtuelle bruger-identifikator baseret på tællerværdi afledt fra kumulativ energi af brugeren i denne tale, og mærket.

4. Systemet ifølge krav 1, hvor den virtuelle bruger-identifikator er genereret som mindst en af en tale af brugeren og DTMF-toner hver gang brugeren udfører en transaktion eller initierer en forespørgsel til behandling.

5. Systemet ifølge krav 1, hvor den sensitive information ekstraheres under anvendelse af en nøgleord-genkendelses-teknik.

6. Systemet ifølge krav 1, yderligere omfattende en notifikationsagent der er beregnet til at beregne en score for talen opnået i realtid, udføre en sammenligning af scoren med en tilsvarende brugertalemodel, og udløse en handling baseret på sammenligningen, hvor handlingen omfatter at en notifikationsmeddelelse kommunikeres til en kommunikationsindretning associeret med brugeren, hvor brugeren bekræftes når scoren er større end en forudbestemt tærskelværdi.

7. Computer-implementeret fremgangsmåde omfattende:

opnåelse, i realtid, under anvendelse af en sensitiv informationsprocessor, af et input specifikt for en transaktion eller en forespørgselsinitiering fra en bruger, hvor inputtet er mindst et af en tale eller dobbeltonemultifrekvens (DTMF)-toner svarende til en identitet associeret med brugeren;

ekstrahere, i realtiden, sensitiv information specifik for identiteten af brugeren fra dette input; og

generere, i realtiden, en virtuel bruger-identifikator svarende til den sensitive information under anvendelse af en tilsvarende brugertalemmodel når brugeren udfører transaktionen eller initierer forespørgslen for behandling, hvor den virtuelle identifikator generes ved at,

- 5 ekstrahere (i) et første sæt bogstaver fra dette input til stede i identiteten, og (ii) et andet sæt bogstaver fra dette input for at opnå den sensitive information,

generere en omafbildningstabel baseret på det første sæt bogstaver og det andet sæt bogstaver, og

- 10 omarrangere, under anvendelse af omafbildningstabellen, den sensitive information for at generere den virtuelle bruger-identifikator for at udføre transaktionen eller til at initiere forespørgslen til behandling, hvor den virtuelle bruger-identifikator er specifik for transaktionen udført af brugeren eller forespørgselsinitieringen i realtiden.

15

8. Computer-implementeret fremgangsmåde ifølge krav 7, yderligere omfattende udførelse, under anvendelse af den sensitive informationsprocessor, af honey-krypteringsteknik på den sensitive information for at generere den virtuelle bruger-identifikator baseret på en afledt nøgle opnået fra en masternøgle anvendt til at

20 udføre krypteringen, en sessions-identifikator specifik for denne transaktion, og kumulativ energi af brugeren i denne tale.

- 9.** Computer-implementeret fremgangsmåde ifølge krav 7, yderligere omfattende udførelse af cipher block chaining message authentication code (CBCMAC) på den
- 25 sensitive information for at opnå et mærke; og udføre formatbevarende kryptering på den sensitive information for at generere den virtuelle bruger-identifikator baseret på en tælle værdi afledt fra kumulativ energi af brugeren i denne tale, og mærket.

- 30 **10.** Computer-implementeret fremgangsmåde ifølge krav 7, yderligere omfattende at beregne under anvendelse af en notifikationsagent, en score for talen opnået i realtid; udføre en sammenligning af scoren med en tilsvarende brugertalemmodel; og udløse en handling baseret på sammenligningen, hvor handlingen omfatter at en notifikationsmeddelelse kommunikerer til en kommunikationsindretning associeret

med brugeren.

11. Ét eller flere ikke-transitorisk maskinlæsbare informationslagermedier omfattende én eller flere instruktioner som når de udføres af én eller flere hardware-processorer
5 forårsager:

opnåelse, i realtid, under anvendelse af en sensitiv informationsprocessor, af et input specifikt for en transaktion eller en forespørgselinitiering fra en bruger, hvor inputtet er mindst et af en tale eller dobbelttonemultifrekvens (DTMF)-toner svarende til en identitet associeret med brugeren;

10 ekstrahere, i realtid, sensitiv information specifik for identiteten af brugeren fra dette input; og

generere, i realtid, en virtuel bruger-identifikator svarende til den sensitive information under anvendelse af en tilsvarende brugertalemmodel når brugeren udfører transaktionen eller initierer forespørgslen for behandling, hvor den
15 virtuelle identifikator generes ved at,

ekstrahere (i) et første sæt bogstaver fra dette input til stede i identiteten, og (ii) et andet sæt bogstaver fra dette input for at opnå den sensitive information,

20 generere en omafbildningstabel baseret på det første sæt bogstaver og det andet sæt bogstaver, og

om-arrangere, under anvendelse af omafbildningstabellen, den sensitive information for at generere den virtuelle bruger-identifikator til at udføre transaktionen eller til at initiere forespørgslen til behandling, hvor den virtuelle bruger-identifikator er specifik for transaktionen udført af brugeren eller
25 forespørgsels-initieringen i realtid.

DRAWINGS

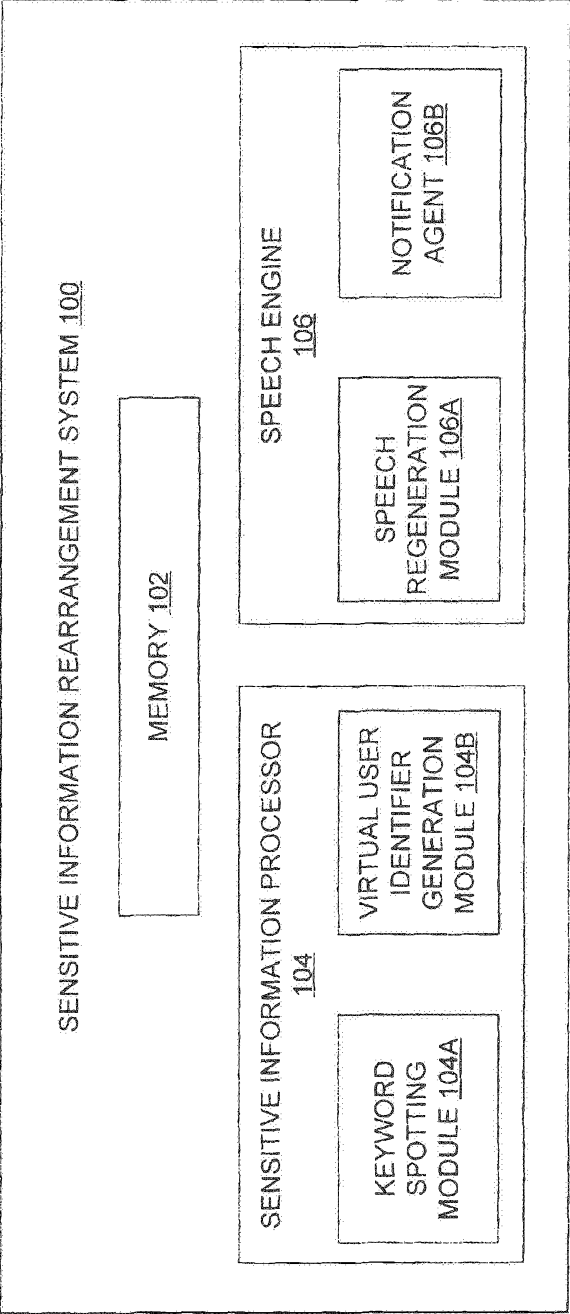


FIG. 1

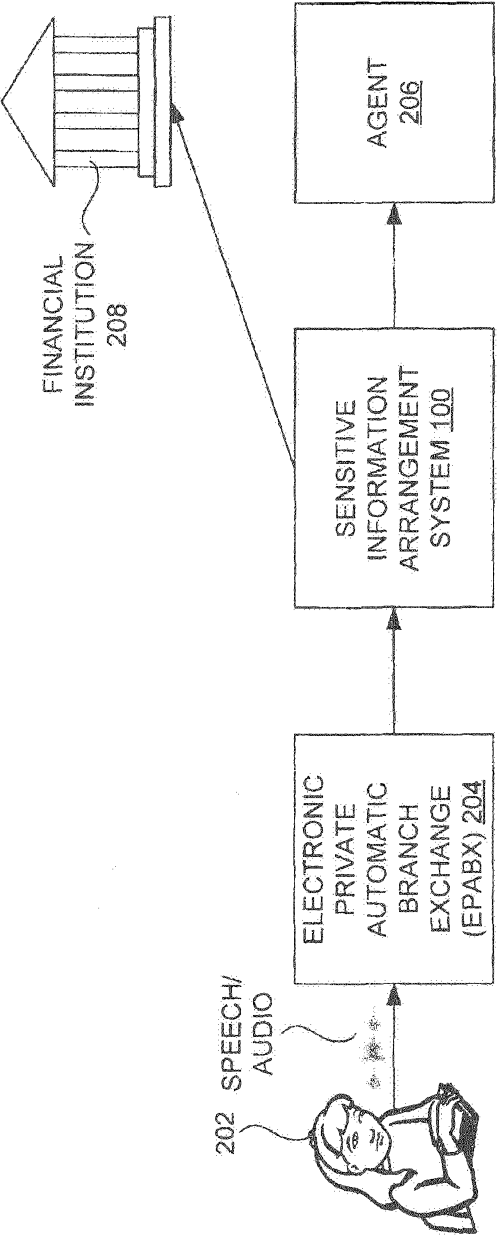


FIG. 2

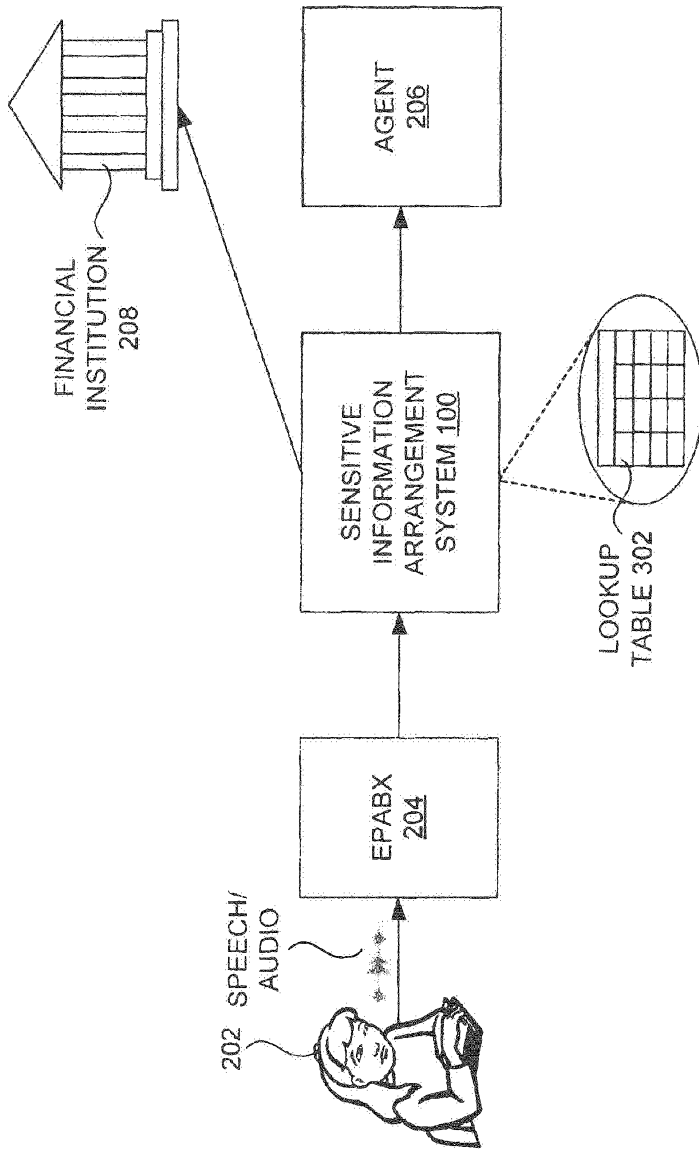


FIG. 3

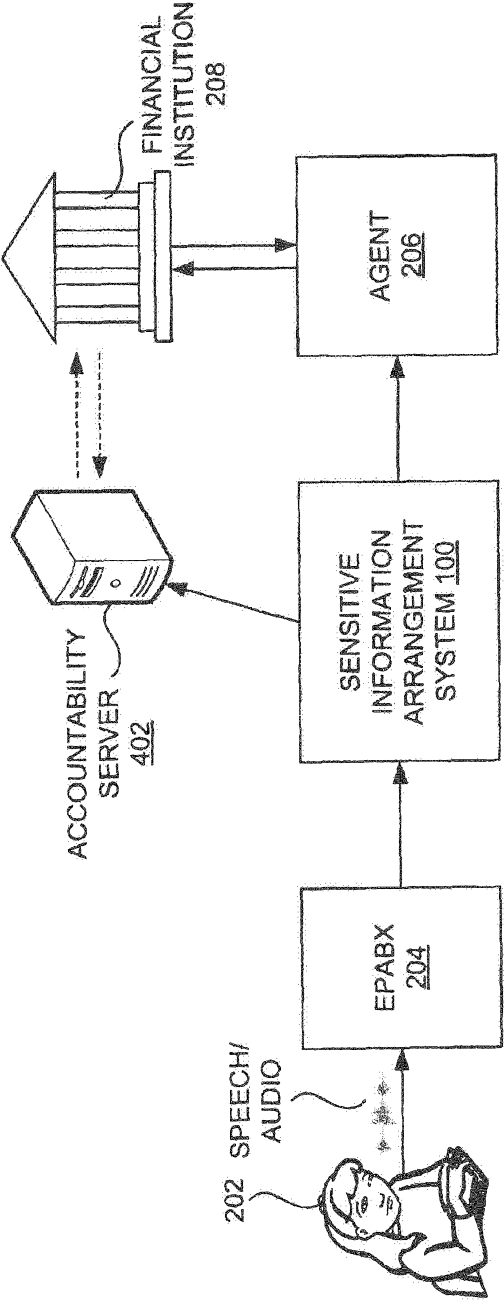


FIG. 4

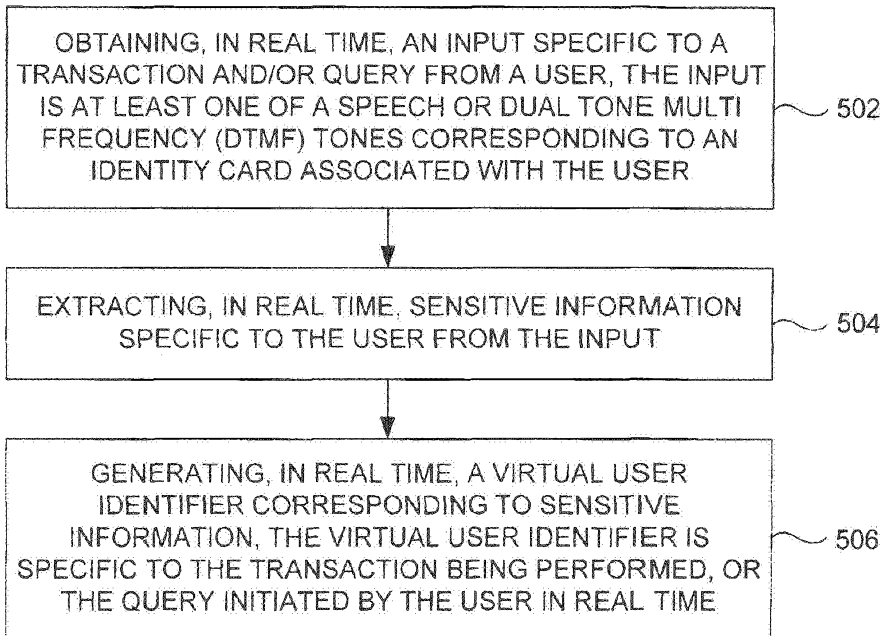


FIG. 5