

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
11 December 2003 (11.12.2003)

PCT

(10) International Publication Number
WO 03/102798 A1

- (51) International Patent Classification⁷: **G06F 15/16**
- (21) International Application Number: PCT/US03/13157
- (22) International Filing Date: 28 April 2003 (28.04.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
10/160,671 30 May 2002 (30.05.2002) US
PCT/US02/30692
26 September 2002 (26.09.2002) US
- (71) Applicant: **AMERICA ONLINE INCORPORATED**
[US/US]; 22000 AOL Way, Dulles, VA 20166 (US).
- (72) Inventors: **RAWAT, Jai**; 471 Acalanes Drive #46, Sunnyvale, CA 94086 (US). **BHATIA, Ajoy, Kumar**; 38660 Lesingzon Street #525, Fremont, CA 94536 (US). **ZISSIMOPOULOS, Vasileios**; 38660 Lexington Street #1307, San Francisco, CA 94111 (US).
- (74) Agents: **GLENN, Michael** et al.; Glenn Patent Group, 3475 Edison Way, Ste. L., Menlo Park, CA 94025 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**
— with international search report
— with amended claims
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

(54) Title: INTELLIGENT CLIENT-SIDE FORM FILLER

(57) Abstract: Client side program code examines electronic documents such as web pages and automatically fills out fields of forms contained in the document with the appropriate data from a user profile, without requiring prior mapping or examination of the form. The application maps user data to the appropriate form field by examining label text on the form as the user sees it, *i.e.* text that is visually nearest the field. For fields lacking labels, the application examines the field context to determine the required data. To enter the information in the correct format, the application parses visual hints concerning, for example, the date format provided to the user and formats the data accordingly. In the absence of any usable visual cues or contextual information, the program code parses the form's underlying markup code.



WO 03/102798 A1

INTELLIGENT CLIENT-SIDE FORM FILLER

BACKGROUND OF THE INVENTION

5

FIELD OF THE INVENTION

The invention relates to electronic form mapping and recognition. More particularly, the invention relates to an automated client-based method of filling out electronic forms that does not require any prior mapping or examination of the forms.

10

DESCRIPTION OF RELATED TECHNOLOGY

Internet users are only too familiar with the repetitive chore of filling out online forms. Many websites limit full access to registered accountholders. Registration may require providing personal data by way of entering the data into the fields of an HTML form. Return visits to such sites generally require a sign-on procedure in which the user is asked to provide, for example, a user name and password. E-commerce applications require the user to fill in order forms that ask for personal data, billing address, shipping address, credit card information and such. Often, users, when faced with a request to complete yet another form, just move on because they simply don't want to take the time to complete the form. Thus, filling out online forms, while essential, also constitutes a serious obstacle for the site sponsor and the user alike. The user is deprived of what may be an important source of value, and the site sponsor may lose sales, or at the very least, may miss important opportunities to find out more about the people who visit their site. Thus, it would be an important advantage to provide a system that automated the task of filling out electronic forms.

20

25

30

The parent to the current application, J. Rawat, S. Palnitkar, *Method and system of implementing recorded data for automating Internet interactions*, U.S. Patent Application Ser. No. 09/561,449, filed April 28, 2000 provides just such a system. User information is maintained in a central database. The user information includes personal data as well as account-specific data, such as the URL, and the login data for sites the user has visited. Client-side program code, integrated with a

conventional web browser provides a utility window through which the user may access the central database - to edit user information, for example. In addition to the database of user information, the system also maintains a database of form information wherein mapping information is stored for forms from previously visited web sites. The forms are mapped by parsing the underlying code, typically HTML, of the form, for example, the field tags. When a mapped form is subsequently encountered, the map allows the form fields to be automatically populated with the required user data in the required format. Occasionally, for example, in the case of optional fields or forms that have changed slightly so that the saved map is no longer completely accurate, user intervention may be required.

The prior art provides several examples of network based or distributed electronic wallets, in which user information is stored in a database for later use. D. Schutzer, *System and method for use of distributed electronic wallets*, European Patent Application No. EP1077419, published February 21, 2001 describes a method and system in which two electronic wallets communicate and exchange information; typically a consumer's electronic wallet populates a merchant's wallet with the consumer's personal data. The merchant wallet stores the consumer's personal data for later use. M. Bahdur, G. Huddleston, C. Paltenghe, M. Takata, *Distributed network based electronic wallet*, European Patent Application No's. EP0917119 and EP0917120, filed May 19, 1999 provide a system in which various classes of user data are stored in distributed databases; the user may download the stored data to a wallet application. M. Sivadas, D. Steed, J. Main, *Server-based electronic wallet system*, European Patent Application No. EP1168264, filed January 2, 2002 describes system in which purchase requests directed to a merchant server from a wireless device are mediated by one or both of a proxy server and a wallet server. The .NET PASSPORT SERVICE, provided by Microsoft Corporation of Redmond WA, includes a service wherein the user may use a single sign-in and make express purchases from participating merchants and web sites. A wallet application allows the user to store personal data on a secure server, such as billing and shipping addresses and credit card data. When the user makes a purchase from a participating merchant, the user data is automatically supplied to the merchant from the secure server. In all of these previous examples from the prior art, a distributed,

or client-server architecture is essential to the proper function of the system. None of the systems described contemplate an exclusively client-based form-filler that is capable of populating any web-based form with user data.

5 A. Gupta, A. Rajaraman, *Method and system for automatically filling in forms in an integrated network based transaction environment*, U.S. Patent No. 6,199,079, filed March 20, 1998 describes a method of automatically filling in online forms presented by web pages, in which a particular form is assigned a unique identifier and a template for the form is stored in a database of form templates, indexed by
10 forms' unique identifiers. When the user encounters a form, the form is filled in according to that form's template from the database. R. Haridas, M. Markus, *Method and apparatus for completion of fields on Internet page forms*, International Application No. PCT/US00/41802, filed on November 2, 2000 describes an automated method for completion of Internet webpage forms in which user data
15 stored on a centralized server is automatically applied to forms that have been previously registered with the centralized server. Thus, both of these examples from the prior art employ a distributed architecture and derive their form-filling capability from a record of the form stored at a central location. Neither contemplates the ability to analyze any form encountered and populate the form fields with the
20 required user data in the proper display format without any prior mapping or examination.

J. Light, J. Garney, *Automatic web based form fill-in*, U.S. Patent No. 6,192,380, filed on March 31, 1998, describes an automated form filler that recognizes a form
25 within an HTML page and fills in the form fields with data taken from a database. Recognition of the form and the form fields occurs by parsing the page's HTML code and identifying page tags and field tags.

M. Pennell, A. Martin, *Method and apparatus for automatic form filling*, International
30 Application No. PCT/US0042073, filed on November 9, 2000 describes a software application intended for use with or integration into a conventional web browser application that automatically populates the fields of a web-based form with the required user data. The described software application gains knowledge of the

form's fields and the expected contents by analyzing the underlying code for the page received by the browser from the visited web site, generally HTML or XML code, or the like. Embodiments of the software application in both distributed and client-based implementations are described.

5

The *Roboform user manual*, published at <http://www.robiform.com/manual.html>, ©1999 – 2002, updated January 25, 2002, describes a client-based web form filler that works as an add-on to conventional web browser applications. Forms may be filled in either by means of a “pass card,” a record that saves information related to a specific form at a particular web site, or by means of an “identity,” a user profile, wherein the software application analyzes the page encoding and populates the form fields with appropriate data from the identity. By the user selecting a country, the application applies the appropriate display format to form data such as dates and telephone numbers.

15

All of the above form-fillers analyze a web form based on the form's underlying code. There is no indication that they analyze a form based on page elements visible to the user on the rendered page, such as field labels. While the Roboform application is able to format data according to a user-selected country format, there is no indication that either Roboform or the form-filler described by Pennell, *et al.* can format data on an *ad hoc* basis by analyzing user-visible formatting prompts, generally provided somewhere adjacent the field.

While parsing html field tags provides generally satisfactory results, the lack of any naming convention for the fields of an HTML form has made it impractical to devise a completely automated form-filler. It is difficult for systems that parse a page's underlying code to identify fields to accommodate the limitless variety typically encountered in field names, without at least some user intervention. The adoption of standardized markup languages such as ECML (E-commerce markup language) may help to remedy this situation. In the meantime, there exist multitudes of forms that do not follow any sort of naming convention for the fields. On the other hand, field labels, the visual page elements that communicate a field's purpose to the user display a great deal more uniformity than the underlying field names.

Accordingly, it would be a great advantage to provide an intelligent, fully automated, client-based form filler that maps the fields of an electronic form by parsing visual page elements, such as the user-visible field labels. It would also be desirable to provide the functionality of determining the appropriate contents for a field based on the field's context, the type of neighboring fields to the target field. Furthermore, it would be a significant technical advance to provide the capability of formatting the appropriate data according to visible formatting prompts.

SUMMARY OF THE INVENTION

In recognition of the above needs, the invention provides an intelligent form-filler that does not require any prior mapping or examination of the forms. Client-side program code examines electronic documents such as web pages and automatically fills in fields of forms contained in the document with the appropriate data from a user profile, without requiring prior mapping or examination of the form. The application maps user data to the appropriate form field by examining field label text on the form as the user sees it, *i.e.* text that is visually nearest the field. For fields lacking labels, the application evaluates the field context by determining the field type of neighboring fields to determine the required data. To enter the information in the correct format, the application parses visual hints concerning, for example, the date format provided to the user and formats the data accordingly. In the complete absence of any usable visual cues or contextual information, the program code is capable of parsing the form's underlying code. Alternate embodiments of the invention are possible, in which that user information is alternately stored on the client, or on a server, to maximize portability.

BRIEF DESCRIPTION OF THE DRAWINGS

Figure 1 provides a screen shot of a typical web-based electronic form;

Figure 2 provides a second view of the form of Figure 1;

Figure 3 provides a schematic diagram of a client-based system for filling out electronic forms according to the invention; and

5

Figure 4 provides a data flow diagram of a client-based method for filling out electronic forms according to the invention.

10

DESCRIPTION OF THE INVENTION

15

20

As shown in Figure 1, a typical HTML form 100 includes a plurality of fields 101 that must be filled out by the user, for example, when making an online purchase, or registering at a web site. Form-filling software generally analyzes the fields 101 of the form and maps them to the correct user data by parsing the HTML field names, commonly known as field tags (not shown) and then supplying the correct user data from a stored user profile, generally located on a remote server. Because no naming convention has existed for fields in an HTML form, it has been difficult to produce a fully automated form-filler application. Previously, forms had to be mapped or analyzed in advance and the mapping saved in a database of form descriptions, usually also located on a remote server. Often, user intervention is required to complete the form.

25

30

HTML forms also include a plurality of visible field labels 102, in which each label is spatially and visually related to its corresponding field, although no programmatic relationship usually exists between them, as with the HTML field tags. The field labels are provided for the user's benefit to advise them of the correct information to enter into a particular field. The invention recognizes that there exists a great deal more uniformity and consistency among the visible field labels than to the underlying field names, because the labels generally identify the information sought in a well-known, highly conventional manner. Based on such recognition, the invention provides a client-based system and method for filling out electronic forms automatically, in which the fields of an HTML form are identified and mapped

to the correct user data based on visible form elements such as field labels. Following mapping and identification, the fields of the form are populated with the correct user data, without reference to a previous, stored mapping or analysis of the form, and without requiring user intervention.

5

Turning now to Figure 3, a schematic diagram of the system of the invention is shown. A client 301, in communication with a network 307, retrieves an HTML page containing a web form 308 from a remote site on the network. The web form could be substantially similar to the typical form shown by Figures 1 and 2. In one embodiment of the invention, the client 301 is a conventional microcomputer, either desktop or laptop. However, other clients possessing the requisite storage capacity and processing capability are entirely consistent with the spirit and scope of the invention. A client may also be a process, such as a program, that requests a service from another process. In one embodiment of the invention, the client communicates with a publicly accessible HTTP network such as the Internet, however other network environments employing other networking protocols are also suitable for the invention. The means of connecting to the network includes dialup and broadband connections, as well as other connection methods, such as wireless.

20

As previously stated, the client 301 has both storage capacity and processing capability. Logic 303 stored and executed on the client implements a probabilistic, rule-based method of analyzing the form in separate steps. In a first step, the logic traverses the form from beginning to end, locating the field labels, associating them with a field, and then mapping the field to the correct metadata based on a best match from a field label dictionary 304 - a file of analogs, or expressions resembling the field label, stored on the client 301. Also incorporated in the field label dictionary are the rules for mapping the field to the correct metadata and for mapping fields lacking labels to the correct metadata based on the field's context. At the same time, the functional blocks of the form are identified, for example, shipping address and billing address. In this way, identical field labels, such as "address" or "zip code" in a shipping address block and a billing address block are mapped to the correct metadata.

30

In a second step, the logic traverses the form elements in a reverse direction, refining the granularity of the mapping done in the first pass, based on rules contained in a normalization dictionary 305, also stored on the client. The logic
5 traverses the form a third time, identifying visible display format hints 103, mapping them to a display format dictionary 306, also stored on the client. Similar to the field labels dictionary 304, the display format dictionary 306 contains a number of regular expressions that are analogs of, or similar to the visible display format hints 103 found on the form 100. Additionally, the display format dictionary 306 contains
10 rules and code for mapping the field to the correct display format. Finally, after the visible elements of the form have been completely mapped the correct user data is retrieved from a stored user profile 302, a data file stored on the client, and concatenated, truncated or re-formatted as required by the display format, and the form fields are populated with the data. In an alternate embodiment, the user profile
15 is stored on a server and retrieved by the client.

Figure 4 provides a data flow diagram of the method of the invention 400. In a preferred embodiment, the method is implemented as a JAVASCRIPT function that analyzes forms in a target window and maps each identified form element to the
20 correct user data to be filled into each field. Conventional techniques of computer programming are employed in the implementation of the invention. In addition to JAVASCRIPT, other commonly known scripting and programming languages would also be suitable for the invention such as VBSCRIPT, PERL, JAVA, or JPYTHON. As previously indicated, the invention primarily relies on the visible field
25 label. However, in the absence of a visible field label, the invention also utilizes:

- HTML or ECML field name;
- Default field value, in the case of a field that is a select box;
- A list of possible values for radio buttons; or
- Previous field mapping

30

The invention matches the values with the dictionaries previously described to map the fields to metadata, wherein metadata comprises a data type, such as

- Last name;

- First name;
- AddressLine 1;
- AddressLine 2; and
- City.

5

As will be apparent to the practitioner of ordinary skill, the above metadata classifications are exemplary only. Others will occur to the artisan according to the setting and the functional requirements.

- 10 As shown in Figures 3 and 4, the domain-specific data contained in the dictionaries has been kept separate from the processing logic. Thus, the invention is easily modified by substituting dictionaries to support forms written in any language. Furthermore, the mapping and normalization rules are also easily modified to accommodate a variety of settings and applications of use.

15

Referring again to Figure 4, the core method involves the following steps, each of the steps accomplished in a single traversal of the form elements:

- First, field discovery 401;
- Second, field normalization 402; and
- 20 • Display format mapping 403.

25

On the first traversal: The logic loops forward over all form elements and discovers the fields. The primary method of field discovery involves, for an unmapped field, analysis of the visible field label. A number of rule-based approaches to the field label analysis are possible. Among them:

30

- if a field is positioned in a table cell, analyzing text expressions in adjacent cells; and comparing the analyzed text expressions with entries in the field label dictionary to find the closest match with a metadata expression, wherein the field is mapped to the correct metadata. As Figure 1 and 2 show, the field label is typically situated to the left, or immediately above the

field. However, according to need, the rules may be varied, to accommodate a placement below or to the right of the field;

- analyzing text expressions that occur within a predetermined number of words and within predetermined direction and distances from the field;
- 5 • based on page coordinates, examining the general vicinity of the form in all directions from the field and analyzing the text expression closest to the field; and
- ignoring supplemental text that does not contribute to the field label while searching for the field label, for example, text within parentheses or
- 10 quotation marks.

After the field label is located according to one of the above procedures, the analyzed expression is compared with a listing of similar expressions in the field label dictionary to find the closest match. The dictionary expressions, analogs of the

15 analyzed expression, are organized according to metadata. Thus, when a match is found, the field corresponding to the field label is mapped to that metadata 404.

There may be cases when a field doesn't have a label. For example, two or three fields may be provided for street address. Often they are labeled "Address 1" and

20 "Address 2," or something similar. But the first field may only be labeled "Address" and the second address field may not bear a label at all. In such a case, it is possible to map the second field according to its context. Mapping according to context requires that the field immediately preceding the field of interest have been mapped. As fields are mapped during the first pass, the algorithm assumes

25 maximum granularity of the data. Thus, in the case of an unlabeled field that follows a field labeled 'address;' the 'address' field would have been mapped to the metadata "AddressLine 1." It is probable that an unlabeled field following a "AddressLine 1" field is an "AddressLine 2" field. Accordingly, the unlabeled field will be mapped to the metadata "AddressLine 2."

30 As stated above, the algorithm assumes maximum granularity of the data. Thus, an unlabeled field following an "area code" field is assumed to be a "prefix" field, rather than a field asking for the entire remainder of the telephone number. A field

labeled 'Address' is presumed to be an "AddressLine 1" field, rather than a field that asks for the entire street address. As described further below, during normalization, the granularity of the field mapping is refined.

5 Additionally, if a field lacks a label, the algorithm may analyze the field's programmatic name. Following field name analysis, the field name is compared to the entries in the Field label dictionary and a match found. The field is then mapped as described above.

10 Furthermore, field size can be used to resolve ambiguity. For example, in the scenario "Name: First [] Middle [] Last []," it may be unclear whether the form is asking for the middle name or middle initial. Considering the size of the form element would help to resolve the ambiguity in this case: size=1 implies middle initial else middle name.

15 In the case of select boxes, if the field lacks a label the algorithm uses the default value for comparison with the field label dictionary followed by mapping as described above. Typically, in such cases, the default value acts as the label, *e.g.* "Select a state."

20 Sets of radio buttons are completely separate objects in the DOM (document object model) of the page. Thus, the logic creates a Radiobutton object. The list of possible values is compared to the field label dictionary and a mapping performed as described above.

25

IDENTIFYING THE BLOCK TYPE

Also, during the first traversal of the form elements, the fields are mapped to a block type 405. A block is a functional unit of the form, such as:

- 30
 - billing address;
 - shipping address;
 - email address; and

- credit card information.

The block type mapping for most fields is reasonably obvious: an email address is mapped to email, a credit card number is mapped to the credit card block. However, in the case of shipping address and mailing address, the mapping is more complex. Both block types contain identical field labels, although the underlying field names are different. Figures 1 and 2 show different blocks of the same form, with Figure 1 showing a billing address block and Figure 2 showing a shipping address block.

Thus, when a Name, Address or Phone field is encountered, the block type may be either BILLING or SHIPPING. A new block is assumed to start when an AddressLine 1, NameTitle, FirstName or LastName field is found; and the previous field was not a Name field. To identify whether the block is BILLING or SHIPPING, first the HTML fieldname is analyzed. If it matches any of the expressions in either a billing address array or a shipping address array, the block is mapped to BILLING or SHIPPING respectively.

If it isn't possible to map using the field name, the visible text preceding this field (and up to the previous Country or AddressLine 1 field, if any, is analyzed. If this text contains any of the expressions in the billing address or shipping address array, the block is BILLING or SHIPPING respectively.

Often, the visual text is too large to analyze and may contain additional information such as the order summary or anchor labels, which may contain strings like "Shipping Information" or "Shipping Options," resulting in mapping to an incorrect block type. In such cases, the following strategy is able to pick out the block label more accurately. It is adapted specifically to cases in which the address block and its label are situated in a table:

1. Search the text from the start of the BODY of the HTML page (or from just after a previous AddressLine 1 or Country element, if any) to the position of the current element.

2. Get the table that the current element is in.
3. If there is no table, exit. (It isn't possible to narrow down the range of text to be
5 searched.)
4. If the start of table is before start of the previously text searched as above in 1,
exit. (It isn't possible to narrow down the range of text to be searched.)
- 10 5. Search the text from start of table to start of current element.
6. If any of the text searched matches with an expression in a billing address array
or a shipping address array, the block type is determined.
- 15 7. Otherwise, if the current table is embedded in another table return to step 3.

During the second traversal of the form elements, the logic steps through the elements in reverse order, starting with the last field in the form. During this step, field normalization 402, the granularity of the field mapping is refined. For example
20 as described above, assuming maximum granularity, a field labeled 'Address' was presumed to be the first line of two or more address lines, thus it was mapped to 'AddressLine 1.' However, the presumption that the form contains more than one address line may be incorrect. In the current step, such mapping errors can be resolved by examining a field's context in reverse order. Thus, in the case of the
25 'Address' field, if the field following the labeled address field is mapped to 'City' it is determined that the original mapping of the field to 'AddressLine 1' was incorrect, and the field can be mapped correctly.

In the case of a telephone number field, on the first pass, the first field, because
30 maximum granularity is assumed, would have been mapped to area code. On the second pass, if the mapped field is immediately followed by another labeled field, the original mapping will be incorrect – since there is only one field for telephone, it will be necessary to concatenate the separate expressions for telephone number to

create a single string to put into the single telephone field. If, however, the field mapped to area code is followed by two unlabeled fields and then a labeled field, the mapping of the first field to 'Area code' was correct, and the two additional unlabeled fields can be mapped to accept the other expressions that together make up an entire phone number, a three-digit prefix, followed by a four-digit prefix. The rules for evaluating the field contexts in this fashion are found in the normalization dictionary 305. While the invention has been described in terms of conventions followed in the United States, the practitioner of ordinary skill will appreciate that the invention can be adapted to those of any country.

On the third traversal, for fields that require the data to be entered in a specified format, the visible display format hints 103 are analyzed. Thus, in a display format-mapping step 403 the fields that have been mapped to a metadata category 404 are mapped to the correct display format 406.

The display format hints are organized by category, *i.e.* there is one set of display hints for Phone fields, another for Name fields, Date fields and so on. Display format hint text for the field is captured (The text could be either to the left or right of the field). As described above, supplemental text enclosed within parentheses or quotation marks is ignored for the purpose of identifying field labels. However, when identifying display format hints, priority is given to the supplemental text because the display format hints are more likely to be found in the supplemental text, embedded within parentheses or quotation marks. This text is matched against the expressions found within the display format dictionary 306 in the set of hints for the field category (Note that the field has already been identified, so the field category is known at this point), and the display format is identified. If no display format is obtained and the previous field category is the same as this field category, then the previous display format is applied to this field, too. This would apply to cases like:

Home Phone (xxx-xxx-xxxx):
Work Phone:

CHECKOUT FORM DETECTION

The program code object has a flag, which is set whenever a Billing or Shipping Address field or a Credit Card field is identified to indicate the form is a checkout form. Thus, the invention also provides checkout form detection functionality.

MASKED FIELDS

Certain INPUT elements, for example, credit card number fields are designated as password fields, so as to mask sensitive information from being displayed. The names of these fields are stored in a separate array. To provide added security, the field type can also be changed to password for certain fields, for example, a form may generally allow users to enter the credit card data in visible clear text. The field type can be programmatically changed to password before filling out the card number so that the data shows up as "*****" instead of clear text.

After the metadata, block type and display format of each field has been identified, the information is used to generate a form mapping. In the current embodiment of the invention, the form mapping is coded in XML (extensible markup language). However, other page description languages would also be suitable in the practice of the invention.

Following mapping, the appropriate user data is retrieved from the user profile data file, formatted as required by the newly generated page mapping and the fields of the form populated with the required data.

While the invention has been described with respect to e-commerce applications, such description has been for purposes of illustration only, and is not meant to limit the scope of the invention. The invention finds application with other types of forms as well. Additionally, the invention is also well suited to automating the login process at sites requiring a user login.

Although the invention has been described herein with reference to certain preferred embodiments, one skilled in the art will readily appreciate that other

applications may be substituted for those set forth herein without departing from the spirit and scope of the present invention. Accordingly, the invention should only be limited by the Claims included below.

CLAIMS

1. A client-based method for filling out an electronic form automatically without
5 previously mapping or examining said form, comprising the steps of:
mapping said form based on analysis of visible form elements, and
populating form fields with correct data in correct format without user
intervention, according to said mapping.
- 10 2. The method of Claim 1, wherein said mapping step comprises the steps of:
identifying fields based on analysis of visible field labels proximate said
fields, when said field labels are present; and
evaluating user visible display format hints proximate said fields to
determine required display format.
- 15 3. The method of Claim 2, wherein said step of identifying fields based on
analysis of visible field labels comprises:
traversing page elements in a first sequence.
- 20 4. The method of Claim 3, wherein said step of identifying fields based on
analysis of visible field labels further comprises any of the steps of:
if a field is positioned in a table cell, analyzing text expressions in adjacent
cells;
analyzing a text expression within a predetermined number of words and in
25 at least one predetermined direction from said fields;
based on page coordinates, examining general vicinity of said page in all
directions from the field and analyzing text expression closest to said field; and
disregarding text expressions embedded within parentheses or quotation
marks.
- 30 5. The method of Claim 4, wherein said step of identifying fields based on
analysis of visible field labels further comprises the step of:

comparing the analyzed text expressions with entries in a field label dictionary to find closest match with a metadata expression, wherein said field is mapped to correct metadata.

5 6. The method of Claim 3, further comprising the step of:
when a field lacks a visible field label, mapping the field according to context.

10 7. The method of Claim 6, wherein mapping the field according to context comprises:

identifying mapping of at least one field preceding a current field in said first sequence; and

mapping said current field based on said mapping of said preceding field.

15 8. The method of Claim 3, further comprising the step of:
when a field lacks a visible field label, mapping the field based on analysis of a programmatic field name.

20 9. The method of Claim 3, further comprising the step of:
when a field lacks a visible field label, comparing the field's default value with entries in a field label dictionary to find closest match with a metadata expression, wherein said field is mapped to correct metadata.

25 10. The method of Claim 3, further comprising the step of:
if a field is a select field, comparing selection options with entries in a field label dictionary to find closest match with a metadata expression, wherein said field is mapped to correct metadata.

30 11. The method of Claim 3, further comprising the step of:
for sets of radio buttons, creating a new object for each set.

12. The method of Claim 3, further comprising the step of:
identifying block type, wherein a block comprises a plurality of related fields.

13. The method of Claim 12, wherein the step of identifying block type comprises one of the steps of:

comparing programmatic field name of at least a current field with arrays of
5 metadata expressions for each block type;

comparing visible form elements for at least said current field with arrays of
metadata expressions for each block type; and

where said current field occupies a table cell, analyzing text expressions at
least from first cell of said table to cell occupied by said current field.

10

14. The method of Claim 13, said step of step identifying block type further
comprising the step of:

when a close match is found, mapping said field to said block type.

15. 15. The method of Claim 12, wherein block type includes any of:

billing address;

shipping address;

credit card information; and

email address.

20

16. The method of Claim 2, further comprising the step of:

traversing form elements in a second sequence, said second sequence a
reverse of a first sequence.

identifying mapping of at least a field following a current field in said second
25 sequence; and

mapping said current field based on said mapping of said following field.

17. The method of Claim 2, wherein said step of evaluating visible display format
hints proximate said fields to determine required display format comprises the steps
30 of:

traversing form elements in a first sequence;

analyzing a visible display format hint proximate a field;

comparing said analyzed display format hint with a dictionary of data-entry prompts;

mapping said field to a display format based on said comparison.

5 18. The method of Claim 17, further comprising the step of:
any of concatenating, truncating and re-formatting and said correct data according to said display format.

10 19. The method of Claim 17, further comprising the step of:
for a field lacking a proximate visible display format hint, mapping current field to same display format of a preceding field if both fields are the same field type.

15 20. The method of Claim 1, further comprising the step of:
identifying a form as a checkout form.

21. The method of Claim 1, further comprising the step of:
masking confidential data from being displayed.

20 22. A computer program product for filling out an electronic form automatically without previously mapping or examining said form, said computer program product comprising a tangible medium having computer readable code embodied thereon, the computer code including program code means for:

25 mapping said form based on analysis of visible form elements; and
populating form fields with correct data in correct format without user intervention, according to said mapping.

30 23. The computer program product of Claim 22, wherein said code means for mapping said form based on analysis of visible form elements comprises code means for:

identifying fields based on analysis of visible field labels proximate said fields, when said field labels are present; and

evaluating user visible display format hints proximate said fields to determine required display format.

24. The computer program product of Claim 23, wherein said code means for
5 identifying fields based on analysis of visible field labels comprises code means for:

traversing page elements in a first sequence.

25. The computer program product of Claim 24, wherein said code means for
10 identifying fields based on analysis of visible field labels further comprises code means for any of:

if a field is positioned in a table cell, analyzing text expressions in adjacent cells;

analyzing a text expression within a predetermined number of words and in
15 at least one predetermined direction from said fields;

based on page coordinates, examining general vicinity of said page in all directions from the field and analyzing text expression closest to said field; and

disregarding text expressions embedded within parentheses or quotation marks.

26. The computer program product of Claim 25, wherein said code means for
identifying fields based on analysis of visible field labels further comprises code means for:

comparing the analyzed text expressions with entries in a field label
25 dictionary to find closest match with a metadata expression, wherein said field is mapped to correct metadata.

27. The computer program product of Claim 24, further comprising code means for:

30 when a field lacks a visible field label, mapping the field according to context.

28. The computer program product of Claim 27, wherein said code means for mapping the field according to context comprises code means for:

identifying mapping of at least one field preceding a current field in said first sequence; and

5 mapping said current field based on said mapping of said preceding field.

29. The computer program product of Claim 24, further comprising code means for:

10 when a field lacks a visible field label, mapping the field based on analysis of a programmatic field name.

30. The computer program product of Claim 24, further comprising code means for:

15 when a field lacks a visible field label, comparing the field's default value with entries in a field label dictionary to find closest match with a metadata expression, wherein said field is mapped to correct metadata.

31. The computer program product of Claim 24, further comprising code means for:

20 if a field is a select field, comparing selection options with entries in a field label dictionary to find closest match with a metadata expression, wherein said field is mapped to correct metadata.

32. The computer program product of Claim 24, further comprising code means for:

for sets of radio buttons, creating a new object for each set.

33. The computer program product of Claim 24, further comprising code means for:

30 identifying block type, wherein a block comprises a plurality of related fields.

34. The computer program product of Claim 33, wherein the code means for identifying block type comprises code means for:

comparing programmatic field name of at least a current field with arrays of metadata expressions for each block type;

comparing visible form elements for at least said current field with arrays of metadata expressions for each block type; and

5 where said current field occupies a table cell, analyzing text expressions at least from first cell of said table to cell occupied by said current field.

35. The computer program product of Claim 34, wherein the code means for identifying block type further comprises code means for:

10 when a close match is found, mapping said field to said block type.

36. The computer program product of Claim 33, wherein block type includes any of:

billing address;

15 shipping address;

credit card information; and

email address.

37. The computer program product of Claim 23, further comprising code means for:

20 traversing form elements in a second sequence, said second sequence a reverse of a first sequence.

identifying mapping of at least a field following a current field in said second sequence; and

25 mapping said current field based on said mapping of said following field.

38. The computer program product of Claim 23, wherein said code means for evaluating visible display format hints proximate said fields to determine required display format comprises code means for:

30 traversing form elements in a first sequence;

analyzing a visible display format hint proximate a field;

comparing said analyzed display format hint with a dictionary of data-entry prompts;

mapping said field to a display format based on said comparison.

39. The computer program product of 38, further comprising the code means for:
any of concatenating, truncating and re-formatting and said correct data
5 according to said display format.

40. The computer program product of Claim 38, further comprising code means
for:

10 for a field lacking a proximate visible display format hint, mapping current
field to same display format of a preceding field if both fields are the same field
type.

41. The computer program product of Claim 22, further comprising code means
for:

15 identifying a form as a checkout form.

42. The computer program product of Claim 22, further comprising code means
for:

20 masking confidential data from being displayed.

43. A client-based system for filling out an electronic form automatically without
previously mapping or examining said form, comprising:

a client;

at least one data file;

25 rules for mapping visible form elements to correct data from said file; and
computer-readable code means for:

mapping said form based on analysis of visible form elements; and

populating form fields with correct data in correct format without user
intervention, according to said mapping;

30 wherein said code is executable on said client, and wherein, said analogs,
said rules, and said code are stored on said client.

44. The system of Claim 43, wherein said code means for mapping said form based on analysis of visible form elements comprises code means for:

identifying fields based on analysis of visible field labels proximate said fields, when said field labels are present; and

5 evaluating user visible display format hints proximate said fields to determine required display format.

45. The system of Claim 44, wherein said code means for identifying fields based on analysis of visible field labels comprises code means for:

10 traversing page elements in a first sequence.

46. The system of Claim 45, wherein said code means for identifying fields based on analysis of visible field labels further comprises code means for any of:

15 if a field is positioned in a table cell, analyzing text expressions in adjacent cells;

analyzing a text expression within a predetermined number of words and in at least one predetermined direction from said fields;

based on page coordinates, examining general vicinity of said page in all directions from the field and analyzing text expression closest to said field; and

20 disregarding text expressions embedded within parentheses or quotation marks.

47. The system of Claim 46, wherein said code means for identifying fields based on analysis of visible field labels further comprises code means for:

25 comparing the analyzed text expressions with entries in a field label dictionary to find closest match with a metadata expression, wherein said field is mapped to correct metadata.

48. The system of Claim 45, further comprising code means for:

30 when a field lacks a visible field label, mapping the field according to context.

49. The system of Claim 48, wherein said code means for mapping the field according to context comprises code means for:

identifying mapping of at least one field preceding a current field in said first sequence; and

5 mapping said current field based on said mapping of said preceding field.

50. The system of Claim 45, further comprising code means for:

when a field lacks a visible field label, mapping the field based on analysis of a programmatic field name.

10

51. The system of Claim 45, further comprising code means for:

when a field lacks a visible field label, comparing the field's default value with entries in a field label dictionary to find closest match with a metadata expression, wherein said field is mapped to correct metadata.

15

52. The system of Claim 45, further comprising code means for:

if a field is a select field, comparing selection options with entries in a field label dictionary to find closest match with a metadata expression, wherein said field is mapped to correct metadata.

20

53. The system of Claim 45, further comprising code means for:

for sets of radio buttons, creating a new object for each set.

54. The system of Claim 24, further comprising code means for:

25 identifying block type, wherein a block comprises a plurality of related fields.

55. The system of Claim 54, wherein the code means for identifying block type comprises code means for:

30 comparing programmatic field name of at least a current field with arrays of metadata expressions for each block type;

comparing visible form elements for at least said current field with arrays of metadata expressions for each block type; and

where said current field occupies a table cell, analyzing text expressions at least from first cell of said table to cell occupied by said current field.

56. The system of Claim 55, wherein the code means for identifying block type
5 further comprises code means for:

when a close match is found, mapping said field to said block type.

57. The system of Claim 54, wherein block type includes any of:

billing address;

10 shipping address;

credit card information; and

email address.

58. The system Claim 44, further comprising code means for:

15 traversing form elements in a second sequence, said second sequence a reverse of a first sequence.

identifying mapping of at least a field following a current field in said second sequence; and

mapping said current field based on said mapping of said following field.

20

59. The system of Claim 44, wherein said code means for evaluating visible display format hints proximate said fields to determine required display format comprises code means for:

traversing form elements in a first sequence;

25 analyzing a visible display format hint proximate a field;

comparing said analyzed display format hint with a dictionary of data-entry prompts;

mapping said field to a display format based on said comparison.

30 60. The system of 59, further comprising code means for:

any of concatenating, truncating and re-formatting and said correct data according to said display format.

61. The system of Claim 59, further comprising code means for:
for a field lacking a proximate visible display format hint, mapping current
field to same display format of a preceding field if both fields are the same field
type.

5

62. The system of Claim 43, further comprising code means for:
identifying a form as a checkout form.

63. The system of Claim 43, further comprising code means for:
masking confidential data from being displayed.

10

64. The system of Claim 43, wherein said data file resides on said client or on a
server.

AMENDED CLAIMS

[received by the International Bureau on 23 September 2003 (23.09.03);
original claims 1-64 replaced by new claims 1-61 (16 pages)]

1. A client-based method for filling out an electronic form automatically without previous form examination or storing of mapping information about said form, comprising steps of:

identifying fields based on analysis of visible field labels proximate said fields, when said field labels are present;

evaluating user visible display format hints proximate said fields to determine required display format;

mapping the electronic form based on said analysis;

populating form fields with correct data in correct format without user intervention, according to said mapping.

2. The method of Claim 1, wherein the step of identifying fields based on analysis of visible field labels comprises:

traversing form elements in a first sequence.

3. The method of Claim 2, wherein the step of identifying form fields based on analysis of visible field labels further comprises any of the steps of:

if a field is positioned in a table cell, analyzing text expressions in adjacent cells;

analyzing a text expression within a predetermined number of words and in at least one predetermined direction from said field;

based on form coordinates, examining general vicinity of said form in all directions from the field and analyzing text expression closest to said field; and

disregarding text expressions embedded within parentheses or quotation marks.

4. The method of Claim 3, wherein the step of identifying fields based on analysis of visible field labels further comprises the step of:

comparing the analyzed text expressions with entries in a field label dictionary to find closest match with a metadata expression, wherein said field is mapped to correct metadata.

5. The method of Claim 2, further comprising a step of:

when a field lacks a visible field label, mapping the field according to context.

6. The method of Claim 5, wherein mapping the field according to context comprises:

identifying mapping of at least one field preceding a current field in said first sequence; and

mapping said current field based on said mapping of said preceding field.

7. The method of Claim 2, further comprising a step of:

when a field lacks a visible field label, mapping the field based on analysis of a programmatic field name.

8. The method of Claim 2, further comprising a step of:

when a field lacks a visible field label, comparing the field's default value with entries in a field label dictionary to find closest match with a metadata expression, wherein said field is mapped to correct metadata.

9. The method of Claim 2, further comprising a step of:

if a field is a select field, comparing selection options with entries in a field label dictionary to find closest match with a metadata expression, wherein said field is mapped to correct metadata.

10. The method of Claim 2, further comprising a step of:

for sets of radio buttons, creating a new object for each set.

11. The method of Claim 2, further comprising a step of:

identifying block type, wherein a block comprises a plurality of related fields.

12. The method of Claim 11, wherein the step of identifying block type comprises one of the steps of:

comparing programmatic field name of at least a current field with arrays of metadata expressions for each block type;

comparing visible form elements for at least said current field with arrays of metadata expressions for each block type; and

when said current field occupies a table cell, analyzing text expressions at least from first cell of said table to cell occupied by said current field.

13. The method of Claim 12, said step of identifying block type further comprising a step of:

when a close match is found, mapping said field to said block type.

14. The method of Claim 11, wherein block type includes any of:

billing address;

shipping address;

credit card information; and

email address.

15. The method of Claim 2, further comprising a step of:

traversing form elements in a second sequence, said second sequence a reverse of a first sequence;

identifying mapping of at least a field following a current field in said second sequence; and

mapping said current field based on said mapping of said field following the current field.

16. The method of Claim 1, wherein said step of evaluating visible display format hints proximate said fields to determine required display format comprises the steps of:

traversing form elements in a first sequence;

analyzing a visible display format hint proximate a field;

comparing said analyzed display format hint with a dictionary of data-entry prompts;

mapping said field to a display format based on said comparison.

17. The method of Claim 16, further comprising a step of:

any of concatenating, truncating and re-formatting said correct data according to said display format.

18. The method of Claim 16, further comprising a step of:

for a field lacking a proximate visible display format hint, mapping current field to same display format of a preceding field if both fields are the same field type.

19. The method of Claim 1, further comprising a step of:

identifying a form as a checkout form.

20. The method of Claim 1, further comprising a step of:

masking confidential data from being displayed.

21. A computer program product for filling out an electronic form automatically without form examination or storing of mapping information about said form, said computer program product comprising a tangible medium having computer readable code embodied therein, the computer code including program code means for:

identifying fields based on analysis of visible field labels proximate said fields, when said field labels are present;

evaluating user visible display format hints proximate said fields to determine required display format;

mapping the electronic form based on said analysis;

populating form fields with correct data in correct format without user intervention, according to said mapping.

22. The computer program product of Claim 23, wherein said code means for identifying fields based on analysis of visible field labels comprises code means for:

traversing form elements in a first sequence.

23. The computer program product of Claim 21, wherein said code means for identifying form fields based on analysis of visible field labels further comprises code means for any of:

if a field is positioned in a table cell, analyzing text expressions in adjacent cells;

analyzing a text expression within a predetermined number of words and in at least one predetermined direction from said field;

based on form coordinates, examining general vicinity of said form in all directions from the field and analyzing text expression closest to said field; and

disregarding text expressions embedded within parentheses or quotation marks.

24. The computer program product of Claim 21, wherein said code means for identifying fields based on analysis of visible field labels further comprises code means for:

comparing the analyzed text expressions with entries in a field label dictionary to find closest match with a metadata expression, wherein said field is mapped to correct metadata.

25. The computer program product of Claim 21, further comprising code means for:

when a field lacks a visible field label, mapping the field according to context.

26. The computer program product of Claim 25, wherein said code means for mapping the field according to context comprises code means for:

identifying mapping of at least one field preceding a current field in said first sequence; and

mapping said current field based on said mapping of said preceding field.

27. The computer program product of Claim 22, further comprising code means for:

when a field lacks a visible field label, mapping the field based on analysis of a programmatic field name.

28. The computer program product of Claim 22, further comprising code means for:

when a field lacks a visible field label, comparing the field's default value with entries in a field label dictionary to find closest match with a metadata expression, wherein said field is mapped to correct metadata.

29. The computer program product of Claim 22, further comprising code means for:

if a field is a select field, comparing selection options with entries in a field label dictionary to find closest match with a metadata expression, wherein said field is mapped to correct metadata.

30. The computer program product of Claim 22, further comprising code means for:

for sets of radio buttons, creating a new object for each set.

31. The computer program product of Claim 22, further comprising code means for:

identifying block type, wherein a block comprises a plurality of related fields.

32. The computer program product of Claim 31, wherein the code means for identifying block type comprises code means for:

comparing programmatic field name of at least a current field with arrays of metadata expressions for each block type;

comparing visible form elements for at least said current field with arrays of metadata expressions for each block type; and

when said current field occupies a table cell, analyzing text expressions at least from first cell of said table to cell occupied by said current field.

33. The computer program product of Claim 32, wherein the code means for identifying block type further comprises code means for:

when a close match is found, mapping said field to said block type.

34. The computer program product of Claim 31, wherein block type includes any of:

billing address;

shipping address;

credit card information; and

email address.

35. The computer program product of Claim 21, further comprising code means for:

traversing form elements in a second sequence, said second sequence a reverse of a first sequence;

identifying mapping of at least a field following a current field in said second sequence; and

mapping said current field based on said mapping of said field following the current field.

36. The computer program product of Claim 21, wherein said code means for evaluating visible display format hints proximate said fields to determine required display format comprises code means for:

traversing form elements in a first sequence;

analyzing a visible display format hint proximate a field;

comparing said analyzed display format hint with a dictionary of data-entry prompts;

mapping said field to a display format based on said comparison.

37. The computer program product of 36, further comprising the code means for:

any of concatenating, truncating and re-formatting said correct data according to said display format.

38. The computer program product of Claim 36, further comprising code means for:

for a field lacking a proximate visible display format hint, mapping current field to same display format of a preceding field if both fields are the same field type.

39. The computer program product of Claim 21, further comprising code means for;

identifying a form as a checkout form.

40. The computer program product of Claim 21, further comprising code means for:

masking confidential data from being displayed.

41. A client-based system for filling out an electronic form automatically without previous form examination or storing of mapping information about said form, comprising:

a client;

at least one data file;

rules for mapping visible form elements to correct data from said file;

and

computer-readable code means for:

identifying form fields based on analysis of visible field labels proximate said fields, when said field labels are present;

evaluating user visible display format hints proximate said fields to determine required display format;

mapping the electronic form based on said analysis; and

populating form fields with correct data in correct format without user intervention, according to said mapping;

wherein said code means are executable on said client, and wherein said rules and said code means are stored on said client.

42. The system of Claim 41, wherein said code means for identifying fields based on analysis of visible field labels comprises code means for:
traversing form elements in a first sequence.

43. The system of Claim 42, wherein said code means for identifying form fields based on analysis of visible field labels further comprises code means for any of:

if a field is positioned in a table cell, analyzing text expressions in adjacent cells;

analyzing a text expression within a predetermined number of words and in at least one predetermined direction from said field;

based on form coordinates, examining general vicinity of said form in all directions from the field and analyzing text expression closest to said field;
and

disregarding text expressions embedded within parentheses or quotation marks.

44. The system of Claim 43, wherein said code means for identifying fields based on analysis of visible field labels further comprises code means for:

comparing the analyzed text expressions with entries in a field label dictionary to find closest match with a metadata expression, wherein said field is mapped to correct metadata.

45. The system of Claim 42, further comprising code means for:
when a field lacks a visible field label, mapping the field according to context.

46. The system of Claim 45, wherein said code means for mapping the field according to context comprises code means for:

identifying mapping of at least one field preceding a current field in said first sequence; and

mapping said current field based on said mapping of said preceding field.

47. The system of Claim 42, further comprising code means for:
when a field lacks a visible field label, mapping the field based on analysis of a programmatic field name.

48. The system of Claim 42, further comprising code means for:
when a field lacks a visible field label, comparing the field's default value with entries in a field label dictionary to find closest match with a metadata expression, wherein said field is mapped to correct metadata.

49. The system of Claim 42, further comprising code means for:

if a field is a select field, comparing selection options with entries in a field label dictionary to find closest match with a metadata expression, wherein said field is mapped to correct metadata.

50. The system of Claim 42, further comprising code means for:

for sets of radio buttons, creating a new object for each set.

51. The system of Claim 41, further comprising code means for:

identifying block type, wherein a block comprises a plurality of related fields.

52. The system of Claim 51, wherein the code means for identifying block type comprises code means for:

comparing programmatic field name of at least a current field with arrays of metadata expressions for each block type;

comparing visible form elements for at least said current field with arrays of metadata expressions for each block type; and

when said current field occupies a table cell, analyzing text expressions at least from first cell of said table to cell occupied by said current field.

53. The system of Claim 52, wherein the code means for identifying block type further comprises code means for:

when a close match is found, mapping said field to said block type.

54. The system of Claim 51, wherein block type includes any of:

billing address;
shipping address;
credit card information; and
email address.

55. The system Claim 41, further comprising code means for:
traversing form elements in a second sequence, said second sequence
a reverse of a first sequence;
identifying mapping of at least a field following a current field in said
second sequence; and
mapping said current field based on said mapping of said field
following the current field.

56. The system of Claim 41, wherein said code means for evaluating
visible display format hints proximate said fields to determine required display
format comprises code means for:
traversing form elements in a first sequence;
analyzing a visible display format hint proximate a field;
comparing said analyzed display format hint with a dictionary of data-
entry prompts;
mapping said field to a display format based on said comparison.

57. The system of 56, further comprising code means for:
any of concatenating, truncating and re-formatting and said correct
data according to said display format.

58. The system of Claim 57, further comprising code means for:
for a field lacking a proximate visible display format hint, mapping
current field to same display format of a preceding field if both fields are the
same field type.
59. The system of Claim 41, further comprising code means for:
identifying a form as a checkout form.
60. The system of Claim 41, further comprising code means for:
masking confidential data from being displayed.
61. The system of Claim 41, wherein said data file resides on said client or
on a server.

1/3

100

Please follow these 5 quick steps to register for Quick Checkout, then click "Continue".	
<p>① Enter your credit card information.</p> <p>Credit Card Nickname <input type="text"/> (e.g. my Visa)</p> <p>Credit Card Type <input type="text" value="Visa"/></p> <p>Credit Card Number <input type="text"/> (e.g. 1234 5678 1234 0000 for Visa)</p> <p>Expiration Date <input type="text" value="5"/> / <input type="text" value="2002"/></p> <p>First Name and Middle Initial <input type="text"/></p> <p>102 — Last Name <input type="text"/></p> <p>Address Line 1 <input type="text"/></p> <p>Address Line 2 (optional) <input type="text"/></p> <p>Address Line 3 (optional) <input type="text"/></p> <p>City <input type="text"/></p> <p>State <input type="text" value="AA - Armed Forces Americas"/></p> <p>Zip/Postal <input type="text"/></p> <p>Country <input type="text" value="United States"/></p> <p>Daytime Phone <input type="text"/> 103 — (e.g. 888-888-8888)</p> <p>Evening Phone(optional) <input type="text"/> (e.g. 888-888-8888)</p>	<p>Remember</p> <p>At checkout time you will be able to add and choose different credit cards. You can also update your credit cards anytime at http://quickcheckout.aol.com or AOL keyword: Quick Checkout</p> <p>You must be the credit card holder or authorized user of a credit card to register for Quick Checkout.</p>

FIG. 1

2/3

<p>② Enter your shipping information.</p> <p><input checked="" type="checkbox"/> If you would like to use your credit card address for shipping, check this box and skip to the next step.</p> <p>First Name and Middle Initial <input type="text"/></p> <p>Last Name <input type="text"/></p> <p>Address Line 1 <input type="text"/></p> <p>Address Line 2 (optional) <input type="text"/></p> <p>Address Line 3 (optional) <input type="text"/></p> <p>City <input type="text"/></p> <p>State <input type="text" value="AA - Armed Forces Americas"/></p> <p>Zip/Postal <input type="text"/></p> <p>Country <input type="text" value="United States"/></p> <p>Daytime Phone <input type="text"/> (e.g. 888-888-8888)</p> <p>Evening phone (optional) <input type="text"/> (e.g. 888-888-8888)</p>	<p>Remember</p> <p>As with your credit cards you can add and choose different addresses at checkout time. And you can also update your addresses anytime at http://quickcheckout.aol.com or AOL Keyword: Quick Checkout.</p>
--	--

FIG. 2

3/3

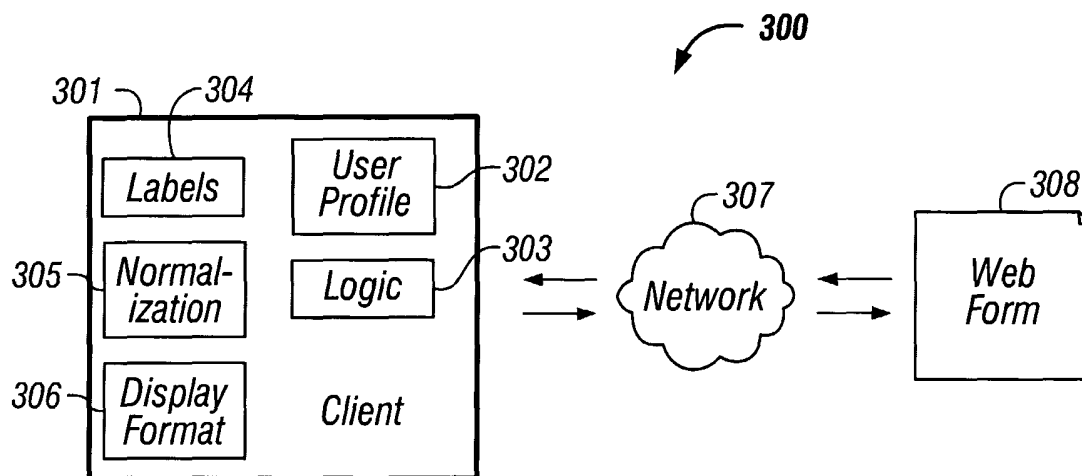


FIG. 3

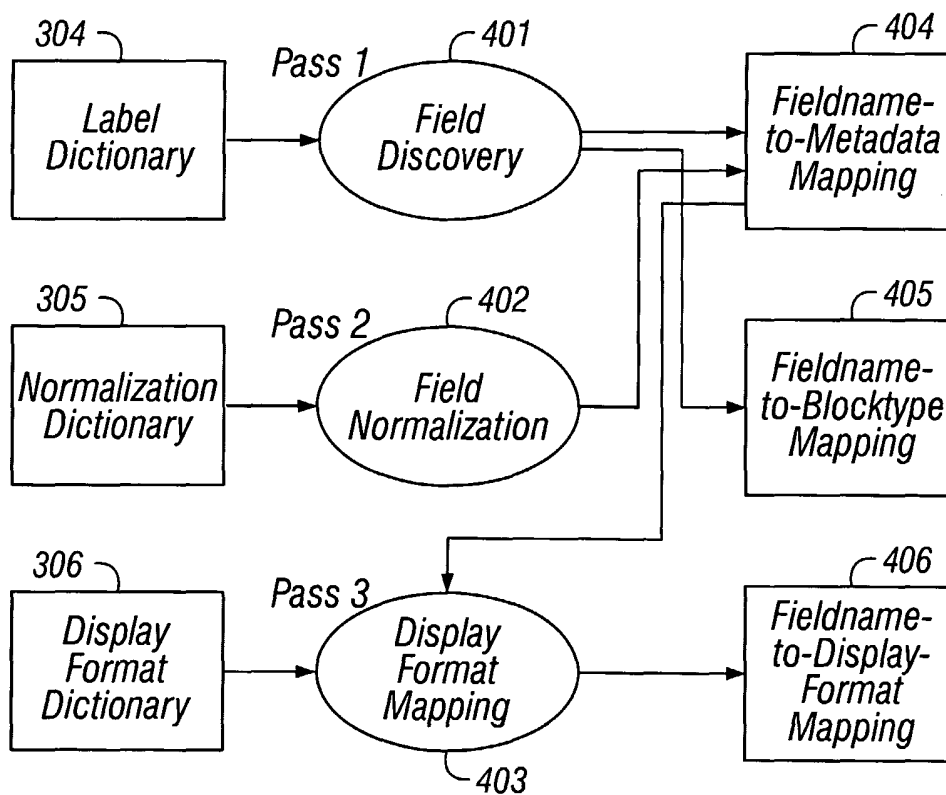


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No.

PCT/US03/13157

A. CLASSIFICATION OF SUBJECT MATTER

IPC(7) : G06F 15/16

US CL : 709/203

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

U.S. : 709/203

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)
WEST**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y,P	US 2002/0087479 A1 (MALCOLM) 04 July 2002 (04.07.2002), [0076]-[0082], [0105].	1-64
Y	US 2001/0027439 A1 (HOLTZMAN et al) 04 October 2001 (04.10.2001), abstract, [0012]-[0016], [0074]-[0076].	1-64
Y,P	US 2002/0083068 A1 (QUASS et al) 27 June 2002 (27.06.2002), abstract, [0005]-[0017].	1-64
Y	US 6,199,079 B1 (GUPTA et al) (06 March 2001 (06.03.2001), abstract, column 1 - column 7.	1-64
Y	US 6,192,380 B1 (LIGHT et al) 20 February 2001 (20.02.2001), abstract, column 1 - column 4.	1-64



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family
"P" document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search

26 June 2003 (26.06.2003)

Date of mailing of the international search report

24 JUL 2003

Name and mailing address of the ISA/US

Mail Stop PCT, Attn: ISA/US
Commissioner for Patents
P.O. Box 1450
Alexandria, Virginia 22313-1450

Facsimile No. (703)305-3230

Authorized officer

Meng A. Y. An

Telephone No. (703) 305-3900