



(11) **EP 1 704 102 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
10.08.2011 Bulletin 2011/32

(51) Int Cl.:
B65D 81/26 (2006.01) B65D 65/38 (2006.01)

(21) Application number: **04805935.6**

(86) International application number:
PCT/GB2004/005107

(22) Date of filing: **03.12.2004**

(87) International publication number:
WO 2005/056426 (23.06.2005 Gazette 2005/25)

(54) **IMPROVEMENTS IN OR RELATING TO FOOD PACKAGING**

VERBESSERUNGEN FÜR EINE LEBENSMITTELVERPACKUNG ODER DIESE BETREFFEND
AMELIORATION RELATIVES A UN EMBALLAGE POUR ALIMENTS

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU MC NL PL PT RO SE SI SK TR**

(30) Priority: **06.12.2003 GB 0328332**

(43) Date of publication of application:
27.09.2006 Bulletin 2006/39

(73) Proprietor: **Paragon Flexible Packaging Limited**
Heapham Road Industrial Estate
Gainsborough
Lincolnshire DN21 1RZ (GB)

(72) Inventors:
• **NIRANJAN, Keshavan**
Reading RG1 5JW (GB)

• **DUNCAN, Eric**
St Johns
Worcester WR2 6ED (GB)
• **STALEY, Jonathan**
Fleet
Hampshire GU51 4QP (GB)

(74) Representative: **Foot, Paul Matthew James**
Withers & Rogers LLP
Goldings House
2 Hays Lane
London
SE1 2HW (GB)

(56) References cited:
FR-A- 2 809 380 GB-A- 2 355 956
US-A- 4 883 674 US-A- 5 901 848
US-A1- 2002 034 622

EP 1 704 102 B1

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

[0001] This invention concerns improvements in or relating to food packaging and more particularly, but not exclusively, to packaging for foodstuffs with a defined but relatively short shelf life, for example perishable foods such as vegetables and fruit.

[0002] It is common practice in the modern retailing of these types of foodstuffs to use packaging in order to preserve the freshness and quality of the produce and to impose a measure of hygiene in an environment in which handling of the produce is customary.

[0003] It is well known that differing vegetables and fruits possess different respiration rates and accordingly their rate of deterioration or preservability differs to the extent that their enclosure in a unitary pack fails to accommodate their inherent attributes. The consequence is that one type of packaging is not universally acceptable for the maintenance of quality and the enhancement of shelf life.

[0004] Much attention has been paid to the creation of packaging materials that address the need for providing films or other enclosures which afford flexibility in terms of catering for the different respiration rates mentioned above. For example US Patent No 4 996 071 to Bell is concerned with the ascertainment of the respiration rates of various vegetables and the matching of those rates with an appropriate packaging to achieve the desired effect for the preservation of quality, appearance and marketability of the produce. US Patent No 6 013 293 to De Moor discloses a packaging member including a gas permeable membrane having a defined oxygen respirability and a container enclosing the member within which in practice fruit or other respiring biological materials are packed.

[0005] The globalisation of supply sources demands a new approach to packaging for the transportation and distribution of perishable foodstuffs in a way that preserves quality and freshness with a reasonable shelf life span.

[0006] There is a veritable plethora of patents directed to all manner of controlled atmosphere packaging and the materials used therefor but none of them relates to the solution of the problem of accommodating the varying respiration rates of perishable foodstuffs whilst offering to the customer the versatility of produce normally on sale and to be used together when consumed.

[0007] It is also known to provide multi-compartment packaging in the presentation of ready to eat meals, for example in aircraft catering, but such packaging usually has common headspace. Furthermore there is also known the 'eat-me/keep me' multipacks but they are focused on providing the same produce but in separate compartments so that they can be used sequentially.

[0008] It is an object of the present invention to provide a packaging for foodstuffs that provides a solution to the problem outlined above.

[0009] According to the invention there is provided a

multi-compartment unitary packaging for a variety of foodstuffs, including two or more conjoined compartments, characterised in that each compartment is a bag formed from a film of gas and/or vapour permeable plastics material wherein each of the compartments has a gas permeability matching the individual respiration rate of the foodstuff(s) to be held within that compartment.

[0010] Each compartment when constituted by the containment may comprise a film in the form of a bag which conveniently is integral with the other compartments of the packaging. Each compartment may in practice be formed separately from the other compartment or compartments and then conjoined therewith to provide the multi-compartment packaging of the invention. In the alternative, the multi-compartment packaging may be produced unitarily with each compartment being separate but conjoined. In some embodiments of the invention the compartments are communicable one with the other through the agency of a common barrier whereby the permeation of gases from one compartment to another assists in the preservation of the foodstuffs in the recipient compartment.

[0011] The compartments may be separable one from the other and it is to be understood that the term 'multi-compartment' as used herein embraces packaging with two or more compartments.

[0012] The packaging may be manufactured from currently available conventional materials used for the packaging of perishable foodstuffs and these materials may be gas and/or vapour-permeable as required according to the specific foodstuffs in question.

[0013] The present invention also provides for the formation of the packaging into differing geometric shapes and accordingly the structure thereof is governed thereby. For example, the multi-compartment packaging may be made in such form as in the finished article to present a pyramidal shape with each triangular face and the base thereof providing a compartment for a foodstuff or a variety of foodstuffs. Alternative geometric shapes could be adopted, for example a circular form providing a multiplicity of compartments in sectoral fashion. Further alternative shapes may be rectilinear or curvilinear. In all cases the functional aspect of providing a plurality of compartments for differing foodstuffs is achieved together with the aestheticising of the packaging to make it more attractive to the consumer rather than just a plain bag.

[0014] As indicated supra the compartments may be sealed one from the other or may be in communication through a common barrier therebetween under controlled conditions dependent upon the foodstuffs to be packaged. Accordingly the shape and therefore the appearance of the packaging will depend in some measure upon the desired functionality.

[0015] The packaging of the present invention may include rigid or semi-rigid elements and thus for example each compartment may comprise a base formed of such an element or elements and may of unitary construction or may be formed of two or more elements conjoined in

suitable manner one to the other or others. The containment may be in the form of at least one film covering or closure. In the case of a single containment the film would seal all the compartments one from the other or others along common boundaries. In the alternative a number of containments would be provided separately to cover the individual compartments sealing the same. This seal not only prevents mixing of the foodstuffs as between one compartment and another but also isolates the head-spaces one from the other. The base is formed of a material that allows permeation of gases or vapours from one compartment to an adjacent compartment.

[0016] The term foodstuffs is intended to embrace all edible produce such for example vegetables, including salad components, and fruit together with suitable dressings therefor. In this latter respect it is expected that for some applications of the present invention it will be necessary or desirable to provide in at least one of the compartments of the packaging a dressing or other condiment or sweetener or the like to embellish the flavour of the produce concerned. It is also to be understood that the term 'edible produce' will encompass foodstuffs other than that of the green-grocery kind; for example it is envisaged that meat may be included as a foodstuff for which the packaging of the present invention may be suitable. In this instance, the packaging of the invention comprising a multiplicity of compartments may be used for the presentation of complete meals of differing courses, each one requiring different preservation conditions and thus differing containments. For example, cooked meats or boiled eggs are non-respiring and accordingly may be suitably gas-flushed within their respective compartments.

[0017] By way of example only, seven embodiments of multi-compartment packaging according to the invention are described below with reference to the accompanying schematic drawings in which:

[0018] Figure 1 shows a first embodiment;

[0019] Figure 2 shows a second embodiment;

[0020] Figure 3 shows a third embodiment;

[0021] Figure 4 shows a fourth embodiment;

[0022] Figure 5 shows a fifth embodiment;

[0023] Figure 6 shows a sixth embodiment; and

[0024] Figure 7 shows a seventh embodiment.

[0025] In the drawings like parts have been accorded like numerals of reference throughout the description of the embodiments.

[0026] Referring to Figure 1 there is shown the first embodiment of multi-compartment packaging 1 comprising two or more compartments 2, with possibly two further compartments shown in dotted outline. Each compartment 2 is a film in the form of a bag conjoined to the next in a suitable manner, for example heat or pressure welding. Each compartment is unique in terms of having its own permeability characteristics to cater for and match the respiration rate of the produce it is in practice intended to contain. In this and indeed all examples of the invention the bag is the containment which constitutes the com-

partment. This form of packaging may be used to encapsulate differing leaf salads which in practice deteriorate at differing respiration rates. The packaging is thus able to preserve the freshness of all the salad components because the compartments are respiration specific. Conventional packaging is defective since it does not address the poor cohabitation of different foodstuffs.

[0027] In Figure 2 the multi-compartment packaging 1 is of parallelogram form composed of four equilateral triangular compartments 2 connected to one or more adjacent compartments, each compartment 2 again being so formed of appropriately gas and/or vapour permeable material to accommodate foodstuffs of varying respiration rates.

[0028] Figures 3 and 4 illustrate multi-compartment packaging of pyramidal shape with either four or five compartments respectively. Again each compartment complies with the principal feature of the invention in being made of a material giving the required preservative features for the produce contained within it. The packaging is so formed geometrically that it can be configured as a pyramid to provide the aesthetic appearance for customer appeal, but with the functionality as indicated.

[0029] Figure 5 provides a multi-compartment packaging 1 so formed as to provide a multitude of compartments 2 but with the facility of a carrying feature, namely a handle or loop 4.

[0030] Figure 6 shows a tetrahedrally-shaped multi-compartment packaging 1 in the form of a bag which may be conjoined to an adjacent element as shown in the lower representation.

[0031] Figure 7 depicts multi-compartment packaging 1 of generally circular form with four sectoral compartments 2 arranged symmetrically about a core 5, the compartments being connected one to the other to provide a unitary package.

[0032] The present invention provides individual atmospheric conditions to cater for the individual foodstuffs thereby affording enhanced cohabitation when compared with contemporary approaches to this kind of packaging. The customisation of the packaging of the present invention allows a miscellany of foodstuffs to be accommodated in but one pack with each different product enjoying an optimised climate in which to survive satisfactorily for its expected shelf life. This advantageous attribute is in sharp contrast to the conventional packaging which essentially forces one product to endure what may well be a relatively hostile environment in terms of deterioration of freshness and quality.

[0033] The added virtue of the present invention is that it uses conventional materials which, as indicated above, have been investigated thoroughly in terms of content and performance.

[0034] It is to be understood that the present invention allows, as foreshadowed *supra*, the adoption of diverse presentational packaging which not only provides improved protection for the produce concerned, but also makes it more visually attractive. The merit of the inven-

tion is thus twofold in these respects.

Claims

1. Multi-compartment unitary packaging (1) for a variety of foodstuffs, including two or more conjoined compartments (2), **characterised in that** each compartment is a bag formed from a film of gas and/or vapour permeable plastics material wherein each of the compartments has a gas permeability matching the individual respiration rate of the foodstuff(s) to be held within that compartment.
2. Packaging according to Claim 1 in which each compartment is integral with one or more adjacent compartments.
3. Packaging according to Claim 1 in which the compartments are formed separately and conjoined to provide the multiplicity of compartments.
4. Packaging according to any one of the preceding claims in which some or all of the adjacent compartments are provided with a common barrier.
5. Packaging according to Claim 4 in which the common barrier is gas and/or vapour permeable.
6. Packaging according to any one of the preceding claims in which the compartments are separable one from the other or others of them.
7. Packaging according to any one of the preceding Claims in which the compartments are formed into a rectilinear geometric shape.
8. Packaging according to any one of claims 1 to 6 in which the compartments are formed into a curvilinear geometric shape.
9. Packaging according to any one of claims 1 to 6 in which the compartments are formed into a circular geometric shape, each compartment being of sectoral form.
10. Packaging according to any one of claims 1 to 6 in which the compartments are formed into a pyramidal geometric shape and each face of the pyramid is formed as a compartment.
11. Packaging according to any one of the preceding claims in which a carrying handle (4) is provided.

Patentansprüche

1. Eine einheitliche Verpackung (1) mit mehreren.

Kammern für eine Vielzahl der unterschiedlichsten Nahrungsmittel, bestehend aus einer oder mehreren miteinander verbundenen Kammern (2), **dadurch gekennzeichnet, dass** jede Kammer (2) als ein Beutel ausgebildet ist, der aus einer gas- und/oder dampfdurchlässigen Folie besteht, die aus einem Plastikmaterial gebildet wird, und wobei jede der Kammern eine Gasdurchlässigkeit aufweist, die sich an die individuelle Respirationsrate des bzw. der Nahrungsmittel (s), die bzw. das sich in den Kammern befinden, anpassen.

2. Verpackung nach Anspruch 1, wobei jede Kammer integrierter Bestandteil einer oder mehrerer angrenzender Kammern ist.
3. Verpackung nach Anspruch 1, wobei die Kammern separat ausgebildet sind und angrenzend miteinander verbunden sind, um so eine Vielzahl von Kammern zu bilden.
4. Verpackung nach einem oder mehreren der vorstehenden Ansprüche, wobei einige oder alle aneinander angrenzenden Kammern eine gemeinsame Abdeckung aufweisen.
5. Verpackung nach Anspruch 4, wobei die gemeinsame Abdeckung gas- und/oder dampfdurchlässig ist.
6. Verpackung nach einem oder mehreren der vorstehenden Ansprüche, wobei die Kammern jeweils voneinander abtrennbar ausgebildet sind.
7. Verpackung nach einem oder mehreren der vorstehenden Ansprüche, wobei die Kammern als eine geradlinige, geometrische Ausgestaltung ausgebildet sind.
8. Verpackung nach einem der Ansprüche 1 bis 6, wobei die Kammern als eine gekrümmte, geometrische Ausgestaltung ausgebildet sind.
9. Verpackung nach einem der Ansprüche 1 bis 6, wobei die Kammern als eine kreisförmige, geometrische Ausgestaltung ausgebildet sind.
10. Verpackung nach einem der Ansprüche 1 bis 6, wobei die Kammern als eine pyramidenförmig, geometrische Ausgestaltung ausgebildet sind, und jede Vorderseite der Pyramide als eine Kammer ausgebildet ist.
11. Verpackung nach einem oder mehreren der vorstehenden Ansprüche, wobei der Verpackung ein Traggriff zugeordnet ist.

Revendications

1. Emballage unitaire (1) multicompartiments pour recevoir une diversité de produits alimentaires comportant deux ou plusieurs compartiments (2), voisins, emballage **caractérisé en ce que** chaque compartiment est une poche formée d'un film de matière plastique perméable aux gaz et/ou à la vapeur et chacun des compartiments a une perméabilité aux gaz adaptée au taux de respiration individuel du ou des produits alimentaires placés dans ce compartiment. 5 10
2. Emballage selon la revendication 1, dans lequel chaque compartiment fait corps avec un ou plusieurs compartiments voisins. 15
3. Emballage selon la revendication 1, dans lequel les compartiments sont réalisés séparément et sont assemblés pour constituer l'ensemble des compartiments. 20 25
4. Emballage selon l'une des revendications précédentes, dans lequel certains compartiments adjacents ou tous les compartiments adjacents, ont une barrière commune. 30
5. Emballage selon la revendication 4, dans lequel la barrière commune est perméable aux gaz et/ ou à la vapeur. 35
6. Emballage selon l'une des revendications précédentes, dans lequel les compartiments peuvent être séparés l'un de l'autre ou les uns des autres. 40
7. Emballage selon l'une des revendications précédentes, dans lequel les compartiments ont une forme géométrique rectiligne. 45
8. Emballage selon l'une des revendications 1 à 6, dans lequel les compartiments ont une forme géométrique curviligne. 50
9. Emballage selon l'une des revendications 1 à 6, dans lequel les compartiments ont une forme géométrique circulaire, chaque compartiment ayant la forme d'un secteur. 55
10. Emballage selon l'une des revendications 1 à 6, dans lequel les compartiments ont une forme géométrique pyramidale et chaque face de la pyramide, est formée comme compartiment.
11. Emballage selon l'une des revendications précédentes, comportant une poignée (4) pour le transport.

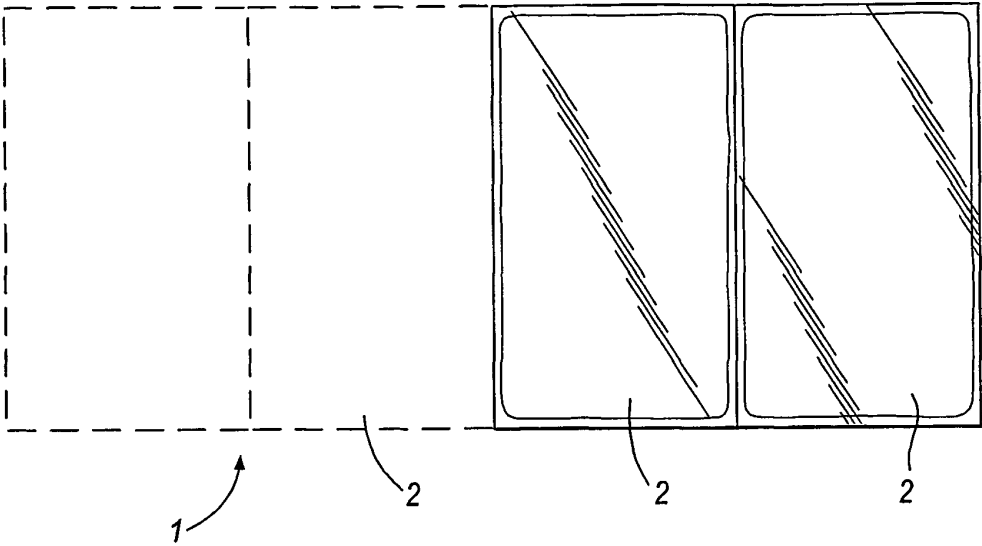


Fig. 1

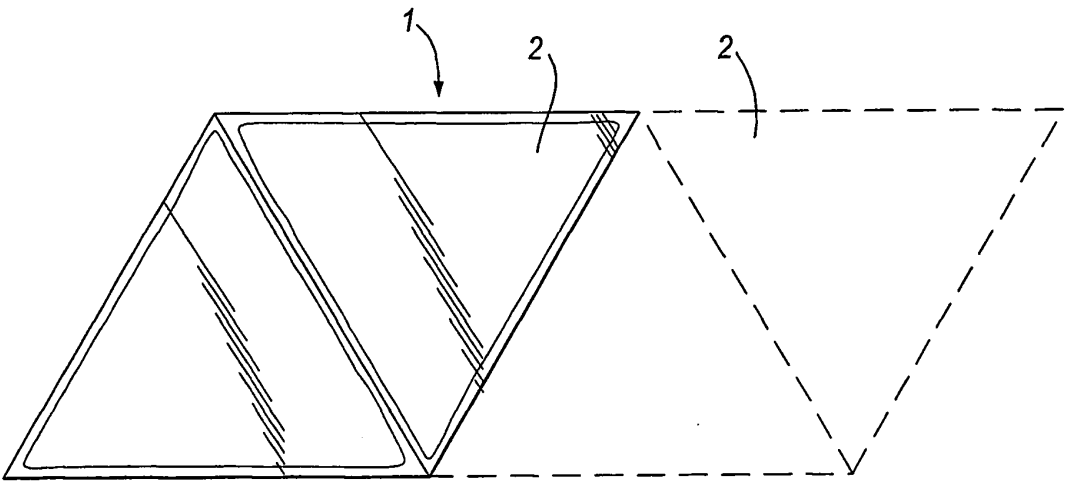


Fig. 2

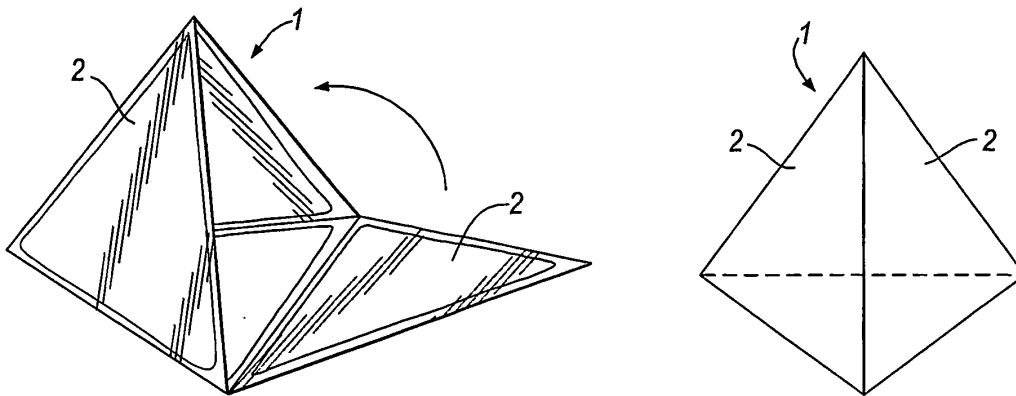


Fig.3

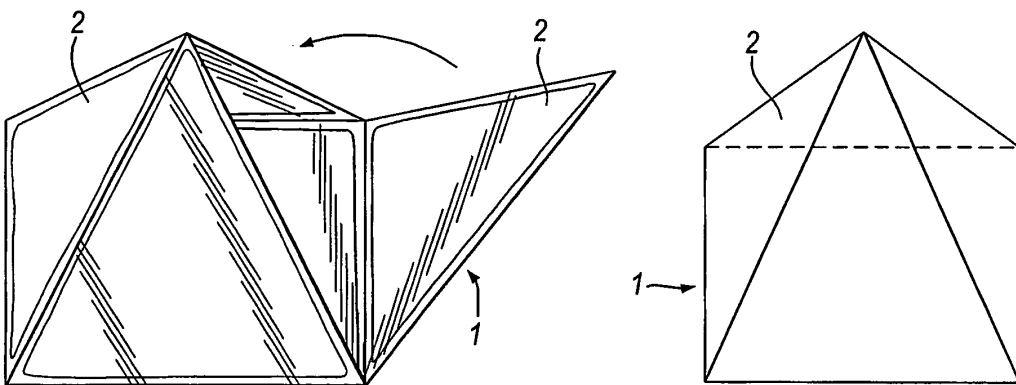


Fig.4

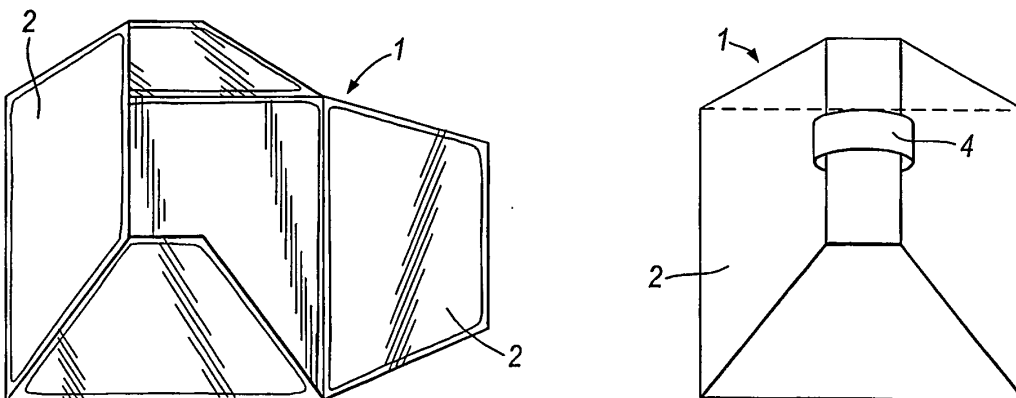


Fig.5

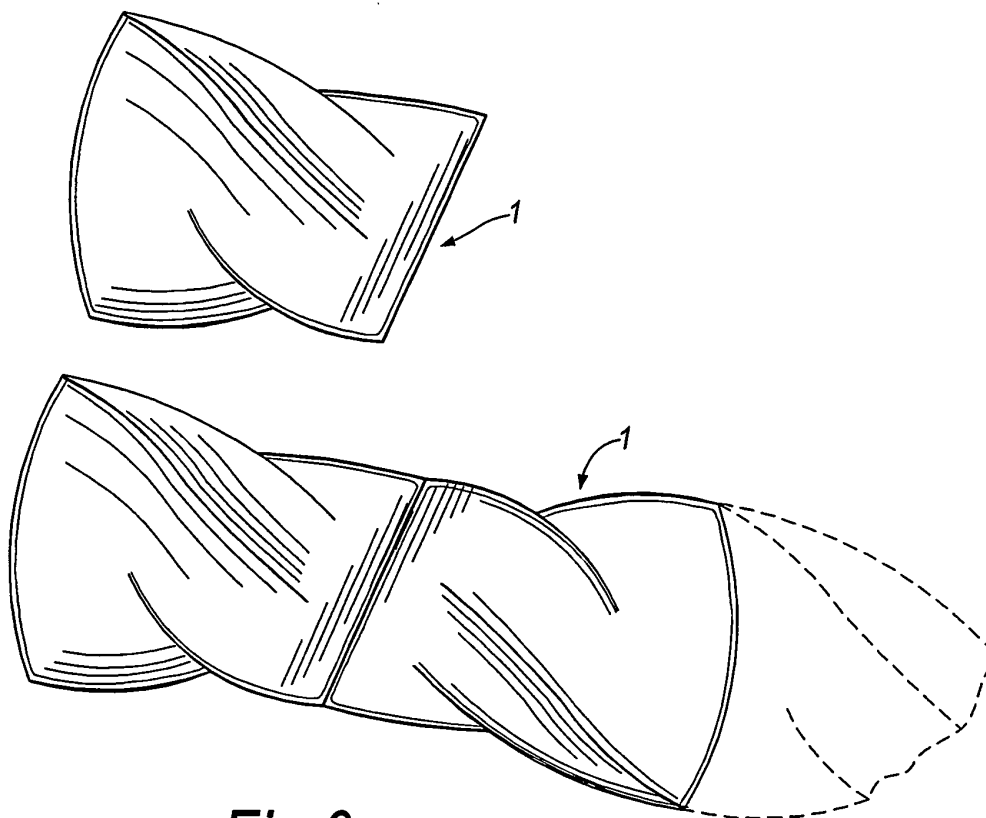


Fig. 6

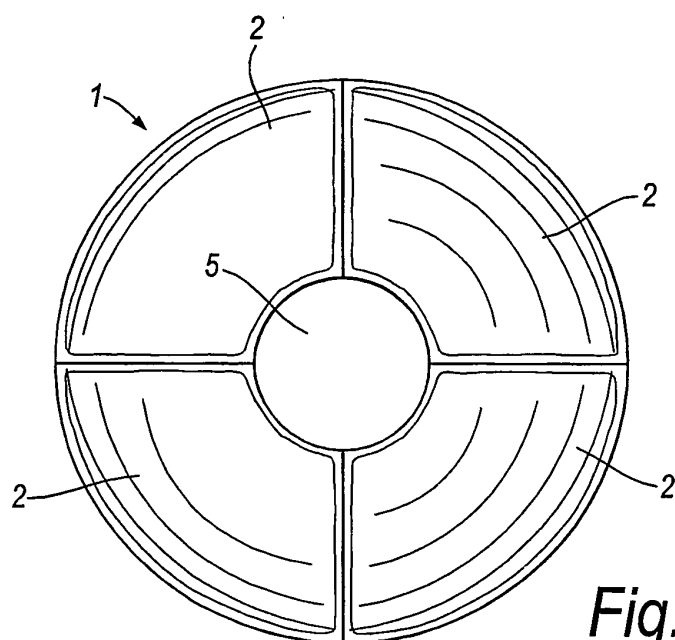


Fig. 7

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 4996071 A, Bell [0004]
- US 6013293 A, De Moor [0004]