

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 111 032 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

27.06.2001 Bulletin 2001/26

(51) Int Cl.7: **C11D 3/395**, C11D 3/43,

C11D 3/02, D06L 3/02,

D06L 3/06, D06L 3/08

(21) Application number: **00204345.3**

(22) Date of filing: **05.12.2000**

(84) Designated Contracting States:

**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR**

Designated Extension States:

AL LT LV MK RO SI

(30) Priority: **23.12.1999 EP 99204517**

(71) Applicants:

• **UNILEVER N.V.**

3013 AL Rotterdam (NL)

Designated Contracting States:

BE CH DE DK ES FI FR GR IT LI NL PT SE AT

• **UNILEVER PLC**

London EC4P 4BQ (GB)

Designated Contracting States:

GB IE

(72) Inventors:

• **Bijl, Dirk Johannes**

3133 AT Vlaardingen (NL)

• **Hage, Ronald**

3133 AT Vlaardingen (NL)

• **Kevelam, Jan**

3133 AT Vlaardingen (NL)

• **Koek, Jean Hypolites**

3133 AT Vlaardingen (NL)

• **Smit, Irene Erica**

3133 AT Vlaardingen (NL)

• **Verhagen, Johannes Jacob**

3133 AT Vlaardingen (NL)

• **Van der Vlist, Pieter**

3133 AT Vlaardingen (NL)

• **Murphy, Dennis Stephen**

Edgewater, New Jersey 07020 (US)

(74) Representative: **Kan, Jacob Hendrik, Dr. et al**

Unilever N.V.

Patent Division

P.O. Box 137

3130 AC Vlaardingen (NL)

(54) **Bleaching composition**

(57) A bleaching composition is provided comprising

e) an effective dry cleaning amount of densified carbon dioxide,

a) a bleach-effective amount of an inorganic bleaching agent;

b) a bleach-compatible solvent

c) 0 to 10 wt% of a surfactant;

d) less than 10 wt% of a modifier; and

said composition being essentially free of organic peracid or precursor thereof.

EP 1 111 032 A1

DescriptionField of the invention

[0001] The present invention relates to the field of bleaching compositions to remove stains from articles, in particular textile articles. In addition the present invention relates to a method of preparing a bleaching composition and method to bleach articles.

Background of the invention

[0002] It is often problematic to remove certain stains when cleaning articles having either hard or soft surfaces such as metal, ceramic, plastic or textile articles. It is known in the art to use bleach components to remove these stains. More recently, cleaning with carbon dioxide has been described. Dense phase carbon dioxide has been suggested as an alternative to perchloroethylene for health and environmental reasons. For example, a dry cleaning system in which chilled liquid carbon dioxide is used to extract soils from fabrics is described in US-A-4 012 194. However, it has been recognised that additives are needed to boost the cleaning by this medium. For example, the use of ethoxylated tertiary acetylenic alcohol and diol surfactants for boosting the cleaning performance from condensed phase carbon dioxide are taught in US-A-5 789 505. US-A-5 431 843 discloses a perhydrolysis system for use in condensed fluid medium for bleaching of stained garments. This perhydrolysis system comprises two essential components: hydrogen peroxide and an organic peracid precursor. The examples seem to indicate that a combination of hydrogen peroxide and non-anoyloxyglycoylphenyl sulfonate (NOGPS) results in a better overall stain removal when compared to hydrogen peroxide alone. To obtain these results, the bleaching process takes place for at least 1 hour. US-A-5 676 705 describes the use of organic peracid precursor in a dry cleaning process using carbon dioxide. Herein, both the preformed peracids and the directly added organic peracid precursor should be soluble in densified carbon dioxide.

[0003] The use of inorganic bleaching agents for removal of soil from garments in aqueous systems has been known for a long time. US-A-3 332 882 teaches the use of bleaches in combination with triazine activators. US-A-4 300 897 teaches a method of bleaching using peroxomonosulfate-based compositions. WO-A-9923197 teaches a process of soaking fabrics with a liquid aqueous persulfate salt-containing composition. And, WO-A-9921950 teaches the use of peroxonitrite based bleaching systems. However neither of these documents discloses or suggests to the skilled person that inorganic bleaching agent could be effective in a bleaching method wherein the medium is mainly carbon dioxide. US-A-5 431 843 only exemplifies the use of liquid hydrogen peroxide in combination with an organic peracid precursor. For bleaching in carbon dioxide, perborate, percarbonate or persulfate are mentioned as possible sources of peroxygen but only in combination with an organic peracid precursor. There is no disclosure or suggestion for the skilled person that an inorganic bleaching agent alone would have an effective bleaching effect.

[0004] Although organic peracids and/or precursor systems are generally effective they still exhibit several disadvantages. For example, these organic compounds are moderately sophisticated molecules requiring multi-step manufacturing processes resulting in high capital costs. Also, these precursor systems have large formulation space requirements as they also need addition of hydrogen peroxide and/or a hydrogen peroxide delivery system. Consequently, a significant proportion of the cleaning formulation must be devoted to the bleach components, leaving less room for other active ingredients and complicating the development of concentrated formulations. Moreover, organic precursor systems do not bleach very efficiently in situations wherein short bleach times are desired and processing environment is acidic or pH neutral.

[0005] Accordingly, it is an object of the invention to provide an alternative bleaching composition and method of bleaching which shows effective stain removal but does not display one or more of these drawbacks when applied in a bleaching process. One particular object of the invention is to provide a bleaching composition and a bleaching method which are economical and require short bleach times. Another object of the invention is to provide a bleaching composition and a method of bleaching which are particularly suitable for removing grass, tea and blackcurrant stains.

[0006] Surprisingly, we have now found that one or more of these objects can be achieved by the inventive bleaching composition and method of bleaching which are substantially free of organic peracid and precursors thereof and still show a remarkably effective stain removal.

Definition of the invention

[0007] Accordingly, in a first aspect of the invention a bleaching composition is provided comprising

- a) a bleach-effective amount of an inorganic bleaching agent;
- b) a bleach-compatible solvent
- c) 0 to 10 wt% of a surfactant;

- d) less than 10 wt% of a modifier; and
- e) an effective dry cleaning amount of densified carbon dioxide,

said composition being essentially free of organic peracid or precursor thereof.

[0008] In a second aspect of the invention a method to prepare the inventive composition is provided, characterised in that said method comprises the steps of

- a) mixing the inorganic bleaching agent in a bleach-compatible solvent; and
- b) mixing the solvent and inorganic bleaching agent of step
- a) with the carbon dioxide.

[0009] In a third aspect of the invention a method to bleach articles is provided, comprising the following steps:

- a) mixing a bleach-effective amount of an inorganic bleaching agent in a bleach-compatible solvent, preferably an aqueous solvent; and
- b) contacting said article with a bleaching composition according the invention, said composition comprising the resulting mixture of step a).

[0010] Preferably, the inventive composition and method is suitable to bleach articles in less than 45 min.

Detailed description of the invention

[0011] The present invention is particularly advantageous for bleaching methods that require a short period of time. US-A-5 431 843 describes bleaching times of 1 hour for effective stain removal. Unexpectedly we have now found that the present invention provides effective bleaching in 45 minutes or less. Another advantage of the present invention is the simplicity. Without wishing to be bound by any theory it is believed that precursors only at high pH can form organic peracids effectively by perhydrolysis of the precursor. Since carbon dioxide has a low pH, special measures have to be taken to ensure the formation of relatively unstable peracids in a separate premix process.

Furthermore, it is believed that the low temperatures used in carbon dioxide cleaning will also slow this reaction.

Yet another advantage of the present invention is that it is remarkably effective on a variety of stains, especially grass, tea and black currant stains.

The present invention is especially suitable to bleach and clean garments but may also be employed to bleach articles with hard surfaces.

[0012] For purposes of the invention, the following definitions are used:

"The bleaching composition" describes the total of the liquid carbon dioxide, the inorganic bleaching agent, the modifier if present and optionally other additives.

"Additives" are compounds to enhance the cleaning effect of the bleaching composition such as surfactants, whiteners, softeners, enzymes, perfume and antistat. "Liquid carbon dioxide" means carbon dioxide which has a temperature of about 30°C or less.

"Supercritical fluid carbon dioxide" means carbon dioxide which is at or above the critical temperature of 31°C and the critical pressure of 7.2 Mpa (71 atmospheres) and which cannot be condensed into a liquid phase despite the addition of further pressure.

The term "densified carbon dioxide" encompasses both liquid and supercritical fluid carbon dioxide.

[0013] The composition used in the inventive bleaching method should be essentially free of organic peracid and precursor thereof. For this purpose "essentially free" means that if present, these (trace) amounts of organic peracid or precursor should be so low that these compounds do not significantly contribute to the bleaching effect compared to an identical bleaching composition free of said compounds. Preferably these trace amounts should contribute less than 25%, more preferably less than 10% even more preferably less than 5% to the bleaching effect. For this test a grass stained test cloth, CS-8 (ex CFT) may be used. Generally, this will mean that less than 100 ppm, more preferably less than 10 ppm and most preferably less than 1 ppm of organic peracid and precursor thereof is present in the bleaching composition used in the present invention.

Bleaching composition

[0014] The bleaching composition is defined as the composition wherein the actual bleaching occurs analogous to a wash liquor. In practice this bleaching composition may be prepared by adding a bleaching product to the carbon

dioxide analogous to adding a detergent product to the wash liquor.

Inorganic bleaching agent

[0015] For the present purpose, organic peracid and precursors thereof are defined as compounds consisting from at least one carbon atom, excluding (per)hydrates of carbon dioxide and metal salts thereof. Inorganic bleaching agent is defined as a bleaching agent being not an organic peracid or precursor thereof. For the present purpose hydrogen peroxide per se is not an inorganic bleaching agent. Preferably the inorganic bleaching agent used in the present invention is selected from the group including peroxosulfates, peroxocarbonates, peroxoborates, peroxophosphates, peroxosilicates, chlorites, hypochlorites, peroxonitrites, and Na_2O_2 , ZnO_2 , KO_2 , CaO_2 and mixtures thereof. More preferably the inorganic bleaching agent is selected from the group including peroxosulfates, peroxophosphates, peroxonitrites, chlorites, hypochlorites and mixtures thereof. Preferred salts of these inorganic bleaching agents comprise positive ions including alkali metal and earth alkali metal ions. Even more preferably the inorganic bleaching agent is selected from the group including peroxosulfates, peroxonitrites, chlorites, hypochlorites and mixtures thereof. Particularly preferred inorganic bleaching agents include alkali metal salts and alkali-earth metal salts of peroxomonosulfate, peroxonitrite, hypochlorite, chlorite and mixtures thereof.

[0016] According to the invention a bleach-effective amount of an inorganic bleaching agent is dispersed or dissolved into water. The exact amount will depend on the volume of carbon dioxide, number of articles and nature and quantity of stains. The skilled person will be able to determine the bleach-effective amount without undue burden. Preferably, the inorganic bleaching agent is present in the bleaching composition from 0.01 to 50 mM, more preferably, from 0.05 to 20 mM and even more preferably from 0.1 to 10 mM.

[0017] For the present purpose the bleaching agent may have any form known in the art. The form (e.g., crystal, powder, granulate) will depend on the required stability, processing and dissolution required. Preferred forms are those that easily dissolve or disperse in the bleach-compatible solvent. One preferred form is a particulate form wherein a particle size is chosen to obtain a good compromise between storage stability and convenient dissolution characteristics. Some inorganic bleaching agents such as sodium hypochlorite are commercially available as solutions and may also be used in the present invention.

[0018] One of the most preferred inorganic bleaching agents for the present invention is peroxosulfate, especially peroxomonosulfate.

Suitable peroxosulfate salts include any alkali metal peroxosulfate salt including sodium peroxosulfate salts and/or potassium peroxosulfate salts. Preferred peroxosulfate salt to be used herein is the monopersulfate salt. One of the most preferred inorganic bleaching agents for the present invention is a water soluble peroxomonosulfate, normally an alkali metal peroxomonosulfate, such as potassium or sodium peroxomonosulfate. Potassium peroxomonosulfate, KHSO_5 , is available as the mixed salt $2\text{KHSO}_5 \cdot \text{KHSO}_4 \cdot \text{K}_2\text{SO}_4$, sold by E. I. DuPont de Nemours and Company, Inc. under the trademark Oxone™. That product has an active oxygen content of about 4.5%. The active oxygen content of the mixed salt described is about 5.2% when the salt is pure and the corresponding active oxygen content of KHSO_5 is about 10.5%.

[0019] Thus, the pure mixed salt has half as much active oxygen in it as has the pure peroxomonosulfate and the 86.5% pure mixed salt (Oxone™) has 43% as much. In this specification when peroxomonosulfate is mentioned the single salt is intended, with its higher active oxygen content, but an equivalent proportion of the triple salt, such as that sold under the trademark Oxone, will normally be employed as the source of the active bleaching compound because of its ready availability, stability and desirable physical characteristics. Potassium peroxomonosulfate may also be named as potassium monopersulfate and its triple salt may also be considered to be a monopersulfate compound within the context of this invention.

[0020] Examples of monopersulfate salts commercially available are those commercialised by Interlox under the trade name Curox™, by Degussa under the trade name Caroat™ or by DuPont under the trade name Oxone™. It is to be understood herein that when the commercially available Curox™, Caroat™ and/or Oxone™ are used, the % weights or molar amounts of peroxosulfate salts mentioned herein, refer to the total weight of said Curox™, Caroat™ and/or Oxone™.

[0021] The active concentration is approximately 1/2 of the total weight. Other peroxosulfate salts such as dipersulfate salts commercially available among others from Peroxide Chemie GmbH can be used in the compositions according to the present invention. Another suitable persulfate salt is ammonium persulfate.

Surfactants

[0022] Preferably, the bleach composition according to the invention comprises a surfactant. Any surfactant known to the person skilled in the art may be used. Surfactants are described in US-A-5,789,505, US-A-5,683,977, US-A-5,683,473, US-A-5,858,022 and WO 96/27704. Especially preferred are the surfactants described in WO 96/27704

(formula's I-IV).


[0023] With regard to the surfactants the following definitions will be used for the present invention. The term "densified carbon dioxide-philic" in reference to surfactants R_nZ_m wherein n and m are each independently 1 to 50, means that the functional group, R_n - is soluble in carbon dioxide at pressures of from 101 kPa to 68.9 MPa and temperatures of from -78.5 to 100°C to greater than 10 weight percent. Preferably n and m are each independently 1-35. Such functional groups (R_n -) include halocarbons, polysiloxanes and branched polyalkylene oxides.

[0024] The term "densified carbon dioxide-phobic" in reference to surfactants, R_nZ_m , means that Z_m - will have a solubility in carbon dioxide of less than 10 weight percent at pressures of from 101 kPa to 68.9 MPa and temperatures of from -78.5 to 100°C. The functional groups in Z_m - include carboxylic acids, phosphatyl esters, hydroxyls, C_{1-30} alkyls or alkenyls, polyalkylene oxides, branched polyalkylene oxides, carboxylates, C_{1-30} alkyl sulfonates, phosphates, glycerates, carbohydrates, nitrates, substituted or unsubstituted aryls and sulfates.

[0025] The hydrocarbon and halocarbon containing surfactants (i.e., R_nZ_m , containing the CO_2 -philic functional group, R_n -, and the CO_2 -phobic group, Z_m -) may have an HLB of less than 15, preferably less than 13 and most preferably less than 12.

[0026] The polymeric siloxane containing surfactants, R_nZ_m , also designated $MD_xD_y^*M$, with M representing trimethylsiloxyl end groups, D_x as a dimethylsiloxyl backbone (CO_2 -philic functional group) and D_y^* as one or more substituted methylsiloxyl groups substituted with CO_2 -phobic R or R' groups preferably have a $D_xD_y^*$ ratio of greater than 0.5:1, preferably greater than 0.7:1 and most preferably greater than 1:1.

[0027] A "substituted methylsiloxyl group" is a methylsiloxyl group substituted with a CO_2 -phobic group R or R'. R or R' are each represented in the following formula:



wherein a is 1-30, b is 0-1, C_6H_4 is substituted or unsubstituted with a C_{1-10} alkyl or alkenyl and A, d, L, e, A', F, n L', g, Z, G and h are defined below, and mixtures of R and R'. A "substituted aryl" is an aryl substituted with a C_{1-30} alkyl, alkenyl or hydroxyl, preferably a C_{1-20} alkyl or alkenyl.

[0028] A "substituted carbohydrate" is a carbohydrate substituted with a C_{1-10} alkyl or alkenyl, preferably a C_{1-5} alkyl. The terms "polyalkylene oxide", "alkyl" and "alkenyl" each contain a carbon chain which may be either straight or branched unless otherwise stated.

[0029] A preferred surfactant which is effective for use in a carbon dioxide bleach composition requires the combination of densified carbon dioxide-philic functional groups with densified carbon dioxide-phobic functional groups (see definitions above). The resulting compound may form reversed micelles with the CO_2 -philic functional groups extending into a continuous phase and the CO_2 -phobic functional groups directed toward the centre of the micelle.

[0030] The surfactant is preferably present in an amount of less than 10 wt% or more preferably of from 0.001 to 10 wt%, preferably 0.01 to 5 wt%. An especially preferred range is from about 0.03% to about 1 wt%.

[0031] If present, the CO_2 -philic moieties of the surfactants are preferably groups exhibiting low Hildebrand solubility parameters, as described in Grant, D. J. W. et al. "Solubility Behavior of Organic Compounds", Techniques of Chemistry Series, J. Wiley & Sons, NY (1990) pp. 46-55 which describes the Hildebrand solubility equation, herein incorporated by reference. These CO_2 -philic moieties also exhibit low polarisability and some electron donating capability allowing them to be solubilised easily in densified fluid carbon dioxide.

[0032] As defined above the CO_2 -philic functional groups are soluble in densified carbon dioxide to greater than 10 weight percent, preferably greater than 15 weight percent, at pressures of from 101 kPa to 68.9 MPa and temperatures of from -78.5 to 100°C.

Preferred densified CO_2 -philic functional groups include halocarbons (such as fluoro-, chloro- and fluoro- chlorocarbons), polysiloxanes and branched polyalkylene oxides.

[0033] The CO_2 -phobic portion of the surfactant molecule is obtained either by a hydrophilic or a hydrophobic functional group which is less than 10 weight percent soluble in densified CO_2 , preferably less than 5 wt. %, at a pressures of from 101 kPa to 68.9 MPa and temperatures of from -78.5 to 100°C. Examples of moieties contained in the CO_2 -phobic groups include polyalkylene oxides, carboxylates, branched acrylate esters, C_{1-30} hydrocarbons, aryls which are unsubstituted or substituted, sulfonates, glycerates, phosphates, sulfates and carbohydrates. Especially preferred CO_2 -phobic groups include C_{2-20} straight chain or branched alkyls, polyalkylene oxides, glycerates, carboxylates, phosphates, sulfates and carbohydrates.

[0034] Preferred surfactants comprise CO_2 -philic and CO_2 -phobic groups. The CO_2 -philic and CO_2 -phobic groups are preferably directly connected or linked together via a linkage group.


[0035] Such groups preferably include ester, keto, ether, amide, amine, thio, alkyl, alkenyl, fluoroalkyl, fluoroalkenyl and mixtures thereof.

[0036] A preferred surfactant is:

$R_n Z_m$ wherein R_n - is a densified CO_2 -philic functional group, R is a halocarbon, a polysiloxane, or a branched polyalkylene oxide and n is 1-50, and Z_m - is a densified CO_2 -phobic functional group, and m is 1-50 and at pressures of 101 kPa to 68.9 MPa and temperatures of from -78.5 to 100°C, the R_n - group is soluble in the densified carbon dioxide to greater than 10 wt. percent and the Z_m - group is soluble in the densified carbon dioxide to less than 10 wt. percent.

[0037] Preferably, when R of the surfactant is the halocarbon or the branched polyalkylene oxide, then the surfactant has an HLB value of less than 15. In other cases it may be preferred that when R is the polysiloxane, then the surfactant has a ratio of dimethyl siloxyl to substituted methyl siloxy groups of greater than 0.5:1.

[0038] Surfactants which are useful in the invention may be selected from four groups of compounds (formula I-IV). The first group of compounds has the following formula:



wherein X is F, Cl, Br, I and mixtures thereof, preferably F and Cl;

a is 1 - 30, preferably 1-25, most preferably 5-20;

b is 0 - 5, preferably 0 - 3;

c is 1 - 5, preferably 1 - 3;

A and A' are each independently a linking moiety representing an ester, a keto, an ether, a thio, an amido, an amino, a C_{1-4} fluoroalkyl, a C_{1-4} fluoroalkenyl, a branched or straight chain polyalkylene oxide, a phosphato, a sulfonyl, a sulfate, an ammonium and mixtures thereof;

d is 0 or 1;

L and L' are each independently a C_{1-30} straight chained or branched alkyl or alkenyl or an aryl which is unsubstituted or substituted and mixtures thereof;

e is 0-3;

f is 0 or 1;

n is 0-10, preferably 0-5, most preferably 0-3;

g is 0-3;

o is 0-5, preferably 0-3;

Z is a hydrogen, a carboxylic acid, a hydroxy, a phosphato, a phosphato ester, a sulfonyl, a sulfonate, a sulfate, a branched or straight-chained polyalkylene oxide, a nitril, a glyceryl, an aryl unsubstituted or substituted with a C_{1-30} alkyl or alkenyl, (preferably C_{1-25} alkyl), a carbohydrate unsubstituted or substituted with a C_{1-10} alkyl or alkenyl (preferably a C_{1-5} alkyl) or an ammonium; G is an anion or cation such as H^+ , Na^+ , Li^+ , K^+ , NH_4^+ , Ca^{+2} , Mg^{+2} , Cl^- , Br^- , I^- , mesylate, or tosylate; and h is 0-3, preferably 0-2.

[0039] Preferred compounds within the scope of the formula I include those having linking moieties A and A' which are each independently an ester, an ether, a thio, a polyalkylene oxide, an amido, an ammonium and mixtures thereof;

L and L' are each independently a C_{1-25} straight chain or branched alkyl or unsubstituted aryl; and Z is a hydrogen, carboxylic acid, hydroxyl, a phosphato, a sulfonyl, a sulfate, an ammonium, a polyalkylene oxide, or a carbohydrate, preferably unsubstituted. G groups which are preferred include H^+ , Li^+ , Na^+ , NH_4^+ , Cl^- , Br^- and tosylate.


[0040] Most preferred compounds within the scope of formula I include those compounds wherein A and A' are each independently an ester, ether, an amido, a polyoxyalkylene oxide and mixtures thereof; L and L' are each independently a C_{1-20} straight chain or branched alkyl or an unsubstituted aryl; Z is a hydrogen, a phosphato, a sulfonyl, a carboxylic acid, a sulfate, a poly(alkylene oxide) and mixtures thereof; and

G is H^+ , Na^+ or NH_4^+ .

[0041] Compounds of formula I are prepared by any conventional preparation method known in the art such as the one described in March, J., "Advanced Organic Chemistry", J. Wiley & Sons, NY (1985).

[0042] Commercially available fluorinated compounds include compounds supplied as the Zonyl™ series by Dupont.

[0043] The second group of surfactants useful in the bleach composition are those compounds having a polyalkylene moiety and having a formula (II).



wherein R and R' each represent a hydrogen, a C₁₋₅ straight chained or branched alkyl or alkylene oxide and mixtures thereof;

i is 1 to 50, preferably 1 to 30, and


A, A', d, L, L', e, f, n, g, o, Z, G and h are as defined above.

[0044] Preferably R and R' are each independently a hydrogen, a C₁₋₃ alkyl, or alkylene oxide and mixtures thereof.

[0045] Most preferably R and R' are each independently a hydrogen, C₁₋₃ alkyl and mixtures thereof. Non-limiting examples of compounds within the scope of formula II are described in WO 96/27704 Compounds of formula II may be prepared as is known in the art and as described in March et al., *Supra*.

[0046] Examples of commercially available compounds of formula II may be obtained as the Pluronic series from BASF, Inc.

[0047] A third group of surfactants useful in the invention contain a fluorinated oxide moiety and the compounds have a formula:



wherein XO is a halogenated alkylene oxide having C₁₋₆ straight or branched halocarbons, preferably C₁₋₃,


r is 1-50, preferably 1-25, most preferably 5-20,

T is a straight chained or branched haloalkyl or haloaryl,

s is 0 to 5, preferably 0-3,

X, A, A', c, d, L, L', e, f, n, g, o, Z, G and h are as defined above.

[0048] Examples of commercially available compounds within the scope of formula III include those compounds supplied under the Krytox™ series by DuPont having a formula:

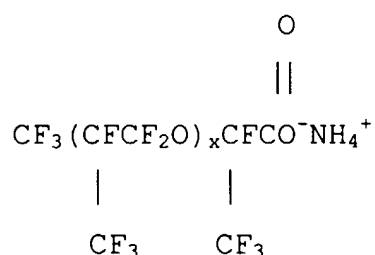

wherein x is 1-50.


[0049] Other compounds within the scope of formula III are made as known in the art and described in March et al., *Supra*.

[0050] The fourth group of surfactants useful in the invention include siloxanes containing surfactants of formula IV



wherein M is a trimethylsiloxyl end group, D_x is a dimethylsiloxyl backbone which is CO₂-philic and D_y^{*} is one or more methylsiloxyl groups which are substituted with a CO₂-phobic R or R' group,

wherein R and R' each independently have the following formula:



wherein a is 1-30, preferably 1-25, most preferably 1-20,

b is 0 or 1,

C₆H₄ is unsubstituted or substituted with a C₁₋₁₀ alkyl or alkenyl, and

A, A', d, L, e, f, n, L', g, Z, G and h are as defined above and mixtures of R and R' thereof.


[0051] The D_x:D_y ratio of the siloxane containing surfactants should be greater than 0.5:1, preferably greater than 0.7:1 and most preferably greater than 1:1.

[0052] The siloxane compounds should have a molecular weight ranging from 100 to 100,000, preferably 200 to 50,000, most preferably 500 to 35,000.

[0053] Silicones may be prepared by any conventional method such as the method described in Hardman, B. "Silicones" the Encyclopaedia of Polymer Science and Engineering, v. 15, 2nd Ed., J. Wiley and Sons, NY, NY (1989).


[0054] Examples of commercially available siloxane containing compounds which may be used in the invention are those supplied under the ABIL series by Goldschmidt.

[0055] Suitable siloxane compounds within the scope of formula IV are compounds of formula V:

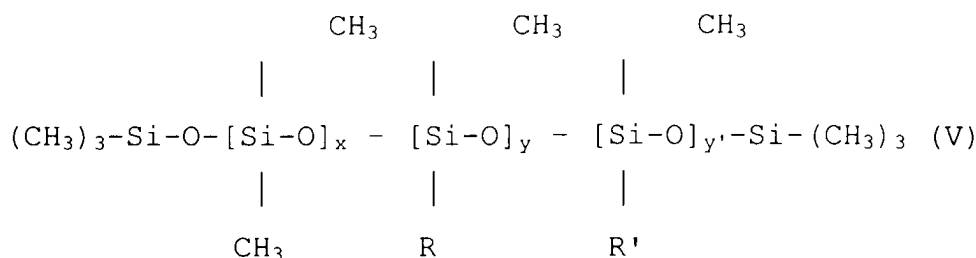

the ratio of x:y and y' is greater than 0.5:1, preferably greater than 0.7:1 and most preferably greater than 1:1, and R and R' are as defined above.

[0056] Preferred CO₂-phobic groups represented by R and R' include those moieties of the following formula:



wherein a is 1-20,

b is 0,

C₆H₄ is unsubstituted,

A, A', d, L, e, f, n, g, Z, G and h are as defined above, and mixtures of R and R'.

[0057] Particularly useful surfactants are selected from the group consisting of the classes of ethoxy modified polydimethylsiloxanes (e.g. Silwet™ surfactants from Witco), acetylenic glycol surfactants (from Air Products) and ethoxy/propoxy block copolymers (e.g. Pluronic™ surfactants from BASF) and mixtures thereof.

Bleach-compatible solvent

[0058] The inventive bleach composition also comprises a bleach-compatible solvent. The type of solvent will depend on the exact nature of the bleaching agent. If the bleaching agent is more or less hydrophobic then a hydrophobic fluid may be preferred. Alternatively if the organic substance is more or less hydrophilic, a hydrophilic fluid may be preferred. In many cases it will be preferable, to dissolve or to disperse bleaching agent in an aqueous solvent such as water. Preferred amounts of bleach-compatible solvent should be from 0.0001 to about 10 wt% (weight/weight of the carbon dioxide), more preferably 0.001 to about 5 wt%, even more preferably 0.01 to about 3 wt%, most preferably from about 0.05 to about 0.2 wt%. Preferred solvents include water, ethanol, acetone, hexane, methanol, glycols, acetonitrile, C₁₋₁₀ alcohols and C₅₋₁₅ hydrocarbons. Especially preferred solvents include water, ethanol and methanol.

Modifier

[0059] In addition to the bleach-compatible solvent, it may be desirable to include a modifier in the bleaching composition, such as water, or an organic solvent up to only about 10 wt% ,and additives to boost the bleaching and or cleaning performance such as enzymes up to about 10 wt%, surfactants, perfumes, and antistats. In a preferred embodiment, a modifier such as water, or a useful organic solvent may be added with the stained cloth in the cleaning drum in a small volume. Preferred amounts of modifier should be from 0.0 to about 10 wt% (weight/weight of the CO₂), more preferably 0.001 to about 5 wt%, even more preferably 0.01 to about 3 wt%, most preferably from about 0.05 to about 0.2 wt%. Preferred solvents include water, ethanol, acetone, hexane, methanol, glycols, acetonitrile, C₁₋₁₀ alcohols and C₅₋₁₅ hydrocarbons. Especially preferred solvents include water, ethanol and methanol. If the modifier is water, optionally 0.1 to 50% of an additional organic cosolvent may be present as described in US-A-5 858 022. In those circumstances it may be preferred to use surfactants as described in US-5 858 022 which do contain a CO₂ philic group.

Method of preparing the bleaching composition

[0060] The method to prepare the inventive composition is characterised in that said method comprises the steps of

- a) mixing the inorganic bleaching agent in a bleach-compatible solvent; and
- b) mixing the solvent and inorganic bleaching agent of step a) with the carbon dioxide.

[0061] The compatibility of the solvent will depend on the exact nature of the bleaching agent as indicated above. In many cases it will be preferable, to dissolve or to disperse the bleaching agent in an aqueous solvent. A particularly preferred solvent is water. Usually the best results are achieved when substantially most of the bleaching agent is dissolved although in some cases some of the bleaching agent may still be dispersed. In contrast to organic precursors such as TAED, we have found that inorganic bleaching agents as peroxomonosulphate dissolve very quickly in water. In many cases, it will be preferred to dissolve or disperse the bleaching agent immediately prior to the bleaching process because the dissolved bleach may not be stable. In those cases it may be preferred that the bleaching agent is mixed with the solvent for less than 5 min, more preferably less than 3 min, even more preferably less than 1 min immediately prior to mixing the bleaching agent with the carbon dioxide. However, some inorganic bleaches may be conveniently purchased as stable solutions for example, hypochlorite. It is to be understood that the use of such solutions of bleaching agents is also encompassed in the inventive method of preparing the bleaching composition. The advantage of the inorganic bleaching agent used in the present invention is that it usually dissolves rapidly without the need to adjust the pH. Preferably, the inorganic bleaching agent is mixed with pH neutral solvent such as water.

Method of Bleaching

[0062] The inventive bleaching method may be used in cleaning systems with carbon dioxide such as described in US-A-5 683 473, US-A-5 676 705, US-A-5 683 977, US-5 881 577, US-A-5 158 704, US-A-5 266 205, US-A-5 858 022 and the references cited therein. According the present invention an effective dry cleaning amount of densified carbon dioxide is used. The exact amount will depend on the volume of the vessel, pressure at which the dry cleaning is performed, number of articles and nature and quantity of stains. The skilled person will be able to determine effective dry cleaning amount of densified carbon dioxide without undue burden using the references above. Usually, the amount of carbon dioxide will correspond to a volume of from 0.1 and 500 litre, more preferably of from 0.2 to 100 litre at the operating pressure and temperature.

[0063] The bleaching method may be used to bleach and/or clean any suitable article. The items to be cleaned should be compatible with the carbon dioxide. Preferably, the items include garments and domestic articles with hard surfaces. The bleaching method is especially useful to clean textile articles with bleachable stains, in particular those with grass stains.

[0064] According the invention, the method to bleach articles is characterised in that said method comprises the following steps:

- a) mixing a bleach-effective amount of an inorganic bleaching agent in a bleach-compatible solvent, preferably an aqueous solvent; and
- b) contacting said article with a bleaching composition according the invention, said composition comprising the resulting mixture of step a).

[0065] Usually, the method of bleaching comprises loading a variety of soiled articles, preferably clothing, into a vessel (preferably a pressurisable vessel) and contacting the articles with the bleaching composition comprising the

inorganic bleaching agent. The bleaching composition minus the carbon dioxide may be contacted with the soiled articles before or together with the carbon dioxide. The carbon dioxide may be introduced into the cleaning vessel as described in US-A-5,683,473. Preferably, the carbon dioxide is introduced into the cleaning vessel which is then pressurised to a pressure in the range of about 0.1 to about 68.9 MPa and adjusted to a temperature range of from about -78.5°C up to about 100°C. Although it may not always be desirable, the bleaching method may be carried out in supercritical carbon dioxide where the temperature is between 31°C and 100°C, preferably between 31°C and 60°C. Often it is preferred that the carbon dioxide is in a liquid phase so the temperature is held at -78.5°C up to about 30°C. Preferably the pressure range is from 0.5 to 48 MPa, more preferably from 2.1 to 41 MPa. Preferably, the temperature range is from -56.2 to 25°C, more preferably from -25°C to 20°C. After the bleaching step, the articles may be rinsed by introducing fresh carbon dioxide into the vessel after removing the bleaching composition.

[0066] It is noted that other densified molecules having supercritical properties may also be employed alone or in mixture. These molecules include methane, ethane, propane, ammonia, butane, n-pentane, n-hexane, cyclohexane, n-heptane, ethylene, propylene, methanol, ethanol, isopropanol, benzene, toluene, p-xylene, sulfur dioxide, chlorotri-fluoromethane, xenon trichlorofluoromethane, perfluoropropane, chlorodifluoromethane, sulfur hexafluoride and nitrous oxide.

[0067] As described above, one of the advantages of the present invention is that very short bleaching times are needed to obtain good bleaching. Preferably, the articles are contacted with the bleaching composition for less than 45 min, more preferably less than 35 min, most preferably less than 25 min.

The inventive bleaching method may be used in densified carbon dioxide although in some case liquid carbon dioxide may be preferred.

[0068] Other than in the examples, or where otherwise indicated, all numbers expressing quantities of ingredients or reaction conditions used herein are to be understood as modified in all instances by the term "about". Similarly, all percentages are weight/weight percentages of the carbon dioxide unless otherwise indicated. Where the term "comprising" is used in the specification or claims, it is not intended to exclude any terms, steps or features not specifically recited.

[0069] The invention is more fully illustrated by the following non-limiting examples showing some preferred embodiments of the invention.

EXAMPLES

Example 1

[0070] Commercially available, bleach sensitive test cloths BC-1, CS-8 and CS-12 were dry cleaned using liquid carbon dioxide, hydrogen peroxide, inorganic bleaching agents and mixtures thereof according to the invention.

[0071] BC-1 is a tea stained test cloth; CS-8 is a grass stained test cloth; CS-12 is a black currant stained test cloth; all are made by CFT. Four 2" X 2" swatches of a given stain cloth were placed in a 600 ml autoclave having a gas compressor, an extraction system and a stirrer. The cloths were allowed to move freely in the autoclave. Good agitation was ensured by visual observation with an endoscope through a small sapphire window in the autoclave. After placing the cloths in the autoclave and sealing it, liquid CO₂ at a tank pressure of 5.86 Mpa was allowed into the system and was cooled to reach a temperature of about 12°C at which point the liquid CO₂ was at a pressure of about 5.52 MPa. The stirrer was then turned on for 15 minutes to mimic a wash cycle. At the completion of the wash cycle, 20 cubic feet of fresh CO₂ were passed through the system to mimic a rinse cycle. The pressure of the autoclave was then released to atmospheric pressure and the cleaned cloths were removed from the autoclave. Two runs were performed with each system tested. To measure the extent of cleaning, the cloths were placed in a Reflectometer supplied by Colorguard. The R scale, which measures the reflection of light at 460 nm, was used to determine stain removal. Cleaning results were reported as the percent stain removal according to the following calculation:

$$\% \text{ stain removal} = \frac{\text{stain removed}}{\text{stain applied}} = \frac{\text{cleaned cloth reading} - \text{stained cloth reading}}{\text{unstained cloth reading} - \text{stained cloth reading}} \times 100\%$$

Potassium peroxosulfate (Caroat™; MW = 615) was mixed in water wherein it dissolved in less than 1 min such that dosing 1 ml of stock solution into the autoclave yielded a 2mM w/v (weight/volume of liquid CO₂) concentration. For the hydrogen peroxide control, a concentration of 10mM was used and delivered from 30% active solution.

[0072] Bleaching results on the stained cloths are shown in Table 1 below.

Table 1

Bleach Results using Carcoat (Peroxosulfate Bleaching agent) at 2mM			
Bleach Composition	% Soil Removal		
	BC-1	CS-8	CS-12
CO ₂ alone	-3	1	0
CO ₂ + Hydrogen peroxide	26	13	33
CO ₂ + Carcoat	61	52	61

[0073] The results show that when the peroxosulfate salt is used, excellent bleaching results on these bleach sensitive cloth are obtained. The bleaching from the peroxosulfate salt at one-fifth the concentration is consistently better than that obtained with hydrogen peroxide. Similar results were obtained in a separate experiment where the wash cycle was only 5 min. The stain removal with the inorganic bleaching agent was considerably better compared to the results of a separate experiment wherein the combination of H₂O₂ and an organic peracid precursor was used.

Example 2

[0074] In Table 2 is shown a bleaching composition which is useful within the scope of this invention.

Table 2

Ingredient	Concentration
Carcoat	2mM
Silwet L-7602*	0.05% (w/v)
Water	0.1% (w/v)

* Silwet L-7602 is an organosilicone surfactant from Witco.

Example 3

[0075] In Table 3 is shown a bleaching composition which is useful within the scope of this invention.

Table 3

Ingredient	Concentration
Carcoat	2mM
Pluronic L-62*	0.05% (w/v)
Water	0.1% (w/v)

* Pluronic L-62 is an ethoxy/propoxy block copolymer from BASF.

Example 4

[0076] In Table 4 is shown a bleaching composition which is useful within the scope of this invention.

Table 4

Ingredient	Concentration
Carcoat	2mM
Surfynol 440*	0.05% (w/v)
Water	0.1% (w/v)

* Surfynol 440 is an ethoxy-modified tertiary acetylenic glycol surfactant from Air Products.

Example 5

[0077] In Table 5 is shown a bleaching composition which is useful within the scope of this invention.

Table 5

Ingredient	Concentration
Sodium peroxonitrite	2mM
Silwet L-7602*	0.05% (w/v)
Water	0.1% (w/v)

* Silwet L-7602 is an organosilicone surfactant from Witco.

Claims**1.** A bleaching composition comprising

- a) a bleach-effective amount of an inorganic bleaching agent;
- b) a bleach-compatible solvent
- c) 0 to 10 wt% of a surfactant;
- d) less than 10 wt% of a modifier; and
- e) an effective dry cleaning amount of densified carbon dioxide,

said composition being essentially free of organic peracid or precursor thereof.

2. A composition according to claim 1, characterised in that the bleaching agent is selected from the group including peroxosulfates, peroxocarbonates, peroxoborates, peroxophosphates, peroxosilicates, chlorites, hypochlorites, peroxonitrites, and Na_2O_2 , ZnO_2 , KO_2 , CaO_2 and mixtures thereof.**3.** A composition according to any preceding claim, characterised in that the bleaching agent is selected from the group including peroxosulfates, peroxophosphates, peroxonitrites, chlorites, hypo chlorites and mixtures thereof.**4.** A composition according to any preceding claim, characterised in that composition comprises from 0.01 mM to 50 mM, preferably from 0.05 to 20 mM of the bleaching agent.**5.** A composition according to any preceding claim, characterised in that the composition comprises from 0.001 to 10 wt% of a surfactant.**6.** A composition according to claim 5, characterised in that the surfactant is represented by a formula

wherein

R_n is a densified CO_2 -philic functional group, R is a halocarbon, a polysiloxane, or a branched polyalkylene oxide and n is 1-50;

Z_m - is a densified CO_2 -phobic functional group and m is 1-50; and

at pressures of 101 kPa to 68.9 MPa and temperatures of from -78.5 to 100°C, the R_n - group is soluble in the densified carbon dioxide to greater than 10 wt. percent and the Z_m - group is soluble in the densified carbon dioxide to less than 10 wt. percent.

7. A composition according to claim 5 or 6, characterised in that the surfactant is selected from surfactants whereof the CO_2 -philic and CO_2 -phobic groups are directly connected or linked together via a linkage group, said linkage group being selected from ester, keto, ether, amide, amine, thio, alkyl, alkenyl, fluoroalkyl, fluoroalkenyl and mixtures thereof.

8. A composition according to any of claims 5 to 7, characterised in that the surfactant is selected from the group consisting of ethoxy modified polydimethylsiloxanes, acetylenic glycol surfactants, ethoxy/propoxy block copolymers and mixtures thereof.

9. A composition according to any preceding claim, characterised in that the composition comprises 0.001 to about 5 wt% of a modifier.

10. Method to prepare the composition according to any preceding claim, characterised in that said method comprises the steps of

- a) mixing the inorganic bleaching agent in a bleach-compatible solvent; and
- b) mixing the solvent and inorganic bleaching agent of step a) with the carbon dioxide.

11. A method according claim 10 characterised in that the bleaching agent is mixed with the solvent for less than 5 min, more preferably less than 3 min, immediately prior to step b.

12. A method to bleach articles characterised in that said method comprises the following steps:

- a) mixing a bleach-effective amount of an inorganic bleaching agent in a bleach-compatible solvent, preferably an aqueous solvent; and
- b) contacting said article with a bleaching composition according any one of the preceding claims 1-9, said composition comprising the resulting mixture of step a).

13. A method according to claim 12 characterised in that the article is contacted with the composition for less than 45 min, more preferably for less than 35 min.

14. A method according to claims 12 and 13 wherein the articles are textile articles, preferably with grass stains.



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 20 4345

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
A	DE 39 06 735 A (DEUTSCHES TEXTILFORSCHZENTRUM) 6 September 1990 (1990-09-06) * page 3, line 54 - page 4, line 30; claims 1,4,5; example 1 *	1-5, 9, 10, 12-14	C11D3/395 C11D3/43 C11D3/02 D06L3/02 D06L3/06 D06L3/08
A	WO 98 23532 A (CLOROX CO) 4 June 1998 (1998-06-04) * page 7, line 1 - line 5 * * page 14, line 3 - page 16, line 27; claims 1,6,19-21 *	1-14	
D,A	US 5 431 843 A (ALVAREZ VINCENT E ET AL) 11 July 1995 (1995-07-11) * column 4, line 14 - line 28; claims 1,2,4,14 *	1-5, 9, 10, 12-14	
A	US 5 683 473 A (HARRIS ROSEMARIE ET AL) 4 November 1997 (1997-11-04) * claim 1 *	1,5-10, 12-14	
D,A	US 4 300 897 A (GRAY FREDERICK W) 17 November 1981 (1981-11-17) * abstract *	1-5, 10, 12-14	TECHNICAL FIELDS SEARCHED (Int.Cl.7) C11D D06L
The present search report has been drawn up for all claims			
Place of search		Date of completion of the search	Examiner
THE HAGUE		12 January 2001	Saunders, T
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPO FORM 1503 03/92 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 20 4345

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

12-01-2001

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
DE 3906735 A	06-09-1990	NONE	
WO 9823532 A	04-06-1998	US 5792218 A AU 5686998 A EP 0968130 A	11-08-1998 22-06-1998 05-01-2000
US 5431843 A	11-07-1995	AT 127546 T AU 662004 B AU 2107292 A CA 2070759 A DE 69204606 D DE 69204606 T EP 0530949 A ES 2078660 T JP 5239494 A US 5486212 A	15-09-1995 17-08-1995 11-03-1993 05-03-1993 12-10-1995 01-02-1996 10-03-1993 16-12-1995 17-09-1993 23-01-1996
US 5683473 A	04-11-1997	US 5676705 A AU 4942996 A CA 2211412 A WO 9627704 A EP 0813628 A FI 973603 A	14-10-1997 23-09-1996 12-09-1996 12-09-1996 29-12-1997 05-09-1997
US 4300897 A	17-11-1981	US 4028263 A US 4123376 A	07-06-1977 31-10-1978