



- (51) **International Patent Classification:**
G06F 17/30 (2006.01)
- (21) **International Application Number:**
PCT/US2012/039640
- (22) **International Filing Date:**
25 May 2012 (25.05.2012)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**
61/493,382 3 June 2011 (03.06.2011) US
13/424,100 19 March 2012 (19.03.2012) US
- (71) **Applicant (for all designated States except US):** **APPLE INC.** [US/US]; 1 Infinite Loop, Cupertino, CA 95014 (US).
- (72) **Inventors; and**
- (75) **Inventors/Applicants (for US only):** **ALSINA, Thomas, Matthieu** [FR/US]; 1 Infinite Loop, MS 302-1NS, Cupertino, CA 95014 (US). **MASON, Henry, Graham** [US/US]; 1 Infinite Loop, MS 302-1NS, Cupertino, CA 95014 (US).
- (74) **Agents:** **RACZKOWSKI, David B.** et al.; Fitzpatrick Townsend & Stockton LLP, Two Embarcadero Center, 8th Floor, San Francisco, California 94111-3834 (US).
- (81) **Designated States (unless otherwise indicated, for every kind of national protection available):** AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States (unless otherwise indicated, for every kind of regional protection available):** ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) **Title:** PARTIAL SORT ON A HOST

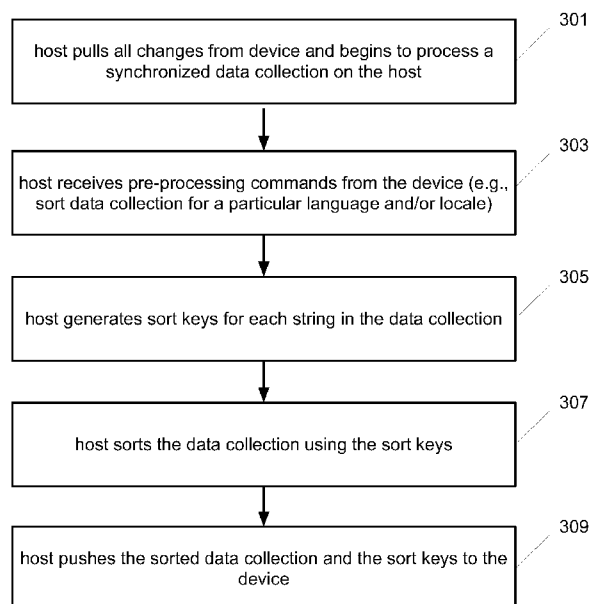


Fig. 3A

(57) **Abstract:** A host device transfers client data from a client device to the host device. The host device generates sort keys for host data that includes the client data. The host device sorts the host data using the sort keys and transfers the sorted host data to the client device. The client data and host data may include music, video, or other content.



Published:

— *with international search report (Art. 21(3))*

PARTIAL SORT ON A HOST

RELATED APPLICATIONS

This application claims priority to co-pending U.S. Provisional Patent Application No. 61/493,382, filed on June 3, 2011.

FIELD OF THE INVENTION

[0001] Embodiments of the invention are generally directed toward sorting file collections, and in particular, partially sorting a file collection on a host.

BACKGROUND

[0002] Many mobile devices available today are capable of playing music, video, and other content. This content is frequently synchronized with another data processing system, such as a desktop computer. In current embodiments, after the synchronized content is available on the mobile device, the device itself is responsible for sorting the content so it can be presented to the user. Sorting the large amounts of content that can be stored on today's mobile devices is expensive, in that the mobile device is generally locked and unusable by the user while the sorting occurs and expensive in that it consumes battery power. Generating sort keys for the content prior to performing the sort is especially expensive.

[0003] Figure 1 is a diagram illustrating a prior art system. At time t0, a device begins syncing with a host. At time t1, the sync is complete and the device has the synchronized content. The device then begins the process of sorting the synchronized data collection, which is complete at time t2. From t0 to t2, the content is unavailable to the user, either because it is being synchronized (t0 to t1) or being sorted by the device (t1 to t2). As noted above, this has a negative impact on the user experience, since the device is inaccessible to the user, and is expensive, because the sorting process consumes battery and generates heat.

SUMMARY

[0004] A host device transfers client data from a client device to the host device. The host device generates sort keys for host data that includes the client data. The host device sorts the host data using the sort keys and transfers the sorted host data to the client device. The client data and host data may include music, video, or other content. In one

embodiment, the roles, in a method performed as described herein, of the client and host can be interchangeable.

DESCRIPTION OF THE DRAWINGS

[0005] The present invention is illustrated by way of example and not limitation in the figures of the accompanying drawings in which like references indicate similar elements.

[0006] Figure 1 is a timing diagram illustrating a prior art system involving a device and a host;

[0007] Figure 2 is a timing diagram illustrating an embodiment of the invention;

[0008] Figure 3A is a flow chart illustrating a method of performing a partial sort on a host according to an embodiment of the invention;

[0009] Figure 3B is a flow chart illustrating a method of performing a background sort on a device according to an embodiment of the invention;

[0010] Figure 4 is a diagram illustrating a sort table according to an embodiment of the invention;

[0011] Figure 5 is a system diagram illustrating an embodiment of the invention;

[0012] Figure 6 is a diagram illustrating a data processing system that may be used with an embodiment of the invention; and

[0013] Figure 7 is a diagram illustrating a device that may be used with an embodiment of the invention.

DETAILED DESCRIPTION

[0014] Various embodiments and aspects of the inventions will be described with reference to details discussed below, and the accompanying drawings will illustrate the various embodiments. The following description and drawings are illustrative of the invention and are not to be construed as limiting the invention. Numerous specific details are described to provide a thorough understanding of various embodiments of the present invention. However, in certain instances, well-known or conventional details are not described in order to provide a concise discussion of embodiments of the present inventions.

[0015] Mobile devices (e.g., iPhone, etc.) are generally synchronized with at least one other data processing system such as a desktop computer. Content (e.g., music, video, etc.) is synchronized between the mobile device and the other system. In order to present this content to a user of the mobile device in a structured fashion, the content needs to be

sorted. This operation can be expensive in terms of processor and battery consumption, and generally requires that the mobile device be put in a state in which the mobile device (or the content) is unavailable to a user.

[0016] In one embodiment of the invention, a partial or complete sort of the synchronized content is performed on the host system and is transferred to the mobile device as part of the synchronization operation. In many cases, the host system is a desktop computer, which tend to be significantly more powerful than mobile devices and generally are not powered by an exhaustible (e.g., battery) power source. These characteristics make the host system more suitable to perform an expensive operation, such as a content sort. In one embodiment, the most expensive part of a content sort is generating sort keys prior to performing the sort itself. In this embodiment, the sort may be performed by the host or the device, while the host generates the sort keys.

[0017] Figure 2 is a timing diagram that illustrates performing a partial sort on a host according to an embodiment of the invention. At time t0, the device begins a sync operation with the host. As part of the sync operation executing from time t1 to time t2, the host sorts the synchronized data collection and creates sort keys for the data collection. Sorting and sort keys are described in greater detail below in conjunction with Figures 3A, 3B, and 4.

[0018] At time t2, the sync operation ends and the host sends the sorted data collection and the sort keys back to the device. At time t3, the device receives some or all of the sorted data collection. At this point, the device can be used by a user. In addition, the content in the data collection (e.g., songs) is available in a sorted fashion to the user (e.g., list by artist, song, etc.).

[0019] In one embodiment, the data collection or sort keys may require some modification by the device. For example, the device may use a different locale or language than the host. However, since the content is already sorted, the modifications can be performed in the background on the device, or even delayed until a more opportune time (e.g., the device is plugged in to A/C power; the device is locked and/or not being used).

[0020] In one embodiment, performing a partial sort by the host is coordinated by two methods: one on the host and one on the device. Figure 3A is a flow chart illustrating a host-side method of performing a partial sort according to an embodiment of the invention. The method illustrated in Figure 3A may be performed by a data processing system such as the one illustrated in Figure 6.

[0021] At block 301, the host-side method causes the host to pull changes from the device and to begin processing a synchronized data collection on the host. In other words, the host examines the changes from the device's data collection and the changes in the host's data collection and merges them into a synchronized data collection and resolves conflicts between the two data collections as is known in the art.

[0022] At block 303, the host-side method receives pre-processing commands from the device. For example, the device may request that the host perform a sort of the data collection according to a particular language or locale.

[0023] At block 305, the host-side method generates sort keys, which may be unique binary blobs assigned to each string present in the data collection. Strings may include artist name, song name, album name, etc. In one embodiment, the International Components for Unicode (ICU) system may be used to generate localized sort keys.

[0024] At block 307, the host-side method sorts the data collection using the sort keys as is known in the art. In one embodiment, the host-side method may also assign integer values to the sorted data collection to simplify importing new content (e.g., songs) into the data collection. Assigning integer values is described below in conjunction with Figure 4.

[0025] At block 309, the host-side method pushes the sorted data collection and the sort keys to the device. In one embodiment, this occurs at the end of a synchronization session between the host and the device.

[0026] Turning now to Figure 3B, in which a flow chart illustrates a device-side method for performing a partial sort on a host. The method illustrated in Figure 3B may be performed by a device such as the device illustrated in Figure 7.

[0027] At block 315, the device-side method receives a sorted data collection and a set of sort keys. These inputs may be received from the host-side method illustrated in Figure 3A.

[0028] At block 317, the device-side method uses the sorted data collection to present content to the user. For example, the user of a mobile device may request a sorted list of songs stored on the device. The list would be sorted according to the sorted data collection received at block 315. In this embodiment, the device becomes useable by the user after the synchronization session is complete. That is, rather than locking the device until the device can sort the synchronized data collection, the device is immediately usable by virtue of the sorted data collection. The user may play back content selected from the sorted data collection. In one embodiment, the device becomes usable before each item in the data collection has been received. In this embodiment, the user is notified

if a selected item has not been fully downloaded. The item may be prioritized for earlier download in response to the user selection.

[0029] At block 319, the device-side method determines whether to needs to re-create the sort keys received from the host or re-sort the data collection. In one embodiment, the device uses a language or locale unavailable to the host. For example, the device may use a first version of the International Components for Unicode and the host may use a different version. This may result in sort keys received from the host that differ from the sort keys that would be generated by the device for the same string. However, the overall order of the strings may change rarely.

[0030] At block 321, the device-side method re-creates sort keys and/or re-sorts the data collection. In one embodiment, these tasks are performed in a background process while the content is available to the user using the sorted data collection received at block 315. These tasks may also be delayed until the user is not using the device in order to reduce competition for processor and memory resources. The tasks may also be delayed until the device is connected to a non-battery power source to reduce battery drain.

[0031] In one embodiment, the sorted data collection is enhanced by adding an order number which is easier to sort and maintain than the sort keys, which can be quite large. In this embodiment, the host generates sort keys for the synchronized data collection sorts the data collection using the sort keys. The host then adds order numbers to each entry in the data collection. These order numbers are generated such that there are some number of integers available between each order number to facilitate subsequent importing of strings into the data collection. Order numbers and importation of strings is described in greater detail below in conjunction with Figures 4A and 4B.

[0032] Figure 4A illustrates a portion of a data collection at three time intervals. At time t_0 , the portion includes Bach, Brahm, and Chopin. Order numbers are assigned to the sorted collection in intervals of ten. At time t_1 , a new string "Beethoven" is to be added to the portion of the data collection. One example of a method for importing a string is described in Figure 4B. At time t_2 , the new string has been added in the appropriate location.

[0033] Figure 4B is a flow chart illustrating a method of importing a string into a data collection using order numbers described above and may be performed by the device illustrated in Figure 7. At block 415, the method finds the two strings between which the new string will fit. In Figure 4A, this would be between "Bach" and "Brahm."

[0034] At block 417, the method finds the midpoint of the order numbers of the two other strings, which in the case of Figure 4A would be 15.

[0035] At block 419, the method determines if an integer exists between the two order numbers, and assigns the integer to the new string and may generate a sort key for the string. In Figure 4A, an integer does exist (15) and is assigned to the new string.

[0036] At block 421, if the method determines that there is no integer between the two strings, both strings are removed and all three strings are re-inserted into the data collection. In one embodiment, the re-insert is performed recursively as is known in the art.

[0037] Figure 5 is a system diagram illustrating an embodiment of the invention. Device 501 is coupled to host 503 through some coupling means. For example, device 501 may communicate with host 503 through a wired means, such as a USB cable. As another example, device 501 may communicate with host 503 through wireless means, such as an implementation of IEEE 802.11. Device 501 may take the form of a mobile device, such as a smart phone (e.g., Apple iPhone), a tablet computer (e.g., Apple iPad), or another data processing system.

[0038] Figure 6 shows one example of a data processing system, which may be used with one embodiment the present invention. Note that while Figure 6 illustrates various components of a computer system, it is not intended to represent any particular architecture or manner of interconnecting the components as such details are not germane to the present invention. It will also be appreciated that network computers, tablet computers, and other data processing systems which have fewer components or perhaps more components may also be used with the present invention.

[0039] As shown in Figure 6, the computer system 600, which is a form of a data processing system, includes a bus 603 which is coupled to a microprocessor(s) 605 and a ROM (Read Only Memory) 607 and volatile RAM 609 and a non-volatile memory 611. The microprocessor 605 is coupled to cache 604. The microprocessor 605 may retrieve the instructions from the memories 607, 609, 611 and execute the instructions to perform operations described above. The bus 603 interconnects these various components together and also interconnects these components 605, 607, 609, and 611 to a display controller and display device 613 and to peripheral devices such as input/output (I/O) devices which may be mice, touch screens, touch pads, touch sensitive input devices, keyboards, modems, network interfaces, printers and other devices which are well known in the art. Typically, the input/output devices 615 are coupled to the system through input/output

controllers 617. The volatile RAM (Random Access Memory) 609 is typically implemented as dynamic RAM (DRAM) which requires power continually in order to refresh or maintain the data in the memory.

[0040] The mass storage 611 is typically a magnetic hard drive or a magnetic optical drive or an optical drive or a DVD RAM or a flash memory or other types of memory systems which maintain data (e.g., large amounts of data) even after power is removed from the system. Typically, the mass storage 611 will also be a random access memory although this is not required. Mass storage 611 may also take the form of flash memory or other solid-state storage. While Figure 6 shows that the mass storage 611 is a local device coupled directly to the rest of the components in the data processing system, it will be appreciated that the present invention may utilize a non-volatile memory which is remote from the system, such as a network storage device which is coupled to the data processing system through a network interface such as a modem, an Ethernet interface or a wireless network. The bus 603 may include one or more buses connected to each other through various bridges, controllers and/or adapters as is well known in the art.

[0041] Figure 7 shows an example of another data processing system which may be used with one embodiment of the present invention. The data processing system 700 shown in Figure 7 includes a processing system 711, which may be one or more microprocessors, or which may be a system on a chip integrated circuit, and the system also includes memory 701 for storing data and programs for execution by the processing system. The system 700 also includes an audio input/output subsystem 705 which may include a microphone and a speaker for, for example, playing back music or providing telephone functionality through the speaker and microphone.

[0042] A display controller and display device 707 provide a visual user interface for the user; this digital interface may include a graphical user interface which is similar to that shown on a Macintosh computer when running OS X operating system software. The system 700 also includes one or more wireless transceivers 703. A wireless transceiver may be a WiFi transceiver, an infrared transceiver, a Bluetooth transceiver, and/or a wireless cellular telephony transceiver. It will be appreciated that additional components, not shown, may also be part of the system 700 in certain embodiments, and in certain embodiments fewer components than shown in Figure 7 may also be used in a data processing system.

[0043] The data processing system 700 also includes one or more input devices 713 which are provided to allow a user to provide input to the system. These input devices

may be a keypad or a keyboard or a touch panel or a multi touch panel. The data processing system 700 also includes an optional input/output device 715 which may be a connector for a dock. It will be appreciated that one or more buses, not shown, may be used to interconnect the various components as is well known in the art. The data processing system shown in Figure 7 may be a handheld computer or a personal digital assistant (PDA), or a cellular telephone with PDA like functionality, or a handheld computer which includes a cellular telephone, or a media player, such as an iPod, or devices which combine aspects or functions of these devices, such as a media player combined with a PDA and a cellular telephone in one device. In other embodiments, the data processing system 700 may be a network computer or an embedded processing device within another device, or other types of data processing systems which have fewer components or perhaps more components than that shown in Figure 7.

[0044] In the foregoing specification, performing a partial sort of a data collection on a host has been described with reference to exemplary embodiments thereof. It will be evident that various modifications may be made thereto without departing from the broader spirit and scope of the invention as set forth in the following claims. The specification and drawings are, accordingly, to be regarded in an illustrative sense rather than a restrictive sense.

CLAIMS

What is claimed is:

1. A method comprising:
transferring, by a host device, client data to the host device;
generating, by the host device, sort keys for host data that includes the client data;
sorting, by the host device, the host data using the sort keys; and
transferring, by the host device, the sorted host data.
2. The method of claim 1, wherein the client data includes changes made to client data.
3. The method of claim 1, further comprising:
receiving, by the host device, pre-processing commands.
4. The method of claim 3, wherein sorting the host data is configured by the pre-processing commands.
5. A method comprising:
receiving, by a client device, a sorted data collection and a set of sort keys;
presenting content, by the client device, using the sorted data collection;
determining, by the client device, that the sorted data collection requires an update;
updating, by the client device, the sorted data collection in a background process while presenting the content using the received sorted data collection.
6. The method of claim 5, wherein updating the sorted data collection further comprises:
determining that the client device is in a preferred update state; and
updating the sorted data collection.
7. The method of claim 6, wherein the preferred update state occurs at least when the client device is connected to A/C power.
8. A non-transitory machine readable medium storing executable instructions which

when executed by a processor cause the processor to perform a method, the method comprising:

- transferring, by a host device, client data to the host device;
- generating, by the host device, sort keys for host data that includes the client data;
- sorting, by the host device, the host data using the sort keys; and
- transferring, by the host device, the sorted host data.

9. The non-transitory machine readable medium of claim 8, wherein the client data includes changes made to client data.

10. The non-transitory machine readable medium of claim 8, further comprising:
receiving, by the host device, pre-processing commands.

11. The non-transitory machine readable medium of claim 10, wherein sorting the host data is configured by the pre-processing commands.

12. A non-transitory machine readable medium storing executable instructions which when executed by a processor cause the processor to perform a method, the method comprising:


- receiving, by a client device, a sorted data collection and a set of sort keys;
- presenting content, by the client device, using the sorted data collection;
- determining, by the client device, that the sorted data collection requires an update;
- updating, by the client device, the sorted data collection in a background process while presenting the content using the received sorted data collection.

13. The non-transitory machine readable medium of claim 12, wherein updating the sorted data collection further comprises:

- determining that the client device is in a preferred update state; and
- updating the sorted data collection.

14. The non-transitory machine readable medium of claim 13, wherein the preferred update state occurs at least when the client device is connected to A/C power.

15. A data processing system comprising:
 - means for transferring, by a host device, client data to the host device;
 - means for generating, by the host device, sort keys for host data that includes the client data;
 - means for sorting, by the host device, the host data using the sort keys; and
 - means for transferring, by the host device, the sorted host data.
16. The data processing system of claim 15, wherein the client data includes changes made to client data.
17. The data processing system of claim 15, further comprising:
 - means for receiving, by the host device, pre-processing commands.
18. The data processing system of claim 17, wherein sorting the host data is configured by the pre-processing commands.
19. A data processing system comprising:
 - means for receiving, by a client device, a sorted data collection and a set of sort keys;
 - means for presenting content, by the client device, using the sorted data collection;
 - means for determining, by the client device, that the sorted data collection requires an update;
 - means for updating, by the client device, the sorted data collection in a background process while presenting the content using the received sorted data collection.
20. The data processing system of claim 19, wherein updating the sorted data collection further comprises:
 - means for determining that the client device is in a preferred update state; and
 - means for updating the sorted data collection.
21. The data processing system of claim 20, wherein the preferred update state occurs at least when the client device is connected to A/C power.

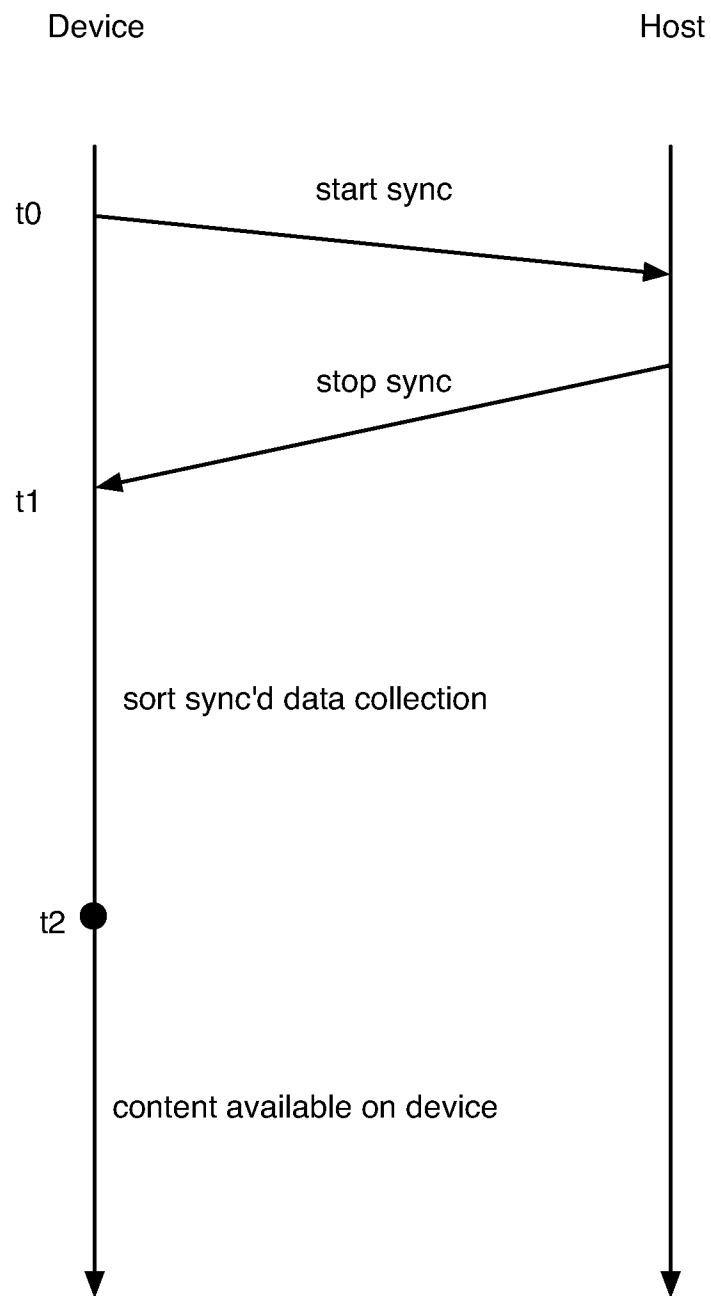

PRIOR ART

Fig. 1

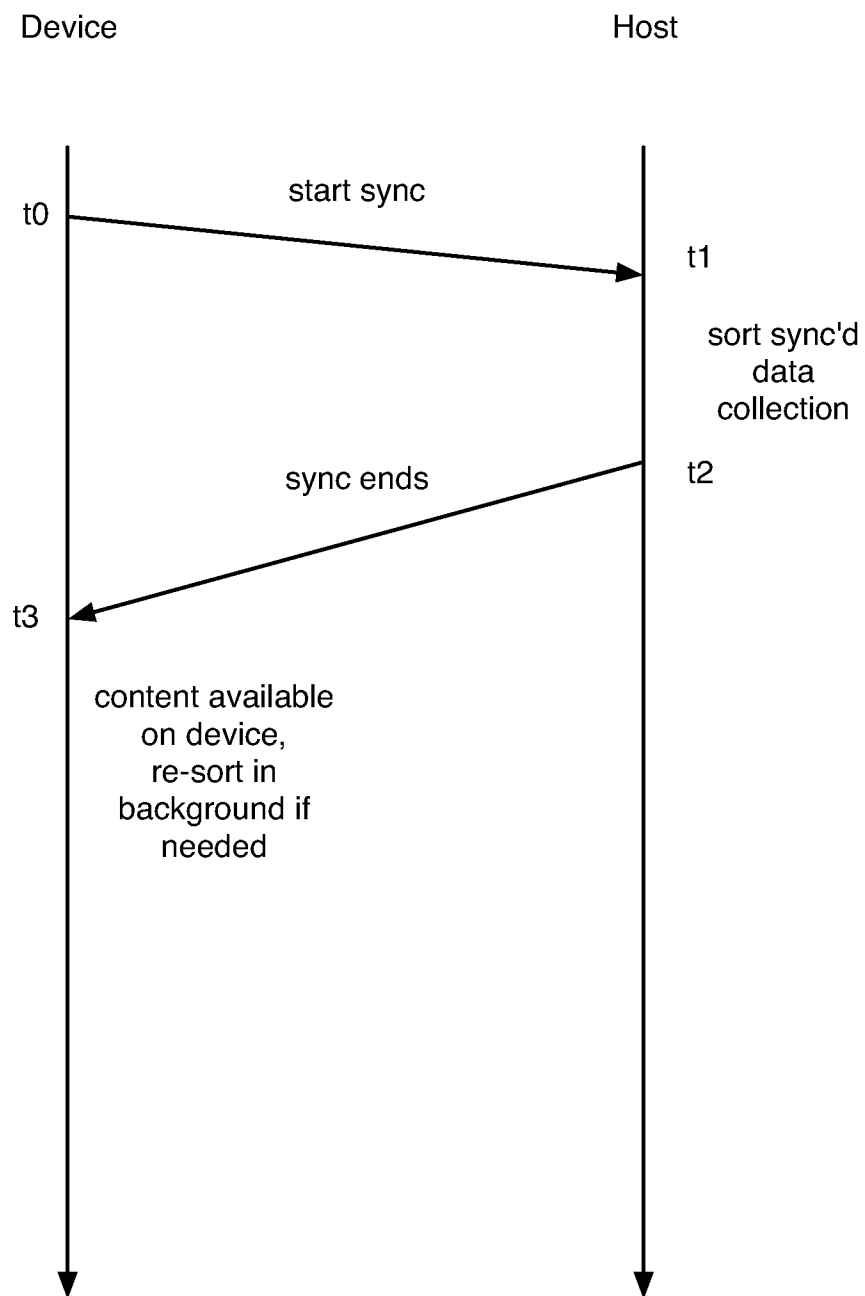


Fig. 2

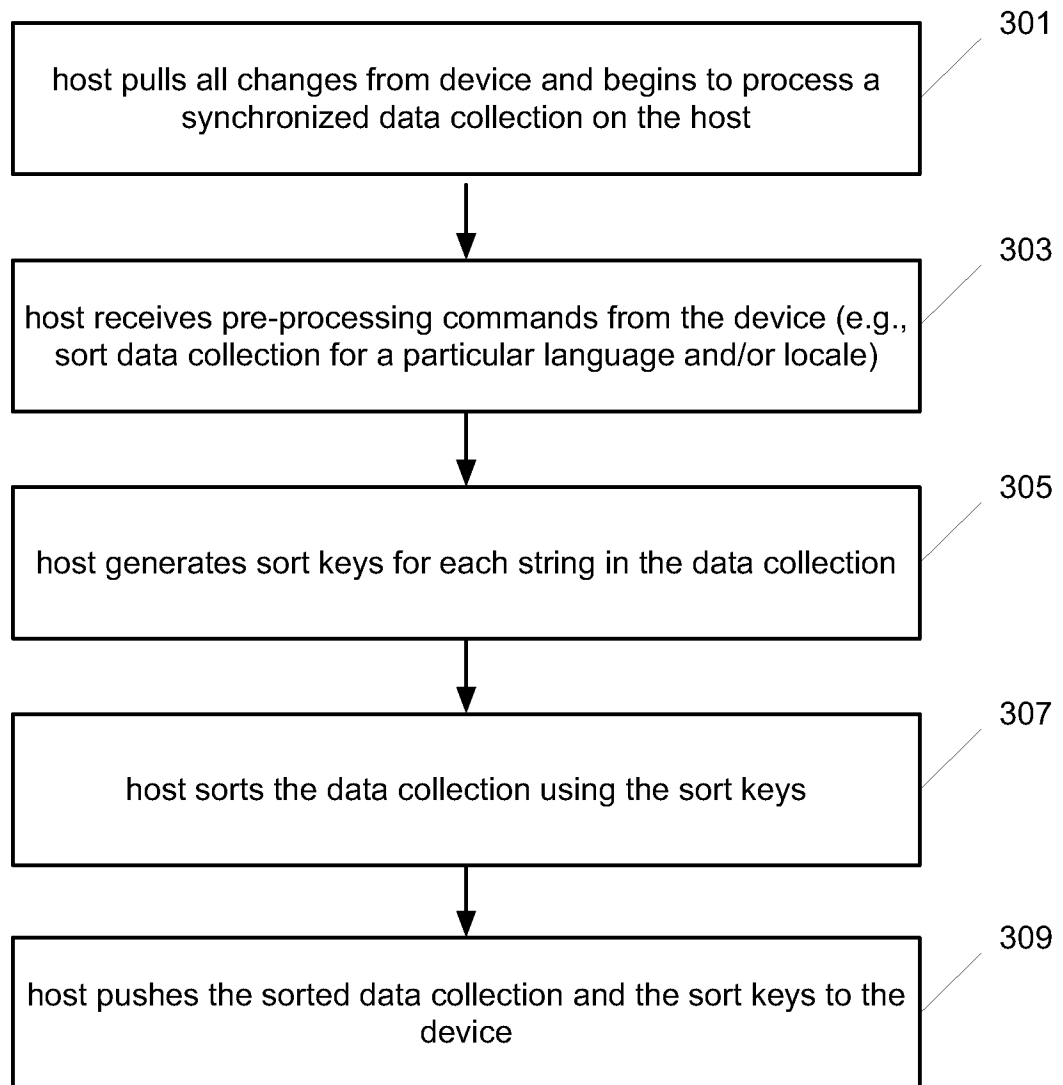


Fig. 3A

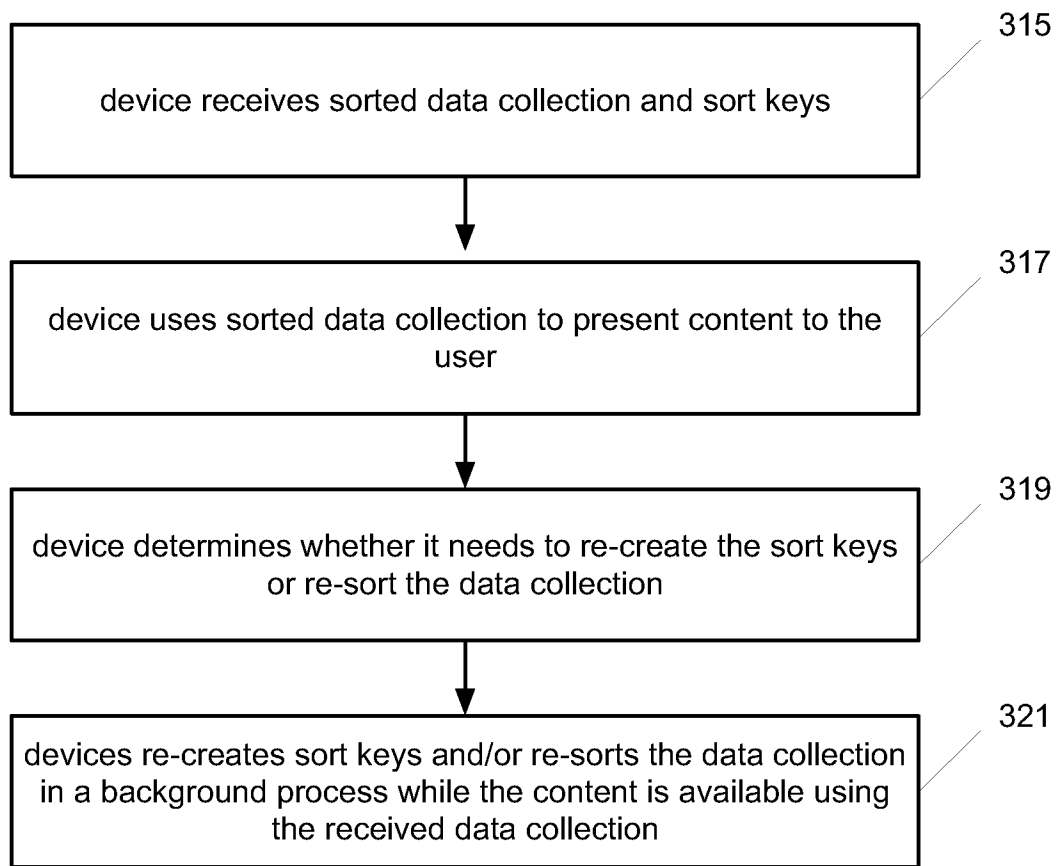


Fig. 3B

5/9

t0	Name	Sort Key	Order
	Bach	blobA	10
	Brahm	blobB	20
	Chopin	blobC	30

t1	new string: Beethoven		
t1	Name	Sort Key	Order
	Bach	blobA	10
	Brahm	blobB	20
	Chopin	blobC	30

t2	Name	Sort Key	Order
	Bach	blobA	10
	Beethoven	blobD	15
	Brahm	blobB	20
	Chopin	blobC	30

Fig. 4A

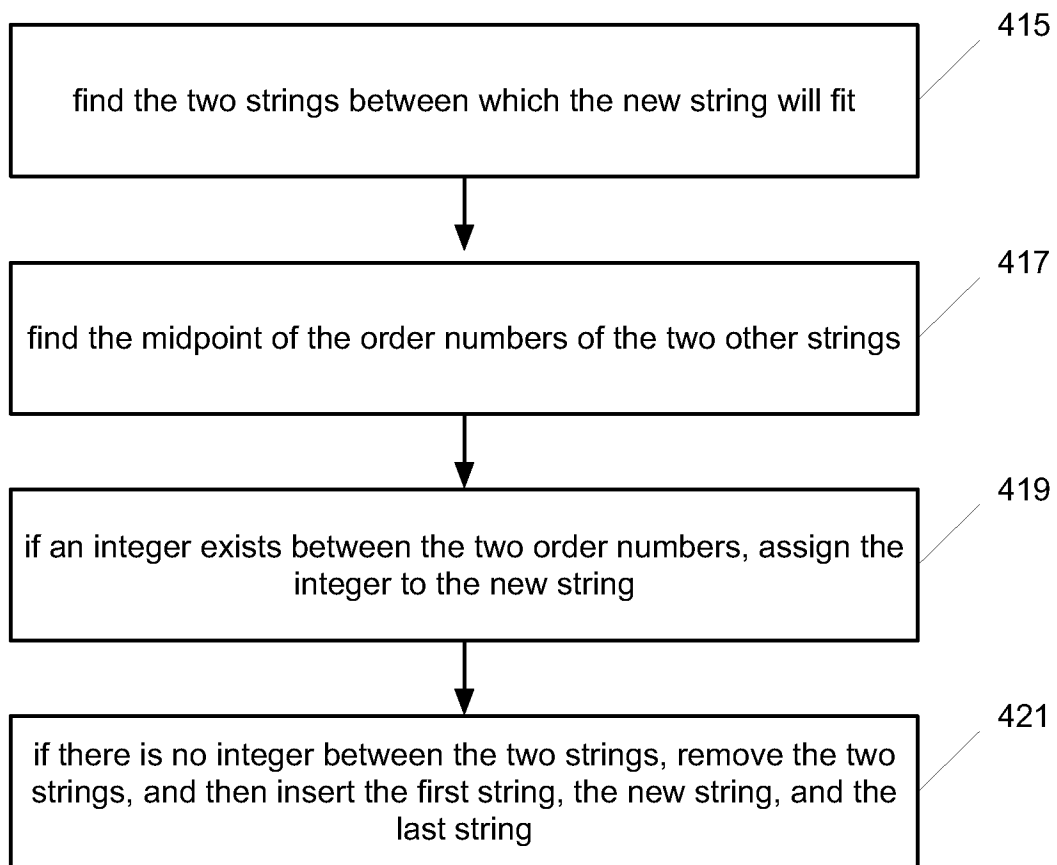


Fig. 4B

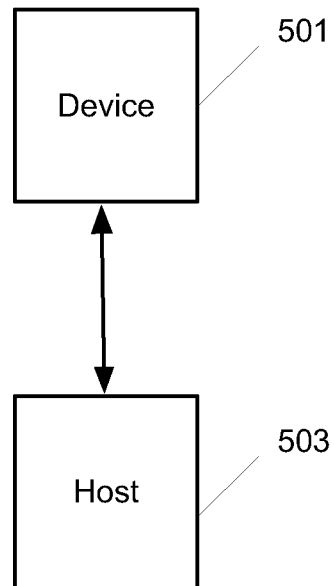


Fig. 5

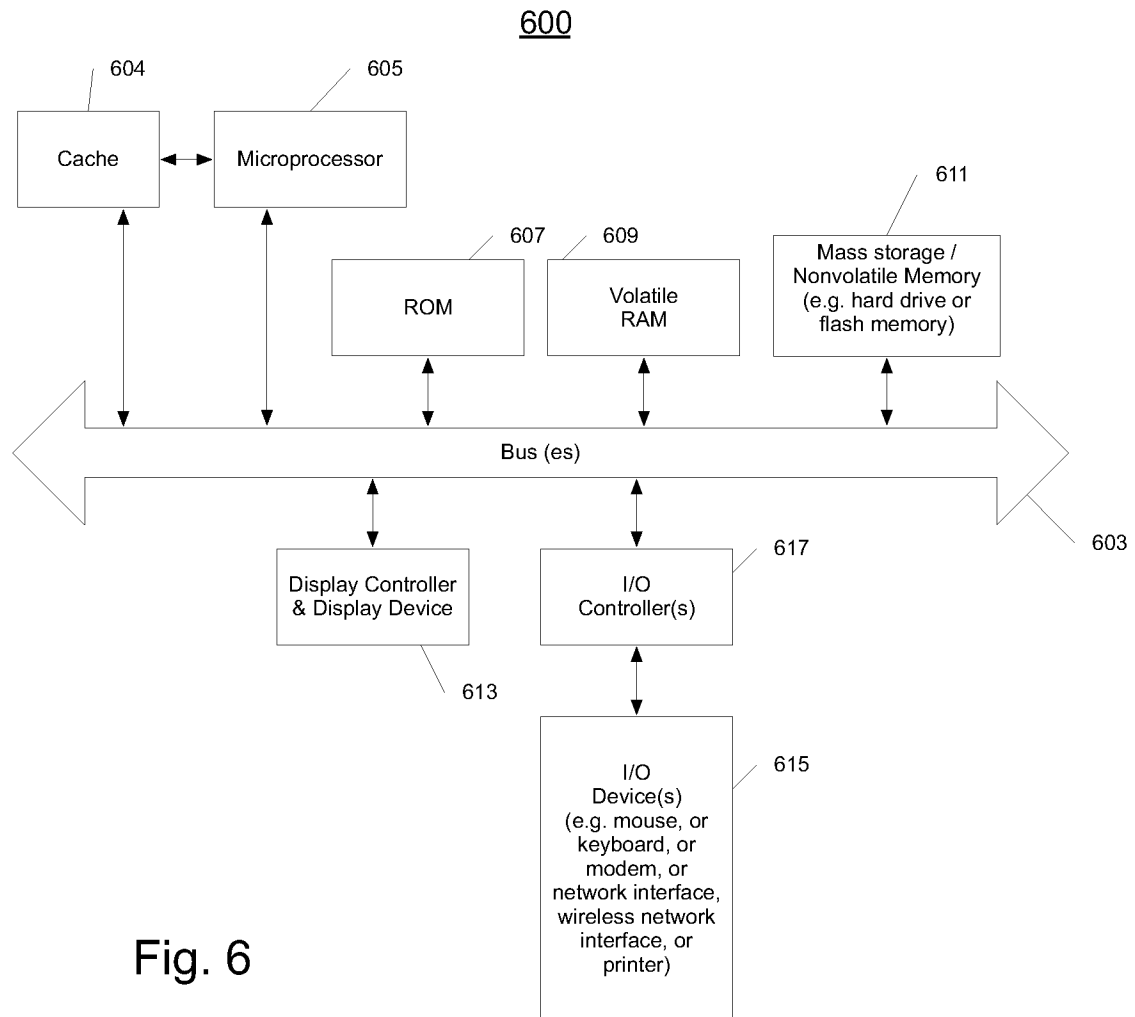


Fig. 6

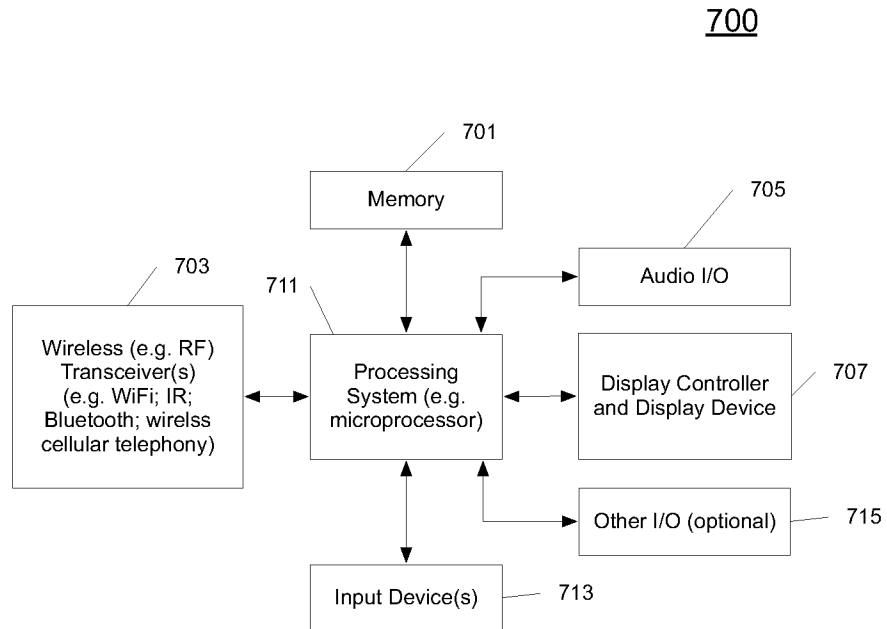


Fig. 7

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2012/039640

A. CLASSIFICATION OF SUBJECT MATTER

INV. G06F17/30

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, INSPEC, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	SATYANARAYANAN M: "Pervasive Computing: Vision and Challenges", IEEE PERSONAL COMMUNICATIONS, IEEE COMMUNICATIONS SOCIETY, US, vol. 8, no. 4, 1 August 2001 (2001-08-01), pages 10-17, XP011092117, ISSN: 1070-9916, DOI: 10.1109/98.943998 page 13, right-hand column, paragraph 2 - page 14, left-hand column, paragraph 2 ----- -/--	1-21



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

24 August 2012

Date of mailing of the international search report

31/08/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Konak, Eyüp

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2012/039640

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	RAJESH BALAN ET AL: "The case for cyber foraging", PROCEEDINGS OF THE 10TH WORKSHOP ON ACM SIGOPS EUROPEAN WORKSHOP: BEYOND THE PC , EW10, 1 January 2002 (2002-01-01), page 87, XP55036236, New York, New York, USA DOI: 10.1145/1133373.1133390 page 88 - page 91 -----	1-21