



(51) International Patent Classification:

G06T 19/20 (2011.01)

G06T 13/40 (2011.01)

(21) International Application Number:

PCT/EP2020/069611

(22) International Filing Date:

10 July 2020 (10.07.2020)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

19186137.6

12 July 2019 (12.07.2019)

EP

(71) Applicants: **VRIJE UNIVERSITEIT BRUSSEL**

[BE/BE]; Pleinlaan 2, 1000 Brussels (BE). **TREEDY'S SPRL** [BE/BE]; Avenue George Bergmann 117, 1050 Brussels (BE).

(72) Inventors: **PENGPENG, Hu**; Boulevard du Triomphe

151, 1050 Ixelles (BE). **MUNTEANU, Adrian**; Kas-

teelstraat 81, 3090 Overijse (BE). **NASTARAN, Nour-**

bakhsh; Avenue Daniel Boon 2, 1160 Auderghem (BE).

STURGES, Stephan; Avenue de la Couronne 442, 1050 Brussels (BE).

(74) Agent: **PRONOVEM**; c/o Office Van Malderen, Avenue

Josse Goffin 158, Brussels 1082 (BE).

(81) Designated States (unless otherwise indicated, for every

kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, IT, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, WS, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every

kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

(54) Title: METHODS OF ESTIMATING A BARE BODY SHAPE FROM A CONCEALED SCAN OF THE BODY

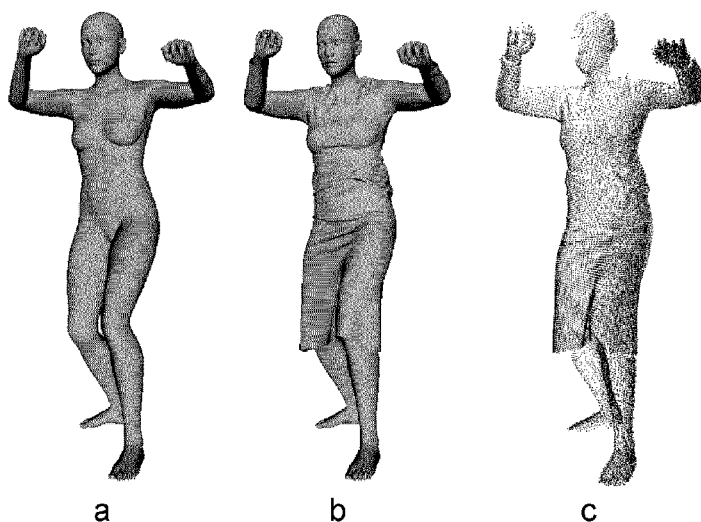


FIG 4

(57) Abstract: Method of generating a training dataset of concealed shapes and corresponding unveiled shapes of a body for training a neural network, comprising generating with the aid of computing means a first dataset comprising a plurality of first surface representations representative of a plurality of bare shapes of a plurality of bodies, virtually concealing the plurality of bare shapes by means of a computer implemented program in order to obtain a plurality of simulated concealed shapes of the plurality of bodies, and applying the plurality of simulated concealed shapes to a scanning simulator, the scanning simulator generating a second dataset comprising a plurality of second surface representations representative of the plurality of simulated concealed shapes.



Declarations under Rule 4.17:

— *of inventorship (Rule 4.17(iv))*

Published:

— *with international search report (Art. 21(3))*

Methods of estimating a bare body shape from a concealed scan of the body

Technical field

[0001] The present invention is related to a method of generating a training dataset of concealed, e.g. dressed, and corresponding bare, e.g. undressed, body shapes for training a neural network, in particular a deep learning network. The present invention is also related to a method of training a neural network using the training dataset. The present invention is also related to a method and corresponding system for estimating a bare, e.g. an undressed, body shape from a scanned concealed, e.g. dressed, body shape making use of the trained neural network. The body can refer to the body of a human or an animal, or to the body of an object.

Background art

[0002] Estimating the shape and pose of dressed human bodies is a crucial task to quite a number of emerging applications such as virtual try-on tools, non-contact body measurements, and avatar creation in virtual reality. The key aspects affecting the accuracy of a body shape estimation method are data acquisition and body prediction model.

[0003] Obviously, accurate body shape can be obtained by scanning people without clothing, a procedure that is yet inconvenient to most people and often an infringement of the right to privacy. This is also the case when people need to wear skin-tight clothes to get scanned. Thus, it is desirable to establish a method especially designed for estimating body shapes from dressed body scans. The major challenge when operating with dressed body scans is caused by non-rigid cloth deformations resulting from variations in the subject pose.

[0004] Existing body shape estimation methods formulate this task as a constrained optimization problem in which a statistical human body model is fitted to the scanned dressed body, which is computationally expensive and sensitive to initialization parameters. In order to obtain a better accuracy, some methods employ a sequence of dressed-human meshes as their input data. For instance, Anguelov D. et al., ACM transactions on graphics (TOG), 24, 408-416 (2005) described a statistical shape model named SCAPE (Shape Completion and Animation of People) to fit the dressed-human scan sequence by optimizing the shape using different poses. However, statistical models are typically overly-smooth and lack feature details. To resolve this, Loper M. et al., ACM Transactions on graphics (TOG), 34, 248 (2015) described a public vertex-based model named SMPL (Skinned Multi-Person Linear Model) to fit the dressed-

human sequence, and obtained detailed results by optimizing more parameters. Although optimization-based methods can generate impressive results, they are computationally expensive and sensitive to the initialization, various sources of noise of different types, and incomplete data. To overcome these problems, a fast method
5 predicting the body shape without any template or initialization step is of paramount importance.

Summary of the invention

[0005] It is an aim of the invention to overcome the above mentioned drawbacks. Particularly, it is an aim of the invention to enable obtaining a body shape
10 prediction model with less effort, and/or which is more accurate than the prior art.

[0006] Training and validating a neural network for body shape estimation requires a dataset consisting of dressed-human bodies and their corresponding undressed bodies. Limited by scanning technology, the 3D scanners can only obtain the outmost surface of the subject. Therefore, it is impossible to concurrently capture the
15 underlying body geometry occluded by the clothes. One intuitive solution would be to ask first a subject to take off their clothes and to maintain a static pose or perform a motion during scanning, and then ask the same subject to put their clothes back on and maintain the same static pose or perform the same motion during scanning. Scanning the static pose in this manner is possible either if the subject is trained to stay absolutely
20 still during scanning or a fast-enough scanner is used. However, due to the large size requirement of the training dataset, it is extremely expensive and time-consuming to do data collection with this approach. Furthermore, to scan a motion sequence in this way, replicating identical movements with and without clothes, is nearly impossible for a human subject and the results cannot be fully reliable. Pose fitting and penetration
25 resolving can only visually “fix” this issue, but will introduce additional errors.

[0007] The inventors found a way to learn a non-linear function to convert dressed-human point clouds to the corresponding body point clouds. Point clouds are the raw data produced by 3D scanners.

[0008] More generally, aspects of the present invention are directed not
30 only to estimating the naked or undressed shape of a human or animal body, but can be applied to shapes of objects as well, e.g. estimating the bare shape of an object body that is concealed by one or more layers of a coating or covering.

[0009] According to a first aspect of the invention, there is therefore provided a method of generating a training dataset of concealed, e.g. dressed, and
35 corresponding unveiled or bare, e.g. undressed, body shapes for training a neural network as set out in the appended claims.

[0010] A method of generating a training dataset of concealed shapes and corresponding unveiled shapes of a body as described herein comprises computer-generating a first dataset. The first dataset comprises a plurality of first surface representations representative of a plurality of bare shapes of a plurality of bodies. The plurality of bare shapes are (virtual) concealed by means of a computer implemented program in order to obtain a plurality of simulated concealed shapes of the plurality of bodies. The plurality of simulated concealed shapes are applied to a scanning simulator. The scanning simulator generates a second dataset comprising a plurality of second surface representations representative of the plurality of simulated concealed shapes.

[0011] According to a second aspect of the invention, there is provided a method of training a neural network, as set out in the appended claims.

[0012] According to a third aspect of the invention, there is provided a method of estimating a concealed, e.g. an undressed, body shape from a physical concealed, e.g. dressed, body shape, as set out in the appended claims.

[0013] According to a fourth aspect of the invention, there is provided a computer program code, as set out in the appended claims.

[0014] According to a fifth aspect of the invention, there is provided a system as set out in the appended claims.

[0015] According to a sixth aspect of the invention, there is provided a training dataset for training a neural network, as set out in the appended claims.

[0016] In the present invention, bare body shape estimation is being performed by a trained neural network, advantageously a deep learning network. The neural network has been trained using a specific training dataset developed according to aspects as described herein. The training dataset comprises corresponding (i.e. paired and aligned) concealed (dressed) and bare (undressed) body shapes which have been exclusively obtained via computer generation. The training dataset advantageously comprises body shapes in different poses, allowing the neural network to estimate bare body shapes, from a concealed body scan in different poses. By generating the training dataset purely through computer generation, very large training datasets can be obtained, comprising bodies in a large variation of shapes, poses, dimensions and dressing styles. This allows for training a neural network more effectively. Furthermore, by computer generating the training dataset according to aspects of the present invention, well aligned and paired dressed and undressed body meshes can be obtained, allowing to train a neural network improved accuracy.

Brief description of the figures

[0017] Aspects of the invention will now be described in detail with reference to the appended drawings, wherein same reference numerals illustrate same features.

5 **[0018]** Figure 1 represents a ground truth dataset according to the invention consisting of 10 undressed body shapes (5 male, 5 female).

[0019] Figure 2 represents one male and one female body shape of Fig. 1 in different poses and dressed in different clothing styles.

[0020] Figure 3: Three dimensional scanning simulation. (a) and (b) are the
10 front and top views of the setup of the presented virtual scanner; (c) is the scan data, the point cloud captured by each camera which is highlighted in a gray scale; (d) is the close up of the simulated noise; (e) is the close up of the simulated holes; and (f) is the close up of the occlusion.

[0021] Figure 4: (a) undressed body mesh sample; (b) dressed-human
15 mesh sample for (a); (c) the scans of (b) using a scanner simulator.

[0022] Figure 5: Overview of the method's steps according to the invention to obtain a trained neural network: The dressed body shape dataset obtained through the virtual scanner is fed to an Oriented Bounding Box (OBB) normalization in order to align all orientations of the body shapes and subsequently fed to an encoder-decoder
20 neural network, along with the ground truth dataset.

[0023] Figure 6: Test results after estimating female body shapes with a neural network trained with a dataset according to the invention. Top row: dressed-human scans as input to the trained neural network; middle row: estimated bodies; bottom row: ground truth.

25 **[0024]** Figure 7 represents method steps of a method of training a neural network according to aspects of the present invention.

[0025] Figure 8 represents schematically a system for estimating undressed body shapes from dressed body shapes as described herein.

[0026] Figure 9 represents a comparison of reconstruction error with prior
30 art methods for experiment 2. The grey intensity of each point indicates the per-vertex error in millimetres.

[0027] Figure 10 represents visual comparisons of undressed body estimation results from real scans obtained through different scanners and run through the same body estimation methods of Fig. 9. The body of the top row was scanned
35 through scanner [4], the body of the middle row was scanned through scanner [5] and the body of the bottom row was scanned through scanner [6].

Description of embodiments

[0028] Aspects of the invention will be illustrated for the specific field of estimating undressed human body shapes from dressed body scans. It will be convenient to note that the aspects described herein can be generally applied to estimation of bare shapes of an object or human body from scans of the concealed shape. In particular, the terms dressed and undressed as used herein can refer to at least partially concealed and bare (or unveiled) respectively.

[0029] One problem with learning a neural network to estimate undressed body shapes from dressed body scans, is having a reliable training dataset including ground truth data (undressed body shapes) and corresponding dressed data. Prior art training datasets only comprise dressed body shapes, and the undressed shape must be constructed or estimated from the dressed shape, which is exactly the underlying problem, rather difficult to perform.

[0030] In the present invention, a different approach is followed, namely a training dataset is generated starting with the first dataset of undressed (naked) body shapes which is generated by means of a computer. Different kinds of software packages exist for developing the first dataset, e.g. Bastioni, M.: MB-Lab, 10/02/2019. Available: <https://github.com/animate1978/MB-Lab>. By way of example, the first dataset can comprise at least three, advantageously at least five undressed (naked) male subjects and at least three, advantageously at least five undressed (naked) female subjects with different body shapes, as shown in Fig. 1. Their shapes can be established according to the experience of a professional artist. An important advantage provided by the Manuel Bastioni Lab software package is that well-defined skeleton and skinning weights are pre-defined.

[0031] The different body shapes of the first dataset can be provided in any suitable digital format, such as a surface mesh, and preferably as a point cloud.

[0032] The body shapes of the first dataset can all be in a single pose. However, it will be advantageous to provide the body shapes in different poses. Different poses may refer to the body assuming different orientations, preferably different states of deployment or articulation of one or more of its members, e.g. arms and/or legs stretched, folded, etc. This can be obtained in different ways, e.g. generating the different poses directly from the software package used for developing the body shapes of the first dataset. Another possibility is to use a dedicated software package allowing to obtain motion sequence of a particular body shape. Motion sequences including Walking, Rotating the body, Pulling the knees up, Squat, U-pose twisting, and Warming up can be applied via linear blending skinning.

[0033] The first dataset can thus comprise a plurality of undressed body shapes of different body types (gender, age, body proportions, etc.) in one or a plurality of poses or postures. The first dataset hence represents body shape and posture ground truths.

5 **[0034]** The plurality of undressed body shapes of the first dataset are advantageously provided as body meshes, comprising triangles and vertices. By way of example, one body mesh can comprise at least 5000 vertices, advantageously at least 10000 vertices, advantageously at least 15000 vertices.

[0035] A second dataset is now generated from the first dataset,
10 corresponding to the dressed body shapes.

[0036] To this end, suitable commercial clothing CAD modelling software, such as CLO (www.clo3d.com) can be used to simulate garments put on the body shapes of the first dataset. In order to obtain a larger dataset, the body shapes from the first dataset can be dressed with different clothing styles - e.g. one or more of: T-shirt
15 and long pants, long-sleeved layered clothes, wide clothes - e.g. dress for the female, and wide pants for the male -, football outfit, and wide long-sleeved clothes. Each subject can be dressed with a plurality of clothing styles. Some software packages such as CLO comprise a physically-based simulation engine which can be used to obtain realistic dressed-human animation sequences. Examples of different clothing styles are shown
20 in Fig. 2. Clothing styles can include shoes.

[0037] In order to speed up the clothing process, an automatic dressing technique can be used. In such a technique, a garment template is used comprising a plurality of garments. The garment template can comprise one or more reference (undressed) bodies provided with a plurality of garments or clothes. The reference bodies
25 can be provided as meshes or point clouds and can be dressed with the garments using suitable commercial clothing CAD modelling software as indicated above.

[0038] One or a combinations of these garments are transferred from the garment template to the plurality of undressed body shapes of the first dataset. Advantageously, vertices of the garments are bound to triangles of the reference body.
30 Advantageously, each vertex of a garment is bound onto at least three, preferably six closest triangles of the reference body, rather than only one triangle. This simple improvement can result in a smooth surface of the redressed garments. Indeed, advantageously, a plurality of body meshes of the first dataset have corresponding and possibly similar semantic vertices and triangles, which can also correspond to semantic
35 vertices and triangles of the reference body used for transferring garments. As a result, deformed garments can be fast inferred by the shape and pose of a target body. As this

binding is a local operation, more realistic clothing details such as wrinkles will be synthesized during transferring the garment to a target body.

[0039] By generating multiple body poses and multiple clothing styles, the number of dressed body shapes can be effectively increased in size. Advantageously, in methods of the invention, at least 5000, advantageously at least 10000, advantageously at least 20000, advantageously at least 25000 simulated dressed body shapes are generated, which differ from one another in one or a combination of body type (shape) and pose. In one example, based on the methodology described above, 48,100 simulated dressed-human meshes were built, each one having a corresponding ground truth (undressed) shape. It will be convenient to note that multiple dressed body shapes can share a same ground truth (undressed), e.g. where the dressed shapes refer to different clothing styles applied on a same undressed body shape.

[0040] A three dimensional scanner simulator is applied to the simulated dressed body shapes in order to generate the second dataset.

[0041] The dressed body shapes as obtained through the simulation described above are clean, dense, detailed 3D body models that are not representative of real-world scenarios involving human body scanning. Noise is an important perturbation that affects point clouds and other surface representations captured in real human 3D scanning scenarios, hence, in the present invention, the noise perturbation is taken into consideration in the training dataset.

[0042] Moreover, the synthetic dressed-human models have multi-layer of clothing accessible as 3D data, whereas a real scenario human 3D scanning would result in a single layer surface representation.

[0043] To address the above problems, a virtual scanning methodology is used which simulates a realistic 3D scanner and incorporates the inherent noise perturbations affecting the measurements. According to the Central Limit Theorem, various sources of noise in the acquisition pipeline combine to a Gaussian noise distribution. Hence, the resulting depth data from the virtual scanner can be made corrupted by Gaussian noise, simulating the noise in a real-world acquisition procedure.

[0044] For example, a virtual scanner is built as a four-camera (Time-of-Flight) system which captures four depth images of the subject from 4 different points of view as shown in Fig. 3 (a) and (b). The four cameras are arranged at the corners of a square and the dressed body shape is placed in the square (geometric) center. It will be convenient to note that more or less cameras may be implemented in the virtual scanner. A Gaussian noise is added to the scanned data representative of a noise signature of a 3D camera (scanner) that would be used in the real world. The cameras allow for

obtaining depth images. The captured depth images are back-projected into 3D point clouds, which can be aligned by making use of the extrinsic parameters of the cameras using the following equation:

$$S = \sum_{i=1}^m R_i C_i$$

- 5 where S is the resulting dressed-human pseudo-scan, R is the extrinsic matrix of the camera, C is the data from one camera, and m is the number of cameras.

[0045] By means of the virtual scanner, point clouds or any other suitable surface representation for each of the animated dressed-human meshes obtained using the simulation methodology described above, can be easily generated.

- 10 **[0046]** Referring to Fig. 3 (c)-(g), it is noticeable that a realistic scanned point cloud can be obtained from a scanner simulator (virtual scanner). Noise, holes and occlusions exist in the point cloud captured by the virtual 3D scanner. The resulting dataset consists of the second dataset of dressed-human scanned point clouds (meshes) and the first dataset of clean ground-truth-body point clouds (meshes). The
15 virtual scanner was implemented in Blender, an open source 3D computer graphics software (www.blender.org).

[0047] Advantageously, local properties such as normal, colour and curvature can be associated to the point clouds. To this end, a property referred to as offset is assigned to each vertex (i.e., point) of the body meshes of the second dataset.

- 20 For each vertex v_i^g on the scanned dressed body mesh (second dataset), a corresponding vertex v_i^b is determined on the associated ground truth body mesh (first dataset), e.g. as closest point. An offset of v_i^g is determined as:

$$\Delta O = v_i^g - v_i^b .$$

This offset can be used for training the neural network as described further below.

- 25 **[0048]** Both the first dataset (undressed body shapes) and the second dataset (dressed body shapes) are advantageously available as point clouds, or at least in a format suitable for being input to a neural network for training the neural network in order to enable it to estimate an undressed body shape from a physically 3D scanned dressed model.

- 30 **[0049]** The problem of body shape estimation model can be represented as follows:

$$B = d(e(D))$$

where e denotes the encoder, d is the decoder, and D is a dressed-human point cloud which can be clean or noisy, and B is the estimated point cloud of the body. This means

that the estimation of the body shape and posture can be defined as predicting B given D . Note that under this formulation, there is no explicit correspondence between D and B . Mapping from D to B is performed through a neural network which is trained on the basis of the datasets described above.

- 5 **[0050]** Referring to Fig. 5, in one example the neural network 10 is constructed as an encoder and decoder architecture. First, the encoder 11 describes the input point cloud D by generating a k -dimensional feature vector. Second, the decoder 12 produces the (undressed) body point cloud using the generated feature vector. The decoder 12 can be one as described in Yuan, W., Khot, T., Held, D., Mertz, C. and Hebert, M.: PCN: Point Completion Network. In: International Conference on 3D Vision (3DV), 728-737 (2018), being a combination of a fully-connected decoder described in Achlioptas, P., Diamanti, O., Mitliagkas, I. and Guibas, L.: Learning Representations and Generative Models for 3D Point Clouds. arXiv preprint arXiv:1707.02392 (2017) and the folding-based decoder described in Yang, Y., Feng, C., Shen, Y. and Tian, D.: FoldingNet: Interpretable Unsupervised Learning on 3D Point Clouds. arXiv preprint arXiv:1712.07262 (2017). A fully-connected network is suitable for predicting sparse point clouds while the folding based decoder performs well in estimating dense point clouds. The combination of these decoders can capture both local and global characteristics of point clouds and outperforms its constituent decoders.
- 20 **[0051]** Training deep neural networks involves a well-defined loss function. The loss function evaluates how well the neural network estimates the body point clouds by comparing the output with the ground truth body shape point clouds. Due to the irregularity of point clouds, the cost function should be defined in such a way that all permutations of points lead to the same result. To enforce this, permutation invariant functions, such as the Chamfer Distance (CD) and the Earth Mover's Distance (EMD) can be used. The Chamfer distance between the predicted point cloud C_1 and the ground truth point cloud C_2 is defined as:

$$CD(C_1, C_2) = \frac{1}{|C_1|} \sum_{x \in C_1} \min_{y \in C_2} \|x - y\|_2 + \frac{1}{|C_2|} \sum_{x \in C_2} \min_{y \in C_1} \|x - y\|_2$$

30

where C_1 and C_2 can be of different sizes $|C_1|$, $|C_2|$ respectively. This function averages out all the distances between each point and its nearest neighbour in the other set. Employing this metric does not lead the neural network to generate point clouds with a

uniform distribution. To tackle this issue, Earth Mover's distance can be used. The EMD distance between C_1 and C_2 is defined as:

$$EMD(C_1, C_2) = \min_{\phi: C_1 \rightarrow C_2} \frac{1}{|C_1|} \sum_{x \in C_1} \|x - \phi(x)\|_2 \quad (3)$$

- 5 where $\phi: C_1 \rightarrow C_2$ is a bijection. This metric allows for minimizing the average point-to-point distance between C_1 and C_2 . The point-to-point mapping ensures uniformity for the predicted point cloud. However, finding the optimal ϕ is computationally expensive, especially for high-resolution point clouds. To take advantage of both loss functions, the sparse body point cloud predicted by fully-connected decoder can be evaluated by the
- 10 sum of CD and EMD loss values while the dense body point cloud predicted by the folding-based decoder is evaluated by the CD loss function.

[0052] More particularly, an initial body estimation loss can be determined using EMD as:

$$EMD(V_{initial}^b, \hat{V}_{GT}^b) = \min_{\phi: V_{initial}^b \leftrightarrow \hat{V}_{GT}^b} \frac{1}{|V_{initial}^b|} \sum_{v \in V_{initial}^b} \|v - \phi(v)\|^2,$$

- 15 where $\phi(v)$ represents the corresponding point of v in the predicted initial undressed body vertices (points) $V_{initial}^b$. This EMD measures the error between the predicted initial undressed body vertices $V_{initial}^b$ and the initial ground truth (GT) body vertices $\hat{V}_{GT}^b$.

[0053] Subsequently, a coarse reconstruction loss can be determined, similar to the initial body estimation loss, using EMD as:

$$20 \quad EMD(V_{coarse}^b, \tilde{V}_{GT}^b) = \min_{\phi: V_{coarse}^b \leftrightarrow \tilde{V}_{GT}^b} \frac{1}{|V_{coarse}^b|} \sum_{v \in V_{coarse}^b} \|v - \phi(v)\|^2,$$

where $\phi(v)$ represents the corresponding point of v in the predicted coarse undressed body vertices V_{coarse}^b . This EMD measures the error between the predicted coarse undressed body vertices V_{coarse}^b and the coarse ground truth (GT) body vertices $\tilde{V}_{GT}^b$.

- [0054]** Subsequently, a fine reconstruction loss can be determined, using
- 25 symmetric chamfer distance (SCD) as:

$$SCD(V_{dense}^b, V_{GT}^b) = \frac{1}{|V_{dense}^b|} \sum_{x \in V_{dense}^b} \min_{y \in V_{GT}^b} \|x - y\|^2 + \frac{1}{|V_{GT}^b|} \sum_{y \in V_{dense}^b} \min_{x \in V_{GT}^b} \|y - x\|^2.$$

SCD measures the average closest point distance between the estimated dense undressed body vertices V_{dense}^b and the ground truth (GT) body vertices V_{GT}^b .

- [0055]** Optionally, a further loss function referring to the offset loss is added
- 30 to the above loss functions, and is advantageously used to train the vertex offset ΔO . The offset loss OL can be defined as:

$$OL(\Delta O, \Delta O_{GT}) = \frac{1}{|\Delta O|} \sum_{\Delta O^i \in \Delta O} |\Delta O^i - \Delta O_{GT}^i|$$

wherein $OL(\Delta O, \Delta O_{GT})$ is a l_1 loss, which minimizes the error between the predicted offsets ΔO and the ground truth offsets ΔO_{GT}^i .

[0056] Advantageously, the above loss functions are combined to obtain a

5 final loss function defined as:

$$L = \alpha_{OL} OL(\Delta O, \Delta O_{GT}) + \alpha_{initial} EMD(V_{initial}^b, \hat{V}_{GT}^b) + \alpha_{coarse} EMD(V_{coarse}^b, \tilde{V}_{GT}^b) + \alpha_{SCD} SCD(V_{dense}^b, V_{GT}^b) \quad (4),$$

wherein α_{OL} , $\alpha_{initial}$, α_{coarse} and α_{SCD} are the weights that control the contributions of each term.

10 **[0057]** The first and second datasets are advantageously input to the neural network as datasets of any suitable surface representation. Advantageously, the datasets are input as point clouds. A possible network architecture allowing use of point clouds is described in Qi, C.R. et al., Pointnet: Deep learning on Point Sets for 3d Classification and Segmentation, IEEE Conference on Computer Vision and Pattern Recognition, 4 (2017).

[0058] A challenge with processing the first and second datasets is to cope with the large variation in global orientation of the bodies. Traditionally, geometric data can be normalized by centering all meshes or point clouds to the center of the bounding box and to scale them into a unit sphere. However, this may be a tedious task as the output body point cloud highly depends on the orientation of the input dressed-human scan. Another advantageous way to achieve invariance to orientation, is to employ an advanced normalization method referred to as the Oriented Bounding Box (OBB) Normalization, described in Ge, L. et al., Hand PointNet: 3d Hand Pose Estimation using Point Sets, Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, 8417-8426 (2018).

[0059] Therefore, the obtained point clouds of the second dataset and advantageously the first dataset will first have their orientations normalized before being input to the neural network for training in a normalization module 13.

[0060] Due to the noise implemented in the virtual scanner 14, not all points of the second dataset will have an equal degree of trust. Points generated by the scanner in difficult areas (e.g. under the armpit) are more prone to noise than points located in highly visible parts of the body. Another important observation is that points located in areas where the cloth is tight on the body are more likely to lead to accurate body shape estimates than points that are located in difficult areas, where the cloth is loose on the body. Advantageously, a confidence level map is generated on the second dataset

associating a confidence level to each of the point clouds of the second dataset. The confidence level map is advantageously input to the neural network in order to guide it in correctly estimating the body shape.

[0061] A possible way to compute the confidence level values is to make

5 them inversely proportional to the local variance of the noise per 3D point (or in selected nodes in case other surface representations, e.g. meshes, Bezier curves, etc. are used). These variances can be estimated using the dressed body dataset and the undressed equivalent for various poses. The higher the resulting variance, the lower is the confidence level for the corresponding 3D point. Another possibility is to take into account
10 the relative distance in each point between the dressed body model and the corresponding undressed body shape. Average relative distances and the variances of the relative distances for various body poses can be computed. The confidence levels are inversely proportional to the resulting variances.

[0062] Referring to Fig. 7, a method 100 of training a neural network with

15 the first and second dataset comprises a first step 101 of virtual scanning a dressed body mesh to generate an input point cloud of n points with co-ordinates (x,y,z) . The input point cloud is normalized in step 102 to obtain a normalized point cloud. By way of example, normalization can be performed as OBB normalization, e.g. as described in L. Ge, Y. Cai, J. Weng, and J. Yuan, "Hand pointnet: 3d hand pose estimation using point
20 sets," in Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition, 2018, pp. 8417–8426. Advantageously, the normalized point cloud is subsampled to obtain a subsampled point cloud with m normalized points, wherein $m < n$. Advantageously, offsets are determined for the points of the subsampled point cloud, e.g. as described above. The residual difference between the m subsampled points and
25 offsets represents the initial undressed body points. The initial undressed body points are fed to the encoder part of the neural network in step 103. The encoder consumes these initial body points to learn a feature on these points. The features from the encoder are fed to the decoder part of the neural network in step 104 to output coarse or sparse body points. The decoder can be implemented with a Multi-layer Perceptron (MLP)
30 module to generate the coarse body points, e.g. implementing CD and/or EMD as described above. The decoder then refines the coarse body points to obtain a dense undressed body point cloud in step 105. The decoder can comprise a folding module configured to refine the coarse body points. The folding module can be implemented with CD as described above. The folding module can be implemented as described in Y.
35 Yang, C. Feng, Y. Shen, and D. Tian, "Foldingnet: Point cloud auto-encoder via deep grid deformation," in Proceedings of the IEEE Conference on Computer Vision and

Pattern Recognition, 2018, pp. 206–215. The decoder can optionally comprise a de-normalization module to de-normalize the refined coarse body points and obtain the dense body points. The refining step 105 optionally comprises a de-normalization step 106 to recover the original scale and orientation of the point cloud / body mesh.

- 5 **[0063]** Referring to Fig. 8, a system 200 comprises a computing device 201 coupled to a three-dimensional (3D) body scanning device 202. The 3D body scanning device 202 can comprise one or more cameras 203 arranged at corners of a ploygon and configured to scan a body positioned in a central area of the polygon. Cameras 203 can be any suitable cameras for this purpose, e.g. time-of-flight cameras.
- 10 **[0064]** Computing device 201 comprises the trained neural network 10 as described herein and can comprise one or more user applications 204 which are coupled to the neural network 10 for receiving and/or transmitting data from/to the neural network. One of the user applications 204 can be operably coupled to the 3D body scanning device 202 to receive a dressed body scan, which is then fed to the trained neural
- 15 network 10 for estimating an undressed body mesh.

Experiment 1

- [0065]** The above method has been tested. A training dataset of 48100 models was obtained using the procedure described above. Scanning simulation was performed with a Kinect v1 blender simulation having a noise model designed for the
- 20 structured-light cameras. The dataset was split into training, validation, and testing datasets by 90%, 5% and 5% respectively. The training was done using the Adam optimizer described in Kingma, D.P. and Ba, J.: Adam: A Method for Stochastic Optimization, arXiv preprint arXiv:1412.6980 (2014). An initial learning rate of 0.0001 for 50 epochs and a batch size of 16 on a desktop PC (Intel(R) Xeon(R) Silver 4112 CPU
- 25 @ 2.60GHz 64GB RAM GPU GeForce GTX 1080Ti) based on TensorFlow (Abadi, M., Barham, P., Chen, J., Chen, Z., Davis, A., Dean, J., Devin, M., Ghemawat, S., Irving, G., Isard, M. and Kudlur, M.: Tensorflow: a System for Large-scale Machine Learning. In: OSDI, 265-283 (2016)) was used. The learning rate is decayed by 0.7 every 50K iterations. The sizes of the input point cloud in the encoder, the feature vector in the
- 30 encoder, the sparse output in the decoder, and the dense output in the decoder were 6144, 1024, 2048 and 16384 respectively. The sparse body point cloud predicted by the decoder was evaluated by the sum of CD and EMD loss values while the dense body point cloud predicted by the folding-based decoder was evaluated by the CD loss function.
- 35 **[0066]** The estimated body shapes were compared with the ground truth body point clouds from the testing data. Since it is more challenging to estimate body

shapes from wide clothing, such as dresses, the performance was tested on female data. The results are shown in Table 1. A few comparative graphical shapes are shown in Fig. 6.

- 5 Table 1: Numerical results for the estimated body shapes. To each female subject, 10 frames for each clothing style were randomly selected from the testing dataset (see Sect. 5.1) and the average point-to-point distance in millimeters between the ground truth (GT) body mesh and the method result were reported.

- Note: *FHD* is forward Hausdorff distance: minimum distance from all points of the distance from all points of GT to a point on the estimated body, averaged for all estimated body points; *RHD* is reverse Hausdorff distance: minimum distance from all points of the estimated body to a point in GT, averaged for all B; *AVG* is the average *FHD* and *RHD*.

Female id	T-shirt, long pants			Football outfit			Long-sleeved shirt, long pants			Opening clothing			Dress		
	<i>FHD</i>	<i>RHD</i>	<i>AVG</i>	<i>FHD</i>	<i>RHD</i>	<i>AVG</i>	<i>FHD</i>	<i>RHD</i>	<i>AVG</i>	<i>FHD</i>	<i>RHD</i>	<i>AVG</i>	<i>FHD</i>	<i>RHD</i>	<i>AVG</i>
#1	4.29	6.32	5.30	4.32	6.33	5.33	4.41	6.38	5.39	4.35	6.36	5.35	4.48	6.46	5.47
#2	4.80	6.95	5.88	4.77	6.92	5.84	4.71	6.90	5.80	4.79	6.97	5.88	4.77	6.96	5.86
#3	4.53	6.92	5.72	4.47	6.88	5.68	4.61	7.01	5.81	4.69	7.15	5.92	4.64	7.07	5.86
#4	4.55	6.70	5.63	4.38	6.52	5.45	4.68	6.81	5.74	4.49	6.65	5.57	4.90	7.02	5.96
#5	5.08	7.68	6.38	5.18	7.87	6.53	5.39	7.96	6.67	5.02	6.94	5.98	5.16	7.81	6.49

Experiment 2

- 15 [0067] A training dataset of 100,000 male and 100,000 female models was generated using the procedure described above. Three types of clothing were put on each of them, hence obtaining 600,000 dressed scans and corresponding 200,000 ground truth body shapes. This dataset is referred to hereinafter as the BUG dataset. In the training stage, the dataset was split into training, validation, and testing by 97%, 2% and 1% respectively. The training was done using the Adam optimizer as in experiment 20 1. The learning rate was decayed by 0.7 every 50K iterations. A loss function according to Equation (5) was used. The weights of each terms defined in Equation (5) were set to: $\alpha_{OL}=1$, $\alpha_{initial} = 1$, $\alpha_{coarse}=1$ and $\alpha_{CD} =1$. A widely-used evaluation metric, the Chamfer Distance (CD), was used. The CD error measures the average Euclidean distance

between the reconstructed body mesh and the ground truth body mesh. The measurement unit is mm. The CD error was defined as:

$$CD(V_{rec}, V_{GT}) = \frac{1}{V_{rec}} \sum_{x \in V_{rec}} \min_{y \in V_{GT}} \|x - y\|^2$$

The average value and average standard derivation of the vertex-to-vertex error was calculated.

[0068] The trained neural network was tested with the BUG dataset. The BUG dataset includes the ground truth posed body models, which was used to quantitatively compare our method with the prior art methods. In this experiment the invention method labelled [INV] was compared with [1]: Hasler, N., Stoll, C., Rosenhahn, B., Thormählen, T. and Seidel, H.P., 2009. Estimating body shape of dressed humans. *Computers & Graphics*, 33(3), pp.211-216.; [2]: Kanazawa, A., Black, M.J., Jacobs, D.W. and Malik, J., 2018. End-to-end recovery of human shape and pose. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition* (pp. 7122-7131). [3]: T. Groueix, M. Fisher, V. G. Kim, B. C. Russell, and M. Aubry, "3dcoded: 3d correspondences by deep deformation," in *Proceedings of the European Conference on Computer Vision (ECCV)*, 2018, pp. 230–246. The evaluation was based on the BUG testing dataset comprising 2000 body meshes. Figure 9 shows the error map of some estimated body shapes. More than 90% of vertices of the estimated body shape using the invention method have per-vertex errors of less than 10 mm, thereby outperforming the prior art reference methods.

Experiment 3

[0069] The robustness of the invention method to sensor noise and missing data was tested. Three common scanning systems including [4] Multi-Kinect scanning (M. Kowalski, J. Naruniec, and M. Daniluk, "Livescan3d: A fast and inexpensive 3d data acquisition system for multiple kinect v2 sensors," in 2015 International Conference on 3D Vision. IEEE, 2015, pp. 318–325), [5] a Microsoft Kinect Version 2 and a turntable scanning system (P. Hu, T. Komura, D. Holden, and Y. Zhong, "Scanning and animating characters dressed in multiple-layer garments," *The Visual Computer*, vol. 33, no. 6-8, pp. 961–969, 2017), and [6] a photogrammetric scanning system called PhotoScan (<https://www.agisoft.com/>) were used to capture three subjects and undressed body shapes were estimated from the scans using the invention method [INV] and compared to methods [1]-[3]. Figure 10 shows the visual comparisons. The result of [1] has a terrible penetration problem; the result of [2] is incorrect in terms of shape and posture; the result of [3] is fatter and unnaturally-deformed. To the contrary, the result of the method according to the invention is plausibly reliable. The estimated body (light coloured areas) is almost inside the garment (dark coloured areas). The scan from [4] is very noisy, incomplete and incorrectly aligned. The scan from [5] has missing data in the area of

head, but it is a clean mesh. The scan from [6] has noise in the areas of the arm and crotch. The performance of [1] reduces due to the unexpected noise. The error of [2] is large. The performance of [3] seems to be preserved, but the estimated body is again oversized compared to reality. The result of the invention method resulted to be the best compared to the prior art methods. This proves that the invention method of estimating undressed body shapes from dressed body scans can be used on scans captured by different scanners, proving to be robust to large noise levels and missing data.

[0070] The invention method also resulted to outperform the prior art methods in terms of running time. The reconstruction time based on one scan for the invention method was 5.8 s, while it was 11 minutes for [1] and 1 minute for [3]. The reconstruction time for [2] was 2.5 minutes based on one photograph. Moreover, the methods [1] and [3] required additionally the prior model to be given, and method [2] required two-dimensional joints to be given, all of which were not required for the invention method. Such additional data is not always available in real-world applications.

[0071] Possible applications are in the fields of human body scanning, human biometrics, fashion articles, in particular clothing footwear and clothing accessories to be worn by a human or animal being, and automatic object recognition.

CLAIMS

1. Method of generating a training dataset of concealed shapes and corresponding unveiled shapes of a body for training a neural network, comprising:

generating with the aid of computing means a first dataset
5 comprising a plurality of first surface representations representative of a plurality of bare shapes of a plurality of bodies,

virtually concealing the plurality of bare shapes by means of a computer implemented program in order to obtain a plurality of simulated concealed shapes of the plurality of bodies,

10 applying the plurality of simulated concealed shapes to a scanning simulator, the scanning simulator generating a second dataset comprising a plurality of second surface representations representative of the plurality of simulated concealed shapes.

2. Method of claim 1, wherein the first surface representations
15 are representative of a plurality of bare shapes assuming a plurality of poses.

3. Method of any one of the preceding claims, wherein the simulated concealed shapes comprise multi-layer surfaces.

4. Method of claim 3, wherein the scanning simulator converts the simulated concealed shapes comprising the multi-layer surfaces into the second
20 surface representations representing single layer surfaces.

5. Method of any one of the preceding claims, wherein the scanning simulator is a photogrammetry-based simulator.

6. Method of any one of the preceding claims, wherein the scanning simulator implements a noise model, wherein the noise model adds simulated
25 noise to the plurality of second surface representations.

7. Method of any one of the preceding claims, wherein the scanning simulator implements a plurality of camera simulators arranged at corners of a polygon, wherein the simulated concealed shapes are arranged in a centre of the polygon, wherein the plurality of camera simulators image the simulated concealed
30 shapes from different viewing angles.

8. Method of any one of the preceding claims, comprising generating confidence level values associated with nodes of the plurality of second surface representations.

9. Method of any one of the preceding claims, wherein the first
35 surface representations are first point clouds and/or the second surface representations are second point clouds.

10. Method of claim 9, comprising generating confidence level values associated with points of the second point clouds.

11. Method of any one of the preceding claims, wherein the plurality of bare shapes are representative of a plurality of undressed shapes of a plurality of human or animal bodies, and wherein virtually concealing comprises virtually dressing the plurality of undressed shapes, wherein the plurality of simulated concealed shapes are a plurality of simulated dressed shapes of the plurality of human or animal bodies.

12. Method of claim 11, wherein the plurality of simulated dressed shapes comprises simulated dressed shapes in a plurality of clothing styles, advantageously comprising tight-fit clothing and loose-fit clothing.

13. Method of training a neural network, comprising:
generating a training dataset of concealed and corresponding bare shapes according to the method of any one of the preceding claims, and
applying the first dataset and the second dataset to the neural network, wherein the first dataset is considered as a ground truth dataset.

14. Method of claim 13, wherein the plurality of second surface representations comprise nodes with associated confidence level values obtained according to the method of claim 8 or 10, wherein the confidence level values are fed as input to the neural network.

15. Method of estimating a bare shape from a physical concealed shape of a body, comprising:

training a neural network according to the method of claim 13 or 14,
scanning the physical concealed shape with a three dimensional camera device and generating a third surface representation representative of the physical concealed shape, and

applying the third surface representation to the neural network, the neural network outputting a fourth surface representation representative of an estimated bare shape of the body.

16. Method of claim 15 in conjunction with claim 6, wherein the noise model is representative of a noise signature associated with the three dimensional camera device.

17. Method of claim 15 or 16, in conjunction with claim 2, wherein the neural network outputs the fourth surface representation in substantially a same pose as a pose of the third surface representation.

18. Computer program code, which, when implemented on a computer, is configured to perform the method of any one of the preceding claims.

19. System, comprising a computer implemented with a neural network trained according to the method of claim 13 or 14, a three dimensional camera device operably coupled to the neural network, wherein the computer is configured to perform the method of any one of claims 15 to 17.

5 20. A training dataset for training a neural network, comprising a first dataset comprising a plurality of first surface representations representative of a plurality of bare shapes of a plurality of bodies and a second dataset comprising a plurality of second surface representations representative of concealed shapes of the plurality of bodies, wherein the first dataset and the second dataset are obtained
10 according to the method of any one of the claims 1 to 12.

1/8

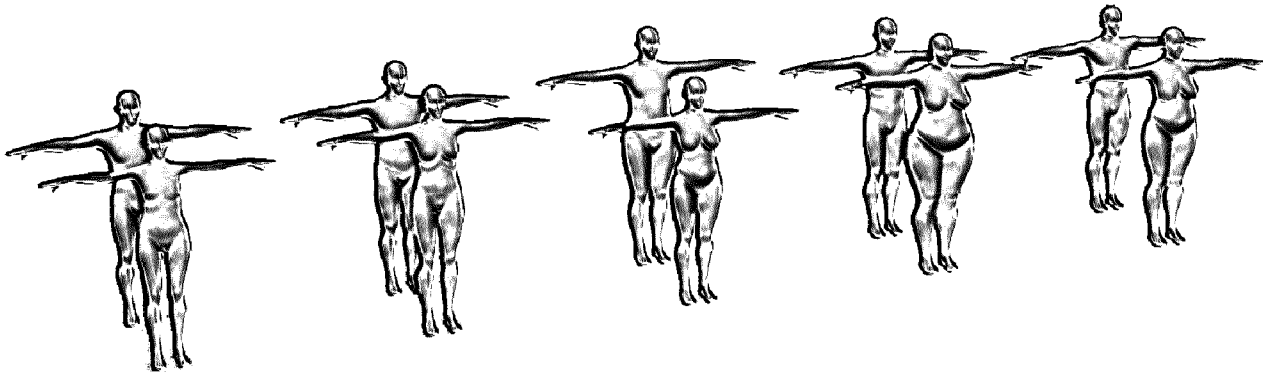


FIG 1


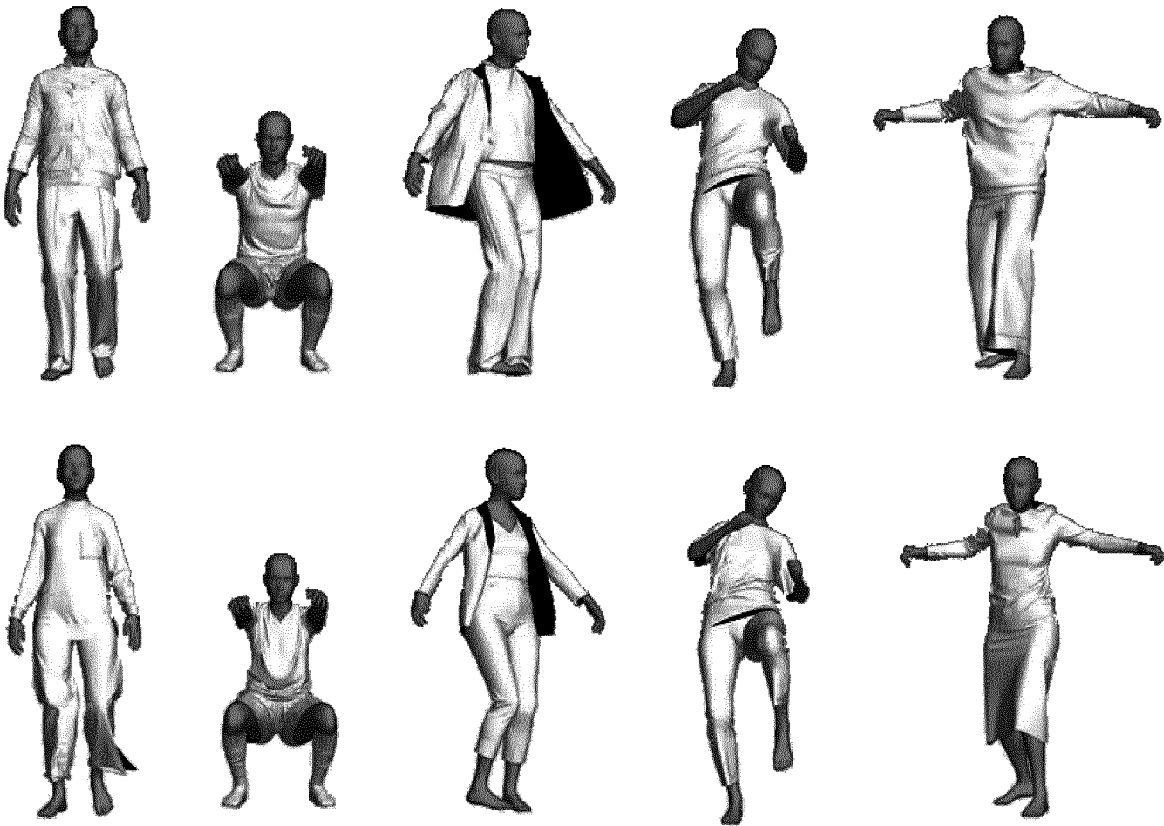


FIG 2

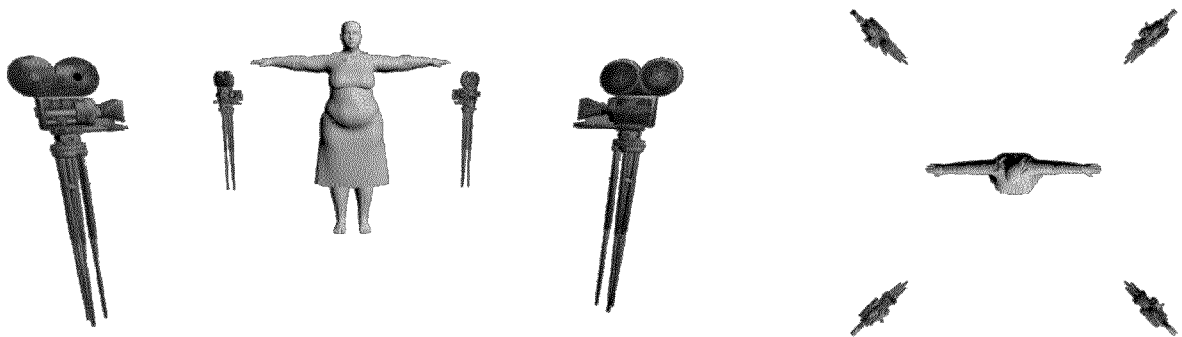

(a)

(b)


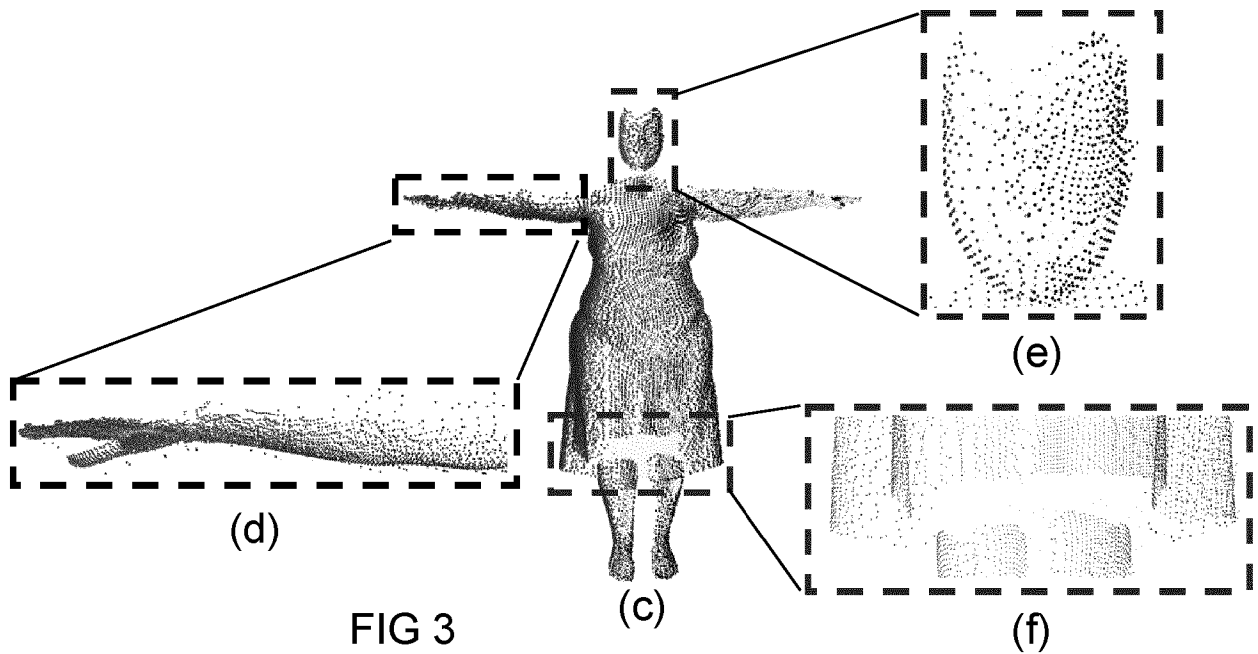


FIG 3

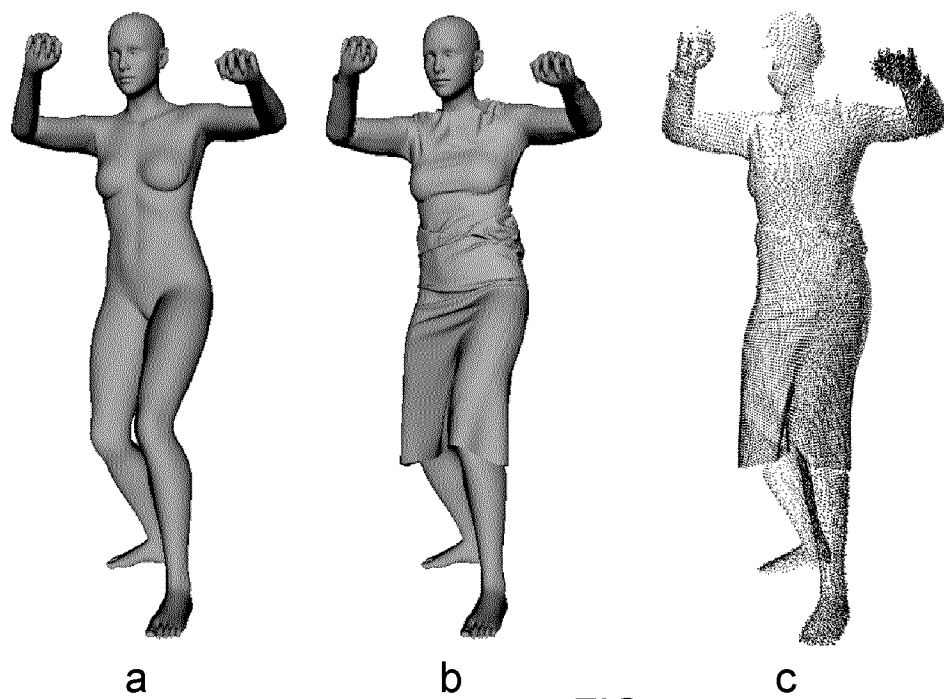

a

b

c

FIG 4

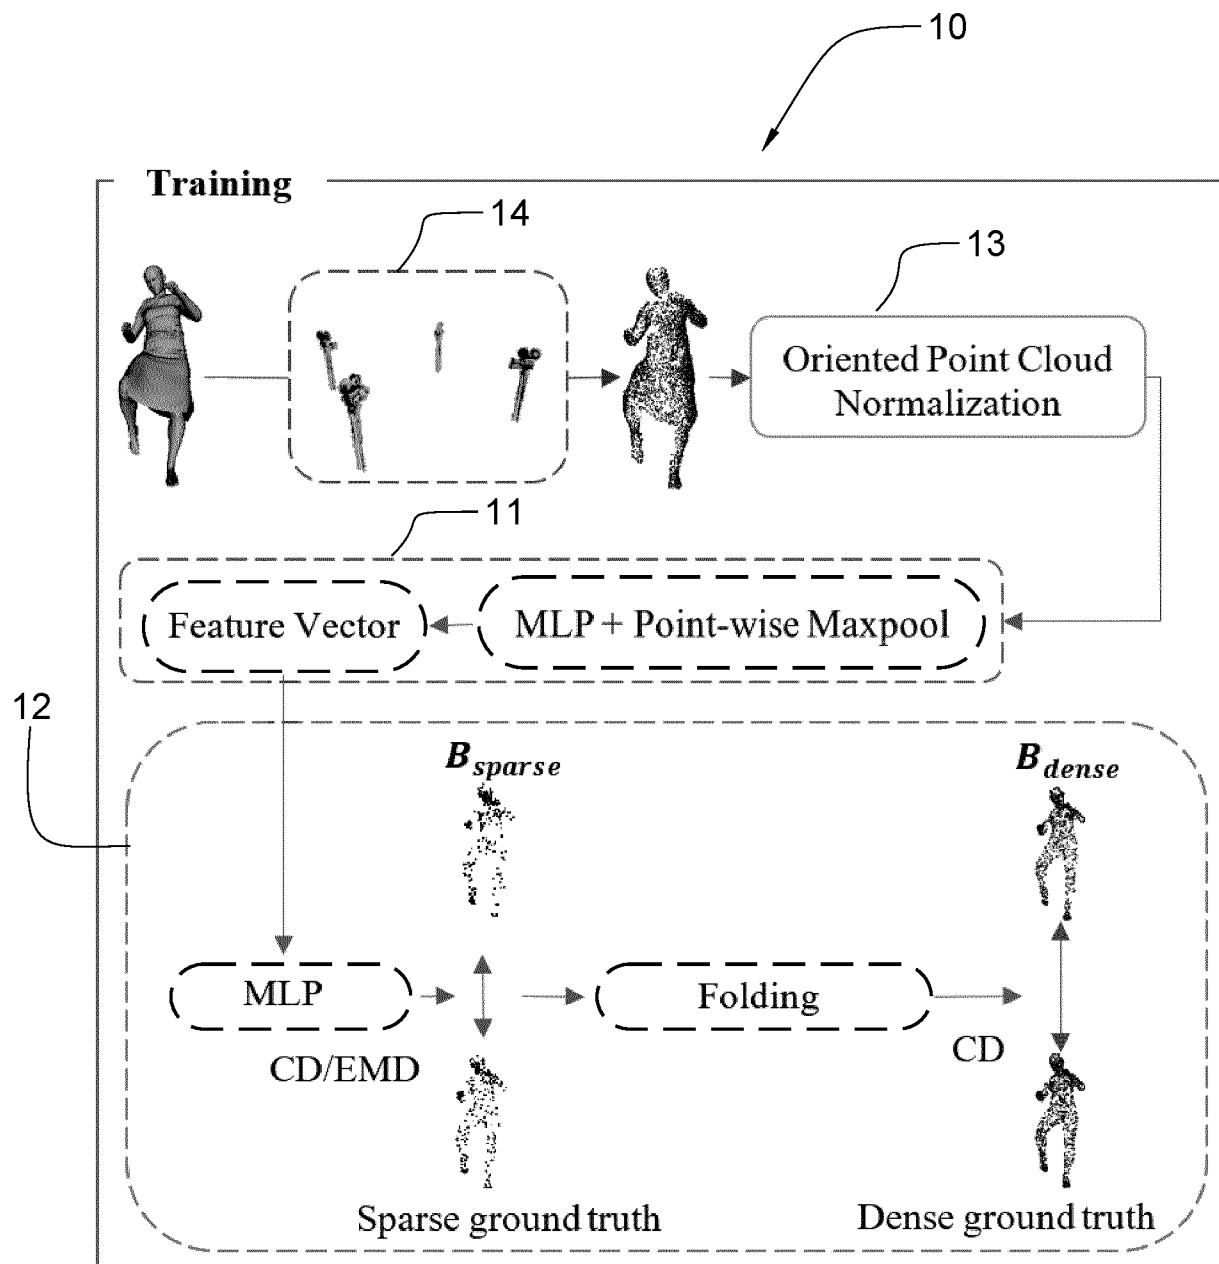


FIG 5

4/8



FIG 6

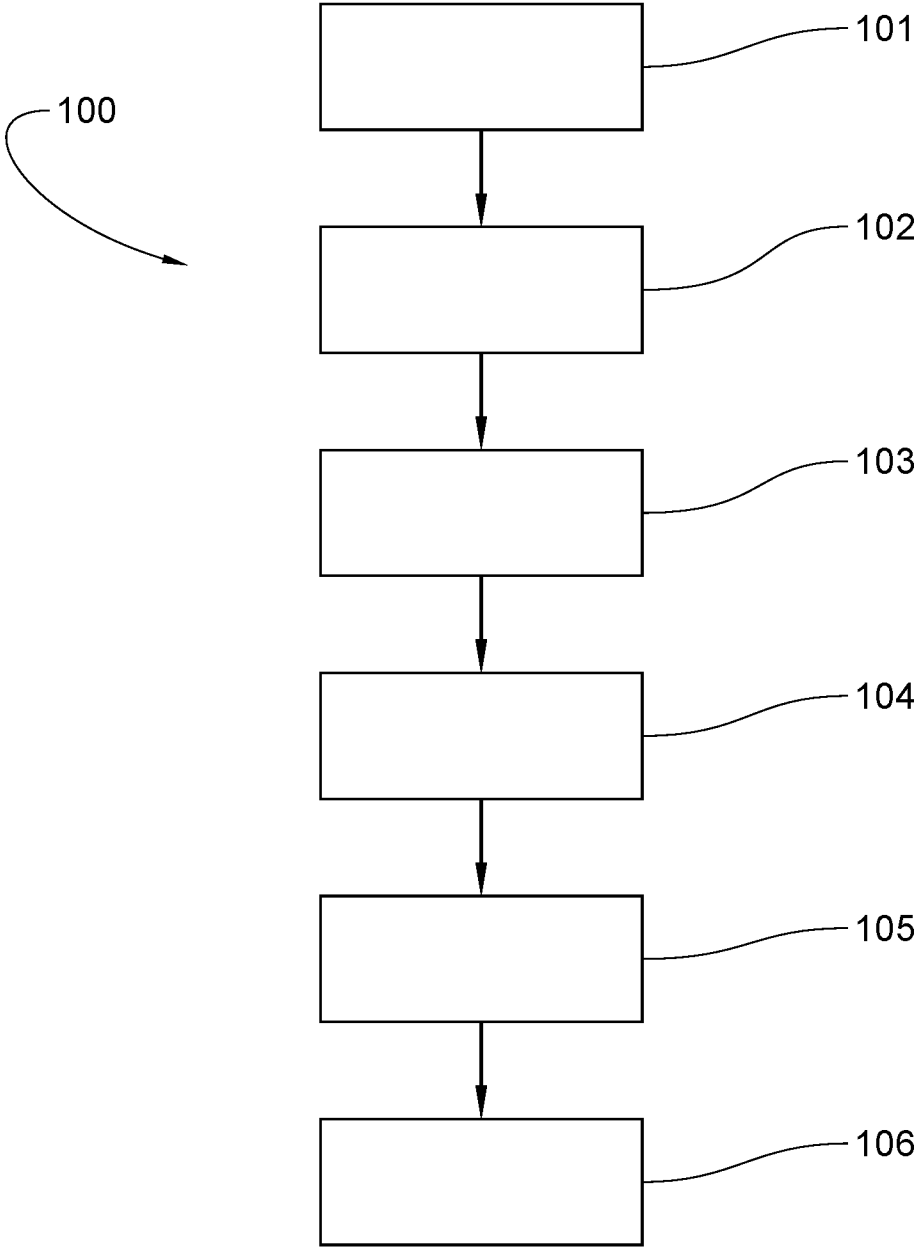


FIG 7

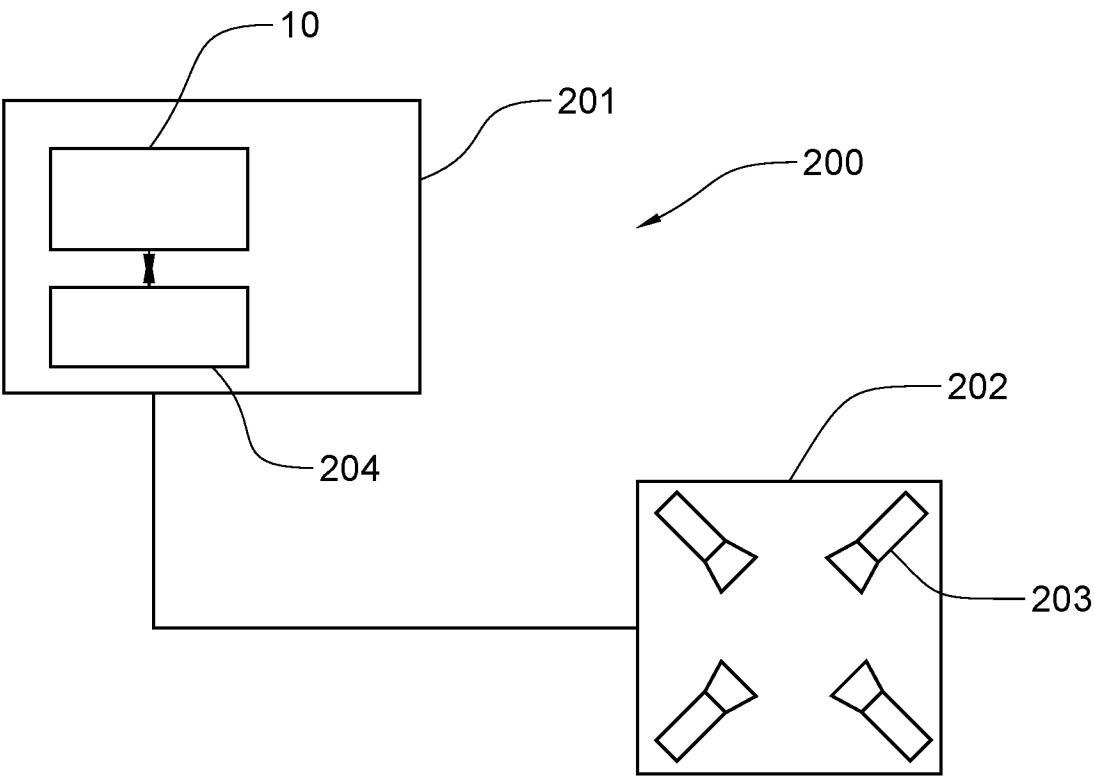


FIG 8

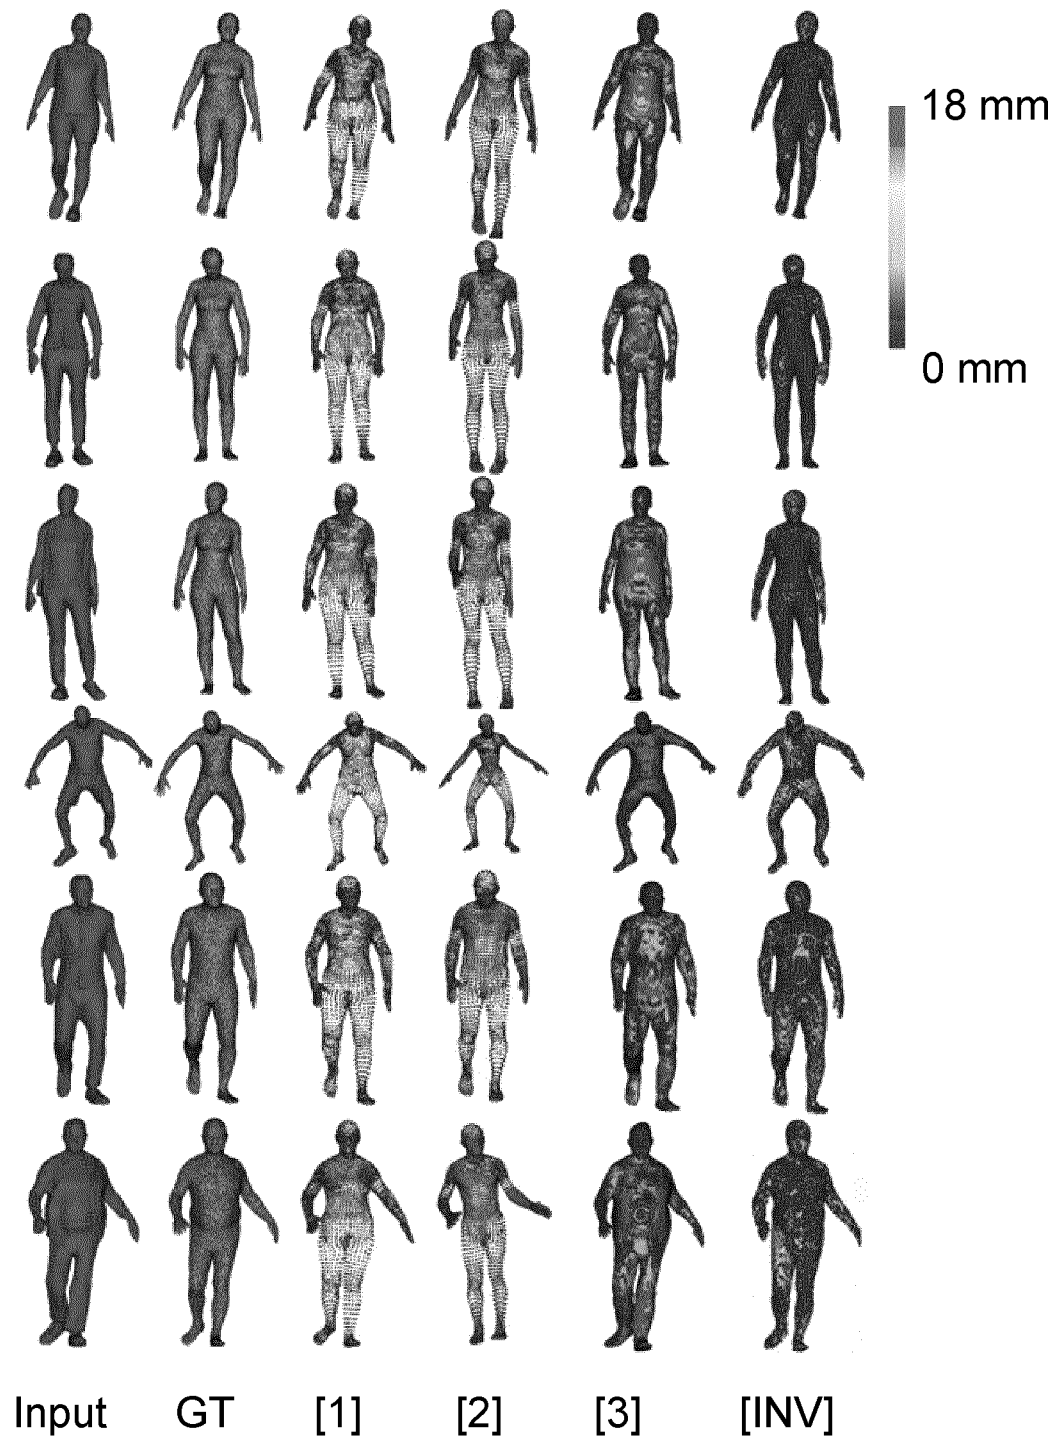


FIG 9

8/8

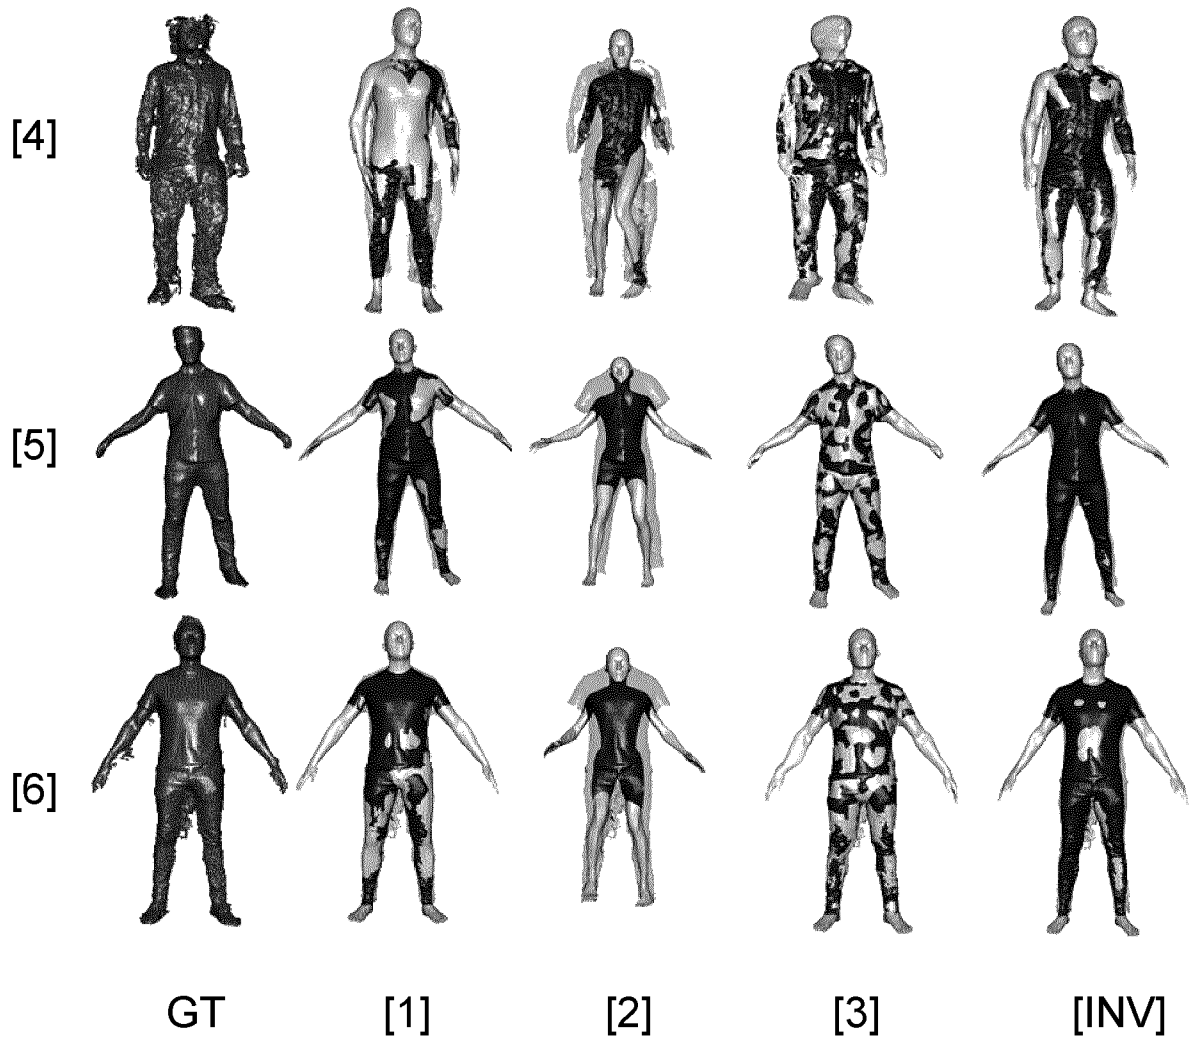


FIG 10

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2020/069611

A. CLASSIFICATION OF SUBJECT MATTER
INV. G06T19/20 G06T13/40
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G06T G06K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2011/156474 A2 (UNIV BROWN [US]; BLACK MICHAEL J [US] ET AL.) 15 December 2011 (2011-12-15) paragraphs [0001] - [0007], [0045] - [0047]; figures 2-8 -----	1-20
A	WUHRER STEFANIE ET AL: "Estimation of human body shape and posture under clothing", COMPUTER VISION AND IMAGE UNDERSTANDING, ACADEMIC PRESS, US, vol. 127, 1 July 2014 (2014-07-01), pages 31-42, XP029043573, ISSN: 1077-3142, DOI: 10.1016/J.CVIU.2014.06.012 Abstract, section 1, section 6 and subsections, in particular 6.2.1 ----- -/--	6,12,14



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

9 October 2020

Date of mailing of the international search report

19/10/2020

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Almeida Garcia, B

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2020/069611

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2015/193628 A1 (TOSHIBA RES EUROP LTD [GB]; TOSHIBA KK [JP]) 23 December 2015 (2015-12-23) abstract; figures 3-5 page 14, lines 15-20 -----	9,10

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2020/069611

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2011156474 A2	15-12-2011	CA 2801593 A1	15-12-2011
		EP 2580708 A2	17-04-2013
		US 2013249908 A1	26-09-2013
		US 2016275693 A1	22-09-2016
		US 2017069102 A1	09-03-2017
		US 2018122146 A1	03-05-2018
		US 2019385381 A1	19-12-2019
		WO 2011156474 A2	15-12-2011

WO 2015193628 A1	23-12-2015	US 2017147874 A1	25-05-2017
		WO 2015193628 A1	23-12-2015
