

(51) International Patent Classification:
G01N 33/68 (2006.01)(21) International Application Number:
PCT/US2013/023226(22) International Filing Date:
25 January 2013 (25.01.2013)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
61/591,181 26 January 2012 (26.01.2012) US(71) Applicant: **LEICA BIOSYSTEMS RICHMOND, INC.**
[US/US]; 5205 Route 12, P.O. Box 528, Richmond,
Illinois 60071 (US).

(72) Inventors; and

(71) Applicants : **HANSEN, Stanley E.** [US/US]; 432 Legend
Lane, McHenry, Illinois 60050-8008 (US). **MYERS, Rus-
sell** [US/US]; 10910 Quail Crossing, Richmond, Illinois
60071 (US). **PAUL, Ronald** [US/US]; 84 Bridle Bit Loop,
Clancy, Montana 59634 (US). **RASMUSSEN, Audra**
[US/US]; 6925 70th Ct., #210, Kenosha, Wisconsin 53142
(US). **TAYLOR, Kate** [AU/AU]; 26 Chelsea Rd., Mel-
bourne, Victoria 3196 (AU).(74) Agents: **HOLTZ, William A.** et al.; Thompson Coburn
LLP, One US Bank Plaza, Saint louis, Missouri 63101
(US).(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU,
RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ,
TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA,
ZM, ZW.(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: METHODS AND COMPOSITIONS FOR HEMATOXYLIN AND EOSIN STAINING

Figure 1. Schematic of typical H and E staining Protocol

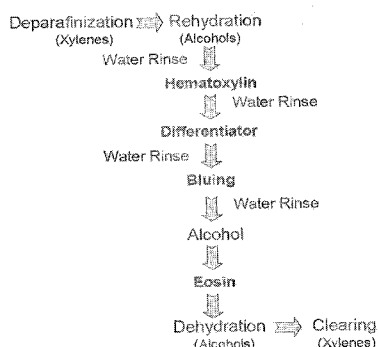


Figure 1

(57) Abstract: The present invention provides for solutions of a defined composition useful in a staining protocol, such as a hematoxylin and eosin staining protocol, when used at certain points of the staining protocol. The formulations of these defined solutions are such that carry-over of the solutions will not negatively impact, or preferably, will stabilize or favorably modify staining reagent solutions coming in contact with the solutions. In certain embodiments of the invention, solutions are buffered to maintain a specific pH that when carried-over-such as carried-over into hematoxylin--will not significantly influence the pH of the next staining reagent.

Cross-Reference to Related Applications

[0001] This application claims the benefit of U.S. Provisional Patent Application No. 61/591,181 filed January 26, 2012, which is incorporated herein by reference in its entirety.

Background

[0002] The hematoxylin and eosin (“H and E”) staining technique is the most commonly used histological technique for the visualization of pathology in tissue specimens. A typical H and E staining system is composed of solutions comprising aluminum based hematoxylin, eosin, a differentiating solution, and a bluing agent. Hematoxylin is a natural dye that when complexed with aluminum ions produces a positively charged molecule that binds to deoxyribonucleic acid to produce a purple coloration of cell nuclei. Differentiation solutions typically are lightly acidic solutions that sharpen the contrast of the stained slide by removing excessive background staining from the tissue and slide. Bluing agents are solutions of a basic pH that when applied to stained specimens modify the structure of the bound hematoxylin to produce a vibrant blue/purple coloration. Eosin is a negatively charged dye that binds to positively charged proteins within the cytoplasm and connective tissue to produce a pink/orange coloration that contrasts with the blue/purple coloration of the nuclei.

[0003] H and E staining is most commonly performed in a “batch” format wherein automated stainers typically contain a series of staining reagent containers and utilize a robotic arm for the sequential movement of slides/racks from one container to another. Typically, a rack or holder is capable of carrying 20 to 30 slides although some staining instruments incorporate racks that hold fewer or greater numbers of slides per rack and in the case of at least one stainer, multiple racks may be placed into a staining vessel simultaneously. Software controlling an automated stainer allows the operator to program the duration of each of the steps as well as the sequence of the steps. While the batch format of staining is simple, economical, and relatively rapid, there are drawbacks with the technique.

[0004] The movement of racks carrying slides from one container to the next results in the carry-over of staining reagents or water. Carry-over occurs due to the adherence of staining reagents or water to the slides, samples, the slide rack, etc. Carry-over is undesirable because it may affect the functionality of the downstream staining reagents in several ways. Carry-over dilutes the concentration of the dyes or functional reagents within a solution. Carry-over and dilution can also affect the functionality of the staining reagent by changing the characteristics of the solvent and thus affecting such parameters such as pH and ionic strength of the solvent. Finally, carry-over may introduce contaminants to the staining reagent.

Acting through these mechanisms, carry-over negatively impacts the performance, functionality, stability, predictability, and capacity of the staining system. Although a single instance of carry-over may result in such negative impacts, the negative impacts of carry-over are especially problematic over the course of multiple staining runs as the negative impacts build or are amplified as the result of the cumulative effects of repeated carry-over.

[0005] Because of the negative effects of carry-over, the capacity or useful life of reagents in current staining systems is highly unpredictable. Reagents are often changed after a predetermined amount of use based on past experience or changed once they start to exhibit signs of or reach the point of failure. Therefore, solutions in current systems are often changed at different rates, i.e., at different times. This adds complexity and inefficiency as staining is continually stopped to change just one or less than all of the solutions. On the other hand, if all of the solutions are changed at once, some of them are discarded while still having useful capacity to process additional slides, and thus money is wasted.

[0006] Typical attempts to address the negative consequences of carry-over have involved replacing staining reagents with fresh solutions, either on a frequent regular basis or even for each individual sample. For example as described in U.S. Patent Nos. 7,468,161 and 8,048,373. In addition, there have been improvements in individual reagent chemistries (hematoxylin, eosin, differentiator and bluing buffer) that may delayed some of the effects of carryover. In at least one case, there has been an attempt to eliminate the effects of carryover due to the mechanical design of the instrument (Dako CoverStainer). However, unpredictability and loss of staining effectiveness due to carryover still remains a major unresolved problem.

Summary of the Invention

[0007] Certain embodiments of the present invention provide for solutions of a defined composition useful in a staining protocol when used at certain points of the staining protocol. The formulations of these solutions are such that carry-over of the solutions will not negatively impact, or preferably, will stabilize or favorably modify staining reagent solutions coming in contact with solutions defined herein. In certain embodiments of the invention, solutions are buffered to maintain a specific pH that when carried-over—such as carried-over into hematoxylin—will not significantly influence the pH of the next staining reagent.

[0008] Certain embodiments of the invention are drawn to methods of reducing the undesirable impact of solution carry-over in an H and E staining system. In certain

embodiments, defined solutions are used at various steps of the staining protocol, such as before certain staining reagent steps, to reduce the undesirable impact of carry-over.

[0009] In particular, certain embodiments of the invention are drawn to a pH buffered solution comprising an organic acid and a polyhydroxy alcohol. In certain embodiments, the pH buffered solution has a pH buffering range that comprises from about pH 2.0 to about pH 5.0. In certain embodiments, the pH buffered solution has a pH buffering range of from about pH 1.0 to about pH 7.0, or from about pH 1.0 to about pH 6.0, or from about pH 1.0 to about pH 5.0., or from about pH 2.0 to about pH 7.0, or from about pH 2.0 to about pH 6.0. Preferably, such pH buffered solution has a pH buffering range of from about pH 2.0 to about pH 5.0. The pH buffered solution may comprise from about 5% to about 30% (v/v) of a polyhydroxy alcohol selected from the group consisting of ethylene glycol, propylene glycol, glycerin, and polyethylene glycol and may comprise from 10 mM to about 100 mM of an organic acid selected from the group consisting of malic acid, citric acid, maleic acid, acetic acid, and tartaric acid. In certain embodiments, the pH buffered solution may also comprise an antimicrobial agent that is effective over at least a pH range of from about pH 2.0 to about pH 5.0.

[0010] Certain embodiments of the invention are drawn to a solution with a pH of from about pH 2.0 to about pH 5.0 comprising aluminum salts and from about 5% to about 30% (v/v) of a polyhydroxy alcohol selected from the group consisting of ethylene glycol, propylene glycol, glycerin, and polyethylene glycol.

[0011] Certain embodiments of the invention are also drawn to a method of staining a tissue specimen with hematoxylin, the method comprising the steps of (i) contacting the specimen to a defined solution of the invention and (ii) transferring the specimen to a hematoxylin staining solution. Additionally, the method may comprise the steps of rinsing the specimen with water and then contacting the specimen with the buffered solution.

[0012] Certain embodiments of the invention are drawn to a kit for performing hematoxylin and eosin staining, the kit comprising a defined solution of the invention and at least one hematoxylin and eosin staining reagent selected from the group consisting of a hematoxylin solution, an eosin solution, a differentiating solution, and a bluing agent solution.

Brief Description of the Drawings

[0013] Figure 1. Figure 1 shows the steps of a typical hematoxylin and eosin staining protocol.

[0014] Figure 2. Figure 2 shows changes in the pH of a hematoxylin solution during the sequential staining of 2,500 slides with specimens. Staining of multiple slides results in an increase in the pH of the hematoxylin solution (solid line). Placement of a buffered solution of defined composition prior to the hematoxylin prevents an increase in pH of the hematoxylin (dashed line).

[0015] Figure 3. Figure 3 shows changes in the quality of hematoxylin staining of specimens following the sequential staining of 2,500 slides. Increased cytoplasmic background staining and loss of detail is present in the 2,500th slide as compared to the first slide.

[0016] Figure 4. Figure 4 shows consistent hematoxylin staining observed in the first and 2,500th sequentially stained specimens. Slides were stained with a protocol using a buffered solution of defined composition of the invention between the tap water rinse and the hematoxylin solution.

Detailed Description

[0017] Headings are provided herein solely for ease of reading and should not be interpreted as limiting.

I. Definitions

[0018] The following definitions are provided to better define the present invention and to guide those of ordinary skill in the art in the practice of the invention. Unless otherwise noted, terms are to be understood according to conventional usage by those of ordinary skill in the relevant art.

[0019] Where a term is provided in the singular, the inventors also contemplate aspects of the invention described by the plural of that term unless otherwise indicated.

As used herein, a “staining reagent” refers to any reagent used in a histological staining protocol. Where it is necessary to understand the invention by specifically referring to “a reagent that is a stain” versus “a reagent in the staining process that is not a stain,” such a distinction is explicitly made.

[0020] As used herein, a “working strength” or “ready-to-use” solution is a solution wherein the components in the solution are at the desired concentration for use in the methods of the present invention. “Ready-to-use” may also imply that the solution does not require any

additional manipulation on the part of the end user such as filtration, skimming, and/or mixing.

[0021] As used herein, “xylene substitutes” which are in widespread use include two classes: terpenes and aliphatic solvents. Representative examples of terpenes include limonene and turpentine.

[0022] Typically, tap water is most economical to use as a rinse step in high capacity H and E staining protocols. Thus, as used herein, the term “water” refers to tap water, but also covers distilled or deionized water or aqueous solutions used to treat or rinse specimens in an H and E staining system.

II. Overview

[0023] It has been discovered that the undesirable impact of solution carry-over in H and E staining protocols can be ameliorated by the use of certain defined solutions in-between certain steps of the protocol. It is believed that the adoption of these solutions and methods will increase the capacity for staining samples (such as those mounted on slides or slides held in racks, etc.), which may translate into cost-savings for end-user. Other expected benefits include an improved user experience due to increased ease of use, more predictability in reagent performance, and decreased effort and labor. In addition, it is believed that the solutions and methods disclosed herein will save time and increase efficiency as the downtime necessary for changing reagents will be reduced. Consistency (quality) of results will also be enhanced as variability introduced through carry-over and dilution of reagents will be minimized and the predictability of reagent performance will also be improved.

III. Hematoxylin and Eosin (“H and E”) Staining

[0024] H and E staining is a widely used staining method for histological purposes. One of skill in the art will recognize that many variations and protocols for H and E staining have been developed and where the present invention is applicable, the present invention is not limited to any specific variation, protocol, system, or the like. A typical H and E staining system may be defined as composed of four core staining reagents: hematoxylin, differentiator, bluing reagent, and eosin, as well as the necessary rinses and solvents utilized for deparaffinization, rehydration, dehydration, and clearing.

[0025] A typical, representative H and E staining protocol comprises the steps of (i) deparaffinization (using xylenes or xylene substitutes), (ii) rehydration (using alcohols), (iii) water rinse, (iv) hematoxylin, (v) water rinse, (vi) differentiator, (vii) water rinse, (viii)

bluing, (ix) water rinse, (x) alcohol, (xi) eosin, (xii) dehydration (using alcohols), and (xiii) clearing (using xylenes or xylene substitutes) (Sheenan, D.C. and Hrapchak, B.B.: *Theory and Practice of Histotechnology* 2nd ed. Columbus, OH, Battelle Press, 1980) (Figure 1). In certain embodiments of the invention, a step of using a defined solution immediately precedes a step in the H and E staining protocol. The composition of the solution is dictated by the staining reagent that the solution is designed to protect from carry-over. In certain preferred embodiments, a step of using a defined solution of the invention immediately precedes a core staining reagent step.

[0026] In certain embodiments of the invention, a step of using a defined solution immediately precedes the hematoxylin step. In certain embodiments of the invention, a step of using a defined solution immediately precedes the differentiator step. In certain embodiments of the invention, a step of using a defined solution immediately precedes the bluing reagent step. In certain embodiments of the invention, a step of using a defined solution immediately precedes the eosin step.

[0027] In certain embodiments of the invention, a solution with a defined composition is placed between a water rinse step and the hematoxylin solution. In certain embodiments, the rinse water is tap water. In this position, the defined solution mitigates several adverse effects of the water on the hematoxylin solution. By reducing the actual volume of water that is carried over from the rinse step into the hematoxylin, the volume of components (for example, ions, chlorine, etc.) within the water (and especially such as found in tap water) that may affect the staining quality or staining capacity of the hematoxylin is reduced. The addition of a buffer to the solution reduces the capacity of the water to increase the pH of the hematoxylin (Figure 2). This is advantageous because an increase in the pH of the hematoxylin results in background staining of tissues and loss of staining detail (Figures 3 and 4).

[0028] In addition to mitigating the adverse effects of carry-over, the defined solution may be formulated to enhance the stability of a hematoxylin exposed to carry-over of the solution. The addition of a polyhydroxy alcohol to the solution to be carried over to the hematoxylin can reduce the likelihood of precipitation of the hematoxylin and can provide value to the user as filtration of the hematoxylin will not be necessary.

[0029] It is understood that a step of “using” a solution means exposing a sample—for example a tissue specimen mounted on a slide—to a solution. A sample may be exposed to a solution, for example, by dunking or immersing it in the solution. A sample may be exposed to a solution, for example, by passing the solution over the sample, such as by passing a

solution over a slide holding a sample. A sample may be exposed to a solution, for example, by dropping or spraying the solution onto a sample. One of skill in the art will recognize that there may be various alternative methods of exposing a sample to a solution during the staining process, and that the method and solutions of the present invention are not limited to any particular method of exposing a sample to solution.

IV. Defined Solutions for Mitigating the Effects of Carry-Over

[0030] One aspect of the present invention provides for solutions of defined composition for mitigating the effects of water or staining reagent carry-over in a histological staining protocol.

[0031] In certain embodiments, the defined solution is a buffered solution comprising an acid, the buffered solution being capable of buffering from between about pH 2.0 to about pH 5.0. In certain embodiments, the acid has a pKa of from about 2.0 to about 5.0. In certain embodiments, the concentration of the acid in the solution is from about 10 mM to about 100 mM. In certain embodiments, the concentration of the acid in the solution is from about 20 mM to about 100 mM. In certain embodiments, the concentration of the acid in the solution is from about 10 mM to about 50 mM or from about 20 mM to about 50 mM. In certain embodiments, the acid is an organic acid. Representative examples of useful organic acids include, but are not limited to, malic acid, citric acid, fumaric acid, tartaric acid, maleic acid, and acetic acid. In certain embodiments, the buffered solution comprises a polyhydroxy alcohol at a concentration of from about 5% to about 30% (v/v). Representative examples of polyhydroxy alcohols include, but are not limited to, ethylene glycol, polyethylene glycol, propylene glycol, and glycerin. In certain embodiments, the solution comprises both an acid and a polyhydroxy alcohol in the amounts and as defined herein. In a certain specific embodiment, the buffered solution is a solution comprising 20 mM tartaric acid and 15% (v/v) ethylene glycol and the solution pH is adjusted to a pH of 3.3. One of skill in the art will understand that there are numerous reagents that can be used to adjust pH. For example, sodium hydroxide (NaOH), potassium hydroxide (KOH), or other hydroxide based compounds, and tartaric acid and its conjugate base. In one embodiment, the pH is adjusted with sodium hydroxide (NaOH).

[0032] In certain embodiments, the defined solution is an unbuffered solution with a pH of from about pH 2.0 to about pH 5.0 comprising aluminum salts. Representative examples of aluminum salts include, but are not limited to, aluminum ammonium sulfate $[\text{AlNH}_4(\text{SO}_4)_2]$, aluminum sulfate $[\text{Al}_2(\text{SO}_4)_3]$, and aluminum potassium sulfate $\text{AlK}(\text{SO}_4)_2$. In certain

embodiments, the unbuffered aluminum salt solution also comprises a polyhydroxy alcohol as described herein at a concentration of from about 15% to about 30% (v/v).

[0033] In certain embodiments, the defined solution is a slightly modified or non-modified formulation of the staining reagent used as the differentiator. In certain embodiments, the slightly modified or non-modified formulation of the staining reagent used as the differentiator is a solution buffered with any acid, where the acid has a pKa of from about 2.5 to about 4.0 and is capable of buffering between a pH of from about pH 1.5 to about pH 5.0. In certain embodiments, the acid is an organic acid. Representative examples of useful organic acids include, but are not limited to, malic acid, citric acid, fumaric acid, maleic acid, acetic acid, and tartaric acid.

[0034] In embodiments encompassing any of the solutions of the invention, or solutions useful in practicing the methods of the invention, an antimicrobial agent may be added to inhibit microbial growth. In certain embodiments, the antimicrobial agent is one that is effective over at least a pH range of from about pH 2.0 to about pH 5.0. Representative examples of microbial agents include sodium azide, PROCLIN 300[®], PROCLIN 150[®], PROCLIN 200[®], and PROCLIN 950[®]. For example, in one embodiment, the solution contains from about 0.03% to about 0.04% (v/v) PROCLIN 300[®] (Sigma Aldrich, St. Louis, MO) to inhibit microbial growth. It is to be understood that example product or trade names known to those of ordinary skill in the art are provided for illustrative purposes only and are not meant to be limiting of the broader genus of reagents described.

[0035] It is contemplated that the defined solutions, such as the buffered solutions, of the invention will be provided as a working strength or ready-to-use solution for H and E staining protocols. However, it is also contemplated that concentrated solutions of two or more components may be prepared wherein a user may add water and/or other components (such as an antimicrobial) to the defined solution to prepare a working strength or ready-to-use solution with the formulations described herein. Thus, the present invention is also drawn to concentrated solutions that can be used to prepare the defined solutions of the invention. Given the amounts of components in the defined solutions provided, it is within the skill of one of ordinary skill in the art to determine what the amounts of components in a concentrated solution must be to provide for a working strength or ready-to-use solution. For example, if the concentrate is to be diluted 1:1 with water, then the concentration of an acid, polyhydroxy alcohol, etc., would be twice what the desired final concentration would be.

V. Methods of Mitigating the Effects of Carry-Over

[0036] One aspect of the present invention provides for methods of mitigating the effects of water or staining reagent carry-over in a histological staining protocol. In general, such methods utilize a defined solution as a step in the staining process between two staining reagent steps or between a water rinse step and a staining reagent step.

[0037] In staining protocols where samples are contacted with staining reagents by immersing the samples in the staining reagents, the samples may also be immersed in the defined solution. In staining protocols where samples are contacted with staining reagents in a manner other than immersion, the samples may be contacted with the defined solution in a likewise manner. It is understood, however, that the manner in which the samples are contacted with the staining reagents does not limit the manner in which the sample may be contacted with the defined solution within the same staining protocol.

[0038] In an H and E staining system, the detrimental effects of carry-over are greatest on the hematoxylin and differentiator solutions, but may affect all stains/reagents in a staining system. Hematoxylin and the differentiator follow water rinses in a typical H and E staining schedule. The performance of these two solutions is highly dependent upon pH and the introduction of water to these solutions results in an increase in pH. One effect of increased pH on these solutions is an increase in the background staining of hematoxylin. In certain embodiments, a sample is contacted with a defined solution immediately before being contacted with a hematoxylin staining solution. In certain embodiments, the sample is contacted with a defined solution immediately after being rinsed in water and immediately before being contacted with a hematoxylin staining solution. In certain embodiments, the pH of the hematoxylin solution will increase less than 0.30 pH units when exposed to a buffered solution carried over from prior immersion of the specimen in the buffered solution. In certain embodiments, the pH of the hematoxylin solution will increase less than 0.20 pH units when exposed to a buffered solution carried over from prior immersion of the specimen in the buffered solution. It is understood that not only will the pH of the hematoxylin solution increase less than 0.30 pH units, or less than 0.2 pH units, when exposed to a buffered solution carried over from prior immersion of the specimen in the buffered solution when carrying out the steps of the method once, but that a particular advantage of the inventions is that the pH of hematoxylin solution will not increase after repeated exposures to carryover of the buffered solution.

[0039] In certain embodiments, a sample is contacted with a defined solution immediately before being contacted with a differentiator solution. In certain embodiments, the sample is

contacted with a defined solution immediately after being rinsed with water and immediately before being contacted with a differentiator solution.

[0040] Use of the described methods may allow for up to 2,000 standard specimen slides to be processed under standard H and E staining procedures before new reagents are substituted. In certain embodiments, use of the methods may allow for up to 2,700 slides to be processed before new reagents are substituted. Further, in certain embodiments, use of the methods may allow for up to 3,000 slides to be processed before new reagents are substituted. It is understood by those of skill in the art that the capacity to process a certain number of specimen slides refers to the capacity to process such a number without observing an adverse effect on staining that would be unacceptable for the purpose for which the slides are being stained. It is further contemplated that use of the reagents and methods of the invention used in combination with mechanical methods that reduce, but do not completely eliminate carry-over, will also significantly enhance the number of slides that may be stained using a given set of reagents.

[0041] Methods of the invention may also include the step of diluting a concentrated solution, such as diluting with water, to a final working strength or ready-to-use defined solution. Methods of the invention may also include the step of adding a component, such as an antimicrobial, to prepare a ready-to-use defined solution. This step would be performed before using the defined solution in an H and E staining protocol.

VI. Kits and Methods of Use

[0042] One aspect of the present invention is drawn to kits for performing H and E staining. Such kits comprise at least a defined solution that mitigates the effects of solution carry-over. Useful defined solutions are described in detail in this application and include buffered and unbuffered solutions. Representative kits of the invention may also comprise one or more staining reagents or other components used for H and E staining. Examples of staining reagents used for H and E staining include hematoxylin solution, eosin solution, a differentiating solution, and a bluing agent solution. Examples of other components used for H and E staining include xylenes, xylene substitutes, and alcohols. In certain embodiments, the kit comprises at least the five reagents: (1) hematoxylin solution, (2) eosin solution, (3) a differentiating solution, (4) a bluing agent solution, and (5) a defined solution that mitigates the effects of solution carry-over.

[0043] Another aspect of the invention is drawn to methods of using a kit for performing H and E staining. The procedure for performing the H and E staining includes using a defined

solution that mitigates the effects of carry-over as described in detail in this application. The use of a kit provides numerous benefits. Current H and E staining procedures and reagents are subject to the negative effects of solution carry-over, often necessitating that the solutions be changed at different rates. The inclusion of a defined solution that mitigates the effects of solution carry-over in a kit provides for a predictable lifespan of all the kit reagents that is consistent, such that the kit reagents require changing at the same time. For example, use of the kit reagents may allow for up to 2,000 standard specimen slides to be processed using standard H and E staining procedures before new reagents are substituted. Or use of the kit may allow for up to 2,700 slides to be processed before new reagents are substituted. Or use of the kit may allow for up to 3,000 slides to be processed before new reagents are substituted.

EXAMPLES

[0044] The following disclosed embodiments are merely representative of the invention which may be embodied in various forms. Thus, specific structural, functional, and procedural details disclosed in the following examples are not to be interpreted as limiting.

Example 1.

[0045] All staining was performed on either the LEICA® ST-5010 AUTOSTAINER™ or the LEICA® ST-5020 MULTISTAINER™ utilizing a standard H and E program as outlined in Figure 1 and Table 1. The goal of the depletion study was to evaluate the chemical and functional (staining) changes that occur during sequential staining of numerous slides. In a typical depletion study (Table 1) the hematoxylin, differentiator, bluing agent and eosin were not changed during the entire depletion study while all of the other components (alcohols and xylenes) were rotated or changed at 300 slide intervals. Staining of control tissue specimens on multi-tissue control slides (functional staining) and determination of the pH of the hematoxylin were performed at 150 slide intervals. A standard depletion study incorporated a total of 2,700 slides (90 30-slide racks).

[0046] Other staining runs incorporated an additional buffered reagent of defined composition places between the tap-water rinse and the hematoxylin step (Table 2). This solution was designed to mitigate the effects of carry-over of the tap-water into the hematoxylin. This solution like the hematoxylin, differentiator, bluing agent, and eosin was not changed during the depletion study. As with the study described above, staining of

control tissue specimens on multi-tissue control slides (functional staining) and determination of the pH of the hematoxylin were performed at 150 slide intervals.

[0047] Figure 2 demonstrates the increase in pH of the hematoxylin that occurs as slide racks with slides carry over tap-water to the hematoxylin. In contrast, the placement of a buffered reagent of defined composition between the tap water and the hematoxylin displaces the tap-water from the slides prior to movement into the hematoxylin solution. As a result, the pH of the hematoxylin remains stable.

[0048] Table 1 shows a standard H and E protocol performed on a LEICA® ST-5010XL™ Automated Stainer.

Leica AutoStainer ST5010 XL						Withdrawal
Step	Station	Reagent	Time	Exact	Dips	Speed
1	Oven		0:00:00	NO	2	9
2	1	Xylene	0:03:00	NO	2	9
3	2	Xylene	0:03:00	NO	2	9
4	3	Xylene	0:02:00	NO	2	9
5	4	100% Reagent Alcohol	0:01:00	NO	2	9
6	5	100% Reagent Alcohol	0:01:00	NO	2	9
7	6	100% Reagent Alcohol	0:01:00	NO	2	9
8	7	80% Reagent Alcohol	0:01:00	NO	2	9
9	WSH 1	Water Wash	0:01:00	NO	2	9
10	8	Hematoxylin	0:03:00	YES	2	9
11	WSH 5	Water Wash	0:03:00	YES	2	9
12	9	Differentiator	0:00:45	YES	2	9
13	WSH 4	Water Wash	0:02:00	YES	2	9
14	10	Bluing	0:01:00	NO	2	9
15	WSH 3	Water Wash	0:02:00	YES	2	9
16	11	80% Reagent Alcohol	0:01:00	NO	2	9
17	12	Eosin	0:01:00	NO	2	9
18	13	100% Reagent Alcohol	0:01:00	YES	2	9
19	14	100% Reagent Alcohol	0:01:00	YES	2	9
20	15	100% Reagent Alcohol	0:01:00	YES	2	9
21	16	Xylene	0:01:00	YES	2	9
22	17	Xylene	0:01:00	NO	2	9
23	18	Xylene	0:01:00	NO	2	9
24	EXIT	Xylene				

[0049] Table 2 shows an H and E protocol using a buffered solution of defined composition places between the tap water rinse step and hematoxylin step (Step 10 in Table 2) on a LEICA® ST-5010XL™ Automated Stainer.

Leica ST5010 Autostainer XL						Withdrawal
Step	Bath-Station	Reagent	Time	Exact	Dips	Speed
1	LOAD	-----	0:00:00	NO	2	9
2	1	Xylene	0:02:00	NO	2	9
3	2	Xylene	0:02:00	NO	2	9
4	3	Xylene	0:02:00	NO	2	9
5	4	100% Reagent Alcohol	0:01:00	NO	2	9
6	5	100% Reagent Alcohol	0:01:00	NO	2	9
7	6	100% Reagent Alcohol	0:01:00	NO	2	9
8	7	80% Reagent Alcohol	0:01:00	NO	2	9
9	WSH 1	Water Wash	0:01:00	NO	2	9
10	WSH 2	Buffered Solution	0:00:30	YES	2	9
11	8	ST-Hematoxylin	0:03:00	YES	2	9
12	WSH 5	Water Wash	0:02:00	YES	2	9
13	9	ST-Differentiator	0:00:45	YES	2	9
14	WSH 4	Water Wash	0:01:00	NO	2	9
15	10	ST-Bluing Reagent	0:01:00	YES	2	9
16	WSH 3	Water Wash	0:01:00	NO	2	9
17	11	80% Reagent Alcohol	0:01:00	NO	2	9
18	12	ST-Eosin	0:01:00	YES	2	9
19	13	100% Reagent Alcohol	0:01:00	YES	2	9
20	14	100% Reagent Alcohol	0:01:00	YES	2	9
21	15	100% Reagent Alcohol	0:01:00	YES	2	9
22	16	Xylene	0:01:00	NO	2	9
23	17	Xylene	0:01:00	NO	2	9
24	18	Xylene	0:01:00	NO	2	9
25	EXIT	Xylene				

[0050] Table 3 shows a representative example of a buffered solution of defined composition of the invention, such as for use immediately prior to contacting a specimen slide with hematoxylin solution. The pH is adjusted to 3.33 with 2N NaOH.

Raw Material	1 liter formula
Deionized Water	850.00 ml
Tartaric Acid	3.10 g
Ethylene Glycol	150.00 ml
PROCLIN 300®	0.30 ml
Sodium Hydroxide (1M solution)	14.00 ml

CLAIMS

What is claimed is:

1. A pH buffered solution comprising an organic acid and a polyhydroxy alcohol, wherein the pH buffered solution has a pH buffering range that comprises from about pH 2.0 to about pH 5.0.
2. The pH buffered solution of claim 1 wherein the pH buffered solution has a pH buffering range of from about pH 2.0 to about pH 5.0.
3. The pH buffered solution of claim 1 wherein the pH buffered solution comprises from about 5% to about 30% (v/v) of a polyhydroxy alcohol selected from the group consisting of ethylene glycol, propylene glycol, glycerin, and polyethylene glycol.
4. The pH buffered solution of claim 1 wherein the pH buffered solution comprises from about 5% to about 30% (v/v) of ethylene glycol.
5. The pH buffered solution of any of claims 1 to 4, wherein the organic acid is selected from the group consisting of malic acid, citric acid, maleic acid, acetic acid, and tartaric acid.
6. The pH buffered solution of any of claims 1 to 4, wherein the organic acid is selected from the group consisting of malic acid, citric acid, and tartaric acid.
7. The pH buffered solution of any of claims 1 to 4, wherein the organic acid is tartaric acid.
8. The pH buffered solution of any of claims 1 to 7, wherein the pH buffered solution comprises a concentration of from about 10 mM to about 100 mM of the organic acid.
9. The pH buffered solution of any of claims 1 to 8, wherein the pH buffered solution is buffered such that the pH is maintained between about pH 2.0 to about pH 5.0 when water is introduced into the solution.

10. The pH buffered solution of claim 1 wherein the pH buffered solution comprises from about 10 mM to about 100 mM of tartaric acid and from about 5% to about 30% (v/v) of ethylene glycol.
11. The pH buffered solution of any of claims 1 to 10 further comprising an antimicrobial agent that is effective over at least a pH range of from about pH 2.0 to about pH 5.0.
12. A solution with a pH of from about pH 2.0 to about pH 5.0 comprising aluminum salts and from about 5% to about 30% (v/v) of a polyhydroxy alcohol selected from the group consisting of ethylene glycol, propylene glycol, glycerin, and polyethylene glycol.
13. The solution of claim 12 wherein the aluminum salts are selected from the group comprising aluminum ammonium sulfate, aluminum sulfate, and aluminum potassium sulfate.
14. A method of staining a tissue specimen with hematoxylin, the method comprising the steps of (i) contacting the specimen with a pH buffered solution of any of claims 1 through 11 and (ii) transferring the specimen to a hematoxylin staining solution.
15. The method of claim 14 further comprising rinsing the specimen with water before contacting the specimen with the pH buffered solution.
16. The method of claim 15 wherein the pH buffered solution maintains a pH of from about pH 2.0 to about pH 5.0 when exposed to water carried over from prior contact of the specimen with water.
17. The method of any of claims 14 to 16 wherein the pH of the hematoxylin staining solution increases less than 0.30 pH units when exposed to pH buffered solution carried over from prior contact of the specimen with the pH buffered solution.
18. The method of any of claims 14 to 16 wherein the hematoxylin solution retains its staining capacity longer without an adverse change in staining characteristics than performing hematoxylin staining without contacting the specimen with the pH buffered solution.

19. The method of any of claims 14 to 18 wherein the method provides the capacity to stain at least about 2,700 standard specimen slides without an adverse change in staining characteristics using standard H & E staining procedures without changing the staining reagents.
20. A kit for performing hematoxylin and eosin staining, the kit comprising a pH buffered solution of any of claims 1 to 11 and at least one hematoxylin and eosin staining reagent selected from the group consisting of a hematoxylin solution, an eosin solution, a differentiating solution, and a bluing agent solution.
21. The kit of claim 20 comprising (i) a pH buffered solution of any of claims 1 to 11 and (ii) a hematoxylin solution, (iii) an eosin solution, (iv) a differentiating solution, and (v) a bluing agent solution.
22. The kit of claims 20 or 21 wherein the pH buffered solution has a pH buffering range of from about pH 2.0 to about pH 5.0.
23. The kit of any of claims 20 to 22 wherein the pH buffered solution comprises from about 5% to about 30% (v/v) of a polyhydroxy alcohol selected from the group consisting of ethylene glycol, propylene glycol, glycerin, and polyethylene glycol.
24. The kit of any of claims 20 to 23 wherein the pH buffered solution comprises from about 5% to about 30% (v/v) of ethylene glycol.
25. The kit of any of claims 20 to 24, wherein the organic acid is selected from the group consisting of malic acid, citric acid, maleic acid, acetic acid, and tartaric acid.
26. The kit of any of claims 20 to 25, wherein the organic acid is selected from the group consisting of malic acid, citric acid, and tartaric acid.
27. The kit of any of claims 20 to 26, wherein the organic acid is tartaric acid.
28. The kit of any of claims 20 to 27, wherein the pH buffered solution comprises a concentration of from about 10 mM to about 100 mM of the organic acid.

29. The kit of any of claims 20 to 28, wherein the pH buffered solution is buffered such that the pH is maintained between about pH 2.0 to about pH 5.0 when water is introduced into the solution.
30. The kit of claim 20 wherein the pH buffered solution comprises from about 10 mM to about 100 mM of tartaric acid and from about 5% to about 30% (v/v) of ethylene glycol.

Figure 1. Schematic of typical H and E staining Protocol

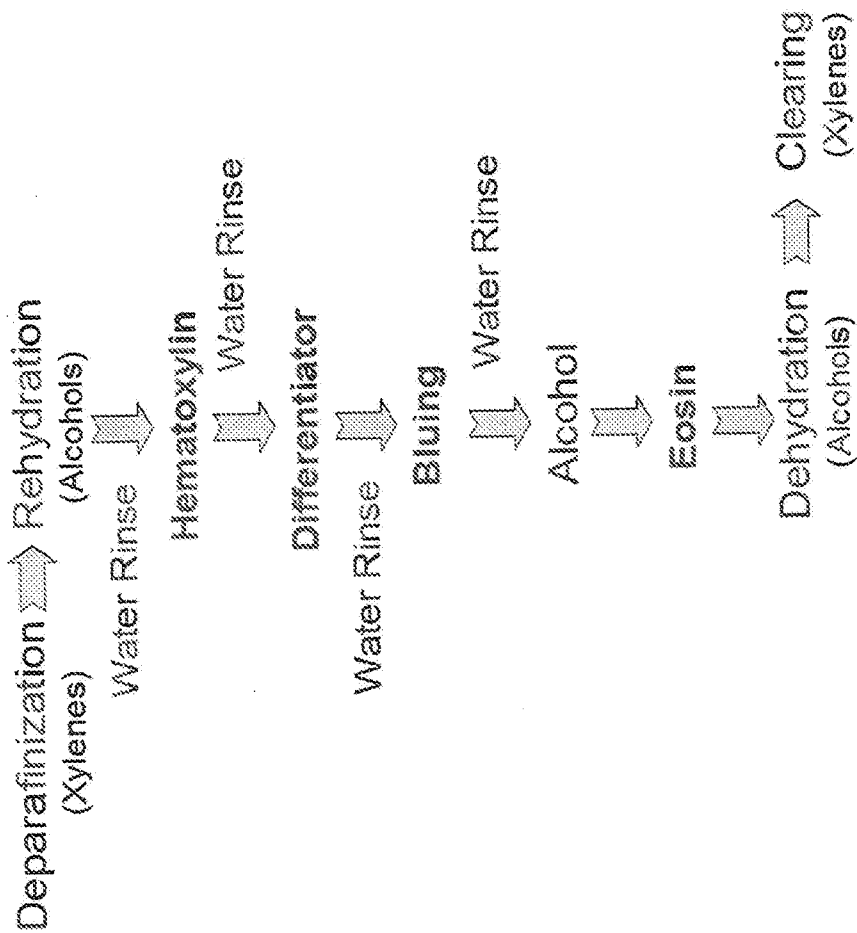


Figure 1



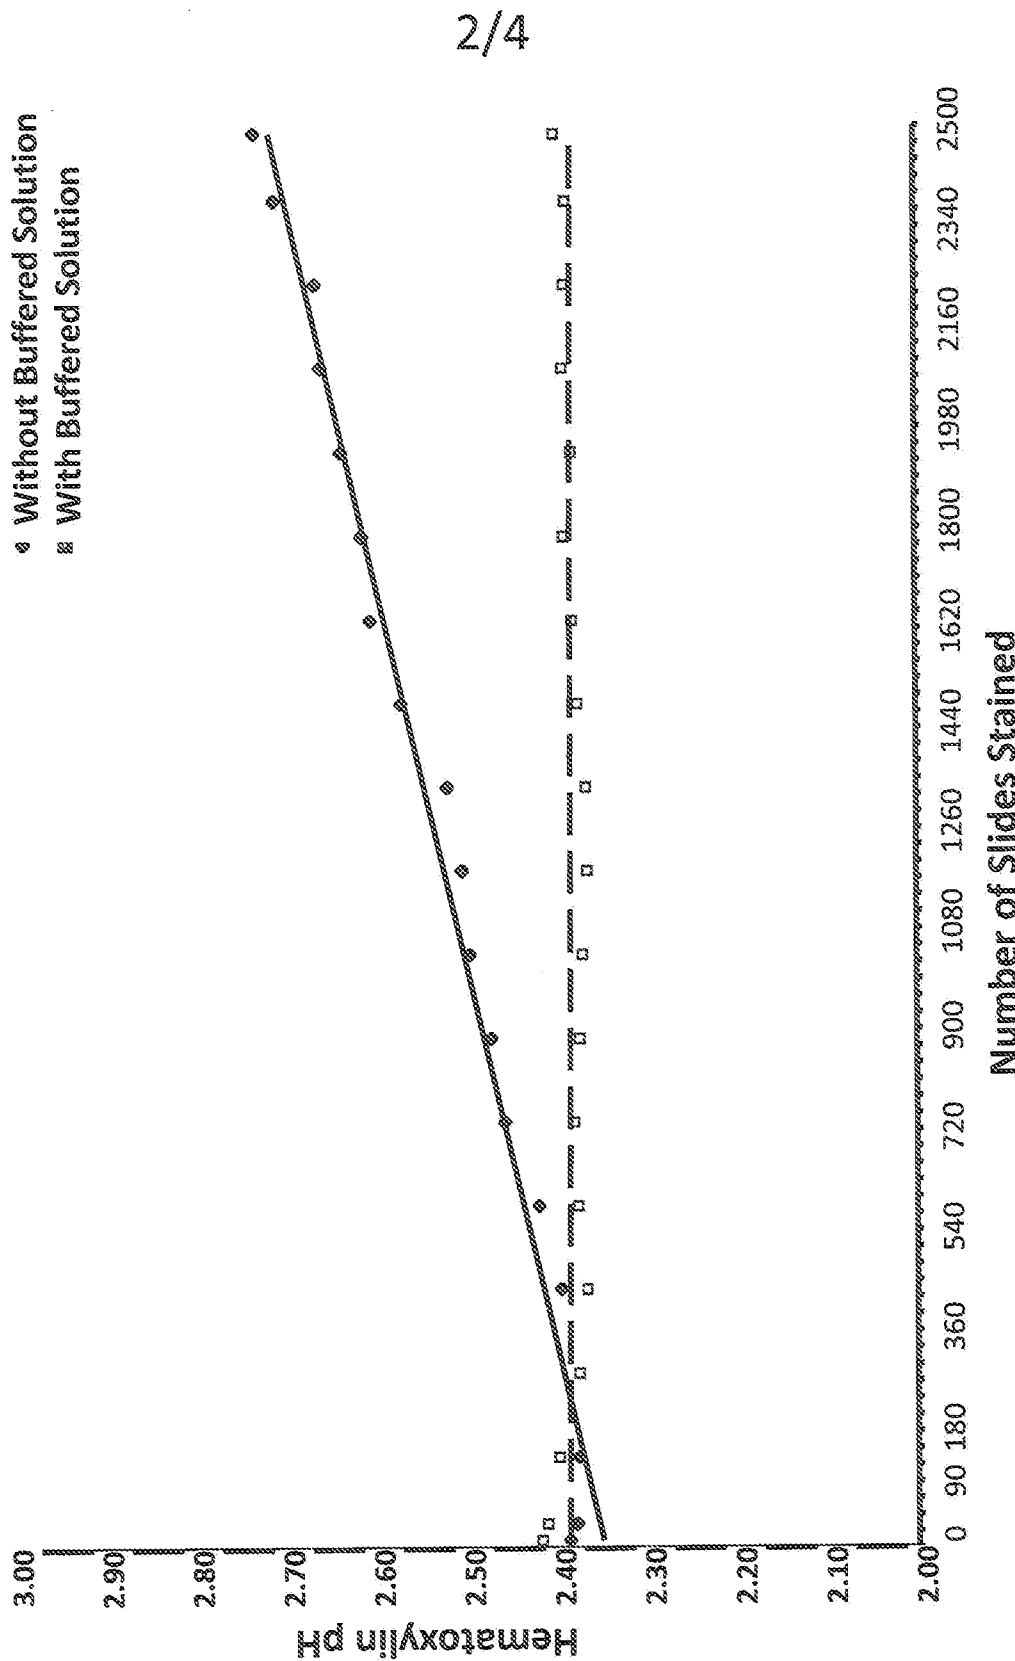


Figure 2

3/4

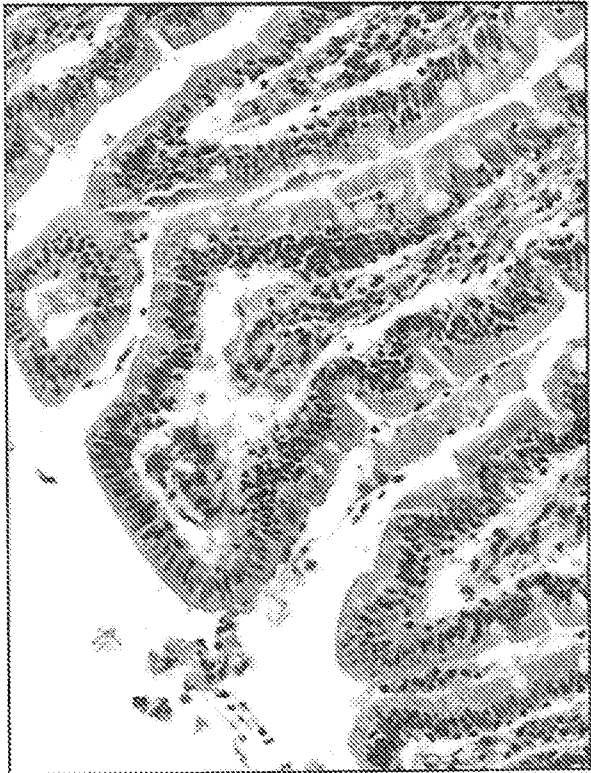


2500 Slides

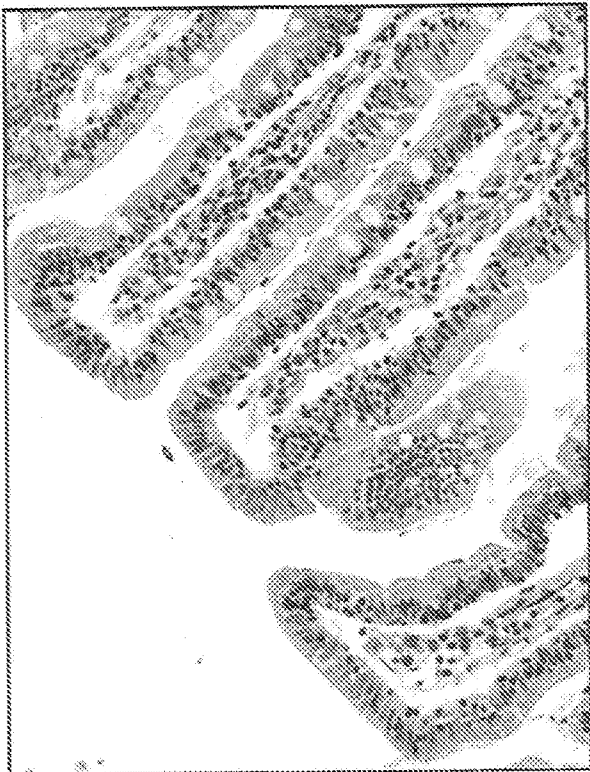

First Slide

Figure 3

4/4

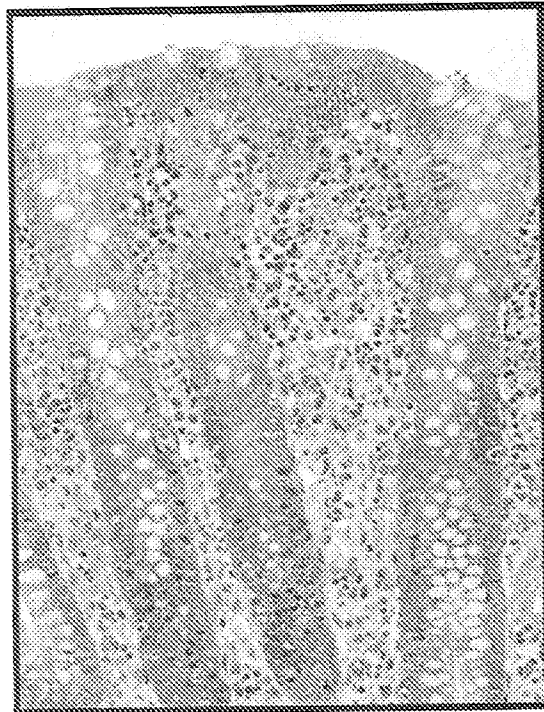

2500 Slides

First Slide

Figure 4

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/023226

A. CLASSIFICATION OF SUBJECT MATTER
INV. G01N33/68
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
G01N

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data, BIOSIS

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2009/148885 A2 (VENTANA MED SYST INC [US]; BEER JONATHAN [US]; REINHARDT KURT [US]) 10 December 2009 (2009-12-10) (p 17, para 2)(p 19, para 1)(p 15, last para to p 16, last para); abstract	1-30
X	WO 2008/112993 A1 (VENTANA MED SYST INC [US]; KOSMEDER JEROME W [US]; BIENIARZ CHRISTOPHE) 18 September 2008 (2008-09-18) claims 1, 7-10, 20, 26, 37, 43 and 53 ----- -/-	1-30



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

19 March 2013

Date of mailing of the international search report

27/03/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Bigot-Maucher, Cora

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2013/023226

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	GRAHAM E T: "A QUICK-MIXED ALUMINUM HEMATOXYLIN STAIN", BIOTECHNIC AND HISTOCHEMISTRY, WILLIAMS & WILKINS, BALTIMORE, MD, US, vol. 66, no. 6, 1 January 1991 (1991-01-01), pages 279-281, XP009168046, ISSN: 1052-0295 p 279, col 2, para 1; para 2;; abstract -----	1-30
X	CLARK G: "EFFECTS OF ADDITIVES ON ALUM HEMATOXYLIN STAINING SOLUTIONS", STAIN TECHNOLOGY, vol. 50, no. 2, 1975, pages 115-118, XP002693855, ISSN: 0038-9153 abstract -----	1-30

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2013/023226

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2009148885 A2	10-12-2009	CN 102037484 A	27-04-2011
		TW 201013567 A	01-04-2010
		WO 2009148885 A2	10-12-2009

WO 2008112993 A1	18-09-2008	AU 2008224935 A1	18-09-2008
		CA 2678903 A1	18-09-2008
		EP 2130023 A1	09-12-2009
		JP 2010521678 A	24-06-2010
		US 2008227143 A1	18-09-2008
		US 2012276584 A1	01-11-2012
		WO 2008112993 A1	18-09-2008
