



- (51) **International Patent Classification:**  
A63F 13/30 (2014.01)
- (21) **International Application Number:**  
PCT/US20 13/0748 13
- (22) **International Filing Date:**  
12 December 2013 (12. 12.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (30) **Priority Data:**  
13/792,664 11 March 2013 (11.03.2013) US
- (71) **Applicant:** SONY COMPUTER ENTERTAINMENT AMERICA LLC [US/US]; 2207 Bridgepointe Pkwy, San Mateo, California 94404 (US).
- (72) **Inventor:** ZALEWSKI, Gary; c/o Sony Computer Entertainment America LLC, 2207 Bridgepointe Pkwy, San Mateo, California 94404 (US).
- (74) **Agent:** ISENBERG, Joshua; JDI Patent, 809 Corporate Way, Fremont, California 94539 (US).

- (81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.
- (84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

[Continued on nextpage]

(54) **Title:** USER-BASED MINI-GAME GENERATION AND DISTRIBUTION

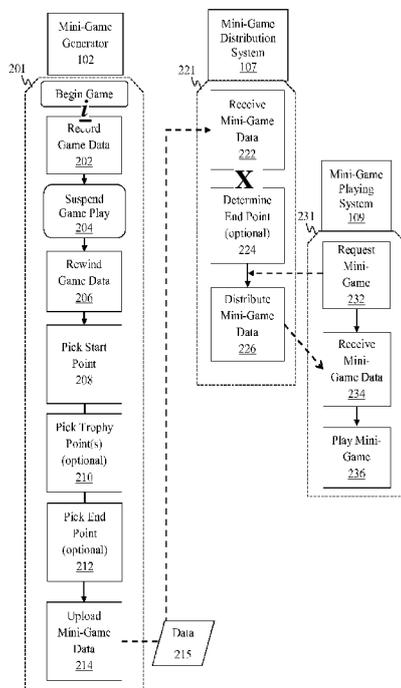


FIG. 2

**iS?) Abstract:** A mini-game may be generated by recording game data during play of a video game on a computer game system, suspending play of the video game in response to a first input to the computer game system, rewinding the recorded game data to a start point in response to a second input to the computer game system, and uploading recorded game data representing a state of the video game at the start point to a remote mini-game distribution system. The mini-game data may be distributed to other game playing systems. It is emphasized that this abstract is provided to comply with rules requiring an abstract that will allow a searcher or other reader to quickly ascertain the subject matter of the technical disclosure. This abstract is submitted with the understanding that it will not be used to interpret or limit the scope or meaning of the claims.

WO 2014/163682 A1



## USER-BASED MINI-GAME GENERATION AND DISTRIBUTION

### CLAIM OF PRIORITY

This application is a nonprovisional of U.S. Provisional Patent Application No. 61/694,718,  
5 filed August 29, 2012, the entire disclosures of which are incorporated herein by reference.

### CROSS-REFERENCE TO RELATED APPLICATION

This application is related to commonly-assigned, co-pending provisional application serial  
no. 61/666,628, (Attorney Docket Number SCEA12004US00) filed the same day as the  
present application, and entitled "DETERMINING TRIGGERS FOR CLOUD-BASED  
10 EMULATED GAMES", the entire disclosures of which are incorporated herein by reference.

This application is related to commonly-assigned, co-pending provisional application serial  
no. 61/666,645, (Attorney Docket Number SCEA12005US00) filed the same day as the  
present application, and entitled "HAPTIC ENHANCEMENTS FOR EMULATED VIDEO  
GAME NOT ORIGINALLY DESIGNED WITH HAPTIC CAPABILITIES", the entire  
15 disclosures of which are incorporated herein by reference.

This application is related to commonly-assigned, co-pending provisional application serial  
no. 61/666,665, (Attorney Docket Number SCEA12006US00) filed the same day as the  
present application, and entitled "CONVERSION OF HAPTIC EVENTS INTO SCREEN  
EVENTS", the entire disclosures of which are incorporated herein by reference.

20 This application is related to commonly-assigned, co-pending provisional application serial  
no. 61/666,679, (Attorney Docket Number SCEA12007US00) filed the same day as the  
present application, and entitled "SUSPENDING STATE OF CLOUD-BASED LEGACY  
APPLICATIONS", the entire disclosures of which are incorporated herein by reference.

### FIELD OF THE DISCLOSURE

25 The present disclosure is related to video games. Among other things, this disclosure  
describes a method and apparatus for generating, distributing, and playing mini-games.

### BACKGROUND OF THE INVENTION

Finding new ways to play preexisting video games can increase the longevity of older games.  
Instead of replaying the same level or completing the same missions repeatedly, gamers often  
30 desire new challenges when replaying legacy games. In response to this need, game  
designers have begun to produce mini-games. Within a mini-game, the gamer can be

instructed to complete new objectives or challenge their friends for high scores in a format that was not originally designed into the legacy game. Further, since the mini-game is derived from an existing game, gamers already know the characters and basic components of the game, and are therefore more likely to play the mini-game.

5 Mini-games often do not begin at traditional starting points that were used in the original game. For example, the mini-game may begin near the end of a level, just prior to facing a final opponent, or the boss of the level. A boss is an enemy-based challenge which is found in many video games. Bosses are generally seen at the climax of a particular section of the game, usually at the end of a stage or level. Due to the climactic nature of fighting a boss,  
10 mini-game designers may choose to use this section of the game as their starting point. In order to make the mini-game more challenging than the original version, the game designer may also want to limit the number of lives a player may use, or change other game parameters such as the amount of health the main character has remaining. Other game scenarios may be chosen as starting points for a min-game. For example a mini-game may  
15 begin with the game player being the batter in a baseball game where there are two outs in the bottom of the ninth inning and the batter's team is down by one run.

However, in order to generate mini-games that start with these specific circumstances a game designer must reverse engineer the underlying code in each game and then rewrite the code to enable the mini-game to start under these specific conditions. This process is time  
20 consuming and expensive, because it may require multiple engineers to redevelop a single legacy game. Additionally since mini-games are shorter than full-length games, there is a need to produce mini-games in larger quantities.

It is within this context that aspects of the present disclosure arise.

#### BRIEF DESCRIPTION OF THE DRAWINGS

25 FIG. 1 is a schematic diagram illustrating mini-game generator, mini-game distribution system, and mini-game playing system according to various aspects of the present disclosure.

FIG. 2 is a flow diagram illustrating methods of generating, distributing, and playing mini-games according to various aspects of the present disclosure.

FIGs. 3A-3B are schematic diagrams illustrating an example of a mini-game generator  
30 generating mini-game data according to an aspect of the present disclosure.

FIG. 4A is a block diagram illustrating a non-transitory computer-readable medium containing instructions for generating a mini-game according to an aspect of the present disclosure.

FIG. 4B is a block diagram illustrating a non-transitory computer-readable medium  
5 containing instructions for distributing a mini-game according to an aspect of the present disclosure.

FIG. 4C is a block diagram illustrating a non-transitory computer-readable medium containing instructions for playing a mini-game according to an aspect of the present disclosure.

#### 10 DETAILED DESCRIPTION OF THE DRAWINGS

Although the following detailed description contains many specific details for the purposes of illustration, anyone of ordinary skill in the art will appreciate that many variations and alterations to the following details are within the scope of the present disclosure.

Accordingly, the aspects of the present disclosure described below are set forth without any  
15 loss of generality to, and without imposing limitations upon, the claims that follow this description.

Aspects of the present disclosure include methods and apparatus that allow individual gamers to create, distribute, and play their own mini-games. Mini-game data can be generated and distributed using middleware that generates mini-game based on game play with an existing  
20 game title. The mini-games may be created through use of a software add-on that records relevant game data as a gamer plays an existing game. According to other aspects, certain methods and apparatus may also allow any gamer to remotely access and play such mini-games using mini-game data and middleware in conjunction with the existing game title.

In order to create mini-games without reverse engineering and recoding, middleware may be  
25 configured that allows gamers to produce, distribute, and play mini-games without having to dig into the code of an existing game.

FIG. 1A is a schematic diagram illustrating components that can interact to implement mini-game generation, distribution, and play according various aspects of the present disclosure. One or more mini-game generators **102** may access one or more mini-grime distribution  
30 systems **107** over a network **160**, which may be, e.g., a local area network (LAN) or a wide

area network (WAN). One or more mini-game playing systems **109** may access the mini-game distribution system **107** via the network **160**. The mini-game generator **102** and mini-game playing system **109** may be similarly configured or even substantially identical to each other. Additionally, the mini-game generator **102** may be contained within the mini-game distribution system **107** and may communicate directly with the mini-game playing systems **109** over the network **160**.

The mini-game generator **102** may include a central processor unit (CPU) **131**. By way of example, a CPU **131** may include one or more processor cores, which may be configured according to, e.g., a dual-core, quad-core, multi-core, architecture. Alternatively, the CPU may be based on an architecture that uses one or more main processor cores in conjunction with one or more co-processor cores, such as a Cell processor architecture. The mini-game generator **102** may also include a memory **132** (e.g., RAM, DRAM, ROM, and the like). The CPU **131** may execute a mini-game generation program **133**, portions of which may be stored in the memory **132** along with mini-game data **136**. A game program **135** may also be stored in the memory **132** and executed on the CPU **131**. The mini-game program **133** may be configured as middleware that operates in conjunction with one or more game programs **135** to generate a mini-game from game play with the game program.

The mini-game generator **102** may also include well-known support circuits **140**, such as input/output (I/O) circuits **141**, power supplies (P/S) **142**, a clock (CLK) **143** and cache **144**. The mini-game generator **102** may optionally include a mass storage device **134** such as a disk drive, CD-ROM drive, tape drive, or the like to store programs and/or data. The mini-game generator **102** may also optionally include a display unit **137** and a user interface unit **138** to facilitate interaction between the mini-game generator **102** and a user who requires direct access to the mini-game generator **102**. The display unit **137** may be in the form of a cathode ray tube (CRT) or flat panel screen that displays text, numerals, or graphical symbols. The user interface unit **138** may include a keyboard, mouse, joystick, touch pad, touch screen, or other device. A controller **145** may be connected to the mini-game generator **102** through the I/O circuit **141** or it may be directly integrated into the mini-game generator **102**. The controller **145** may facilitate interaction between the *mini*-game generator **102** and a user. The controller **145** may include a keyboard, mouse, joystick, light pen, hand-held controls or other device. The controller **145** is also may be capable of generating a haptic response **146**. By way of example and not by way of limitation, the haptic response **146** may

be vibrations or any other feedback corresponding to the sense of touch. The mini-game generator **102** may include a network interface **139**, configured to enable the use of Wi-Fi, an Ethernet port, or other communication methods.

The network interface **139** may incorporate suitable hardware, software, firmware or some  
5 combination of two or more of these to facilitate communication via an electronic communications network **160**. The network interface **139** may be configured to implement wired or wireless communication over local area networks and wide area networks such as the Internet. The mini-game generator **102** may send and receive data and/or requests for files via one or more data packets over the network **160**.

10 The preceding components may exchange signals with each other via an internal system bus **150**. The snapshot generator **102** may be a general purpose computer that becomes a special purpose computer when running code that implements embodiments of the present invention as described herein.

The mini-game generator **102** may be a general purpose computer that becomes a special  
15 purpose computer when running code that implements mini-game generation methods according to certain aspects of the present invention as described herein. By way of example, and not by way of limitation, the mini-game generator **102** may be an electronic gaming device, such as a game console or portable gaming device. Furthermore the mini-game generator may be a suitable configured general-purpose electronic device, such as a  
20 smartphone, personal computer, laptop, tablet computer that is configured to implement mini-game generation through appropriate programming.

The mini-game distribution system **107** may include a central processor unit (CPU) **131'**. By way of example, a CPU **131'** may include one or more processors, which may be configured according to, e.g., a dual-core, quad-core, multi-core, or processor-co-processor (e.g., Cell  
25 processor) architecture. The mini-game distribution system **107** may also include a memory **132'** (e.g., RAM, DRAM, ROM, and the like). The CPU **131'** may execute a mini-game distribution program **133'**, portions of which may be stored in the memory **132'** along with mini-game data **136'**. The emulator **107** may also include well-known support circuits **140'**, such as input/output (I/O) circuits **141'**, power supplies (P/S) **142'**, a clock (CLK) **143'** and  
30 cache **144'**. The mini-game distribution system **107** may optionally include a mass storage device **134'** such as a disk drive, CD-ROM drive, tape drive, or the like to store programs

and/or data, including mini-game data and or game programs. The mini-game distribution system **107** may optionally include a display unit **137'** and user interface unit **138'** to facilitate interaction between the mini-game distribution system **107** and a user. The display unit **137'** may be in the form of a cathode ray tube (CRT) or flat panel screen that displays text, numerals, or graphical symbols. The user interface unit **138'** may include a keyboard, mouse, joystick, touch pad, touch screen, or other device. The mini-game distribution system **107** may include a network interface **139'**, configured to enable the use of Wi-Fi, an Ethernet port, or other communication methods.

The network interface **139'** may incorporate suitable hardware, software, firmware or some combination of two or more of these to facilitate communication via the electronic communications network **160**. The network interface **139'** may be configured to implement wired or wireless communication over local area networks and wide area networks such as the Internet. The emulator **107** may send and receive data and/or requests for files via one or more data packets over the network **160**.

The preceding components may exchange signals with each other via an internal system bus **150'**. The mini-game distribution system **107** maybe a general purpose computer that becomes a special purpose computer when running code that implements methods according to certain aspects of the present disclosure as described herein.

The mini-game playing system **109** may be configured substantially the same as the mini-game generator **102**. In particular, the mini-game playing system **109** may include a CPU **131''**, a memory **132''**, a network interface **139''** and a controller **145''**. One or more game programs **135''** and data **136** (e.g., mini-game data) may be stored in the memory along with a mini-game playing program **133''** which may be executed by the CPU **131''**. Other components that the mini-game playing system **109** may have in common with the mini-game generator **102** are omitted for the sake of clarity. However, components of the mini-game generator described above maybe regarded as being included with the mini-game play system **109** as if set forth explicitly herein. The mini-game playing system **109** may be a general purpose computer that becomes a special purpose computer when running code that implements mini-game playing methods according to certain aspects of the present disclosure as described herein. By way of example, and not by way of limitation, the mini-game playing system **109** may be an electronic gaming device, such as a game console or portable gaming device.

The mini-game distribution system **107** and mini-game playing system **109** may have access to one or more game programs **135'** that are associated with mini-games generated by the mini-game generator **102**. There may be more than one game program **135'** stored in the mini-game distribution system **107**. The games may also be stored in the memory or in the mass storage device. Additionally, one or more games **135'** may be stored at a remote location accessible to the mini-game generator **102** or mini-game distribution system **107** over the network **160**.

As shown in FIG. 2, the mini-game generator **102** may be configured to implement a method **201** for generating a mini-game. The mini-game distribution system **107** maybe configured to implement a method **221** for distributing a mini-game and the mini-game playing system **109** may be configured to implement a method **231** for playing a mini-game. Various aspects of these methods may be implemented by execution of computer executable instructions running on the mini-game generator **102** and/or the mini-game distribution system **107** in conjunction with the actions of a mini-game generator **102**. Certain other aspects may be implemented by execution of computer executable instructions running on the mini-game playing system **109**. In FIG. 2 the dashed arrows represent the flow of data among the mini-game generator **102**, the mini-game distribution system **107** and the mini-game playing system **109**.

Referring to the method **201** for generating a mini-game, game data is recorded after a game begins. The user who generates the mini-game (hereinafter referred to as the generating user) plays the game normally. When the game begins, the mini-game generator system **102** may record game data, as indicated at **202**. By way of example, the mini-game generator may initially record data such as the initial game state, difficulty level, game level, game character attributes (e.g., lives, possessions, weapons, and the like). As game play progresses, images of the game action may be displayed on the display **137**. Game inputs from the generating user, (e.g., button presses or joystick positions of a game controller or other interface) may also be recorded. The mini-game generator **102** need not record every position of every character and object in the game so long as the data that is recorded is sufficient to reproduce the game action perceived by the generating user in conjunction with the standard software and data associated with the game title.

At any point in the progress of game play, the generating user may want to suspend game play so that a mini-game can be generated starting from some point between when the game

began and when the game was suspended. For example, the generating user may have defeated the boss character in a game in a particularly manner after the player's avatar entered a particular room carrying particular weapons or other objects. The user would like to generate a mini-game starting from the point that the avatar entered the room. To  
5 accomplish this, the program **133** may be configured to suspend the game play, as indicated at **204** in response to an input from the generating user. The game state at the point of suspension maybe recorded, and the game may be rewound in response to an input from the generating user using the recorded game data, as indicated at **206**. The mini-game generator program **133** may be configured to allow the generating user to run the game program **135** in  
10 reverse from the point that the game was suspended. The rewind game action may be displayed on the display **136** as the game runs in reverse. When the generating user finds a suitable place in the rewind game action, a starting point may be chosen with an input from the generating user, as indicated at **208**.

FIGs. 3A-3B illustrate an example of how the mini-game generator **102** may record the game  
15 data at **202** and suspend game play at **204**. The game data in the form of game inputs **347** that direct the movements and/or other actions of player characters (avatars) during the course of the game. The game inputs **347** may include commands that are generally used by a game player to advance the game program **135** from a first state **301** to a second state **302**. The first state **301** maybe stored as a first snapshot, and the second state **302** maybe the  
20 desired location for the generated snapshot. The game inputs **347** may be recorded from input signals from the controller **145**, or they may be automatically generated by the mini-game generator **102**. Game inputs **347** may include, but are not limited to, inputs that cause a main character **340** in an existing game **135** to move to a new position, swing a sword, select an item from a menu, or any other action that can take place during the game play of the  
25 game **135**. Additionally, while game inputs advance the game play of the game from a first state **301** to a second state **302**, there may also be one or more intermediate states generated. Each of the intermediate states may optionally be recorded as a snapshot **367** as well.

FIG. 3A depicts the mini-game generator **102** recording game inputs **347**. Images corresponding to the first state **301** of the legacy game **135** may be displayed on the display  
30 unit **137**. According to this example, the first state **301** includes the main character **340** standing on the left side of the mountain and the final boss **348** standing on the right side of the mountain. Additionally, the main character **340** has four lives **343** remaining and his

health bar **344** is full. The time remaining to complete the level **346** is displayed on the top left corner of the display unit **137** and the score **345** is displayed on the top right corner of the display unit **137**.

The mini-game generator **102** records the game inputs **347** as the game is advanced to a  
5 second state **302** as shown in FIG. 3B. In the second state **302**, the main character **340** has been moved to the right side of the mountain and is proximate to the final boss **348**. Also, in this example, the time remaining to complete the level **346** has been reduced to 1:00. Additionally, a health bar **344** indicates that the main character has limited health, and finally there is only 1 life **343** remaining. This information may be recorded by the mini-game  
10 generator **102** if relevant.

If the generating user determines that the second state **302** corresponds to a suitable endpoint for a mini-game the generating user may enter a command that causes the mini-game program **133** to deliver a game suspension request **357** to the mini-game generator **107**. By way of example, and not by way of limitation, game suspension request **357** may be  
15 automatically generated by the snapshot generator **102** under pre-defined circumstances, e.g., if the boss character has been defeated. Alternatively, generating user may initiate the legacy game suspension request **357** with a keystroke from the user interface **138** or a button press or joystick movement with the controller **145**.

The mini-game generator **102** may suspend the game and generate the snapshot when every  
20 device relevant to the game **135** is in a steady state. Waiting for all of the devices to come into a steady state may take as little as one frame to accomplish. Once the devices are in a steady state, the stored data maybe platform independent since it does not rely on any specific set of hardware. This enables the snapshot to be used in conjunction with any target platform. The devices relevant to the game **135** may be a steady state when there are no  
25 outstanding disk requests and all asynchronous activity has been synchronized. By way of example, and not by way of limitation, these conditions may be met when the mini-game generator **102** has finished processing a basic block. Once the game **135** has been suspended, the mini-game generator **102** may proceed to record the state of every device that is being emulated. By way of example, and not by way of limitation, the emulator may record the  
30 state of the CPU, GPU, memory, register values, program counter value, programmable DMA state, buffered data for the DMA, audio chip state, and CD-ROM state. After the

snapshot has been generated, the mini-game generator **102** may store the snapshot in memory **132**.

By way of example, and not by way of limitation, the mini-game generator program **133** may present the user with a control dashboard on the display **137** that the generating user can  
5 manipulate using the controller **145**. By selecting various controls on the dashboard, the generating user can control the speed and direction with which the recorded game play is reviewed and choose the starting point. It is noted that the mini-game generator **102** may generate a snapshot in a similar fashion when the generating user enters a command to record the mini-game starting point at **208**.

10 When the starting point is chosen, the mini-game generator program **133** may record the state of the game program **135** at the starting point bundles relevant state data as mini-game data **215**. The relevant state data is generally sufficient to allow the game program **135** to resume play of the game starting at the point selected by the generating user. In addition to the starting state, the mini-game data **215** may optionally include information identifying the  
15 game title and/or version of the game program **135**. The mini-game data **215** may optionally include information identifying the generating user. The relevant state data may include game level, game difficulty, character attributes, game character location, number of lives left, time counter value, and the like. Not all state data needs to be bundled as mini-game data, just data that is sufficient for the game program **135** to start the game at the point chosen  
20 by the generating user. Furthermore, the mini-game data **215** may optionally include some or all of the recorded game data, e.g., including information identifying inputs from the generating user and the timing of such inputs up to the point that the game was suspended. The mini-game data **215** may then be uploaded, e.g., to the mini-game distribution system **107** or, in some implementations, directly to a mini-game playing system **109**.

25 According to some aspects of the present disclosure, the mini-game generator program **133** may optionally be configured to allow the generating user to pick intermediate trophy points, as indicated at **210**. The intermediate trophy points may be included in the mini-game data **215**. Examples of intermediate trophy points include points at which enemies are defeated, prizes captured, or obstacles overcome. The mini-game generator **102** may allow the  
30 generating user to rewind or fast forward the game through the recorded game data and select points for use as trophy points. In addition, the mini-game generator program **133** may optionally be configured to allow the generating user to pick an end point for the mini-game,

which may be included in the mini-game data. For example, the generating user may select the point at which the boss character is defeated as the endpoint. Alternatively, the end point may be defined in terms of an elapsed time from the starting point.

Furthermore, it is possible for the mini-game generator program **133** to determine the ending point automatically, e.g., by proceeding through the recorded game play and analyzing video events, audio events, or game system memory for indications of an end point. For example, the game program **135** may play a particular video when the boss character is defeated. The mini-game generator program **133** may be configured to detect playing of this video in the recorded game data to determine the endpoint. Similarly, the game program **135** may play a particular sound when the boss character is defeated and the mini-game generator program **133** may detect the playing of this sound from the recorded game data to determine the endpoint. Furthermore, data in the game system memory **132** may indicate the defeat of the boss character or other end point and the mini-game generator program may be configured to monitor the data in the memory **132** to determine the mini-game endpoint. For example, the game may require inflicting a certain amount of damage points on the boss character and the current level of damage may be stored in the memory **132**. The mini-game generator program may monitor the memory location where the boss character damage points are stored to determine the endpoint.

Referring now to the mini-game distribution method **221**, the mini-game distribution system **107** may receive the mini-game data **215**, e.g., via the network **160**. The mini-game data may be received in the form of one or more network data packets, from which the mini-game distribution program **133'** may extract the mini-game data **215**. The mini-game data may be stored in the memory **132'** and/or mass storage **134'** of the mini-game distribution system **107**. As noted above, the mini-game data **215** may generally include sufficient data to allow a game program **135'** to resume play of the game starting at the point selected by the generating user.

According to some aspects of the present disclosure, the mini-game distribution system **107** may determine the endpoint of the mini-game and/or trophy points, as indicated at **224**. For example, if the mini-game data **215** includes recorded game inputs, the mini-game distribution program **133'** may be configured to determine the end point and/or trophy points from analysis of the game action resulting from the game inputs when they are applied by the game program **135'**. Alternatively, the mini-game data **215** may be received with the

endpoint and/or intermediate trophy point data already bundled. The mini-game distribution system **107** may bundle information relating to the endpoint and/or intermediate points into distributable mini-game data **215'**. The mini-game distribution program **133'** may optionally be configured to bundle information identifying the generating user and/or the mini-game  
5 distribution system into the distributable mini-game data **215'**. Once the relevant mini-game data are gathered, the mini-game distribution system **107** may distribute the mini-game data **215'** to one or more game playing systems **109** as indicated at **226**.

Referring now to the mini-game playing method **231** it is noted that the mini-game playing system may request the mini-game from the mini-game distribution system **107**, as indicated  
10 at **232**. It is also possible for the mini-game distribution system to distribute mini-games without request, e.g., if a mini-game playing system is part of a pre-established distribution list. The mini-game data **215'** maybe received at the mini-game playing system **109**, e.g., via the network **160**, as indicated at **234**. It is noted that the mini-game playing system **109** may be configured in substantially the same way as the mini-game generating system,  
15 perhaps with slight differences in software and data. In such cases it may be possible for the mini-game playing system to automatically generate and endpoint and/or intermediate trophy points if the mini-game playing software **133''** is configured to implement these functions.

Upon instruction from a user, the mini-game playing software **133''** may begin playing the mini-game as indicated at **236**. By way of example, and not by way of limitation, the mini-  
20 game playing software may load a game program **135''** upon which the mini-game is based and load relevant game state data from the received mini-game data **215'**. As noted above, the state data maybe sufficient to start play of the game program **135''** at the point selected by the generating user. Thus, when the user of the game playing system **109** starts the mini-  
25 game, the game may start at the exact same point as that selected by the generating user. The game-playing user starts the game, e.g., with the game characters in the locations and at the point in the action selected by the generating user. Game play may then proceed in accordance with the game program **135''** in response to inputs from the game-playing user, e.g., via a game controller **145''**.

According to certain aspects of the present disclosure, the mini-game generator program **133**,  
30 mini-game distribution program **133'** and mini-game playing program **133''** may be embodied as computer readable instructions in non-transitory computer-readable media. As shown in FIG. 4A, a set of mini-game generator instructions **401** maybe implemented, e.g.,

by the mini-game generator **102**, maybe embodied in a non-transitory computer-readable medium **400** such as the memory **132** or the mass storage device **134** of the mini-game generator **102**. The mini-game generator instructions **401** may also be part of the mini-game generator program **133**. The mini-game generator instructions **401** maybe configured to  
5 implement the mini-game generator method **201** when executed by the CPU **131** of the mini-game generator **102**. The mini-game generator instructions **401** may include instructions for recording game input data **403**, instructions for suspending game play **405**, instructions for rewinding game data **407**, instructions for picking mini-game starting point **409** and instructions for uploading mini-game data **415**. The mini-game generator instructions **401**  
10 may optionally include instructions for picking an endpoint **411** and/or instructions for picking trophy points **413**.

As shown in FIG. 4B, a set of mini-game distribution instructions **421** may be implemented, e.g., by the mini-game distribution system **107**, maybe embodied in a non-transitory computer-readable medium **420** such as the memory **132'** or the mass storage device **134'** of  
15 the mini-game distribution system **107**. The mini-game distribution instructions **421** may also be part of the mini-game distribution program **133'**. The mini-game distribution instructions **421** may be configured to implement the mini-game distribution method **221** when executed by the CPU **131'** of the mini-game distribution system **107**. The mini-game distribution instructions **421** may include instructions for receiving mini-game data **423**,  
20 optional instructions for determining an endpoint or trophy points **425**, and instructions for distributing mini-game game data **427**.

As shown in FIG. 4B, a set of mini-game playing instructions **431** maybe implemented, e.g., by the mini-game playing system **109**, maybe embodied in a non-transitory computer-readable medium **430** such as the memory **132''** or the mass storage device **134''** of the mini-  
25 game playing system **109**. The mini-game playing instructions **431** may also be part of the mini-game playing program **133''**. The mini-game playing instructions **421** may be configured to implement the mini-game playing method **231** when executed by the CPU **131''** of the mini-game playing system **109**. The mini-game playing instructions **431** may include optional instructions for requesting a mini-game **433**, instructions for receiving mini-game  
30 data **435**, and instructions for playing a mini-game game **437**. The mini-game playing instructions may optionally include instructions for determining an endpoint or trophy points.

Aspects of the present disclosure allow for methods and systems that facilitate generation and distribution of mini-games by game players who know and love them the most. It is noted that certain aspects described above are included for the purposes of example and are not intended to be limiting. For example, it is possible to combine the functions of two or more  
5 of the mini-game generator **102**, mini-game distribution system **107**, and mini-game playing system into a single device. This would allow users to generate, distribute and play mini-games, e.g., with their own gaming console system, portable game system, smartphone, personal computer, laptop, tablet computer, etc.

In addition, it is noted that certain aspects of the present disclosure are described in terms of  
10 software implemented by programmable processors. Again, this is not to be taken in a limiting sense. Alternatively, the methods described herein may be implemented by specially configured hardware, e.g., hardware that can interact with a gaming console system, portable game system, smartphone, personal computer, laptop, tablet computer, and the like through a universal serial bus (USB) interface or similar interface.

15 According to additional aspects of the present disclosure a replay of a mini-game may be made with only a thin input channel. Starting from a snapshot, a script could be written to only record the video and button presses that comprise the game inputs from a person playing the game. Therefore, the replay may be made by simply starting from the original snapshot and playing back the recorded game inputs. This replay method is possible with a  
20 deterministic emulator because the emulator will always go through the same sequence of operations when the same game inputs are provided to the emulator.

According to additional aspects of the present disclosure an emulated game may be pre-loaded in order to make the game begin as soon as a user initiates the game. Game players may access the games over a cloud. A server that hosts the titles may create a pre-build  
25 buffer so that the server is ready to go as soon as the user clicks "play".

For example, a game may be loaded when a cursor is hovering over a certain game selection on a startup screen. The cloud system could base the decision to load the game on a prediction engine. The prediction engine may predict demand and initiate a sufficient number of host machines to meet the demand. The predictions may be based on what pages  
30 users are hovering over or historical data for the demand load for a given game title, e.g., certain game titles may historically have a big demand when school gets out.

As may be seen from the foregoing, embodiments of the present invention allow for the increased utility of games through the generation of mini-games by game users themselves and by the distribution and play of such user-generated mini-games. Mini-games can be quickly and easily generated without having to expend the resources required for creating an  
5 entirely new game. This provides game players with the benefit of shorter gaming experiences for games in which they are already familiar.

While the above is a complete description of the preferred embodiment of the present invention, it is possible to use various alternatives, modifications and equivalents. Therefore, the scope of the present invention should be determined not with reference to the above  
10 description but should, instead, be determined with reference to the appended claims, along with their full scope of equivalents. Any feature described herein, whether preferred or not, may be combined with any other feature described herein, whether preferred or not. In the claims that follow, the indefinite article "A", or "An" refers to a quantity of one or more of the item following the article, except where expressly stated otherwise. The appended claims  
15 are not to be interpreted as including means-plus-function limitations, unless such a limitation is explicitly recited in a given claim using the phrase "means for."

WHAT IS CLAIMED IS:

- 1 1. A computer-implemented method for generating a mini-game, comprising:  
2 recording game data during play of a video game on a computer game system;  
3 suspending play of the video game in response to a first input to the computer game  
4 system;  
5 rewinding the recorded game data to a start point in response to a second input to the  
6 computer game system; and  
7 uploading recorded game data representing a state of the video game at the start point to a  
8 remote mini-game distribution system.
- 1 2. The method of claim 1, further comprising uploading game data representing an end point  
2 of the mini-game to the remote mini-game distribution system.
- 1 3. The method of claim 1, further comprising determining an end point of the mini-game by  
2 analyzing the recorded game data.
- 1 4. The method of claim 3, wherein analyzing the recorded game data includes analyzing  
2 game audio data, game video data, or game memory state data.
- 1 5. The method of claim 1, further comprising uploading game data representing one or more  
2 intermediate goals of the mini-game to the remote mini-game distribution system.
- 1 6. A system for generating a mini-game, comprising:  
2 one or more processors;  
3 a memory coupled to the one or more processor;  
4 program instructions embodied in the memory configured for execution on the one or  
5 more processors,  
6 wherein execution of the program instructions by one or more processors causes the one  
7 or more processors to implement a method for generating a mini-game, wherein the  
8 method includes:  
9 recording game data during play of a video game on the system;  
10 suspending play of the video game in response to a first input to the system;  
11 rewinding the recorded game data to a start point in response to second input to the  
12 system; and  
13 uploading recorded game data representing a state of the video game at the start point to a  
14 remote mini-game distribution system.

- 1 7. A non-transitory computer readable medium containing program instructions for  
2 generating a mini-game, wherein execution of the program instructions by one or more  
3 processors of a computer system causes the one or more processors to implement a  
4 method for generating a mini-game, the method comprising:  
5 recording game data during play of a video game on a computer game system;  
6 suspending play of the video game in response to a first input to the computer game  
7 system;  
8 rewinding the recorded game data to a start point in response to a second input to the  
9 computer game system; and  
10 uploading recorded game data representing a state of the video game at the start point to a  
11 remote mini-game distribution system.
- 12 8. A method for distributing a mini-game, comprising:  
13 receiving remotely-generated game data, wherein the remotely-generated game data  
14 includes information representing a state of a video game title at a start point of a mini-  
15 game at a mini-game distribution system;  
16 determining an end point of the mini-game from the remotely-generated game data; and  
17 distributing the information representing the state of a video game title at the start point  
18 and data indicating the end point to a remote game system.
- 1 9. The method of claim 8, wherein determining the end point includes determining an  
2 amount of time for the mini-game to last.
- 1 10. The method of claim 8, wherein determining the end point includes analyzing the  
2 remotely-generated game data to determine the end point.
- 1 11. The method of claim 8, wherein analyzing the remotely-generated game data to determine  
2 the end point includes analyzing game audio data, game video data, or game memory  
3 state data included in the remotely generated game data.
- 1 12. A mini-game distribution system, comprising:  
2 one or more processors;  
3 a memory coupled to the one or more processors;  
4 program instructions embodied in the memory configured for execution on the processor,  
5 wherein execution of the program instructions by the one or more processors causes the  
6 one or more processors to implement a method for distributing a mini-game, wherein the

7 method includes:  
8 receiving remotely-generated game data, wherein the remotely-generated game data  
9 includes information representing a state of a video game title at a start point of a mini-  
10 game at a mini-game distribution system;  
11 determining an end point of the mini-game from the remotely-generated game data; and  
12 distributing the information representing the state of a video game title at the start point  
13 and data indicating the end point to a remote game system.

1 13. A non-transitory computer readable medium containing program instructions for  
2 distributing a mini-game, wherein execution of the program instructions by one or more  
3 processors of a computer system causes the one or more processors to implement a  
4 method for distributing a mini-game, the method comprising:  
5 receiving remotely-generated game data, wherein the remotely-generated game data  
6 includes information representing a state of a video game title at a start point of a mini-  
7 game at a mini-game distribution system;  
8 determining an end point of the mini-game from the remotely-generated game data; and  
9 distributing the information representing the state of a video game title at the start point  
10 and data indicating the end point to a remote game system.

1 14. A method for remote access and play of a mini-game, comprising:  
2 remotely accessing mini-game data with an electronic gaming device, wherein the mini-  
3 game is associated with an existing game title available to the electronic gaming device,  
4 wherein the mini-game data is generated by an independent user of the game title,  
5 wherein the mini-game data includes information representing a state of the existing  
6 video game title at a start point of the mini-game; and  
7 running the game title on the electronic gaming device beginning at the start point.

1 15. The method of claim 14, wherein the mini-game data includes data representing one or  
2 more intermediate goals of the mini-game.

1 16. The method of claim 14, wherein the mini-game data includes information representing  
2 an end point of the mini-game.

1

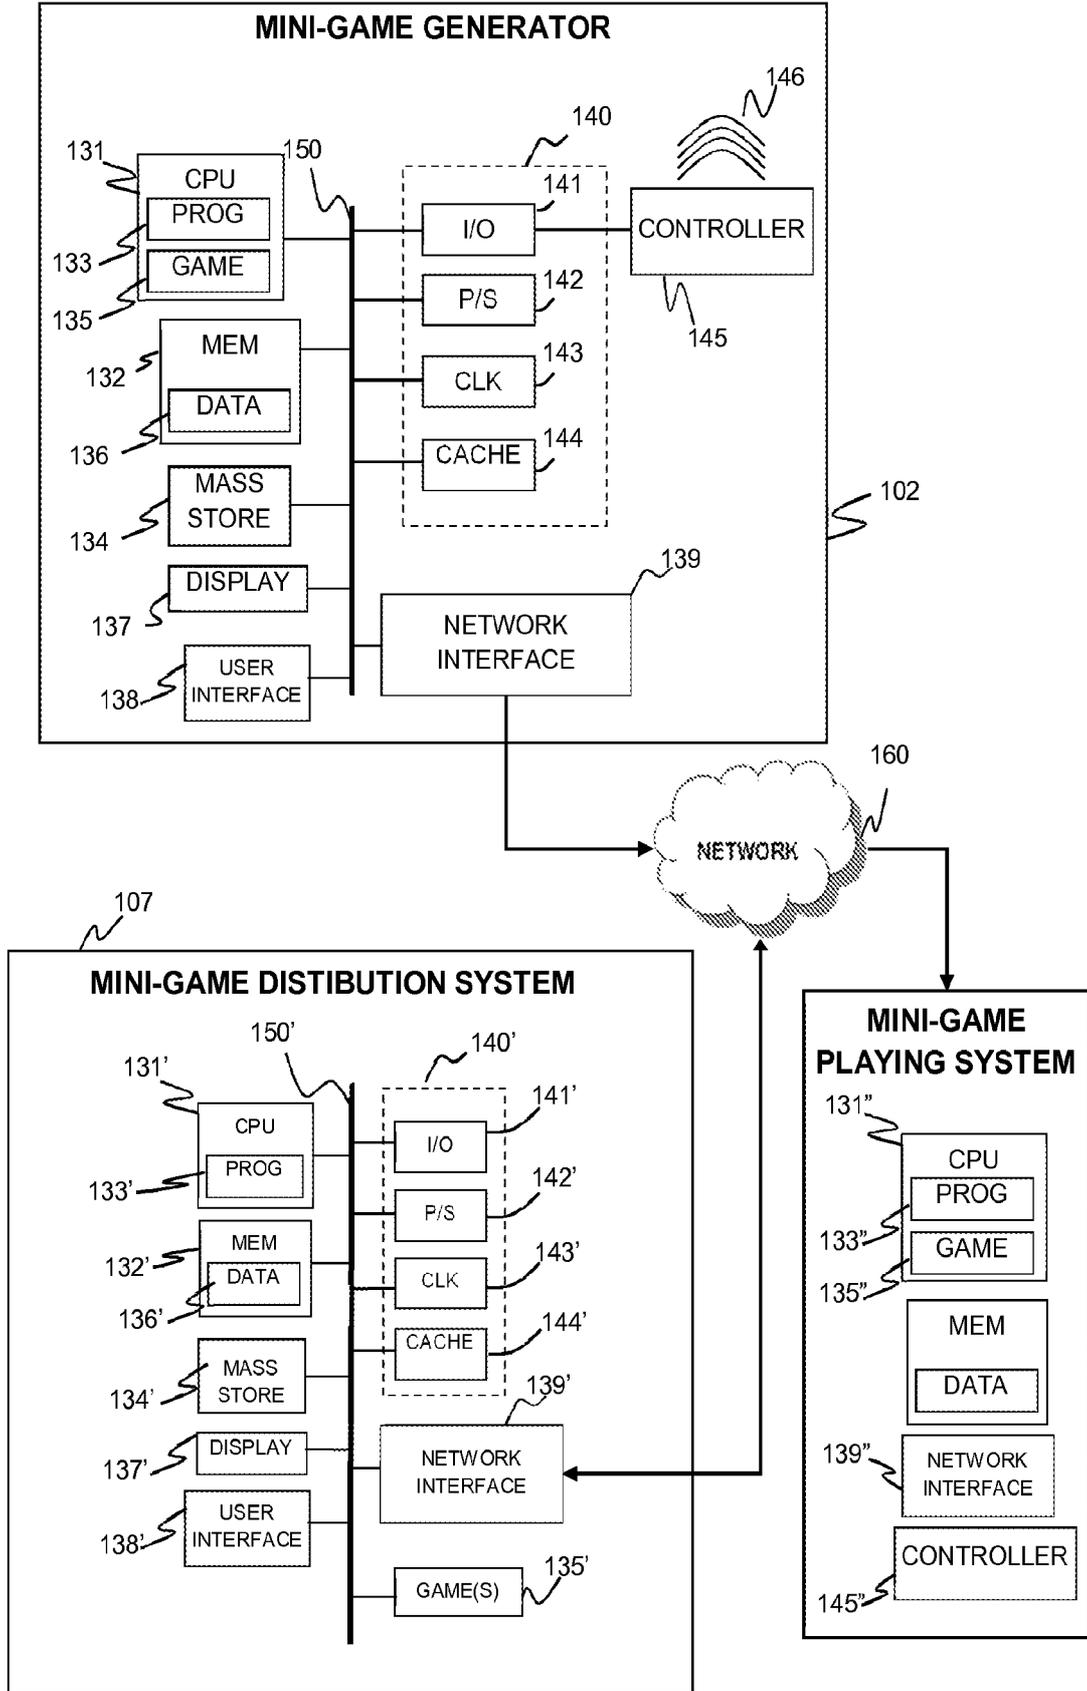


FIG. 1

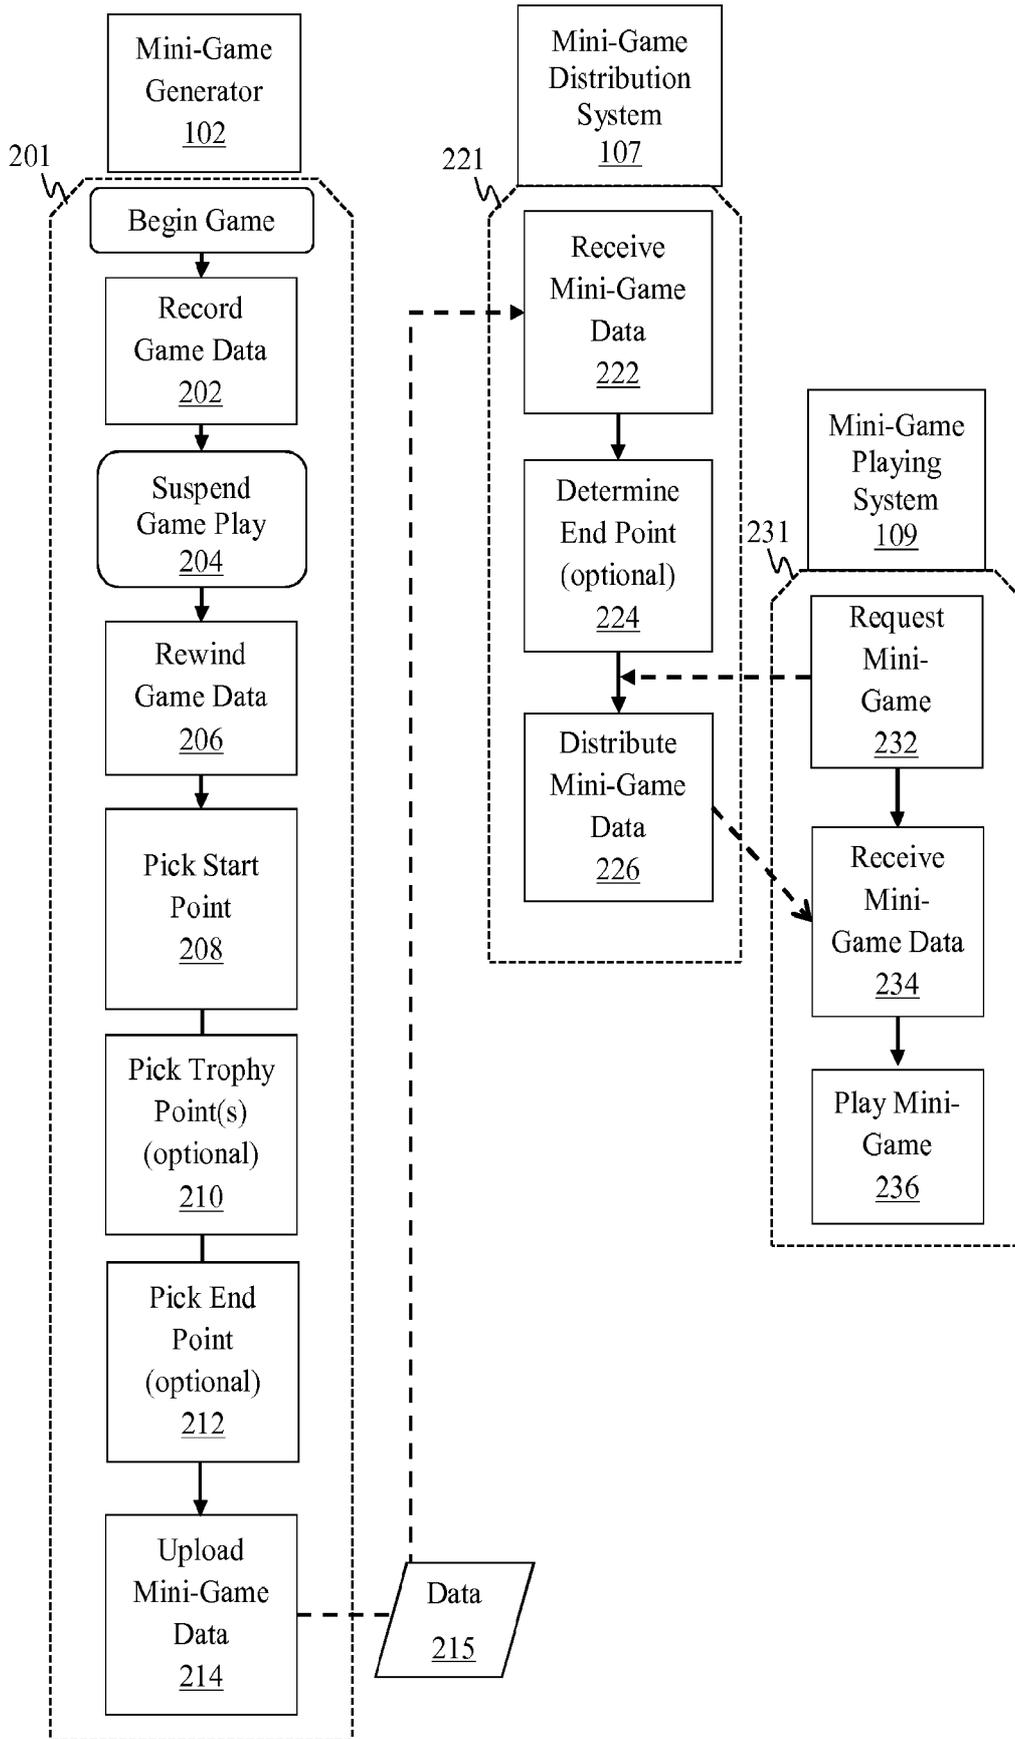


FIG. 2

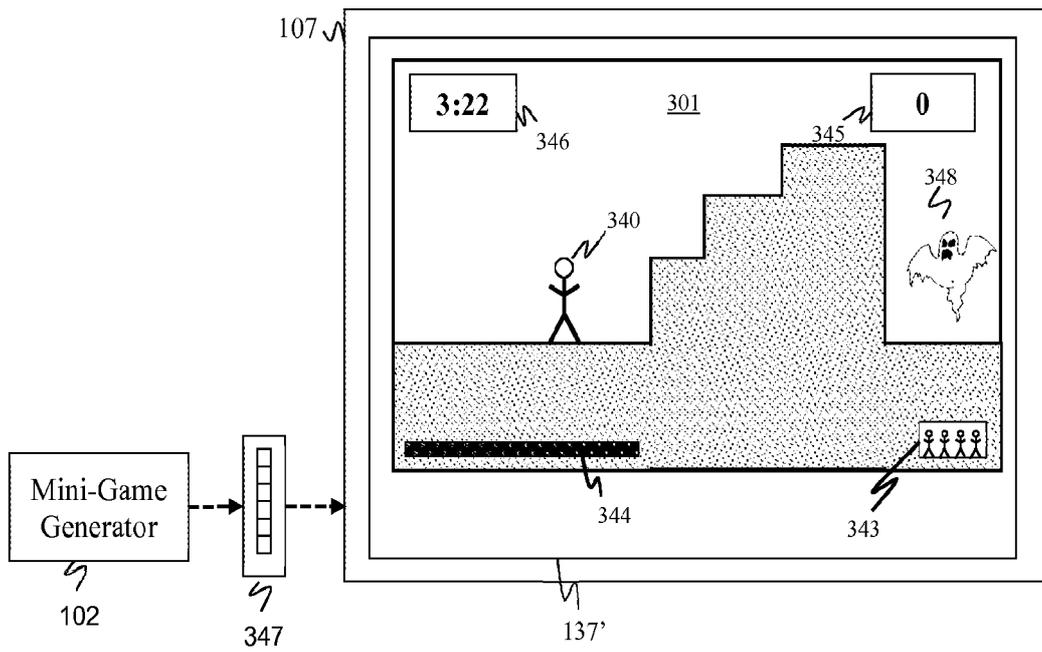


FIG. 3A

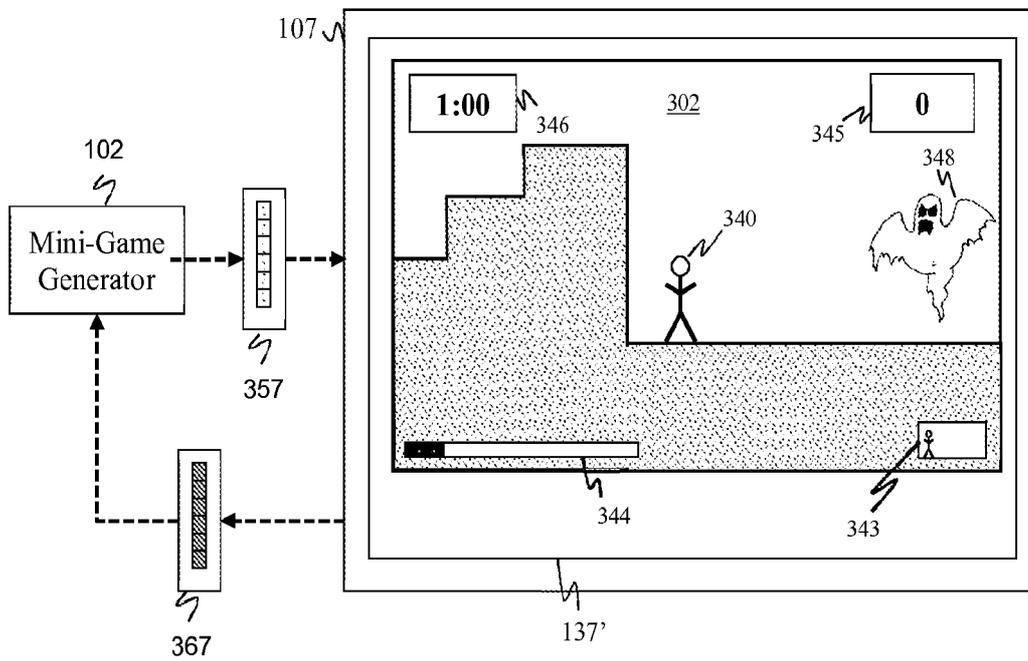


FIG. 3B

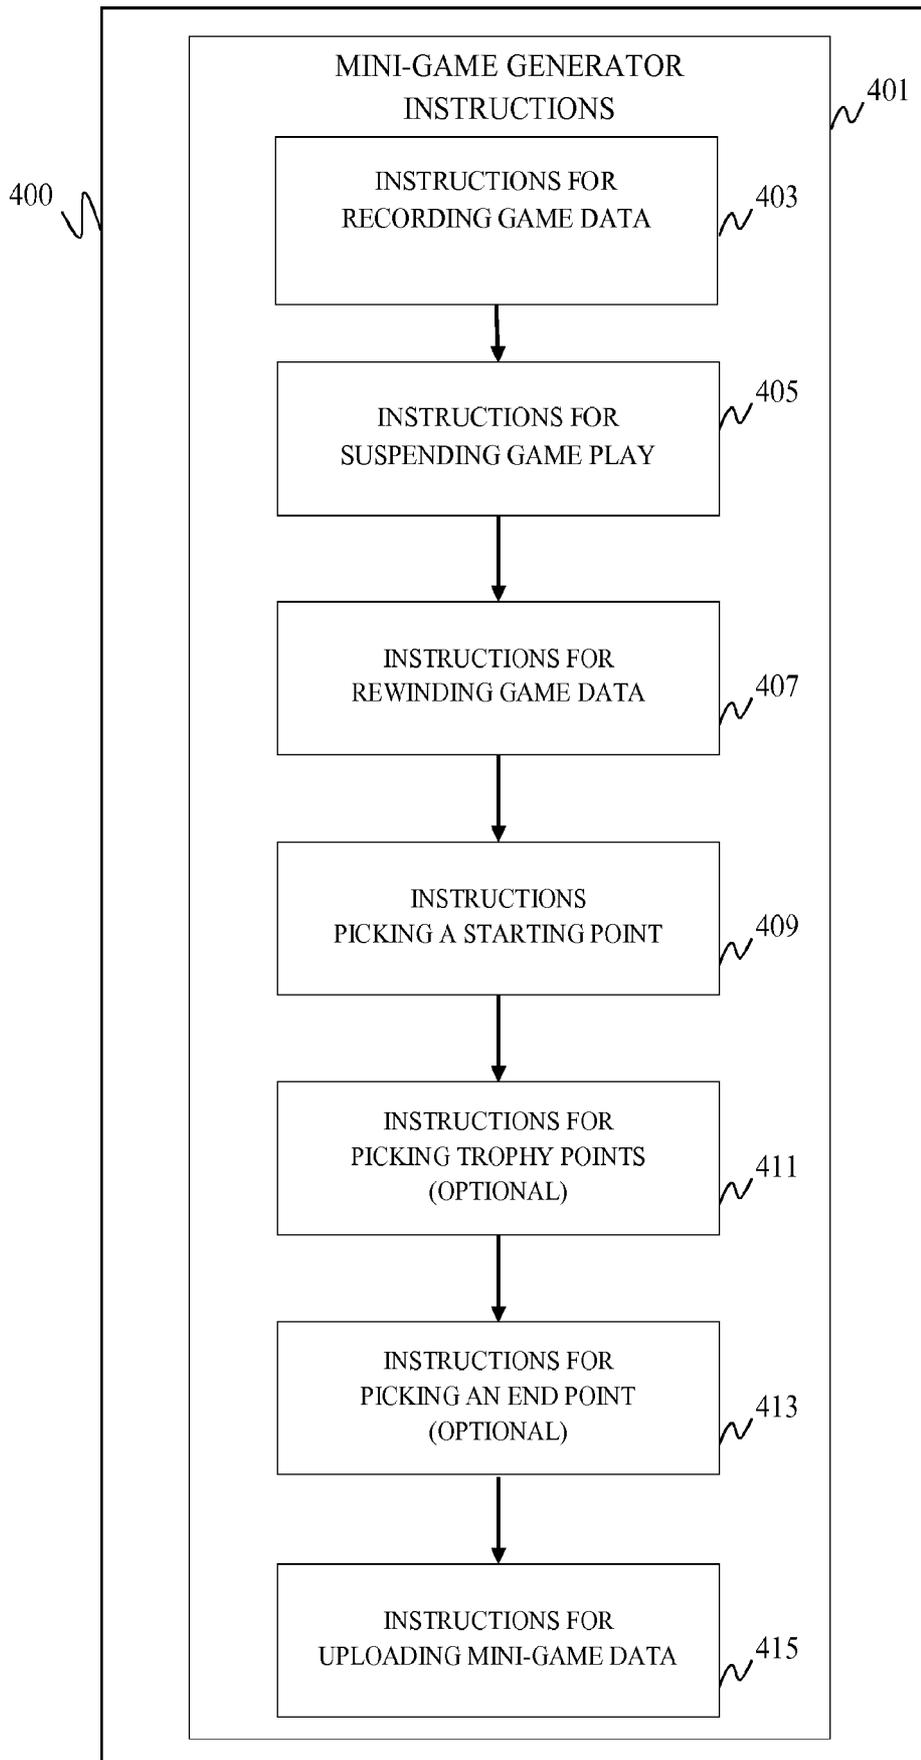


FIG. 4A

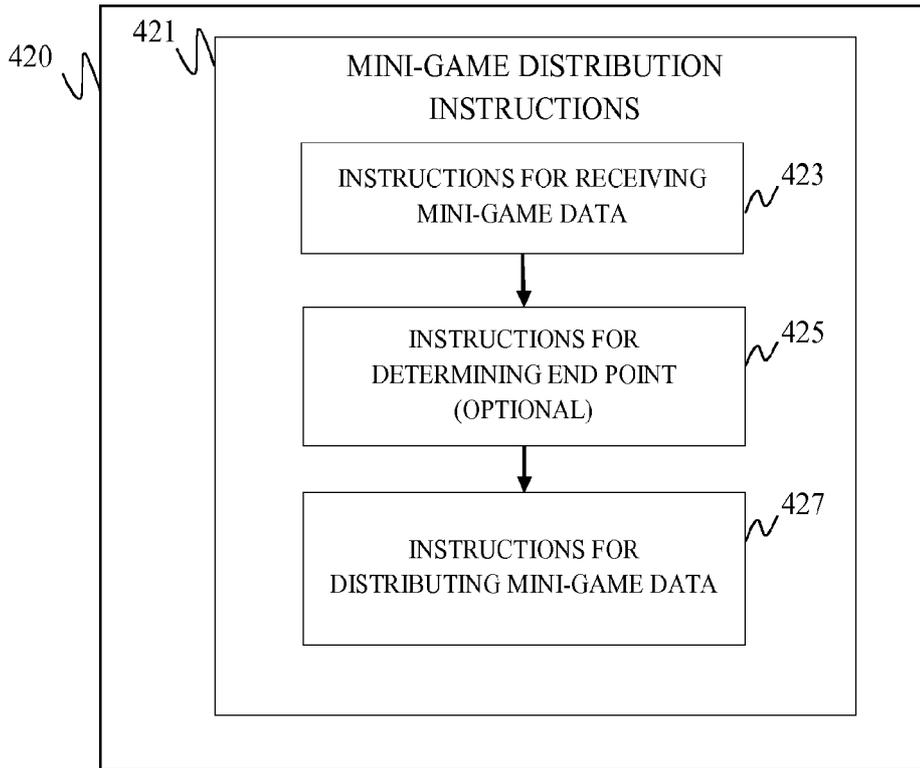


FIG. 4B

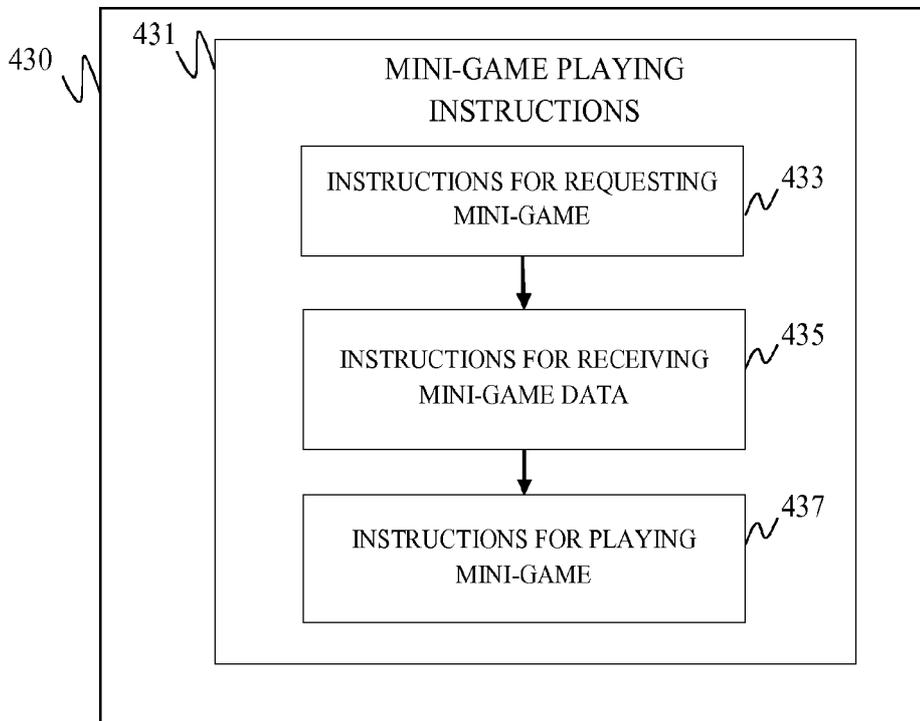


FIG. 4C

**INTERNATIONAL SEARCH REPORT**

International application No.

PCT/US 2013/0748 13

<p>A. CLASSIFICATION OF SUBJECT MATTER</p> <p style="text-align: center;"><i>A63F 13/30 (2014.01)</i></p> <p>According to International Patent Classification (IPC) or to both national classification and IPC</p>																										
<p>B. FIELDS SEARCHED</p> <p>Minimum documentation searched (classification system followed by classification symbols)</p> <p style="text-align: center;">A63F 3/00, 3/08, 9/00, 9/24, 13/00-13/98, G06F 9/00-9/455, 17/00</p> <p>Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched</p> <p>Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)</p> <p style="text-align: center;">PatSearch (RUPTO internal), USPTO, PAJ, Esp@cenet, Information Retrieval System of FIPS</p>																										
<p>C. DOCUMENTS CONSIDERED TO BE RELEVANT</p> <table border="1"> <thead> <tr> <th>Category*</th> <th>Citation of document, with indication, where appropriate, of the relevant passages</th> <th>Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td>Y</td> <td>US 201 1/0098 111 A1 (NINTENDO CO LTD) 28.04.201 1, paragraphs [0003], [001 1H0014], [0027H0029], [0040]-[0073], [0135]-[0160], [0187]-[0190], [0199H0227], fig. 1, 2, 9</td> <td>8, 12, 13</td> </tr> <tr> <td>A</td> <td></td> <td>1-7, 9-1 1, 14-16</td> </tr> <tr> <td>Y</td> <td>US 8321571 B2 (BALLY GAMING, INC.) 27. 11.2012, abstract</td> <td>8, 12, 13</td> </tr> <tr> <td>A</td> <td>US 2009/0082102 A1 (SONY COMPUTER ENTERTAINMENT INC) 26.03.2009</td> <td>1-16</td> </tr> <tr> <td>A</td> <td>EP 1172132 A2 (SONY COMPUTER ENTERTAINMENT INC) 16.01 .2002</td> <td>1-16</td> </tr> <tr> <td>A</td> <td>EP 1225767 A2 (SONY COMPUTER EMTERTAINMENT AMERICA) 24.07.2002</td> <td>1-16</td> </tr> <tr> <td>A</td> <td>WO 2004/024259 A1 (IGT) 25.03.2004</td> <td>1-16</td> </tr> </tbody> </table>			Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	Y	US 201 1/0098 111 A1 (NINTENDO CO LTD) 28.04.201 1, paragraphs [0003], [001 1H0014], [0027H0029], [0040]-[0073], [0135]-[0160], [0187]-[0190], [0199H0227], fig. 1, 2, 9	8, 12, 13	A		1-7, 9-1 1, 14-16	Y	US 8321571 B2 (BALLY GAMING, INC.) 27. 11.2012, abstract	8, 12, 13	A	US 2009/0082102 A1 (SONY COMPUTER ENTERTAINMENT INC) 26.03.2009	1-16	A	EP 1172132 A2 (SONY COMPUTER ENTERTAINMENT INC) 16.01 .2002	1-16	A	EP 1225767 A2 (SONY COMPUTER EMTERTAINMENT AMERICA) 24.07.2002	1-16	A	WO 2004/024259 A1 (IGT) 25.03.2004	1-16
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.																								
Y	US 201 1/0098 111 A1 (NINTENDO CO LTD) 28.04.201 1, paragraphs [0003], [001 1H0014], [0027H0029], [0040]-[0073], [0135]-[0160], [0187]-[0190], [0199H0227], fig. 1, 2, 9	8, 12, 13																								
A		1-7, 9-1 1, 14-16																								
Y	US 8321571 B2 (BALLY GAMING, INC.) 27. 11.2012, abstract	8, 12, 13																								
A	US 2009/0082102 A1 (SONY COMPUTER ENTERTAINMENT INC) 26.03.2009	1-16																								
A	EP 1172132 A2 (SONY COMPUTER ENTERTAINMENT INC) 16.01 .2002	1-16																								
A	EP 1225767 A2 (SONY COMPUTER EMTERTAINMENT AMERICA) 24.07.2002	1-16																								
A	WO 2004/024259 A1 (IGT) 25.03.2004	1-16																								
<p><input type="checkbox"/> Further documents are listed in the continuation of Box C. <input type="checkbox"/> See patent family annex.</p>																										
<p>* Special categories of cited documents:</p> <table border="0"> <tr> <td>"A"</td> <td>document defining the general state of the art which is not considered to be of particular relevance</td> <td>"T"</td> <td>later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>"E"</td> <td>earlier document but published on or after the international filing date</td> <td>"X"</td> <td>document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>"L"</td> <td>document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>"Y"</td> <td>document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>"O"</td> <td>document referring to an oral disclosure, use, exhibition or other means</td> <td>"&amp;"</td> <td>document member of the same patent family</td> </tr> <tr> <td>"P"</td> <td>document published prior to the international filing date but later than the priority date claimed</td> <td></td> <td></td> </tr> </table>			"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	"E"	earlier document but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family	"P"	document published prior to the international filing date but later than the priority date claimed						
"A"	document defining the general state of the art which is not considered to be of particular relevance	"T"	later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention																							
"E"	earlier document but published on or after the international filing date	"X"	document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone																							
"L"	document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y"	document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art																							
"O"	document referring to an oral disclosure, use, exhibition or other means	"&"	document member of the same patent family																							
"P"	document published prior to the international filing date but later than the priority date claimed																									
<p>Date of the actual completion of the international search</p> <p style="text-align: center;">19 May 2014 (19.05.2014)</p>		<p>Date of mailing of the international search report</p> <p style="text-align: center;">29 May 2014 (29.05.2014)</p>																								
<p>Name and mailing address of the ISA/ FIPS</p> <p>Russia, 123995, Moscow, G-59, GSP-5, Berezhkovskaya nab., 30-1</p> <p>Facsimile No. +7 (499) 243-33-37</p>		<p>Authorized officer</p> <p style="text-align: center;">E. Boldina</p> <p>Telephone No. (499) 240-25-91</p>																								