



## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>7</sup> : <b>C11D 17/00, 3/39, 3/395 // 3/40, 3/50</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 00/23558</b> (43) International Publication Date: 27 April 2000 (27.04.00)</p>
<p>(21) International Application Number: PCT/GB99/03453 (22) International Filing Date: 19 October 1999 (19.10.99) (30) Priority Data: 9822818.2 19 October 1998 (19.10.98) GB (71) Applicant (for all designated States except US): JEYES GROUP LIMITED [GB/GB]; Brunel Way, Thetford, Norfolk IP24 1HF (GB). (72) Inventors; and (75) Inventors/Applicants (for US only): SIDGWICK, Ian [GB/GB]; 148 Ketts Hill, Norwich, Norfolk NR1 4NY (GB). BALLS, Steve [GB/GB]; 42 Thistle Close, Thetford, Norfolk IP24 2YB (GB). NORMAN, Russell [GB/GB]; 9 Walsingham Mews, Rickinghall, Diss, Norfolk IP22 1ET (GB). WILSON, Brian, D. [GB/GB]; Torridon, 52 Common Road, Bressingham, Diss, Norfolk IP22 2BB (GB). (74) Agent: LUCKHURST, Anthony, Henry, William; Marks &amp; Clerk, 57-60 Lincoln's Inn Fields, London WC2A 3LS (GB).</p>	<p>(81) Designated States: AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CR, CU, CZ, DE, DK, DM, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).</p> <p><b>Published</b> <i>With international search report. Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i></p>	
<p>(54) Title: LAVATORY CLEANSING BLOCK</p>		
<p>(57) Abstract</p> <p>A lavatory cleansing block has two parts co-extruded together, the first part containing a chlorine releasing bleach and the second part containing component such as a perfume or colourant which need not be bleach resistant. Migration of components is avoided if there is no common hydrophobe in the two parts. The perceived performance of the perfume is enhanced by its juxtaposition with the bleach.</p>		

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## LAVATORY CLEANSING BLOCK

The present invention relates to a lavatory cleansing block, and in particular to a bleach containing block.

Typically, lavatory cleansing blocks are immersed in the water cistern of a lavatory (a cistern block), or held in a cage under the rim of the lavatory bowl (a rim block), or on the top of the cistern, as in Japan for example (an on-tank block). The block dissolves slowly, releasing cleansing ingredients into the lavatory bowl.

Generally such blocks may contain, as major ingredients:

- (i) a solubility retardant or control agent to control the rate of dissolution of the ingredients
- (ii) a surface active component to provide a cleaning effect, and also to provide a foam as an indicator to the user
- (iii) a bleach component
- (iv) a colouring agent
- (v) a perfume
- (vi) a germicide
- (vii) fillers and processing aids.

In formulating a working block it is necessary to take into account difficulties of block manufacture, stability of the block on storage, the performance of the block in use, and the cost of the block.

Blocks are commonly made by extrusion. This subjects the ingredients to elevated temperatures and pressures and the selection of ingredients, particularly when using a bleach component, is important to avoid hazards during the extrusion process, and to produce an extrusion with sufficient integrity for subsequent cutting of the extruded rod (to form a block) and wrapping etc.

On storage, which may be in relatively hot and humid conditions in some climates, it is necessary to account for the stability of the block. Again, bleach containing blocks may lose their effectiveness (e.g. components decompose, the bleach attacks the perfume, available chlorine in chlorine based bleaching agents is lost), and also they may discolour. Whilst this is particularly a problem for blocks containing both a colourant and a bleach, even white blocks may discolour over time.

The performance of the block is governed both by the actual, scientifically measurable performance, and also by the perceived performance of the user. Thus, with surface active agent containing blocks (foaming blocks) it is desirable to ensure that a reasonable amount of stable foam (ideally lasting a minute or more) is produced in the flush water late in the block life. A block containing a colourant or a perfume should continue to produce a reasonable depth of colour, and an attractive colour and/or smell late into the block life. The preferred life for a block is 28 days for normal domestic use in hard or soft water, but a block life up to five months is desired for some applications.

There has been extensive work on the development of toilet blocks to provide blocks meeting the various requirements set out above.

There are particular difficulties when formulating bleach containing blocks because of the instability of bleaches during manufacture of the block and also on storage, and because the bleach will degrade other components, particularly colorants and perfumes.

One early approach to the manufacture of rim blocks was to have a rim cage which has two chambers for containing incompatible components in the different chambers.

There have been proposals to manufacture a two-part block. EP-A-55100 discloses a cistern block having a surface active component in the main body of the block, and a tablet containing a bleaching agent is embedded in one wall of the block body. EP-A-55100 proposes that the bleaching agent tablet should be coated to isolate it from the surface active

component in order to prevent discolouration and other effects on the block performance.

EP-A-101402 also suggests a two part cistern block to separate incompatible substances. However there have been reports that it is difficult to manufacture the blocks exemplified in EP-A-101402.

With a cistern block, the components of the block pass into solution in the cistern between flushes, and so there is mixing of the "incompatible components" for a period of time before the cistern is flushed. This can affect the performance of the ingredients, particularly colourant when used in combination with a bleach, and so it is still necessary to account for the interaction of the ingredients over a period of time.

Thus, it has generally been preferred to manufacture a single, integrally formed block and it has been accepted that this places constraints on the choice of block constituents, in particular they must be resistant to the bleach.

We have now found that it is possible to provide a viable two part lavatory cleansing block and that proper choice of constituents can lead to improvements in performance.

One problem with two-part or co-extruded blocks is the migration of the bleach incompatible substances into the bleach containing part. EP A-55100 solved this problem by placing a barrier between the parts.

A first aspect of the invention provides a lavatory cleansing block which has been formed by extruding two compositions, only one of the compositions containing a bleach, and the other composition containing a component which is incompatible with the bleach, characterised in that the compositions do not have a common hydrophobe component.

EP-A-101402 uses pine oil, a hydrophobic perfume, in both parts of the block. We have found that by ensuring that there is not a common hydrophobe in the block parts, the migration of the bleach sensitive component can be substantially avoided.

Another aspect of the invention provides a lavatory cleansing block having a first part which contains a bleach agent and a second part which

contains a perfume, for the purpose of enhancing the performance of the perfume in the second part.

We have found that by separating the bleaching agent and the perfume in a rim block we obtain enhanced performance of the perfume component, over and above any improved performance which might be expected from separating the components. The perfume in the second part of the block need not be stable to the bleach. A bleach stable perfume may still be incorporated in the first part, with the bleach, but would be different to the perfume in the second part to avoid the use of a common hydrophobe.

Yet another aspect of the invention provides a lavatory cleansing block comprising a first block portion formed of a composition including a bleach, and a second portion including a bleach activator.

A bleach activator has long been a desirable component for a lavatory cleansing block composition, but it has not hitherto been possible to incorporate one in a toilet block.

Preferably the bleach is a halogen release agent. Preferably the halogen release agent is a chlorine release agent, more preferably a chlorinated cyanuric acid derivative such as sodium dichloroisocyanurate. Preferably the bleaching agent is present in an amount of from 2 to 75% by weight of the complete block, preferably 5 to 60% and more preferably 10 to 40% by weight. The bleaching agent is contained in one part of the block. It is desirable to have block parts of about equal size and hence about equal weight. An amount of about 10 to 25% and preferably about 15% of the total block weight is particularly preferred.

The surface active agent may be distributed between the two block parts. The same surface active agent may be used in each part, or different agents may be used. Typical surface active agents include anionics such as alkali metal paraffin sulphonates, alkali metal alkyl sulphates and alkyl aryl sulphonates, particularly alkyl benzene sulphonates. Preferably the surface active agent is present in an amount of from about 5 to about 75% by weight of the finished block, preferably about 20 to about 60%, and more preferably about 40 to about 50%.

The perfume is preferably present in an amount of from about 0.5 to about 15% by weight of the final block, preferably about from 2 to about 10%, and more preferably from about 3 to about 7% by weight. As noted above, a perfume is preferably incorporated in a different part of the block to the bleaching agent to enhance the perfume performance.

Preferably the block parts are extruded, and more preferably are co-extruded side-by-side.

Very preferably a colourant is provided in at least one of the block parts. Preferably the colourant will be provided in the block part containing the perfume, since many colourants are affected, in time, by bleaching agents. The colourant may provide a colour to the flush water if a sufficient amount is dispersed during a flushing operation, but also the colourant provides an attractive appearance to the finished block.

When present, the bleach activator is preferably in an amount of from 0.05 to 5 % by weight, preferably 0.25 to 3 % by weight of the complete block, more preferably 0.3 to about 2 % and preferably about 0.5% by weight. In the alternative it may be present in an amount about equal to the molar equivalent of the bleach. The preferred bleach activator is sodium bromide. Other suitable bleach activators are mentioned in GB 1 345 119 for example.

Other components of the block may include processing aids, fillers, water softening agents, and solubility control agents as known in the art. It will be appreciated that each part of the block will, because of the different basic components, impose different constraints on the required processing aids etc.

The invention will be further described by way of example. The following compositions are prepared and pairs of the compositions are extruded to test the performance of the formed block. The compositions are co-extruded, or extruded as complementary shapes which are brought together. The amounts of each component are the weight per cent in the composition, not the finished block.

## 1. COLOUR COMPOSITION

Trade Name	Chemical Name	% w/w
	Sodium alkylarylsulphonate 80%	48.0
MgSO <sub>4</sub> . 7 H <sub>2</sub> O	n/a	10.0
Sodium Sulphate	n/a	25.0
Sodium Stearate	n/a	1.0
Pine Oil	n/a	8.0
Acid Blue 9	CI Acid Blue 9 Trimethane Dye	8.0

## 2. PERFUME COMPOSITION

Trade Name	Chemical Name	% w/w
	Sodium Alkylarylsulphonate 80%	40.0
MgSO <sub>4</sub> .3H <sub>2</sub> O	n/a	5.0
Sodium Sulphate	n/a	47.34
PEG 6000 distearate	n/a	0.3
Perfume LQ52707	n/a	7.30
Paliogen Yellow L1560	Anthrapyrimidine pigment	0.06

## 3. BLEACH COMPOSITION

Trade Name	Chemical Name	% w/w
	Sodium alkylarysulphonate (90%)	43.7
	Sodium alkylarysulphonate (80%)+MgSO <sub>4</sub> .7H <sub>2</sub> O	18.0
SDIC	Sodium dichloroisocyanurate dihydrate	30.0
	Triethylene glycol caprate caprylate	6.0
Mineral Oil	n/a	2.0
Titanium dioxide	n/a	0.3

## 4. PERFUME COMPOSITIONS

Trade Name	Chemical Name	A	B	C
		%w/w		
	Sodium alkylarylsulphonate 80%	50.0	50.0	50.0
	Sodium alkane sulphonate	9.80	9.80	9.80
MgSO <sub>4</sub> .3H <sub>2</sub> O	n/a	5.0	5.0	5.0
Sodium sulphate	n.a	28.115	28.14	28.18
Perfume F544.744	n/a	7.0	0	0
Perfume LU63651	n/a	0	7.0	0
Perfume LQ52707	n/a	0	0	7.0
Sicopal Green K9710	Pigment Green 50	0.03	0	0
Paliogen Yellow L1560	Anthrapyrimidine pigment	0.005	0.02	0.02
Titanium Dioxide	n/a	0.01	0	0
Bitrex (25%w/v)	n/a	0.04	0.04	0

## 5. COLOUR COMPOSITION

Trade Name	Chemical Name	% w/w
	Sodium Alkylarylsulphonate 80%	45.0
MgSO <sub>4</sub> .3H <sub>2</sub> O	n/a	5.0
Sodium Sulphate	n/a	37.90
Pine Oil	n/a	7.0
Acid Blue	CI Acid Blue 9 Trimethane Dye	5.1

## 6. BLEACH COMPOSITION

Trade Name	Chemical Name	% w/w
	Sodium alkylarylsulphonate (90%)	40.3
	Sodium alkylarylsulphonate (80%)	19.50
SDIC	Sodium dichloroisocyanurate dihydrate	30.0
	Triethylene glycol caprate caprylate	7.0
Mineral Oil	n/a	3.0
Titanium dioxide	n/a	0.20

## 7. COLOUR COMPOSITION

Trade Name	Chemical Name	% w/w
	Sodium alkylarysulphonate 90%	40.0
	Sodium alkylarysulphonate 80%+MgSO <sub>4</sub> 7H <sub>2</sub> O	19.5
Sodium Sulphate	n/a	24.5
Mineral Oil	n/a	1.0
Acid Blue	CI Acid Blue 9 Trimethane Dye	6.0
	Triethylene glycol caprate caprylate	9.0

## 8. PERFUME AND COLOUR COMPOSITION

Trade Name	Chemical Name	% w/w
	Sodium alkylarysulphonate 80%	40.0
MgSO <sub>4</sub> . 3H <sub>2</sub> O	n/a	5.0
Sodium Sulphate	n/a	46.34
Sodium Bromide	n/a	1.0
PEG 6000 distearate	n/a	0.3
Perfume LQ52707	n/a	7.30
Paliogen Yellow L1560	Anthrapyrimidine pigment	0.06

**Cistern Block Formulations**

Pairs of the above compositions were co-extruded to form a circular block of diameter about 45 to 50 mm and depth about 21 to 23 mm, each composition being extruded in a D shape to form about half the finished block weight of about 50 to 53 gm.

The combinations 1 with 3 and 2 with 3 both provided stable block formulations having good performance.

The combination 6 with 7 had poor performance on storage due to the use of a common hydrophobe, the caprylate, in the two block halves leading to migration of the colourant Acid blue 9, and hence discolouration.

The combination 3 with 8 which uses a bleach activator as well as perfume and colourant in component 8, gave good performance. The bleach activator

The combination 3 with 8 which uses a bleach activator as well as perfume and colourant in component 8, gave good performance. The bleach activator could not be used within the block composition 3 which incorporates a bleach, SDIC.

### **Rim Blocks**

Finished blocks of dimension about 26 mm x 27 mm x 57 mm are formed by co-extruding pairs of compositions to give a finished block weight of about 40 gm (20 gm of each composition). The blocks are held in a rim cage with the two block portions side by side so that they are both exposed to substantially the same water flow.

The combinations 4A, 4B or 4C with 6, and 5 with 6 gave good performance.

The combination 6 with 8, incorporating the bleach activator, gave good performance.

The combination 6 with 7 gave poor performance because of the presence of the common hydrophobes, the caprylate and mineral oil.

### **Perfume Performance**

Four blocks were formulated in accordance with the following table. Blocks A and B are standard prior art formulations incorporating a chlorine source bleaching agent (sodium dichloroisocyanurate) and a perfume (Yellow Zest and Lemonzone). Block C is a two part block in accordance with the invention having bleach containing and perfume containing parts of equal weight. Block D is a perfume (Limonia) non-bleach containing block.

The blocks were tested in a rim cage in a standard UK91 wash down toilet, operated at 17 flushes per day, with hard water (250 to 300 ppm measured as calcium carbonate).

The performance of the block was tested by a panel of users by engaging the users impression on the 3rd day, after the 4th flush, and the results are presented in Figures 1 and 2.

Block A contains a perfume, Yellow Zest, which does not have good stability and this is out performed by block B, which has a bleach stable perfume Lemonzone. As might be expected from the discussion of the prior art cistern blocks, the two-part block, block C, out performs both blocks A and B. Note, however, that block C has the non-bleach stable perfume Yellow Zest of block A, and also has a lower amount (3.5% by weight compared to 4.5%) of perfume which is delivered over a much longer lifetime (28 days compared to 15 days). Thus the degree of improvement is remarkable.

Even more remarkable is that block C, the two part block, one hour after the flush out performs the standard perfume containing non-bleach product, block D, which again has a much higher perfume content of 3.75 gm (7.5% of 50 gm) compared to 1.4 gm (3.5% of 40 gm) in block C.

Raw Material/Block	A	B	C		D
			% w/w		
1	25	25	0	40.3	0
2	0	0	50	0	0
3	0	0	0	19.5	0
4	15	15	0	0	0
5	0	0	0	0	76.0
SDIC	25	25	0	30.0	0
Calcium Sulphate	30.285	30.285	0	0	0
Sodium Sulphate	0	0	37.92	0	12.285
MgSO <sub>4</sub> .3H <sub>2</sub> O	0	0	5.0	0	0
Titanium dioxide	0.2	0.2	0	0.2	0.2
6	0	0	0	7.0	0
Mineral Oil	0	0	0	3.0	0
Yellow Zest VI	4.5	0	7.0	0	0
Lemonzone LS58473	0	4.5	0	0	0
Paliogen Yellow L1560	0.015	0.015	0.08	0	0
Bitrex	0	0	0	0	0.01
Fettgelb 3G	0	0	0	0	0.005
Limonia K0/239397	0	0	0	0	7.5
7	0	0	0	0	4.0
Total Weight/G	40	40	20	20	50
Life of Block/Days	15	28	28		28

## Key

1	Alkylarylsulphonate 90% additive sodium sulphate
2	Alkylarylsulphonate 80% additive sodium citrate
3	Alkylarylsulphonate 80% additive MgSO <sub>4</sub> .3H <sub>2</sub> O
4	Secondary alkane sulphonate (sodium salt)
5	Alkylarylsulphonate 80% additive Toluene sulphate
SDIC	Sodium dichloroisocyanurate dihydrate
6	Triethylene glycol caprylate caprate
Paliogen Yellow L1560	Pigment
Fettgelb 3G	Pigment
7	Cocomonoethanolamide

**CLAIMS:**

1. A lavatory cleansing block which has been formed by extruding two compositions, only one of the compositions containing a bleach, and the other composition containing a component which is not compatible with the bleach, characterised in that the compositions do not have a common hydrophobe component.
2. A block as claimed in claim 1, wherein one of the compositions comprises a colourant.
3. A block as claimed in claim 1, or 2, wherein only one of the compositions comprises a perfume.
4. A block as claimed in claim 3, wherein the perfume is a hydrophobe.
5. A lavatory cleansing block having a bleach and a perfume, characterised in that the block is extruded from a first composition containing the bleach and a second composition containing the perfume.
6. A block as claimed in claim 5, wherein the perfume does not have long term stability in the presence of the bleach.
7. A block as claimed in claim 5 or 6, wherein a bleach stable perfume is incorporated in the first composition.
8. A block as claimed in any one of the preceding claims wherein the block is a rim block.
9. A block as claimed in any one of claims 1 to 7, wherein the block is a cistern block.

10. A block as claimed in any one of claims 1 to 9, wherein the compositions are extruded.
11. A block as claimed in any one of claims 1 to 10, wherein the non-bleach containing composition includes a bleach activator.
12. A block as claimed in claim 11, wherein the bleach activator is sodium bromide.
13. A lavatory cleansing block comprising a first block portion formed of a composition including a bleach, and a second portion including a bleach activator.
14. A lavatory cleansing block as claimed in any one of claims 1 to 13, wherein both compositions include a surfactant.
15. A block as claimed in any one of claims 1 to 14, wherein the bleach is a halogen release agent.
16. A block as claimed in claim 15, wherein the bleach is a chlorine release agent.
17. A block as claimed in claim 16, wherein the bleach is an N-chlorinated cyanuric acid derivative.
18. A block as claimed in any one of the preceding claims, wherein the compositions are co-extruded.

1/1

IMMEDIATELY AFTER FLUSH

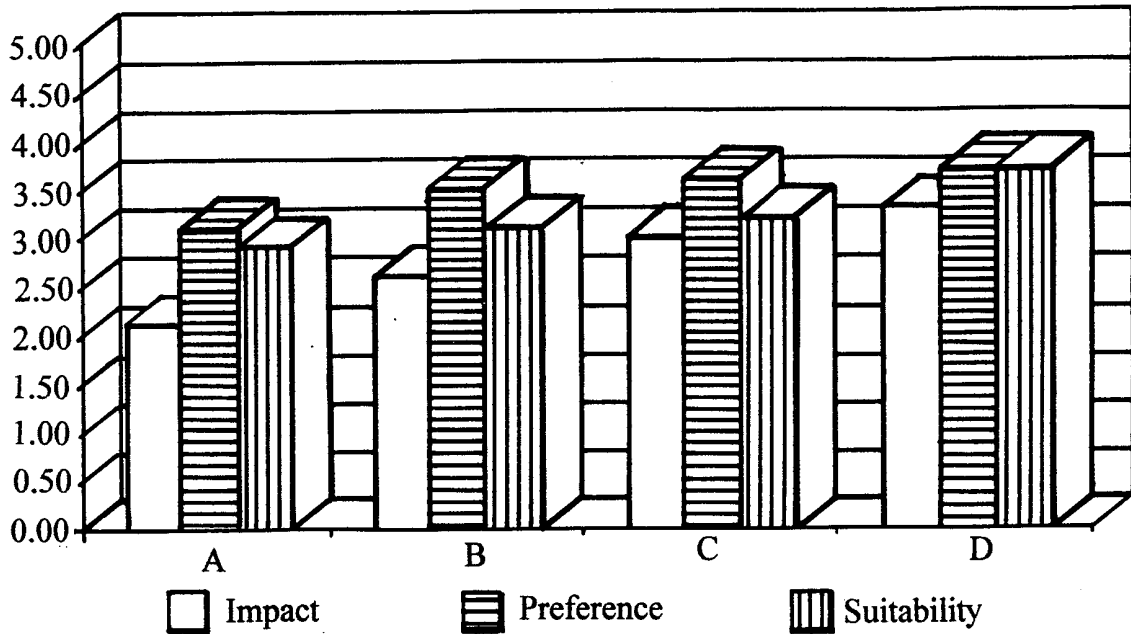


Fig. 1

ONE HOUR AFTER FLUSH

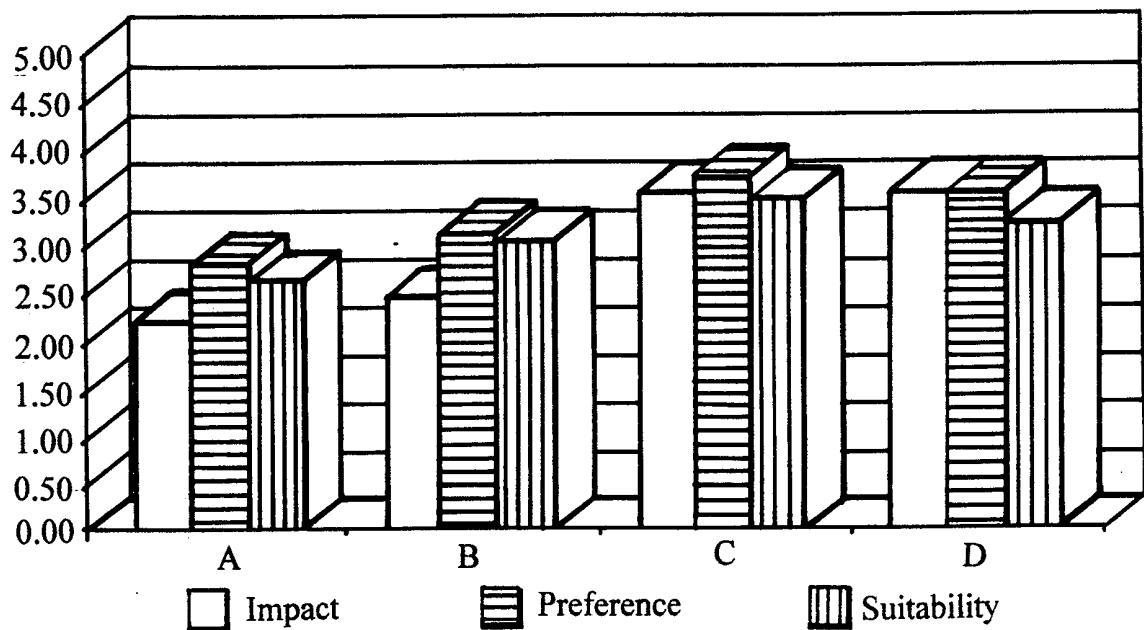


Fig. 2

# INTERNATIONAL SEARCH REPORT

Int. Patent Application No  
PCT/GB 99/03453

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC 7 C11D17/00 C11D3/39 C11D3/395 //C11D3/40,C11D3/50

According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**

Minimum documentation searched (classification system followed by classification symbols)  
IPC 7 C11D

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 101 402 A (HENKEL KGAA) 22 February 1984 (1984-02-22) cited in the application ---	1-3,5, 8-10, 14-18
A	EP 0 055 100 A (JEYES GROUP LTD) 30 June 1982 (1982-06-30) cited in the application page 13 -page 14; claims; examples 18-22 ---	1-3,5, 8-10, 14-17
A	US 4 557 926 A (NELSON ET AL.) 10 December 1985 (1985-12-10) claims 1-5 ---	1,11,12, 15-17
A	US 5 756 440 A (WATANABE ET AL.) 26 May 1998 (1998-05-26)  column 2, line 38 -column 7, line 5 claims 1-6,15-17 ---	1-3, 8-10, 14-17
-/--		

Further documents are listed in the continuation of box C.

Patent family members are listed in annex.

° Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

21 February 2000

Date of mailing of the international search report

29/02/2000

Name and mailing address of the ISA  
European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Serbetsoglou, A

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/GB 99/03453

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 206 725 A (JEYES GROUP LTD) 30 December 1986 (1986-12-30)  page 1, line 1 -page 6, line 2 claims -----	1-3, 8-10, 14-17
A	DE 44 39 677 A (HENKEL KGAA) 9 May 1996 (1996-05-09) page 3, line 17 -page 5, line 14 claims; example 3 -----	1-3, 14-17
P,A	GB 2 333 778 A (RECKITT & COLMAN FRANCE) 4 August 1999 (1999-08-04)  page 3, line 12 -page 4, line 32 claims -----	1-3, 8-10, 14-17

# INTERNATIONAL SEARCH REPORT

Information on patent family members

Int. ional Application No

PCT/GB 99/03453

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0101402    A	22-02-1984	DE 3225292 A	12-01-1984
		AT 21931 T	15-09-1986
		US 4578207 A	25-03-1986
		US 4683072 A	28-07-1987
EP 0055100    A	30-06-1982	AT 9818 T	15-10-1984
		AU 540392 B	15-11-1984
		AU 7911081 A	15-07-1982
		CA 1182371 A	12-02-1985
		GB 2089830 A, B	30-06-1982
		NZ 199355 A	03-02-1984
		US 4460490 A	17-07-1984
		ZA 8108752 A	24-11-1982
		US 4557926    A	10-12-1985
AU 3274084 A	14-03-1985		
BE 900498 A	05-03-1985		
CA 1230280 A	15-12-1987		
JP 1814258 C	18-01-1994		
JP 5024960 B	09-04-1993		
JP 60079100 A	04-05-1985		
NZ 209469 A	30-10-1987		
US 5756440    A	26-05-1998	BR 9801699 A	05-10-1999
		CA 2237445 A	27-11-1998
		CN 1200354 A	02-12-1998
		US 5958853 A	28-09-1999
EP 0206725    A	30-12-1986	AT 98297 T	15-12-1993
		AU 585356 B	15-06-1989
		AU 5887486 A	18-12-1986
		CA 1300464 A	12-05-1992
		DE 3689368 D	20-01-1994
		GB 2178442 A, B	11-02-1987
		US 5610126 A	11-03-1997
		ZA 8604428 A	28-01-1987
DE 4439677    A	09-05-1996	AT 174958 T	15-01-1999
		DE 59504653 D	04-02-1999
		WO 9614392 A	17-05-1996
		EP 0791047 A	27-08-1997
		ES 2126327 T	16-03-1999
		JP 10508339 T	18-08-1998
		US 5759974 A	02-06-1998
GB 2333778    A	04-08-1999	AU 2289699 A	16-08-1999
		WO 9938950 A	05-08-1999