



(51) International Patent Classification:
E01C 13/08 (2006.01) *D04H 11/00* (2006.01)

(21) International Application Number:
PCT/NL2010/050195

(22) International Filing Date:
15 April 2010 (15.04.2010)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
1036854 15 April 2009 (15.04.2009) NL

(72) Inventor; and

(71) Applicant : **DE VRIES, Hugo** [NL/NL]; Ringdijk 430,
NL-2983 GS Ridderkerk (NL).

(74) Agent: **BARTELD, Erik**; Sweelinckplein 1, NL-2517
GK Den Haag (NL).

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP,
KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD,
ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI,
NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD,
SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR,
TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG,
ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ,
TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE,
ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
ML, MR, NE, SN, TD, TG).

Published:

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ,

— with international search report (Art. 21(3))

(54) Title: METHOD FOR FORMING AN ARTIFICIAL GRASS LAYER AND ARTIFICIAL GRASS PRODUCT FOR USE THEREIN




FIG. 7

(57) Abstract: The invention relates to a method for forming an artificial grass layer on a substrate, comprising the steps of supplying a pack of flat and deformable artificial grass strips, in which the strips are arranged with their flat faces side-by-side and are connected to each other at mutually offset locations, placing the pack of artificial grass strips on or partially in the substrate, pulling apart the artificial grass strips, thus forming a grid, and at least partially filling at least some of the openings in the grid with a stabilizing material. The invention further relates to a method for forming such a pack of flat and deformable artificial grass strips. And finally, the invention relates to an artificial grass product, comprising a pack of flat and deformable artificial grass strips, each strip comprising a substantially straight lower edge and an upper edge having artificial grass blades protruding therefrom, wherein the strips are arranged with their flat faces in side-by-side relationship and their straight lower edges in substantially the same plane, and are connected to each other at mutually offset locations.



**Method for forming an artificial grass layer and
artificial grass product for use therein**

5 The invention relates to a method for forming an artificial grass layer on a substrate.

Artificial grass is generally known. It is not only used for laying sports fields, but also increasingly in gardens and public green areas. In comparison with natural grass the advantage of artificial grass is that it requires
10 little or no maintenance and yet remains fresh all year long.

Until now, artificial grass is usually laid by preparing a substrate and then unrolling an artificial grass mat thereon. This artificial grass mat is manufactured in a
15 factory using techniques that are derived from the carpeting industry. The artificial grass mat usually has a backing that is formed by a fabric or non-woven, and on which a large number of upright piles forming the blades of the artificial grass are attached by tufting, weaving or any
20 other connection technique. Apart from the fact that the artificial grass mat is of course supported by the substrate, there is no functional interaction between the artificial grass mat and the substrate.

The invention now has for its object to provide an
25 improved method for laying artificial grass by which the artificial grass may enter into functional interaction with the substrate, for instance serving to stabilize the substrate. In accordance with the invention this is accomplished by a method comprising the steps of supplying a
30 pack of flat and deformable artificial grass strips, in which the strips are arranged with their flat faces side-by-side and are connected to each other at mutually offset locations, placing the pack of artificial grass strips on or partially in the substrate, pulling apart the artificial
35 grass strips, thus forming a grid, and at least partially filling at least some of the openings in the grid with a stabilizing material. The connection locations form fixed points or vertices in the grid.

By laying the artificial grass in the form of a grid that can partially be accommodated in the substrate and by subsequently stabilizing the grid with filling material, the artificial grass may be used to support the substrate.

5 For instance a substrate of relatively loose material like desert sand may be stabilized in this way, so that it may carry loads and may for instance be used as a road. Moreover, the artificial grass immediately gives the surroundings a covered or overgrown appearance. Since the
10 artificial grass is supplied in the form of a pack of strips that may simply be pulled apart concertina-like, it may swiftly be laid. The artificial grass may also be used for instance on a sloping substrate, like a road bank, to secure this substrate against shifting. Use next to a road as
15 material for reinforcing a shoulder is also conceivable, while the artificial grass may of course also simply be used as a sports field or a playground.

It should be noted that the term "artificial grass" as used herein covers not just imitation grass made
20 of plastics material, but each kind of imitation grass that does not naturally grow in the substrate, also when the artificial grass strips are made of natural fiber material.

Preferred variants of the method according to the invention are defined in the dependent claims 2 to 4.

25 The invention further relates to a method for forming a pack of flat and deformable artificial grass strips which may be used in the above described method for laying an artificial turf.

The method according to the invention comprises
30 the steps of forming a plurality of flat artificial grass strips, each comprising a substantially straight lower edge and an upper edge having artificial grass blades protruding therefrom, placing the artificial grass strips with their flat faces in side-by-side relationship, such that the
35 straight lower edges of the strips lie substantially in the same plane, and connecting adjacent artificial grass strips to each other at mutually offset locations.

The flat artificial grass strips may be formed at a large scale in simple manner by forming a flat cloth and cutting the lengths of cloth therefrom. When forming the flat cloth, relatively dense lengths of cloth may then be
5 formed, which are connected by relatively wider spaced synthetic fibers, and repeatedly a relatively dense length of cloth and a plurality of relatively wider spaced synthetic fibers may be cut from the cloth to form an artificial grass strip. In this way a repeating pattern of
10 dense lengths of cloth and intermediate fibers, which each time define an artificial grass strip, may be formed in the cloth.

When the relatively widely spaced synthetic fibers are cut at various distances from the relatively
15 dense length of cloth, artificial grass blades having various lengths are formed, which give the artificial grass a natural appearance.

Preferably the flat cloth is woven, wherein the relatively dense lengths of cloth run in warp direction and
20 the relatively widely spaced synthetic fibers run in weft direction. In this way the cloth may be manufactured at industrial and at relatively low cost, while the selected orientations of the dense length of cloth and the intermediate fibers allow the design of the artificial grass
25 strips to be adapted to the requirements in a simple manner.

When the mutual spacing of the relatively widely spaced artificial fibers is varied, wisps of artificial grass are formed, which provide an even more natural appearance. This can be achieved by varying the mutual
30 spacing of the weft threads during weaving, but also by using different materials for the weft threads, like for instance a fibrous material having a high amount of shrinkage or a biodegradable fiber material.

On the other hand it is also conceivable that the
35 flat artificial grass strips are formed by forming a flat ribbon, attaching to the ribbon artificial grass blades that protrude therefrom on one side, and cutting the ribbon having the protruding artificial grass blades into strips.

In this way also materials may be used that are not suitable to be processed using techniques from the carpeting industry.

5 The flat ribbon may be extruded, which is a relatively simple and cheap process, while the artificial grass blades may be securely attached to the flat ribbon in simple manner by welding or gluing.

10 In yet another embodiment of the invention the flat artificial grass strips are formed by supplying a plurality of mutually parallel synthetic fibers, arranging at least one flat strip of a connecting material transversally over the synthetic fibers and connecting it thereto, and cutting the synthetic fibers in the vicinity of one of the edges of the connecting material.

15 For optimal strength and stiffness it is preferred that strips of connecting material are arranged on both sides of the synthetic fibers and are connected to the synthetic fibers by pressing.

20 For additional stability it may be desirable that at least some of the flat artificial grass strips are reinforced before being connected together.

25 When the artificial grass strips are made by weaving, this reinforcing may be achieved in a simple manner by calendering at least some of the relatively dense lengths of cloth.

 Alternatively it is also possible to attach at least some of the flat artificial grass strips to a support, while applying a strengthening coating is also one of the possibilities.

30 The flat artificial grass strips may be connected together by welding, gluing or sewing. Induction welding or ultrasonic welding may be considered as welding techniques. This has the advantage that no other material needs to be added, so that the artificial grass strips may eventually be
35 recycled as a whole. When gluing the use of a hot melt glue is to be preferred since that is simple to process. When the strips are sewn together the yarn that is used is preferably

made of the same or a similar material as the artificial grass strips, again with an eye to the eventual recycling.

Finally, the invention relates to an artificial grass product which may be used in a method for laying artificial grass as described in the preamble and which may be produced using the method described above. In accordance with the invention such an artificial grass product comprises a pack of flat and deformable artificial grass strips, each strip comprising a substantially straight lower edge and an upper edge having artificial grass blades protruding therefrom, wherein the strips are arranged with their flat faces in side-by-side relationship and their straight lower edges in substantially the same plane, and are connected to each other at mutually offset locations.

Preferred embodiments of the artificial grass product in accordance with the invention form the subject matter of the dependent claims 21 to 26.

The invention will now be illustrated by means of some examples, with reference being made to the annexed drawing in which:

Fig. 1 is a schematic top view of a pack of artificial grass strips in accordance with the invention,

Fig. 2 is a schematic top view of the pack of strips of fig. 1 in a somewhat drawn apart state, in which a grid is formed having relatively small openings,

Fig. 3 is a view corresponding with fig. 2 of the pack of strips when this is pulled further apart to form a wider grid,

Fig. 4 is a cross sectional view through the pack of strips along the line IV-IV in fig. 1, in which the spacing of the strips is exaggerated,

Fig. 5 is a cross sectional view of the pack of strips along the line V-V in fig. 3,

Fig. 6 is a cross sectional view of the pack of strips in their state when placed and filled,

Fig. 7 is a perspective top view of the pack of strips in the drawn apart state of fig. 3,

Fig. 8 schematically shows a flat woven cloth from which a number of artificial grass strips is cut,

Fig. 9 shows an alternative cutting scheme for forming artificial grass blades having different lengths,

5 Fig. 10 schematically shows an alternative embodiment of the flat woven cloth in which the synthetic fibers have different spacings for forming wisps of artificial grass, and

10 Fig. 11 schematically shows an extruder and an artificial grass blade fixing station placed downstream thereof.

An artificial grass product 1 according to the invention comprises a pack of flat and deformable artificial grass strips 2. Each artificial grass strip 2 has a
15 substantially straight lower edge 3 and an upper edge 4 from which artificial grass blades 5 protrude. The artificial grass blades 5 may be of any desired type: monofilament blades, fibrillated blades, foamed blades, stretched blades, etc. The strips 2 each have two flat faces 6, which lie next
20 to the flat faces 6 of two adjacent strips 2. The lower edges 3 of all artificial grass strips 2 in the pack lie in one and the same plane. Each strip 2 is connected to the adjacent strips 2 on both sides at mutually offset locations 7.

25 When the artificial grass product 1 is pulled apart, it forms a grid in which the connection locations 7 form fixed points or vertices. Openings 8 are then defined between the strips 2, which openings can be filled with a stabilizing material 9 when the artificial grass product 1
30 is placed on or partially in a substrate 10. The stabilizing material 9 may be relatively coarse like chippings or lava, but also relatively fine like sand or earth. Besides the stabilizing material 9 also a resilient and/or damping material like rubber granules may be accommodated in the
35 openings 8, whereby the artificial grass becomes suitable to

be played on. The artificial grass strip 2 itself can also be made of a resilient and/or damping material like a plastics foam. The material of the strip 2 does not have to be the same as the material of the artificial grass blades 5, although that does present advantages in view of the eventual recycling. The openings 8 may also be planted or sowed so that for instance natural grass plants or flowers can grow between the artificial grass. The strips 2 could also be made of a biodegradable material so that eventually, after the substrate 10 has been sufficiently stabilized, only the artificial grass blades 5 remain.

The artificial grass strips 2 may be cut from a flat woven cloth 11. Such a cloth 11 may comprise a number of relatively dense lengths of cloth 12 and relatively widely spaced fibers 13 therebetween. By suitably choosing the mutual spacing of the dense length of cloth 12 any desired length of the artificial grass blades 5 may in principle be selected. Spacings in the order of 20 cm may be chosen for use in a goal mouth, so that relatively long artificial grass is obtained.

The dense lengths of cloth 12 may be arranged in the warp direction K and the intermediate fibers 13 in the weft direction I. When all fibers 13 are cut at the same distance from the corresponding dense length of cloth 12, a single cut S will suffice, to be made along the edge 14 of the adjacent dense length of cloth 12 that will form the lower edge 3 of that strip 2. In case the fibers 13 are cut at different lengths (cutting line S1) for a more natural appearance, an additional cut S2 has to be formed along the edge of the next dense length of cloth 12. After cutting the strips 2 must be placed next to each other and connected to each other at offset locations 7, for which welding or gluing apparatus or a sewing machine may be used.

In order to obtain a more natural appearance the fibers 13 may have various spacings. This may be achieved during manufacture of the flat cloth 11 by different spacings between the weft threads, but it is also
5 conceivable that highly shrinking weft threads or biodegradable weft threads are used at some locations.

Instead of a woven cloth 11 the basis for the strips may also be formed by a ribbon of plastics material 15 that is formed by an extruder 16, and onto which separate
10 artificial grass blades 18 are attached in a station 17. This ribbon 15 may subsequently be cut into strips 2 in a station 19, which strips are then again mutually connected by welding, gluing, sewing or any other means to form the artificial grass product 1.

15 In yet another embodiment the strips 2 may be formed by supplying a plurality of synthetic fibers running parallel to each other, for instance as warp threads. Subsequently, strips of a connecting material may be arranged over the synthetic fibers with a fixed spacing in
20 the order of some centimetres. This connecting material will extend transversally to the longitudinal direction of the synthetic fibers. Several plastics, various types of geotextiles, foams or fabrics may be considered as connecting material. Preferably, strips of connecting
25 material are arranged on both sides of the synthetic fibers, which strips can then be pressed together to achieve a secure attachment of the synthetic fibers. Here again, artificial grass strips 2 are formed by cutting the synthetic fibers along the edges of the strips of connecting
30 material. These strips can again be assembled to form the artificial grass product 1 by welding, gluing, sewing or other means.

If so desired, the strips 2 may be reinforced before being connected to each other. To this end they can be attached to a support of a similar or different material, for instance a plastic (that may be foamed), another fabric
5 or a non-woven. They could also be coated with a reinforcing layer, while it is also conceivable to reinforce the dense lengths of cloth 12 of the flat fabric by calendering or melting.

Although the invention has been illustrated by
10 means of a number of examples, it will be clear that it is not limited thereto but may be varied in different ways. For instance, the pack of strips could first be pulled apart and only then be arranged on or in the substrate. Moreover, different materials may be used for the strips and the
15 artificial grass blades. Besides plastics like PP and PE, also plastic foams may be used, while moreover also natural fiber materials like flax, coconut fiber and the like can be used. The plastics to be used can comprise both new material and recycled material. Finally, it is conceivable that the
20 grid is reinforced by transverse members, which may be stuck through openings in the strips and may for instance be attached to the substrate by pins.

Consequently, the scope of the invention is solely determined by the following claims.

Claims

1. Method for forming an artificial grass layer on
5 a substrate, comprising the steps of:
- supplying a pack of flat and deformable
artificial grass strips, in which the strips are arranged
with their flat faces side-by-side and are connected to each
other at mutually offset locations,
10 - placing the pack of artificial grass strips on
or partially in the substrate,
- pulling apart the artificial grass strips, thus
forming a grid, and
- at least partially filling at least some of the
15 openings in the grid with a stabilizing material.

2. Method according to claim 1, characterized in
that the stabilizing material is chosen from the group
consisting of sand, gravel, earth and lava.
20

3. Method according to claim 1 or 2, characterized
in that at least some of the openings are sowed or planted.

4. Method according to any one of the preceding
25 claims, characterized in that at least some of the openings
are further filled with a resilient and/or damping material

5. Method for forming a pack of flat and
deformable artificial grass strips, comprising the steps of:
30 - forming a plurality of flat artificial grass
strips, each comprising a substantially straight lower edge
and an upper edge having artificial grass blades protruding
therefrom,
- placing the artificial grass strips with their
35 flat faces in side-by-side relationship, such that the
straight lower edges of the strips lie substantially in the
same plane, and

- connecting adjacent artificial grass strips to each other at mutually offset locations.

5 6. Method according to claim 5, characterized in that the flat artificial grass strips are formed by forming a flat cloth and cutting the strips therefrom.

10 7. Method according to claim 6, characterized in that when forming the flat cloth relatively dense lengths of cloth are formed, which are connected by relatively wider spaced synthetic fibers, and repeatedly a relatively dense length of cloth and a plurality of relatively wider spaced synthetic fibers are cut from the cloth to form an artificial grass strip.

15 8. Method according to claim 7, characterized in that the relatively widely spaced synthetic fibers are cut at various distances from the relatively dense length of cloth.

20 9. Method according to claim 7 or 8, characterized in that the flat cloth is woven, wherein the relatively dense lengths of cloth run in warp direction and the relatively widely spaced synthetic fibers run in weft direction.

25 10. Method according to any one of claims 7 to 9, characterized in that the mutual spacing of the relatively widely spaced artificial fibers is varied.

30 11. Method according to claim 5, characterized in that the flat artificial grass strips are formed by forming a flat ribbon, attaching to the ribbon artificial grass blades that protrude therefrom on one side, and cutting the ribbon having the protruding artificial grass blades into strips.

35

12. Method according to claim 11, characterized in that the flat ribbon is extruded.

13. Method according to claim 11 or 12,
5 characterized in that the artificial grass blades are attached to the flat ribbon by welding or gluing.

14. Method according to claim 5, characterized in that the flat artificial grass strips are formed by
10 supplying a plurality of mutually parallel synthetic fibers, arranging at least one flat strip of a connecting material transversally over the synthetic fibers and connecting it thereto, and cutting the synthetic fibers in the vicinity of one of the edges of the connecting material.

15
15. Method according to claim 14, characterized in that strips of connecting material are arranged on both sides of the synthetic fibers and are connected to the synthetic fibers by pressing.

20
16. Method according to any one of claims 5 to 15, characterized in that at least some of the flat artificial grass strips are reinforced before being connected together.

25
17. Method according to any one of claims 7 to 10 and claim 16, characterized in that at least some of the relatively dense lengths of cloth are calendered.

18. Method according to claim 17, characterized in
30 that at least some of the flat artificial grass strips are attached to a support.

19. Method according to any one of claims 5 to 18,
characterized in that the flat artificial grass strips are
35 connected to each other by welding, gluing or sewing.

20. Artificial grass product, comprising a pack of flat and deformable artificial grass strips, each strip

comprising a substantially straight lower edge and an upper edge having artificial grass blades protruding therefrom, wherein the strips are arranged with their flat faces in side-by-side relationship and their straight lower edges in substantially the same plane, and are connected to each other at mutually offset locations.

21. Artificial grass product according to claim 20, characterized in that each flat artificial grass strip comprises a relatively densely woven cloth and a plurality of relatively widely spaced synthetic fibers protruding therefrom.

22. Artificial grass product according to claim 21, characterized in that the relatively densely woven length of cloth is reinforced.

23. Artificial grass product according to claim 20, characterized in that each flat artificial grass strip comprises a ribbon of plastics material and a plurality of artificial grass blades attached thereto and protruding from one side.

24. Artificial grass product according to claim 23, characterizing in that the plastics material is a foam.

25. Artificial grass product according to any one of claims 20 to 24, characterized in that the flat artificial grass strips are connected to each other by welding, gluing or sewing.

26. Artificial grass product according to any one of claims 20 to 25, characterized in that the flat artificial grass strips are at least partially manufactured from a biodegradable material.

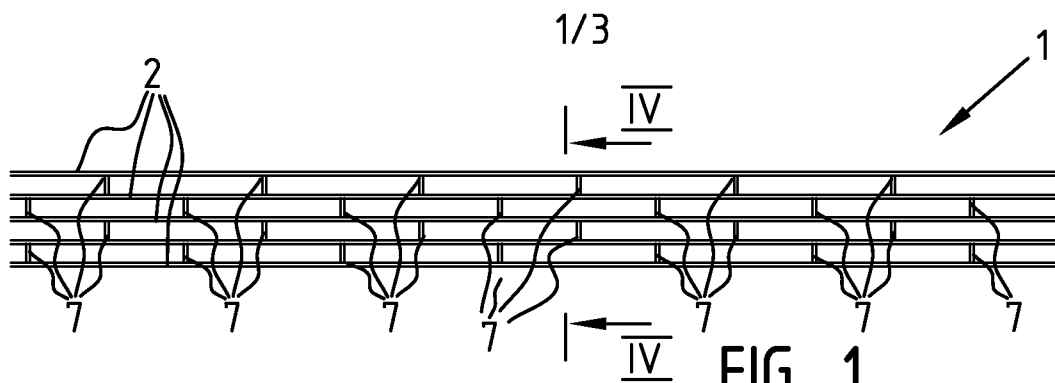


FIG. 1

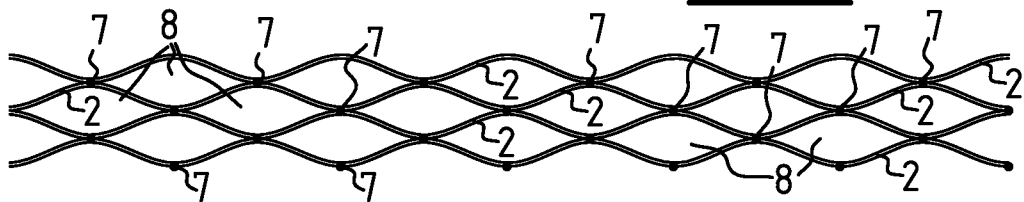


FIG. 2

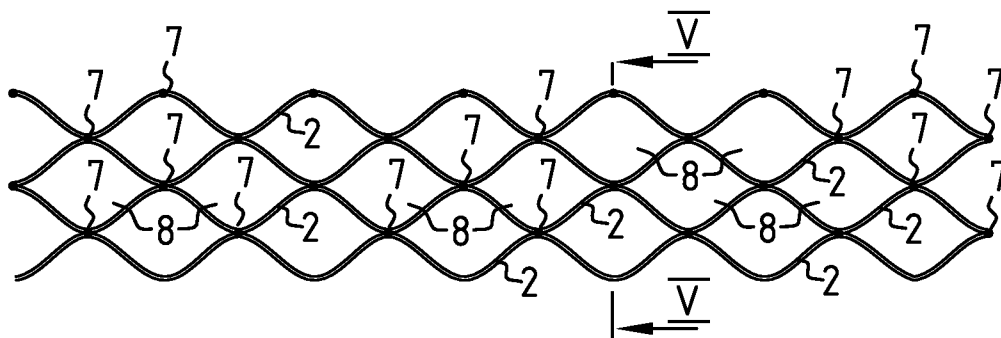


FIG. 3

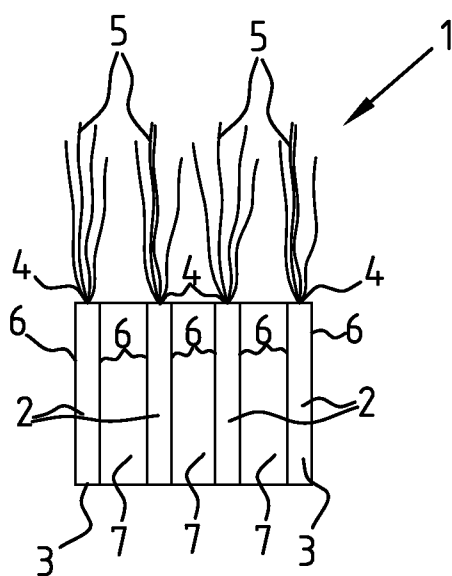


FIG. 4

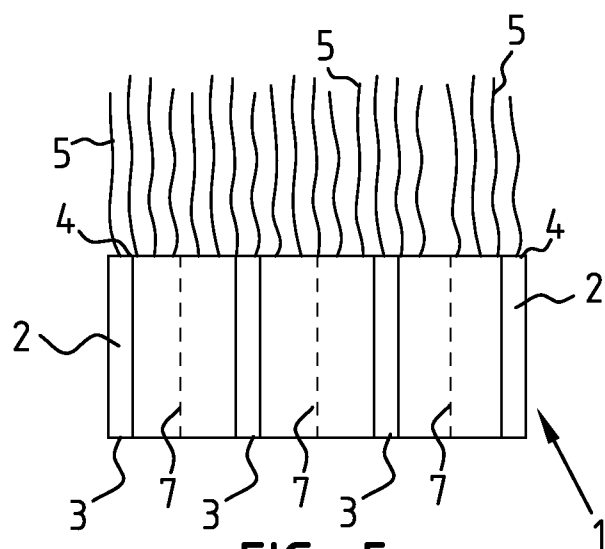


FIG. 5

2/3

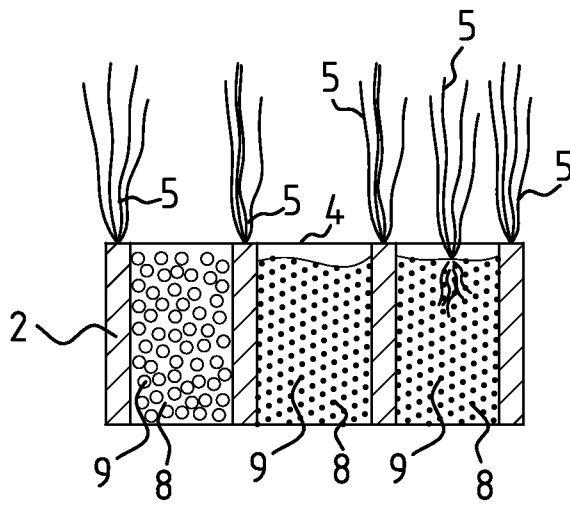


FIG. 6

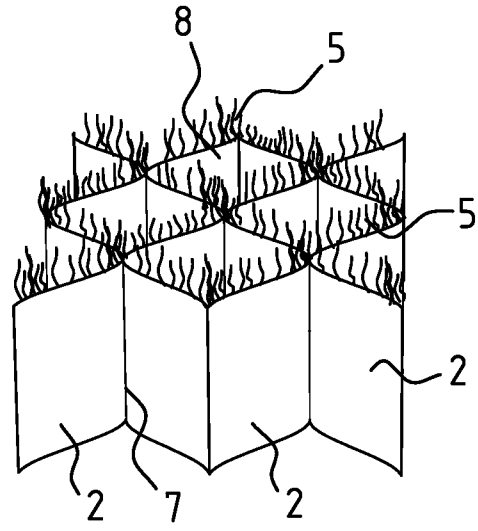


FIG. 7

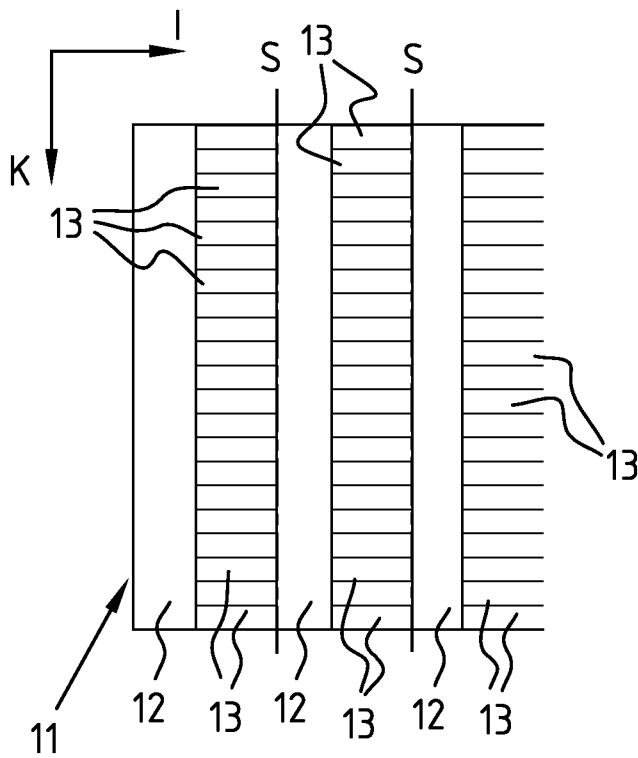


FIG. 8

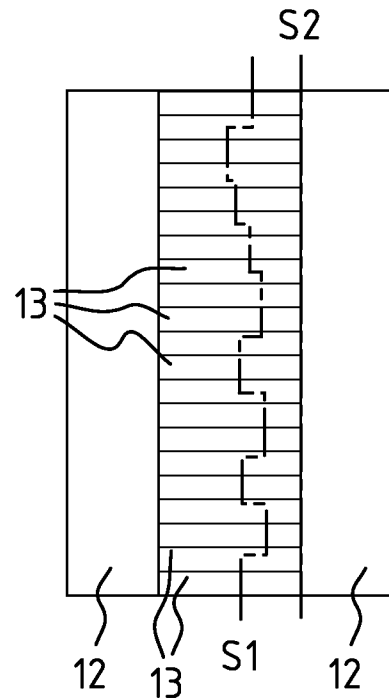


FIG. 9

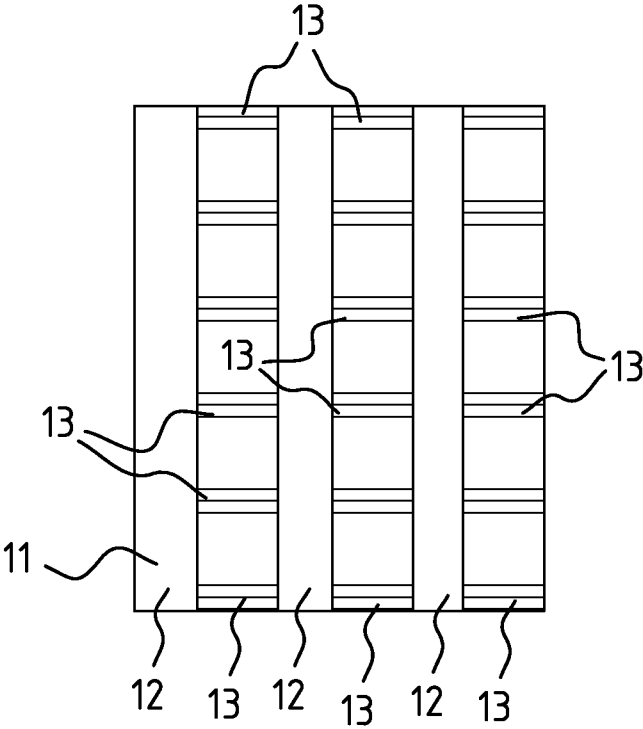


FIG. 10

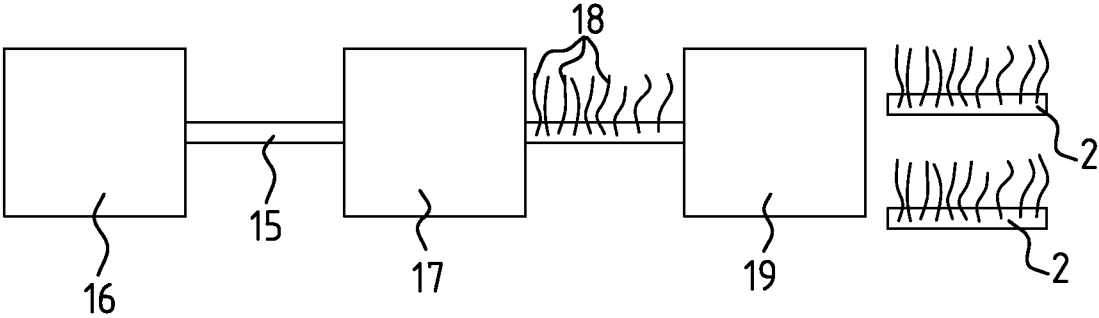


FIG. 11

INTERNATIONAL SEARCH REPORT

International application No

PCT/NL2010/050195

A. CLASSIFICATION OF SUBJECT MATTER

INV. E01C13/08 D04H11/00
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E01C D04H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	JP 2 167747 A (DIATEX KK) 28 June 1990 (1990-06-28) * abstract; figures	1
X	GB 2 185 769 A (COMPORGAN RENDSZERHAZ K V COMPORGAN RENDSZERHAZ K V [HU]) 29 July 1987 (1987-07-29) page 1, line 120 - page 2, line 5; figures 1-3	1-4
X	US 4 138 514 A (TERPAY JOHN M) 6 February 1979 (1979-02-06) column 1, lines 25-45; figures 1,2,6 column 3, lines 1-45	5-10,16, 17,20-22
X	JP 2 091302 A (DIATEX KK) 30 March 1990 (1990-03-30) * abstract; figures	5,16, 20-22
	-/--	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

G document member of the same patent family

Date of the actual completion of the international search

7 July 2010

Date of mailing of the international search report

14/07/2010

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Gallego, Adoración

INTERNATIONAL SEARCH REPORT

International application No

PCT/NL2010/050195

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 673 056 A (NADLER MARTIN L) 27 June 1972 (1972-06-27) column 1, lines 62-75; figures 2,4 -----	8,10
X	JP 2 261104 A (DIATEX KK) 23 October 1990 (1990-10-23) * abstract; figures 11,12 -----	5,11-26

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/NL2010/050195

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 2167747	A	28-06-1990	JP 2087866 C JP 7099003 B	02-09-1996 25-10-1995
GB 2185769	A	29-07-1987	DE 3700884 A1 FR 2593530 A1 HU 43659 A2 US 4804293 A	10-09-1987 31-07-1987 30-11-1987 14-02-1989
US 4138514	A	06-02-1979	NONE	
JP 2091302	A	30-03-1990	NONE	
US 3673056	A	27-06-1972	NONE	
JP 2261104	A	23-10-1990	JP 1987762 C JP 7006164 B	08-11-1995 30-01-1995