

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization

International Bureau



(10) International Publication Number

WO 2013/124684 A1

(43) International Publication Date

29 August 2013 (29.08.2013)

WIPO | PCT

(51) International Patent Classification:

C08G 61/02 (2006.01) *H01B 1/12* (2006.01)
C08G 61/12 (2006.01) *H01L 51/00* (2006.01)
C08K 5/01 (2006.01) *H01L 51/05* (2006.01)
C08L 65/00 (2006.01) *H01L 51/42* (2006.01)
C09D 165/00 (2006.01)

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(21) International Application Number:

PCT/GB2013/050459

(22) International Filing Date:

25 February 2013 (25.02.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

1203159.7 23 February 2012 (23.02.2012) GB

(71) Applicant: SMARTKEM LIMITED [GB/GB]; Hexagon Tower, Delaunays Road, Blackley, Manchester, Greater Manchester M9 8ZS (GB).

(72) Inventor: GRIFFITHS, Russell Jon; 31 Shillingford Road, Farnworth, Bolton, Lancashire BL4 7DJ (GB).

(74) Agent: CLARKE, Lionel Paul; The Broadgate Tower, 20 Primrose Street, London EC2A 2ES (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: ORGANIC SEMICONDUCTOR COMPOSITIONS

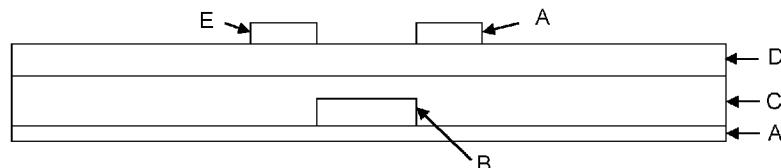


Figure 1

(57) Abstract: The present invention relates to organic copolymers and organic semiconducting compositions comprising these materials, including layers and devices comprising such organic semiconductor compositions. The invention is also concerned with methods of preparing such organic semiconductor compositions and layers and uses thereof. The invention has application in the field of printed electronics and is particularly useful as the semiconducting material for use in formulations for organic thin film transistor (OTFT) backplanes for displays, integrated circuits, organic light emitting diodes (OLEDs), photodetectors, organic photovoltaic (OPV) cells, sensors, memory elements and logic circuits.

ORGANIC SEMICONDUCTOR COMPOSITIONS

Field of the Invention

The present invention relates to organic copolymers and organic semiconducting compositions comprising these materials, including layers and devices comprising 5 such organic semiconductor compositions. The invention is also concerned with methods of preparing such organic semiconductor compositions and layers and uses thereof. The invention has application in the field of printed electronics and is particularly useful as the semiconducting material for use in formulations for organic 10 field effect transistor (OFET) backplanes for displays, integrated circuits, organic light emitting diodes (OLEDs), photodetectors, organic photovoltaic (OPV) cells, sensors, memory elements and logic circuits.

Background of the Invention

In recent years, there has been an increasing interest in organic semiconducting materials as an alternative to conventional silicon-based semiconductors. Organic 15 semiconducting materials have several advantages over those based on silicon, such as lower cost, easier manufacturing, solution processability at low temperatures as well as increased flexibility, mechanical robustness, good compatibility with a wide variety of flexible substrates and light weight. They thus offer the possibility of producing more convenient high performance electronic 20 devices.

Polyacene compounds and their analogues in particular have shown promise in this field of technology. WO 2005/055248 for example, discloses an organic semiconducting layer formulation comprising an organic binder which has a permittivity (ϵ) at 1000 Hz of 3.3 or less, and a polyacene compound. However the 25 method for preparing the OFETs described in WO 2005/055248 in practice is limited and is only useful for producing top gate OFETs having relatively long channel lengths (typically > 50 microns). A further disadvantage of WO 2005/055248 that is overcome by the present invention, is that it frequently uses undesirable chlorinated solvents. The highest performance semiconductor compositions disclosed in WO 30 2005/055248 having mobilities $\geq 1.0 \text{ cm}^2 \text{V}^{-1} \text{s}^{-1}$, incorporated 1,2-dichlorobenzene as the solvent (page 54, Table 5 and examples 14, 21 and 25). Moreover these solvents are not ones that would be industrially acceptable in a printing process and these are also damaging to the environment. Therefore it would be desirable to use more benign solvents for the manufacture of these semiconductor compositions.

Furthermore, it is generally thought that only polymer binders with a permittivity of less than 3.3 could be used since any polymers with a higher permittivity resulted in a very significant reduction in mobility values of the OFET device.

This reduction in mobility value can further be seen in WO 2007/078993 which 5 discloses the use of 2,3,9,10-substituted pentacene compounds in combination with insulating polymers having a dielectric constant at 1000 Hz of greater than 3.3. These compounds are reported to exhibit mobility values of between 10^{-2} and 10^{-7} $\text{cm}^2\text{V}^{-1}\text{s}^{-1}$ which are too low to be industrially useful.

Therefore, the present invention seeks to provide organic semiconductor 10 compositions, which overcome the above-mentioned problems, by providing solvent soluble, high mobility, high flexibility polycyclic aromatic hydrocarbon copolymers, especially polyacene copolymers and polyacene analogue copolymers having a tunable permittivity value and which exhibit high mobility values.

Summary of the Invention

15 The copolymers and compositions of the invention are expected to produce soluble materials that, on deposition, afford flexible, non-brittle layers unlike layers made from solely small molecule compounds. The copolymers of this invention have significantly higher mobilities than typical semiconducting binders used in the field of printable electronics, such as the polytriarylamine class of semiconducting binders 20 that have mobilities in the order of $\sim 10^{-6}$ to 10^{-3} cm^2/Vs . The copolymers of the invention will be industrially useful in the fabrication of rollable and flexible electronic devices such as OTFT arrays for displays; large area printed sensors and printed logic. In particular, the semiconducting polymers of this invention will be useful in formulations for organic thin film transistors (OTFTs) having short channel lengths (\leq 25 30 microns and even ≤ 5 to 10 microns) that may be used as the backplane driver for electrophoretic displays, high resolution LCD and AMOLED displays.


The copolymers are also soluble in benign, non-chlorinated solvents, such as those typically used in printing.

30 The present invention also provides highly flexible, non-brittle, semi-conducting films.

Polycyclic Aromatic Hydrocarbon Copolymers


Polycyclic Aromatic Hydrocarbon Copolymers (hereinafter PAHCs) according to the present invention comprise a mixture of at least one polyacene monomer unit having

the Formula (A) and at least one cis/trans-indenofluorene monomer unit having the Formula (B)/(B').

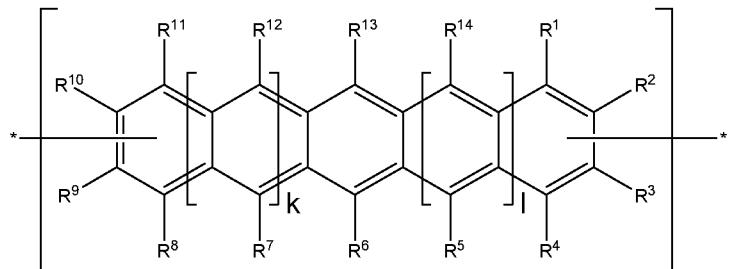


Formula (A)

5

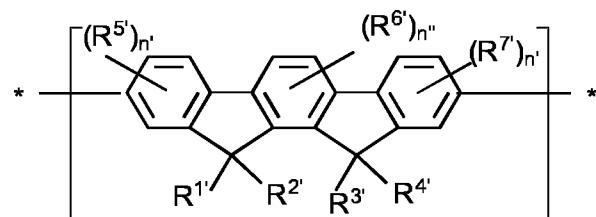

(Formula B)

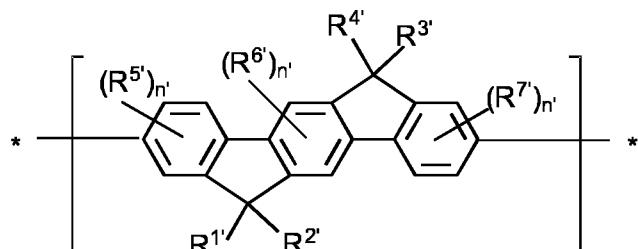

10

Formula (B')

wherein each of R¹, R², R³, R⁴, R⁵, R⁶, R⁷, R⁸, R⁹, R¹⁰, R¹¹, R¹², R¹³ and R¹⁴, which may be the same or different, independently represents hydrogen; a branched or unbranched, substituted or unsubstituted C₁-C₄₀ alkyl group; a branched or unbranched, substituted or unsubstituted C₂-C₄₀ alkenyl group; a branched or unbranched, substituted or unsubstituted C₂-C₄₀ alkynyl group; an optionally substituted C₃-C₄₀ cycloalkyl group; an optionally substituted C₆-C₄₀ aryl group; an optionally substituted C₁-C₄₀ heterocyclic group; an optionally substituted C₁-C₄₀ heteroaryl group; an optionally substituted C₁-C₄₀ alkoxy group; an optionally substituted C₆-C₄₀ aryloxy group; an optionally substituted C₇-C₄₀ alkylaryloxy group;

an optionally substituted C₂-C₄₀ alkoxy carbonyl group; an optionally substituted C₇-C₄₀ aryloxy carbonyl group; a cyano group (-CN); a carbamoyl group (-C(=O)NR¹⁵R¹⁶); a carbonyl group (-C(=O)-R¹⁷); a carboxyl group (-CO₂R¹⁸) a cyanate group (-OCN); an isocyano group (-NC); an isocyanate group (-NCO); a

5 thiocyanate group (-SCN) or a thioisocyano group (-NCS); an optionally substituted amino group; a hydroxy group; a nitro group; a CF₃ group; a halo group (Cl, Br, F, I); -SR¹⁹; -SO₃H; -SO₂R²⁰; -SF₅; an optionally substituted silyl group; a C₂-C₁₀ alkynyl group substituted with a SiH₂R²² group, a C₂-C₁₀ alkynyl substituted with a SiHR²²R²³ group, or a C₂-C₁₀ alkynyl substituted with a -Si(R²²)_x(R²³)_y(R²⁴)_z group;

10 wherein each R²² group is independently selected from the group consisting of a branched or unbranched, substituted or unsubstituted C₁-C₁₀ alkyl group, a branched or unbranched, substituted or unsubstituted C₂-C₁₀ alkynyl group, a substituted or unsubstituted C₂-C₂₀ cycloalkyl group, a substituted or unsubstituted C₂-C₁₀ alkenyl group, and a substituted or unsubstituted C₆-C₂₀ cycloalkylalkylene

15 group;

each R²³ group is independently selected from the group consisting of a branched or unbranched, substituted or unsubstituted C₁-C₁₀ alkyl group, a branched or unbranched, substituted or unsubstituted C₂-C₁₀ alkynyl group, a substituted or unsubstituted C₂-C₁₀ alkenyl group, a substituted or unsubstituted C₂-C₂₀ cycloalkyl group, and a substituted or unsubstituted C₆-C₂₀ cycloalkylalkylene group;

20 R²⁴ is independently selected from the group consisting of hydrogen, a branched or unbranched, substituted or unsubstituted C₂-C₁₀ alkynyl group, a substituted or unsubstituted C₂-C₂₀ cycloalkyl group, a substituted or unsubstituted C₆-C₂₀ cycloalkylalkylene group, a substituted C₅-C₂₀ aryl group, a substituted or

25 unsubstituted C₆-C₂₀ arylalkylene group, an acetyl group, a substituted or unsubstituted C₃-C₂₀ heterocyclic ring comprising at least one of O,N,S and Se in the ring;

wherein x= 1 or 2; y=1 or 2; z=0 or 1; and (x+y+z)=3;

30 wherein each of R¹⁵, R¹⁶, R¹⁸, R¹⁹ and R²⁰ independently represent H or optionally substituted C₁-C₄₀ carbyl or hydrocarbyl group optionally comprising one or more heteroatoms;

wherein R¹⁷ represents a halogen atom, H or optionally substituted C₁-C₄₀ carbyl or C₁-C₄₀ hydrocarbyl group optionally comprising one or more heteroatoms;

wherein k and l are independently 0, 1 or 2;

wherein at least two of R^1 , R^2 , R^3 , R^4 , R^8 , R^9 , R^{10} and R^{11} are a bond, represented by ——*, to another monomer unit having the Formula (A) or (B)/(B'); and wherein each $R^{1'}$, $R^{2'}$, $R^{3'}$, $R^{4'}$, $R^{5'}$, $R^{6'}$, $R^{7'}$, each of which may be the same or different, is selected from the same group as R^1 , R^2 , R^3 , R^4 , R^6 , R^7 and wherein preferably at least one of the groups, $R^{1'}$, $R^{2'}$, $R^{3'}$, $R^{4'}$, $R^{5'}$, $R^{6'}$ and $R^{7'}$ is a polar or polarising group and for the monomer group (B)/(B') ——* represents a bond to another monomer unit having the Formula (A) or (B)/(B'); and

wherein $n' = 1$ to 3 .

Preferably, $k = l = 0$ or 1.

10 Preferably, $k = 1$ and $l = 1$.



Preferably, $x = 2$ and $y = 1$.

Preferably when $z=0$, R^{22} and R^{23} together comprise a combination of (i) branched or unbranched, substituted or unsubstituted C_1 - C_8 alkyl group(s) and (ii) branched or unbranched, substituted or unsubstituted C_2 - C_8 alkenyl group(s).

15 Preferably, any of R²², R²³ and R²⁴ may optionally be substituted with a halogen atom.

Particularly preferred PAHCs according to the present invention are shown in the following table:

Preferred PAHs		
Monomer A	Monomer B	Monomer C
Case 1	$R^{1'} = R^{2'} = R^{3'} = R^{4'} = C_1$ to C_{14} alkyl group, preferably n-octyl groups	$R^{1'}, R^{2'}, R^{3'}, R^{4'}, R^{5'}, R^{6'}, R^{7'}, R^{8'}, R^{9'}, R^{10'}, R^{11'}, R^{12'}, R^{13'}, R^{14'} = H$

unit of Monomer (A) or (B)	R ^{5'} , R ^{6'} and R ^{7'} are H or C ₁ to C ₄ alkyl groups; or C ₁ to C ₄ alkoxy groups; or cyano groups; or isopropyl cyano groups.	
Case 2 R ⁶ = R ¹³ = triisopropylsilylethynyl		
Case 3 R ⁶ = R ¹³ = 		
Case 4 R ⁶ = R ¹³ = triisopropylsilylethynyl; and R ¹ , R ⁴ , R ⁸ , R ¹¹ = C ₁ to C ₄ alkyl (e.g. methyl)		
Case 5 R ⁶ = R ¹³ = triisopropylsilylethynyl; and R ¹ , R ⁴ , R ⁸ , R ¹¹ = C ₁ to C ₄ alkoxy (e.g. methoxy)		
Case 6 R ⁶ = R ¹³ = triethylsilylethynyl		
Case 7 R ⁶ = R ¹³ = 		
where Z = C ₁ -C ₅ alkyl/branched alkyl (e.g. methyl or isopropyl)		
Case 1	R ^{1'} , R ^{2'} , R ^{3'} and R ^{4'} are C ₁ to C ₁₄ alkyl group, preferably n-octyl groups	R ^b , R ^d , R ^e = H
Case 2		R ^a and R ^c = C ₁ to C ₄ alkyl
Case 3		
Case 4		
Case 5	R ^{5'} , R ^{6'} and R ^{7'} are H or C ₁ to C ₄ alkyl groups; or C ₁ to C ₄ alkoxy groups; or cyano groups; or isopropyl cyano groups.	
Case 6		
Case 7		
Case 1	R ^{1'} , R ^{2'} , R ^{3'} and R ^{4'} are C ₁ to C ₁₄ alkyl group, preferably n-octyl groups	R ^b , R ^c , R ^d , R ^e = H
Case 2		R ^a = C ₁ to C ₆ alkoxy
Case 3		
Case 4		
Case 5	R ^{5'} , R ^{6'} and R ^{7'} are H or C ₁ to C ₄ alkyl groups; or C ₁ to C ₄ alkoxy groups; or cyano groups; or isopropyl cyano groups.	(i) R ^a = methoxy (ii) R ^a = ethoxy
Case 6		
Case 7		
Case 1	R ^{1'} , R ^{2'} , R ^{3'} and R ^{4'} are C ₁ to C ₁₄ alkyl group, preferably	R ^a , R ^b , R ^d , R ^e = H
Case 2		R ^c = C ₁ to C ₆ alkoxy

Case 3	n-octyl groups	
Case 4		(i) R ^c = methoxy (ii) R ^c = ethoxy
Case 5		
Case 6		
Case 7		
Case 1	R ¹ , R ² , R ³ and R ⁴ are C ₁ to C ₁₄ alkyl group, preferably n-octyl groups	R ^a , R ^b , R ^c , R ^d = H R ^e = C ₁ to C ₆ alkoxy
Case 2		
Case 3		
Case 4		
Case 5		
Case 6		
Case 7		
Case 1	R ¹ , R ² , R ³ and R ⁴ are C ₁ to C ₁₄ alkyl group, preferably n-octyl groups	R ^b , R ^d , R ^e = H R ^a = R ^c = C ₁ to C ₆ alkoxy
Case 2		
Case 3		
Case 4		
Case 5	R ⁵ , R ⁶ and R ⁷ are H or C ₁ to C ₄ alkyl groups; or C ₁ to C ₄ alkoxy groups; or cyano groups; or isopropyl cyano groups.	(i) R ^a = R ^c = methoxy (ii) R ^a = R ^c = ethoxy
Case 6		
Case 7		
Case 1	R ¹ , R ² , R ³ and R ⁴ are C ₁ to C ₁₄ alkyl group, preferably n-octyl groups	R ^b , R ^d = H R ^a , R ^c , R ^e = C ₁ to C ₆ alkoxy
Case 2		
Case 3		
Case 4		
Case 5	R ⁵ , R ⁶ and R ⁷ are H or C ₁ to C ₄ alkyl groups; or C ₁ to C ₄ alkoxy groups; or cyano groups; or isopropyl cyano groups.	(i) R ^a , R ^c , R ^e = methoxy (ii) R ^a , R ^c , R ^e = ethoxy
Case 6		
Case 7		
Case 1	R ¹ = R ² = C ₁ to C ₁₄ alkyl group, preferably n-octyl groups	R ^a , R ^e = H R ^b , R ^c , R ^d = C ₁ to C ₆ alkoxy
Case 2		
Case 3		
Case 4		
Case 5	R ³ , R ⁴ = H or C ₁ to C ₄ alkyl groups; or C ₁ to C ₄ alkoxy groups; or cyano groups; or isopropyl cyano groups.	(i) R ^b , R ^c , R ^d = methoxy (ii) R ^b , R ^c , R ^d = ethoxy
Case 6		
Case 7		
Case 1	R ¹ , R ² , R ³ and R ⁴ are C ₁ to C ₁₄ alkyl group, preferably n-octyl groups	R ^b , R ^c , R ^d , R ^e = H
Case 2		
Case 3		
Case 4		
Case 5	R ⁵ , R ⁶ and R ⁷ are H or C ₁ to C ₄ alkyl groups; or C ₁ to C ₄ alkoxy groups; or cyano groups.	R ^a = Cyano (CN)
Case 6		

Case 7	groups; or isopropyl cyano groups.	
Case 1	R^1, R^2, R^3 and R^4 are C_1 to C_{14} alkyl group, preferably n-octyl groups	$R^b, R^c, R^d, R^e = H$
Case 2		$R^a =$ Isopropylcyano group
Case 3		
Case 4		
Case 5	R^5, R^6 and R^7 are H or C_1 to C_4 alkyl groups; or C_1 to C_4 alkoxy groups; or cyano groups; or isopropyl cyano groups.	Monomer C:
Case 6		
Case 7		
Case 1	R^1, R^2, R^3 and R^4 are C_1 to C_{14} alkyl group, preferably n-octyl groups	$R^a, R^b, R^d, R^e = H$
Case 2		$R^c =$ Isopropylcyano group
Case 3		
Case 4		
Case 5	R^5, R^6 and R^7 are H or C_1 to C_4 alkyl groups; or C_1 to C_4 alkoxy groups; or cyano groups; or isopropyl cyano groups.	Monomer C:
Case 6		
Case 7		

The organic semiconductors compounds specified in the table are particularly preferred as they combine the beneficial properties of high charge transport mobility (of the binders) with a polarity that is more compatible with benign, non-chlorinated solvents that will be desirable for use in large area printing. In addition, as these compounds are more polar once deposited as the OSC layer, or alternatively as a component in the OSC layer, they are expected to be resistant to being re-dissolved by the hydrophobic solvents used for the organic gate insulators (OGL) such as Cytop. Furthermore, it is expected that the polar binders are useful for both top gate and bottom gate OTFTs, particularly for bottom gate OTFTs.

The copolymers according to the present invention preferably have a number average molecular weight (M_n) of between 400 and 100,000, more preferably between 1600 and 20000, more preferably between 500 and 10000, yet more preferably between 450 and 5000, and even more preferably between 850 and 5000.

The copolymers according to the present invention preferably have between 1 and 100000 monomer units having the Formula (A) and between 1 and 100000 cis/trans-indenofluorene monomer units having the Formula (B)/(B'). More preferably, the copolymers have between 1 and 1000 monomer units having the


Formula (A) and between 1 and 1000 cis/trans-indenofluorene monomer units having the Formula (B)/(B'). More preferably, the copolymers have between 1 and 100 monomer units having the Formula (A) and between 1 and 100 cis/trans-indenofluorene monomer units having the Formula (B)/(B'). Yet even more 5 preferably, the copolymers have between 1 and 10 monomer units having the Formula (A) and between 1 and 10 cis/trans-indenofluorene monomer units having the Formula (B)/(B').

Preferably, the organic semiconductor compositions according to the present invention contain less than 10% by weight, more preferably less than 5% by weight, 10 more preferably less than 1%, more preferably, substantially no organic binders which have a permittivity at 1000 Hz of less than 3.4.

Preferred PAHCs and compositions of the present invention contain at least 20 wt. %, more preferably at least 20-40 wt. % (of the total of all monomer units (A) and (B)/(B') in the copolymer or composition) of a polyacene monomer unit having the 15 Formula (A) and at least 20 wt. %, preferably at least 20-80 wt. %, more preferably at least 50 wt. %, and even more preferably at least 60-80 wt.% of a monomer unit having the Formula (B)/(B').


Preferred PAHCs and compositions of the present invention contain at least 40 wt. % (of the total of all monomer units (A) and (B)/(B') in the copolymer or 20 composition) of a polyacene monomer unit having the Formula (A) and at least 40 wt. %, preferably 60 wt. % of a monomer unit having the Formula (B)/(B'). Preferred PAHCs contain monomer unit (B)/(B') as the major component.

The polyacene copolymers may be produced according to the following general synthetic regime. For simplicity, a bis(trialkyl)silyl substituted pentacene is shown 25 (no further substitutions are shown, the skilled person understanding how this can be genericised to the structures shown above) being coupled to a cis/trans-indenofluorene monomer. The coupling reaction is preferably a Yamamoto type coupling (using Nickel chloride, zinc, 2,2'-bipyridyl, triphenylphosphine and dimethyl acetamide). However, Suzuki coupling is also possible, although in this case it is 30 preferable to remove the boronic esters from the resulting semiconducting polymer.

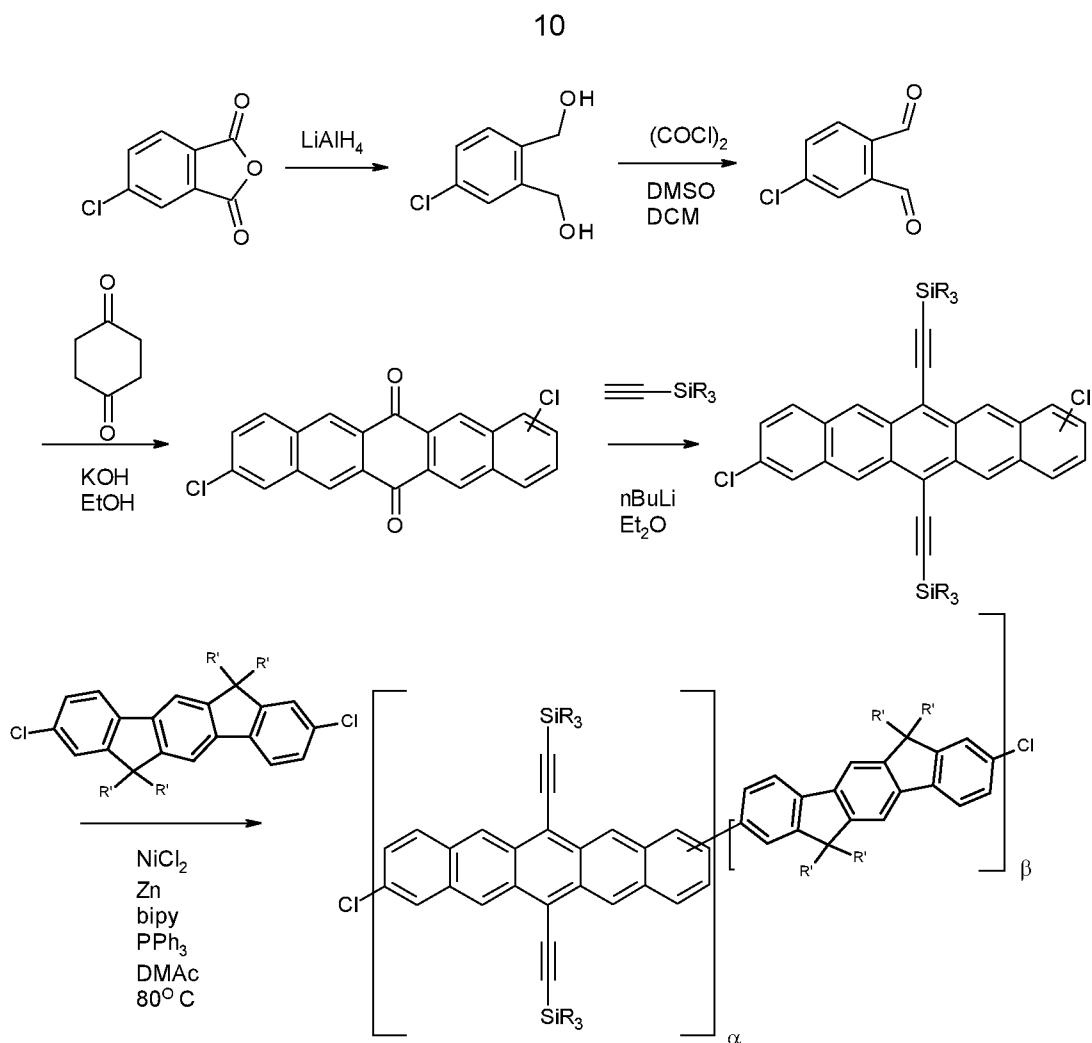

General Synthesis Route to the PAHC

wherein α and β are preferably integers of 1-100000; R has the same definition as 5 R^{25} , R^{26} and R^{27} , as defined below and R' has the same definition as for R^1 , R^2 , R^3 and R^4 wherein preferably at least one of R^1 , R^2 , R^3 , R^4 , R^5 , R^6 , R^7 is a polar or polarising group defined below. The halogen end groups are preferentially reacted either by substitution or hydrogentation.

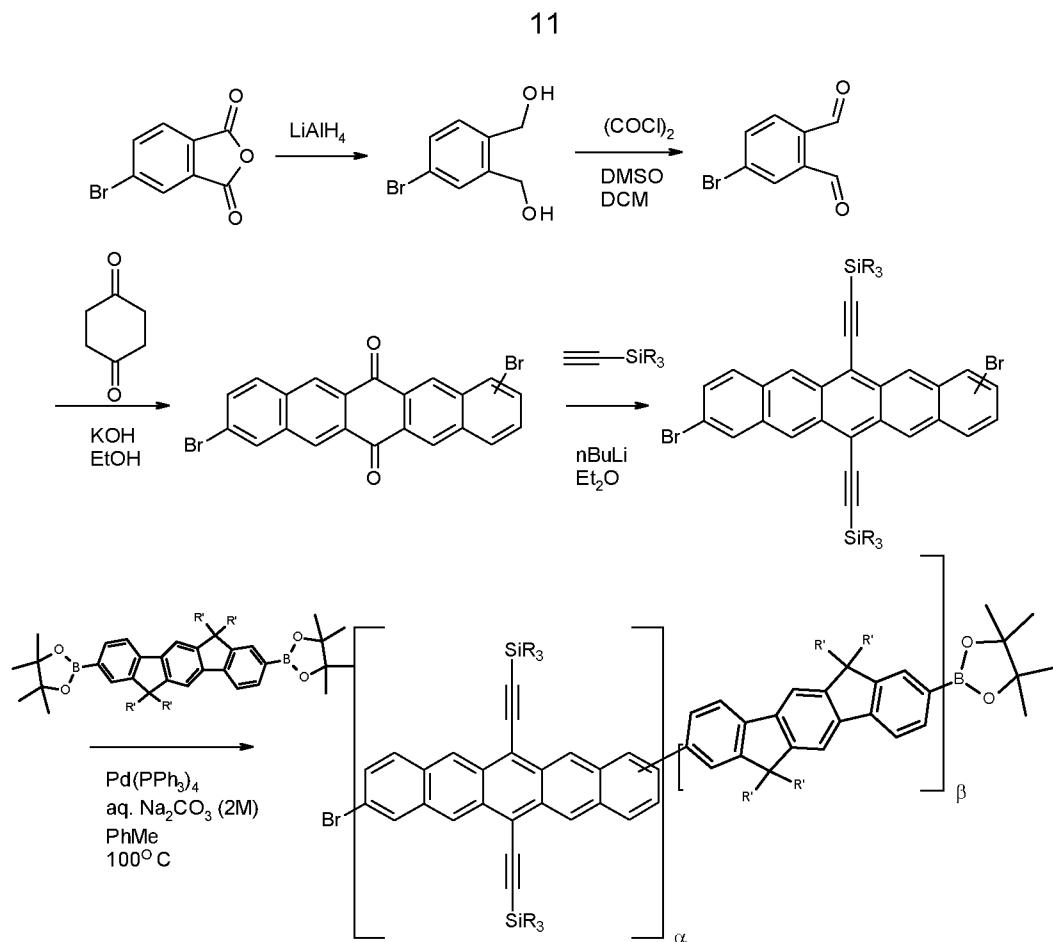


Alternative Synthesis Route to the PAHC

wherein α and β are preferably integers of 1-100000; and R has the same definition as R²⁵, R²⁶ and R²⁷, as defined below; and R' has the same definition as for R¹, R², 5 R³ and R⁴ wherein preferably at least one of R¹, R², R³, R⁴, R⁵, R⁶, R⁷ is a polar or polarising group defined below. On completion of the coupling reaction, the halogen and boronic ester end groups are preferably substituted by other groups, for example by hydrogenation and/or hydrolysis respectively.

Following the polymerization step to form the copolymer of the present invention, the 10 copolymer may be cross-linked. Cross-linking may be achieved by any known technique. Examples include the application of heat and/or moisture, ethylene oxide treatment, UV irradiation, gamma sterilisation, electron beam irradiation, and autoclaving.


Thus, according to another aspect of the present invention, there is provided a 15 process for producing a Polycyclic Aromatic Hydrocarbon Copolymer (PAHC) comprising copolymerising a composition containing at least one polyacene monomer unit selected from the structure A':

12

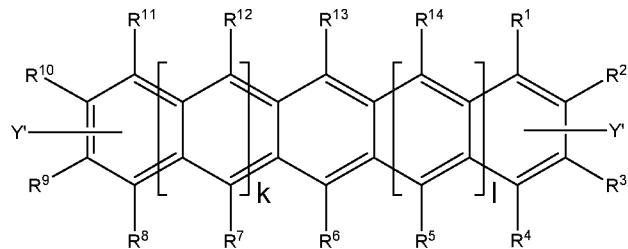

Structure A'

and at least one monomer unit selected from the structure (B/B)"':

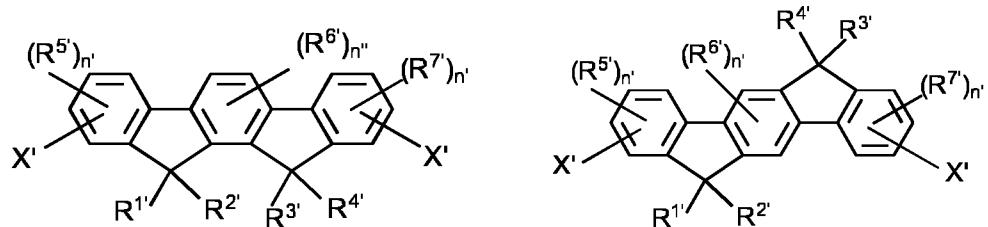

5


Structure (B/B)''

wherein each of R and R' groups, and k and l have the same general and preferred meanings as described in relation to the PAHC definitions above; wherein preferably at least one of and R¹, R², R³, R⁴, R⁵, R⁶, R⁷ is a polar group or more polarising group;

wherein X' is a halogen atom or a cyclic borate group; and

wherein Y' is a halogen atom.

Preferably, the cyclic borate group is

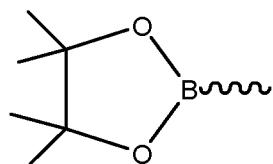

15 Preferably, the process is carried out in a solvent, preferably an organic solvent, preferably an aromatic organic solvent.

The compositions of the present invention can comprise additional curable monomers, for example, diluent monomers. Examples of suitable materials include radically curable monomer compounds, such as acrylate and methacrylate

20 monomer compounds. Examples of acrylate and methacrylate monomers include

isobornyl acrylate, isobornyl methacrylate, lauryl acrylate, lauryl methacrylate, isodecylacrylate, isodecylmethacrylate, caprolactone acrylate, 2-phenoxyethyl acrylate, isoctylacrylate, isoctylmethacrylate, butyl acrylate, alkoxylated lauryl acrylate, ethoxylated nonyl phenol acrylate, ethoxylated nonyl phenol methacrylate, 5 ethoxylated hydroxyethyl methacrylate, methoxy polyethylene glycol monoacrylate, methoxy polyethylene glycol monomethacrylate, tetrahydrofurfuryl methacrylate, as well as mixtures or combinations thereof.

In addition, multifunctional acrylate and methacrylate monomers and oligomers can be included in the compositions as reactive diluents and as materials that can 10 increase the crosslink density of the cured composition. Examples of suitable multifunctional acrylate and methacrylate monomers and oligomers include pentaerythritol tetraacrylate, pentaerythritol tetramethacrylate, 1,2-ethylene glycol diacrylate, 1,2-ethylene glycol dimethacrylate, 1,6-hexanediol diacrylate, 1,6-hexanediol dimethacrylate, 1,12-dodecanol diacrylate, 1,12-dodecanol 15 dimethacrylate, tris(2-hydroxy ethyl) isocyanurate triacrylate, propoxylated neopentyl glycol diacrylate, hexanediol diacrylate, tripropylene glycol diacrylate, dipropylene glycol diacrylate, ethoxylated bisphenol A diacrylate, ethoxylated bisphenol A dimethacrylate, alkoxylated hexanediol diacrylate, alkoxylated cyclohexane dimethanol diacrylate, polyethylene glycol diacrylate, polyethylene glycol 20 dimethacrylate, tris (2-hydroxy ethyl) isocyanurate triacrylate, amine modified polyether acrylates (available as PO 83 F®, LR 8869®, and/or LR 8889® (all available from BASF Corporation), trimethylolpropane triacrylate, glycerol propoxylate triacrylate, dipentaerythritol pentaacrylate, dipentaerythritol hexaacrylate, ethoxylated pentaerythritol tetraacrylate (available from Sartomer Co. 25 Inc. as SR 494®), as well as mixtures and combinations thereof. When a reactive diluent is added to the composition of the present invention, the reactive diluent is added in any desired or effective amount, in one embodiment at least about 1 percent by weight of the carrier, at least about 35 percent by weight of the carrier, no more than about 98 percent by weight of the carrier, no more than about 75 percent 30 by weight of the carrier, although the amount of diluent can be outside of these ranges.

Copolymers according to the present invention may have a permittivity at 1000 Hz of greater than 1.5, preferably greater than 2, preferably greater than 3. Particularly preferably, copolymers according to the present invention are semiconducting 35 copolymers having a permittivity at 1000 Hz of between 1.5 and 8, more preferably between 3.4 and 8. In a preferred embodiment, the polyacene copolymers have a

permittivity at 1000 Hz of between 3.4 and 7, more preferably between 3.4 and 6.5, yet more preferably between 3.4 and 4.5 and even more preferably between 3.4 and 4.0. Copolymers according to the present invention are preferably semiconducting copolymers and may have a permittivity at 1000 Hz of greater than 3.4, for example 5 greater than 3.8, greater than 4.0, greater than 4.2 and the like.

Preferably, the organic semiconductor compositions according to the present invention contain less than 10% by weight, more preferably less than 5% by weight, more preferably less than 1% by weight, more preferably, substantially no copolymers which have a permittivity at 1000 Hz of less than 3.4. In a preferred 10 embodiment, the permittivity is determined by the method disclosed in WO 2004/102690 or by using the method disclosed herein, preferably by using the method disclosed herein.

Preferably, the copolymers of the present invention are semiconducting copolymers having a permittivity at 1000 Hz of between 3.4 and 8. In a preferred embodiment, 15 the copolymers have a permittivity at 1000 Hz of between 3.4 and 7, more preferably between 3.4 and 6.5, and even more preferably between 3.4 and 4.5. The permittivity of the copolymers can be measured using any standard method known to those skilled in the art. In a preferred embodiment, the permittivity is determined by the method disclosed in WO 2004/102690 or by using the method 20 disclosed herein, preferably by using the method disclosed herein.

Monomer Units of Formula (A)

The following are some preferred characteristics of the polyacene monomer units defined above as (A).

In a preferred embodiment, at least one (and more preferably 2) of groups R¹, R², 25 R³, R⁴, R⁵, R⁶, R⁷, R⁸, R⁹, R¹⁰, R¹¹, R¹², R¹³ and R¹⁴ are tri-C₁₋₂₀ hydrocarblylsilyl C₁₋₄ alkynyl groups.

Preferably at least one (and more preferably 2) of groups R¹, R², R³, R⁴, R⁵, R⁶, R⁷, R⁸, R⁹, R¹⁰, R¹¹, R¹², R¹³ and R¹⁴ are trihydrocarblylsilyl ethynyl groups.

In a preferred embodiment, at least one (and more preferably 2) of groups R¹, R², 30 R³, R⁴, R⁵, R⁶, R⁷, R⁸, R⁹, R¹⁰, R¹¹, R¹², R¹³ and R¹⁴ are (trihydrocarblylsilyl)ethynyl-groups, -C≡C-SiR²²R²³R²⁴, wherein R²², R²³ and R²⁴ independently represent C₁-C₆ alkyl or C₂-C₆ alkenyl. In a more preferred embodiment, R²², R²³ and R²⁴ are independently selected from the group consisting of methyl, ethyl, propyl, isopropyl, n-butyl, isobutyl, t-butyl, 1-propenyl and 2-propenyl.

In a preferred embodiment, R⁶ and R¹³ are trialkylsilyl ethynyl groups, -C≡C-SiR²²R²³R²⁴, wherein R²², R²³ and R²⁴ independently represent C₁-C₆ alkyl or C₂-C₆ alkenyl. In a more preferred embodiment, R²², R²³ and R²⁴ are independently selected from the group consisting of methyl, ethyl, propyl, isopropyl, n-butyl, 5 isobutyl, t-butyl 1-propenyl and 2-propenyl.

In yet another preferred embodiment, when k = l = 1; R¹, R², R³, R⁴, R⁸, R⁹, R¹⁰ and R¹¹ independently represent H, C₁-C₆ alkyl or C₁-C₆ alkoxy. More preferably, R¹, R⁴, R⁸ and R¹¹ are the same and represent H, C₁-C₆ alkyl or C₁-C₆ alkoxy. In an even 10 more preferred embodiment, R¹, R², R³, R⁴, R⁸, R⁹, R¹⁰ and R¹¹ are the same or different and are selected from the group consisting of hydrogen, methyl, ethyl, propyl, n-butyl, isobutyl, t-butyl, methoxy, ethoxy, propyloxy and butyloxy.

Preferably, R⁵, R⁷, R¹² and R¹⁴ are hydrogen.


Preferably, R²², R²³ and R²⁴ are independently selected from the group consisting 15 hydrogen, a C₁-C₁₀ alkyl group (preferably C₁-C₄-alkyl and most preferably methyl, ethyl, n-propyl or isopropyl) which may optionally be substituted for example with a halogen atom.

R²² and R²³ are preferably independently selected from the group consisting 20 optionally substituted C₁₋₁₀ alkyl group and optionally substituted C₂₋₁₀ alkenyl, more preferably C₁-C₆ alkyl or C₂-C₆ alkenyl. A preferred alkyl group in this case is isopropyl.

Examples of the silyl group -Si(R²²)_x(R²³)_y(R²⁴)_z include, without limitation, trimethylsilyl, triethylsilyl, tripropylsilyl, dimethylethylsilyl, diethylmethyilsilyl, dimethylpropylsilyl, dimethylisopropylsilyl, dipropylmethyilsilyl, diisopropylmethyilsilyl, dipropylethylsilyl, diisopropylethylsilyl, diethylisopropylsilyl, triisopropylsilyl, 25 trimethoxysilyl, triethoxysilyl, triphenylsilyl, diphenylisopropylsilyl, diisopropylphenylsilyl, diphenylethylsilyl, diethylphenylsilyl, diphenylmethyilsilyl, triphenoxyisilyl, dimethylmethoxysilyl, dimethylphenoxyisilyl, methylmethoxyphenyl, etc. For each example in the foregoing list, the alkyl, aryl or alkoxy group may optionally be substituted.

30 In a preferred embodiment of the first aspect of the invention, PAHCs according to the present invention comprise at least one monomer unit having the Formula (A1):

16

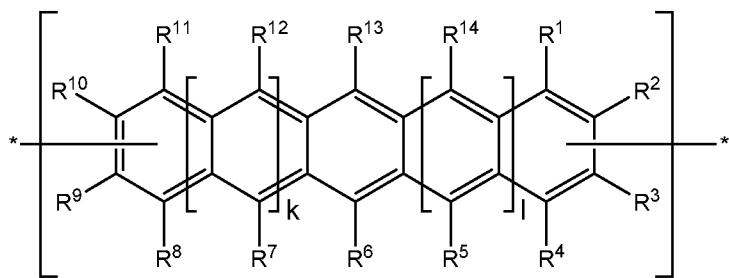

Formula (A1)

wherein each of R⁵, R⁷, R¹² and R¹⁴ are hydrogen;

5 R⁶ and R¹³ are trialkylsilyl ethynyl groups, -C≡C-SiR²²R²³R²⁴, wherein R²², R²³ and R²⁴ independently represent C₁-C₄ alkyl or C₂-C₄ alkenyl;

R¹, R², R³, R⁴, R⁸, R⁹, R¹⁰ and R¹¹ are independently selected from the group consisting of hydrogen; a branched or unbranched, unsubstituted C₁-C₄ alkyl group; C₁-C₆ alkoxy group and C₆-C₁₂ aryloxy group;

Provided that at least one of each pair of R²/R³ and R⁹/R¹⁰ are a bond, represented by ——*, to another monomer unit having the Formula (A), (A1) or (B)/(B') and

wherein k and l are independently 0, or 1, preferably both k and l are 1.


In monomer units of Formula (A1), wherein k and l are both 1; R⁶ and R¹³ are (trialkylsilyl)ethynyl groups, -C≡C-SiR²²R²³R²⁴, wherein R²², R²³ and R²⁴ are preferably selected from ethyl, n-propyl, isopropyl, 1-propenyl or 2-propenyl; R¹, R², 15 R³, R⁴, R⁸, R⁹, R¹⁰ and R¹¹ are independently selected from the group consisting of hydrogen, methyl, ethyl and methoxy, provided that at least one of each pair of R²/R³ and R⁹/R¹⁰ are a bond, represented by ——*, to another monomer unit having the Formula (A), (A1) or (B)/(B').

In a more preferred embodiment the polyacene moiety in the PAHC copolymer is a 20 substituted pentacene, wherein each R²² group is independently selected from the group consisting of a branched or unbranched, substituted or unsubstituted C₁-C₈ alkyl group, a substituted or unsubstituted C₂-C₁₂ cycloalkyl group, and a substituted or unsubstituted C₆-C₁₂ cycloalkylalkylene group; each R²³ group is independently selected from the group consisting of a substituted or unsubstituted C₂-C₈ alkenyl group, a substituted or unsubstituted C₂-C₁₂ cycloalkyl group, and a substituted or 25 unsubstituted C₆-C₁₂ cycloalkylalkylene group; and R²⁴ is independently selected from the group consisting of hydrogen, a branched or unbranched, substituted or unsubstituted C₂-C₈ alkynyl group, a substituted or unsubstituted C₂-C₁₂ cycloalkyl

group, a substituted or unsubstituted C₆-C₁₂ cycloalkylalkylene group, a substituted C₅-C₁₂ aryl group, a substituted or unsubstituted C₆-C₁₄ arylalkylene group, an acetyl group, a substituted or unsubstituted C₅-C₁₂ heterocyclic ring comprising at least one of O,N,S and Se in the ring.

5 Preferred PAHCs and compositions of the present invention contain at least 20 wt. % (of the total of all monomer units (A), (A1) and (B)/(B'), in the copolymer or composition) of a polyacene monomer unit having the Formula (A1) and at least 20 wt. %, preferably between 20-80 wt. % of a monomer unit having the Formula (B)/(B').

10 Especially preferred polyacene monomer units according to the present invention are those of Formulae (A2)

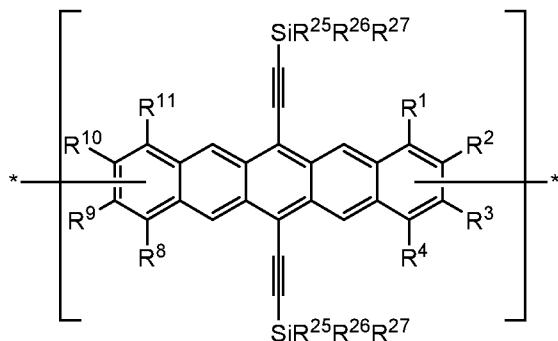

Formula (A2)

15 wherein R¹, R⁴, R⁸ and R¹¹ are independently selected from the group consisting of H, C₁-C₆ alkyl and C₁-C₆ alkoxy.

Preferably R¹, R⁴, R⁸ and R¹¹ are the same or different and are independently selected from the group consisting of hydrogen, methyl, ethyl, propyl, n-butyl, isobutyl, t-butyl, methoxy, ethoxy, propyloxy and butyloxy, more preferably hydrogen, methyl, propyl and methoxy.

20 In monomer units of Formula (A2), R², R³, R⁹ and R¹⁰ are independently selected from the group consisting of H, C₁-C₆ alkyl and C₁-C₆ alkoxy, provided that at least one of each pair of R²/R³ and R⁹/R¹⁰ are a bond, represented by ——*, to another monomer unit having the Formula (A), (A1), (A2) or (B)/(B'). In a preferred embodiment, R², R³, R⁹ and R¹⁰ are the same or different and are independently selected from the group consisting of hydrogen, methyl, ethyl, propyl, n-butyl, isobutyl, t-butyl, methoxy, ethoxy, propyloxy and butyloxy, more preferably hydrogen, methyl, ethyl, propyl and methoxy, provided that at least one of each pair


25

of R^2/R^3 and R^9/R^{10} are a bond, represented by $—*—$, to another monomer unit having the Formula (A), (A1), (A2), or (B)/(B').

In monomer units of Formula (A2), R^{25} , R^{26} and R^{27} are independently selected from the group consisting of C_1-C_6 alkyl and C_2-C_6 alkenyl, preferably R^{25} , R^{26} and R^{27} are 5 independently selected from the group consisting of methyl, ethyl, propyl, isopropyl, n-butyl, isobutyl, t-butyl, 1-propenyl and 2-propenyl, more preferably ethyl, n-propyl and isopropyl.

Preferred PAHCs and compositions of the present invention contain at least 20 wt. % (of the total of all monomer units in the copolymer or composition) of a 10 polyacene monomer unit having the Formula (A2) and at least 20 wt. %, preferably between 20-80 wt. % of a monomer unit having the Formula (B)/(B').

In yet another preferred embodiment, the polyacene monomer units of the present invention are those of Formulae (A3) and (A4):

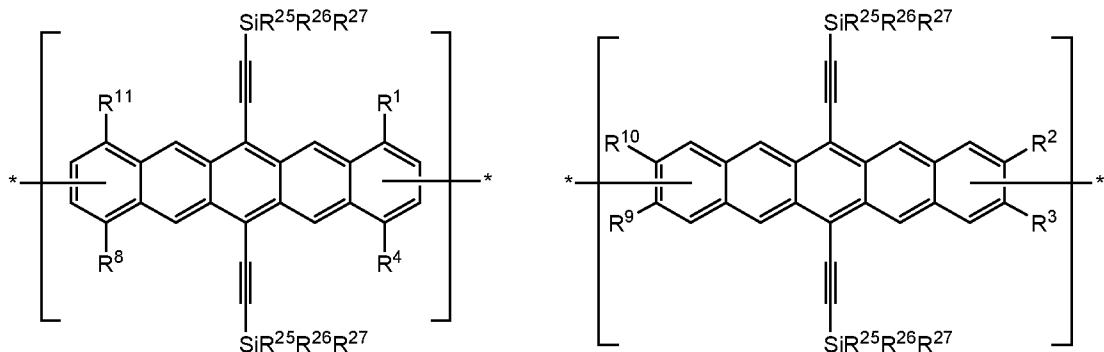

15

Formula (A3)

Formula (A4)

wherein R^{25} , R^{26} and R^{27} are independently selected from the group consisting of methyl, ethyl and isopropyl;

wherein R^1 , R^2 , R^3 , R^4 , R^8 , R^9 , R^{10} and R^{11} are independently selected from the group consisting of C_1-C_6 alkyl, C_1-C_6 alkoxy and C_6-C_{20} aryloxy. Preferably R^1 , R^2 , 20 R^3 , R^4 , R^8 , R^9 , R^{10} and R^{11} are independently selected from the group consisting of methyl, ethyl, propyl, n-butyl, isobutyl, t-butyl, methoxy, ethoxy, propyloxy and butyloxy groups, wherein $—*—$ represents a bond to another monomer unit having the Formula (A), (A1), (A2), (A3), (A4) or (B)/(B').

In some preferred embodiments, when R^1 , R^4 , R^8 and R^{11} are the same and are 25 methyl or methoxy groups, R^{25} , R^{26} and R^{27} are the same and are ethyl or isopropyl groups. In a preferred embodiment, when R^1 , R^4 , R^8 and R^{11} are methyl groups, R^{25} , R^{26} and R^{27} are ethyl groups. In yet another a preferred embodiment, when R^1 ,


R^4 , R^8 and R^{11} are methyl groups, R^{25} , R^{26} and R^{27} are isopropyl groups. In a further preferred embodiment, when R^1 , R^4 , R^8 and R^{11} are methoxy groups, R^{25} , R^{26} and R^{27} are ethyl groups. In yet another preferred embodiment, when R^1 , R^4 , R^8 and R^{11} are methoxy groups, R^{25} , R^{26} and R^{27} are isopropyl groups.

5 In some preferred embodiments when R^2 , R^3 , R^9 and R^{10} are the same and are methyl or methoxy groups, R^{25} , R^{26} and R^{27} are the same and are ethyl or isopropyl groups. In a preferred embodiment, when R^2 , R^3 , R^9 and R^{10} are methyl groups, R^{25} , R^{26} and R^{27} are ethyl groups. In yet another a preferred embodiment, when R^2 , R^3 , R^9 and R^{10} are methyl groups, R^{25} , R^{26} and R^{27} are isopropyl groups. In a further preferred embodiment, when R^2 , R^3 , R^9 and R^{10} are methoxy groups, R^{25} , R^{26} and R^{27} are ethyl groups. In yet another preferred embodiment, when R^2 , R^3 , R^9 and R^{10} are methoxy groups, R^{25} , R^{26} and R^{27} are isopropyl groups.


10

In an even more preferred embodiment of the present invention, the polyacene monomer unit is selected from the following units (A5) to (A8):


15

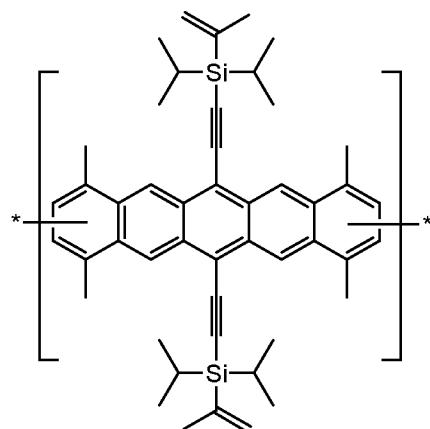


(A5)

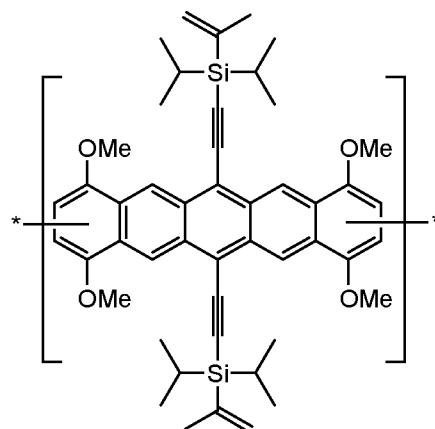

(A6)

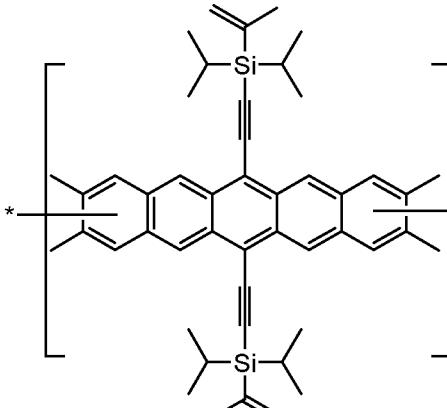


(A7)

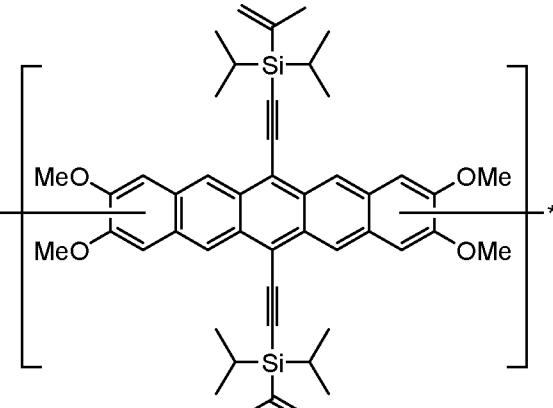

(A8)

Preferred PAHCs and compositions of the present invention contain at least 20 wt. % (of the total of all monomer units (A) and (B)/(B') in the copolymer or composition) of a polyacene monomer unit having the Formula (A3), (A4), (A5), (A6), (A7) or (A8) and at least 20 wt. %, preferably between 20-80 wt. % of a 5 monomer unit having the Formula (B)/(B').

The "R" substituents (that is R¹, R², etc) denote the substituents at the positions of pentacene according to conventional nomenclature:

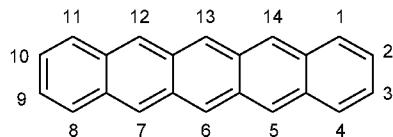

Polyacene monomers according to the present invention may be synthesised by any 10 known method within the common general knowledge of a person skilled in the art. In a preferred embodiment, methods disclosed in US 2003/0116755 A, US 3,557,233, US 6,690,029 WO 2007/078993, WO 2008/128618 and *Organic Letters*, 2004, Volume 6, number 10, pages 1609-1612 can be employed for the synthesis of polyacene compounds used in the present invention. High permittivity analogues of 15 the PAHCs of the invention may be prepared according to WO2012/160383 and WO2012/164282.

Monomer Units (B)/(B')

The following are some preferred characteristics of the indenofluorene monomer unit defined above as (B)/(B').

20 In monomer unit (B)/(B'), preferably each R¹, R², R³, R⁴, R⁵, R⁶ and R⁷, each of which may be the same or different, is selected from hydrogen; a branched or unbranched, substituted or unsubstituted C₁-C₁₀ alkyl group; a branched or unbranched, substituted or unsubstituted C₂-C₁₀ alkenyl group; a branched or unbranched, substituted or unsubstituted C₂-C₁₀ alkynyl group; an optionally 25 substituted C₃-C₁₀ cycloalkyl group; an optionally substituted C₆-C₁₀ aryl group; an optionally substituted C₁-C₁₀ heterocyclic group; an optionally substituted C₁-C₁₀ heteroaryl group; an optionally substituted C₁-C₁₀ alkoxy group; an optionally substituted C₆-C₁₀ aryloxy group; an optionally substituted C₇-C₁₀ alkylaryloxy group; an optionally substituted C₂-C₁₀ alkoxy carbonyl group; an optionally substituted C₇-30 C₂₀ aryloxy carbonyl group; a cyano group (-CN); a carbamoyl group (-C(=O)NR¹⁵R¹⁶); a carbonyl group (-C(=O)-R¹⁷); a carboxyl group (-CO₂R¹⁸) a cyanate group (-OCN); an isocyano group (-NC); an isocyanate group (-NCO); a

thiocyanate group (-SCN) or a thioisocyanate group (-NCS); an optionally substituted amino group; a hydroxy group; a nitro group; a CF₃ group; a halo group (Cl, Br, F, I); -SR¹⁹; -SO₃H; -SO₂R²⁰; -SF₅; an optionally substituted silyl group; a C₂-C₁₀ alkynyl group substituted with a SiH₂R²² group, a C₂-C₁₀ alkynyl substituted with a SiHR²² R²³ group, or a C₂-C₁₀ alkynyl substituted with a -Si(R²²)_x(R²³)_y(R²⁴)_z group, wherein each of x, y and z, and R¹⁵, R¹⁶, R¹⁸, R¹⁹ and R²⁰, R²², R²³ and R²⁴ are as defined above.

In monomer unit (B)/(B'), preferably each R¹, R², R³, R⁴, R⁵, R⁶ and R⁷, each of which may be the same or different, is H, methyl, methoxy, cyano, cyanomethyl, 10 preferably H.

Preferably, in monomer unit (B)/(B'), at least one of R¹, R², R³, R⁴, R⁵, R⁶ and R⁷ is a polar or more polarising group and n = 1 to 100, preferably 1 to 50, preferably 1 to 20, even more preferably 1 to 10 and more preferably 1 to 5, wherein n refers to the number of monomer units. Preferably, at least one of R¹, R², R³, R⁴, R⁵, R⁶ and 15 R⁷, more preferably at least two of R¹, R², R³, R⁴, R⁵, R⁶, R⁷ are polar or polarising groups.

In a preferred embodiment, the one or more polar or polarising group(s) is independently selected from the group consisting of nitro group, nitrile group, C₁₋₄₀ alkyl group substituted with a nitro group, a nitrile group, a cyanate group, an 20 isocyanate group, a thiocyanate group or a thioisocyanate group; a C₁₋₄₀ alkoxy group optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyanate group; a C₁₋₄₀ carboxylic acid group optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyanate group; a C₂₋₄₀ 25 carboxylic acid ester optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyanate group; sulfonic acid optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyanate group; sulfonic acid ester optionally substituted with a nitro group, a nitrile group, a cyanate group, 30 an isocyanate group, a thiocyanate group or a thioisocyanate group; cyanate group, isocyanate group, thiocyanate group, thioisocyanate group; and an amino group optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyanate group; and combinations thereof.

In a more preferred embodiment, the one or more polar or polarising group(s) is independently selected from the group consisting of nitro group, nitrile group, C₁₋₁₀ alkyl group substituted with a nitrile group, a cyanate group, or an isocyanate group; C₁₋₂₀ alkoxy group, C₁₋₂₀ carboxylic acid group, C₂₋₂₀ carboxylic acid ester; sulfonic acid ester; cyanate group, isocyanate group, thiocyanate group, thioisocyanate group, and an amino group; and combinations thereof.

5 More preferably the polar or polarizing group is selected from the group consisting of C₁₋₄ cyanoalkyl group, C₁₋₁₀ alkoxy group, nitrile group and combinations thereof.

10 More preferably the polar or polarizing group(s) is selected from the group consisting of cyanomethyl, cyanoethyl, cyanopropyl, cyanobutyl, methoxy, ethoxy, propoxy, butoxy, nitrile, NH₂ and combinations thereof. Preferably at least one of the R¹, R², R³, R⁴, R⁵, R⁶, R⁷ groups is a polar or more polarising group, which may be the same or different.

15 Yet more preferably, the polar or polarizing group(s) is selected from the group consisting of isopropyl cyano, cyclohexylcyano, methoxy, ethoxy, nitrile and combinations thereof. Preferably at least one of R¹, R², R³, R⁴, R⁵, R⁶, R⁷ is a polar or more polarising group, which may be the same or different.

20 More preferably, the polar group or polarizing group(s) is selected from the group consisting of methoxy, ethoxy, propoxy, butoxy and combinations thereof, wherein at least one of R¹, R², R³, R⁴, R⁵, R⁶, R⁷ is a polar or more polarising group, which may be the same or different.

25 More preferably, the polar or polarizing group(s) is selected from the group consisting of methoxy and ethoxy, wherein at least one of R¹, R², R³, R⁴, R⁵, R⁶, R⁷ is the same polar or more polarising group. Yet more preferably, at least one of R⁵, R⁶, R⁷ is the same polar or more polarising group.

Preferably, R¹, R², R³, R⁴, R⁵, R⁶, R⁷, are independently selected from the groups consisting of C₁₋₂ alkoxy, C₁₋₃ cyanoalkyl, CN and mixtures thereof, and n = 1 to 10.

30 Preferably, R¹, R², R³, R⁴, R⁵, R⁶, R⁷, are independently selected from the group consisting of C₁₋₄ alkoxy, C₃₋₂₀ cycloalkylcyano, C₁₋₄ cyanoalkyl, CN and mixtures thereof, and n = 1 to 10.

Preferably, R⁵, R⁶ and R⁷, is independently selected from the group consisting of 1 C₁₋₄ alkoxy, and n = 1 to 10.

Preferably, R^{5'}, R^{6'} and R^{7'}, are independently selected from the group consisting of methoxy, ethoxy, cyanomethyl, cyanoethyl, CN and mixtures thereof, and n = 1 to 10.

Preferably, R^{4'} is independently selected from the group consisting of 1 C₁₋₄ alkoxy, 5 and n = 1 to 10.

Preferably, R^{1'}, R^{2'}, R^{3'}, R^{4'}, R^{5'}, R^{6'}, R^{7'} are independently selected from methoxy, ethoxy, isopropylcyano, cyanomethyl, cyanoethyl, CN and mixtures thereof, and n = 1 to 10.

Preferably, R^{1'}, R^{2'}, R^{3'}, R^{4'}, R^{5'}, R^{6'}, R^{7'} are independently selected from methoxy, 10 ethoxy, cyanomethyl, CN and mixtures thereof, and n = 1 to 10.

Preferably, R^{1'}, R^{2'}, R^{3'}, R^{4'}, R^{5'}, R^{6'}, R^{7'} are independently selected from methoxy, ethoxy and mixtures thereof, and n = 1 to 10.


The copolymers of the present invention may be a random or block copolymer of different monomer units. In such a case, any monomer unit defined by Formula (A) 15 or (B)/(B'), may be combined with a different or same monomer unit of (A) or (B)/(B') provided that at least one monomer unit (A) is bonded to at least one monomer unit (B)/(B').

The ratio of the monomers in the polycyclic aromatic hydrocarbon copolymers can be altered to allow for adjustment of the permittivity relative to a homopolymer.

20 Furthermore, optionally the monomer unit of (A) or (B)/(B') may be mixed with monomer units which do not meet the definition of (A) or (B)/(B'), provided that the average permittivity of the binder in the compositions is preferably between 3.4 and 8.0. In this regard, other suitable monomer units include arylamine monomers such as (C), fluorene monomers such as (D) and spirobifluorene monomers such as (E):
25 wherein each R^{1''}, R^{2''}, R^{3''} and R^{4''}, each of which may be the same or different, is selected from the same group as R¹, R², R³ and R⁴, already defined above;


Ar₁, Ar₂ and Ar₃, which may be the same or different, each represent, independently 30 an optionally substituted C₆₋₄₀ aromatic group (mononuclear or polynuclear). Preferably at least one of Ar₁, Ar₂ and Ar₃ is substituted with at least one polar or more polarising group, and n = 1 to 20, preferably 1 to 10 and more preferably 1 to 5. Preferably, at least one of Ar₁, Ar₂ and Ar₃ is substituted with 1, 2, 3, or 4, more preferably 1, 2 or 3, more preferably 1 or 2, preferably 1 polar or more polarising group(s); and

$n'' = 1$ to 3.

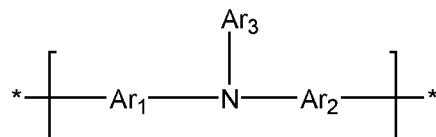


(C)

5

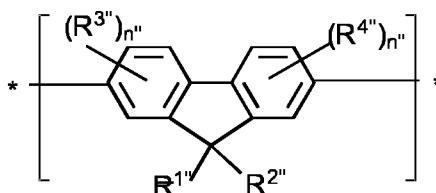

(D)

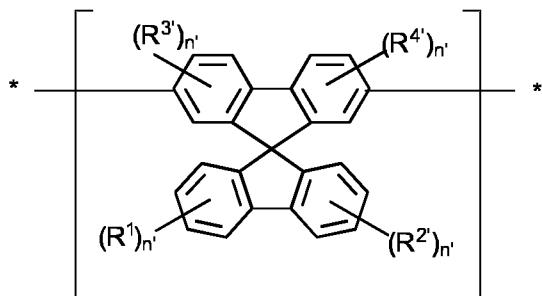

(E)

10 When the PAHC according to the present invention comprises one or more monomers (C), (D), (D') and/or (E), the PAHC is comprised of monomer (A) in an amount of at least 20 wt. %; monomer (B) in an amount of at least 60 wt. % and the remainder is comprised of monomers (C), (D), (D') and/or (E), based on the total weight of all monomer units in the copolymer.

15 ***Organic Semiconductor Compositions***

An organic semiconductor composition according to the first aspect of the present invention comprises a copolymer composition, the composition having a permittivity at 1000 Hz of greater than 1.5, more preferably greater than 3.4, and yet more preferably between 1.5 and 6.5, even more preferably between 3 and 6.5, more preferably between 3.0 to 5.0 and still more preferably between 3.4 to 4.5.

The organic semiconductor composition according to the present invention can comprise a polycyclic aromatic hydrocarbon copolymer as herein disclosed. In a preferred embodiment, an organic semiconductor composition may comprise a copolymer as defined herein, further comprising a polycrystalline polyacene small molecule semiconductor as described in our application WO 2012/164282, wherein the PAHC has a permittivity at 1000 Hz of between 3.4 and 8, preferably between 3.4 and 6.5, more preferably between 4 and 6.5, yet more preferably between 3.4 to 4.5. In a preferred embodiment, a copolymer as defined herein may be used in combination with a polyacene small molecule, where the 'dried state' composition 5 contains between 10 to 50% of the polyacene small molecule and 10 to 90% of the PAHC.

10

The organic semiconductor composition according to the present invention can comprise a polycyclic aromatic hydrocarbon copolymer as herein disclosed. In a preferred embodiment, an organic semiconductor composition may comprise a copolymer as defined herein, further comprising an organic binder, wherein the organic binder has a permittivity at 1000 Hz of between 3.4 and 8, preferably between 3.4 and 6.5, more preferably between 4 and 6.5, yet more preferably between 3.4 to 4.5.

15

In a particularly preferred embodiment, a copolymer as defined herein may be used 20 in combination with an organic binder, wherein the organic binder has a permittivity at 1000 Hz of between 3.4 and 8.0, preferably between 3.6 and 6.5, more preferably between 3.4 to 4.5.

In yet another preferred embodiment, a PAHC of the invention preferably has a permittivity at 1000 Hz of between 3.4 and 8.0, preferably between 3.4 and 4.5.

25 The concentration of the PAHC and solvent present in the composition will vary depending on the preferred solution coating method, for example ink jet printing compositions require low viscosity, low solids loading compositions, whilst screen printing processes require high viscosity, high solids loading compositions. Following deposition of the PAHC composition, the solvent is preferably evaporated 30 to afford the semiconductor layer having 1-99.9% by weight of the binder and 0.1 to 99% by weight of the copolymer (in the printed or dried state) based on a total weight of the composition; preferably the semiconductor layer having 25 to 75% by weight of the small molecule polyacene and 25 to 75% by weight of the copolymer.

35 In the composition prior to deposition, one or more of the above-described copolymers is preferably present at a concentration of at least 0.1 wt%, preferably

0.5 wt% based on a total weight of the composition. The upper limit of the concentration of the copolymer in the composition is often near the solubility limit of that copolymer in the particular solvent at the temperature of the composition during its application to a substrate such as in the fabrication of an electronic device.

5 Typical compositions of the present invention comprise one of the copolymers at a concentration ranging from about 0.1 wt%, preferably 0.5 wt% to about 20.0 wt% based on a total weight of the composition, more typically, from about 0.5 wt% to about 10.0 wt%, more typically 0.5 to 5.0, more typically 1 to 3 wt%.

In the printed or dried composition, one or more of the above-described copolymers

10 is preferably present at a concentration of at least 10 wt% based on a total weight of the composition, preferably between 10 and 90 wt%, more preferably between 20 and 80 wt%, more preferably between 30 and 70 wt%, more preferably between 40 and 60 wt%.

In a preferred embodiment, one or more solvents may be present in the organic

15 semiconductor compositions.

Suitable solvents include, but are not limited to, tetrahydrofuran, aromatic hydrocarbons such as toluene, o-xylene, m-xylene, p-xylene, mesitylene, bromomesitylene, anisole, bromoanisole, bromobenzene, tetralin, o-xylene, 1,4-dioxane, methylethylketone, gamma-butyrolactone, cyclohexanone, morpholine, N-

20 methylpyrrolidone, ethyl acetate, n-butyl acetate, dimethylformamide, dimethylacetamide, decalin or mixtures of two or more thereof. Preferably, no chlorinated solvents are used.

Solvent blends may also be utilised. Suitable solvent blends include, but are not limited to compositions of the above solvents in conjunction with solvents such as

25 dimethylformamide, dimethylacetamide, dimethylsulfoxide, methyl ethyl ketone, dichloromethane, dichlorobenzene, furfuryl alcohol, dimethoxyethane and ethyl acetate, higher boiling point alkanes such as n-heptane and alcohols such as isopropyl alcohol. Such compositions (prior to deposition) preferably contain a suitable solvent in an amount of greater than 50 wt% based on a total weight of the

30 composition, preferably between 60 and 95 wt% based on a total weight of the composition.

In yet another preferred embodiment, one or more additional composition components may be present in the organic semiconductor composition. Suitable additional composition components include, but are not limited to, a polymer

35 additive, a rheological modifier, a surfactant, another semiconductor that is a

matched hole transfer compound for the copolymer. In some exemplary embodiments, the compositions comprise a polymer additive selected from the group consisting of polystyrene, poly(alpha-methylstyrene), poly(pentafluorostyrene), poly(methyl methacrylate), poly(4-cyanomethyl styrene), 5 poly(4-vinylphenol), or any other suitable polymer disclosed in U.S. Patent Application Publication No. 2004/0222412 A1 or U.S. Patent Application Publication No. 2007/0146426 A1. In some desired embodiments, the polymer additive comprises polystyrene, poly(alpha-methylstyrene), poly(pentafluorostyrene) or poly(methyl methacrylate). In some exemplary embodiments, the compositions 10 comprise a surfactant selected from fluorinated surfactants or fluorosurfactants. When present, each additional composition component is independently present in an amount of greater than 0 to about 50 wt% based on a total weight of the composition. Preferably, each additional composition component is independently present in an amount ranging from about 0.0001 to about 10.0 wt% based on a total 15 weight of the composition. For example, when a polymer is present in the composition, the polymer additive is typically present in an amount of greater than 0 to about 5.0 wt%, preferably from about 0.5 to about 3.0 wt% based on a total weight of the composition. For example, when a surfactant is present in the composition, the surfactant is preferably present in an amount of greater than 0 to 20 about 1.0 wt%, more typically, from about 0.001 to about 0.5 wt% based on a total weight of the composition.

The organic semiconductor composition according to the present invention preferably has a charge mobility value of at least $0.5 \text{ cm}^2 \text{V}^{-1} \text{s}^{-1}$, preferably between 0.5 and $8.0 \text{ cm}^2 \text{V}^{-1} \text{s}^{-1}$, more preferably between 0.5 and $6.0 \text{ cm}^2 \text{V}^{-1} \text{s}^{-1}$, more 25 preferably between 0.8 and $5.0 \text{ cm}^2 \text{V}^{-1} \text{s}^{-1}$, more preferably between 1.0 and $5.0 \text{ cm}^2 \text{V}^{-1} \text{s}^{-1}$, more preferably between 1.5 and $5.0 \text{ cm}^2 \text{V}^{-1} \text{s}^{-1}$, more preferably between 2.0 and $5.0 \text{ cm}^2 \text{V}^{-1} \text{s}^{-1}$. The charge mobility value of the semiconductor composition can be measured using any standard method known to those skilled in the art, such as techniques disclosed in *J. Appl. Phys.*, 1994, Volume 75, page 7954 and WO 30 2005/055248, preferably by those described in WO 2005/055248.

The organic semiconductor composition according to the present invention may be prepared by any known method within the common general knowledge of a person skilled in the art. In a preferred embodiment, the organic semiconductor composition is prepared by the method disclosed in WO 2005/055248 or by using 35 the method disclosed herein, preferably by using the method disclosed herein.

Preferably, organic semiconductor compositions according to the present invention are semiconducting compositions having a permittivity at 1000 Hz greater than 1.5, more preferably greater than 3.4, and yet more preferably, between 3.4 and 8. In a preferred embodiment, the compositions have a permittivity at 1000 Hz of between 5 4.0 and 7, more preferably between 4.0 and 6.5, even more preferably between 4.0 and 6 and yet more preferably between 3.4 and 4.5.

Organic Semiconductor Layers

The organic semiconductor compositions according to the present invention may be deposited onto a variety of substrates, to form organic semiconductor layers.

10 The organic semiconductor layer according to the present invention may be prepared using a method comprising the steps of:

- (i) Mixing the organic semiconductor composition according to the present invention with a solvent to form a semiconductor layer formulation;
- (ii) Depositing said formulation onto a substrate; and

15 (iii) Optionally removing the solvent to form an organic semiconductor layer.

Useful substrate materials include, but are not limited to, polymeric films such as polyamides, polycarbonates, polyimides, polyketones, polyethylene terephthalate (PET) and polyethylene naphthalate (PEN), and inorganic substrates such as silica, alumina, silicon wafers and glass. The surface of a given substrate may be treated, 20 e.g. by reaction of chemical functionality inherent to the surface with chemical reagents such as silanes or exposure of the surface to plasma, in order to alter the surface characteristics.

Prior to depositing the organic semiconductor composition onto the substrate, the 25 composition may be combined with one or more solvents in order to facilitate the deposition step. Suitable solvents include any solvent which is able to dissolve both the copolymer, and which upon evaporation from the solution blend, give a coherent, defect-free layer. Suitable solvents for the copolymer can be determined by preparing a contour diagram for the material as described in ASTM Method D 3132 at the concentration at which the mixture will be employed. The material is 30 added to a wide variety of solvents as described in the ASTM method.

Suitable solvents include, but are not limited to, tetrahydrofuran, aromatic hydrocarbons such as toluene, o-xylene, m-xylene, p-xylene, mesitylene, bromomesitylene, anisole, bromoanisole, bromobenzene, tetralin, o-xylene, 1,4-

dioxane, methylethylketone, gamma-butyrolactone, cyclohexanone, morpholine, N-methylpyrrolidone, ethyl acetate, n-butyl acetate, dimethylformamide, dimethylacetamide, decalin or mixtures of two or more thereof. Preferably, no chlorinated solvents are used.

5 In accordance with the present invention it has further been found that the level of the solids content in the organic semiconducting layer formulation is also a factor in achieving improved mobility values for electronic devices such as OFETs. The solids content of the formulation is commonly expressed as follows:

$$\text{Solids content (\%)} = \frac{a+b}{a+b+c} \times 100$$

10 wherein: a = mass of polyacene small molecule, b = mass of PAHC and c = mass of solvent.

The solids content of the formulation is preferably 0.1 to 10% by weight, more preferably 0.5 to 5% by weight.

15 Suitable conventional deposition methods include, but are not limited to, spin coating, spray coating, blade/slot-die coating, flexographic printing, gravure printing, roll-to-roll web-coating, and dip coating, as well as printing processes such as ink-jet printing, screen printing, and offset lithography. In one desired embodiment, the resulting composition is a printable composition, even more desirably, an ink jet printable composition.

20 Once the composition is deposited onto a substrate surface, the solvent may be removed to form an organic semiconductor layer. Any suitable method may be used to remove the solvent. For example, the solvent may be removed by evaporation or drying. Typically, at least about 80 percent of the solvent is removed to form the semiconductor layer. For example, at least about 85 weight percent, at least about 25 90 weight percent, at least about 92 weight percent, at least about 95 weight percent, at least about 97 weight percent, at least about 98 weight percent, at least about 99 weight percent, or at least about 99.5 weight percent of the solvent is removed.

30 The solvent often can be evaporated at any suitable temperature. In some methods, the solvent mixture is evaporated at ambient temperature. In other methods, the solvent is evaporated at a temperature higher or lower than ambient temperature. For example, a platen supporting the substrate can be heated or cooled to a temperature higher or lower than ambient temperature. In still other

preferred methods, some or most of the solvent can be evaporated at ambient temperature, and any remaining solvent can be evaporated at a temperature higher than ambient temperature. In methods where the solvent evaporates at a temperature higher than ambient temperature, the evaporation can be carried out 5 under an inert atmosphere, such as a nitrogen atmosphere.

Alternatively, the solvent can be removed by application of reduced pressure (i.e., at a pressure that is less than atmospheric pressure) such as through the use of a vacuum. During application of reduced pressure, the solvent can be removed at any suitable temperature such as those described above.

10 The rate of removal of the solvent can affect the resulting semiconductor layer. For example, if the removal process is too rapid, poor packing of the semiconductor molecules can occur during crystallisation. Poor packing of the semiconductor molecules can be detrimental to the charge mobility of the semiconductor layer. The solvent can evaporate entirely on its own in an uncontrolled fashion (i.e., no time 15 constraints), or the conditions can be controlled in order to control the rate of evaporation. In order to minimise poor packing, the solvent can be evaporated while slowing the evaporation rate by covering the deposited layer. Such conditions can lead to a semiconductor layer having a relatively high degree of crystallinity.

20 After removal of a desired amount of solvent to form the semiconductor layer, the semiconductor layer can be annealed by exposure to heat or solvent vapours, i.e., by thermal annealing or solvent annealing.

25 The organic semiconductor layer according to the present invention preferably has a charge mobility value of at least $0.5 \text{ cm}^2 \text{V}^{-1} \text{s}^{-1}$, preferably between 0.5 and $8.0 \text{ cm}^2 \text{V}^{-1} \text{s}^{-1}$, more preferably between 0.5 and $6.0 \text{ cm}^2 \text{V}^{-1} \text{s}^{-1}$, more preferably between 0.8 and $5.0 \text{ cm}^2 \text{V}^{-1} \text{s}^{-1}$, more preferably between 1 and $5.0 \text{ cm}^2 \text{V}^{-1} \text{s}^{-1}$, more preferably 30 between 1.5 and $5.0 \text{ cm}^2 \text{V}^{-1} \text{s}^{-1}$, more preferably between 2.0 and $5.0 \text{ cm}^2 \text{V}^{-1} \text{s}^{-1}$. The charge mobility value of the semiconductor layer can be measured using any standard method known to those skilled in the art, such as techniques disclosed in *J. Appl. Phys.*, 1994, Volume 75, page 7954 and WO 2005/055248, preferably by 35 those described in WO 2005/055248.

30 Preferably, the organic semiconductor layer(s) of the present invention are semiconducting layers having a permittivity at 1000 Hz of between 3.4 and 8 . In a preferred embodiment, the layer(s) have a permittivity at 1000 Hz of between 4.0 and 7 , more preferably between 4.0 and 6.5 , yet more preferably between 4.0 and 6 35 and even more preferably between 3.4 and 4.5

Electronic Devices

The invention additionally provides an electronic device comprising the organic semiconductor composition according to the present invention. The composition may be used, for example, in the form of a semiconducting layer or film.

5 Additionally, the invention preferably provides an electronic device comprising the organic semiconductor layer according to the present invention.

The thickness of the layer or film may be between 0.02 and 20 microns, 0.2 and 20 microns, preferably between 0.05 and 10 microns, preferably between 0.5 and 10 microns, between 0.05 and 5 microns, even more preferably between 0.5 and 5 10 microns, yet more preferably between 0.5 and 2 microns, and more preferably between 0.02 and 1 microns.

The electronic device may include, without limitation, organic field effect transistors (OFETS), organic light emitting diodes (OLEDs), photodetectors, organic photovoltaic (OPV) cells, sensors, lasers, memory elements and logic circuits.

15 Exemplary electronic devices of the present invention may be fabricated by solution deposition of the above-described organic semiconductor composition onto a substrate.

Detailed Description of the Invention***General***

20 The term "about" in relation to a numerical value x means, for example, $x \pm 10\%$.

The word "substantially" does not exclude "completely" e.g. a composition which is "substantially free" from Y may be completely free from Y. Where necessary, the word "substantially" may be omitted from the definition of the invention.

25 "Molecular weight" of a polymeric material (including monomeric or macromeric materials), as used herein, refers to the number-average molecular weight unless otherwise specifically noted or unless testing conditions indicate otherwise.

A "polymer" means a material formed by polymerising and/or crosslinking one or more monomers, macromers and/or oligomers and having two or more repeat units.

30 As used herein, the term "alkyl" group refers to a straight or branched saturated monovalent hydrocarbon radical, having the number of carbon atoms as indicated. By way of non limiting example, suitable alkyl groups include, methyl, ethyl, propyl, n-butyl, t-butyl, iso-butyl and dodecanyl.

As used herein, the term "alkoxy" group include without limitation, methoxy, ethoxy, 2-methoxyethoxy, t-butoxy, etc.

As used herein, the term "amino" group includes, without limitation, dimethylamino, methylamino, methylphenylamino, phenylamino, etc.

5 The term "carbyl" refers to any monovalent or multivalent organic radical moiety which comprises at least one carbon atom other without any non-carbon atoms (-C≡C), or optionally combined with at least one non-carbon atoms such as N, O, S, P, Si, Se, As, Te or Ge (for example carbonyl etc.).

10 The term "hydrocarbon" group denotes a carbyl group that additionally contains one or more H atoms and optionally contains one or more hetero atoms.

A carbyl or hydrocarbyl group comprising 3 or more carbon atoms may be linear, branched and/or cyclic, including spiro and/or fused rings.

Preferred carbyl or hydrocarbyl groups include alkyl, alkoxy, alkylcarbonyl, alkylcarbonyloxy, alkoxy carbonyloxy, each of which is optionally substituted and has

15 1 to 40, preferably 1 to 18 carbon atoms, furthermore optionally substituted aryl, aryl derivative or aryloxy having 6 to 40, preferably 6 to 18 carbon atoms, furthermore alkylaryloxy, arylcarbonyl, aryloxycarbonyl, arylcarbonyloxy and aryloxycarbonyloxy, each of which is optionally substituted and has 7 to 40, more preferable 7 to 25 carbon atoms.

20 The carbyl or hydrocarbyl group may be saturated or unsaturated acyclic group, or a saturated or unsaturated cyclic group. Unsaturated acyclic or cyclic groups are preferred, especially alkenyl and alkynyl groups (especially ethynyl).

In the polyacenes of the present invention, the optional substituents on the said C₁-C₄₀ carbyl or hydrocarbyl groups for R₁-R₁₄ etc. preferably are selected from: silyl, sulpho, sulphonyl, formyl, amino, imino, nitrilo, mercapto, cyano, nitro, halo, C₁₋₄ alkyl, C₆₋₁₂ aryl, C₁₋₄ alkoxy, hydroxy and/or all chemically possible combinations thereof. More preferable among these optional substituents are silyl and C₆₋₁₂ aryl and most preferable is silyl.

30 "Substituted alkyl group" refers to an alkyl group having one or more substituents thereon, wherein each of the one or more substituents comprises a monovalent moiety containing one or more atoms other than carbon and hydrogen either alone (e.g., a halogen such as F) or in combination with carbon (e.g., a cyano group) and/or hydrogen atoms (e.g., a hydroxyl group or a carboxylic acid group).

"Alkenyl group" refers to a monovalent group that is a radical of an alkene, which is a hydrocarbon with at least one carbon-carbon double bond. The alkenyl can be linear, branched, cyclic, or combinations thereof and typically contains 2 to 30 carbon atoms. In some embodiments, the alkenyl contains 2 to 20, 2 to 14, 2 to 10, 5 4 to 10, 4 to 8, 2 to 8, 2 to 6, or 2 to 4 carbon atoms. Exemplary alkenyl groups include, but are not limited to, ethenyl, propenyl, and butenyl.

"Substituted alkenyl group" refers to an alkenyl group having (i) one or more C-C double bonds, and (ii) one or more substituents thereon, wherein each of the one or more substituents comprises a monovalent moiety containing one or more atoms 10 other than carbon and hydrogen either alone (e.g., a halogen such as F) or in combination with carbon (e.g., a cyano group) and/or hydrogen atoms (e.g., a hydroxyl group or a carboxylic acid group).

"Alkynyl group" refers to a monovalent group that is a radical of an alkyne, a hydrocarbon with at least one carbon-carbon triple bond. The alkynyl can be linear, 15 branched, cyclic, or combinations thereof and typically contains 2 to 30 carbon atoms. In some embodiments, the alkynyl contains 2 to 20, 2 to 14, 2 to 10, 4 to 10, 4 to 8, 2 to 8, 2 to 6, or 2 to 4 carbon atoms. Exemplary alkynyl groups include, but are not limited to, ethynyl, propynyl, and butynyl.

"Substituted alkynyl group" refers to an alkynyl group having (i) one or more C-C 20 triple bonds, and (ii) one or more substituents thereon, wherein each of the one or more substituents comprises a monovalent moiety containing one or more atoms other than carbon and hydrogen either alone (e.g., a halogen such as F) or in combination with carbon (e.g., a cyano group) and/or hydrogen atoms (e.g., a hydroxyl group or a carboxylic acid group or a silyl group).

25 "Cycloalkyl group" refers to a monovalent group that is a radical of a ring structure consisting of 3 or more carbon atoms in the ring structure (i.e., only carbon atoms in the ring structure and one of the carbon atoms of the ring structure is the radical).

"Substituted cycloalkyl group" refers to a cycloalkyl group having one or more substituents thereon, wherein each of the one or more substituents comprises a 30 monovalent moiety containing one or more atoms (e.g., a halogen such as F, an alkyl group, a cyano group, a hydroxyl group, or a carboxylic acid group).

"Cycloalkylalkylene group" refers to a monovalent group that is a ring structure consisting of 3 or more carbon atoms in the ring structure (i.e., only carbon atoms in the ring), wherein the ring structure is attached to an acyclic alkyl group (typically,

from 1 to 3 carbon atoms, more typically, 1 carbon atom) and one of the carbon atoms of the acyclic alkyl group is the radical. "Substituted cycloalkylalkylene group" refers to a cycloalkylalkylene group having one or more substituents thereon, wherein each of the one or more substituents comprises a monovalent moiety

5 containing one or more atoms (e.g., a halogen such as F, an alkyl group, a cyano group, a hydroxyl group, or a carboxylic acid group).

"Aryl group" refers to a monovalent group that is a radical of an aromatic carbocyclic compound. The aryl can have one aromatic ring or can include up to 5 carbocyclic ring structures that are connected to or fused to the aromatic ring. The other ring

10 structures can be aromatic, non-aromatic, or combinations thereof. Examples of preferred aryl groups include, but are not limited to, phenyl, 2-tolyl, 3-tolyl, 4-tolyl, biphenyl, 4-phenoxyphenyl, 4-fluorophenyl, 3-carbomethoxyphenyl, 4-carbomethoxyphenyl, terphenyl, anthryl, naphthyl, acenaphthyl, anthraquinonyl, phenanthryl, anthracenyl, pyrenyl, perylenyl, and fluorenyl.

15 "Substituted aryl group" refers to an aryl group having one or more substituents on the ring structure, wherein each of the one or more substituents comprises a monovalent moiety containing one or more atoms (e.g., a halogen such as F, an alkyl group, a cyano group, a hydroxyl group, or a carboxylic acid group).

"Arylalkylene group" refers to a monovalent group that is an aromatic ring structure

20 consisting of 6 to 10 carbon atoms in the ring structure (i.e., only carbon atoms in the ring structure), wherein the aromatic ring structure is attached to an acyclic alkyl group having one or more carbon atoms (typically, from 1 to 3 carbon atoms, more typically, 1 carbon atom) and one of the carbons of the acyclic alkyl group is the radical.

25 "Substituted arylalkylene group" refers to an arylalkylene group having one or more substituents thereon, wherein each of the one or more substituents comprises a monovalent moiety containing one or more atoms (e.g., a halogen such as F, an alkyl group, a cyano group, a hydroxyl group, or a carboxylic acid group).

"Acetyl group" refers to a monovalent radical having the formula -C(O)CH₃.

30 "Heterocyclic ring" refers to a saturated, partially saturated, or unsaturated ring structure comprising at least one of O, N, S and Se in the ring structure.

"Substituted heterocyclic ring" refers to a heterocyclic ring having one or more substituents bonded to one or more members of the ring structure, wherein each of the one or more substituents comprises a monovalent moiety containing one or

more atoms (e.g., a halogen such as F, an alkyl group, a cyano group, a hydroxyl group, or a carboxylic acid group).

"Carbocyclic ring" refers to a saturated, partially saturated, or unsaturated ring structure comprising only carbon in the ring structure.

- 5 "Substituted carbocyclic ring" refers to a carbocyclic ring having one or more substituents bonded to one or more members of the ring structure, wherein each of the one or more substituents comprises a monovalent moiety containing one or more atoms (e.g., a halogen such as F, an alkyl group, a cyano group, a hydroxyl group, or a carboxylic acid group).
- 10 "Ether group" refers to a $-R_a-O-R_b$ radical wherein R_a is a branched or unbranched alkylene, arylene, alkylarylene or arylalkylene hydrocarbon and R_b is a branched or unbranched alkyl, aryl, alkylaryl or arylalkyl hydrocarbon.

"Substituted ether group" refers to an ether group having one or more substituents thereon, wherein each of the one or more substituents comprises a monovalent

- 15 moiety containing one or more atoms other than carbon and hydrogen either alone (e.g., a halogen such as F) or in combination with carbon (e.g., a cyano group) and/or hydrogen atoms (e.g., a hydroxyl group or a carboxylic acid group).

Unless otherwise defined, a "substituent" or "optional substituent" is preferably selected from the group consisting of halo (I, Br, Cl, F), CN, NO₂, NH₂, -COOH and

- 20 OH.

The indenofluorene monomers used in the invention are a mixture of cis and trans isomers (referred to as (B)/(B')). The invention applies to the use of pure cis-indenofluorene monomer, pure trans-indenofluorene monomer and to mixtures of cis and trans indenofluorene monomers.

- 25 **Brief Description of the Drawings**

Figure 1 is a representation of top contact/bottom gate organic thin film transistor (OTFT)

Figure 2 is a representation of bottom contact/bottom gate (OTFT)

Figure 3 is a representation of top contact/top gate (OTFT)

- 30 Figure 4 is a representation of bottom contact/top gate (OTFT)

Labels- A: Substrate; B: Gate electrode; C: Dielectric layer; D: Semiconductor layer; E: Source electrode; F: Gate electrode

Figure 5: Transfer characteristic for TG 4 micron channel length and 3000 micron channel width OTFT using 1,4,8,11-tetramethyl bis-triethylsilyl ethynyl pentacene and PAHC (1) described as Formulation (1). Drain voltage is -2V.

Figure 6: Transfer characteristic for TG 10 micron channel length and 3000 micron channel width OTFT using 1,4,8,11-tetramethyl bis-triethylsilyl ethynyl pentacene and PAHC (1) described as Formulation (1). Drain voltage is -2V.

Figure 7: Transfer characteristic for TG 10 micron channel length and 3000 micron channel width OTFT using 1,4,8,11-tetramethyl bis-triethylsilyl ethynyl pentacene and PAHC (1) described as Formulation (1). Drain voltage is -2V.

10 Examples of the Present Invention

The following examples of the present invention are merely exemplary and should not be viewed as limiting the scope of the invention.

Measurement of the Capacitance of the Polymer Binder

15 The polymer binder was diluted with tetralin in order to lower its viscosity and make it possible to obtain a film thickness of ~1 micron when spin coated for the spin speed range 1000-2000 rpm. The polymer binder solution was spin coated at 500rpm for 10 seconds, followed by 1500 rpm for 30 seconds, onto ITO coated and cleaned 1 x 1 inch glass substrates.

20 To clean the ITO coated substrates they were submerged in a 3% solution of DECon 90 and put in an ultrasonic bath (water temperature >65 °C), washed with deionised water, submerged in deionised water and put in an ultrasonic bath (water temperature >65 °C), washed a further time with deionised water, submerged in isopropyl alcohol and then put in an ultrasonic bath (water temperature >65 °C), and then spin dried.

25 After deposition of the polymer binder the substrate was annealed on a hotplate at 120 °C for 5 minutes.

30 The substrate was then covered with a capacitance shadow mask, and top electrodes were deposited by evaporation of gold using a thermal deposition method. In order to determine the exact thickness of the polymer binder layer, the thickness was measured using a Dektak 3030 profilometer (available from Veeco, Plainview NY) at three different positions and averaged; these values were subsequently used to calculate the dielectric constants of the polymer binders.

Capacitance measurements were then carried out using impedance analyser Agilent 43961A and a probe station. In order to improve the electrical contact between the ITO back electrode and the external probe electrode, a conductive silver paste was applied. The sample being measured was placed in a metal box on the metal plate

5 to ensure minimum influence from the external environment.

Before each set of measurements was obtained, the analyser was calibrated using the 43961A Impedance Test Kit as a compensation routine was carried out to account for internal capacitance of the analyser and test fixture. The measurement calibration was carried out with open and shorted circuit; the dielectric constant was

10 calculated using the following equation:

$$C = \epsilon \times \epsilon_0 \times (A/d)$$

Wherein C is the capacitance (Farads), A is the area (m^2), d is the coating thickness (m), ϵ is the dielectric constant (permittivity), and ϵ_0 is the permittivity of free space and is taken as $8.8854 \times 10^{-12} \text{ F/m}$.

15 As a reference sample, a polystyrene sample (Mw~350,000) having a thickness of 1 μm was tested. The measured and calculated dielectric constant of the polystyrene reference was $\epsilon=2.55$ at 10,000 Hz, which is in good agreement with the reported value ($\epsilon\sim 2.5$), refer to J. R. Wunsch, Polystyrene-Synthesis, Production and Applications, *Rapra Review Reports*, 2000, Volume 10, No. 4, page 32.

20 OTFT fabrication method

A substrate (either glass or a polymer substrate such as PEN) is patterned with Au source drain electrodes either by a process of thermal evaporation through a shadow mask or by photolithography (an adhesion layer of either Cr or Ti is deposited on the substrate prior to deposition of Au). The Au electrodes can be

25 optionally be cleaned using an O_2 plasma cleaning process. A solution of organic semiconductor in binder is then applied by spin coating (the sample is flooded with the solution and the substrate is then spun at 500 rpm for 5 seconds then 1500 rpm for 1 minute). The coated substrate is then dried in air on a hot stage. The dielectric material, for example 3 wt% PTFE-AF 1600 (Sigma-Aldrich cat # 469610)

30 dissolved in FC-43) was then applied to the substrate by spin coating (sample flooded then spun at 500 rpm for 5 seconds then 1500 rpm for 30 seconds). The substrate was then dried in air on a hot stage (100 °C for 1 minute). A gate electrode (Au) is then defined over the channel area by evaporation through a shadow mask.

The mobility of the OTFT for the binders is characterised by placing on a manual probe station connected to a Keithley SCS 4200 semiconductor analyzer. The source drain voltage (V_{DS}) is set at -2V (linear) or -40V (saturation) and the gate voltage (V_G) scanned from +20V to -60V. Drain current is measured and mobility

5 calculated from the transconductance.

The mobility of the OTFT for the formulations is characterised by placing on a semi-auto probe station connected to a Keithley SCS 4200 semiconductor analyzer. The source drain voltage is set at -2V and the gate voltage scanned from +20V to -40V. Drain current is measured and mobility calculated from the transconductance.

10 In linear regime, when $|V_G| > |V_{DS}|$, the source-drain current varies linearly with V_G . Thus the field effect mobility (μ) can be calculated from the gradient (S) of I_{DS} vs. V_G given by equation 1 (where C_i is the capacitance per unit area, W is the channel width and L is the channel length):

$$S = \frac{\mu W C_i V_{DS}}{L} \quad \text{Equation 1}$$


15 In the saturation regime, the mobility is determined by finding the slope of $I_{DS}^{1/2}$ vs. V_G and solving for the mobility (Equation 2)

$$I_{DS} \approx \frac{W C_i \mu (V_{GS} - V_T)^2}{2L} \quad \text{Equation 2}$$

The following examples are intended to explain the invention without restricting it. The methods, structures and properties described herein can also be applied to

20 materials that are claimed in this invention but not explicitly described in the examples.

Compound (1): Preparation of 4-bromobenzene-1,2-dimethanol



A solution of lithium aluminium anhydride (Sigma-Aldrich 593702, 2M solution in


25 THF, 100mL, 200mmol) in THF (Sigma-Aldrich 401757, 300mL) was cooled in an ice-water bath. A solution of 4-bromophthalic anhydride (Fluorochem 009065, 45.40g, 200mmol) in THF (200mL) was added dropwise over 4 hours. The reaction mixture was then allowed to stir for 6 hours. The ice-water bath was then removed and the mixture allowed to warm to room temperature overnight. The mixture was

30 then cooled in an ice-water bath. Water (7.6mL) was added dropwise. 15% NaOH

solution (7.6mL) was then added dropwise. A further quantity of water (22.8mL) was added. The ice-water bath was removed and the reaction mixture allowed to stir for 1 hr. The mixture was then filtered and the filter cake washed with THF 3x200mL). The filtrates were combined, dried over MgSO_4 , filtered and concentrated to give a 5 pale yellow oil which solidified on standing (31.48g). The crude product was purified by recrystallisation from dichloromethane to give the product (1) as a colourless solid (23.50g, 108mmol, 54%). ^1H NMR (600MHz, DMSO-d6) 10.52 (1H, s), 10.46 (1H, s), 8.11-8.10 (1H, m), 7.92-7.84 (2H, m).


Compound (2): Preparation of 4-bromo-1,2-benzenedicarboxaldehyde

10



Oxalyl chloride (Sigma-Aldrich O8801, 24.0g, 176mmol) in dichloromethane (200mL) was stirred at -78 deg C. A mixture of dimethylsulfoxide (29.92g, 384mmol) and dichloromethane (50mL) was added dropwise over 60 minutes. A solution of 4-bromobenzene-1,2-dimethanol (1) (17.36g, 80.0mmol) in dichloromethane (10mL) 15 and dimethylsulfoxide (10mL) was added dropwise over 30 minutes. The reaction mixture was stirred for 30 minutes. Triethylamine (Sigma-Aldrich T0886, 200mL, 1438mmol) was added over 80 minutes. The reaction mixture was then allowed to warm to room temperature with stirring overnight. Water (400mL) was then added. The organic layer was separated and the aqueous layer extracted with dichloromethane (2x200mL). The organic layers were combined, dried over MgSO_4 , 20 filtered and concentrated *in vacuo* to give a pale orange solid (19.12g). The material was purified by dry column chromatography (gradient elution: heptane: 10% ethyl acetate:heptane) to give the product (2) as a pale brown solid (14.98g, 70.3mmol, 88%). ^1H NMR (600MHz, CDCl_3) 10.52 (1H, s), 10.46 (1H, s), 8.11-8.10 (1H, m), 25 7.92-7.84 (2H, m).


Compound (3): 2,9-dibromo-6,13-pentacenedione/2,10-dibromo-6,13-pentacenedione

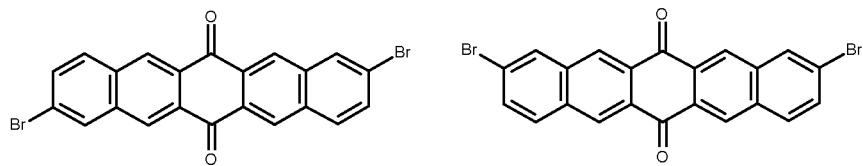

4-bromo-1,2-benzendicarboxaldehyde (2) (14.87g, 698mmol, 2eq) and 1,4-cyclohexanedione (Aldrich 125423, 3.91g, 349mmol, 1eq) were charged to a 2L round bottom flask. Methylated spirits (74 O.P., Fisher 11482874, 1000mL) was added and the mixture stirred at room temperature. 5% sodium hydroxide solution (22.0mL, 275mmol) was then added. A dark brown precipitate formed rapidly. The reaction mixture was then heated to 60 deg C and the mixture stirred at 60 deg C for 1h. The mixture was then cooled to ~18 deg C. The solid was collected by filtration under suction. The filter cake was washed sequentially with water (200mL), methylated spirits (74 O.P., 400mL) and diethyl ether (400mL). The solid was then 5 dried in a vacuum oven to give the product (3) as an orange/brown solid (13.56g, 82%). MS (ASAP) m/z 466 (M⁺, 100%).

10


Compound (4): 2,9-dibromo-6,13-bis(triisopropylsilylacetylene)pentacenedione /2,10-dibromo-6,13-bis(triisopropylsilylacetylene)pentacene

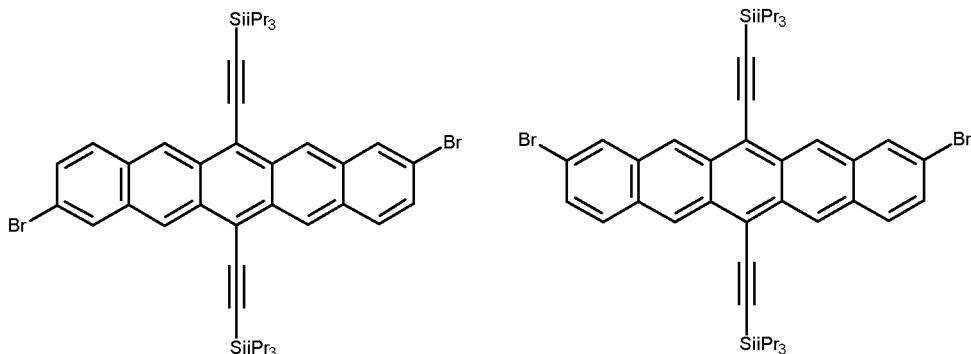

15 Triisopropylsilyl acetylene (Fluorochem S18000, 22.5g, 100mmol, 6.2eq) was added dropwise to a solution of isopropylmagnesium chloride (2M in THF, Aldrich 230111, 50.25mL, 100mmol, 6.2eq) in THF (Sigma-Aldrich 401757, 150mL) at room temperature. The solution was then heated to 60 deg C and stirred at this temperature for 45 minutes. The mixture was then cooled to 20 deg C. 2,9-Dibromo-20,6,13-pentacenedione/2,10-dibromo-6,13-pentacenedione(3) (7.50g, 16.1mmol, 1eq) was then added and the reaction mixture heated to 60 deg C and stirred overnight. The reaction mixture was then cooled to 20 deg C. A solution of tin (II) chloride dihydrate (Sigma-Aldrich 208256, 36.30g) in 10% HCl (165mL) was added dropwise. The reaction mixture was then heated to 50 deg C and stirred for 1hr. The 25 reaction mixture was then cooled to <10 deg C and the solid collected by filtration. The filter cake was washed with acetone (2x100mL) to give a grey solid (6.58g). The solid was then purified by flash column chromatography (gradient elution: heptane; 10%-50% DCM:heptane) to give two crops; the first crop was then dissolved in DCM

(50mL), acetone (200mL) was added and the product (4) collected by filtration (2.15g). The second crop was purified by flash column chromatography and precipitation as described above to give the product (4) as a blue solid (1.70g; total mass=3.85g, 4.27mmol, 27%). ¹H NMR (500MHz, CDCl₃) 9.26 (2H, s), 9.25 (2H, s), 5 9.19 (2H, s), 9.17 (2H, s), 8.13 (4H, s), 7.83 (4H, d, J= 9.1Hz), 7.45 (4H, d, J= 9.1Hz), 1.46-1.35 (84H, m).

Compound (5): Preparation of 2,8-bis[(4,4,5,5-tetramethyl-1,3,2-dioxaborolan-2-yl)]-6,12-dihydro-6,6,12,12-tetraoctyl-indeno[1,2-b]fluorene

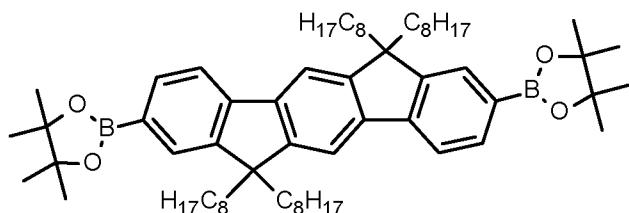

10 2,8-Dibromo-6,12-dihydro-6,6,12,12-tetraoctyl-indeno[1,2-b]fluorene (Sigma-Aldrich 708267, 2.17g, 2.52mmol, 1eq) in THF (44mL) was stirred at -40 deg C under N₂. n-Butyllithium (Acros 10181852, 2.5M solution in hexanes, 12mL, 30.0mmol, 12eq) was added dropwise. The reaction mixture was allowed to stir at -40 deg C for 1 hour, then 2-isopropoxy-4,4,5,5-tetramethyl-1,3,2-dioxaborolane (Sigma-Aldrich 417149, 6mL, 32.5mmol, 13eq) was added. The reaction mixture was then allowed to warm to room temperature with stirring overnight. Saturated ammonium chloride solution (50mL) and DCM (50mL) were added. The mixture was then extracted with EtOAc (4x60mL). The combined organic extracts were washed with brine (100mL) dried over Na₂SO₄, filtered and concentrated *in vacuo* to give a colourless oil (4.52g). The product was purified by dry column chromatography (gradient elution: 2%-10% EtOAc:heptane) to give the product as a pale yellow oil which solidified on standing. Recrystallisation from THF/MeCN gave the product (5) as a colourless crystalline solid, (1.02g, 1.07mmol, 42%). ¹H NMR (300MHz, CDCl₃) 7.83-7.45 (8H, m), 2.07-1.97 (8H, m), 1.39 (24H, s), 1.19-1.01 (40H, m), 0.80 (12H, t, J= 7.0Hz), 20 0.55-0.53 (8H, m).

25

Example (1), PAHC (1): Preparation of TIPS pentacene-6,12-dihydro-6,6,12,12-tetraoctyl-indeno[1,2-b]fluorene copolymer

A mixture of 2,9-dibromo-6,13-bis(triisopropylsilylacetylene)pentacenedione/2,10-dibromo-6,13-bis(triisopropylsilylacetylene)pentacene (0.06g, 0.08mmol, 0.5eq), 2,8-30 Dibromo-6,12-dihydro-6,6,12,12-tetraoctyl-indeno[1,2-b]fluorene (Sigma-Aldrich

708267, 0.07g, 0.08mmol, 1eq), 2,8-bis[(4,4,5,5-tetramethyl-1,3,2-dioxaborolan-2-yl)]-6,12-dihydro-6,6,12,12-tetraoctyl-indeno[1,2-*b*]fluorene(0.15g, 0.16mmol, 1eq), tetrakis(triphenylphosphine) palladium (0) (Acros 12065360, 0.006g, 0.005mmol, 0.03eq), 2M K₂CO₃ (0.47mL, 0.94mmol, 6eq) and Aliquat® 336 (3 drops) in toluene (11mL) was degassed by passing a stream of nitrogen through the solution for 30 minutes. The mixture was then heated to reflux. After 3 hours HPLC confirmed the presence of oligomers. The reaction mixture was allowed to cool to 50 deg C. The reaction mixture was poured into MeOH (35mL) with stirring. After 30 minutes the precipitated solid was collected by filtration under suction using a Buchner funnel to give a dark green powder (0.14g). The solid was purified by flash column chromatography (eluent: toluene). The fractions containing the product were concentrated *in vacuo* to give a dark green solid (0.12g). The solid was dissolved in toluene (5mL) and poured into methanol (15mL). The precipitated solid was collected by filtration under suction using a Buchner funnel. The solid obtained was then dried in a vacuum oven to give the product as a dark green powder (0.11g) (75% indenofluorene:25% TIPS pentacene) which was characterised as follows: GPC Mn=7774 Daltons, N_{av}=11.

Permittivity of the TIPS TIPS pentacene-6,12-dihydro-6,6,12,12-tetraoctyl-indeno[1,2-*b*]fluorene copolymer (1) was 2.79.

(As a comparison, the permittivity of commercially available 2,4-dimethylpolytriarylamine (High Force Research Ltd Code for the 2,4-dimethyl polytriarylamine polymer, PE3) purchased from High Force Research Ltd was measured, in our permittivity tests the binder PE3 had a permittivity of 2.98).

Formulation 1

TIPS pentacene-6,12-dihydro-6,6,12,12-tetraoctyl-indeno[1,2-*b*]fluorene copolymer, PAHC (1) and polyacene 1, (1,4,8,11-tetramethyl-6,13-bis(triethylsilylethynyl) pentacene) (70:30 ratio by weight) were dissolved in 1,2,3,4-tetrahydronaphthalene at 1.7 wt.% total solids. This was coated as an organic semiconductor layer in an OTFT according to the method described above. The formulation was spin coated (500rpm for 5s, then 1500rpm for 60s) onto patterned Au source/drain electrodes (50nm thick Au treated with a 10mM solution of pentafluorobenzene thiol in isopropyl alcohol). The fluoropolymer dielectric Cytop (Asahi Chemical Co.) was spin coated on top (500rpm for 5s then 1500rpm for 20s). Finally an Au gate electrode was deposited by shadow mask evaporation.




Mobility in an OTFT was 1.2 cm²V⁻¹s⁻¹ at channel length L=4μm, (linear mobility).


Mobility in an OTFT was $1.82 \text{ cm}^2 \text{V}^{-1} \text{s}^{-1}$ at channel length $L=10\mu\text{m}$, (linear mobility).


Mobility in an OTFT was $2.9 \text{ cm}^2 \text{V}^{-1} \text{s}^{-1}$ at channel length $L=30\mu\text{m}$, (linear mobility).


Particularly preferred PAHCs according to the present invention are shown in the following table:

5

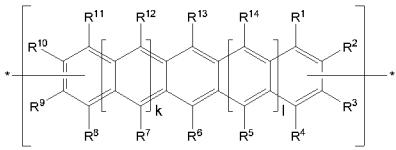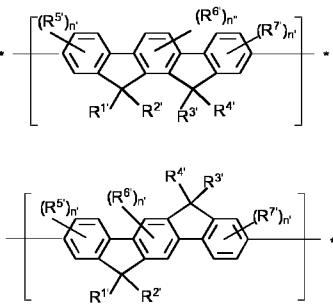Preferred PAHCs		
Monomer A	Monomer B	Monomer C
		
Case 1 $R^6 = R^{13} = \text{trimethylsilyl ethynyl}$; $R^1, R^2, R^3, R^4, R^5, R^7, R^8, R^9, R^{10}, R^{11}, R^{12}$, and $R^{14} = \text{H}$; and R^3 and, R^9 are bonds to another unit of Monomer (A) or (B)	$R^{1'}, R^{2'}, R^{3'}$ and $R^{4'}$ are C_1 to C_{14} alkyl group, preferably n-octyl groups $R^{5'}, R^{6'}$ and $R^{7'}$ are H or C_1 to C_4 alkyl groups; or C_1 to C_4 alkoxy groups; or cyano groups; or isopropyl cyano groups.	$R^{'a}, R^{'b}, R^{'c}, R^{'d}, R^{'e} = \text{H}$
Case 2 $R^6 = R^{13} = \text{triisopropylsilylethynyl}$		
Case 3 $R^6 = R^{13} = \begin{array}{c} \text{---} \\ \text{Si} \\ \text{---} \end{array} \begin{array}{c} \text{---} \\ \\ \text{---} \end{array}$		
Case 4 $R^6 = R^{13} = \text{triisopropylsilylethynyl}$; and $R^1, R^4, R^8, R^{11} = C_1$ to C_4 alkyl (e.g. methyl)		
Case 5 $R^6 = R^{13} = \text{triisopropylsilylethynyl}$; and $R^1, R^4, R^8, R^{11} = C_1$ to C_4 alkoxy (e.g. methoxy)		

Case 6 $R^6 = R^{13} = \text{triethylsilylethynyl}$		
Case 7 $R^6 = R^{13} =$  where Z = C ₁ -C ₅ alkyl/branched alkyl (e.g. methyl or isopropyl)		
Case 1	R^1, R^2, R^3 and R^4 are C ₁ to C ₁₄ alkyl group, preferably n-octyl groups	$R^b, R^d, R^e = H$
Case 2		R^a and $R^c = C_1$ to C ₄ alkyl
Case 3		
Case 4		
Case 5	R^5, R^6 and R^7 are H or C ₁ to C ₄ alkyl groups; or C ₁ to C ₄ alkoxy groups; or cyano groups; or isopropyl cyano groups.	
Case 6		
Case 7		
Case 1	R^1, R^2, R^3 and R^4 are C ₁ to C ₁₄ alkyl group, preferably n-octyl groups	$R^b, R^c, R^d, R^e = H$
Case 2		$R^a = C_1$ to C ₆ alkoxy
Case 3		
Case 4		
Case 5	R^5, R^6 and R^7 are H or C ₁ to C ₄ alkyl groups; or C ₁ to C ₄ alkoxy groups; or cyano groups; or isopropyl cyano groups.	(i) $R^a = \text{methoxy}$ (ii) $R^a = \text{ethoxy}$
Case 6		
Case 7		
Case 1	R^1, R^2, R^3 and R^4 are C ₁ to C ₁₄ alkyl group, preferably n-octyl groups	$R^a, R^b, R^d, R^e = H$
Case 2		$R^c = C_1$ to C ₆ alkoxy
Case 3		
Case 4		
Case 5	R^5, R^6 and R^7 are H or C ₁ to C ₄ alkyl groups; or C ₁ to C ₄ alkoxy groups; or cyano groups; or isopropyl cyano groups.	(i) $R^c = \text{methoxy}$ (ii) $R^c = \text{ethoxy}$
Case 6		
Case 7		
Case 1	R^1, R^2, R^3 and R^4 are C ₁ to C ₁₄ alkyl group, preferably n-octyl groups	$R^a, R^b, R^c, R^d = H$
Case 2		$R^e = C_1$ to C ₆ alkoxy
Case 3		
Case 4		
Case 5	R^5, R^6 and R^7 are H or C ₁ to C ₄ alkyl groups; or C ₁ to C ₄ alkoxy groups; or cyano groups; or isopropyl cyano groups.	(i) $R^e = \text{methoxy}$ (ii) $R^e = \text{ethoxy}$
Case 6		
Case 7		
Case 1	R^1, R^2, R^3 and R^4 are C ₁ to C ₁₄ alkyl group, preferably n-octyl groups	$R^b, R^d, R^e = H$
Case 2		$R^a = R^c = C_1$ to C ₆ alkoxy
Case 3		
Case 4		
Case 5	R^5, R^6 and R^7 are H or C ₁ to C ₄ alkyl groups; or C ₁ to C ₄	(i) $R^a = R^c = \text{methoxy}$ (ii) $R^a = R^c = \text{ethoxy}$

	alkoxy groups; or cyano groups; or isopropyl cyano groups.	
Case 6		
Case 7		
Case 1	$R^{1'}, R^{2'}, R^{3'} \text{ and } R^{4'}$ are C_1 to C_{14} alkyl group, preferably n-octyl groups	$R^{1'}, R^{2'} = H$ $R^{1'}, R^{2'}, R^{3'} = C_1$ to C_6 alkoxy
Case 2		
Case 3		
Case 4		
Case 5	$R^{5'}, R^{6'} \text{ and } R^{7'}$ are H or C_1 to C_4 alkyl groups; or C_1 to C_4 alkoxy groups; or cyano groups; or isopropyl cyano groups.	(i) $R^{1'}, R^{2'}, R^{3'} =$ methoxy (ii) $R^{1'}, R^{2'}, R^{3'} =$ ethoxy
Case 6		
Case 7		
Case 1	$R^{1'} = R^{2'} = C_1$ to C_{14} alkyl group, preferably n-octyl groups	$R^{1'}, R^{2'} = H$ $R^{1'}, R^{2'}, R^{3'} = C_1$ to C_6 alkoxy
Case 2		
Case 3		
Case 4		
Case 5	$R^{3'}, R^{4'} = H$ or C_1 to C_4 alkyl groups; or C_1 to C_4 alkoxy groups; or cyano groups; or isopropyl cyano groups.	(i) $R^{1'}, R^{2'}, R^{3'} =$ methoxy (ii) $R^{1'}, R^{2'}, R^{3'} =$ ethoxy
Case 6		
Case 7		
Case 1	$R^{1'}, R^{2'}, R^{3'} \text{ and } R^{4'}$ are C_1 to C_{14} alkyl group, preferably n-octyl groups	$R^{1'}, R^{2'}, R^{3'}, R^{4'} = H$ $R^{1'} = \text{Cyano (CN)}$
Case 2		
Case 3		
Case 4		
Case 5	$R^{5'}, R^{6'} \text{ and } R^{7'}$ are H or C_1 to C_4 alkyl groups; or C_1 to C_4 alkoxy groups; or cyano groups; or isopropyl cyano groups.	
Case 6		
Case 7		
Case 1	$R^{1'}, R^{2'}, R^{3'} \text{ and } R^{4'}$ are C_1 to C_{14} alkyl group, preferably n-octyl groups	$R^{1'}, R^{2'}, R^{3'}, R^{4'} = H$ $R^{1'} = \text{Isopropylcyano group}$
Case 2		
Case 3		
Case 4		
Case 5	$R^{5'}, R^{6'} \text{ and } R^{7'}$ are H or C_1 to C_4 alkyl groups; or C_1 to C_4 alkoxy groups; or cyano groups; or isopropyl cyano groups.	Monomer C: 
Case 6		
Case 7		
Case 1	$R^{1'}, R^{2'}, R^{3'} \text{ and } R^{4'}$ are C_1 to C_{14} alkyl group, preferably n-octyl groups	$R^{1'}, R^{2'}, R^{3'}, R^{4'} = H$ $R^{1'} = \text{Isopropylcyano group}$
Case 2		
Case 3		
Case 4		
Case 5	$R^{5'}, R^{6'} \text{ and } R^{7'}$ are H or C_1 to C_4 alkyl groups; or C_1 to C_4 alkoxy groups; or cyano groups; or isopropyl cyano groups.	Monomer C:
Case 6		
Case 7		

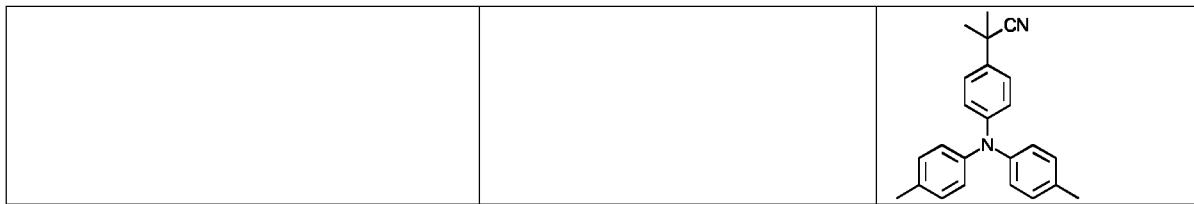


The organic semiconductors compounds specified in the table are particularly preferred as they combine the beneficial properties of high charge transport mobility (of the binders) with a polarity that is more compatible with benign, non-chlorinated solvents that will be desirable for use in large area printing. In addition,


5 as these compounds are more polar once deposited as the OSC layer, or alternatively as a component in the OSC layer, they are expected to be resistant to being re-dissolved by the hydrophobic solvents used for the organic gate insulators (OGI) such as Cytop. Furthermore, it is expected that the polar binders are useful for both top gate and bottom gate OTFTs, particularly for bottom gate OTFTs.

CLAIMS


1. A Polycyclic Aromatic Hydrocarbon Copolymer (PAHC) comprising a mixture of at least one polyacene monomer unit having the Formula (A) and at least one monomer unit having the Formula (B)/(B'):

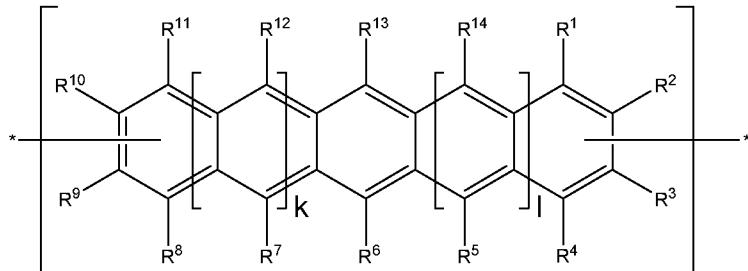

Formula (A)

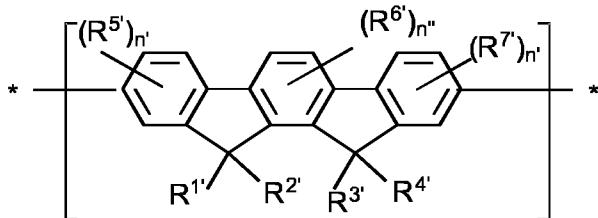

Formula (B)

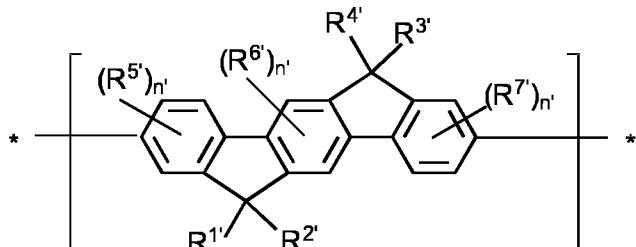

Formula (B')

wherein each of R¹, R², R³, R⁴, R⁵, R⁶, R⁷, R⁸, R⁹, R¹⁰, R¹¹, R¹², R¹³ and R¹⁴, which may be the same or different, independently represents hydrogen; a branched or unbranched, substituted or unsubstituted C₁-C₄₀ alkyl group; a branched or unbranched, substituted or unsubstituted C₂-C₄₀ alkenyl group; a branched or unbranched, substituted or unsubstituted C₂-C₄₀ alkynyl group; an optionally substituted C₃-C₄₀ cycloalkyl group; an optionally substituted C₆-C₄₀ aryl group; an optionally substituted C₁-C₄₀ heterocyclic group; an optionally substituted C₁-C₄₀

heteroaryl group; an optionally substituted C₁-C₄₀ alkoxy group; an optionally substituted C₆-C₄₀ aryloxy group; an optionally substituted C₇-C₄₀ alkylaryloxy group; an optionally substituted C₂-C₄₀ alkoxy carbonyl group; an optionally substituted C₇-C₄₀ aryloxy carbonyl group; a cyano group (-CN); a carbamoyl group (-C(=O)NR¹⁵R¹⁶); a carbonyl group (-C(=O)-R¹⁷); a carboxyl group (-CO₂R¹⁸); a cyanate group (-OCN); an isocyano group (-NC); an isocyanate group (-NCO); a thiocyanate group (-SCN) or a thioisocyano group (-NCS); an optionally substituted amino group; a hydroxy group; a nitro group; a CF₃ group; a halo group (Cl, Br, F, I); -SR¹⁹; -SO₃H; -SO₂R²⁰; -SF₅; an optionally substituted silyl group; a C₂-C₁₀ alkynyl group substituted with a -SiH₂R²² group, a C₂-C₁₀ alkynyl substituted with a -SiH₂R²² group, or a C₂-C₁₀ alkynyl moiety substituted with a -Si(R²²)_x(R²³)_y(R²⁴)_z group;

wherein each R²² group is independently selected from the group consisting of a branched or unbranched, substituted or unsubstituted C₁-C₁₀ alkyl group, a branched or unbranched, substituted or unsubstituted C₂-C₁₀ alkynyl group, a substituted or unsubstituted C₂-C₂₀ cycloalkyl group, a substituted or unsubstituted C₂-C₁₀ alkenyl group, and a substituted or unsubstituted C₆-C₂₀ cycloalkylalkylene group;

each R²³ group is independently selected from the group consisting of a branched or unbranched, substituted or unsubstituted C₁-C₁₀ alkyl group, a branched or unbranched, substituted or unsubstituted C₂-C₁₀ alkynyl group, a substituted or unsubstituted C₂-C₁₀ alkenyl group, a substituted or unsubstituted C₂-C₂₀ cycloalkyl group, and a substituted or unsubstituted C₆-C₂₀ cycloalkylalkylene group;

R²⁴ is independently selected from the group consisting of hydrogen, a branched or unbranched, substituted or unsubstituted C₂-C₁₀ alkynyl group, a substituted or unsubstituted C₂-C₂₀ cycloalkyl group, a substituted or unsubstituted C₆-C₂₀ cycloalkylalkylene group, a substituted C₅-C₂₀ aryl group, a substituted or unsubstituted C₆-C₂₀ arylalkylene group, an acetyl group, a substituted or unsubstituted C₃-C₂₀ heterocyclic ring comprising at least one of O, N, S and Se in the ring;

wherein x= 1 or 2; y=1 or 2; z=0 or 1; and (x+y+z)=3;

wherein each of R¹⁵, R¹⁶, R¹⁸, R¹⁹ and R²⁰ independently represent H or optionally substituted C₁-C₄₀ carbyl or hydrocarbyl group optionally comprising one or more heteroatoms;

wherein R¹⁷ represents a halogen atom, H or optionally substituted C₁-C₄₀ carbyl or C₁-C₄₀ hydrocarbyl group optionally comprising one or more heteroatoms;

wherein k and l are independently 0, 1 or 2;

wherein n' = 1 to 3;

5 wherein at least two of R¹, R², R³, R⁴, R⁸, R⁹, R¹⁰ and R¹¹ are a bond, represented by ——*, to another monomer unit having the Formula (A) or (B)/(B'), and

wherein for the indenofluorene monomer, R^{1'}, R^{2'}, R^{3'}, R^{4'}, R^{5'}, R^{6'}, and R^{7'} which may be the same or different, each independently represents hydrogen; a branched or unbranched, substituted or unsubstituted C₁-C₄₀ alkyl group; a branched or unbranched, substituted or unsubstituted C₂-C₄₀ alkenyl group; a branched or unbranched, substituted or unsubstituted C₂-C₄₀ alkynyl group; an optionally substituted C₃-C₄₀ cycloalkyl group; an optionally substituted C₆-C₄₀ aryl group; an optionally substituted C₁-C₄₀ heterocyclic group; an optionally substituted C₁-C₄₀ heteroaryl group; an optionally substituted C₁-C₄₀ alkoxy group; an optionally substituted C₆-C₄₀ aryloxy group; an optionally substituted C₇-C₄₀ alkylaryloxy group; an optionally substituted C₂-C₄₀ alkoxy carbonyl group; an optionally substituted C₇-C₄₀ aryloxy carbonyl group; a cyano group (-CN); a carbamoyl group (-C(=O)NR¹⁵R¹⁶); a carbonyl group (-C(=O)-R¹⁷); a carboxyl group (-CO₂R¹⁸); a cyanate group (-OCN); an isocyano group (-NC); an isocyanate group (-NCO); a thiocyanate group (-SCN) or a thioisocyano group (-NCS); an optionally substituted amino group; a hydroxy group; a nitro group; a CF₃ group; a halo group (Cl, Br, F, I); -SR¹⁹; -SO₃H; -SO₂R²⁰; -SF₅; an optionally substituted silyl group;

wherein preferably at least one of R^{1'}, R^{2'}, R^{3'}, R^{4'}, R^{5'}, R^{6'}, and R^{7'} is substituted with at least one polar group or more polarising group which is independently selected

25 from the group consisting of nitro group, nitrile group, C₁₋₄₀ alkyl group substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyano group; a C₁₋₄₀ alkoxy group optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyano group; a C₁₋₄₀ carboxylic acid group

30 optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyano group; a C₂₋₄₀ carboxylic acid ester optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyano group; sulfonic acid optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyano group; sulfonic acid ester

35

optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyanate group; cyanate group, isocyanate group, thiocyanate group, thioisocyanate group; and an amino group optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyanate group; and combinations thereof.

2. A PAHC according to claim 1, comprising at least 20 to 40% of monomer (A) and at least 60 to 80% of monomer (B)/(B'), based on the total of all monomer units (A) and (B) in the copolymer.

10 3. A PAHC according to claim 1 or claim 2, wherein k = l = 0 or 1.

4. A PAHC according to claim 3, wherein k = 1 and l = 1.

5. A PAHC according to any preceding claim, wherein the copolymers have a number average molecular weight (Mn) of between 400 and 100,000.

6. A PAHC according to any preceding claim, wherein the copolymers are semiconducting copolymers having a permittivity at 1000 Hz of greater than 1.5, preferably between 3.4 and 8.

15 7. A PAHC according to claim 6, wherein the copolymers are semiconducting copolymers having a permittivity at 1000 Hz of between 3.4 and 8.0.


8. A PAHC according to any preceding claim, wherein at least one, preferably 2 of groups R¹, R², R³, R⁴, R⁵, R⁶, R⁷, R⁸, R⁹, R¹⁰, R¹¹, R¹², R¹³ and R¹⁴ are (tri-C₁₋₂₀ hydrocarbilsilyl)C₁₋₄alkynyl- groups, preferably (trihydrocarbilsilyl)ethynyl- groups.

20 9. A PAHC according to any preceding claim, wherein R⁵, R⁷, R¹² and R¹⁴ are hydrogen.


10. A PAHC according to any preceding claim, wherein -Si(R²²)_x(R²³)_y(R²⁴)_z is selected from the group consisting of trimethylsilyl, triethylsilyl, tripropylsilyl, dimethylethylsilyl, diethylmethylsilyl, dimethylpropylsilyl, dimethylisopropylsilyl, dipropylmethylsilyl, diisopropylmethylsilyl, dipropylethylsilyl, diisopropylethylsilyl, diethylisopropylsilyl, triisopropylsilyl, trimethoxysilyl, triethoxysilyl, triphenylsilyl, diphenylisopropylsilyl, diisopropylphenylsilyl, diphenylethylsilyl, diethylphenylsilyl, 25 diphenylmethylsilyl, triphenoxyisilyl, dimethylmethoxysilyl, dimethylphenoxyisilyl, and methylmethoxyphenyl.

30 11. A PAHC according to any preceding claim, having the Formula (A1) or (A2)

51

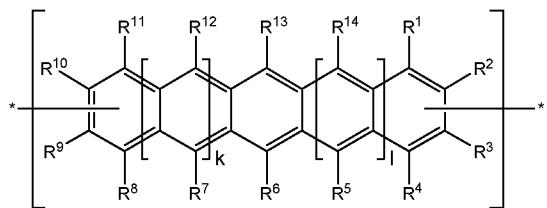


Formula (A1)

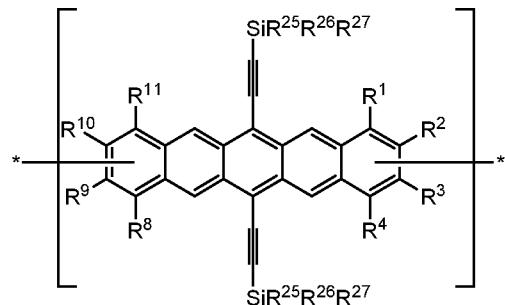


Formula (A2)

5 wherein R^{25} , R^{26} and R^{27} are independently selected from the group consisting of C_1 - C_6 alkyl and C_2 - C_6 alkenyl, preferably independently selected from the group consisting of methyl, ethyl, propyl, isopropyl, n-butyl, isobutyl, t-butyl, 1-propenyl and 2-propenyl, more preferably ethyl, n-propyl and isopropyl;

12. A PAHC according to any preceding claim, wherein the polyacene monomer 10 units have the Formulae (A3) and (A4):

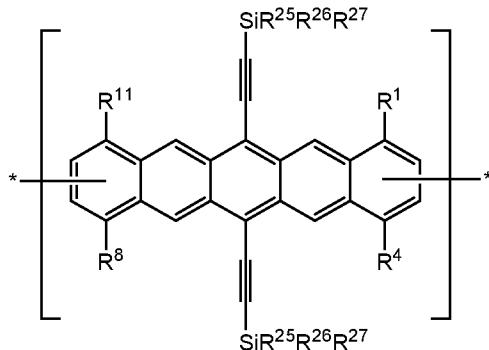


Formula (A3)

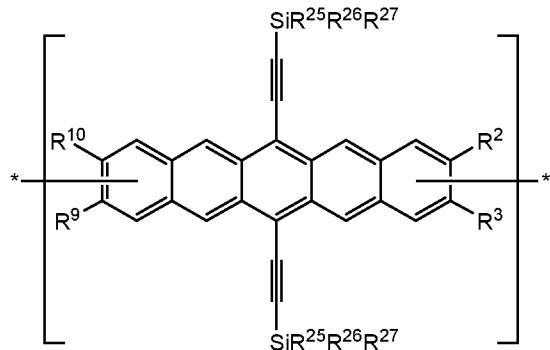


Formula (A4)

wherein R^{25} , R^{26} and R^{27} are independently selected from the group consisting of methyl, ethyl and isopropyl.


15 13. A PAHC according to any preceding claim, wherein the polyacene monomer unit is selected from the following units (A5) to (A8):

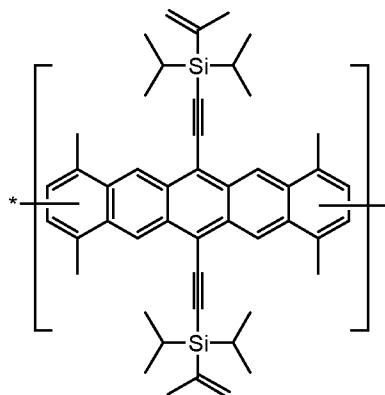


(A5)

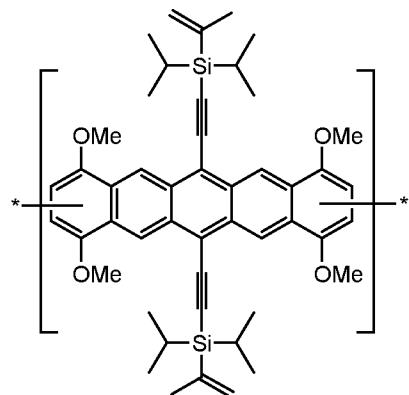

(A6)

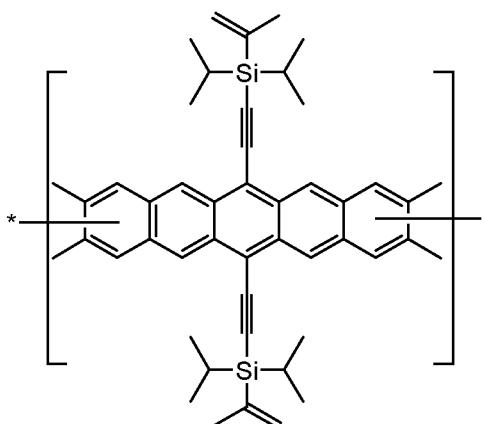

(A7)

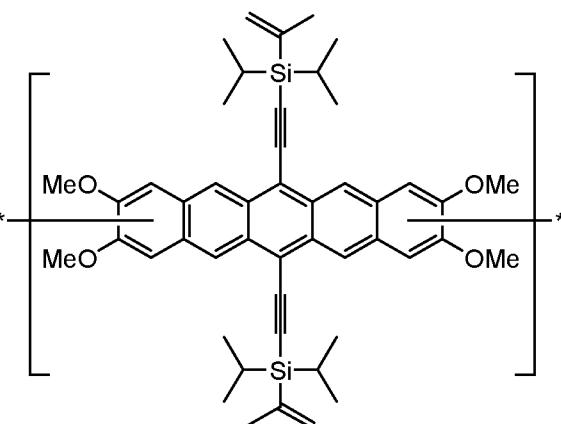

(A8)


5 14. A PAHC according to any preceding claim, wherein at least one of R¹, R², R³, R⁴, R⁵, R⁶, and R⁷ groups is a polar group or polarising group, and n = 1 to 20.

10 15. A PAHC according to claim 14 wherein the one or more polar or polarising group(s) is independently selected from the group consisting of nitro group, nitrile group, C₁₋₄₀ alkyl group substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyanate group; C₁₋₄₀ alkoxy group optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyanate group; C₁₋₄₀ carboxylic acid group optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyanate group; C₂₋₄₀ carboxylic acid ester optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyanate group; sulfonic acid optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyanate group; sulfonic acid ester optionally substituted with a nitro group, a nitrile group, a cyanate group,


an isocyanate group, a thiocyanate group or a thioisocyanate group; cyanate group, isocyanate group, thiocyanate group, thioisocyanate group; and an amino group optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyanate group; and combinations thereof.

16. A PAHC according to claim 14 or 15, wherein one or 2 of the groups R^1 , R^2 , R^3 , R^4 , R^5 , R^6 and R^7 are selected from methoxy, cyanomethyl, CN and mixtures thereof, and $n = 1$ to 10.

17. A PAHC according to any preceding claim, further comprising one or more monomers (C), (D) and/or (E):

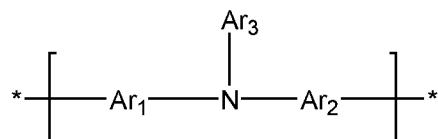


(C)

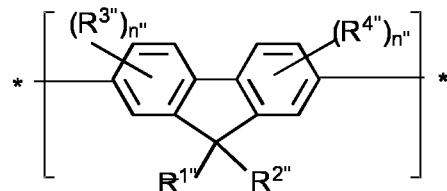

15

(D)

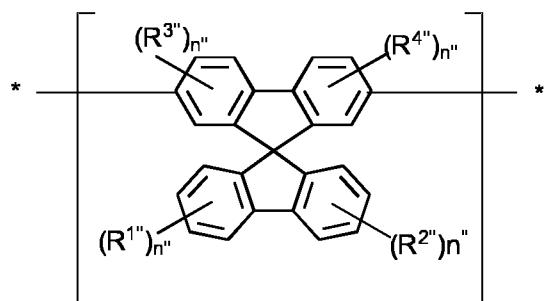

(E)

wherein each $R^{1''}$, $R^{2''}$, $R^{3''}$ and $R^{4''}$, each of which may be the same or different, is selected from the same group as R^1 , R^2 , R^3 and R^4 , already defined above;

Ar₁, Ar₂ and Ar₃, which may be the same or different, each represent, independently an optionally substituted C₆₋₄₀ aromatic group (mononuclear or polynuclear). Preferably at least one of Ar₁, Ar₂ and Ar₃ is substituted with at least one polar or more polarising group, and n = 1 to 20, preferably 1 to 10 and more preferably 1 to 5. Preferably, at least one of Ar₁, Ar₂ and Ar₃ is substituted with 1, 2, 3, or 4, more preferably 1, 2 or 3, more preferably 1 or 2, preferably 1 polar or more polarising group(s);

n" = 1 to 3; and

wherein monomer (A) is present in an amount of at least 20 wt. %; monomer (B) is present in an amount of at least 60 wt. % and the remainder is comprised of monomers (C), (D), (D') and/or (E), based on the total weight of all monomer units in the copolymer.

18. An organic semiconductor composition comprising a PAHC according to any of claims 1 to 17 and a polyacene small molecule, wherein the PAHC has a permittivity at 1000Hz of between 3.4 and 8.0.

19. An organic semiconductor composition comprising a PAHC according to any of claims 1 to 17 and a polyacene small molecule, wherein the PAHC has a permittivity at 1000Hz of between 3.4 and 4.5.

20. An organic semiconductor composition comprising a Polycyclic Aromatic Hydrocarbon Copolymer (PAHC) according to any of claims 1 to 17, wherein the composition has a permittivity at 1000 Hz of between 3 and 6.5.

21. An organic semiconductor composition according to claim 20, comprising an organic binder, wherein the organic binder has a permittivity at 1000 Hz of between 3.4 and 8, preferably between 4 and 6.5.

22. An organic semiconductor composition according to any of claims 18 to 21 having a charge mobility value of at least 0.5 cm²V⁻¹s⁻¹, preferably between 2 and 5.0 cm²V⁻¹s⁻¹.

23. An organic semiconductor layer, comprising a PAHC or an organic semiconductor composition according to any preceding claim.

30 24. An electronic device comprising a PAHC, an organic semiconductor composition or semiconductor layer according to any preceding claim.

25. An electronic device according to claim 24, selected from organic thin film transistors (OTFTs), organic light emitting diodes (OLEDS), photodetectors, organic photovoltaic (OPV) cells, sensors, lasers, memory elements and logic circuits.

26. An ink comprising a PAHC or an organic semiconductor composition
5 according to any of claims 1-22.

27. A process for producing a Polycyclic Aromatic Hydrocarbon Copolymer (PAHC) comprising copolymerising a composition containing at least one polyacene monomer unit selected from the structures (A) and (B)/(B'),

wherein each of R¹, R², R³, R⁴, R⁵, R⁶, R⁷, R⁸, R⁹, R¹⁰, R¹¹, R¹², R¹³ and R¹⁴, which
10 may be the same or different, independently represents hydrogen; a branched or unbranched, substituted or unsubstituted C₁-C₄₀ alkyl group; a branched or unbranched, substituted or unsubstituted C₂-C₄₀ alkenyl group; a branched or unbranched, substituted or unsubstituted C₂-C₄₀ alkynyl group; an optionally substituted C₃-C₄₀ cycloalkyl group; an optionally substituted C₆-C₄₀ aryl group; an
15 optionally substituted C₁-C₄₀ heterocyclic group; an optionally substituted C₁-C₄₀ heteroaryl group; an optionally substituted C₁-C₄₀ alkoxy group; an optionally substituted C₆-C₄₀ aryloxy group; an optionally substituted C₇-C₄₀ alkylaryloxy group; an optionally substituted C₂-C₄₀ alkoxy carbonyl group; an optionally substituted C₇-C₄₀ aryloxycarbonyl group; a cyano group (-CN); a carbamoyl group (-
20 C(=O)NR¹⁵R¹⁶); a carbonyl group (-C(=O)-R¹⁷); a carboxyl group (-CO₂R¹⁸) a cyanate group (-OCN); an isocyano group (-NC); an isocyanate group (-NCO); a thiocyanate group (-SCN) or a thioisocyano group (-NCS); an optionally substituted amino group; a hydroxy group; a nitro group; a CF₃ group; a halo group (Cl, Br, F, I); -SR¹⁹; -SO₃H; -SO₂R²⁰; -SF₅; an optionally substituted silyl group; a C₂-
25 C₁₀ alkynyl group substituted with a -SiH₂R²² group, a C₂-C₁₀ alkynyl substituted with a -SiHR²²R²³ group, or a C₂-C₁₀ alkynyl moiety substituted with a -Si(R²²)_x(R²³)_y(R²⁴)_z group;

wherein each R²² group is independently selected from the group consisting of a branched or unbranched, substituted or unsubstituted C₁-C₁₀ alkyl group, a
30 branched or unbranched, substituted or unsubstituted C₂-C₁₀ alkynyl group, a substituted or unsubstituted C₂-C₂₀ cycloalkyl group, a substituted or unsubstituted C₂-C₁₀ alkenyl group, and a substituted or unsubstituted C₆-C₂₀ cycloalkylalkylene group;

each R²³ group is independently selected from the group consisting of a branched or unbranched, substituted or unsubstituted C₁-C₁₀ alkyl group, a branched or
35

unbranched, substituted or unsubstituted C₂-C₁₀ alkynyl group, a substituted or unsubstituted C₂-C₁₀ alkenyl group, a substituted or unsubstituted C₂-C₂₀ cycloalkyl group, and a substituted or unsubstituted C₆-C₂₀ cycloalkylalkylene group;

R²⁴ is independently selected from the group consisting of hydrogen, a branched or unbranched, substituted or unsubstituted C₂-C₁₀ alkynyl group, a substituted or unsubstituted C₂-C₂₀ cycloalkyl group, a substituted or unsubstituted C₆-C₂₀ cycloalkylalkylene group, a substituted C₅-C₂₀ aryl group, a substituted or unsubstituted C₆-C₂₀ arylalkylene group, an acetyl group, a substituted or unsubstituted C₃-C₂₀ heterocyclic ring comprising at least one of O,N,S and Se in the ring;

wherein x= 1 or 2; y=1 or 2; z=0 or 1; and (x+y+z)=3;

wherein each of R¹⁵, R¹⁶, R¹⁸, R¹⁹ and R²⁰ independently represent H or optionally substituted C₁-C₄₀ carbyl or hydrocarbyl group optionally comprising one or more heteroatoms;

15 wherein R¹⁷ represents a halogen atom, H or optionally substituted C₁-C₄₀ carbyl or C₁-C₄₀ hydrocarbyl group optionally comprising one or more heteroatoms;

wherein k and l are independently 0, 1 or 2;

wherein R¹, R², R³, R⁴, R⁵, R⁶ and R⁷ which may be the same or different, independently each represent, hydrogen; a branched or unbranched, substituted or

20 unsubstituted C₁-C₄₀ alkyl group; a branched or unbranched, substituted or unsubstituted C₂-C₄₀ alkenyl group; a branched or unbranched, substituted or unsubstituted C₂-C₄₀ alkynyl group; an optionally substituted C₃-C₄₀ cycloalkyl group; an optionally substituted C₆-C₄₀ aryl group; an optionally substituted C₁-C₄₀ heterocyclic group; an optionally substituted C₁-C₄₀ heteroaryl group; an optionally

25 substituted C₁-C₄₀ alkoxy group; an optionally substituted C₆-C₄₀ aryloxy group; an optionally substituted C₇-C₄₀ alkylaryloxy group; an optionally substituted C₂-C₄₀ alkoxy carbonyl group; an optionally substituted C₇-C₄₀ aryloxycarbonyl group; a cyano group (-CN); a carbamoyl group (-C(=O)NR¹⁵R¹⁶); a carbonyl group (-C(=O)-R¹⁷); a carboxyl group (-CO₂R¹⁸) a cyanate group (-OCN); an isocyanato group (-NC);

30 an isocyanate group (-NCO); a thiocyanate group (-SCN) or a thioisocyanate group (-NCS); an optionally substituted amino group; a hydroxy group; a nitro group; a CF₃ group; a halo group (Cl, Br, F, I); -SR¹⁹; -SO₃H; -SO₂R²⁰; -SF₅; an optionally substituted silyl group;

wherein preferably at least one of R^{1'}, R^{2'}, R^{3'}, R^{4'} is substituted with at least one polar or more polarising group which is independently selected from the group consisting of nitro group, nitrile group, C₁₋₄₀ alkyl group substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or

5 a thioisocyanate group; a C₁₋₄₀ alkoxy group optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyanate group; a C₁₋₄₀ carboxylic acid group optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyanate group; a C₂₋₄₀ carboxylic acid ester optionally substituted with a

10 nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyanate group; sulfonic acid optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyanate group; sulfonic acid ester optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a

15 thioisocyanate group; cyanate group, isocyanate group, thiocyanate group, thioisocyanate group; and an amino group optionally substituted with a nitro group, a nitrile group, a cyanate group, an isocyanate group, a thiocyanate group or a thioisocyanate group; and combinations thereof;

wherein at least one of R^{1'}, R^{2'}, R^{3'}, R^{4'}, R^{5'}, R^{6'} and R^{7'} groups is a polar or polarising group, and n = 1 to 20;

20 wherein X' is a halogen atom or a cyclic borate group; and





wherein Y' is a halogen atom.


28. A process for producing a Polycyclic Aromatic Hydrocarbon Copolymer (PAHC) according to claim 27, further comprising any of the features as defined in claims 2 to 17.

25


29. A Polycyclic Aromatic Hydrocarbon Copolymer (PAHC) obtainable according to a process of claim 27 or 28.

1/4

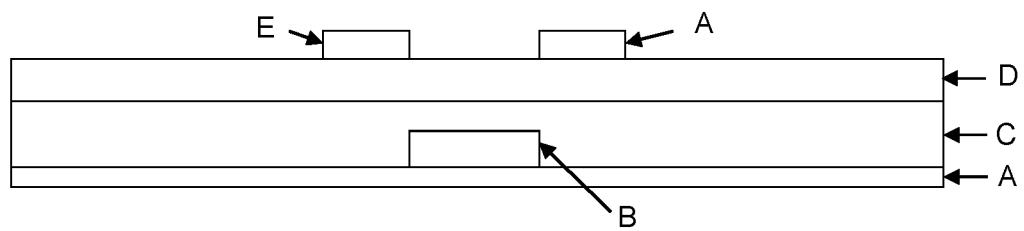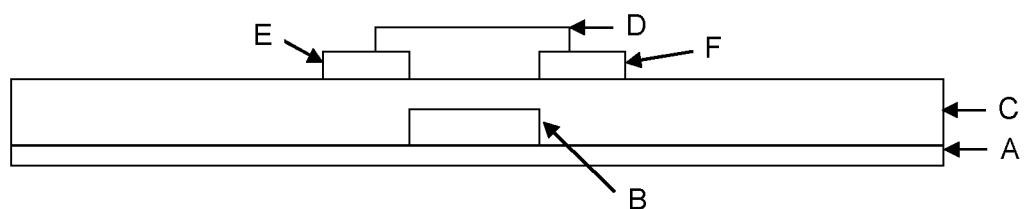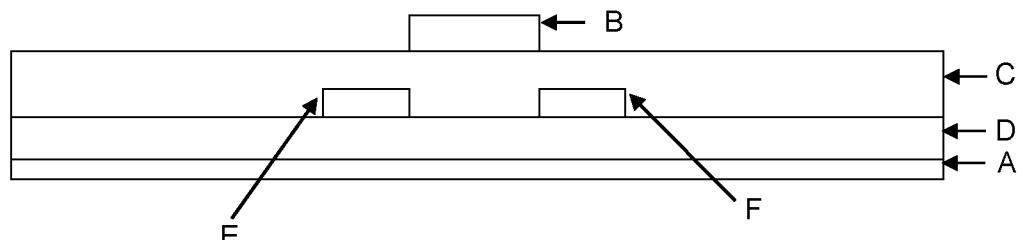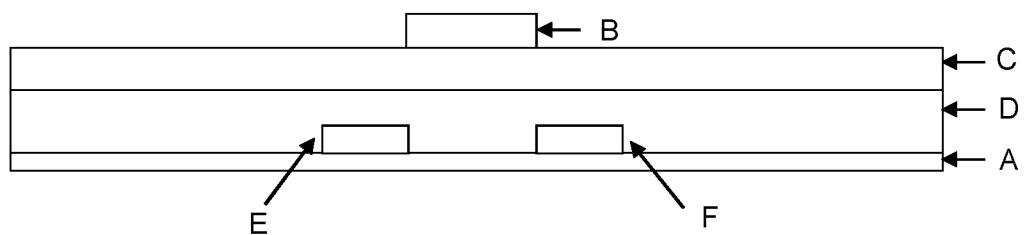**Figure 1****Figure 2****Figure 3****Figure 4**

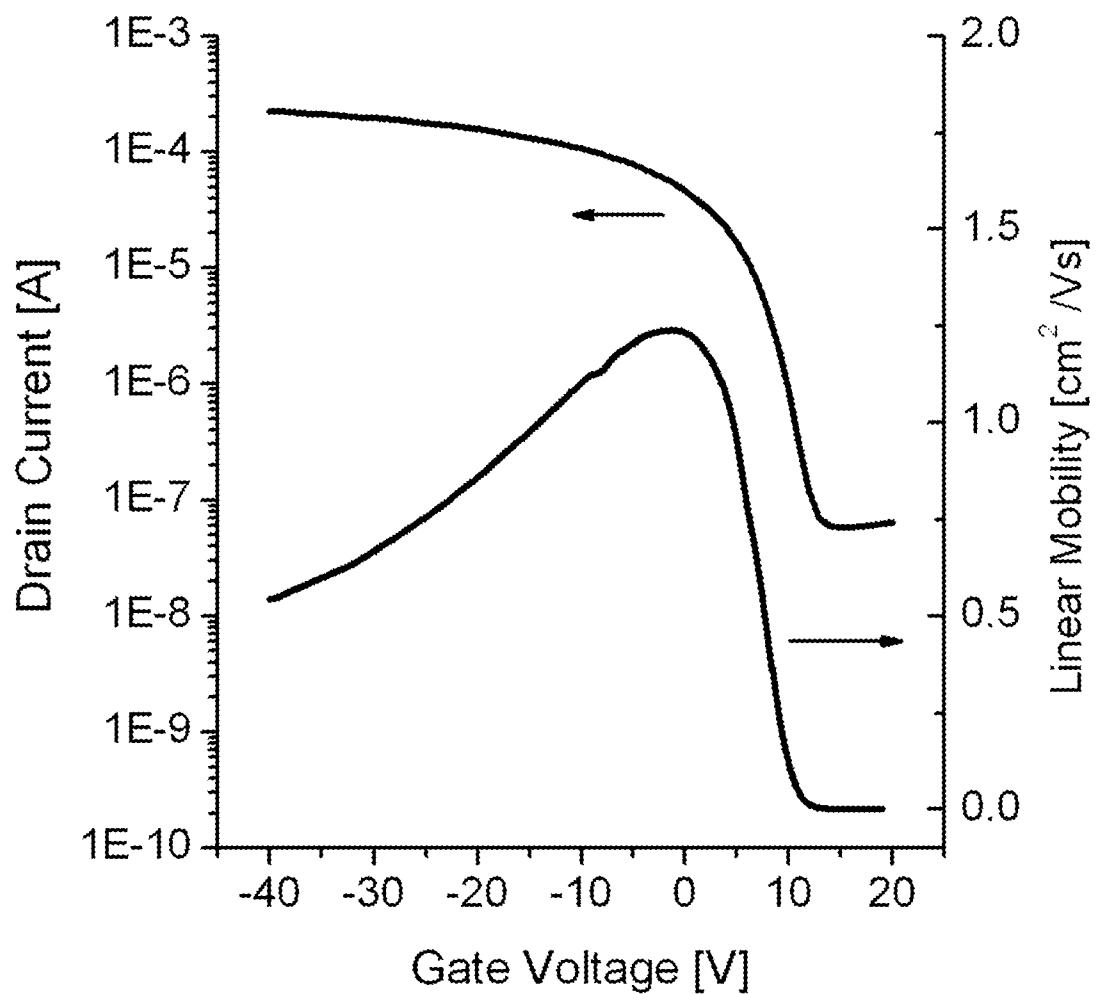**Figure 5**

3/4

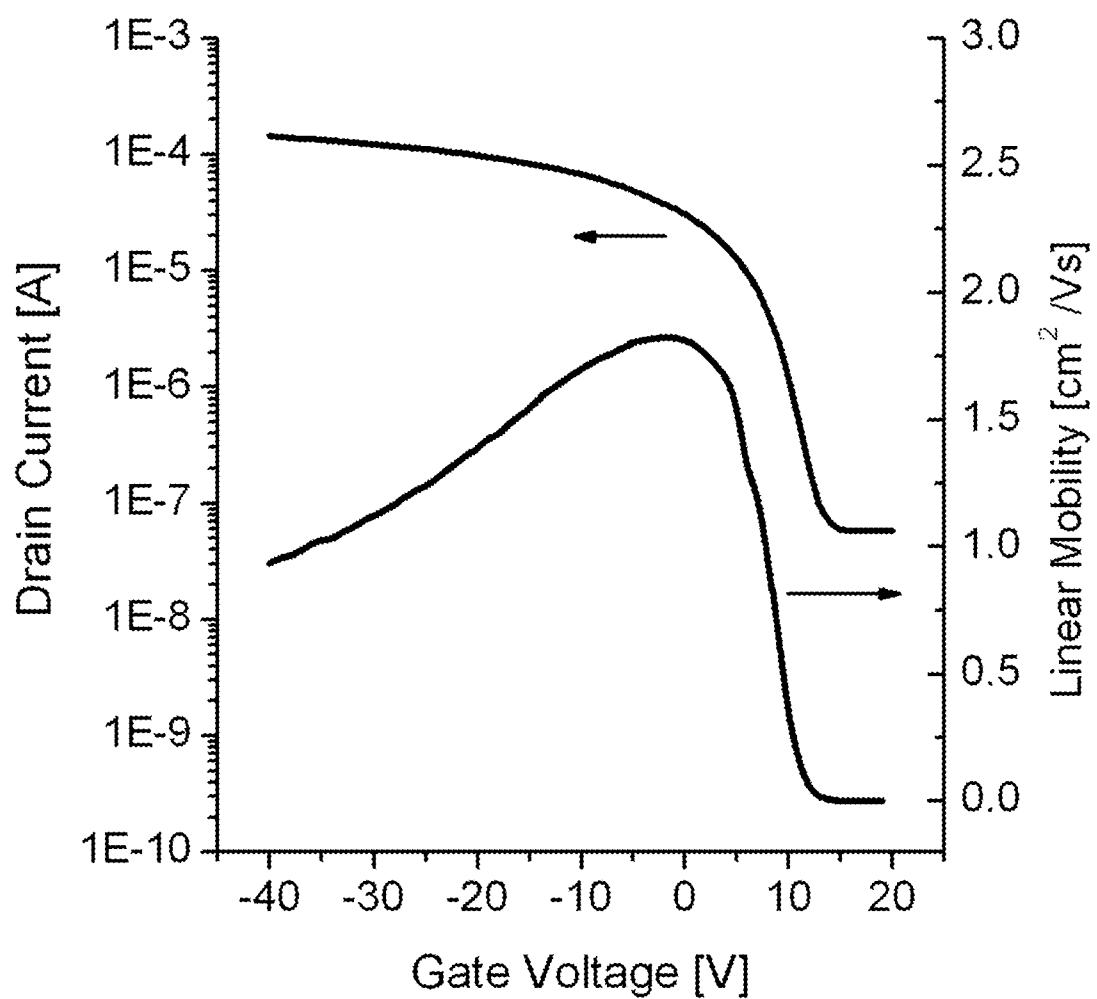**Figure 6**

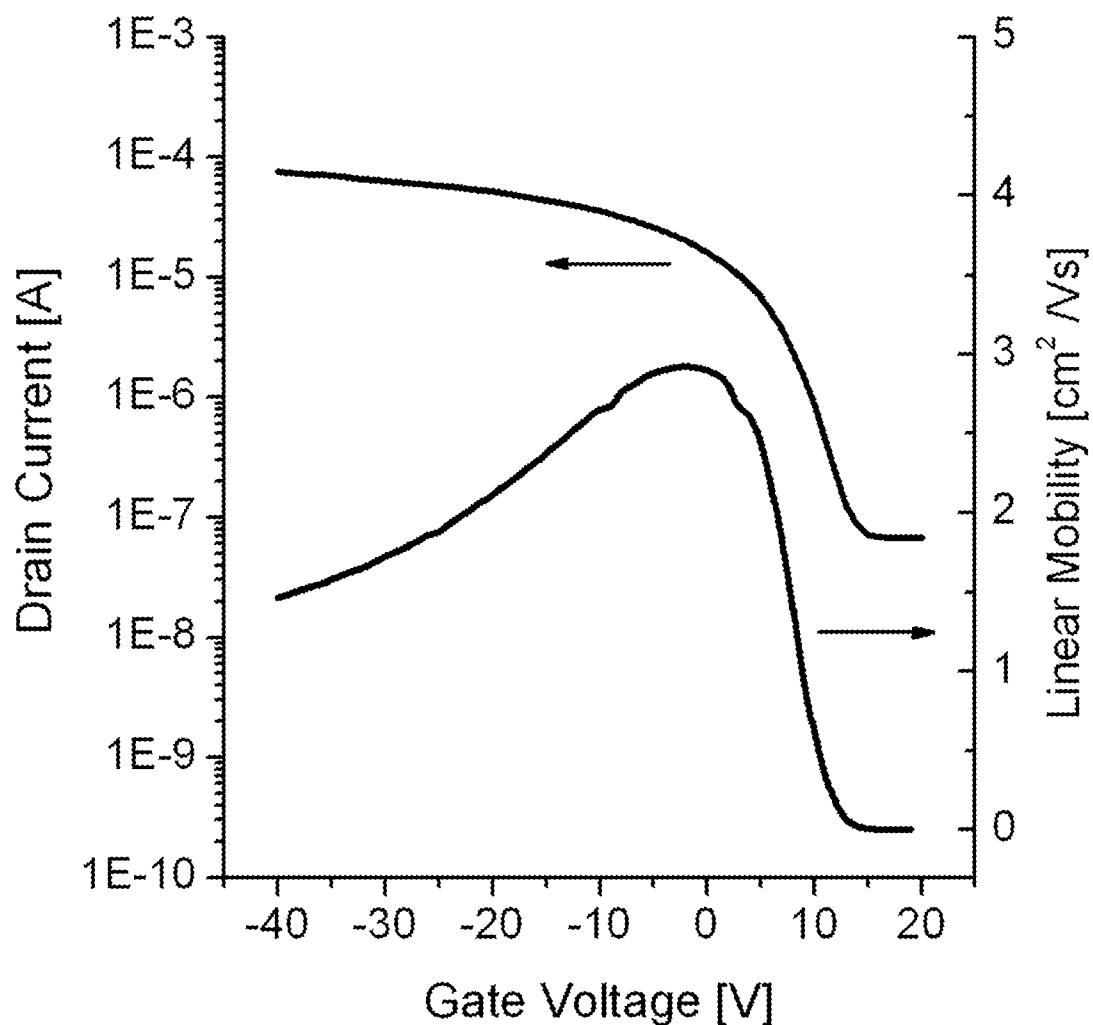


Figure 7

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2013/050459

A. CLASSIFICATION OF SUBJECT MATTER				
INV.	C08G61/02	C08G61/12	C08K5/01	C08L65/00
	H01B1/12	H01L51/00	H01L51/05	H01L51/42

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C08G H01B H01L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, CHEM ABS Data, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2010/136112 A1 (MERCK PATENT GMBH [DE]; SPARROWE DAVID [GB]; SCHULTE NIELS [DE]; MEYER) 2 December 2010 (2010-12-02) page 1, line 5 - line 8; claims 1,4,10; example 3 ----- X WO 2010/149261 A1 (MERCK PATENT GMBH [DE]; MEYER FRANK EGON [GB]; SCHULTE NIELS [DE]; HAY) 29 December 2010 (2010-12-29) page 25, line 17 - page 29, line 18; claim 16; examples 6-10 ----- Y WO 2007/082584 A1 (MERCK PATENT GMBH [DE]; OGIER SIMON DOMINIC [GB]; VERES JANOS [GB]; ZE) 26 July 2007 (2007-07-26) page 14, line 16 - page 21, line 35; claims 1,3 ----- - / --	1-3,5-7, 9,10,14, 17-29 1-3,5-7, 9,10,14, 17-29 4,8, 11-13, 15,16

Further documents are listed in the continuation of Box C.

See patent family annex.

* Special categories of cited documents :

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
---	--

26 June 2013

04/07/2013

Name and mailing address of the ISA/ European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Fax: (+31-70) 340-3016	Authorized officer
--	--------------------

Meiners, Christian

INTERNATIONAL SEARCH REPORT

International application No
PCT/GB2013/050459

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	TOSHIHIRO OKAMOTO ET AL: "Synthesis and Characterization of Pentacene- and Anthradithiophene-Fluorene Conjugated Copolymers Synthesized by Suzuki Reactions", MACROMOLECULES, vol. 41, no. 19, 14 October 2008 (2008-10-14), pages 6977-6980, XP055064399, ISSN: 0024-9297, DOI: 10.1021/ma800931a abstract scheme 1 -----	4,8, 11-13, 15,16

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/GB2013/050459

Patent document cited in search report	Publication date	Patent family member(s)		Publication date
WO 2010136112	A1 02-12-2010	CN 102449022 A EP 2435496 A1 JP 2012528210 A KR 20120036898 A TW 201105702 A US 2012068121 A1 WO 2010136112 A1		09-05-2012 04-04-2012 12-11-2012 18-04-2012 16-02-2011 22-03-2012 02-12-2010
WO 2010149261	A1 29-12-2010	DE 102009030848 A1 JP 2012530820 A TW 201127866 A US 2012097938 A1 WO 2010149261 A1		03-02-2011 06-12-2012 16-08-2011 26-04-2012 29-12-2010
WO 2007082584	A1 26-07-2007	CN 101361205 A DE 112006003179 T5 EP 1974401 A1 GB 2449023 A JP 2009524226 A KR 20080096781 A US 2010308304 A1 WO 2007082584 A1		04-02-2009 15-01-2009 01-10-2008 05-11-2008 25-06-2009 03-11-2008 09-12-2010 26-07-2007