

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
21 August 2008 (21.08.2008)

PCT

(10) International Publication Number
WO 2008/100893 A1

(51) International Patent Classification:
H04Q 7/24 (2006.01) **H04B 7/26** (2006.01)
H04Q 9/00 (2006.01)

(21) International Application Number:
PCT/US2008/053664

(22) International Filing Date:
12 February 2008 (12.02.2008)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
11/674,081 12 February 2007 (12.02.2007) US

(71) Applicant (for all designated States except US):
OOMBLE, INC. [US/US]; 240 Lombard Street, #839,
San Francisco, California 94111 (US).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **LIN, Daniel J.**
[US/US]; 240 Lombard Street, #829, San Francisco, Cali-
fornia 94111 (US). **HESS, Christopher K.** [US/US]; 645
Stockton St., #701, San Francisco, California 94108 (US).

(74) Agents: **KIM, Frederick D.** et al.; Patterson & Sheridan,
LLP, 3040 Post Oak Blvd., Suite 1500, Houston, Texas
77056 (US).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA,
CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE,
EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID,
IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC,
LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN,
MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH,
PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV,
SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN,
ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM,
ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),
European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,
FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL,
NO, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG,
CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report
- before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments

(54) Title: METHOD AND SYSTEM FOR A HOSTED MOBILE MANAGEMENT SERVICE ARCHITECTURE

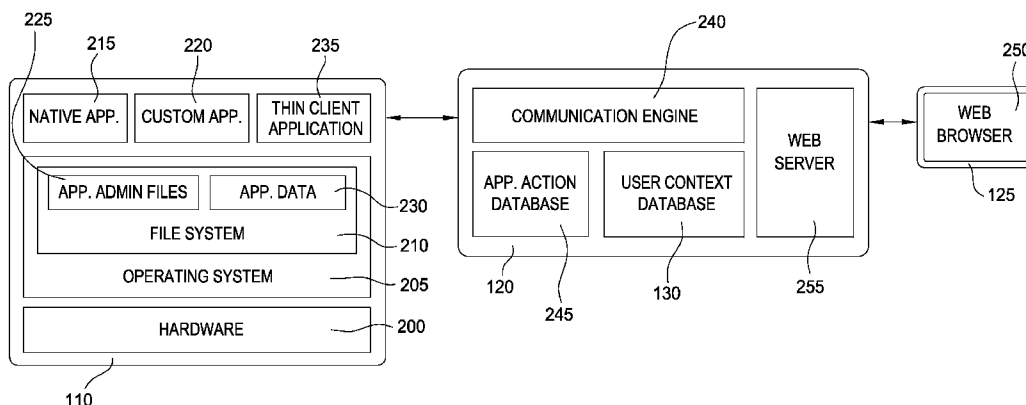


FIG. 2

(57) Abstract: A hosted mobile management service is provided for enabling a user to access a centralized account through a web browser on a terminal in order to manage the user's media information, such as digital music and photos. Any modifications made by user through the web browser are transparently sent to the user's mobile device where a thin client application receives such modification information and interacts with the mobile device's file system to reconcile such modifications.

WO 2008/100893 A1

Method and System for a Hosted Mobile Management Service Architecture

Field of the Invention

[0001] The present invention relates generally to an architecture for a hosted mobile management service and, more specifically, techniques for managing media and other content residing on a mobile device with wireless network capabilities.

Background of the Invention

[0002] Services and systems currently exist to synchronize certain types of personal data between a user's handheld device, such as a personal digital assistant ("PDA") or smart phone. In the mid 1990s, PDAs such as the PalmPilot by Palm Computing emerged to provide users with the ability to store addresses, phone numbers, email addresses, and personal notes in a small portable device. The PalmPilot would be coupled to a user's desktop PC via a cable in order to synchronize such information with a desktop application provided by Palm Computing to manage and modify such information more easily on the desktop. By the late 1990s, content synchronization services such as AvantGo began to appear to provide PDA owners with the capability to receive updated feeds from content providers (e.g., American Airlines, CNET, GM, Rolling Stone, The New York Times, etc.) via the Internet through a synchronization process whereby the PDA owner would connect his PDA, which had an installed PDA application to view content, to his PC, which also had an installed "conduit" application to download content from the content providers' web sites. In 1999, Research In Motion ("RIM") introduced the Blackberry, a wireless email portable device that solved the "two mailbox" problem (having a wireless email mailbox and a corporate email mailbox). A corporation supporting the Blackberry email synchronization system would install a proprietary RIM messaging server to interact with the corporation's own email system. The proprietary RIM messaging server situated at the corporation would interact with RIM's own proprietary remote messaging center server which would then relay corporate emails to the user's wireless provider, which would in turn deliver or push the emails to a user's Blackberry device. As such, emails addressed to a user's corporate email address would transparently appear on the user's Blackberry device in real-time

without the need to manually synchronize in a manner similar to the prior PDA synchronization solutions discussed.

[0003] More recently, services such as Mobical and Yahoo! Mobile have utilized the SyncML open standard protocol promulgated by the Open Mobile Alliance to enable the transfer and synchronization of data between SyncML compliant native applications on the cell phone (e.g., phonebook, address book, contacts, etc.) and a SyncML compliant server over the cellular network (e.g., GPRS, 2.5G, 3G, 3.5G, etc.). Such a SyncML compliant server may also provide an online web environment for the user to view and modify such data. Similar to the prior PDA synchronization solutions (other than the Blackberry email push methods), many SyncML services typically focus on cell phone initiated manual synchronization. The user typically registers for a service by providing the SyncML application residing on the cell phone a username, password, server address and data paths for each native application function to coordinate synchronization. When the cell phone user desires to synchronize between the server and his phone, he navigates to the SyncML application and manually instructs the cell phone to initiate synchronization with the server. The SyncML registration process and the manual synchronization process can prove to be inconvenient and difficult to set up or use given the small size of the keypad (e.g., to type in registration information) and the time needed to navigate through the cell phones various menus. Most recently, Yahoo! Go Mobile introduced the capability to synchronize a user's emails and photos as well as the user's contacts and calendar managed at the Yahoo! Web site portal with the user's cell phone native applications. A Yahoo! mobile application is installed on the user's cell phone and appears as a separate application that can be launched from the cell phone's main menu. When the user launches the Yahoo! application on the cell phone, a Yahoo! submenu is presented to the user to provide access to the user's emails, contacts, calendar and photos. Running transparently in the background, the Yahoo! application on the cell phone polls a Yahoo! server (via the wireless network) to determine whether updates should be pulled from the user's Yahoo! account in the Yahoo! server into the cell phone.

[0004] With the continued convergence of portable devices functionally designed for personal information management ("PIM") such as PDAs with voice and other communication oriented portable devices such as the cell phone (any such wireless

networked portable devices shall hereinafter be referred to herein as a “cell phone”), Mobical and the various Yahoo! services demonstrate that the industry is moving towards a single wireless networked portable device that can be transparently synchronized with a web site where a user’s personal information may be more easily managed due to the availability of a larger screen and navigation tools, such as a keyboard, mouse and sophisticated graphical user interfaces (“GUI”). However, the inconvenience of cell phone initiated manual synchronization techniques currently available through Mobical and Yahoo! continue to inhibit the wider adoption of such hosted mobile management services. Furthermore, use of open standard synchronization protocols such as SyncML require application developers to have knowledge of the synchronization protocol in order to develop specific synchronizing components (or plug-ins) for synchronization protocol compliant applications. For example, SyncML requires local applications to record the changes to data made by the user so that such changes can later be transmitted to remote servers or devices for synchronization. SyncML makes use of a “change log”, a local database that stores changes made by the user within a local application (e.g., adding or removing a contact). When the application data is synchronized with a remote server or device, those changes are sent to the remote server or device and applied to a remote copy of the application data. However, there exist many mobile applications that have been built without consideration of a change log, either to simplify the development effort or because the mobile application developers did not have the intention or forethought of synchronizing data. Many of these applications could benefit from allowing the data they store locally to be synchronized so that the data (1) could be backed-up or stored on a server, and (2) could be managed on a server where the user interface is more convenient and then have those changes synchronized back to the local application.

[0005] While there currently do exist non-SyncML synchronization mobile solutions, such solutions generally either (1) offer their own proprietary user-facing application on the cell phone with a “rich” user interface, or (2) require application developers to develop mobile applications that interface with a proprietary synchronization platform (i.e., through proprietary APIs, etc.). For example, PixSense, a company that enables a user to immediately upload digital photos taken from a user’s cell phone camera to the PixSense website, requires the user to download and install a proprietary PixSense user facing application onto the cell

phone through which the user must interact in order to manage and send photos to the PixSense website. Sharpcast is another recent company that offers a proprietary platform that enables independent software developers to utilize proprietary Sharpcast APIs during the software application development process to provide synchronization related capabilities between mobile devices, desktop applications and web services. What is needed is a synchronization architecture that enables a user to add, remove and otherwise manage content such as multimedia data (e.g., music, photos, video, ringtones, images, etc.) from the web to the phone (as opposed to an architecture that may require manual initiation of synchronization via the cell phone). Such an architecture should not require independent cell phone application developers to understand or write to either proprietary or standard synchronization APIs such that both pre-existing applications such as the native applications on the cell phone and newly developed applications can benefit from the architecture.

Summary of the Invention

[0006] The present invention provides a wireless synchronization architecture wherein synchronization is managed and initiated through actions made by a user through a web site rather than through the cell phone. A thin client non-user facing application is installed on the cell phone and runs in the background to process synchronization requests received from a server wherein such server manages activities made by a user on a web site (such a server, hereinafter, may be generally referred to as the "web site"). As further described in the Detailed Description, the thin client application is able to interact with the cell phone's file system through a minimum set of file system operations or "primitives" (e.g., put a file/folder, get file/folder timestamp, get a file/folder size, add a file, delete a file/folder, replace a file/folder, copy a file, move a file/folder, rename file/folder, etc.). When the thin client application receives a synchronization initiation message from the web site through an "out of band" channel such as the Short Message Service ("SMS"), the thin client application extracts a number of identification numbers from the synchronization initiation message to: (1) track future messages between the cell phone and the web site during the synchronization session and (2) identify the web site initiating the communication. The thin client application then establishes a reliable network connection such as TCP through the cellular network with the web site and receives

data and synchronization instructions from the web site until the synchronization process is completed. Once the synchronization process is completed, a user can thereafter access the appropriate cell phone application benefiting from the synchronization process (e.g., PIM tools, music player, photo album, etc.,) which shall have the most updated content as transferred from the web site.

[0007] More generally, a system is disclosed herein for enabling a user to utilize a web site to manage multimedia data for access by an application on a mobile device, wherein the mobile device supports data packet based communications over a mobile network system. As further described in the Detailed Description, such a system comprises: (1) a web server component configured to record actions taken by the user on the web site to manage the multimedia data, (2) a communications engine component configured to: (i) initiate a network connection with the mobile device, (ii) extract, for each action that relates to the application, a set of file system operation instructions specific to the application, and (iii) transmit each set of file system operation instructions to the mobile device through the network connection; and (3) a mobile software component resident on the mobile device, wherein the software component is configured to: (i) receive file system operation instructions from the communications engine component and (ii) perform file system operations corresponding to the received file system operation instructions on the file system of the mobile device.

[0008] Similarly, a method is disclosed herein for providing a user a web site to manage multimedia data for use by an application on a mobile device. Such a method comprises: (1) recording actions taken by the user on the web site, (2) extracting, for each action relating to the application, a set of file system operation instructions specific to the application, (3) initiating a network connection with the mobile device, and (4) transmitting each set of file system operations instructions to the mobile device through the network connection.

[0009] Unlike existing synchronization protocols such as SyncML, no change log need be maintained on the cell phone, and the server becomes responsible for keeping track of what has changed on the cell phone. In contrast, other synchronization protocols such as SyncML require the cell phone (or other mobile device) to be responsible for keeping track of local changes and transmitting those changes (via a change log) to the server on synchronization. As further detailed

herein, a server in accordance with the present invention can determine what items have been added, removed, etc., on the cell phone either through timestamps or digests comparisons, and can then generate the correct set of commands to apply those changes to the data stored at the server (or additionally on other devices that the user may desire to synchronize). As further described in the Detailed Description, because different cell phones or other mobile devices may store data in different locations and may support applications that may maintain indexes to locate the data used by such applications, device-specific configuration information and management logic may be maintained on the server to support different cell phones or other mobile devices. However, allowing the server to manage the changes taking place on the cell phone alleviates the need to download new code (e.g., to support change log functionality) whenever a new mobile application is to be supported.

Brief Description of the Drawings

[0010] **FIGURE 1** depicts an embodiment of an infrastructure environment in which the present invention may be deployed.

[0011] **FIGURE 2** depicts an embodiment of a component architecture of the mobile device and server in accordance with the present invention.

[0012] **FIGURE 3** depicts an embodiment of web pages served by the web server of the hosted mobile management server to the user's web browser.

[0013] **FIGURE 4** depicts a flow chart detailing the communication protocol among the mobile device, server and user's web browser in accordance with the present invention.

[0014] **FIGURE 5** depicts a list of actions for a picture viewing application and the file system operations that may be associated with such actions.

[0015] **FIGURE 6** depicts a flow chart for enrolling an end user in a hosted mobile management service in accordance with the present invention.

Detailed Description of the Invention

A. Infrastructure Environment

[0016] **Figure 1** depicts one embodiment of an infrastructure environment in which to deploy the present invention. An underlying digital cellular wireless network system **100** in this environment may be a 3.5G network such as HSDPA/UMTS (High Speed Downlink Packet Access/Universal Mobile Telephone System). Other possible digital cellular wireless network systems would include, without limitation, all other forms of 2.5G (e.g., GPRS, EDGE, etc.), 3G (e.g., TD-SCDMA, CDMA2000, etc.), 3.5G and future generations of packet-switched cellular wireless technologies. Because the underlying digital cellular wireless network system **100** supports packet-switching capability, it is able to implement an IP-based network that supports TCP/IP based communications by mobile device **110**. A current commercial example of a mobile device (e.g., smartphone, PDA handheld, etc.) that might be used in accordance with the present invention could be Motorola's SLVR cell phone which supports cellular communication technologies and includes an embedded iTunes digital music player application from Apple Computer. Additionally, the digital cellular wireless network system **100** also supports text messaging services such as SMS (Short Message Service) **140**. The digital cellular wireless network system **100** may also provide the mobile device **110** access to the Internet **115** through its IP-based network capabilities.

[0017] By obtaining an IP address from the underlying digital wireless network system **100**, the mobile device **110** is able to communicate through the digital cellular wireless network system **100** through the Internet **115** and ultimately to a server **120** that hosts a mobile management service in accordance with the present invention. In addition to communicating with the mobile device **110**, such a hosted mobile management server **120** may also serve web pages to an end user using an Internet connected terminal with a web browser such as **125** (e.g., laptop, personal computer, etc.) in order to provide access to the user's personal account on the server **120**. The server **120** may also be coupled to a user content database **130** in order to store user content (e.g., videos, digital photos, music files, games, ringtones, images, PIM information, other media files, etc.) at a centrally accessible location and an SMS gateway **135** in order to send SMS messages to the mobile device **110**. As used hereinafter, the term and reference number "server **120**" may be used generally to

refer to the server side capabilities (as opposed to the client side capabilities) and therefore may include functionality resident in the database **130** and SMS gateway **135** as the context requires.

B. Component Architecture

[0018] Figure **2** depicts a component architecture of the mobile device **110** and the server **120** in accordance with the present invention. In a typical mobile device **110**, on top of the hardware layer **200** lies an operating system layer **205** that contains a file system sub-layer **210**. Applications residing on the mobile device **110** whether native applications **215** or custom applications **220** that are subsequently downloaded onto the mobile device **110** interact with the file system **210** by storing application specific administration files **225** such as index files to keep track of user configurations, default settings, data organization, etc. and application specific data files **230** such as songs and photos. The present invention envisions a thin client application **235** that is installed onto the mobile device **110** in order to execute instructions received from the server **120**. The thin client application **235** interacts with the mobile device **110** at the file system layer **210** by adding to, removing from, or otherwise modifying the contents of the application specific administration files **225** and the application specific data files **230**. Upon the thin client application's completion of instructions received from server **120**, launching of the native applications **215** and custom applications **220** will benefit from the modifications made by the thin client application **235** to the underlying administration files **225** and data files **230** for such applications (e.g., view new photos added to the application specific data files **230** for the native photo viewer application, listen to a new song added to an existing playlist described in the index file that is an administration file **225** for the native music player application, etc.).

[0019] In one embodiment, the thin client application **235** continuously runs in the background and listens for SMS messages sent from the server **120** to the mobile device **110** through the SMS gateway **135**. In alternative embodiments, the thin client application **235** may register itself to receive notification from the underlying mobile device operating system **205** that SMS messages intended for it have arrived (e.g., sometimes referred to as the "push registry" of the mobile device operating system). When such SMS messages arrive, the operating system **205** then launches the thin

client application **235** to consume the SMS message. As previously discussed, the thin client application **235** may primarily be a passive application that interacts with the file system **210** of the mobile device **110** only after receiving specific instructions from the server **120**. In particular, a communications engine component **240** of the server **120** may transmit such instructions to the thin client application **235** in response to actions (e.g., moving new photos into a mobile photo library, deleting a song from a mobile playlist, etc.) taken by the user to manage his data through the server's **120** web site that is hosted by the web server **255** and accessed through web pages served to the user's web browser **250**. In order to determine the file system operations to be performed by the thin client application **235** that correspond to the user's data management actions on the web site, the communications engine **240** may query an application actions database **245**. For each mobile application supported by the server **120**, the application actions database **245** may maintain an ordered list of file system operation instructions (e.g., put a file/folder, get file/folder timestamp, get a file/folder size, add a file, delete a file/folder, replace a file/folder, copy a file, move a file/folder, rename file/folder, etc.) for each action (e.g., add a photo, remove a photo, add a photo to an album, add an album, etc.) that may be performed by such mobile application (or proxied by actions made by the user on the server's web site).

[0020] As an example of the foregoing discussion, in order to remove a song from a mobile playlist, the user may use the server's web site to drag and drop the song from the mobile playlist into a "trash" icon. Such an action by the user triggers the web browser **250** to communicate the action to the web server **255** which, in turn, communicates the action to the communications engine **240**. The communications engine **240** may then query the application actions database **245** to determine the type, order and number of file system operations needed to remove the song from the actual mobile playlist residing on the mobile device **110**. The application actions database **245** may respond to the communications engine **240** with the following file system operation instructions: (1) obtain the index file used by the music playing application (i.e., an administration file **225** for the music player application), and (2) rewrite a modified index file (as modified by the communications engine **250** after parsing the received index file from the thin client application **235** and making the appropriate changes to it) to the file system **210** with the song removed from the playlist. In turn, the communications engine **240** may then transmit the instructions to

the thin client application **235** to carry out such file system operations on the mobile phone **110**.

[0021] Similarly, other data management actions taken by the user through the web browser **250** may require additional user content residing in the user content database **130** to be transmitted to the mobile device **110**. In particular, user content database **130** may provide users central storage space for their multimedia data such as videos, songs, digital photos, wallpaper images, ringtones, etc. User content database **130** may also store user account information for the server **120** such as the user's mobile phone number, the make and model of the mobile device **110** and the types of applications (native and/or custom) on the mobile device **110**. The web pages served by web server **255** to web browser **250** may then be used as an interface for the user to easily manage and keep track of such multimedia data and move such multimedia data on and off the mobile device **110** in a single aggregate web session. Multimedia data can be added and stored in the user content database **130**, for example, by uploading content that resides on the user's laptop **125** or personal computer (e.g., digital photos taken by the user's digital camera, e-commerce purchases of multimedia data conducted through services other than web server **255**, etc.), by transferring content purchased by the user through e-commerce capabilities offered directly through the server's web site and then added directly to the user content database **130**, or by uploading content generated by or purchased through the mobile device **110** and transferred to the server **120** (e.g., a digital photo taken by the digital camera of the mobile device **110**). The user may, for example, drag and drop a digital photo stored in user content database **130** into his mobile photo library in order to add the digital photo to his mobile device **110**. As previously described, such an action is relayed to the web server **255** and then to the communications engine **240**, which then extracts the desired digital photo from the user content database **130** and queries the application actions database **245** for the proper file system operation instructions to add the desired digital photo to the mobile device **110** in a manner accessible by the picture viewing application on the mobile device **110** (whether a native application **215** or custom application **220**). Once the communications engine **240** receives the list of file system operation instructions from the application actions database **245**, it instructs the thin client application **235** to execute such operations on the file system **210** of the mobile device **110**.

[0022] Those with ordinary skill in the art will recognize that the logical components set forth in **Figure 2** are merely exemplary and that other components and configurations that provide substantially similar functionality to that of the logical components in **Figure 2** can be used consistent with the spirit and scope of the invention. For example, while communications engine **240** is set logically apart from the web server **255** in **Figure 2**, those with ordinary skill in the art will recognize that such separation is for logical discussion purposes only and that actual code implementations of the foregoing may not necessarily utilize such logical distinctions. In one exemplary configuration, web server **255** components containing the web server functionality described herein, the communications engine **240** and other capabilities described in the foregoing may be implemented as Java servlets that interact with a web server supporting servlet technology such as Apache Tomcat. Similarly, while the application actions database **245** and the user content database **130** are described as separate logical databases, those with ordinary skill in the art will also recognize that such databases may utilize the same underlying database platform or technology (e.g., MySQL, etc.) or may be implemented programmatically through data that is statically embedded in various source code files.

C. User Interface

[0023] Figure **3** depicts one embodiment of certain web pages that may be served by the web server **255** of the hosted mobile management server **120** to the web browser **250** to provide the user the ability to view the data residing on both the server **120** and on the mobile device **110**. For example, the web browser view **300** depicts a user interface for music. Main panel **305** provides a view of all the songs that the user has stored in the user content database **130**. Correspondingly, the “Main Music Library” selection of the navigational panel **315** has been highlighted. Below the “Main Music Library” selection is a “Mobile Music Library” **320** selection which, if selected, would modify the contents of main panel **305** such that only those songs that also are stored in the mobile device **110** (as application data **230**) are displayed. As shown in **Figure 3**, such songs are also indicated by the mobile indicator column **325**. To manage his songs, the user may easily drag and drop songs displayed in main panel **305** into libraries, playlists or the trash icon as set forth in navigational panel **315**. As previously described, such actions taken by the user on web browser

view **300** may trigger actions that are communicated by communications engine **240** to the mobile device **110**.

[0024] Web browser view **330** similarly depicts a user interface for photos. Because the "Main Photo Library" selection **335** is highlighted in the navigational panel **340**, the main panel **345** depicts thumbnails of all the photos store on the server **120** for the user. Main panel **345** also displays below each thumbnail a mobile indicator **350** to display which photos are also stored on the mobile device **110**. Similar to the web browser view for music **300**, the user may easily drag and drop photo from the main panel **345** into the secondary panel **355** (or vice versa) or navigational panel **340** to manage the photos on the server **120** and mobile device **110**.

[0025] In one embodiment, changes to data made by the user through the web browser **250** are captured and tracked in the aggregate by the web server **255** until the user completes his session, whereby the communications engine **240** communicates with the thin client application **235** to propagate the relevant changes to the mobile device **110**. In alternative embodiments, each separate change made by the user in real time may trigger a separate communication between the communications engine **240** and the thin client application **235** to propagate the change to the mobile device **110**.

[0026] Those with ordinary skill in the art will recognize that **Figure 3** is merely exemplary of numerous ways to display user data stored on the server **120** and mobile device **110** that remain consistent with the spirit and scope of the present invention. For example, while **Figure 3** only depicts user interfaces for music and photos, those with ordinary skill in the art will recognize that other types of user data can be similarly stored, managed and viewed including videos, ringtones, images, games, wallpaper and PIM data. In addition to a variety of other types of user data that can be managed and displayed to the user through the server's web site, other types of user interface designs may also be envisioned that would be consistent with the scope of the present invention. For example, rather than utilizing web views such as **300** and **330** that are similar to standard email user interfaces (such as Outlook, Yahoo! Mail, etc.), a user interface that simulates the make and model of the user's mobile device may also be used. In such an interface, by dragging and dropping available user data such as wallpaper and ringtones into the mobile device simulator,

the user may be able to immediately view and hear his modifications on the displayed mobile device simulator prior to synchronizing with the actual mobile device **110**. Furthermore, the server's **120** web site may also integrate functionality and/or interact with other online service providers such as online music stores and photo sharing sites to enable sharing of user data and the purchase of new user data that is immediately stored in user content database **130**.

D. Communication Protocol

[0027] Figure 4 depicts a communication protocol among mobile device **110**, server **120**, and the user during a data management session conducted by the user through the server's **120** web site. Initially, the user logs into his user account on the server's **120** web site through the web browser **250** (step **400**). Due to the user's prior enrollment or registration with the server **120**, the server **120**, by accessing the user's account data in user content database **130**, may have knowledge of the user's mobile phone number, the make and model of the mobile device **110** and the types of applications (native and/or custom) on the mobile device **110**. Through the information stored in the application actions database **245**, server **120** may also have knowledge of the file system operations used by such applications to interact with the file system **210** (e.g., where administration files and data files are located in the file system **210** and what format they take, etc.). For example, certain picture viewing applications on certain mobile devices may utilize an index file to keep track of the photos accessible by the application while other picture viewing applications may simply use the folder structure of the file system itself **210** to keep track of the photos. Upon the user's login, web server **225** instructs the communications engine **240** to initiate communication with the mobile device **110** (step **405**). In one embodiment, such initiation occurs by transmitting an SMS message via the SMS gateway **135** to an SMS port number on which the thin client application **235** is listening. The SMS message may include the IP address of the server **120** and a session identifier (e.g., session number) used by the server **120** to keep track of the particular communication session between it and the thin client application **235**. As previously discussed, depending upon the embodiment, for example, upon receiving the SMS message, the thin client application **235** may either be launched by the mobile device's **110** push registry or may directly receive the SMS message as a continually running background application that listens for messages on the specified SMS port. The thin

client application **235** may then extract the IP address of the server **120** from the SMS message and establish a TCP connection with the server **120** by connecting to the IP address and identifying itself through the session identifier (step **410**). Those with ordinary skill in the art will recognize that other types of network communication protocols other than TCP may be used without departing from the spirit of the invention including HTTP and other IP based network protocols. Similarly, out of band channels other than SMS may be utilized in step **405**.

[0028] Once a network connection is established between the thin client application **235** and the server **120**, the communications engine **240** identifies the various supported applications on the user's mobile device **110** by querying the user content database **130**. The communications engine **240** may then extract various file system operation instructions from the application actions database **120** for such applications and may then direct the thin client application **235** to perform such file system operations to assess whether file system folders and/or files used by the various supported applications on the mobile device **110** have been modified since the user's last login to the server **120** (e.g., the user may have taken and saved a new photo through the mobile device's own camera or may have deleted a song from a mobile playlist using the mobile device's keypad) (step **415**). For example, for a particular picture viewer for a particular mobile device, the communications engine **240** may request that the thin client application **235** transmit the timestamp of the file system folder (i.e., a file system operation) that stores the photos accessed by the picture viewer of the mobile device **110**. If the timestamp of the folder differs from the date known by the server **120** as the last date upon which the contents of the folder were modified, then the server **120** may recognize that the user may have made modifications to the folder subsequent to the user's last login with the server **120**. In such instance, the communications engine **240** may additionally request the thin client application **235** to transmit a directory listing of the folder in order to assess what new photos were added (and subsequently download such new photos to the server **120** for storage in the user content database **130**) or old photos removed. In similar fashion, if a music application uses an index file to internally manage which music files are used by the application and their locations, the communications engine **240** may request that the thin client application **235** transmit the timestamp for the index file used by the mobile device's **110** music player for keeping track of the songs and playlists on the mobile device **110** to assess whether modifications had been made

since the user's last login to the server **120** (and take subsequent reconciliatory steps in view of such assessment). Once the mobile device **110** has completed executing the file system operations and communicated the appropriate results back to the communications engine **240** (step **420**), the communications engine **240** is able to modify the user content database **130** with any updates as communicated by the mobile device **110** (step **425**). The web server **255** is then able to serve web pages to the user's web browser **250** that reflect an up-to-date view of what data is on the server as well as what data is on the mobile phone **110** as depicted in **Figure 3** (steps **430** and **435**).

[0029] While the user makes various modifications to the data through the web browser **250**, for example, as previously discussed in conjunction with **Figure 3** (step **440**), the web server **255** tracks which corresponding mobile applications need updates and records the number and type of actions (e.g., add photo, add song, remove song from playlist, add a photo to an album, remove a song, remove a photos, etc.) needed to be performed on the mobile device **110** for such applications (step **445**). Once the user has completed his session on the web browser **250**, by referencing the application actions database **245**, the communications engine **240** generates an aggregate list of file system operation instructions needed for each action made by the user during the web session (step **450**). Depending upon the particular embodiment, the TCP connection established during the initial login process may be retained during the entire session or communications engine **240** may send another SMS message (with the IP address and a session identifier number as similarly used during the login process) to the thin client application **235** in order to establish another TCP connection (steps **455** to **460**). Once the TCP connection is established, the communications engine **240** may transmit to the thin client application **235** the file system operation instructions to be performed by the thin client application **235** on the mobile device's file system **210** in order to reflect the changes made by the user to the web browser **250** (step **465** to **470**).

[0030] **Figure 5** illustrates an example of possible actions that can be made to a photo viewing application and the file system operations that need to be performed on the file system **210** of the mobile devices for such actions to take place. As shown in **Figure 5**, the interaction of mobile applications with the mobile file system **210** may differ even if the action taken by the user on the web browser is the same, depending

upon the application and the make and model of the mobile device. As shown in **500**, there may be a number of actions that can be made by a user through a picture viewing application, such as adding a photo, removing a photo, adding a photo to an album, etc. A user may choose, for example, to add a photo stored in the user content database **130** to the mobile device **110** which corresponds to action **505** in **Figure 5**. If the mobile device **110** is of a particular make and model “A” and utilizes a particular picture viewer application “A”, adding a photo may simply require the communications engine **240** to transmit the photo to the thin client application **235** in order to perform one file system operation, namely, putting the photo file in the appropriate folder (see **510**). In contrast, if the mobile device **110** is of a particular make and model “B” and utilizes a particular picture viewer application “B” (which utilizes an additional index file to keep track of photos on the mobile device), adding a photo may require the communications engine **240** to instruct the thin client application **235** to perform multiple file system operations as depicted in **515**. Determination of which file system operations need to be performed for actions relating to a particular application on a particular mobile device may be done through reverse engineering techniques or in cooperation with the application provider or developer. For example, the developer of picture viewer application “B” for mobile device B in **Figure 5** may provide the server **120** a “plugin” that provides lists of the file system operations needed to be performed on the file system **210** of mobile device “B” for each of the actions listed in **500**, including list **510**. The content of such plugins may ultimately be stored in application actions database **245** for future access by the communications engine **240**.

E. Enrollment Process

[0031] Prior to using the hosted mobile management services offered by server **120**, a user possessing mobile device **110** may need to enroll with the server **120** through the server’s web site. In one embodiment, enrollment may take place at the user’s personal computer **125** that also locally stores user’s pre-existing digital music library and photos. As depicted in **Figure 6**, at step **600**, web server **255** requests registration information from the user including, for example, a username, password, mobile phone number, make and model of the mobile device **110**, carrier service provider, any custom applications installed on the mobile device **110**, etc. At step **605**, the web server **255** then creates a user account for the user based upon such

registration information. The registration information may enable server **120** to determine what native and custom applications (**215** and **220**) are utilized on the mobile device **110**, and therefore, at step **610**, determine the appropriate lists of file system operation instructions stored in application actions database **245** to associate with the newly created user account. At step **615**, the user may upload his user data such as his pre-existing digital music library (or portions thereof) and/or digital photos (or portions thereof) stored on his personal computer **125** to the server **120** and, at step **620**, the server **120** stores the user's uploaded data in the user content database **130**, associating such user data with the newly created account. Those with ordinary skill in the art will recognize that any index files, playlist files, album files, preference files, online music store and online photo site usernames and passwords and other music or photo management files relating to the pre-existing digital music library and photo library on the user's personal computer **125** may also be uploaded (and translated, to the extent such files are in proprietary formats of third party media applications such as iTunes) to the server **120** and/or the database **130**. Similarly, those with ordinary skill in the art will recognize that other techniques of updating or accessing such user data may include accessing other web sites such as photo sharing or storing sites where the user's photos and other data may be centrally stored. At step **625**, mobile device **110** may download and install the thin client application **235** from the server **125**. Those with ordinary skill in the art will recognize that alternative methods of downloading the mobile device software module **500** may be utilized. For example, known methods using direct over-the-air ("OTA") download techniques may be utilized to download and install the thin client application **235** to the mobile device **110**. In one such OTA technique, the server **125** may utilize the SMS gateway **135** to send to the mobile phone number of the mobile device **110** (as received in step **600**) an SMS message containing a URL (Universal Resource Locator) to the file containing the thin client application **235** or to a web page containing a link to such a downloadable file. Once such an SMS message is received by the mobile device **110**, the user may utilize the information in the SMS message to download (e.g., copy the URL address into the mobile device's **110** web browser in order to fetch the thin client application installation file) the thin client application **235**. Alternatively, the web server **255** may simply provide such URL or other address information directly to the user through the web browser **250** and instruct the user to manually download the thin client application onto the mobile

device **110** by manually entering the URL (or other address) into the web browser of the mobile device **110**. In yet another scenario, the server **120** may request that the user couple the mobile device **110** to the personal computer **125**, for example, through a USB connection, Bluetooth connection, WiFi connection or any other connection available between a mobile device **110** and the personal computer **125** known to those with ordinary skill in the art such that the thin client application may be downloaded to the personal computer **125** and subsequently transferred to the mobile device **110** through such connection. Once the thin client application **235** is downloaded and installed onto the mobile device **110**, if the mobile device **110** contains a pre-existing user data, the communications engine **240** may communicate with the thin client application **235** to obtain such data and reconcile it with the data obtained through step **615** (step **630**). The steps in such communication would be similar to steps **405** to **430** in **Figure 4**. Once the end user has completed the enrollment process with the hosted mobile management service, he will subsequently be able to log into the server **120** from any online terminal and manage his user data on the mobile device **110** through the server's **120** web site.

F. Personal Computer Software Module

[0032] In one embodiment of the present invention, during the enrollment process as described in **Figure 6**, the server **120** may also transmit for installation a software module to the user's personal computer **125** in order to monitor actions taken by the user through desktop applications or other web sites. Such a downloaded software module may assist the user to maintain consistency between user data stored on personal computer **125** and on server **120**. For example, the user may utilize a desktop music management tool such as iTunes on his personal computer **125** to modify the contents and organization of his locally stored music library (e.g., add a song, delete a song, purchase a song, modify a playlist, add a song to a playlist, remove a song from a playlist, etc.). In such instances, the downloaded software module may recognize such modifications, for example, by recognizing an updated timestamp made to the iTunes index file and may initiate a TCP connection with the server **120** to communicate such modifications to the server **120**. For example, if the user purchased a new song through iTunes, the downloaded software module may transmit the newly purchased song to the server **120** for storage in the user content database **130**. Similarly, if the user downloads to his personal computer **125** a set of

digital photos from a third party photo sharing web site or from a received email attachment, the downloaded software module may recognize the addition of such new photos to the user's local photo storage folder and propagate such photos to the user content database **130** on the server **120**. Those with ordinary skill in the art will recognize that different embodiments of the downloaded software module may also respond to communications initiated by the server **120** in order to propagate changes to the user content database **130** made by end user through the web browser **250** to the user's local data store. For example, the server **120** may transmit playcount, purchased music, and playlist modifications to the downloaded software module in order to update the library, playlist and playcounts of the user's local iTunes desktop application.

G. Alternative Embodiments

[0033] While the present invention has been primarily described with music and photos as the main media that are managed by the mobile management service hosted by server **120**, those of ordinary skill in the art will recognize that alternative media and embodiments may be implemented without departing from the spirit and scope of the claimed invention. As previously discussed, other forms of mobile media and data such as video, ringtones, images, wallpaper, mobile games, email, and PIM information may also be managed through a web-enabled server in accordance with the techniques described herein. Although the present invention has been described with reference to alternative embodiments, those of ordinary skill in the art will recognize that changes may be made in form and detail without departing from the spirit and scope of this disclosure. For example, rather than being a primarily passive application that interacts with the file system **210** only upon instructions received from the communication engine **240**, an embodiment of the thin client application **235** may be configured to also initiate communications with the communication engine **240** upon actions initiated by the user on the mobile device **110**. For example, purchase of content such as songs through the mobile device **110** (e.g., mobile device's web browser) may cause the thin client application **235** to immediately transmit a copy of the purchased song to the server **120** for update (i.e., rather than waiting for a server initiated login process as detailed in **Figure 4** to recognize and reconcile such additions). Similarly, any changes made by the end user on the mobile device **110** to any of the playlists on the mobile device can also be communicated to the hosted

mobile management service **130** in a similar fashion. Similarly, as described in some of the further alternative embodiments below, a thin client application **235** may offer more functionality (e.g., launching applications, installing games, ringtones and wallpaper, remotely controlling applications, etc.) than interacting through file system operations. Such thin client applications may be more tightly integrated with the operating system **205** of the mobile device and/or the mobile applications on the mobile device (e.g., through APIs provided by the mobile applications, etc.).

[0034] In one alternative embodiment, mobile devices that are not focused on communication, such as digital cameras and portable music players, may be enabled with SMS and IP-based cellular networking capabilities. The thin client application **235** may be installed on such mobile devices such that content may be added to or removed from such mobile devices through the server **120** in a convenient fashion. For example, photos taken by a digital camera may be easily transmitted to the user's account at the server **120** or songs purchased online may be easily transmitted to the portable music player through the server **120**. Similarly, cellular network enabled automobiles may also install the thin client application **235** such that songs may be added or removed from a media store accessible by the stereo of the automobile.

[0035] In another embodiment, the server **120** may facilitate the sharing of content on mobile devices among friends. In such an embodiment, an owner of a mobile device may, through enhanced functionalities provided by the web site of the server **120**, allocate a certain amount of memory on the mobile device to be controlled and accessed by his friends. Such friends would have the freedom and capability to add content to their allocated memory space on the owner's mobile device by utilizing the capabilities of the server **120** and thin client application **235** at their convenience. The owner would access and view such content, in turn, at his own convenience. For example, a friend may desire to purchase a song as a gift for the owner of the mobile device through the web site of the server **120**. Once the friend successfully purchases the song, server **120** may store the song in user content database **130** under the account of the owner of the mobile device. The communications engine **240** may then initiate a communication session with the thin client application **235** similar to steps **455** through **470** of **Figure 4** to transmit the song to the owner's mobile device. The song may be stored in a memory space of the mobile device that has been specifically allocated by the owner to the friend. The owner may then be

able to claim the song, for example, by logging into the web server **255** and accepting the gift, whereby the thin client application **235** then moves the song from the friend's memory space to the correct folder utilized by the mobile device's music player application (or otherwise modifies the index file of the mobile device's music player application to recognize the location on the file system of the added song). Those with ordinary skill in the art will recognize a variety of different functionalities and business models consistent with the spirit of the foregoing sharing embodiment. For example, the owner of the mobile device may also allocate memory space on the mobile device for specific advertisers to add content to the mobile phone. The advertiser may add and remove packages of content (e.g., ringtones, images, wallpaper, songs, videos, etc.) at its convenience to its allocated memory space through the thin client application **235** which the owner of the mobile device may view or consume at his own convenience. From a business model perspective, the advertiser may pay the owner of the mobile device for the right to use "lease" space on the owner's mobile phone and so long as the advertiser sees that the owner continues to view or consume the content provided by the advertiser to the owner's mobile device, the advertiser may find it worthwhile to continue leasing such space and adding new content.

[0036] Another embodiment may offer the capability to control the real-time playing of music on the mobile device by redirecting music playing commands from the web browser **250** through the web server **255** and to the mobile device **110**. Such an embodiment may be utilized in an environment where the mobile device **110** may be coupled to external speakers in order to play the music residing in the mobile device to a larger audience. The thin client application **235** in such an embodiment may have the capability to launch the music player application on the mobile device **110** pursuant to instructions transmitted to it by the communications engine **240**. The user is then able to control the mobile music player through the web browser **250** by propagating playing directions (e.g., play, next track, previous track, fast forward, rewind, etc.) to the thin client application **235**.

[0037] Those of ordinary skill in the art will additionally recognize that the control logic and data stored and used by the various software components as described in the foregoing specification are merely illustrative and may be redistributed various other software components and databases in alternative but functionally equivalent

designs, including the removal of certain software components and/or databases, without departing from the scope or spirit of the described embodiments. For example and without limitation, the present invention has been described using TCP/IP based connections, but those of ordinary skill in the art will recognize that other packet based protocols, either on layered on top of TCP/IP, such HTTP, or as an alternative to TCP/IP may also be used to establish data transfer sessions. Terminology used in the foregoing description is for the purpose of describing the particular versions or embodiments only, and is not intended to limit the scope of the present invention which will be limited only by the appended claims. As used herein and in the appended claims, the singular forms “a,” “an,” and “the” include plural references unless the context clearly dictates otherwise. Similarly, the words “for example”, “such as”, “include,” “includes” and “including” when used herein shall be deemed in each case to be followed by the words “without limitation.” Unless defined otherwise herein, all technical and scientific terms used herein have the same meanings as commonly understood by one of ordinary skill in the art. All publications mentioned herein are incorporated by reference. Nothing herein is to be construed as an admission that the embodiments disclosed herein are not entitled to antedate such disclosure by virtue of prior invention. Thus, various modifications, additions and substitutions and the like can be made without departing from the spirit of the invention and these are therefore considered to be within the scope of the invention as defined in the following claims.

What is claimed is:

1. A system for enabling a user to utilize a web site to manage multimedia data for access by an application on a mobile device, wherein the mobile device supports data packet based communications over a mobile network system, the system comprising:

a web server component configured to record actions taken by the user on the web site to manage the multimedia data;

a communications engine component configured to: (i) initiate a network connection with the mobile device, (ii) extract, for each action that relates to the application, a set of file system operation instructions specific to the application, and (iii) transmit each set of file system operation instructions to the mobile device through the network connection; and

a mobile software component resident on the mobile device, wherein the software component is configured to: (i) receive file system operation instructions from the communications engine component and (ii) perform file system operations corresponding to the received file system operation instructions on the file system of the mobile device.

2. The system of claim 1 further comprising an actions database coupled to the communications engine component for storing sets of file system operation instructions relating to the actions taken by the user on the web site.

3. The system of claim 2 wherein certain of the actions taken by the user relate to at least one different application on the mobile device.

4. The system of claim 3 wherein certain of the sets of file system operation instructions stored on the actions database are specific to the at least one different application on the mobile device.

5. The system of claim 2 wherein the communications engine component is configured to query the actions database in order to extract, for each action that relates to the application, a set of file system operation instructions specific to the application.

6. The system of claim 2 further comprising a content database coupled to the communications engine component for storing at least a portion of the multimedia data.
7. The system of claim 6 wherein at least one file system operation instruction stored in the actions database relates to copying multimedia data stored in the content database to the mobile device.
8. The system of claim 1 wherein each file system operation instruction received by the mobile software component corresponds to one file system operation performed by the mobile software component.
9. The system of claim 1 wherein the mobile software component is further configured to run in the background.
10. The system of claim 1 wherein the communications engine component is configured to transmit an SMS message to the mobile device, wherein the SMS message comprises an IP address of the communications engine component, in order to initiate the network connection with the mobile device.
11. The system of claim 10 wherein the mobile software component is further configured to: (i) extract the IP address the SMS message and (ii) establish the network connection as a TCP connection with the communications engine component through the IP address.
12. The system of claim 10 wherein the mobile software component is launched upon receipt by the mobile device of the SMS message by a push registry of the mobile device.
13. The system of claim 1 wherein the mobile network system is a cellular network system.
14. The system of claim 1 wherein the web server component is a Java servlet.

15. The system of claim 1 wherein the multimedia data is selected from the group consisting of songs, videos, photos, images, ringtones, mobile games and personal contact information.

16. A method for providing a user a web site to manage multimedia data for use by an application on a mobile device, the method comprising:

recording actions taken by the user on the web site;

extracting, for each action relating to the application, a set of file system operation instructions specific to the application.

initiating a network connection with the mobile device; and

transmitting each set of file system operations instructions to the mobile device through the network connection.

17. The method of claim 16 wherein the step of extracting, for each action relating to the application, a set of file system operation instructions specific to the application occurs by querying an actions database for storing sets of file system operation instructions relating to the actions taken by the user on the web site.

18. The method of claim 17 wherein querying the actions database includes submitting, for each action, identifying information relating to such action, the mobile device and the application.

19. The method of claim 16 further comprising the step of extracting a multimedia file from a contents database for storing at least a portion of the multimedia data and including the multimedia file in at least one of the file system operation instructions in at least one of the sets.

20. The method of claim 16 wherein the step of initiating a network connection with the mobile device occurs by transmitting an SMS message to the mobile device, wherein the SMS message comprises an IP address.

21. The method of claim 16 further comprising the steps of (i) extracting, for each action relating to at least one different application, a set of file system operation instructions specific to the at least one different application, and (ii) transmitting each set of file system operations instructions specific to the at least one different application to the mobile device through the network connection.

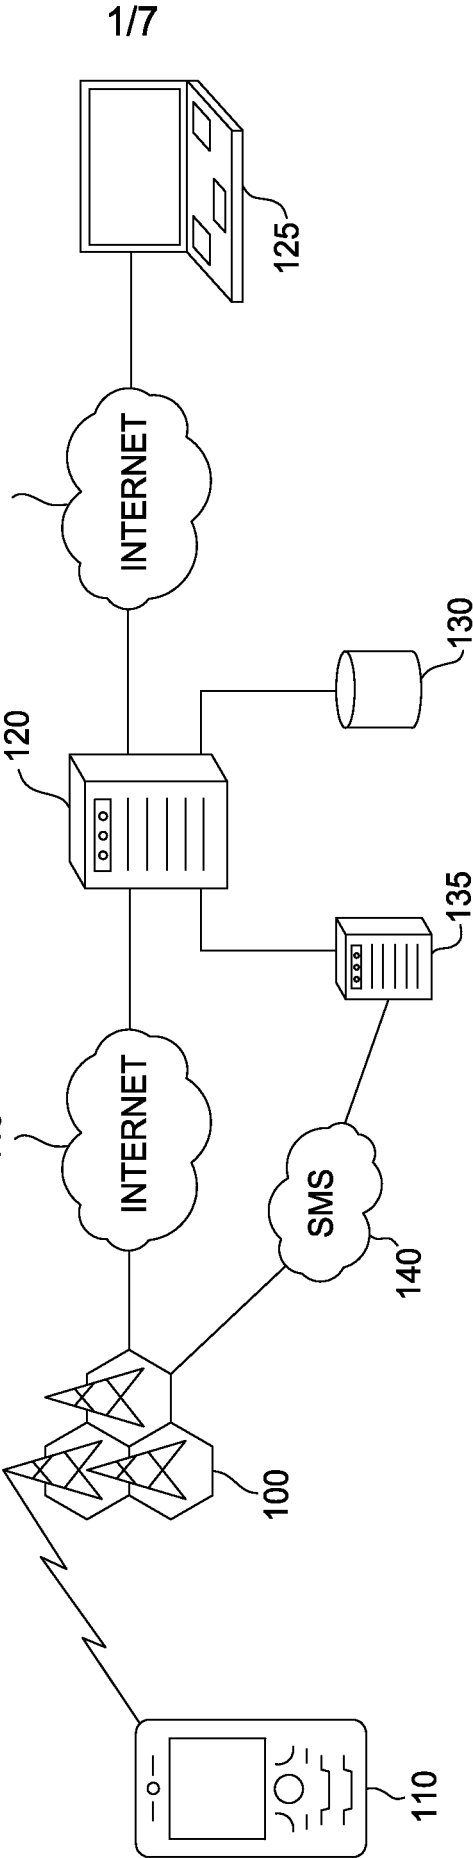


FIG. 1

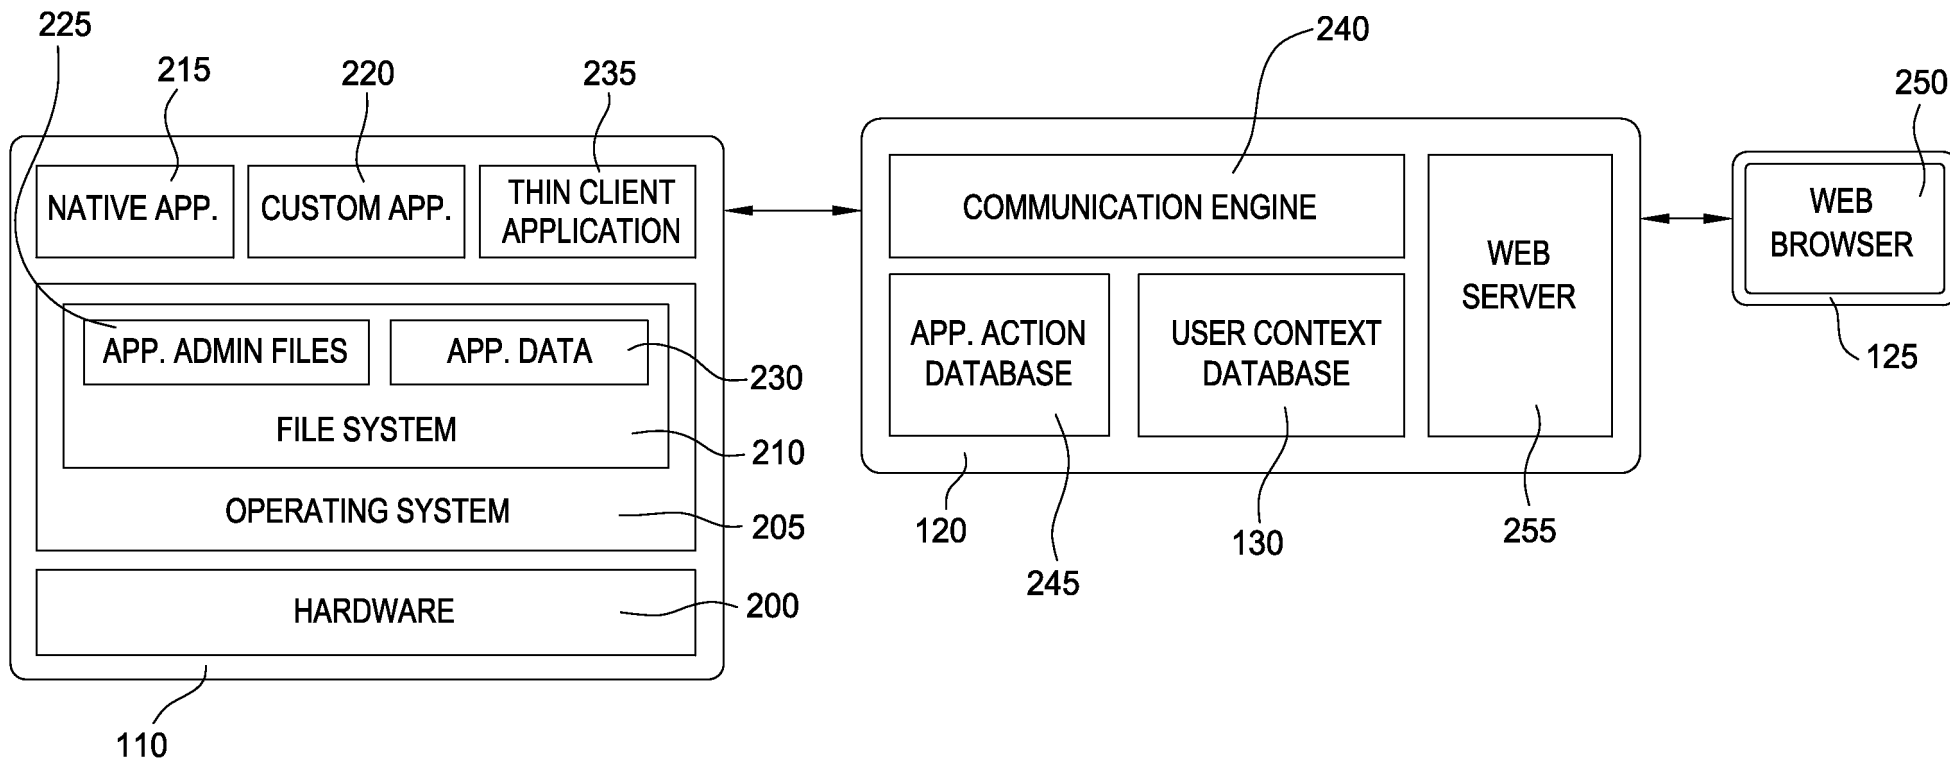


FIG. 2

FIG. 3A

WO 2008/100893

PCT/US2008/053664

Welcome To Oomble-Microsoft Internet Explorer
File Edit View Favorites Tools Help
Back Forward Stop Home Search Favorites History
Address
Google G Go
Bookmarks 52Blocked Check Autolink Send to
Roboform Search Logins (passwords) Set Up Form Save General

Welcome, Dan Lin
Log out | My Account

Mobile Phone No. (660) 996-1050
Sync To Mobile

Main Music Library (20)
Mobile Music Library (16)
Trash (20)
My Playlists
Jazzplay (5)
Classicplay (9)
Rockplay (8)
My Mobile Playlists
Mobile Jazzplay (5)
Mobile Classicplay (6)
Mobile Rockplay (5)

add
add

OombleMusic
Oomble Item

New	Delete	Back	Forward	20 Songs	Mode
Name		Time	Artist	Album	
Your Smiling Face		2:46	James Taylor	James Taylor's Greatest Hits	✓
Everyday		2:13	James Taylor	That's Why I'm Here	✓
Walking Man		4:34	James Taylor	Live (disc 2)	✓
Riding on a Railroad		2:32	James Taylor	Live (disc 2)	✓
Something in the way She Moves		3:59	James Taylor	Live (disc 2)	✓
Sun on the Moon		3:54	James Taylor	Live (disc 2)	✓
All Through the Night		3:18	Ella Fitzgerald	The Cole Porter Songbook	✓
Fly Me to the Moon		2:31	Frank Sinatra	The Very Good Years	✓
Alice in Wonderland		8:42	Bill Evans	Sunday at the Village	✓
Pamala Naga Pampa		6:40	Dave Mathews Band	Crowded Streets	✓
Magnificent One		4:54	Ancient Academy	Gloria Vivaldi	✓
Soul Man		3:43	Blues Brothers	Live; Its Saturday Night	✓
Nobody Knows When Down		3:49	Eric Clapton	Unplugged	✓
I Feel Good		2:55	James Brown	God-Father of Soul	✓
Caught in a Trap		2:37	Elvis Presley	Live In Las Vegas	✓

Ella Fitzgerald
The Cole Porter Songbook
All Through the Night
The Cole Porter Songbook
Ella Fitzgerald
1956

All Through the Night
File Size: 3181882
File Kind: A.A. Gelco
B.L. Rate 128
Sample Rate 44100

MOTOROLA SLVR
Na,gi Wfgmjr
Hritndu Rkig
Ljent Djrnyg
\$ 199.99

☒ Discussions
☐ Done

☐ Discussions not available
☐ Local intranet

300

325

305


317

310

320

315

FIG. 3B

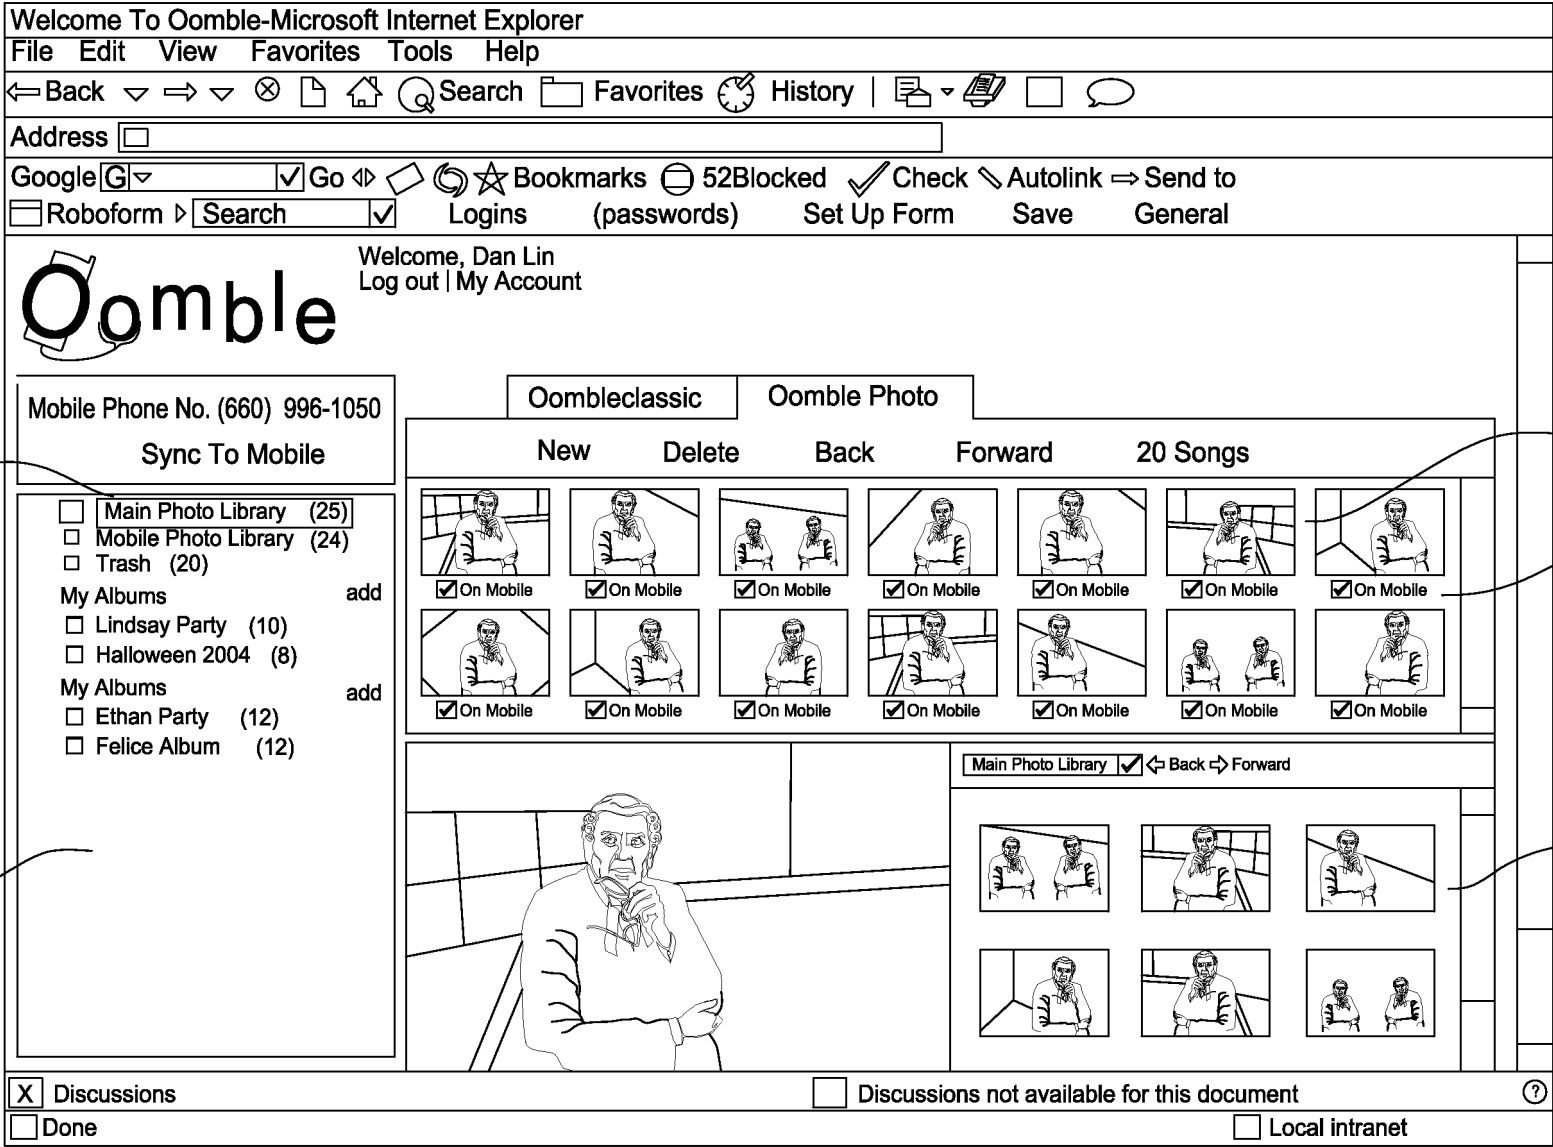

SUBSTITUTE SHEET (RULE 26)

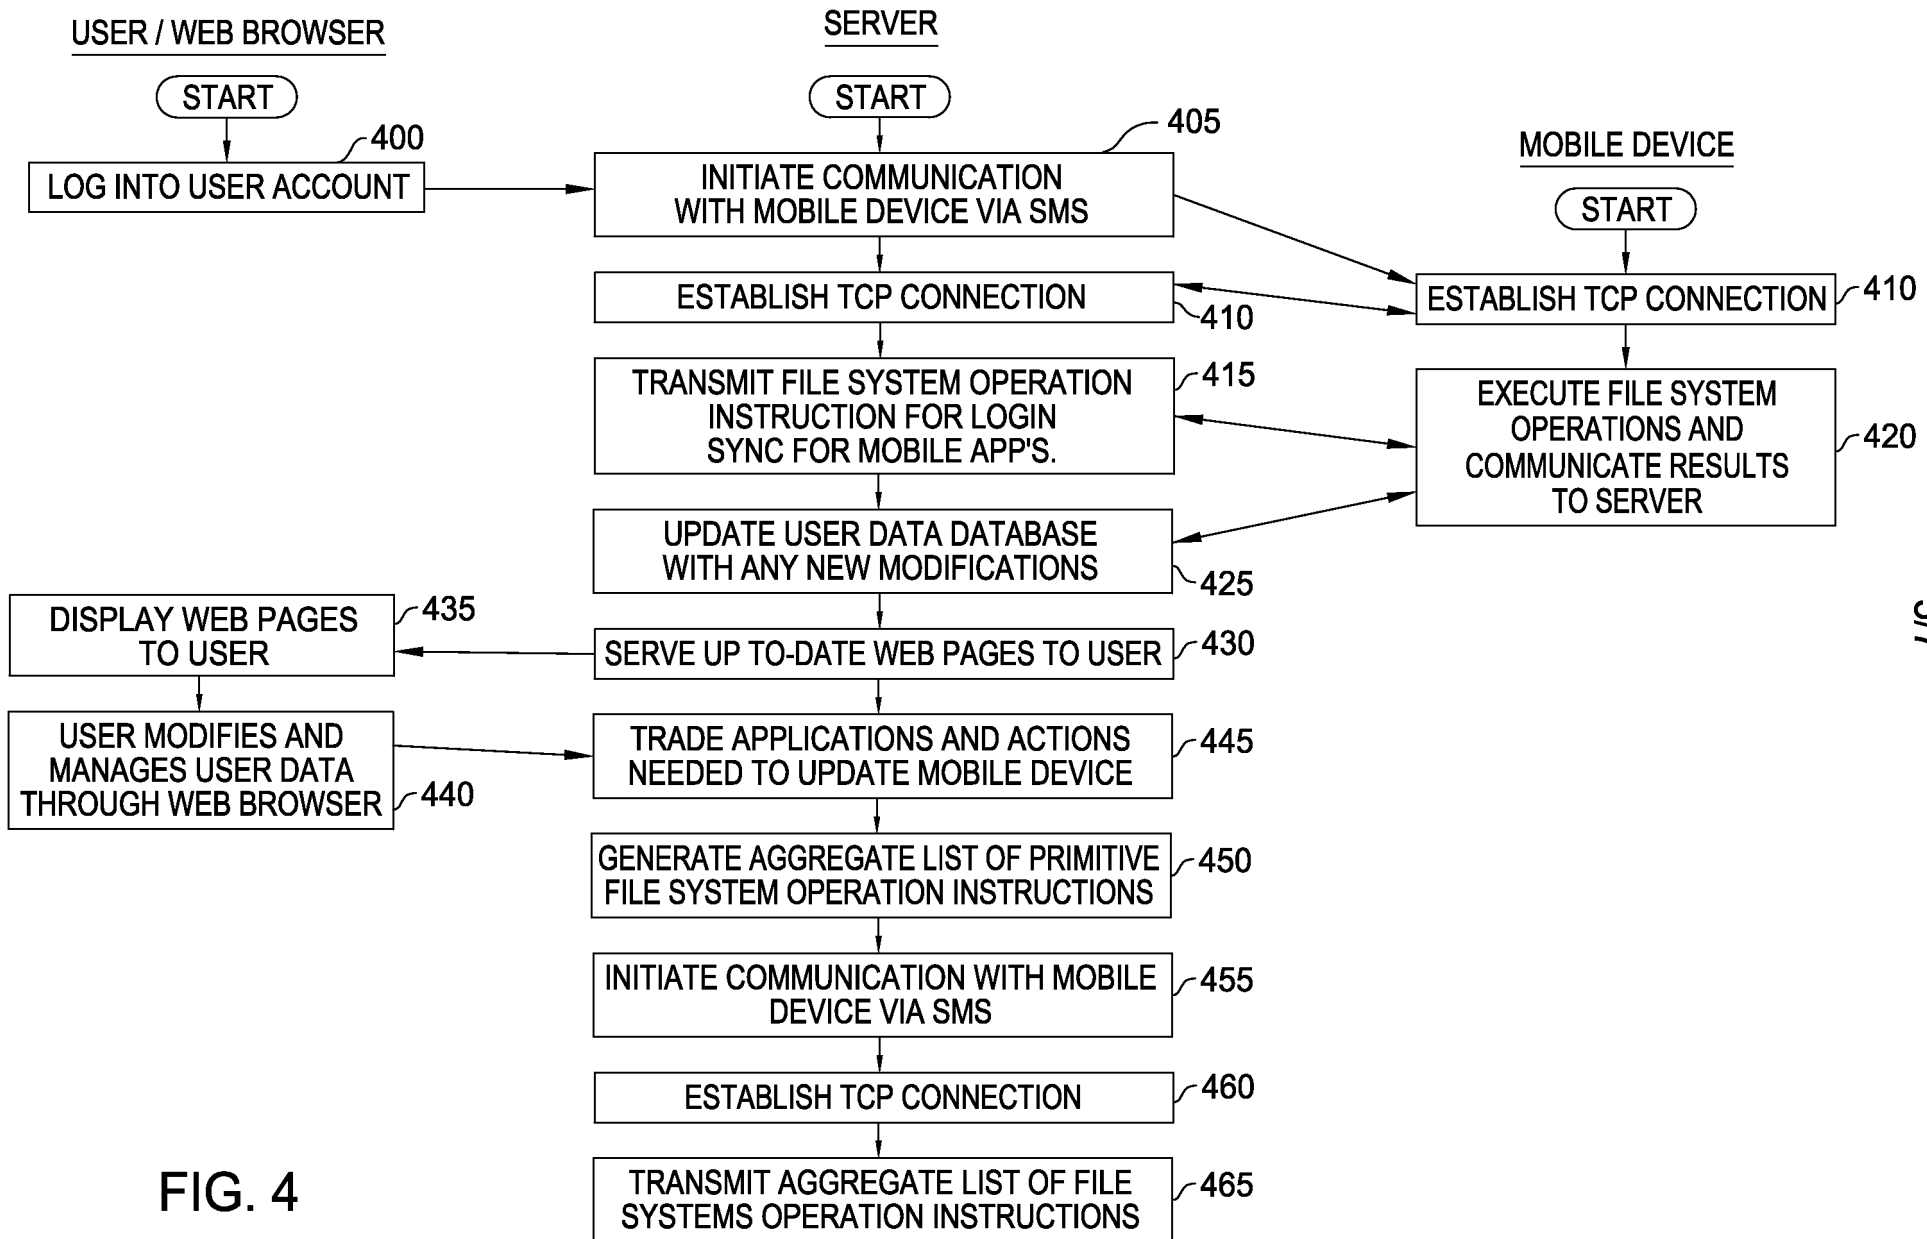


FIG. 4

6/7

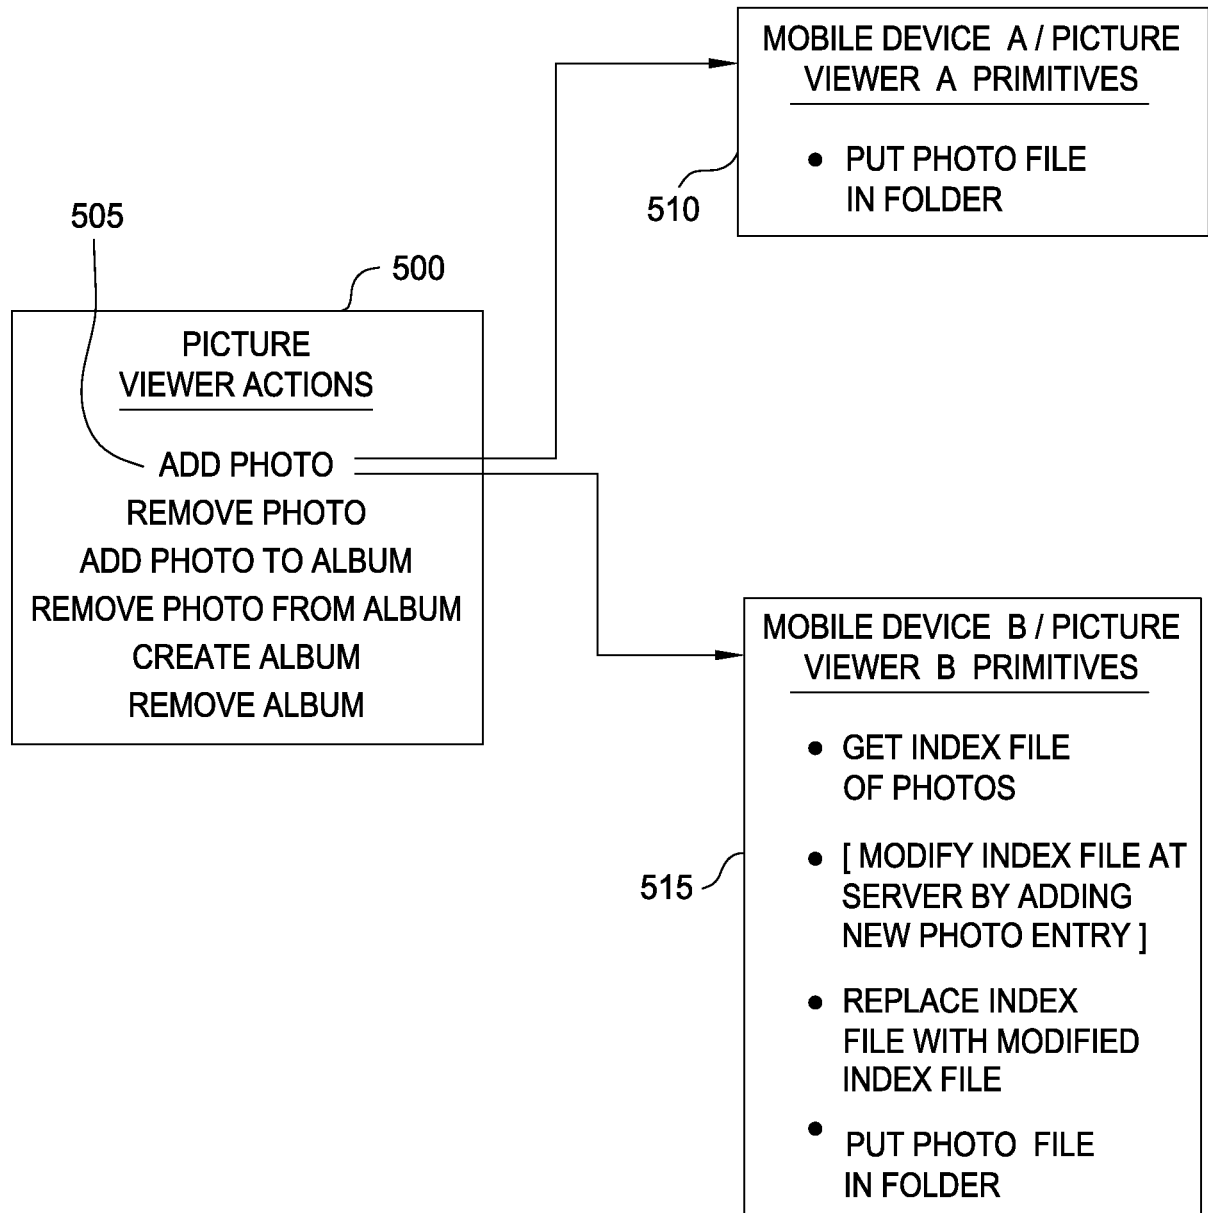


FIG. 5

7/7

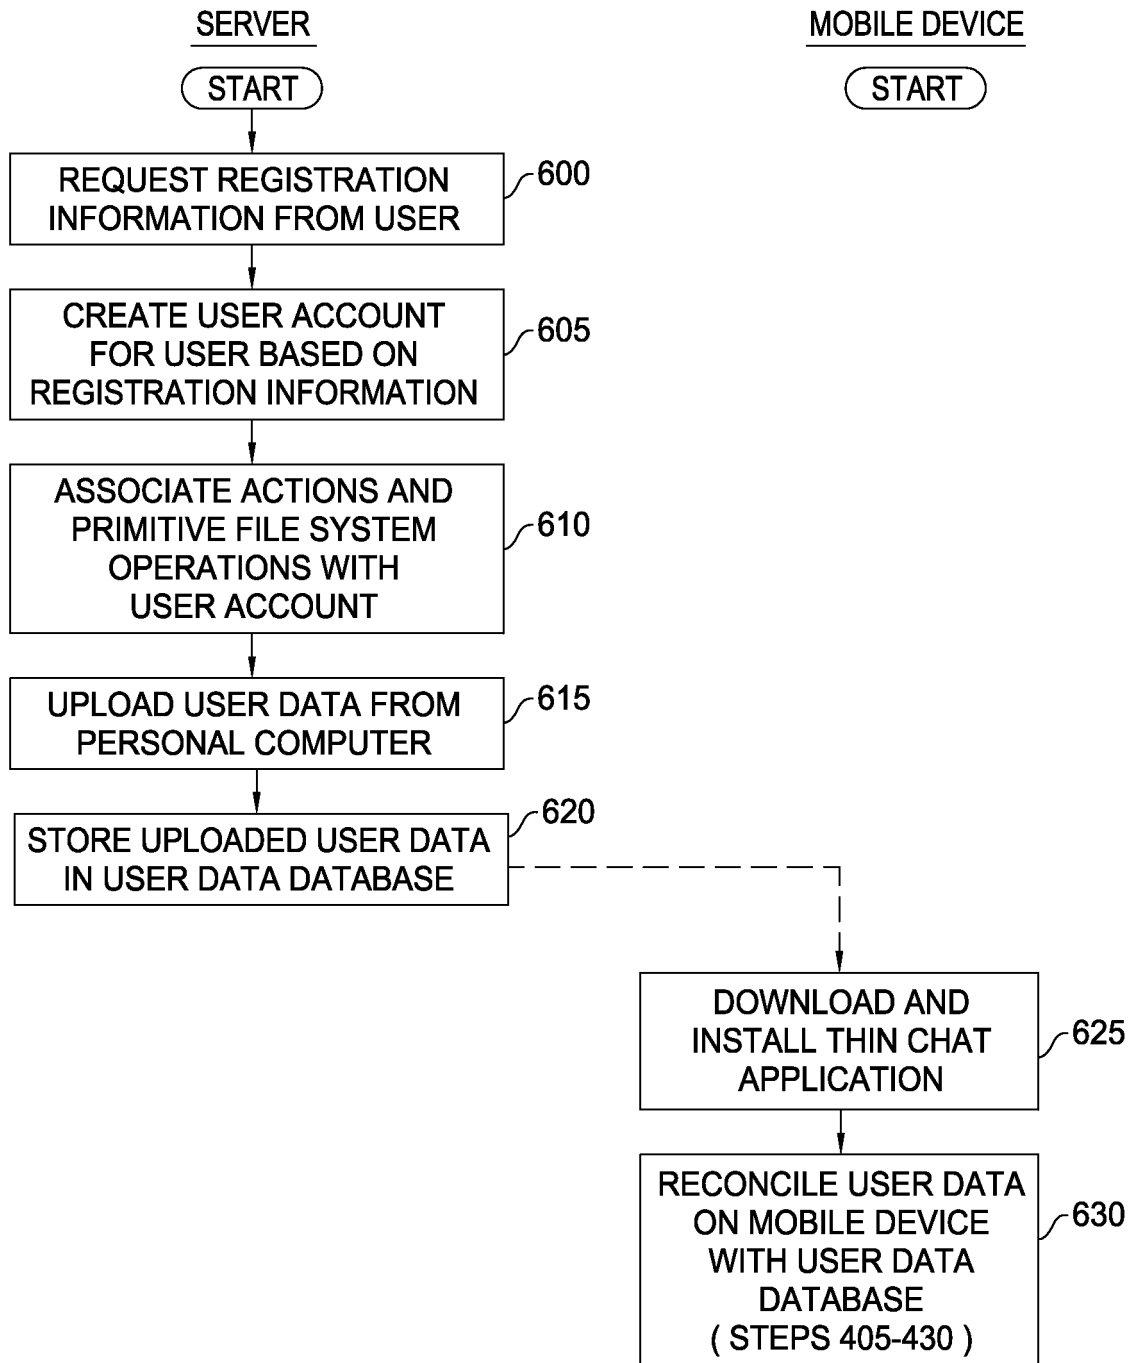


FIG. 6

A. CLASSIFICATION OF SUBJECT MATTER***H04Q 7/24(2006.01)i, H04Q 9/00(2006.01)i, H04B 7/26(2006.01)i***

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 8 : H04Q 7/24, H04Q 9/00, H04B 7/26

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean Utility models and applications for Utility Models since 1975

Japanese Utility models and applications for Utility Models since 1975

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKIPASS(KIPO internal) "mobile, management, user, web browser"

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 2004-0002943 A1 (Merrill, John Wickens Lamb et al.) 01 Jan. 2004 See abstract, figure 4, claims 1-11, and paragraphs [0051]-[0063]	1-21
A	US 2006-0047844 A1 (Deng, Li) 02 Mar. 2006 See abstract, figures 3-4, claims 1-20, and paragraphs [0050]-[0066]	1-21
A	US 07000032 B2 (Kloba, David D. et al.) 14 Feb. 2006 See abstract, figures 1G-1I1, 63A-63B, claims 1-10, and column 18, line 7 - column 20, line 5	1-21
A	US 06317742 B1 (Nagaratnam, Nataraj et al.) 13 Nov. 2001 See abstract, figure 4, claims 1-13, and column 9, line 42 - column 10, line 11	1-21
A	US 2005-0288044 A1 (Atkins, Barry D. et al.) 29 Dec. 2005 See abstract, figures 1-2, claims 1-22, and paragraphs [0024]-[0030]	1-21



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

09 JUNE 2008 (09.06.2008)

Date of mailing of the international search report

09 JUNE 2008 (09.06.2008)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
Government Complex-Daejeon, 139 Seonsa-ro, Seo-
gu, Daejeon 302-701, Republic of Korea

Facsimile No. 82-42-472-7140

Authorized officer

KIM, Kwang Sik

Telephone No. 82-42-481-8355



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2008/053664

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 20040002943 A1	01.01.2004	None	
US 20060047844 A1	02.03.2006	None	
US 07000032 B2	14.02.2006	US20020046296A1	18.04.2002
US 06317742 B1	13.11.2001	EP00853279A2 EP00853279A3 EP00853279B1 JP10254783A KR1019980070410A	15.07.1998 21.08.2002 20.09.2006 25.09.1998 26.10.1998
US 20050288044 A1	29.12.2005	None	