

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
10 November 2005 (10.11.2005)

PCT

(10) International Publication Number  
**WO 2005/106838 A1**

(51) International Patent Classification<sup>7</sup>: **G10C 3/16**

(21) International Application Number:  
PCT/CZ2005/000036

(22) International Filing Date: 28 April 2005 (28.04.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
PV2004-542 28 April 2004 (28.04.2004) CZ

(71) Applicant (for all designated States except US): **PETROF, SPOL. S R.O.** [CZ/CZ]; Brnenska 207, 500 06 Hradec Kralové (CZ).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **PODLIPNY, Jiri** [CZ/CZ]; Racice nad Trotinou 91, 503 03 Smirice (CZ).

(74) Agent: **MARKES, Libor**; Grohova 54, 602 00 Brno (CZ).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

**Declarations under Rule 4.17:**

— as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii)) for the following designations AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA,

[Continued on next page]

(54) Title: GRAND PIANO ACTION MECHANISM

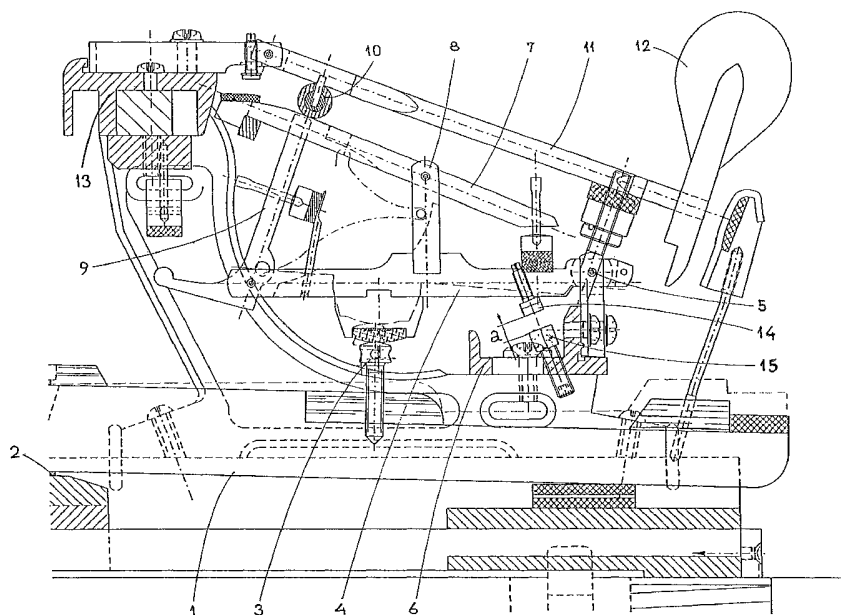

(57) Abstract: In the action mechanism of a mechanical piano consisting, among others, of a key (1), a wippen (4) accommodated on a wippen rail (6), a repetition lever with a flange (8), a jack (9) and a hammer (12) and comprising a pair of permanent magnets (14, 15) that are arranged so as to repulse each other, the first magnet (14) being attached to the wippen (4) and the second magnet (15) to the immovable structure of the piano. The first magnet (14) is attached to the bottom of the wippen (4) between a wippen centre pin (5) and the repetition lever flange (8), whereas the second magnet (15) is attached to the wippen rail (6).



MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, UZ, VC, VN, YU, ZA, ZM, ZW, ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG)

— of inventorship (Rule 4.17(iv)) for US only

**Published:**

- with international search report
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

## **Grand piano action mechanism**

### **TECHNICAL FIELD**

The invention relates to the action mechanism of a mechanical piano consisting, among others, of a key, a wippen, a repetition lever, a jack and a hammer, and comprising a pair of permanent magnets that are arranged so as to repulse each other, the first magnet being attached to the wippen and the second magnet to the immovable structure of the piano.

### **PRIOR ART**

The historical development has considerably unified the design of the action mechanism of grand pianos, resulting in only minor differences existing between the mechanical systems used by different manufacturers of today. The task of a piano mechanism resides, among others, in transferring the motion of a key to a hammer impacting upon the respective string or strings. The mechanism in use represents a considerably sophisticated design that should comply with a number of requirements, involving the task to make the performance pleasant, agreeable, and definite. The keys should present the same resistance in all positions of the keyboard. The movement of the key, which is a double acting lever, is transmitted by a capstan screw attached to said key onto a wippen accommodated pivotably on a wippen rail and therefrom, by way of a repetition lever and a jack, the motion is transmitted to a hammer shank that pivots on a hammer flange rail. This mechanism is the same in all keys of the keyboard, however, it differs as to the hammer mass, and namely within the range between 14 g for the bass position down to 4 g in the descant position. The keys at the side of the mechanism act upon the hammers by these different masses. In order to cope with the requirement that the key resistance should be the same over the whole keyboard, these differences of mass should be compensated for. In known piano mechanisms such compensation, or balancing, is implemented by inserting leaden rollers into the keys at the side of the keyboard. Adding weights helps to achieve static balancing of the key mechanism, but its dynamic characteristics are considerably

- 2 -

impaired. The piano player will feel it in particular during quick repetitions of the tones, since especially deep tones require imparting acceleration to rather high inertia masses. Another disadvantage of the known balancing of the piano mechanism is the utilisation of lead, which is due to the necessity of concentrating the weights into the small space available.

Efforts are known to improve the features of the piano mechanism by way of permanent magnets accommodated on various parts thereof. E.g., patent specification No NL 1011484 suggest to locate pairs of permanent magnets under the key at both sides of the balance rail. But practice shows that this results into the necessity of increasing the mass of weights to ensure the stability of the key.

A more prospective solution of the problem is proposed in patent specification JP 2003140640. A permanent magnet is installed at the end of the wippen overlapping over the bearing of the wippen, and namely at its upper side. Such magnet co-operates with a magnet that is accommodated on the immovable structure above the wippen. The magnets act against the gravity of the wippen mass and the attached parts affecting the key, thus reducing the need for weights in the keys at the side of the keyboard. Their drawback, however, resides in that the magnets push the wippen downwards, burdening its bearing, whereas the short overlapping end of the wippen allows to install the magnets at a short distance only, i.e. about 10 mm from the bearing. Due to that the stroke of the movable magnet is very small and the repulsive force between both magnets is present almost throughout the whole time of action. This is seen to substantially impact the dynamism of the piano mechanism over the whole part of hammer movement. Thus the feeling of the piano player changes in the sense of limiting the possibility of substantially varying the play dynamics. In addition to that, locating the upper fixed magnet to the envisaged spot presents considerable problems from the viewpoint of design. These may be the reasons for which no pianos implementing such solution have appeared in the market down to the present day.

It is the aim of the present inventions to improve the dynamic characteristics of the known piano mechanism with permanent magnets.

- 3 -

## SUMMARY OF THE INVENTION

The above task is solved by a grand piano action mechanism consisting, among others, of a key, a wippen accommodated on a wippen rail, a repetition lever with a flange, a jack and a hammer, and comprising a pair of permanent magnets that are arranged so as to repulse each other, the first magnet being attached to the wippen and the second magnet to the immovable structure of the piano. The substance of this action mechanism resides in that the first magnet is attached to the bottom of the wippen between the wippen center pin and the repetition lever flange, whereas the second magnet is attached to the wippen rail.

A preferable embodiment in the light of dynamics has magnets close to a centre pin of the wippen, at best within a distance between 15 to 25 mm.

For adjusting optimum dynamic effects, at least one of the magnets can be provided with means for adjusting its distance from the other magnet.

## BRIEF DESCRIPTION OF THE DRAWING

The invention will be more readily understood by way of a drawing representing a preferred embodiment of a piano mechanism for one key. A dashed line represents the contour of that key and the wippen in raised position.

## DETAILED DESCRIPTION OF PREFERRED EMBODIMENT

Parts of the piano mechanism according to the picture affected by the invention are the following: a key **1**, which is a double acting lever supported on a balance rail **2**, fixed to the key **1** is a capstan screw **3**, that lifts, upon depressing key **1**, a wippen **4** pivotably accommodated at a wippen centre pin **5** on a wippen rail **6**, further a repetition lever **7** that pivots on a repetition lever flange **8** that is attached to wippen **4**, a jack **9** that lifts a hammer shank **11** with a knuckle **10**, and a hammer **12** that is pivotably accommodated on a hammer flange rail **13**. Upon depressing key **1**, the mechanism throws hammer **12** against the string. Strings for different heights of tone require corresponding weights of hammer **12**. The mass of hammer **12** lies on key **1** by the

- 4 -

intermediary of the mechanism. For balancing the effects of different weights along the length of the keyboard the keys **1** are provided with weights at the side of the keyboard. In the direction to the deep tones the mass of these weights increases. Being thus statically balanced, keys **1** of the keyboard present the same resistance to the fingers during their slow depression. During quick depressions, however, especially in case of fast repetitions of the same tone, the dynamic effects of the masses that should be imparted acceleration by the finger, show adverse results. The design of the mechanism according to the present invention substitutes the effect of weights with the effect of a pair of co-axial permanent magnets **14**, **15** arranged so as to repulse each other. The first magnet **14** is attached to the bottom of wippen **4** between the wippen centre pin **5** and the accommodation of the repetition lever flange **8**, the second magnet **15** is attached to the wippen rail **6**. Both magnets **14**, **15** that are arranged about 20 mm from wippen centre pin **5** are screwed to the mentioned part of the mechanism, with the option of adjusting their axial position, i.e. their distance **a**. This allows to regulate the release of the wippen **4**.

The piano mechanism according to the present invention allows to reduce substantially the weight mass and to refrain to the full from the utilisation of the lead weights. For deeper positions brass weights of smaller mass will do, whereas the mass of the key for the higher tones can be reduced by drilling holes in its front part. The relatively large stroke of the movable magnet and its deviation during the stroke result in that the relieving effect is manifested only during a short phase of striking the key, the contact of the piano player with the dynamism of the hammer movement being retained. Also during the return of the hammer to its initial position the braking effect sets in at the very end, without affecting the velocity of the hammer. The feeling of the piano player, accordingly, is the one he/she is used to, but playing is easier.

- 5 -

## CLAIMS

1. Grand piano action mechanism, consisting, among others, of a key, a wippen accommodated on a wippen rail, a repetition lever with a flange, a jack and a hammer and comprising a pair of permanent magnets that are arranged so as to repulse each other, of which the first magnet is attached to the wippen and the second magnet to an immovable piano structure, **characterised in that** the first magnet (14) is attached to the bottom of the wippen (4) between a wippen centre pin (5) and the repetition lever flange (8), and the second magnet (15) is attached to the wippen rail (6).
2. Action mechanism according to claim 1, **characterised in that** the magnets (14, 15) are arranged within 15 to 25 mm from the centre pin (5) of wippen (4).
3. Action mechanism according to claim 1 or 2, **characterised in that** at least one of the magnets (14, 15) is provided with means for adjusting the distance from the other magnet.





# INTERNATIONAL SEARCH REPORT

International Application No

PCT/CZ2005/000036

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 G10C3/16

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 G10C

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, PAJ, WPI Data

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	PATENT ABSTRACTS OF JAPAN vol. 2003, no. 09, 3 September 2003 (2003-09-03) & JP 2003 140640 A (KAWAI MUSICAL INSTR MFG CO LTD), 16 May 2003 (2003-05-16) cited in the application abstract	1-3
A	WO 00/54248 A (SNEL, EVERARDUS, ALEXANDER, MARIA; VELO, HENRI, JAN) 14 September 2000 (2000-09-14) abstract; figures 1,2	1
A	US 2 976 756 A (SCHWARZBAUR JULINS) 28 March 1961 (1961-03-28) column 2, line 27 - line 63; figures 1,4,7	1
	----- -/--	



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

\* Special categories of cited documents:

- \*A\* document defining the general state of the art which is not considered to be of particular relevance
- \*E\* earlier document but published on or after the international filing date
- \*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- \*O\* document referring to an oral disclosure, use, exhibition or other means
- \*P\* document published prior to the international filing date but later than the priority date claimed

- \*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- \*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- \*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- \*G\* document member of the same patent family

Date of the actual completion of the international search

28 July 2005

Date of mailing of the international search report

18/10/2005

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

De Vos, L

# INTERNATIONAL SEARCH REPORT

International Application No  
PCT/CZ2005/000036

## C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>US 5 796 024 A (STANWOOD ET AL) 18 August 1998 (1998-08-18) abstract</p> <p>-----</p>	1

# INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CZ2005/000036

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
JP 2003140640	A	16-05-2003	NONE	
WO 0054248	A	14-09-2000	NL 1011484 C1 WO 0054248 A1	12-09-2000 14-09-2000
US 2976756	A	28-03-1961	NONE	
US 5796024	A	18-08-1998	NONE	