



US010394948B2

(12) **United States Patent**  
**Brisebois et al.**

(10) **Patent No.:** **US 10,394,948 B2**

(45) **Date of Patent:** **\*Aug. 27, 2019**

(54) **METHOD AND SYSTEM FOR CUSTOMIZING A MOBILE APPLICATION USING A WEB-BASED INTERFACE**

(58) **Field of Classification Search**  
None  
See application file for complete search history.

(71) Applicant: **ProntoForms Inc.**, Ottawa (CA)

(56) **References Cited**

(72) Inventors: **Mitch A. Brisebois**, Wakefield (CA);  
**Brant Drummond**, Dunrobin (CA);  
**Arjun Mehta**, Calgary (CA); **Marc Chene**, Ottawa (CA); **Mark Flannigan**, Ottawa (CA)

U.S. PATENT DOCUMENTS

6,300,947 B1 10/2001 Kanevsky  
6,304,851 B1 10/2001 Kmack  
(Continued)

(73) Assignee: **ProntoForms Inc.**, Ottawa (CA)

FOREIGN PATENT DOCUMENTS

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

WO WO 99/46736 9/1999  
WO WO 2004/003768 1/2004  
WO WO 2006/077481 7/2006

This patent is subject to a terminal disclaimer.

OTHER PUBLICATIONS

Linda May Petterson, Create Forms Applications using IBM Forms for Mobile Devices, Oct. 5, 2005, IBM DeveloperWorks, pp. 1- 21 (Year: 2005).\*

(21) Appl. No.: **15/811,081**

(Continued)

(22) Filed: **Nov. 13, 2017**

(65) **Prior Publication Data**

US 2018/0067917 A1 Mar. 8, 2018

**Related U.S. Application Data**

(63) Continuation of application No. 12/522,687, filed as application No. PCT/IB2008/000070 on Jan. 11, 2008, now Pat. No. 9,836,446.

(Continued)


(57) **ABSTRACT**

A system and method for customizing mobile-form applications via a web-based interface for distribution to a mobile device are disclosed. An example method includes providing a customizable mobile-form application template. A web-based interface is provided allowing creation of a customized mobile-form application from the customizable mobile-form application template by selecting a data field for inclusion on the customizable mobile-form application template. The customized mobile-form application may then be distributed to the mobile device.

(51) **Int. Cl.**  
**G06F 17/00** (2006.01)  
**G06F 17/24** (2006.01)  
**G06Q 10/00** (2012.01)

(52) **U.S. Cl.**  
CPC ..... **G06F 17/248** (2013.01); **G06F 17/243** (2013.01); **G06Q 10/00** (2013.01)

**21 Claims, 14 Drawing Sheets**

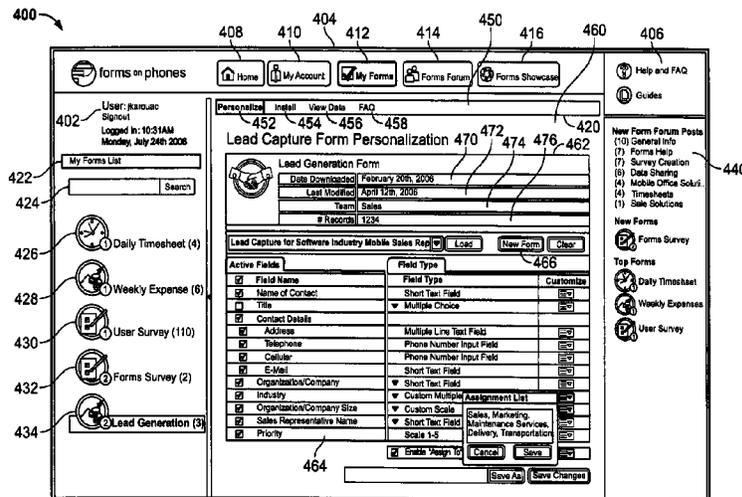

**Related U.S. Application Data**

(60) Provisional application No. 60/880,170, filed on Jan. 12, 2007.

**References Cited**

U.S. PATENT DOCUMENTS

6,751,659 B1\* 6/2004 Fenger ..... H04L 29/06  
709/221

7,237,002 B1 6/2007 Estrada

7,616,971 B2\* 11/2009 Rouse ..... H04M 3/493  
345/173

7,721,190 B2\* 5/2010 Sikchi ..... G06F 17/243  
715/223

7,971,148 B2\* 6/2011 Papakonstantinou .....  
G06F 17/30893  
707/999.102

2002/0194219 A1\* 12/2002 Bradley ..... G06F 17/243  
715/223

2003/0023626 A1\* 1/2003 Bretti ..... G06F 17/243  
715/223

2003/0110445 A1\* 6/2003 Khaleque ..... G06F 9/4443  
715/222

2003/0185182 A1 10/2003 Young

2004/0019699 A1 1/2004 Dam

2004/0039990 A1\* 2/2004 Bakar ..... G06F 17/243  
715/222

2004/0054569 A1\* 3/2004 Pombo ..... G06Q 10/0633  
705/7.27

2004/0268230 A1\* 12/2004 Liu ..... G06F 17/211  
715/201

2005/0005259 A1\* 1/2005 Avery ..... G06F 9/5038  
717/103

2005/0010454 A1 1/2005 Falk

2005/0278645 A1\* 12/2005 Maur ..... G06Q 10/10  
715/762

2006/0161646 A1\* 7/2006 Chene ..... G06F 17/243  
709/223

2006/0168335 A1\* 7/2006 Hodjat ..... G06F 17/243  
709/239

2006/0206358 A1\* 9/2006 Beaver ..... G06F 19/3487  
705/2

2007/0073697 A1\* 3/2007 Woods ..... G06F 17/30887

2007/0130232 A1\* 6/2007 Therrien ..... G06F 8/71

2007/0201752 A1\* 8/2007 Gormish ..... G06K 9/00442  
382/232

2007/0250783 A1\* 10/2007 Wu ..... G06F 19/00  
715/762

2007/0283413 A1\* 12/2007 Shan ..... H04L 63/20  
726/1

2007/0288837 A1\* 12/2007 Eaves ..... G06F 17/243  
715/234

2008/0091780 A1\* 4/2008 Balan ..... H04L 63/0428  
709/204

2008/0098291 A1 4/2008 Bradley

2008/0151758 A1\* 6/2008 Weinrib ..... H04W 72/1242  
370/238

2008/0160958 A1\* 7/2008 Abichandani ..... H04M 1/72563  
455/410

2010/0174974 A1\* 7/2010 Brisebois ..... G06F 17/243  
715/223

OTHER PUBLICATIONS

Drop Down Menus, Mar. 2005, <http://www.echoecho.com/htmlforms11.htm>.

Extended European Search Report, dated Dec. 5, 2011, issued in corresponding European Patent Application No. 08702233.1 (7 pages).

International Search Report for International Application No. PCT/IB2008/000070 dated Jun. 19, 2008 (3 pages).

PureEdge 8x, 2004, XP002331830, Retrieved from the Internet: <http://www.pureedge.com/products/products/ProductBrochure.pdf> (4 pages).

Rischpater, R. "Create Mobile Applications with IBM Forms for Mobile Devices." Retrieved from the Internet: <http://www.devx.com/wireless/Article/27871/1954?pf=true> [retrieved on] (2 pages).

WoFoo, Infinity Box Inc., Jul. 1, 2006, pp. 1-15.

\* cited by examiner

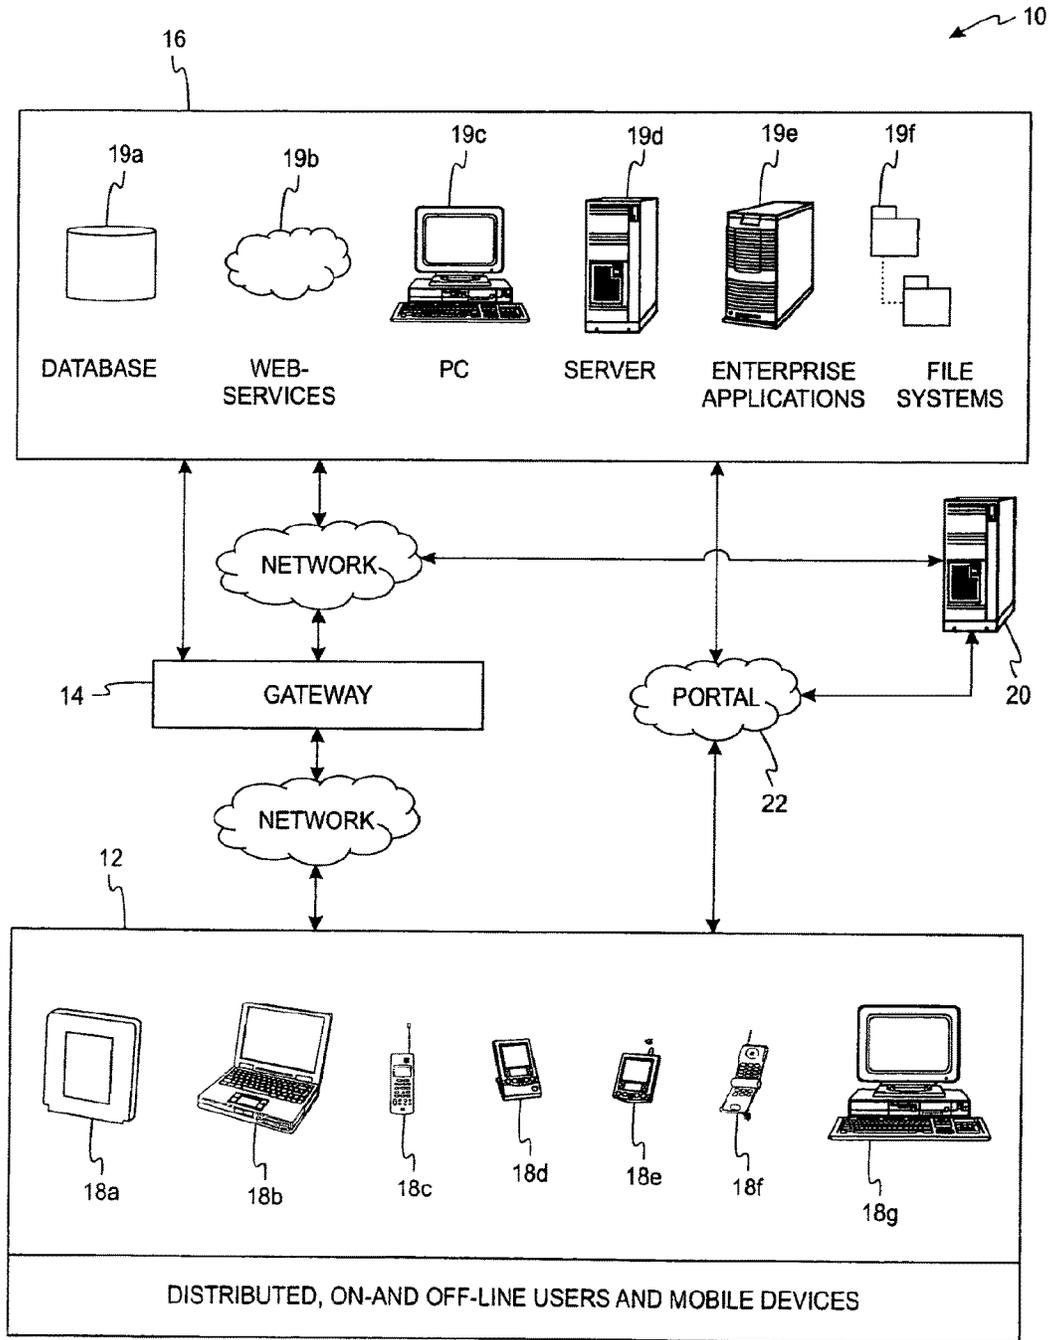


Fig. 1

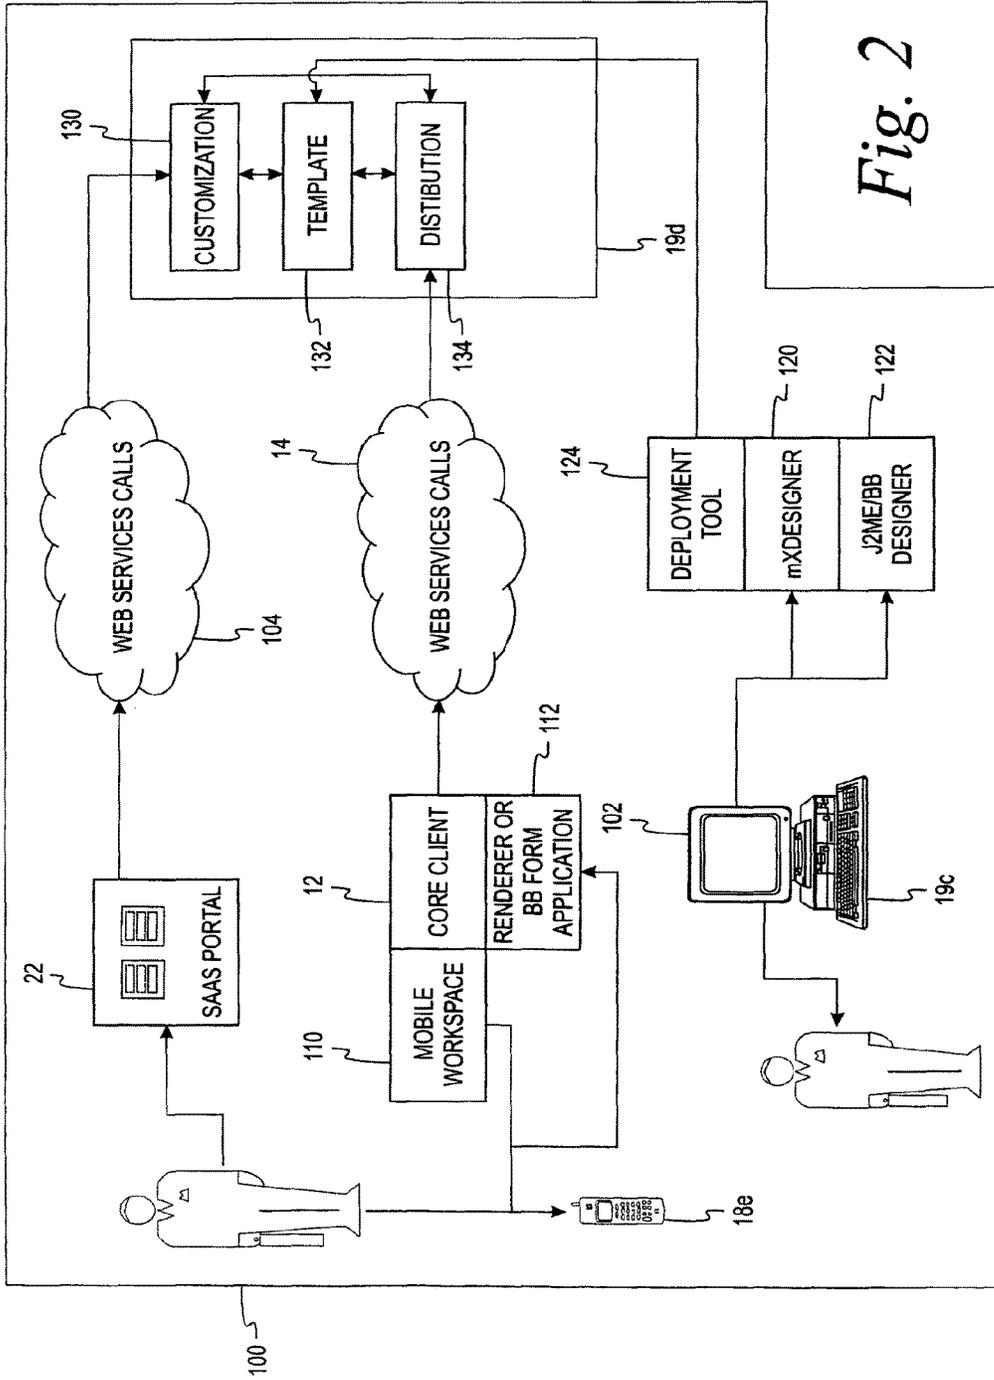
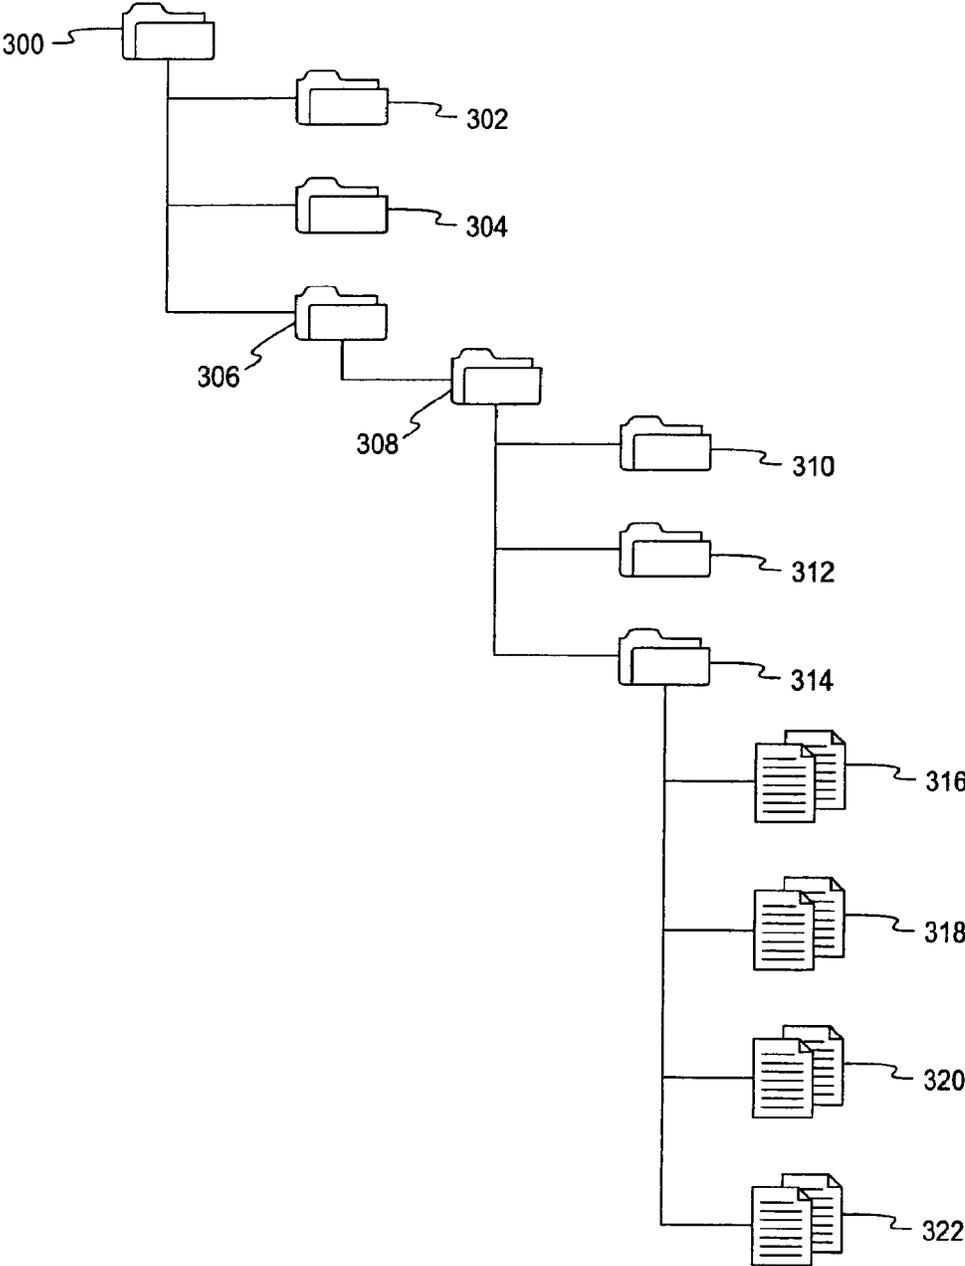
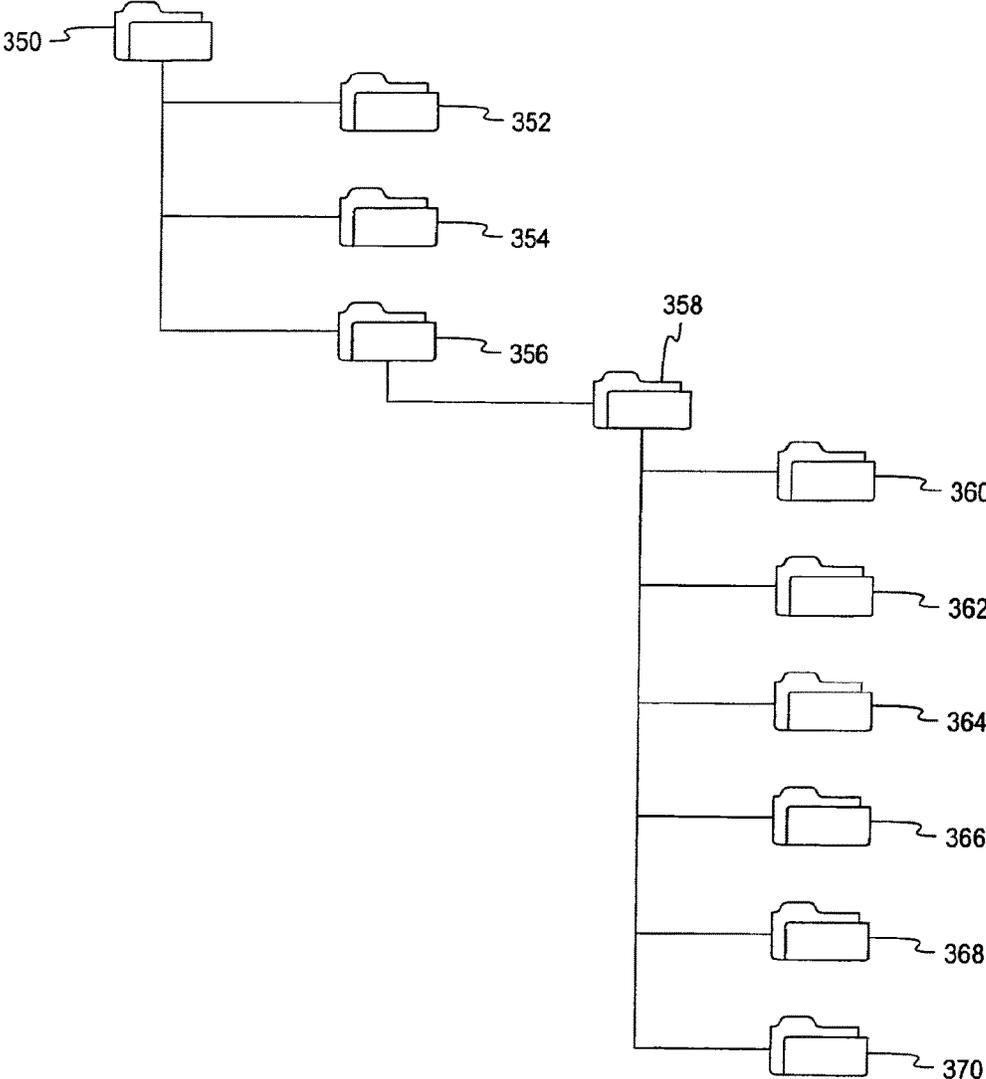


Fig. 2



*Fig. 3a*



*Fig. 3b*

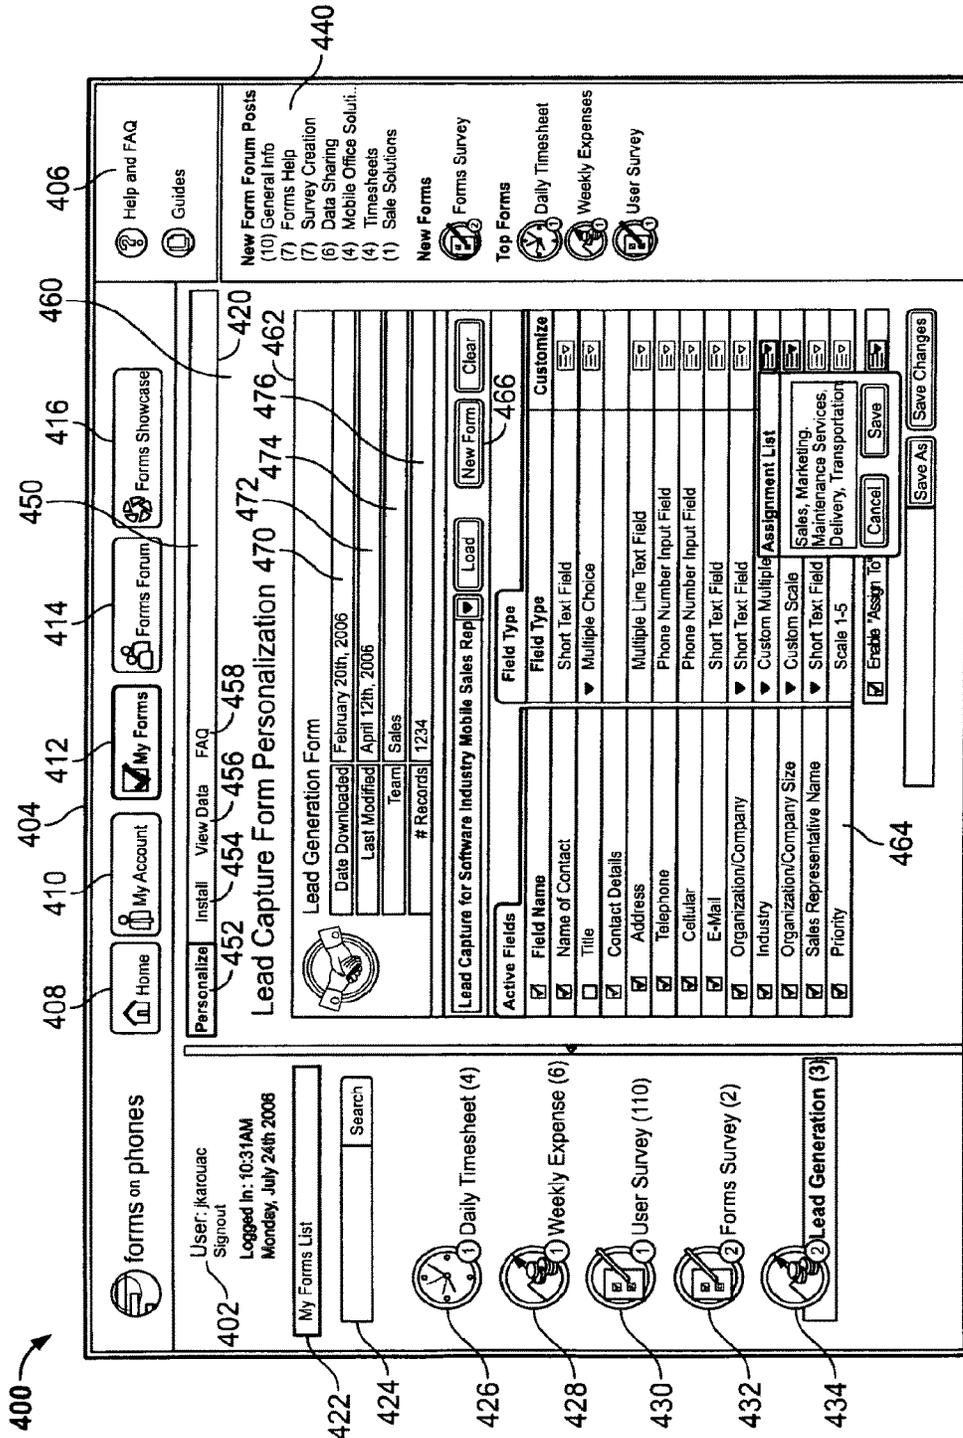


FIG. 4A

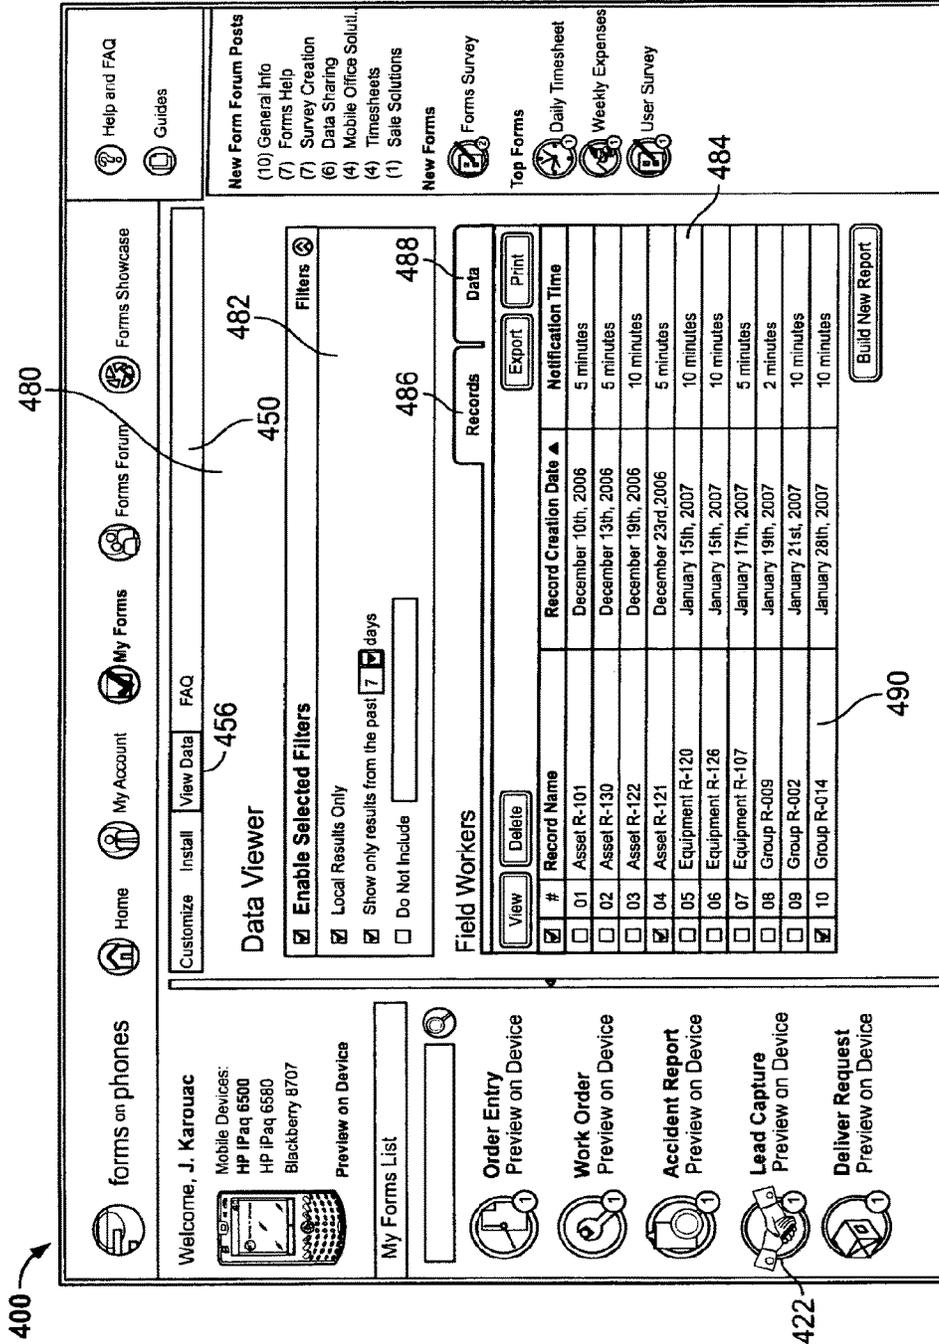


FIG. 4B

460

540

542

502

544

546

466

500

504

506

506

510

508

464

522

512

522

554

552

550

522

Lead Capture For Software Industry Mobile Sales Rep

Load

New Form

Clear

Active Fields	Field Name	Field Type	Customize
<input checked="" type="checkbox"/>	Name of Contact	Short Text Field	
<input type="checkbox"/>	Title	Multiple Choice	
<input checked="" type="checkbox"/>	Contact Details	Multiple Line Text Field	
<input checked="" type="checkbox"/>	Address	Phone Number Input Field	
<input checked="" type="checkbox"/>	Telephone	Phone Number Input Field	
<input checked="" type="checkbox"/>	Cellular	Phone Number Input Field	
<input type="checkbox"/>	Fax	Phone Number Input Field	
<input type="checkbox"/>	E-Mail	Short Text Field	
<input type="checkbox"/>	Instant Messaging	Short Text Field	
<input checked="" type="checkbox"/>	Web	Short Text Field	
<input checked="" type="checkbox"/>	Organization/Company	Short Text Field	
<input checked="" type="checkbox"/>	Industry	Custom Multiple Choice	
<input checked="" type="checkbox"/>	Organization/Company Size	Custom Scale	
<input checked="" type="checkbox"/>	Sales Representative Name	Short Text Field	
<input checked="" type="checkbox"/>	Priority	Scale 1-5	

Enable "Assign To" Forwarding

Save As

Save Changes

FIG. 5A

460

500

Lead Capture For Software Industry Mobile Sales Rep

New Form Load Clear

Active Fields	Field Type	Customize
<input checked="" type="checkbox"/> Field Name	Field Type	Customize
<input checked="" type="checkbox"/> Name of Contact	Short Text Field	
<input type="checkbox"/> Title	Multiple Choice	
<input checked="" type="checkbox"/> Contact Details		
<input checked="" type="checkbox"/> Address	Multiple Line Text Field	
<input checked="" type="checkbox"/> Telephone	Phone Number Input Field	
<input checked="" type="checkbox"/> Cellular	Phone Number Input Field	
<input type="checkbox"/> Fax	Phone Number Input Field	
<input type="checkbox"/> E-Mail	Short Text Field	
<input type="checkbox"/> Instant Messaging	Short Text Field	
<input checked="" type="checkbox"/> Web	Short Text Field	
<input checked="" type="checkbox"/> Organization/Company	Short Text Field	
<input checked="" type="checkbox"/> Industry	Short Text Field	
<input checked="" type="checkbox"/> Organization/Company Size	Custom Multiple Choice	
<input checked="" type="checkbox"/> Sales Representative Name	Custom Scale	
<input checked="" type="checkbox"/> Priority	Short Text Field	
	Scale 1-5	

530

Enable "Assign To" Field Assignment List

Brandt, Joe,  
Evan, James,  
Timothy, Jason

534 532

Save Cancel

Changes

FIG. 5B

600 Survey Builder

608 Customer Product Feedback and Evaluation Survey Save Survey

620 604 622 TrueContext Mobile Surveys

#	Question Statement	Answer Types				
		Scale 1-5	Yes/No	Text	Choice	Voice
1	Have you ever used one of our products before?	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="checkbox"/>
2	Which of our products have you used in the past?	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="checkbox"/>
3	How satisfied are you with our products?	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="checkbox"/>
4	Do you find that you use our products often?	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>
5	Do you use your mobile device for timesheet tracking applications?	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>
6	What is the primary task you use your mobile device for?	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="checkbox"/>
7	Where do you most often use your mobile device	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="checkbox"/>

610 Add New Question

634 628 628

610 Cancel Create Survey

Fig. 6a

600

642

### Survey Builder

TrueContext  
MobileSurveys

Survey Title: Customer: Product Feedback and Evaluation Survey Save Survey

#	Question Statement	Answer Types				
		Scale 1-5	Yes/No	Text	Choice	Voice
1	Have you ever used one of our products before?	<input type="radio"/>	<input checked="" type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="checkbox"/>
2	Which of our products have you used in the past?	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input checked="" type="radio"/>	<input type="checkbox"/>
3	How satisfied are you with our products?	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="checkbox"/>
4	Do you find that you use our products often?	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>
5	Do you use your mobile device for timesheet tracking applications?	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="checkbox"/>
6	What is the primary task you use your mobile device for?	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="checkbox"/>
7	Where do you most often use your mobile device	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input checked="" type="radio"/>	<input type="checkbox"/>

**Selection Editor**

Enable Pulldown

- mXForms
- mXDesigner
- mXDocs

Cancel Save

Cancel Create Survey

Add New Question

Fig. 6b

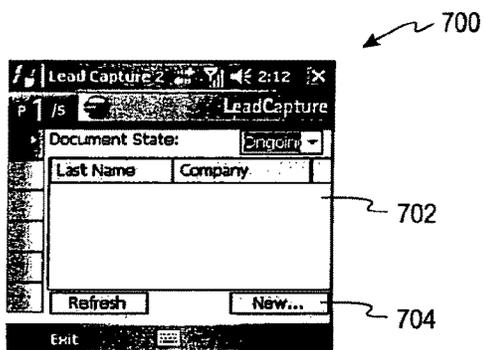


Fig. 7a

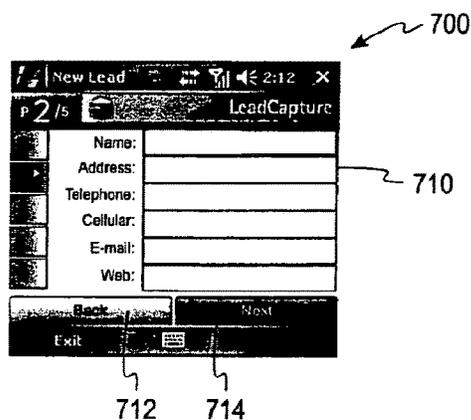


Fig. 7b

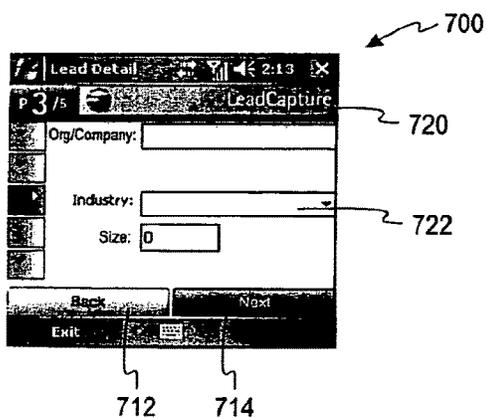


Fig. 7c

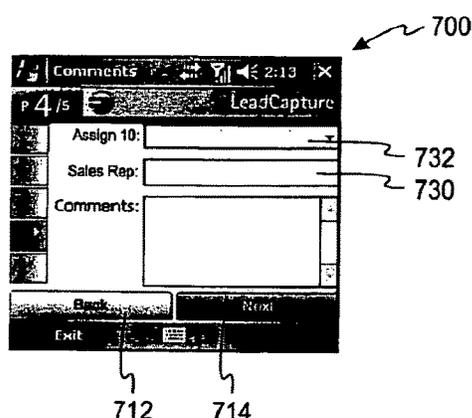


Fig. 7d

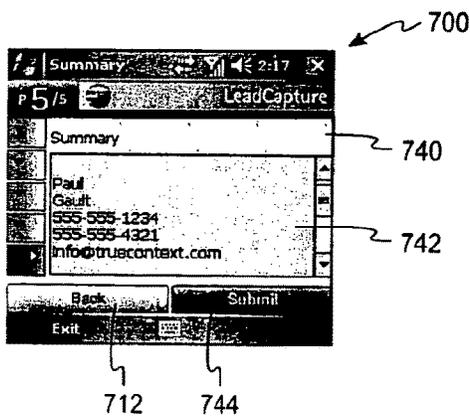


Fig. 7e

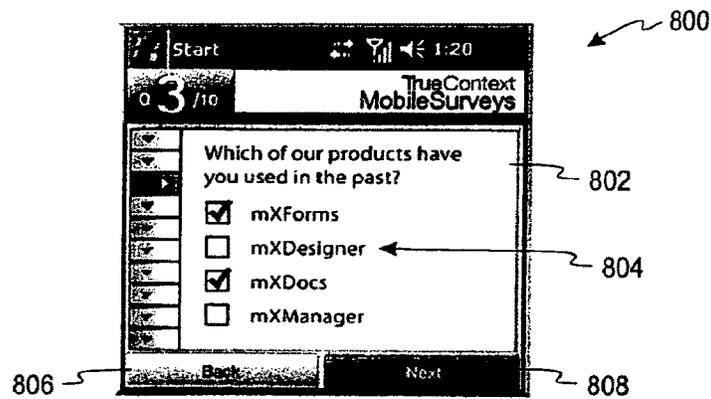


Fig. 8a

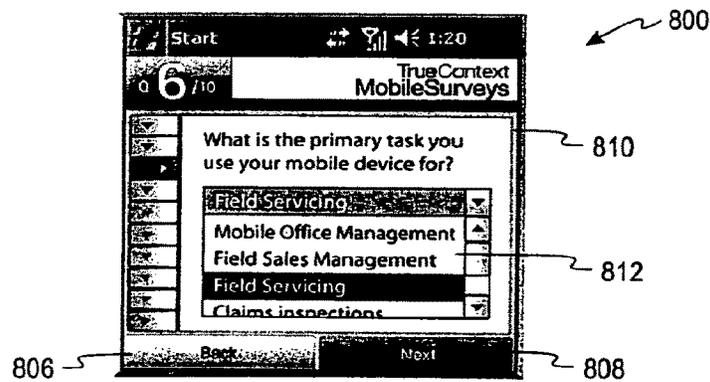


Fig. 8b

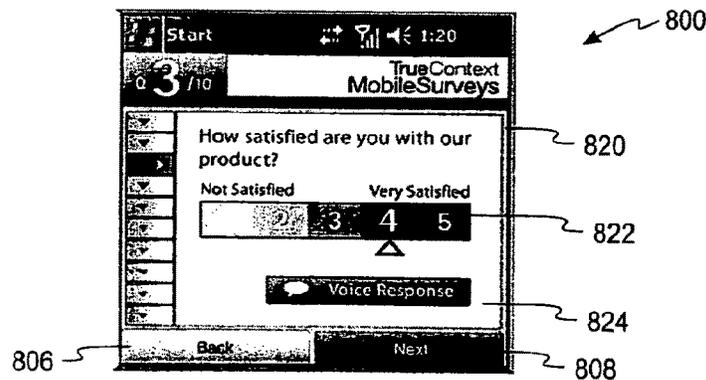


Fig. 8c

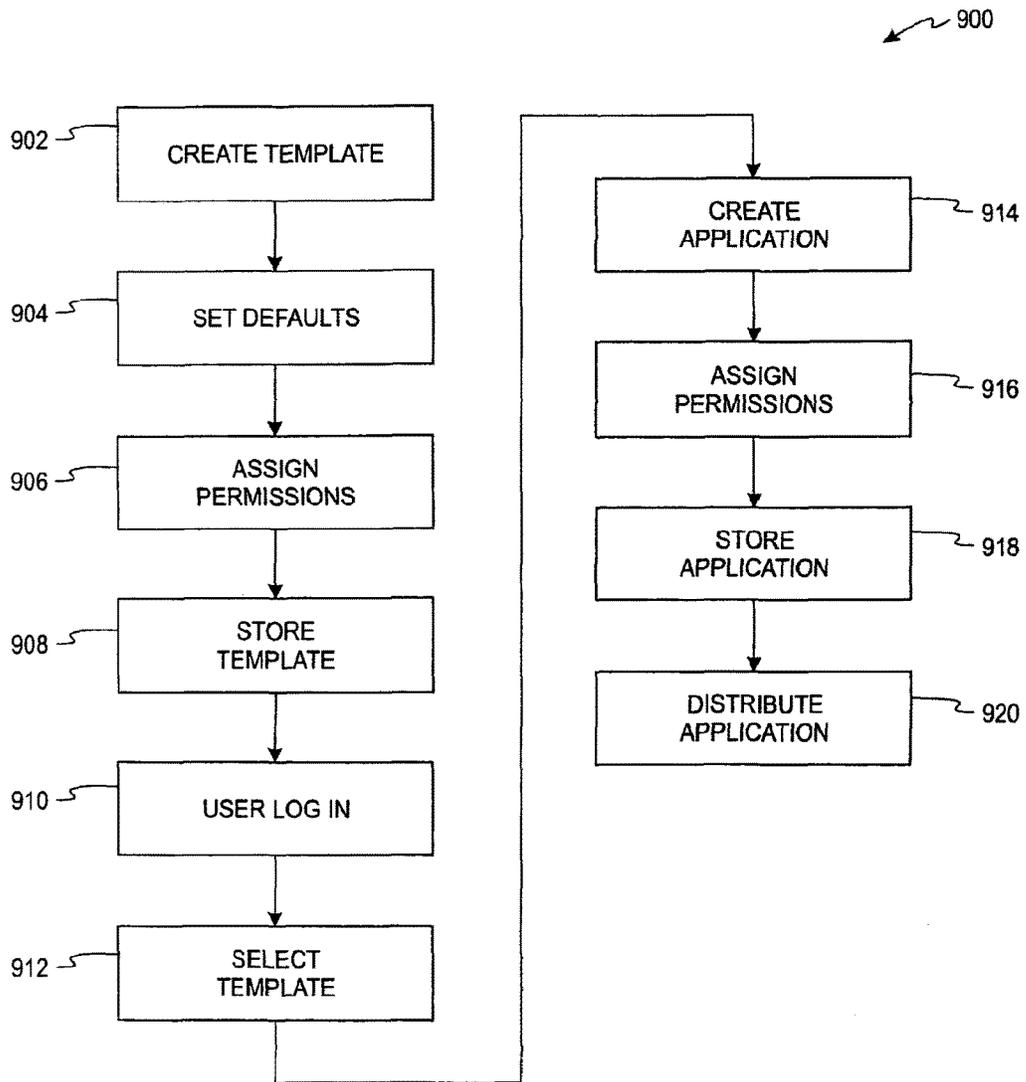


Fig. 9

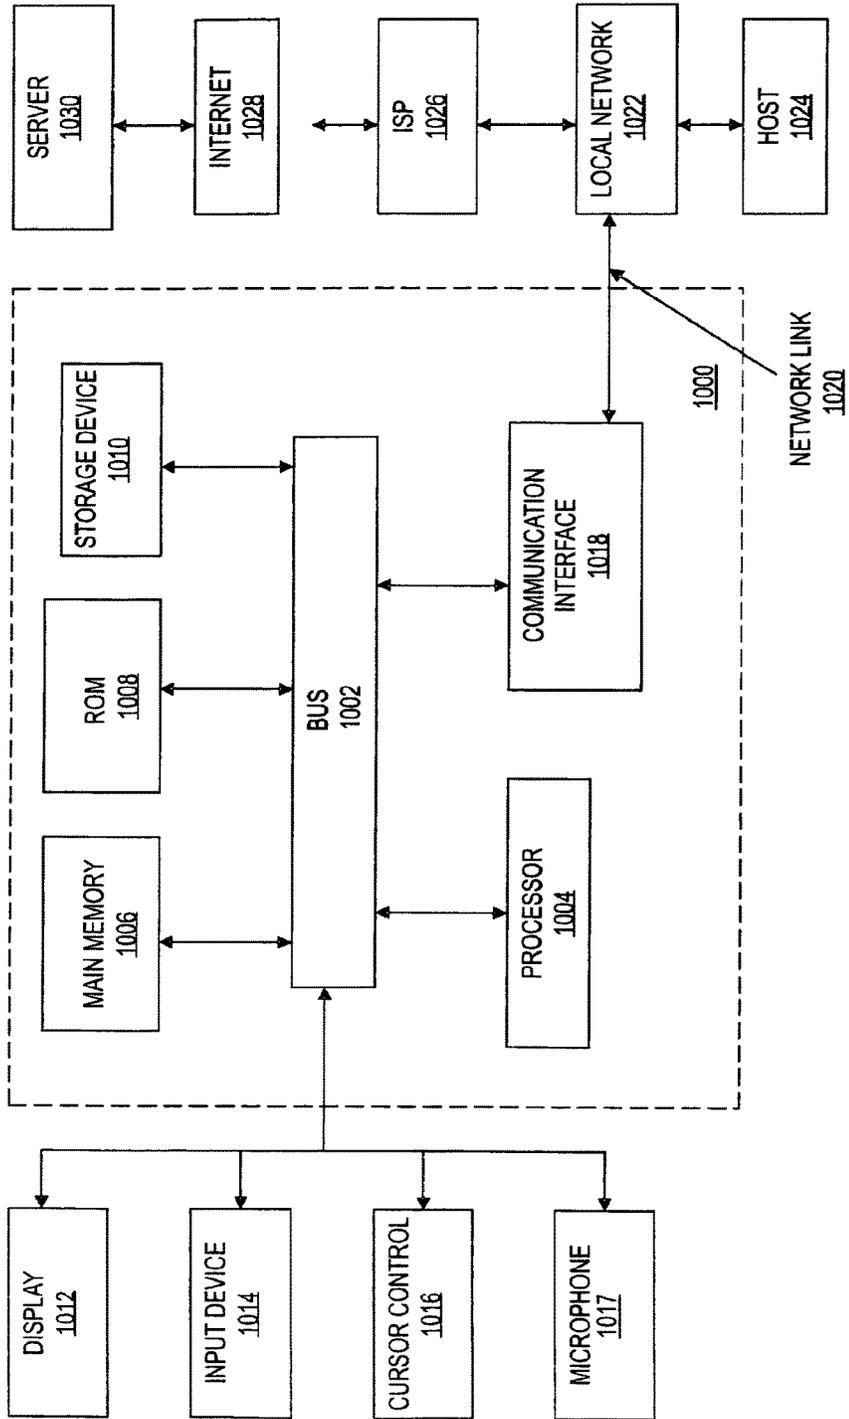


Fig. 10

**METHOD AND SYSTEM FOR  
CUSTOMIZING A MOBILE APPLICATION  
USING A WEB-BASED INTERFACE**

CROSS REFERENCE TO RELATED  
APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 12/522,687, filed Feb. 23, 2010, now allowed, which is a U.S. national stage filing of International Application No. PCT/IB2008/000070 filed Jan. 11, 2008 and this application claims priority to U.S. Provisional Application No. 60/880,170, filed Jan. 12, 2007, both of which are hereby incorporated by reference in its entirety.

FIELD OF THE INVENTION

The present invention relates generally to mobile applications and, more particularly, to a system and method for customizing mobile-form applications using a web-based interface.

BACKGROUND OF THE INVENTION

Traditionally, most data in field force industries (e.g., field sales, field services, inspection and reporting, etc.) is distributed and captured on paper-based forms. The data entered on paper-based forms was typically returned to the business office to be manually entered electronically and integrated with a back office system. Furthermore, an enterprise business process might require the captured data to be reviewed by other members of the organization (e.g., authorization, up sell opportunity, billing, etc.) before, during, or after the field has interacted with the data. The process of distributing, updating, capturing, and returning form data and adapting it to a unique business process applies to a large number of mobile workers performing a variety of tasks such as, but not limited to, data collection solutions for inspections (e.g., property, health, etc.), field sales solutions reporting (e.g., lead capture, timesheet, expense reports, etc.), and field services solutions such as work order dispatches (e.g., HVAC, insurance claims, etc.).

Typically, in more complex forms-based business processes, work requests and form data are initially dispatched to field force workers using a voice channel (e.g., cell phone) or pre-printed paper forms (e.g., clipboard) that is then manually filled out or updated by the mobile worker (e.g., technician). A completed work request might also require one or many subsequent requests (e.g., required parts, required authorization, up-sell opportunities, etc.) that are typically done through a call over a cellular phone, or return trip to the office, or may cause the displacement of the mobile worker. In addition, field inspectors may also capture data in the field using a series of paper forms and binders to complete their inspection tasks, resulting in a slow and inefficient process.

Businesses incur high wireless voice and vehicle fleet costs due to the above-described processes used in dispatching field workers, capturing or updating form data, and completing work orders or inspection forms in the field. Additionally, there are significant costs and inefficiencies with slow, manual processes for the exchange of data using paper-based forms, from the cost of the paper based forms, to duplicate data entry, to errors made in data capture on paper, to waiting for the person with the data to update another person or system, etc.

In order to reduce the use of paper, electronic forms may be used in conjunction with mobile devices such as portable computers. However such electronic forms and XForms (XML Forms) solutions (e.g., Adobe LiveCycle, Microsoft Infopath, FormDocs, Altova, Advantys, MDSI, X-Smiles, formsPlayer, and Novell XForms) are generally PC-centric and Local Area Network (LAN) oriented, as opposed to being optimized for mobile devices and wireless use. Additionally, these solutions are on-line and browser-centric, as opposed to being optimized for on- and off-line use over intermittently connected wireless networks with varying degrees of cost and quality of service. These solutions typically do not provide mechanisms for hosting multi-tenants (multi-domain) forms applications using a common IT infrastructure (e.g., Managed Service Provider hosted environment), nor do they have support for sophisticated routing and tracking of forms and policies that define a mobile forms application.

However, mobile devices are increasingly used for data collection as more and more mobile devices become available (laptops, cell phones, PDAs, tablet PCs, Ultra Mobile PCs, etc.) and as more and more content is available in electronic form (documents, email, pictures, commerce, videos, data etc.), and as access to devices and content becomes more and more ubiquitous (internet, wireless, etc.).

One challenge faced by organizations with a mobile workforce using such mobile devices to collect data is the timely and secure exchange of data. The collection of data using electronic forms has replaced paper forms in the computer environment. The availability of similar mobile solutions eliminates the need for use of paper in the field. Currently, trained programmers using a desktop-based design tool create forms based applications that work on mobile devices. Once the form is created, it is then installed on a mobile device along with any other enabling software and components. However, such mobile solution applications do not always match existing corporate procedures and forms which employees have familiarity with. A less than optimal solution is to have programmers "manually" program an application reflecting needed paper forms. This approach wastes programming resources and is not adaptable to changes in forms or business processes.

Thus there is a need for a user selected mobile-form application design interface. There is a further need for a customizable mobile-form template creation application. There is also a need for a system to provide ready distribution of custom mobile-form applications to mobile devices. There is another need for a web interface to allow a user to customize a mobile-form application without programming cost and time delays.

SUMMARY OF THE INVENTION

One disclosed example is a method for customizing a mobile-form application for distribution to a mobile device. A customizable mobile-form application template is provided. A customized mobile-form application is created from the customizable mobile-form application template using a web-based interface. The mobile-form application is created by editing a data field for inclusion on the customizable mobile-form application template.

Another example disclosed is a customizable mobile-form application system for customizing a mobile-form application for a mobile device. The system includes a customization interface accessible via a web-enabled device. The customization interface allows the creation of a customized mobile-form application including a data field. A

data storage device is coupled to the customization interface to store the customized mobile-form application for distribution to the mobile device.

Another example disclosed is a web-based interface for customizing a mobile-form application for a mobile device. The interface includes a template selection control to select a customizable mobile-application template. A customization control is included to edit a data field to create a customized mobile-form application from the customizable mobile-application template.

Another example disclosed is a mobile device for the collection of data. The mobile device includes a customized mobile-form application customized via a web-based interface. A mobile-form application rendering client runs the customized mobile-form application on the mobile device. The customized mobile-form application allows the collection of data on the mobile device. A communications interface receives the customized mobile-form application and communicates the collected data. A display screen displays an interface of the customized mobile-form application rendered by the mobile-form application rendering client.

Another example disclosed is a system for creating a customized mobile-form application from a customizable mobile-form template. The system includes a template forms module to receive and the customizable mobile-form template. A customization module accessible via a web-based interface is included. The customization module is coupled to the template forms module to allow the creation of the customized mobile-form application from the customizable mobile-form template via the web-based interface.

Another example disclosed is an article of manufacture for creating a customizable mobile-form application. The article of manufacture includes a computer readable medium and a plurality of instructions. At least a portion of the plurality of instructions is storable in the computer readable medium. The plurality of instructions is configured to cause a processor to provide a customizable mobile-form application template. The plurality of instructions is also configured to cause a processor to provide a web-based interface allowing creation of a customized mobile-form application from the customizable mobile-form application template by selecting a data field for inclusion on the customizable mobile-form application template.

The above summary of the present invention is not intended to represent each embodiment, or every aspect, of the present invention. Additional features and benefits of the present invention are apparent from the detailed description, figures, and claims set forth below.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is an illustration of a mobile data collection system utilizing customized mobile-form applications, according to one embodiment of the present invention.

FIG. 2 is an illustration of a block diagram of the components of the system in FIG. 1 that are used to create mobile-form application templates, customize the templates to create customized mobile-form applications and distribute the customized mobile-form applications to mobile devices.

FIG. 3A is an illustration of a block diagram of one file organization used to support a customized mobile-form application.

FIG. 3B is an illustration of a block diagram of another file organization used to support a customized mobile-form application.

FIG. 4A is an illustration of a screen view of a portal web-site interface with an interface for creating a customized mobile-form application.

FIG. 4B is an illustration of a screen view of the portal web-site in FIG. 4A with a data viewing interface summarizing data collected via a customized mobile-form application.

FIG. 5A is an illustration of a screen view of the customization interface in FIG. 4A used to produce an example customized lead generation mobile-form application.

FIG. 5B is an illustration of the screen view in FIG. 5A showing a pop-up text box input for creating the customized lead generation mobile-form application.

FIG. 6A is an illustration of a screen view of the customization interface in FIG. 4A used to produce an example customized survey mobile-form application.

FIG. 6B is an illustration of the screen view in FIG. 6A showing a pop-up text box input for creating the customized survey mobile-form application.

FIGS. 7A-7E illustrate screen views of a mobile device display resulting from the operation of the customized lead generation mobile-form application in FIG. 5A.

FIGS. 8A-8C illustrate screen views of a mobile device display resulting from the operation of the customized survey mobile-form application in FIG. 6A.

FIG. 9 illustrates a flow diagram of the process performed by the system in FIG. 1 to customize a mobile-form application.

FIG. 10 is a block diagram that illustrates a computer system upon which embodiments of the invention may be implemented.

While the invention is susceptible to various modifications and alternative forms, specific embodiments have been shown by way of example in the drawings and will be described in detail herein. It should be understood, however, that the invention is not intended to be limited to the particular forms disclosed. Rather, the invention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the invention as defined by the appended claims.

### DETAILED DESCRIPTION OF THE ILLUSTRATED EMBODIMENTS

Turning now to the drawings, FIG. 1 illustrates an example mobile device data collection system 10 which allows data collection via mobile-form applications installed on mobile devices. The mobile device data collection system 10 includes a Shared File Systems Explorer Client (“Explorer Client”) 12, a Shared Mobile File Systems Gateway (“Gateway”) 14, and a Mobile File System Mounting Client (“Mounting Client”) 16. The Explorer Client 12 and the Mounting Client 16 are adapted to function on a plurality of user devices 18a-g which are, in some aspects, mobile devices. As illustrated, the Explorer Client 12 may be provided on devices including, but not limited to, a tablet PC 18a, a laptop computer 18b, a cellular telephone 18c, a cradled personal digital assistant (PDA) 18d, a wireless PDA 18e, a smart phone 18f, or a desktop computer 18g.

It is to be understood that the mobile devices 18a-f are examples and the data collection system 10 could support many identical, or different, mobile devices such as for example the PDA 18e distributed to numerous mobile users to collect data. The mobile devices 18a-f generally include at least one processor, a communication interface(s), input device(s) such as keypads or touch screens, and the like, and a display to facilitate user interaction with the device. The

Mounting Client 16 may be provided to additional devices, such as, for example, a database 19a, web services 19b, a desktop computer 19c, an application server 19d, enterprise applications 19e, or file systems 19f. The Gateway 14 may be provided on a mainframe (operating on a UNIX platform), a PC server, or a similar device. The Mounting Client 16 is also provided on a web portal server 20 which manages a web portal 22. Among the functions supported by the web portal 22, in this example, is the ability of the user to create customized mobile-form applications for distribution to mobile devices 18a-f by accessing the portal 22 through any browser enabled device such as the desktop computer 18g. The web portal server 20 is coupled via a network to the additional devices such as the database 19a and the server 19d. In this example, the desktop computer 19c is used to create customizable mobile-form application templates which are made available to the server 19d.

The Explorer Client 12 provides an interface from a wide variety of mobile devices 18a-f (using the native file explorer interface of the particular mobile device) for accessing and managing content across distributed, intermittently connected file systems 19f and other devices running the Mounting Client 16. The Gateway 14 allows users to create a centrally managed, fully distributed peer-to-peer file sharing and distribution network. Operators make the content of a file system 19f available for sharing by registering it using the Mounting Client 16. The Explorer Client 12 allows users to securely and efficiently move and copy objects between registered file systems. In addition, a number of advanced content management capabilities are provided by the Gateway 14 including an ability to inform a user when a piece of content has changed or become available. At the same time, administrators may track and report content usage including the specific association of content with users. Both the Mounting Client 16 and the Explorer Client 12 can communicate through firewalls to the Gateway 14.

The Explorer Client 12 is a native application that runs on the mobile devices 18a-f. The Explorer Client 12 contains components written in several different programming languages including C, C++, C#, .NET and Java. The Explorer Client 12 is adapted to run on a variety of different devices including devices running the Microsoft Windows Mobile OS (formerly Pocket PC or PPC), the Symbian OS, the Windows 2000 OS (Win2K, Windows Millennium), the Windows XP OS, the Windows XP tablet OS, the RIM OS, and the Palm OS.

According to one example, the Explorer Client 12 runs in the native file system of the mobile devices 18a-f. Thus, a user is able to utilize the Explorer Client 12 without any additional training. Further, the Explorer Client 12 supports the full capabilities of the native file system on the mobile devices 18a-f. This provides a “highest common denominator approach” to content management.

According to another example, implementation of the Explorer Client 12 provides a “thin client” that runs in a browser. This provides “lowest common denominator” coverage especially for those devices whose file system capabilities are limited (e.g., RIM). It also enables users to access content when they are not requesting the content from their own mobile devices 18a-f.

The Explorer Client 12 includes a communication stack module which allows for communication between the Explorer Client 12 and the Gateway 14. According to one example, the communication stack module allows the Explorer Client 12 to communicate with the Gateway 14 in the Hypertext Transfer Protocol over Secure Socket Layer

(HTTP over SSL) or Transport Layer Security (TLS) protocol. SSL is an open, nonproprietary protocol that uses a 40-bit key size for the RC4 stream encryption algorithm, which is considered an adequate degree of encryption for commercial exchange. Further, HTTP over SSL supports the use of X.509 digital certificates from the server so that, if necessary, a user can authenticate the sender. Other encryption techniques such as the Advance Encryption Standard (AES) may be utilized. For example, an s-mime technique could also be adopted where the target application is e-mail. Furthermore, the forms designer can specify that the data captured as an XML document on the mobile device may be encrypted using a public or secret-key cryptosystem (e.g., Kerberos, PKI, etc.) to properly secure the content on the mobile device if the device was stolen or lost, or if any of the devices 19a-f or the portal server 20 was compromised.

According to one embodiment, the communication protocol of the system 10 utilizes HTTP(S) as the preferred protocol to transport all data files. The system 10 may utilize, as the preferred protocol to distribute and notify other internal or external resources (e.g., users, other machines, etc.), HTTP/HTTPS, SyncML, ActiveSync, SOAP, SMTP, FTP, SMS, SNMP, SMPP, RMI, HOP, etc. Other communication protocols can be utilized without nullifying the key attributes of the above-described implementation. For example, web extensions such as SOAP and .NET can also be utilized, as well as proprietary communication protocols. A policy-based mobile content engine may also act as an authorizing proxy for each of these protocols that allows the mobile-form applications to communicate in real time with one or more enterprise content sources 19e hosted behind the enterprise firewall. For example, a drop down list in a mobile-form application could be dynamically generated by a SOAP request to an enterprise content source 19e. The mobile content engine would apply appropriate policies both before and after routing the SOAP request from the mobile-form application onto the enterprise content source 19e.

The Explorer Client 12 also includes encryption libraries which are native device libraries that support encryption. According to one example, the mechanism for encrypting is SSL or TLS and the libraries are native SSL or TLS libraries. The Explorer Client 12 further includes a Client User Interface (CUI). The CUI provides a mechanism for presenting to the user a view of one or more file systems 19f and for manipulating the contents of those files systems 19f. According to one example, the mechanism for implementing the CUI is to utilize an existing native file explorer application, on the mobile devices 18a-f, that has been suitably extended. It is generally known within the industry that the native file explorers support such extensions.

The Explorer Client 12 also contains an authentication and authorization module. This authentication and authorization module enables a user of a device 18a-g to be authenticated and authorized against the Gateway 14, and includes communication and user interface components. The Explorer Client 12 may enable existing authentication such as LDAP and RADIUS servers (local or remote, outside or behind the firewall with support for “single sign on” schemas) among others, to be used by the Gateway 14 to authenticate users of the devices 18a-g or other devices 19a-f. Authorization providers are used to determine if the client is authorized based on their access permissions determined, but not limited to, the client’s role and/or group access permission on the accessed resource (e.g., updating or creating a forms data instance).

Finally, the Explorer Client **12** contains a mechanism for view management that allows the Explorer Client **12** to present a view of the content available to the user (based on their permissions and other restrictions enforced by the Gateway **14**) across one or more of the remote file systems. According to one embodiment, the implementation of this mechanism maintains a folder hierarchy view of virtual directories (network folders).

The Gateway **14** provides a centralized network access point between the Explorer Client **12** and the remote, distributed, intermittently connected file systems **19f**. The Gateway **14** preserves the native security of the remote file systems **19f** while enabling additional layers of security and administration specific to the system **10**.

In this example, the Gateway **14** is a primarily java application that runs within an existing web application server. The Gateway **14** can run on a number of different application servers including BEA Weblogic, and IBM Websphere and on a number of different operating systems including, but not limited to, Windows NT, Windows Server, Solaris, Linux, and HP/UX.

The Gateway **14** is able to provide security across multiple network domains. It can secure content and authorize users wherever the content or users are regardless of whether they are inside or outside a corporate firewall. For example, in a Management Service Provider (MSP) or an Application Service Provider (ASP) environment, the Gateway **14** can flexibly control security and access between and across different corporate domains each with a different authentication and authorization models. The Gateway **14** includes support for Kerberos, VPNs, etc.

The Mounting Client **16** provides an interface from a wide variety of devices such as the devices **19a-f** and the portal server **20** to publish or enable access to the local file system **19f** via the Gateway **14**. The Mounting Client **16** has the exact same components and modules as the Explorer Client **12**, except that instead of a CUI the Mounting Client **16** has a File Mounting User Interface (FMUI) and includes additional components, such as a delta scan and security components. Utilizing the FMUI, a user can navigate and select portions of their local file system **19f**; and then navigate and indicate where in the Gateway **14** network folders the content should be made available on the Gateway **14**. At this time, the Explorer Client **12** and Gateway **14** assimilate the containment structure and establish references to each of the folders and file objects therein. In this manner, the content on the newly mounted remote file system **19f** is incorporated into the virtual abstraction layer maintained by the Gateway **14** and viewed through an Explorer Client **12**.

In addition to the file system mapping/mounting capability, the Mounting Client **16** allows users to “copy” or “move” digital content into file systems **19f** that are local to the Gateway **14**. This capability is useful in situations where the user does not care that the remotely accessible content is not tied to the original content in the file system **19f**.

The portal **22** supports a website which allows a user, according to access granted via the Explorer Client **12** and the Mounting Client **16**, accessibility to files stored on the remote file system **19f** and potential access to other devices running the Mounting Client **16**. The portal **22** provides an interface which allows a properly authenticated and authorized user to perform different functions via connection of a web-browser enabled device such as the devices **18a-18g**. In this example the portal server **20** has access to the database **19a** and applications which are run on the server **19d** in

order to provide a user of the portal **22** the ability to customize mobile-form applications, as will be explained below.

The portal server **20** includes an HTTP server component which serves as a central access point for end-users such as the users of the devices **18a-g**. The end-users may also interact directly with a client stub, which communicates with the HTTP server component. The HTTP server component is in communication with style sheet components and a view controller component to ensure proper formatting of content to users who request the portal **22**. The view controller is in communication with the application server **19d**, which serves as a central server for handling requests from the portal **22** for functions such as the customization of mobile-form applications.

In this example, the application server **19d** provides an Enterprise JavaBeans (EJB) container at the business logic layer and performs load balancing and clustering operations to enable efficient workflows in the system **10**. The application server **19d** may be the device through which other components and modules as will be described below are implemented. It is preferred to use a host for the application server **19d** that is capable of handling thousands of concurrent processes, thousands of open sockets, and several megabytes of data. The application server host must have enough processing power to handle multiple concurrent tasks, and multiple CPU systems are preferred as application server hosts according to one example of the application server **19d**. The application server **19d** also needs sufficient random access memory (RAM) to process a large amount of media and textual data per transaction, as well as to meet caching database requirements. The application server host has sufficient disk space to store an operating system and required software to perform patches and updates, cache information from databases such as the database **19a** when the information is not in RAM, and to store server logs and error reports.

It is preferred for the system **10** to be agnostic to application servers, such that a variety of different types of servers may be used as application servers. This server agnosticism contributes to the ability of the system **10** to utilize a distributed architecture and to facilitate redundancy, scalability, and clustering in different types of deployments of the system **10**.

The system **10** in FIG. 1 provides superior end user, network, and client performance in several different ways. First, data compression may be used both in downloading newly dispatched and uploading updated form data instances. Furthermore, the application server **19d** determines when file attachments associated with the mobile-form application data instance should be delivered to the mobile devices **18a-f** using both the type of network and attachment size. Additionally, the system **10** supports external model updates (e.g., customer list, price list, inventory list, etc.). These types of lists typically consist of a large amount of data that should only be updated at given times or when network availability permits. For more time critical updates to the list, byte level differencing and data compression can be used to update the end-users list with the changes rather than the updated list. This may reduce the network data consumption by over 80% depending on the changes made to the list. Byte level differencing is done by transmitting only the changes between the old list and the new list (byte level differences) and by applying those changes as an update to the old list on the mobile devices **18a-f** to create the new list on the mobile device. It can also be used to update an attachment to a form data instance.

The system **10** provides superior availability to mobile workers by enabling offline form filling when confined to areas with restricted network connectivity and by enabling online, near real time, updates of form data to the server. Further, the system **10** helps to ensure that mobile-form applications whether standard or created by user customization and associated resources (e.g., external lists), are pushed as mandatory items. The system **10** controls delivery of captured data instances and mobile-form applications to the mobile devices based on, but not limited to, network connectivity, time, etc. Near real time or scheduled updates to a mobile-form application file is enabled by, for example, using byte level differencing and data compression to reduce the size of the markup transported to the mobile device. The system **10** further enables automatic calculations, comparisons, enforced fields, data input limitations, mandatory fields, contextual form behavior, read-only and pre-filling of form data, thus assisting in speeding up data capture and business process completion.

FIG. 2 illustrates a component block diagram **100** of the example components of the system **10** in FIG. 1 that are used to create customizable mobile-form application templates, create customized mobile-form applications from the customizable mobile-form application templates and distribute the customized mobile-form applications to mobile devices. The mobile-form applications are downloaded on the different devices in system **10** such as the mobile devices **18a-f** in FIG. 1 via the Gateway **14**, the Explorer Client **12** and the Mounting Client **16**. The component block diagram **100** includes the portal **22** that is used to provide a webpage interface for a user to customize mobile-form applications, a template design station **102** such as the desktop computer **19c** which is used to create customizable mobile-form application templates, the server **19d** and a mobile device such as the mobile device **18e**. The portal **22** is coupled to a layer of webservice Application Programming Interfaces (API) **104** which allow the portal **22** to interface with the server **19d** and web-browser enabled devices. The API layer **104** provides support for the functionality for customizing mobile-form applications via the portal **22**.

The example mobile device **18e** includes a mobile workspace application **110**, a form rendering application **112** and the Explorer Client **12**. As explained above, the Explorer Client **12** provides access and communication through the Gateway **14** with the components such as the server **19d** of the system **10** in FIG. 1. The Explorer Client **12** and server **19d** in this example provide all APIs and retrieve all files and applications required to support functions such as data collection via the mobile-form applications on the mobile device **18e**. The mobile workspace application **110** provides an interface that allows the user to select a template and access the portal **22** to create a customized mobile-form application. The form rendering application **112** takes customized mobile-form applications and any other mobile-form applications and renders the form to the end user on the display screen of the mobile device **18e**. This allows the user to perform functions such as, but not limited to, collecting data using such mobile-form applications on the mobile device **18e**. The form rendering application **112** includes rendering engines using the XML-based forms application definition markup language to render a rich set of GUI form controls and to process the corresponding behavior of the mobile-form application for the end-user. The rendering engines are adapted to create a fully configurable look and/or feel for the end-user. Furthermore, the form rendering application **112** is capable of displaying (read-only or read/write), updating, and capturing the end-user's inputted data

on- or off-line as one or more XML documents, as well as attachment files and managed lists that may be in a format other than XML.

The form rendering application **112** is also able to display, update, capture and attach a wide variety of multi-media content to the form data available to the mobile devices. Alternatively or additionally, the rendering engines in the form rendering application **112** are adapted to encode this data to the XML form data instance as a base64 encoded element or reference the inputted text or binary file as a separate entity. The form data may include, for example, signatures, photos, voice notes, sketches, global positioning information, GoogleMaps, bar code scanning information, automobile monitoring information, etc.

The content used by the form rendering application **112** may either be embedded within the XML form data (base64 encoded) or be referenced and managed as attachment files in a very elegant way as content under the control of policies that control how the content is managed and distributed (e.g., not forcing sending large multimedia files associated with the form when the form is submitted wirelessly—unlike other database/sync or real-time forms solutions). The form rendering application **112** may support a wide variety of technologies and input devices (e.g., Personal Digital Assistants (PDAs), smartphones, etc.) for data capture and form navigation. The input devices are linked to and interact with controls defined in the mobile extensible forms markup language to provide and enable data capture and form navigation.

By way of example, the form rendering application **112**, via the defined controls, are adapted to support a plurality of input devices, such as: keyboards (e.g., PC keyboard, keypad, Simple Input Panel (SIP), soft-keyboard, touch screen display inputs, etc.); navigation, mouse, and I/O devices (e.g., optical mouse, RS-232 standard modules, touchscreens, scroll wheels, USB memory dongles, hard-drives, etc.); writing instruments and pointers (e.g., stylus, electronic pen/ink, handwriting to text conversion apps, etc.); audio (e.g., speech to text recognition, speech used for the selection of an item from a list, speech used for form navigation using technology such as VRML, voice recorders, etc.); infrared reader; magnetic reader and cards (e.g., swipe card, proximity card, smart card, expandable media cards and storage devices such as, for example, SD, MMC, compact flash, memory stick, etc.); Radio Frequency Identification (RFID); external or internal device peripheral (e.g., GPS, environmental meter, printers, etc.) including devices or data monitoring and reporting modules within an automobile (e.g., telematics); external or internal applications (e.g., VoIP softphone software, GPS software, etc.); scanners (e.g., optical character reader (OCR), bar code, biometric, etc.); incoming messages (e.g., via SMS, Smart Messages, OMA, SyncML, Email, SNMP, Active Sync, SMPP, SMTP, RSS/XML, etc.); and camera and digital imaging tools and devices.

The template design station **102** includes a variety of design tools to create customizable mobile-form application templates. In this example, the template design station **102** includes an mXDesigner application **120** and a J2ME/BB design application **122**. Completed templates are deployed to the server **19d** via a deployment tool **124**. In this example, the mXDesigner application **120** is a forms toolkit available from TrueContext of Ottawa, Canada. The J2ME/BB design application **122** is a collection of Java APIs for the development of forms for mobile devices such as the mobile devices **18a-f** in FIG. 1. Of course other forms development tools may be used on the template design station **102**.

In particular, the template design station **102** allows a user (having minimal or no scripting, programming, or coding knowledge) to create a customizable mobile-form application template. The customizable mobile-form application template may be defined in terms of: (i) a mobile forms application definition markup language (e.g., mXForms); (ii) the XML-based policy model that applies to the captured data; (iii) the targeted OS-enabled mobile device (e.g., PCs, TabletPCs, Laptop, PDA, Smartphone, Handheld, Handset, Browser-enabled mobile device, Ultra Mobile PC, etc.) or browser for the forms application definition; and (iv) the means of distribution of the forms-based application to targeted users (e.g., via push technology, SMTP, or available through a Uniform Resource Identifier (URI), etc.) based on the design tools available on the template design station **102**.

In this example, the mXDesigner application **120** is a simple Integrated Development Environment (IDE) which may be a standalone PC-based application, an add-in to an existing application (e.g. Microsoft Visual Studio) or other structure to create the customizable mobile-form application templates. The data structure of the forms instance associated with the customizable mobile-form application template created by the mXDesigner application **120** may be created by importing (e.g., via an enterprise content source) XML schema definitions or an instance of an XML file that is used as a demarcation point for back-end system integration. This includes flexible handling of version control and change propagation and data migration when refinements are made to the schema upon which a mobile-form application is based. The mXDesigner application **120** supports upgrades to a customizable mobile-form application without disrupting the use of the forms solution by the field workers. Changes to the model shared between multiple participants are carefully migrated to the upgraded data records or instances transparently to the users of the forms solution. Version control on the data instances is important to understanding the data migration that needs to occur—possibly on the fly—at the time it is created and/or updated on the server **19d** by a field tech during the transition period until every field worker has the upgraded application/model on their user device.

The initial look and feel presented by the customizable mobile-form application template is defined by the mXDesigner application **120**. The mXDesigner application **120** allows a user to create the customizable mobile-form application templates using a rich set of form controls that can be dragged and dropped or defined on a single or multiple form view as will be explained below. The mXDesigner application **120** enables the use of drag and drop properties and other types of controls to define the look and feel as well as the form flow or navigation of the customizable mobile-form application template. The form flow is how the user of the mXDesigner application **120** can use a forms control (e.g., button, image, link, menu item, etc.) to modify customizable mobile-form application templates. The form flow is mostly defined by an action added to a button. Conditional navigation can be controlled by the behavior typically defined by the “bind” property of the control or the parent container of the control. The mXDesigner application **120** can associate actions to the form control to define the form flow.

The mXDesigner application **120** further defines a rich set of templates to speed the creation of or build customizable mobile-form application templates (new or updated templates) for specific OS-enabled targeted devices. This includes a translation service that helps with the automatic translation (and optimization) from a mobile-form application template optimized for one device into other devices

(e.g., browser, laptop, etc.), as opposed to the user having to start from scratch for each device. The mXDesigner application **120** defines several wizards to simplify the steps to create, modify, copy, publish, test, etc. a mobile-form application template and includes a test environment to process the authored mobile-form application template definition files on the targeted device. Additionally, in this example, the mXDesigner application **120** provides workflow and form data validation through the search values and the predefined policies for a targeted participant for the workflow and the behavior as defined in XForms for validation.

Typically, when a mobile-form application template is developed utilizing the mXDesigner application **120**, the user information, groups, and access rights are generated as well. However, as the access rights change over time, the end-user administrator can adjust the access rights, users, or groups accordingly. This allows the end-user’s IT department to manage their content and resources in a secure, desirable, and efficient manner.

The mXDesigner application **120** allows custom-built mobile-form application templates available on a thick or a thin client. It may also enable a forms designer to define all aspects of the customizable mobile-form application template, target mobile devices, associate a test environment where the customizable mobile-form application templates can be tested, associate business workflow, form navigation, behavior, data capture and define how the customizable mobile-form application templates can be procured and how they can be distributed, updated, or revoked from privileged users of the portal **22**.

The server **19d** in this example includes a customization module **130**, a template forms module **132** and a mobile-form application distribution module **134**. The customization module **130** includes APIs to interface with the portal **22** and edit customizable mobile-form application templates to create customized mobile-form applications. The template forms module **132** manages the customizable mobile-form application templates created from the template design station **102** and makes the customizable mobile-form application templates available to the customization module **130**. The mobile-form application distribution module **134** is coupled to the customization module **130** and the template forms module **132** and makes customized mobile-form applications available to mobile devices such as the mobile devices **18a-f** in FIG. 1. It is to be understood that the different modules **130-134** may be distributed to other servers and the subfunctions of each module **130-134** may be divided between other servers.

The mobile-form application used by the mobile devices **18a-f**, according to one example, are specified in XML-based forms application definition markup language based on the W3C XForms specification to define a rich presentation of forms rendered in a Graphical User Interface (GUI) by the mobile forms application thick or thin-Client. Some enhancements have been made to extend the XForms schema to make it more efficient for mobile-form applications, as well as to support layout of form controls on mobile devices, and integrating routing of forms between users in a mobile-form application. An XML-based policy model is utilized by the mobile-form applications to define application and form states, workflow, validations, conditions, and actions to be processed for the life cycle of a new or updated form data instance. The policy model defines how the form data is managed (e.g., transformation and validation of data, publication of data to targeted resources, publication of data based on the type network connection, notifications and

alerts to users based on form actions and events, etc.) and distributed, as well as to whom (people, systems, resources, etc.) it is distributed.

As discussed above, the mobile extensible forms markup language (mXForms) used in the mobile-form applications is based on the XForms W3C recommendation. The mXForms markup language defines how to render rich GUIs on-line or off-line for mobile devices, and display, update and captures data. mXForms and XForms distinctly define the presentation definition (look and feel), the format of the data captured, form controls, and the behavior of the forms-based application (e.g., data validation, navigation, workflow, actions, etc.). The mXForms language can fully leverage the limited display and functionality (including native and external peripherals—e.g., barcode scanner, GPS module, etc.) of some of the targeted mobile devices. Multiple views or mobile forms applications may be required to complete the data capture of a forms-based application, including support for contextual (e.g., dynamic) views or interaction with the form (e.g., Y happens only if the user has selected X in the form). Unique form controls are also needed to display, add, edit, and delete repeating line items on such limited devices. The markup language also affords for creation of unique form controls that future business processes may require. These multiple views and form controls can be used on- or off-line, via thin/thick clients on mobile devices that are OS-enabled.

With the system 10, a user is able to go to access a “self-serve” website via the portal 22 in FIG. 1 and select a pre-built mobile-form application or applications to make available to mobile devices such as the mobile devices 18a-f. Alternatively, the user may use a wizard or interface to define and build a new customized mobile-form application via the portal 22. The mobile-form application template or new build interface is displayed with default settings that are ready for use and customization. Before making the customized mobile-form application available to users of mobile devices such as the mobile devices 18a-f in FIG. 1, the user is able to view the default settings of the customizable mobile-form application template and adjust certain design or data elements to create a customized mobile-form application via the portal 22.

The customization module 130 interfaces with the portal server 20 to provide a web-based interface such as a webpage over the portal 22. Thus a user may use a browser enabled device to access the webpage and design and customize a mobile-form application. Specifically, the web based interface for mobile-form application customization allows actions such as: 1) Uploading logos, images or custom graphics; 2) Choosing which data fields will be visible on the form; 3) Defining the “workflow” in the form (e.g. if yes to question 2 then go to question 5); 4) Altering or deleting default data field labels; 5) Specifying which data fields are mandatory or have constraints (e.g. floor, ceiling, type of data entered); 6) Editing information contained in a drop down list; 7) Choosing specific types of data capture fields (e.g., text entry, 5 point scale, yes/no etc); 8) Adding mobile device specific functionality to the form (e.g., audio recording or digital picture); and 9) Adding new or moving form controls and their labels.

The mobile-form applications derive the customization based on groups of files which are used to define the customized aspects of the mobile-form application. The user of the interface alters these various files in order to create the customized mobile-form application. FIG. 3A is a block diagram of an example file structure for storage and access of the files necessary to support mobile-form applications.

The file structure is used to manage the support files required by mobile-form applications. A form solution folder 300 includes a form documents folder 302, an attachments folder 304 and a general mobile-form application folder 306. The form documents folder 302 includes documents such as a user-guide for the mobile-form applications. The attachments folder 304 contains data files relating to attachments to the mobile-form applications such as video or audio files.

The general mobile-form application folder 306 contains a specific mobile-form application folder 308. It is to be understood that a specific-mobile form application folder similar to the folder 308 and its contents is created for each unique mobile-form application, but only the folder 308 is shown in this example. The specific mobile-form application folder 308 includes a managed list folder 310, a resources folder 312 and a general customizations folder 314. The general customizations folder 314 includes a set of customization file(s) 316, a set of style sheet file(s) 318, a set of data termination configuration file(s) 320 and a set of localization file(s) 322. Each set of files 316-322 is unique for each customized mobile-form application stored on the server 19d.

The managed list folder 310 includes managed lists files which the customized mobile-form application uses to interface with external data sources. Typically there files are used to provide pre-populated data within a mobile-form application. The resources folder 312 includes files for providing the customized mobile-form application with logos, images or custom graphics such as the branding images when the customized mobile-form application is being rendered on the mobile device.

The general customization folder 314 generally includes meta-data about what will be customized on the customized mobile-form application. The files in the general customization folder 314 provide a central view of all of the customizations that need to be applied to the customized mobile-form application. The customization file(s) 316 contain(s) information about which localization, style sheet, data termination, managed list and resources that will need to be applied to the customized mobile-form application. When applying customizations it will be the name of the customization folder 314 that the end user will be selecting and applying.

The style sheet file(s) 318 provide a means of changing the look-and-feel aspects of the mobile-form application. This may include colors, fonts, control appearance etc. The style sheet file(s) 318 will also provide the functionality to have skip logic, hide or show controls, etc. The data termination configuration file(s) 320 provide the means of integrating published data instances into back-end applications such as the Salesforce.com application. The localization file(s) 322 provide a means of delivering a single application that can have multiple locals applied to it. The localization file(s) 322 also provide allowing the customization of the actual contents of the mobile-form application (for example allowing a user to change a field label).

An alternative file structure for the mobile-form applications is shown in FIG. 3B. The file structure in FIG. 3B creates a new folder for each new customization to the mobile-form application. Thus, specific folders would contain each of the different types of files 316-322 in FIG. 3A and only the specific folder would be changed if the specific file was changed. In contrast, the file structure in FIG. 3A requires the entire customizations folder 314 to be changed if any of the files 316-322 are changed as a result of the customization process. A form solution folder 350 includes a form documents folder 352, an attachments folder 354 and

a general mobile-form application folder **356**. The general mobile-form application folder **356** contains a specific mobile-form application folder **358**. The general mobile-form application folder **358** includes a managed list folder **360**, a resources folder **362** and a customizations folder **364**, a style sheets folder **366**, a localization folder **368** and a data termination configuration folder **370**. In this structure, all of the files **316-322** in FIG. 3A for a customized mobile-form application are stored in the respective folders **364-370**.

Once the customization is complete, the mobile-form application may be installed onto the mobile devices **18a-f** via the Explorer Client **12** in FIG. 1. The interface provided by the mobile-form application will appear just as the user created it from the portal webpage via the portal server **20**. The user is also able to go to the webpage via the portal **22** to view the data records that were created by use of the customized mobile form application. The web view of the data also reflects any customization of the mobile-form application (e.g., selected data fields will be displayed, user specific field labels, logos, etc.). Thus, the web interface provides a mechanism for the user to alter a pre-built mobile-form application template to meet specific needs and provide a customized mobile-form application. Several approaches may be used to access the files described with respect to FIGS. 3A-3B above to support the customized mobile-form application.

In one approach, the server **19d** performs the extraction of the information contained within the customization file, then the transformation of the style sheet file, and the localization files on the basic mobile-form application. The extraction of information is triggered by a web-service call via the Explorer Client **12** from the mobile device **18e** in FIG. 2. This approach allows the performance of the form rendering application **112** in FIG. 2 to remain the same regardless of running customized or standard mobile-form applications. Minimal changes are necessary to the form rendering application **112** and thus backwards compatibility may be maintained. However, when selecting configurations to apply to a mobile-form application, a network connection will be required in order to make a call to the server **19d** which then applies the transform. The transformed mobile-form application will also have to be downloaded to the mobile device **18e** and then consumed by the mobile form application **112**.

A second approach uses the form rendering application **112** to perform the transformation and substitution of the configuration and localization files at run-time. This approach provides a disconnected model when applying existing configurations to the mobile-form application and provides less dependence on the server **19d**. However, this approach requires greater initial loading on the mobile device as well as increased storage requirements for the additional files. Of course it is to be understood that a combination of files on the server and the mobile-form application **112** could also be employed.

The portal server **20** provides portal functionality to the user via any browser enabled device such as the devices **18a-g** in FIG. 1. The portal **22** is available to a user and makes visible the mobile-form application templates that are available on the application server **19d**. The portal **22** also provides a web-based interface to customize certain design elements of those applications. An example of a web-based portal interface **400** is shown as a webpage in FIG. 4A. The web-based interface **400** is displayed via a web-browser on a browser enabled device such as the personal computer **18g** in FIG. 1 accessing the portal **22**. The web-based interface **400** includes residual controls for different functions available from the portal **22** such as a user identification and log

in area **402**, a links area **404** and an information area **406**. The links area **404** contains links to navigate other webpages supported by the portal **22** which may include a personalized home page link **408**, an account link **410**, a "my forms" link **412**, a forms forum link **414** and a forms showcase link **416**. The home page link **408** allows the display of an introduction webpage which includes personal functions to the user such as viewing messages. The account link **410** allows the display of an administrative webpage which includes data relating to the user account and controls from editing such data. The forms form link **414** displays a webpage including comments and messages posted by other users regarding the mobile-form applications. The forms showcase link **416** allows the display of a webpage containing a catalog and description of available mobile-form applications.

In this example, the user has selected the "my forms" link **412** which results in the display of a forms details area **420**. A forms list area **422** includes a display of available mobile-form applications to the user and is a default area on any webpage accessed through the portal **22**. In the forms list area **422**, the user may search for mobile-form applications via name or part of a name using a search box **424**. In this example, the available forms are accessible via the type of form represented by a timesheet icon **426**, a weekly expense icon **428**, a user survey icon **430**, a forms survey icon **432** and a lead generation icon **434**. The icons **426-434** display the number of form applications available to the user in each category as well as the number of times the form application has been used. Selecting, an icon such as the lead generation icon **434** will result in the display of a window showing the data collected via the represented form application. A forum area **440** is also available to provide a user access to postings from other users regarding forms.

The forms details area **420** in this example includes a menu choice area **450** that includes a personalize or customize selection **452**, an install selection **454**, a view data selection **456** and an information selection **458**. The install selection **454** opens a window to give the user options to install the completed mobile-form application to specific mobile devices and to make available the mobile-form application to users of the mobile devices such as the mobile devices **18a-f** in FIG. 1. The view data selection **456** opens a window to show data collected by previously created customized mobile-form applications associated with the user. The information selection **458** opens a window for the user to obtain help information.

In this example, the user has selected the personalize selection **452** which results in the display of a customization interface **460**. In this example, the customization area **460** displays a mobile-form application template directed toward collecting data on sales leads. The lead generation mobile-form application in this example may be used to record data from sales leads on a mobile device. The customization interface **460** includes a form generation information area **462**, a field selection area **464**, and a file management area **466**. The form generation information area **462** includes a date downloaded field **470**, a last modified field **472**, a team field **474**, and a records field **476**. The fields **470**, **472**, **474** and **476** are used to identify and classify a mobile-form application template created by the template design station **102** in FIG. 2 and its availability to the user. Of course, different types of fields may be used to identify and classify form definition files for mobile-application forms, other than those in this example.

FIG. 4B is a screen shot of a data viewing area **480** which is displayed on the web-based interface **400** when an icon in the forms list area **422** or the view data selection **456** in the

menu choice area **450** is activated. The data viewing area **480** includes a filtering control area **482** and a data summary area **484**. The filtering control area **482** includes various filters which may be applied to data collected by the selected mobile-form application. The data summary area **484** has a records tab **486** and a data tab **488**. The records tab **486** has been selected in FIG. 4B and results in a records summary table **490** which shows the name of the data record, the creation date and the notification time of each record submitted by the mobile-form application. The specific data related to each report may be viewed by selecting the data tab **488**. The data summary area **484** has various controls to allow the export, printing and creation of a data record.

FIG. 5A is a close-up view of the field selection area **464** and the file management area **466** of the customization interface **460** in FIG. 4. As seen in FIG. 5A, the field selection area **464** contains a field name column **500** and a field type column **502**. The field name column **500** includes selections of field names **504** which may be included in the customized mobile-form application such as "Name of Contact," "Title," "Contact Details," "Organization," "Industry," "Company Size," "Sales Representative Name," "Priority," etc. Certain field names such as "Contact Details" include subfields such as address, telephone, cellular, e-mail, etc. Each of the field names **504** has a check box **506** which allows selection of the field for inclusion in the customized mobile-form application by the user. The field type column **502** includes different field types **508** which may be selected to correspond to each field name **504**. The field types are listed in pull down menus and allow the formatting of the data to be entered in each selected field name **504**. For example, field types may include text, multiple choice, short text, numerical scale, etc. For certain field types, such as a multiple choice field type **510** or a short text field type **512**, additional pull down menus are available for different formatting alternatives for the particular field type (i.e., number of choices for a multiple choice selection).

In this example, a user is able to customize a mobile-form application that captures sales lead information. The check boxes **506** determine which fields will appear on the mobile-application form. In the example interface **500**, the "Title" field is marked OFF (via the lack of a check mark in the check box **506**), so it will not appear in the completed mobile-application form. Correspondingly, the "Name of Content," "Contact Details," "Organization," "Industry," "Company Size," "Sales Representative Name" and "Priority" fields have been selected and will appear on the completed customized mobile-form application. A user may change field names by clicking on the label name of the field name **504**. A text entry prompt will appear, and the user can type a different label to change the name of the field.

A customize column **520** includes a text link **522** which may be selected to allow a user to enter text data in conjunction with the field type. For example, a user has selected the field type labeled "enable 'assign' to forwarding" in FIG. 5A that allows selection of an individual to follow up on the entered lead. FIG. 5B is a screen shot which shows the resulting pop-up assignment list box **530** which appears when the corresponding text link **522** is selected. The box **530** allows the creation of a drop down list—in this case an "assignment" list (e.g., the employees of the organization who may have the responsibility to follow up a lead). The user enters the potential choices in the text box **530**. The choices may be saved via a save button **532** or canceled via a cancel button **534**. The choices will appear as selections when a user of the custom mobile-form application wishes to assign the lead to one of the selections.

The example mobile-form application shown in FIG. 5A is a form that would probably be customized only once because of the nature of the purpose of the form (i.e., recording sales leads). However, other types of forms, such as a survey form, could potentially be changed on a periodic basis such as every day or every week. The ease of changes via a web browser enables users to make the needed changes without requiring any programming. Changes may also be made often if needed, with an altered form re-installed on a mobile device within a few minutes via the server **19d** and the Explorer Client **12**.

Additional customizable mobile-form application templates may be obtained via the controls in the file management area **466**. The file management area **466** includes a title field **540**, a load option **542**, a new form option **544** and a clear option **546**. The title field **540** includes a drop down menu which shows the names of all the mobile-form applications which are available to the user. The load option **542** allows a user to load a selected mobile-form application. The new form option **544** allows the creation of a new form via the controls in the field selection area **464**. The clear option **546** clears any existing displayed mobile-form applications.

Once the fields have been selected, a user may use the controls to retain and store the completed customized mobile-form application. A save option **550** saves the mobile-application form under the same file name. A save as option **552** saves the mobile-application form under a new file name which may be entered in a text field **554**.

Another example of customizing a mobile-form application through the portal **22** is shown in FIG. 6A which is a screen shot of a second customization interface **600** used to create a customized survey based mobile-form application. The survey based mobile-form application in this example is more open-ended allowing for greater user design in contrast the lead generation mobile-form application in FIG. 5A which is more limited to selecting and altering default fields on the template. The customization interface **600** in FIG. 6A is displayed in the customization area **420** in FIG. 4A when a survey type customizable mobile-form application template is selected by the user. The customization interface **600** includes a question column **602** and an answer type column **604**. The question column **602** includes a series of questions **606** which include text fields **608** having the text of the questions to be asked in the survey. The content of the text fields **608** are customizable by the user by entering text in the text field **608** which will appear as questions in the mobile-form application. An add new question option **610** allows a user to add a new question to the survey.

The answer type column **604** includes different selections of the types of answers which will be made available to the mobile-application form in response to a certain question. The options in this example include a 1-5 scale selection **620**, a yes/no selection **622**, a text selection **624**, and a choice selection **626**. It is to be understood that other types of answer selections may be displayed in the answer type column **604** including selections that are specialized by the user and/or the designer of the mobile-application form template. Each of the selections **620-626** may be selected by a selection button **628**. Each question has one answer type selected. The choice selection **626** when selected enables the display of a selection editor icon **630** which allows further customization of answer choices. A voice selection **632** may be enabled by selected a check box **634**. The voice selection **632** allows a user to input voice responses to the question which will be stored as data on the mobile device using the mobile-form application in conjunction with the form rendering application **112** in FIG. 2.

FIG. 6B shows the result when a selection editor icon 630 is selected for a question in FIG. 6A. FIG. 6B shows a pop-up window 640 which includes function for a selection editor. The pop-up window 640 includes an enable pull down option 642 which may be selected via a check box. A series of choices are then offered in text boxes 644 as selectable answers to the question, which may be edited by the user. The choices may be saved via a save button 650 or canceled via a cancel button 652.

FIGS. 7A-7E are screen shots of a display 700 of a mobile device such as the mobile device 18e in FIG. 2 which are rendered by the form rendering application 112 in operating the customized sales lead mobile-form application shown in FIG. 5A. FIG. 7A shows a start up screen 702 for the customized sales lead mobile-form application. The start up screen 702 includes a new contact button 704. Selecting the new contact button 704 allows data fields to be displayed according to the customizations supplied in the customization interface 460 shown in FIG. 5A. For example, a first input screen 710 is shown on the display 700 in FIG. 7B. The input screen 710 includes a name field, an address field, a telephone field, a cellular field, an e-mail field and a web field which were selected by the customization interface 460 shown in FIG. 5A. Other potential default data fields available such as the title field, the fax field and the instant messaging field are not shown in the input screen 710 because they were not selected by the customization interface 460. The user can navigate to different screens using a back button 712 and a next button 714.

FIG. 7C is a screen shot of a second input screen 720 appearing on the display 700 that contains an organization/company field, an industry field and a size field as designated by the customization interface 460 in FIG. 5A. The industry field data field includes a drop down menu 722 which will include customized choices selected and entered by the user via the customization interface 460 in FIG. 5A.

FIG. 7D is a screen shot of a third input screen 730 appearing on the display 700 that includes an assign to field and a representative field which were selected by the user via the customization interface 460 in FIG. 5A. The assign to field also includes a drop down menu 732 which includes the choices entered by the user via the pop-up assignment list box 530 in FIG. 5B.

After all the fields are completed, the collected data may be summarized by the mobile-form application. FIG. 7E is a screen shot of a summary screen 740 appearing on the display 700. The summary screen 740 includes a text box 742 which shows the collected data from the fields in the input screens 710, 720 and 730. The summary screen 740 includes a submit button 744 which allows a user to submit the collected data to be saved on the mobile device, to be sent to a central database such as the database 19a or a server 19d to make the data available via a web server such as the portal server 20. Of course, any combination of these options or all of these options may be used to record the data which may be designated by the customization interface.

FIGS. 8A-8C are screen shots of a display 800 of a mobile device such as the mobile device 18e in FIG. 2 which are rendered by the form rendering application 112 in operating the customized survey mobile-form application shown in FIG. 5A. Each of the input screens correspond to a different question that was created using the customization interface 600 in FIG. 6A. For example FIG. 8A shows an input screen 802 appearing on the display 800 which asks the second question shown in the question area 602 in the customization interface 600 in FIG. 6A. A group of selectable answers 804 appear with corresponding check boxes to record the user

answers. The selectable answers 804 are created by the user via the selection editor icon 630 of the customization interface 630 in FIG. 6B. The user may navigate through different input screens (questions) via a back button 806 and a next button 808.

FIG. 8B shows another example input screen 810 appearing on the display 800 which asks the sixth question shown in the question area 602 in the customization interface 600 in FIG. 6A. A group of selectable answers appear in a scrolled list 812. The selectable answers 812 are created by the user via the selection editor icon 630 of the customization interface 600 in FIG. 6B. Unlike the input screen 802 in FIG. 8A, only one answer may be selected from the scrolled list 812.

FIG. 8C shows another example input screen 820 appearing on the display 800 which asks the third question shown in the question area 602 in the customization interface 600 in FIG. 6A. Since the user has designated an answer type of a scale 1-5 in the customization interface 600, a selectable scale graphic 822 is displayed. The user has also selected voice response in the voice column 634 for this question in the customization interface 600 so a voice response button 824 is displayed in FIG. 8C. Selecting the voice response button 824 allows the mobile device user to record a response to the question.

FIG. 9 is a flow diagram 900 of the process used by the server 19d in order to design a customizable form and transmit the updated form to a mobile device such as the mobile device 18e in FIG. 2. The flow diagram 900 representative of example machine readable instructions for implementing the modules 130, 132 and 134 of FIG. 2. In this example, the machine readable instructions comprise an algorithm for execution by: (a) a processor, (b) a controller, and/or (c) any other suitable processing device. The algorithm may be embodied in software stored on a tangible medium such as, for example, a flash memory, a CD-ROM, a floppy disk, a hard drive, a digital versatile disk (DVD), or other memory devices, but persons of ordinary skill in the art will readily appreciate that the entire algorithm and/or parts thereof could alternatively be executed by a device other than a processor and/or embodied in firmware or dedicated hardware in a well known manner (e.g., it maybe implemented by an application specific integrated circuit (ASIC), a programmable logic device (PLD), a field programmable logic device (FPLD), discrete logic, etc.). For example, any or all of the customization module 130, the template forms module 132 and the mobile-form application distribution module 134 could be implemented by software, hardware, and/or firmware. Also, some or all of the machine readable instructions represented by the flowchart of FIG. 9 may be implemented manually. Further, although the example algorithm is described with reference to the flowchart illustrated in FIG. 9, persons of ordinary skill in the art will readily appreciate that many other methods of implementing the example machine readable instructions may alternatively be used. For example, the order of execution of the blocks may be changed, and/or some of the blocks described may be changed, eliminated, or combined.

The customizable mobile-form application template is created by the template design station 102 in FIG. 2 in step 902. The customizable mobile-form application template is assigned default features for data collection such as fields, look and feel, mobile device functionality, sequence flow, access to external data, etc. in step 904. The range of permissible users is then assigned to the customizable mobile-form application template in step 906. The com-

pleted customizable mobile-form application template is then deployed via the deployment tool **124** in FIG. **2** to the server **19d**.

The template forms module **132** receives the mobile-form application template in step **908** and stores the related files and folders. A web-enabled device user then logs into the system **10** in step **910**. The user may select the customizable mobile-form application template from all accessible templates stored on the server **19d** in step **912**. The user then performs customization of the mobile-form application template to create a customized mobile-form application in step **914**. As explained above, the customization process is managed by the portal server **20** in conjunction with the customization module **130** in FIG. **2**. The web-interface such as the web-based interface **400** in FIG. **4A** allows a user options to select different data fields for inclusion in the customized mobile-form application. The user then assigns the permissions for distributing the customized mobile-form application in step **916**. The server **19d** stores the folders and files associated with the customized mobile-form application in step **918**. The mobile-form application distribution module **134** then distributes the customized mobile-form application via the Explorer Client **12** through the Gateway **14** to the permitted mobile devices in step **920**.

FIG. **10** is a block diagram that illustrates a computer system **1000** upon which embodiments of the invention may be implemented. Computer system **1000** includes a bus **1002** or other communication mechanism for communicating information, and a processor or processors **1004** coupled with bus **1002** for processing information. Computer system **1000** also includes a main memory **1006**, such as a random access memory (RAM) or other dynamic storage device, coupled to bus **1002** for storing information and instructions to be executed by processor **1004**. Main memory **1006** also may be used for storing temporary variables or other intermediate information during execution of instructions to be executed by processor **1004**. Computer system **1000** further includes a read only memory (ROM) **1008** or other static storage device coupled to bus **1002** for storing static information and instructions for processor **1004**. A storage device **1010**, such as, for example, a magnetic disk or optical disk, is provided and coupled to bus **1002** for storing information and instructions.

Computer system **1000** may be coupled via bus **1002** to a display **1012**, such as a cathode ray tube (CRT), liquid crystal display (LCD), or may be a handheld active or passive display, for displaying information to a computer user. An input device **1014**, including alphanumeric and other keys, is coupled to bus **1002** for communicating information and command selections to processor **1004**. Other user input devices include cursor control **1016** or microphone **1017**. Cursor control **1016** may include one or more of any number of devices, such as, for example, a mouse, a trackball, or cursor direction keys for communicating direction information and command selections to processor **1004** and for controlling cursor movement on display **1012**. The cursor control **1016** typically has two degrees of freedom in two axes, a first axis (e.g., x) and a second axis (e.g., y), allowing the device to specify positions in a plane.

Execution of sequences of instructions contained in main memory **1006** causes processor **1004** to perform the process steps described above. One or more processors in a multiprocessor arrangement may also be employed to execute the sequences of instructions contained in main memory **1006**. In alternative embodiments, hard-wired circuitry may be used in place of or in combination with software instruc-

tions and it is to be understood that no specific combination of hardware circuitry and software are required. Instructions may be provided in any number of forms such as source code, assembly code, object code, machine language, compressed or encrypted versions of the foregoing, and any and all equivalents thereof. "Computer-readable medium" refers to any medium that participates in providing instructions to processor **1004** for execution and "program product" refers to such a computer-readable medium bearing a computer-executable program. The computer usable medium may be referred to as "bearing" the instructions, which encompass all ways in which instructions are associated with a computer usable medium. Computer-readable mediums include, but are not limited to, non-volatile media, volatile media, and transmission media. Non-volatile media include, for example, optical or magnetic disks, such as storage device **1010**. Volatile media include dynamic memory, such as main memory **1006**. Transmission media include coaxial cables, copper wire and fiber optics, including the wires that comprise bus **1002**. Transmission media can also take the form of acoustic or light waves, such as those generated during radio frequency (RF) and infrared (IR) data communications. Common forms of computer-readable media include, for example, a floppy disk, a flexible disk, hard disk, magnetic tape, any other magnetic medium, a CD-ROM, DVD, any other optical medium, punch cards, paper tape, any other physical medium with patterns of holes, a RAM, a PROM, and EPROM, a FLASH-EPROM, any other memory chip or cartridge, a carrier wave as described hereinafter, or any other medium from which a computer can read.

Various forms of computer readable media may be involved in carrying one or more sequences of one or more instructions to processor **1004** for execution. For example, the instructions may initially be borne on a magnetic disk of a remote computer. The remote computer can load the instructions into its dynamic memory and send the instructions over a telephone line using a modem. A modem local to computer system **1000** can receive the data on the telephone line and use an infrared transmitter to convert the data to an infrared signal. An infrared detector coupled to bus **1002** can receive the data carried in the infrared signal and place the data on bus **1002**. Bus **1002** carries the data to main memory **1006**, from which processor **1004** retrieves and executes the instructions. Instructions received by main memory **1006** may optionally be stored on storage device **1010** either before or after execution by processor **1004**.

Computer system **1000** may also include a communication interface **1018** coupled to bus **1002** to provide a two-way data communication coupling to a network link **1020** connected to a local network **1022**. For example, communication interface **1018** may be an integrated services digital network (ISDN) card or a modem to provide a data communication connection to a corresponding type of telephone line. As another example, communication interface **1018** may be a local area network (LAN) card to provide a data communication connection to a compatible LAN. Wireless links may also be implemented. In any such implementation, communication interface **1018** sends and receives electrical, electromagnetic or optical signals that carry digital data streams representing various types of information.

Network link **1020** typically provides data communication through one or more networks to other data devices. For example, network link **1020** may provide a connection through local network **1022** to a host computer **1024** or to data equipment operated by an Internet Service Provider (ISP) **1026**. ISP **1026** in turn provides data communication

services through the worldwide packet data communication network, now commonly referred to as the “Internet” **1028**. Local network **1022** and Internet **1028** both use electrical, electromagnetic or optical signals that carry digital data streams. The signals through the various networks and the signals on network link **1020** and through communication interface **1018**, which carry the digital data to and from computer system **1000**, are exemplary forms of carrier waves transporting the information. Thus the processing required by method of the invention described by way of example herein may be implemented on a local computer utilizing storage device **1010** or may be implemented, for example, on a LAN or over the Internet.

Computer system **1000** can send messages and receive data, including program code, through the network(s), network link **1020**, and communication interface **1018**. In the Internet example, a server **1030** might transmit a requested code for an application program through Internet **1028**, ISP **1026**, local network **1022** and communication interface **1018**. The received code may be executed by processor **1004** as it is received, and/or stored in storage device **1010**, or other non-volatile storage for later execution. In this manner, computer system **1000** may obtain application code in the form of a carrier wave.

This application incorporates by reference, in its entirety, the following U.S. patent applications: “Mobile Core Client Architecture,” by Marc Chene, Liam Peyton, Kevin McGuire, and Brant Drummond, 60/884,785, “Methods And System For Orchestrating Services And Data Sharing On Mobile Devices,” by Marc Cherie, Liam Peyton, Kevin McGuire, and Brant Drummond, 60/880,328, and “Real Time Records And Dashboards From Aggregated Mobile Data,” by Mitch A. Brisebois, Arjun Mehta, Kevin McGuire, and Cyril Soga, 60/880,176, each of which is being filed concurrently herewith on Jan. 12, 2007. Each of the aforementioned U.S. patent applications are assigned to or under obligation of assignment to TrueContext Corp. of Ottawa, Canada.

This application expressly incorporates herein by reference, in its entirety, U.S. Published Patent Application Nos. US2006161646, entitled “Policy-Driven Mobile Forms applications,” published Jul. 20, 2006, US20060080397, entitled “Content Management Across Shared, Mobile File Systems,” published Apr. 13, 2006, and 20060089938, titled “Distributed Scalable Policy Based Content Management,” published on Apr. 27, 2006, each of which are assigned to TrueContext Corp. of Ottawa, Canada. This application also expressly incorporates herein by reference, in its entirety, International Publication No. WO 2004/013782 A1, titled “Contextual Computing System,” published on Feb. 12, 2004, which is assigned to TrueContext Corp. of Ottawa, Canada.

While the presently disclosed concepts have been described with reference to one or more particular embodiments, those skilled in the art will recognize that many changes may be made thereto without departing from the spirit and scope of the presently disclosed concepts. For example, although the above examples relate to a web-based interface for producing customized mobile-form applications, such an interface may be produced via a stand-alone work station and the resulting forms may be provided to the mobile devices. Any combination and/or sub-combination of the examples, embodiments, aspects, claims, methods, acts, processes, claim elements, or components disclosed herein, however termed, are expressly contemplated as falling within the present concepts. For example, although various aspects of the present concepts are set forth in the appended

claims, wherein the dependent claims relate back to selected preceding claims, including the independent claim, it is to be understood that each of the dependent claims may properly depend from any of the preceding claims, to the extent not logically excluded, in accord with aspects of the present concepts. Thus, for example, the present concepts expressly include every possible combination of dependent claims with their respective independent claim, regardless of stated dependency. Further, the presently disclosed concepts are considered to include, without limitation, any combination and/or sub-combination of the disclosed examples, embodiments, aspects, claims, methods, acts, processes, claim elements, or components disclosed herein with the examples, embodiments, aspects, claims, methods, acts, processes, claim elements, or components disclosed in the references and applications incorporated by reference herein.

What is claimed is:

1. A method of customizing a mobile-form application to manage the sharing of data between a plurality of mobile devices, the method comprising:

selecting by a user, a mobile-form application template from a plurality of mobile-form application templates stored in a server;

customizing by the user one or more elements of said selected mobile-form application template to create a customized mobile-form application, wherein the step of customizing includes using wizards and a set of form controls that can be dragged and dropped or defined on a single or multiple form view;

distributing by the server said customized mobile-form application to a plurality of mobile devices via a gateway to collect and display a plurality of data; and routing said data to the plurality of mobile devices based on one or more policies and user access permissions that determine in what sequence forms data is shared and updated based, in part, on network conditions;

wherein one of the set of form controls comprises a list of values, the list of values stored on the server, the gateway updating the list of values on the plurality of mobile devices opportunistically based on the available network bandwidth and the size of the list.

2. The method of claim 1, wherein said policies comprise an update function selecting the data to update by differencing at byte-level.

3. The method of claim 1, wherein said devices include mobile devices and storage devices, and data on the mobile devices is synchronized via the gateway with data on the storage devices.

4. The method of claim 1, wherein said mobile-form application includes at least one data field having an associated label corresponding to at least one of said elements, and said customizing includes specifying one of said labels in order to assist data collection corresponding to one of said elements.

5. The method of claim 1, wherein said customizing includes specifying a default value associated with an element.

6. The method of claim 1, wherein said customizing includes specifying whether data entry in an element is mandatory.

7. The method of claim 1, wherein said customizing includes choosing a specific type of data format for an element.

8. The method of claim 1, wherein said customizing includes an option of adding a logo, an image or a custom graphic or a combination thereof to the customized mobile-form application.

25

9. The method of claim 1, wherein said customizing includes specifying the order in which elements are displayed to the user for data collection on the customized mobile-form application.

10. The method of claim 1, wherein said customizing includes associating a mobile-device-specific functionality with an element for data collection in the customized mobile-form application.

11. A system for customizing a mobile-form application to manage the sharing of data between a plurality of mobile devices, the system comprising:

a mobile-form application template selected from a plurality of mobile-form application templates stored in a server;

said selected mobile-form application template being customized by a user using a computing device to create a customized mobile-form application, including using wizards and a set of form controls that can be dragged and dropped or defined on a single or multiple form view;

said customized mobile-form application being distributed by the server to a plurality of mobile devices via a gateway to collect and display a plurality of data; and said data being routed to the plurality of mobile devices based on one or more policies and user access permissions that determine in what sequence forms data is shared and updated based, in part, on network conditions;

wherein one of the set of form controls comprises a list of values, the list of values stored on the server, the gateway updating the list of values on the plurality of mobile devices opportunistically based on the available network bandwidth and the size of the list.

12. The system of claim 11, wherein said policies comprise an update function selecting the data to update by differencing at byte-level.

26

13. The system of claim 11, wherein said devices include mobile devices and storage devices, and data on the mobile devices is synchronized via the gateway with data on the storage devices.

14. The system of claim 11, wherein said mobile-form application includes at least one data field having an associated label corresponding to at least one of said elements, and said customized mobile-form application specifies one of said labels in order to assist data collection corresponding to one of said elements.

15. The system of claim 11, wherein said customized mobile-form application includes a default value associated with an element.

16. The system of claim 11, wherein said customized mobile-form application indicates whether data entry in an element is mandatory.

17. The system of claim 11, wherein said customized mobile-form application further includes a specific type of data format for an element.

18. The system of claim 11, wherein said customized mobile-form application further includes an option of adding a logo, an image or a custom graphic or a combination thereof to the customized mobile-form application.

19. The system of claim 11, wherein said customized mobile-form application identifies the order in which elements are displayed to the user for data collection on the customized mobile-form application.

20. The system of claim 11, wherein said update function comprises data compression.

21. The system of claim 11, wherein said network conditions are selected from the group consisting of: a type of network connection and network availability.

\* \* \* \* \*