(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau

(43) International Publication Date
3 October 2002 (03.10.2002)

PCT

(10) International Publication Number
WO 02/077148 A1

(51) International Patent Classification[7]: C11D 3/42, 3/00

(21) International Application Number: PCT/EP02/03009

(22) International Filing Date: 19 March 2002 (19.03.2002)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
01810310.1 27 March 2001 (27.03.2001) EP

(71) Applicant *(for all designated States except US)*: **CIBA SPECIALITY CHEMICALS HOLDING INC.** [CH/CH]; Klybeckstrasse 141, CH-4057 Basel (CH).

(72) Inventors; and

(75) Inventors/Applicants *(for US only)*: **EHLIS, Thomas** [DE/DE]; Ferdinand-Weiss-Strasse 30, 79106 Freiburg (DE). **HOCHBERG, Robert** [DE/DE]; Goethestrasse 13, 79100 Freiburg (DE). **ROHWER, Hauke** [DE/DE]; Hauptstrasse 68, 79540 Lörrach (DE).

(74) Common Representative: **CIBA SPECIALITY CHEMICALS HOLDING INC.**; Patentabteilung, Klybeckstrasse 141, 4057 Basel (CH).

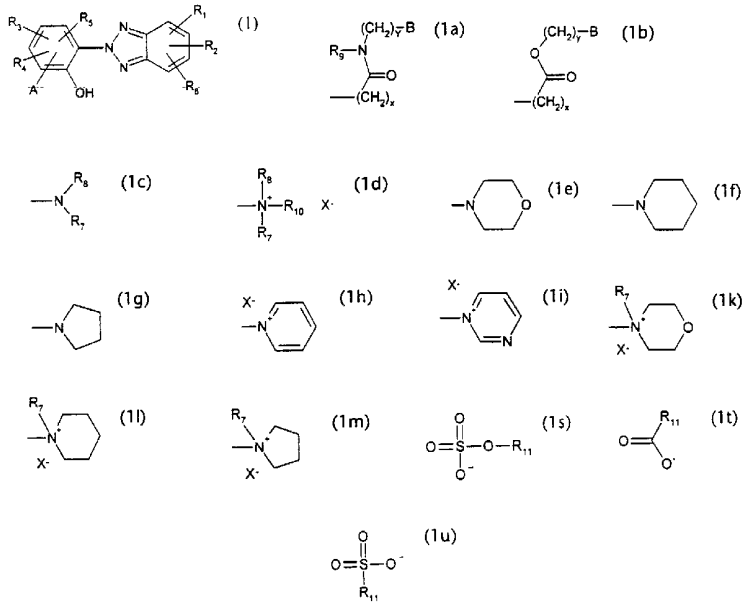
(81) Designated States *(national)*: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZM, ZW.

(84) Designated States *(regional)*: ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

[Continued on next page]

(54) **Title:** FABRIC RINSE COMPOSITION CONTAINING A BENZTRIAZOLE UV ABSORBER



(57) **Abstract:** Disclosed is a fabric rinse composition comprising a) 0.1 to 10 % by weight of a UV absorber of formula(1), wherein A is a radical of formula (1a); B is a radical of formula (1c); (1d); (1e); (1f), (1g); (1h); (1i); (1k); (1l); or (1m); R_1, R_2, R_3, R_4, R_5 and R_6 are each independently of the others hydrogen, C_1-C_{18}alkyl; C_5-C_7-cycloalkyl; halogen; R_9 is hydrogen, C_1-C_{12}alkyl; or C_5-C_7cycloalkyl; R_7, R_8 and R_{10} are each independently of the others hydrogen, C_1-C_{12}alkyl, C_5-C_7cycloalkyl, C_1-C_{12}hydroxyalkyl; X is halogen; a radical of formula (1s); or (1u); sulfate, phosphate, lactate, citrate, tartrate; R_{11} is C_1-C_{12}alkyl; C_5-C_7cycloalkyl or phenyl: x is from 0 to 10; and y is from 1 to 20; b) 5 to 25 % by weight, based on the total weight of the composition of a fabric softener agent; and c) the remainder being substantially water.

WO 02/077148 A1

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Fabric Rinse Composition containing a Benztriazole UV absorber

The present invention relates to a fabric rinse composition containing a benztriazole UV absorber; and to a method of treating textiles with the composition, which method imparts to textile fiber material so treated, in addition to an excellent UV Protecting Factor (UPF) value, and other desirable properties.

It is known that light radiation of wavelengths 280-400 nm permits tanning of the epidermis. Also known is that rays of wavelengths 280-320 nm (termed UV-B radiation), cause erythemas and skin burning which can inhibit skin tanning.

Radiation of wavelengths 320-400 nm (termed UV-A radiation) is known to induce skin tanning but can also cause skin damage, especially to sensitive skin which is exposed to sunlight for long periods. Examples of such damage include loss of skin elasticity and the appearance of wrinkles, promotion of the onset of erythemal reaction and the inducement of phototoxic or photoallergic reactions.

Any effective protection of the skin from the damaging effects of undue exposure to sunlight clearly needs to include means for absorbing both UV-A and UV-B components of sunlight before they reach the skin surface.

Traditionally, protection of exposed human skin against potential damage by the UV components in sunlight has been effected by directly applying to the skin a preparation containing a UV absorber.

One aspect of the desire to increase the level of skin protection against sunlight has been the consideration of additional measures, over and above the direct protection of the skin. For example, consideration has been given to the provision of protection to skin covered by clothing and thus not directly exposed to sunlight.

Most natural and synthetic textile materials are at least partially permeable to UV components of sunlight. Accordingly, the mere wearing of clothing does not necessarily provide skin beneath the clothing with adequate protection against damage by UV radiation. Although clothing containing a deeply colored dye and/or having a tight weave texture may provide a reasonable level of protection to skin beneath it, such clothing is not practical in hot sunny climates, from the standpoint of the personal comfort of the wearer.

There is a need, therefore, to provide protection against UV radiation for skin which lies underneath clothing, including lightweight summer clothing, which is undyed or dyed only in pale shades. Depending on the nature of the dyestuff, even skin beneath clothing dyed in some dark shades may also require protection from UV radiation.

Such lightweight summer clothing normally has a density of less than 200 g/m^2 and has a sun protection factor rating between 1.5 and 20, depending on the type of fibre from which the clothing is manufactured.

The UPF rating of a sun protectant (sun cream or clothing) may be defined as the multiple of the time taken for the average person wearing the sun protectant to suffer sun burning under average exposure to sun. For example, if an average person would normally suffer sun burn after 30 minutes under standard exposure conditions, a sun protectant having an UPF rating of 5 would extend the period of protection from 30 minutes to 2 hours and 30 minutes. For people living in especially sunny climates, where mean sun burn times are minimal, e.g. only 15 minutes for an average fair-skinned person at the hottest time of the day, UPF ratings of about 20 are desired for lightweight clothing.

The selection of a suitable UVA, for use in a method for effecting an increase in the UPF value of a textile fiber material (often referred to as a "UV cutting" treatment method), has to take into account the fact that the treated textile fiber material must satisfy performance criteria in a wide range of areas, such as washfastness, lightfastness and tear resistance, apart from its UPF value.

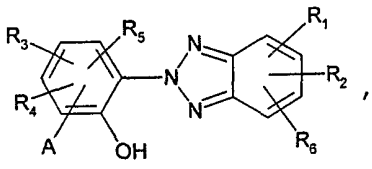
Another major problem for consumers in many parts of the world is the fading of colored fabrics by sunlight (so-called "photo-fading") during wear and during drying. Thus susceptible fabrics in temperature and high latitude regions in addition to those in the tropics can be severely faded. Photo- fading of fabrics is of specific concern to consumers because the contrast between exposed and unexposed areas makes it particularly noticeable.



Surprisingly it was found that the use of specific UV absorbers in a fabric rinse composition imparts enhanced UPF, and simultaneously effectively prevents the photo-fading of said fabric.




Therefore the present invention provides a stable, concentrated fabric rinse composition comprising





fabric rinse composition comprising




a) 0.1 to 10, preferably 0.1 to 5 % by weight of a UV absorber of formula

(1)  , wherein

A is a radical of formula (1a)  ; or (1b)  ;

B is a radical of formula (1c)  ; (1d)  X- ; (1e)  ;



(1f)  ; (1g)  ; (1h)  ; (1i)  ;


(1k)  ; (1l)  ; or (1m)  ;

R_1, R_2, R_3, R_4, R_5 and R_6 are each independently of the others hydrogen, C_1-C_{18}alkyl; C_5-C_7-cycloalkyl; halogen;

R_9 is hydrogen, C_1-C_{12}alkyl; or C_5-C_7cycloalkyl;

R_7, R_8 and R_{10} are each independently of the others hydrogen, C_1-C_{12}alkyl, C_5-C_7cycloalkyl, C_1-C_{12}hydroxyalkyl;

X is halogen; a radical of formula (1s)  ; (1t)  ; or

(1u)  ; sulfate, phosphate, lactate, citrate, tartrate;

R_{11} is C_1-C_{12}alkyl; C_5-C_7cycloalkyl or phenyl;

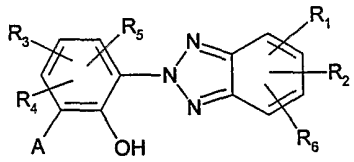
x is from 0 to 10; and

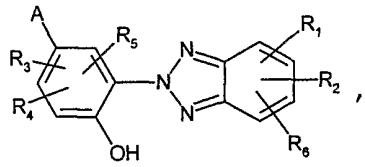
y is from 1 to 20;

b) 5 to 25% by weight, based on the total weight of the composition of a fabric softener agent; and

c) the remainder being substantially water.

The invention preferably relates to the use of a composition, wherein component (a) corresponds to the compounds of formulae

(2)  or



(3)  ,

wherein

R_1, R_2, R_3, R_4, R_5, R_6 and A are as defined for formula (1).

According to the invention there are preferably used as component (a) compounds of formulae (1), (2) and (3) wherein

A is a radical of formula

(1a)  or (1b)  ;

wherein

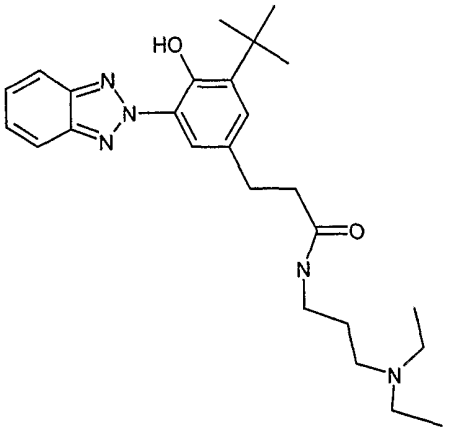
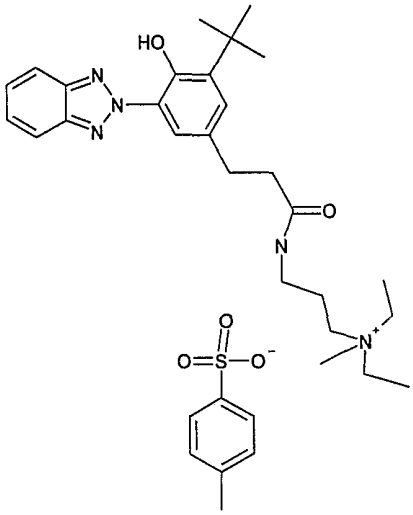
B is a radical of formula (1c); or (1d);and

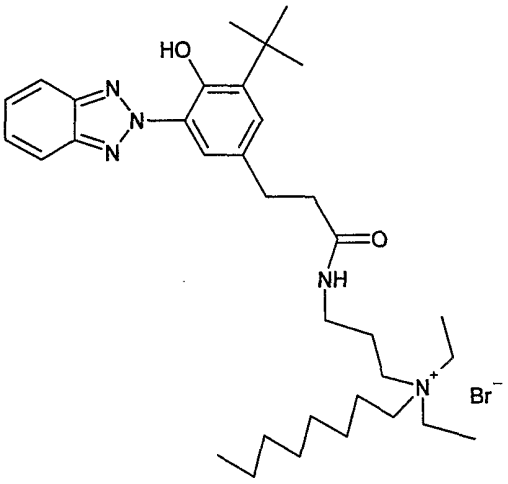
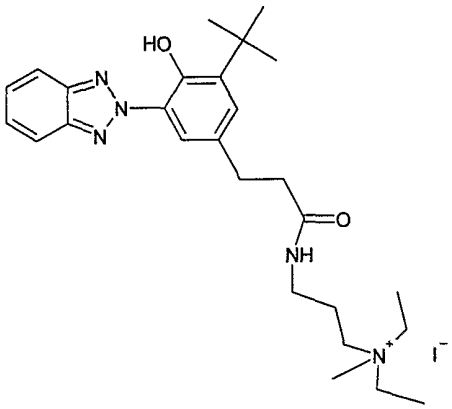
x and y are as defined for formula (1).

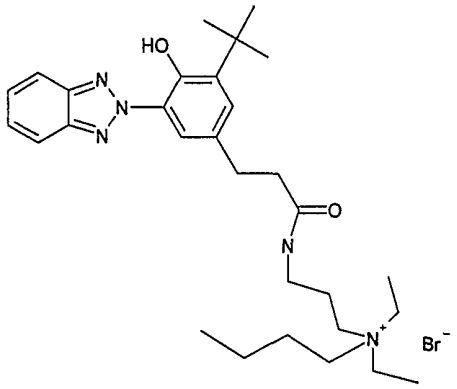
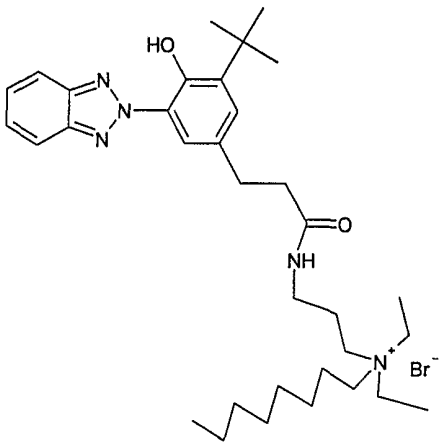
Special preference is given to compounds of formulae (1), (2) and (3) wherein

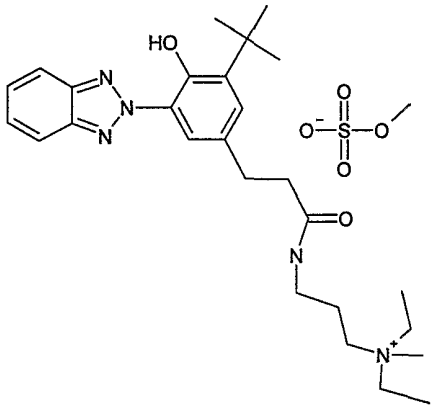
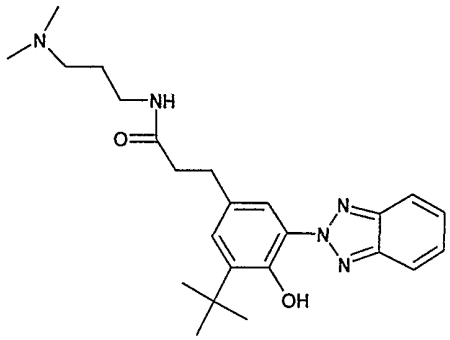
R_9 is hydrogen; or C_1-C_5alkyl.

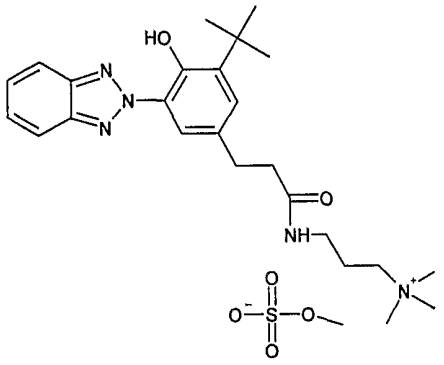
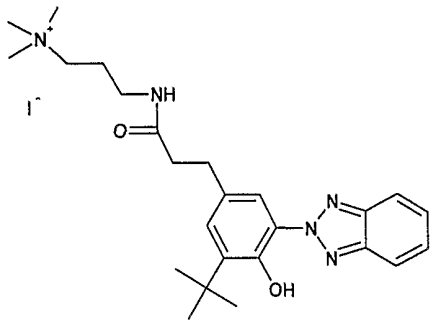
The following benzotriazole UV absorbers used according to the invention may be mentioned by way of example:

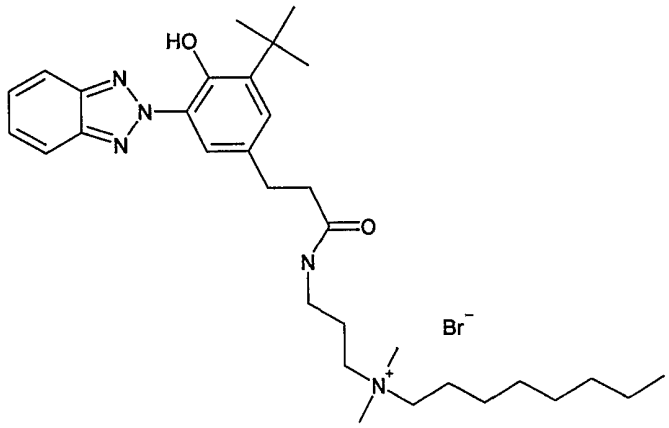
(4)  ; (5)  ;

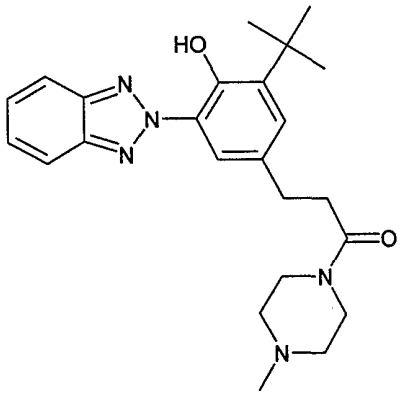
(6)  ; (7)  ;

(8)  ; (9)  ;

(10)  ; (11)  ;

(12)  ; (13)  ;

(14)  ; and

(15)  .


The UV absorber used in the present composition readily absorbs UV light, especially in the range l = 300 to 400 nm, and converts the absorbed energy, by a chemical intermediate reaction, into non-interfering, stable compounds or into non-interfering forms of energy. The UV absorber should, of course, be compatible with the rinse cycle fabric softener composition. Preferably, the UV absorber used is one which is capable of being absorbed on to the washed textile article during a rinse cycle fabric softener treatment.

Fabric softeners (component (b)) suitable for use herein are selected from the following classes of compounds:



(i) Cationic quaternary ammonium salts. The counter ion of such cationic quaternary ammonium salts may be a halide, such as chloride or bromide, methyl sulfate, or other ions well known in the literature. Preferably the counter ion is methyl sulfate or any alkyl sulfate or any halide, methyl sulfate being most preferred for the dryer-added articles of the invention.

Examples of cationic quaternary ammonium salts include but are not limited to:

1. Acyclic quaternary ammonium salts having at least two C_8 to C_{30}, preferably C_{12} to C_{22} alkyl or alkenyl chains, such as: ditallowdimethyl ammonium methylsulfate, di(hydrogenated tallow)dimethyl ammonium methylsulfate, distearyldimethyl ammonium methylsulfate or chloride, dicocodimethyl ammonium methylsulfate and the like. It is especially preferred if the fabric softening compound is a water insoluble quaternary ammonium material which comprises a compound having two C_{12} to C_{18} alkyl or alkenyl groups connected to the molecule via at least one ester link. It is more preferred if the quaternary ammonium material has two ester links present. An especially preferred ester-linked quaternary ammonium material for use in the invention can be represented by the formula:

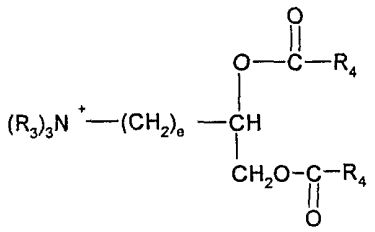
(16) 

wherein each R_{12} group is independently selected from C_1 to C_4 alkyl, hydroxyalkyl or C_2 to C_4 alkenyl groups; T is either

(16a)  or (16b) 

and wherein each R_{13} group is independently selected from C_8 to C_{28} alkyl or alkenyl groups; and e is an integer from 0 to 5.

A second preferred type of quaternary ammonium material can be represented by the formula:

(17) 

wherein R_4, R_5 and e are as defined in formula (16).

2. Cyclic quaternary ammonium salts of the imidazolinium type such as di(hydrogenated tallow)dimethyl imidazolinium methylsulfate, 1-ethylene-bis(2-tallow-1-methyl) imidazolinium methylsulfate and the like;
3. Diamido quaternary ammonium salts such as: methyl-bis(hydrogenated tallow amidoethyl)-2-hydroxethyl ammonium methyl sulfate, methyl bi(tallowamidoethyl)-2-hydroxypropyl ammonium methylsulfate and the like;
4. Biodegradable quaternary ammonium salts such as N,N-di(tallowoyl-oxy-ethyl)-N,N-dimethyl ammonium methyl sulfate and N,N-di(tallowoyl-oxy-propyl)-N,N-dimethyl ammonium methyl sulfate. Biodegradable quaternary ammonium salts are described, for example, in U.S. Patents 4,137,180, 4,767,547 and 4,789,491 incorporated by reference herein.

   Preferred biodegradable quaternary ammonium salts include the biodegradable cationic diester compounds as described in U.S. Patent 4,137,180, herein incorporated by reference.

(ii) Tertiary fatty amines having at least one and preferably two C_8-C_{30}, preferably C_{12}-C_{22} alkyl chains. Examples include hardened tallow-di-methylamine and cyclic amines such as 1-(hydrogenated tallow)amidoethyl-2-(hydrogenated tallow) imidazoline. Cyclic amines which may be employed for the compositions herein are described in U.S. Patent 4,806,255 incorporated by reference herein.

(iii) Carboxylic acids having 8 to 30 carbons atoms and one carboxylic group per molecule. The alkyl portion has 8 to 30, preferably 12 to 22 carbon atoms. The alkyl portion may

be linear or branched, saturated or unsaturated, with linear saturated alkyl preferred. Stearic acid is a preferred fatty acid for use in the composition herein. Examples of these carboxylic acids are commercial grades of stearic acid and palmitic acid, and mixtures thereof which may contain small amounts of other acids.

(iv) Esters of polyhydric alcohols such as sorbitan esters or glycerol stearate. Sorbitan esters are the condensation products of sorbitol or iso-sorbitol with fatty acids such as stearic acid. Preferred sorbitan esters are monoalkyl. A common example of sorbitan ester is SPAN 60 (ICI) which is a mixture of sorbitan and isosorbide stearates.

(v) Fatty alcohols, ethoxylated fatty alcohols, alkyphenols, ethoxylated alkyphenols, ethoxylated fatty amines, ethoxylated monoglycerides and ethoxylated diglycerides.

(vi) Mineral oils, and polyols such as polyethylene glycol.

These softeners are more definitively described in U.S. Patent 4,134,838 the disclosure of which is incorporated by reference herein. Preferred fabric softeners for use herein are acyclic quaternary ammonium salts. Di(hydrogenated)tallowdimethyl ammonium methyl-sulfate is most widely used for dryer articles of this invention. Mixtures of the above mentioned fabric softeners may also be used.

In addition, the composition according to the present invention may also contain a minor proportion of one or more adjuvants. Examples of adjuvants include emulsifiers, perfumes, colouring dyes, opacifiers, fluorescent whitening agents, bactericides, nonionic surfactants, anti-gelling agents such as nitrites or nitrates of alkali metals, especially sodium nitrate, and corrosion inhibitors such as sodium silicate.

The amount of each of these optional adjuvants preferably ranges from 0.05 to 5% by weight of the composition.

A particularly preferred optional adjuvant is a cationic, amphoteric or anionic fluorescent whitening agent as disclosed in EP-A-0,659,877, from page 9 to page 15, line 56.

The present invention also provides a method for the improvement of UPF of a textile article, comprising applying, to a previously washed article, a fabric rinse composition comprising:

a) 0.1 to 10, preferably 0.1 to 5 % by weight of a UV absorber of formula (1), based on the

total weight of the composition;

b) 5 to 25%, especially from 10 to 20% by weight, based on the total weight of the composition, of a fabric care ingredient; and

c) the remainder being substantially water.

The method and composition of the present invention, in addition to providing protection to the skin, also increase the useful life of a textile article treated according to the present invention, for example by preserving its tear strength and/or its lightfastness or reducing the fading from sunlight.

Therefore the present invention also provides a method for the reducing of the fading of fabrics from sunlight, comprising applying, to a previously washed article, a fabric rinse composition comprising:

a) 0.1 to 10, preferably 0.1 to 5 % by weight of a UV absorber of formula (1), based on the total weight of the composition;

b) 5 to 25%, especially from 10 to 20% by weight, based on the total weight of the composition, of a fabric care ingredient; and

c) the remainder being substantially water.

The composition deposit from about 0.5 mg/g fabric to about 5 mg/g fabric of the UV absorber of formula (1) onto the fabric to reduce the sun fading of fabric.

The textile article treated according to the method of the present invention may be composed of any of a wide range of types of fibers such as wool, polyamide, cotton, polyester, polyacrylic, silk or any mixture thereof.

Treatment of fabric with compositions of the present invention repeatedly during the rinse cycle of a typical laundering process may result in higher deposition levels, which contributes even further to the sun-fading benefit.

The following Examples further illustrate the present invention.

Example 1:

5 g of bleached cotton fabric (weave) are washed/rinsed in a linitest applying the following conditions:

Main wash:

Detergent dosage:	4 g/l ECE 77 (phosphate containing standard detergent which is free of fluorescent whitening and bleaching agents)
Liquor ratio:	1:20
Duration:	15 minutes
Temperature:	25°C

Rinsing is carried out with tap water for 30 seconds and the spin dried.

Rinse bath:

Softener dosage:	1,66 g/l concentrated Esterquat or 5 g/l diluted DSDMAC
Liquor ration:	1:40
Duration:	15 minutes
Temperature:	25°C

The fabric is spin dried at 60°C; 1 and 3 wash cycles.

Table 1: Softener formulation:		
	Esterquat formulation	DSDMAC formulation
Di-(palmcarboxyethyl)-hydroxyethyl-methylammonium-methosulfate (Rewoquat WE 38 DPG)	15 % active matter	--
Distearyl-dimethylammoniumchloride (Arquad 2 HT-75)	--	5 % active matter
C_{12}-C_{13}fatyy alcohol ethoxylate with an average of 6 EO units (Dobanol 23-6,5)	--	0.5 %
$MgCl_2$	0.1 %	--
UV-Absorber of formulas (4), (6), (7), (8) and (12)	2.4 %	0.8 %
water	ad 100 %	ad 100 %

The UPF of the dried softener treated goods are determined by measurement of the UV light transmitted through the textile, using a double grating spectrophotometer fitted with an Ulbricht bowl. Calculation of UPF is conducted as described by B.L.Diffey and J.Robson in J. Soc. Cosm. Chem. 40 (1989), pp. 130-131.

The results are shown in Table 2:

Table 2:					
Compound of formula	softener formulation without UV absorber	(4)	(6)	(7)	(8)
DSDMAC formulation					
1st wash/rinse	3	13	13	11	11
3rd wash/rinse	3	25	29	20	21
Esterquat formulation					
1st wash/rinse	3	14	12	10	10
3rd wash/rinse	3	26	25	23	24

The results in Table 1 and 2 clearly demonstrate the improvement of the UPF values of the cotton substrates treated with rinse compositions according to the present invention.

Example 2: Photo Fading Inhibition

Six differently colored cotton fabrics

A: Reactive Black 005 B: Reactive Red 226 C: Reactive Blue 013

D: Reactive Red 264 E: Reactive Red 228

are separately washed and rinsed in a Linitest applying the following conditions:

Main wash:

Detergent dosage: 4 g/l ECE77

Liquor Ration: 1:20

Duration: 15 minutes

Temperature: 25°C

The fabrics are rinsed with tap water for 30 seconds and spin dried.

Rinse bath:

Softener dosage: 4 g/l DSDMAC formulation

Liquor ration: 1:20

Duration: 15 minutes

Temperature: 25°C

The fabric is spin dried at 60°C and irradiated in an ATLAS Weather-O-Meter Ci65A under the following conditions:

Filter: Boro/Boro

Irradiation lamp: 3.5 kw

Irradiation onto the fabric: 0.22 W/m^2

Dry bulb: 29.3°C

Wet bulb: 21.9°C

Wet bulb depression: 7.3°C

Rel. humidity 43%

Duration: 7 h

10 wash/rinse/irradiation cycles

Table 3: Softener formulation:	
	DSDMAC formulation
Distearyl-dimethylammoniumchloride (Arquad 2 HT-75)	--
C_{12}-C_{13}fatyy alcohol ethoxylate with an average of 6 EO units (Dobanol 23-6,5)	0.5 %
UV-Absorber	0.8 % of compound of formula (12)
water	ad 100 %

Effect Evaluation CIE Color Measurement

The CIE color system evaluates the color of a fabric sampel in terms of the L*, a*, b* coordinates which are determinded from spectrophotometer readings. (L*, a*, b* are as described in Colorimetry, 2nd Edition, CIE Publication no. 15.2, published by Bureau, Central de la CIE, Paris 1982).

The ΔE value is defined by the following equation:

$$\Delta E = \{(L_f^* - L_i^*)^2 + (a_f^* - a_i^*)^2 + (b_f^* - b_i^*)^2\}^{1/2}$$

where the subscripts I and f refer to the values as measured with or without irradiation of the sample, respectively.

The CIE color measurements of the colored fabric washed/rinsed without UV-aborber/irradiated (reference = not irradiated) and the colored fabric washed/rinsed with UV-absorber/irradiated (reference = not irradiated) obtained the following results:

Table 4:

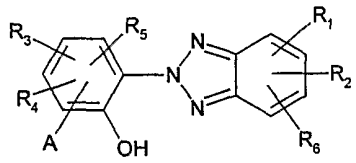
	ΔE 10 Cycles	
	without compound of formula (12)	with compound of formula (12)
A:	8.9	7.8
B:	17.1	15.8
C:	6.2	5.1
D:	13.5	10.9
E:	14.1	11.7



The results in the table show that the colored cotton fabrics treated according to the process of the present invention show a remarkable photo-fading inhibition.




Claims





1. fabric rinse composition comprising




a) 0.1 to 10 % by weight of a UV absorber of formula

(1)  , wherein

A is a radical of formula (1a)  ; or (1b)  ;

B is a radical of formula (1c)  ; (1d)  X- ; (1e)  ;



(1f)  ; (1g)  ; (1h)  ; (1i)  ;


(1k)  ; (1l)  ; or (1m)  ;

R_1, R_2, R_3, R_4, R_5 and R_6 are each independently of the others hydrogen, C_1-C_{18}alkyl; C_5-C_7-cycloalkyl; halogen;

R_9 is hydrogen, C_1-C_{12}alkyl; or C_5-C_7cycloalkyl;

R_7, R_8 and R_{10} are each independently of the others hydrogen, C_1-C_{12}alkyl, C_5-C_7cycloalkyl, C_1-C_{12}hydroxyalkyl;

X is halogen; a radical of formula (1s)  ; (1t)  ; or

(1u)  ; sulfate, phosphate, lactate, citrate, tartrate;

R_{11} is C_1-C_{12}alkyl; C_5-C_7cycloalkyl or phenyl;


x is from 0 to 10; and

y is from 1 to 20;

b) 5 to 25% by weight, based on the total weight of the composition of a fabric softener agent; and


c) the remainder being substantially water.

2. A composition according to claim 1 wherein component (a) corresponds to a UV absorber of formula

(2)  , wherein

R_1, R_2, R_3, R_4, R_5, R_6 and A are as defined in claim 1.


3. A composition according to claim 1 or 2, wherein component (a) corresponds to a UV absorber of formula

(3)  , wherein

R_1, R_2, R_3, R_4, R_5, R_6 and A are as defined in claim 1.

4. A composition according to any one of claims 1 to 3 wherein

A is a radical of formula

(1a)  ; or (1b) , wherein


B is a radical of formula (1c); or (1d); and

x and y are as defined in claim 1.


5. A composition according to any of the preceding claims in which the fabric care ingredient is selected from cationic quaternary ammonium salts, tertiary fatty amines having at least one C_8-C_{30} alkyl chain, carboxylic acids having 8 to 30 carbons atoms and one carboxylic group per molecule, esters of polyhydric alcohols, fatty alcohols, ethoxylated fatty alcohols, alkyphenols, ethoxylated alkyphenols, ethoxylated fatty amines, ethoxylated monoglycerides and ethoxylated diglycerides, mineral oils and polyols.


6. A composition according to claim 5, wherein cationic quaternary ammonium salt fabric softener is selected from acyclic quaternary ammonium salts having at least two C_8 to C_{30} alkyl or alkenyl chains, cyclic quaternary ammonium salts, diamido quaternary ammonium salts and biodegradable quaternary ammonium salts.

7. A composition according to claim 6, wherein acyclic quaternary ammonium salts correspond to formula

(16)  ,

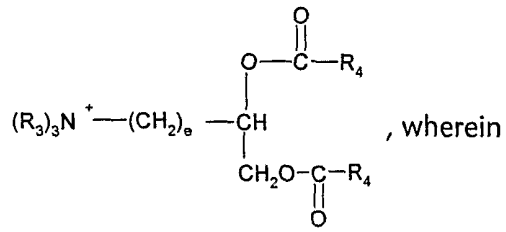
wherein each R_{12} group is independently selected from C_1 to C_4 alkyl, hydroxyalkyl or C_2 to C_4 alkenyl groups; T is either

(16a)  or

(16b) 

and wherein each R_{13} group is independently selected from C_8 to C_{28} alkyl or alkenyl groups; and e is an integer from 0 to 5.

8. A composition according to claim 7, wherein acyclic quaternary ammonium salts correspond to formula

(17)  , wherein

R_4,R_5 and e are as defined in claim 7.

9. A composition according to claim 7, wherein the acyclic quaternary ammonium salt is di-(palmcarboxyethyl)-hydroxyethyl-methylammonium-methosulfate.

10. A composition according to claim 6, wherein the acyclic quaternary ammonium salt is selected from ditallowdimethyl ammonium methylsulfate, di(hydrogenated tallow)dimethyl ammonium methylsulfate, distearyldimethyl ammonium methylsulfate or chloride and dicocodimethyl ammonium methylsulfate.

11. A composition according to claim 5 or 6, in which the cyclic quaternary ammonium salts are selected from di(hydrogenated tallow)dimethyl imidazolinium methylsulfate, 1-ethylene-bis(2-tallow-1-methyl) imidazolinium methylsulfate.

12. A composition according to claim 5 or 6, in which the diamido quaternary ammonium salts are selected from methyl-bis(hydrogenated tallow amidoethyl)-2-hydroxethyl ammonium methyl sulfate and methyl bi(tallowamidoethyl)-2-hydroxypropyl ammonium methylsulfate.

13. A composition according to claim 5 or 6, in which the biodegradable quaternary ammonium salts are selected from N,N-di(tallowoyl-oxy-ethyl)-N,N-dimethyl ammonium methyl sulfate and N,N-di(tallowoyl-oxy-propyl)-N,N-dimethyl ammonium methyl sulfate.

14. A composition according to any of the preceding claims which also contains an adjuvant selected from an emulsifier, perfume, colouring dye, opacifier, fluorescent whitening agent, bactericide, nonionic surfactant, anti-gelling agent and corrosion inhibitor.

15. A method for the improvement of UPF of a textile article, comprising applying, to a previously washed article, a fabric rinse composition comprising

a) 0.1 to 10% by weight of a UV absorber of formula (1), based on the total weight of the composition;
b) 5 to 25% by weight, based on the total weight of the composition, of a fabric care ingredient; and
c) the remainder being substantially water.

16. A method for the reducing of the fading of fabrics from sunlight, comprising applying, to a previously washed article, a fabric rinse composition comprising:

a) 0.1 to 10 by weight of a UV absorber of formula (1), based on the total weight of the composition;
b) 5 to 25%, especially from 10 to 20% by weight, based on the total weight of the composition, of a fabric care ingredient; and
c) the remainder being substantially water.

17. A method according to claim 15 or 16 wherein the textile article treated is composed of wool, polyamide, cotton, polyester, polyacrylic, silk or any mixture thereof.

INTERNATIONAL SEARCH REPORT

Inter al Application No
PCT/EP 02/03009

A. CLASSIFICATION OF SUBJECT MATTER
IPC 7 C11D3/42 C11D3/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 7 C11D D06M D06L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data, CHEM ABS Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 962 402 A (SEVERNS JOHN CORT) 5 October 1999 (1999-10-05) claims 1,18 ---	1-17
A	WO 00 25730 A (KRAMER ERICH ;CIBA SC HOLDING AG (CH); EHLIS THOMAS (DE); HUEGLIN) 11 May 2000 (2000-05-11) claims 1,13 ---	1-17
A	US 5 810 889 A (HAERRI HANS PETER ET AL) 22 September 1998 (1998-09-22) claim 1 ---	1-17
A	EP 0 659 877 A (CIBA GEIGY AG) 28 June 1995 (1995-06-28) claims 1-17,27,28 ---	1-17

-/--

[X] Further documents are listed in the continuation of box C.

[X] Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
3 July 2002	10/07/2002

Name and mailing address of the ISA	Authorized officer
European Patent Office, P.B. 5818 Patentlaan 2 NL – 2280 HV Rijswijk Tel. (+31–70) 340–2040, Tx. 31 651 epo nl, Fax: (+31–70) 340–3016	Richards, M

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Interi al Application No
PCT/EP 02/03009

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication,where appropriate, of the relevant passages	Relevant to claim No.
A	DATABASE WPI Section Ch, Week 198833 Derwent Publications Ltd., London, GB; Class A96, AN 1988-230562 XP002174128 & JP 63 162798 A (LION CORP), 6 July 1988 (1988-07-06) abstract	1
A	EP 0 657 577 A (CIBA GEIGY AG) 14 June 1995 (1995-06-14) claim 1	1
A	CH 497 919 A (GEIGY AG J R) 31 October 1970 (1970-10-31) claim 1	1
A	WO 89 03826 A (ALLIED SIGNAL INC) 5 May 1989 (1989-05-05) claim 1	1

INTERNATIONAL SEARCH REPORT

ɔrmation on patent family members

Inter nal Application No
PCI/EP 02/03009

Patent document cited in search report		Publication date	Patent family member(s)		Publication date
US 5962402	A	05-10-1999	US	5869443 A	09-02-1999
			US	5733855 A	31-03-1998
			US	5474691 A	12-12-1995
			CA	2192801 A1	08-02-1996
			EP	0773987 A1	21-05-1997
			JP	10504610 T	06-05-1998
			WO	9603492 A1	08-02-1996
WO 0025730	A	11-05-2000	AU	1041700 A	22-05-2000
			BR	9914982 A	14-08-2001
			CN	1325293 T	05-12-2001
			WO	0025730 A1	11-05-2000
			EP	1135093 A1	26-09-2001
US 5810889	A	22-09-1998	AU	696367 B2	10-09-1998
			AU	2182995 A	08-02-1996
			BR	9502894 A	27-02-1996
			EP	0697481 A2	21-02-1996
			GB	2291658 A ,B	31-01-1996
			JP	8092874 A	09-04-1996
			NZ	272403 A	27-08-1996
			ZA	9505169 A	23-01-1996
EP 0659877	A	28-06-1995	AU	684116 B2	04-12-1997
			AU	8160894 A	29-06-1995
			BR	9405213 A	01-08-1995
			EP	0659877 A2	28-06-1995
			GB	2285065 A ,B	28-06-1995
			IL	112069 A	05-04-1998
			JP	7216740 A	15-08-1995
			NZ	270206 A	28-08-1995
			US	6174854 B1	16-01-2001
			US	6398982 B1	04-06-2002
			ZA	9410243 A	23-06-1995
JP 63162798	A	06-07-1988	JP	2584622 B2	26-02-1997
			JP	63162798 T1	06-07-1988
EP 0657577	A	14-06-1995	EP	0657577 A1	14-06-1995
			JP	7196631 A	01-08-1995
CH 497919	A	31-10-1970	CH	408033 A	28-02-1966
			BE	630546 A	
			DE	1213409 B	31-03-1966
			FR	1324899 A	19-04-1963
			GB	991204 A	05-05-1965
			NL	126588 C	
			NL	279768 A	
			SE	320670 B	16-02-1970
			US	3629192 A	21-12-1971
WO 8903826	A	05-05-1989	AT	108781 T	15-08-1994
			AU	619792 B2	06-02-1992
			AU	2797489 A	23-05-1989
			CA	1325214 A1	14-12-1993
			DE	3850780 D1	25-08-1994
			DE	3850780 T2	27-10-1994
			EP	0389550 A1	03-10-1990

INTERNATIONAL SEARCH REPORT

Information on patent family members

Inter nal Application No
PCT/EP 02/03009

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 8903826 A		WO 8903826 A1	05-05-1989
		US 4990623 A	05-02-1991
		US 5190565 A	02-03-1993