



(12) **DEMANDE DE BREVET CANADIEN
CANADIAN PATENT APPLICATION**

(13) **A1**

(86) Date de dépôt PCT/PCT Filing Date: 2018/05/30	(51) Cl.Int./Int.Cl. <i>C08L 23/22</i> (2006.01), <i>C08F 297/04</i> (2006.01), <i>C08L 53/02</i> (2006.01)
(87) Date publication PCT/PCT Publication Date: 2018/12/06	
(85) Entrée phase nationale/National Entry: 2019/11/29	(71) Demandeur/Applicant: VERSALIS S.P.A., IT
(86) N° demande PCT/PCT Application No.: IB 2018/053829	(72) Inventeurs/Inventors: SOMMAZZI, ANNA, IT; RICCI, GIOVANNI, IT; MASI, FRANCESCO, IT; LEONE, GIUSEPPE, IT
(87) N° publication PCT/PCT Publication No.: 2018/220538	
(30) Priorité/Priority: 2017/05/31 (IT102017000059763)	(74) Agent: MBM INTELLECTUAL PROPERTY LAW LLP

(54) Titre : COPOLYMERES BISEQUENCES DE BUTADIENE-ISOPRENE ET LEUR PROCEDE DE PREPARATION
(54) Title: BUTADIENE-ISOPRENE DIBLOCK COPOLYMERS AND PROCESS FOR THE PREPARATION THEREOF

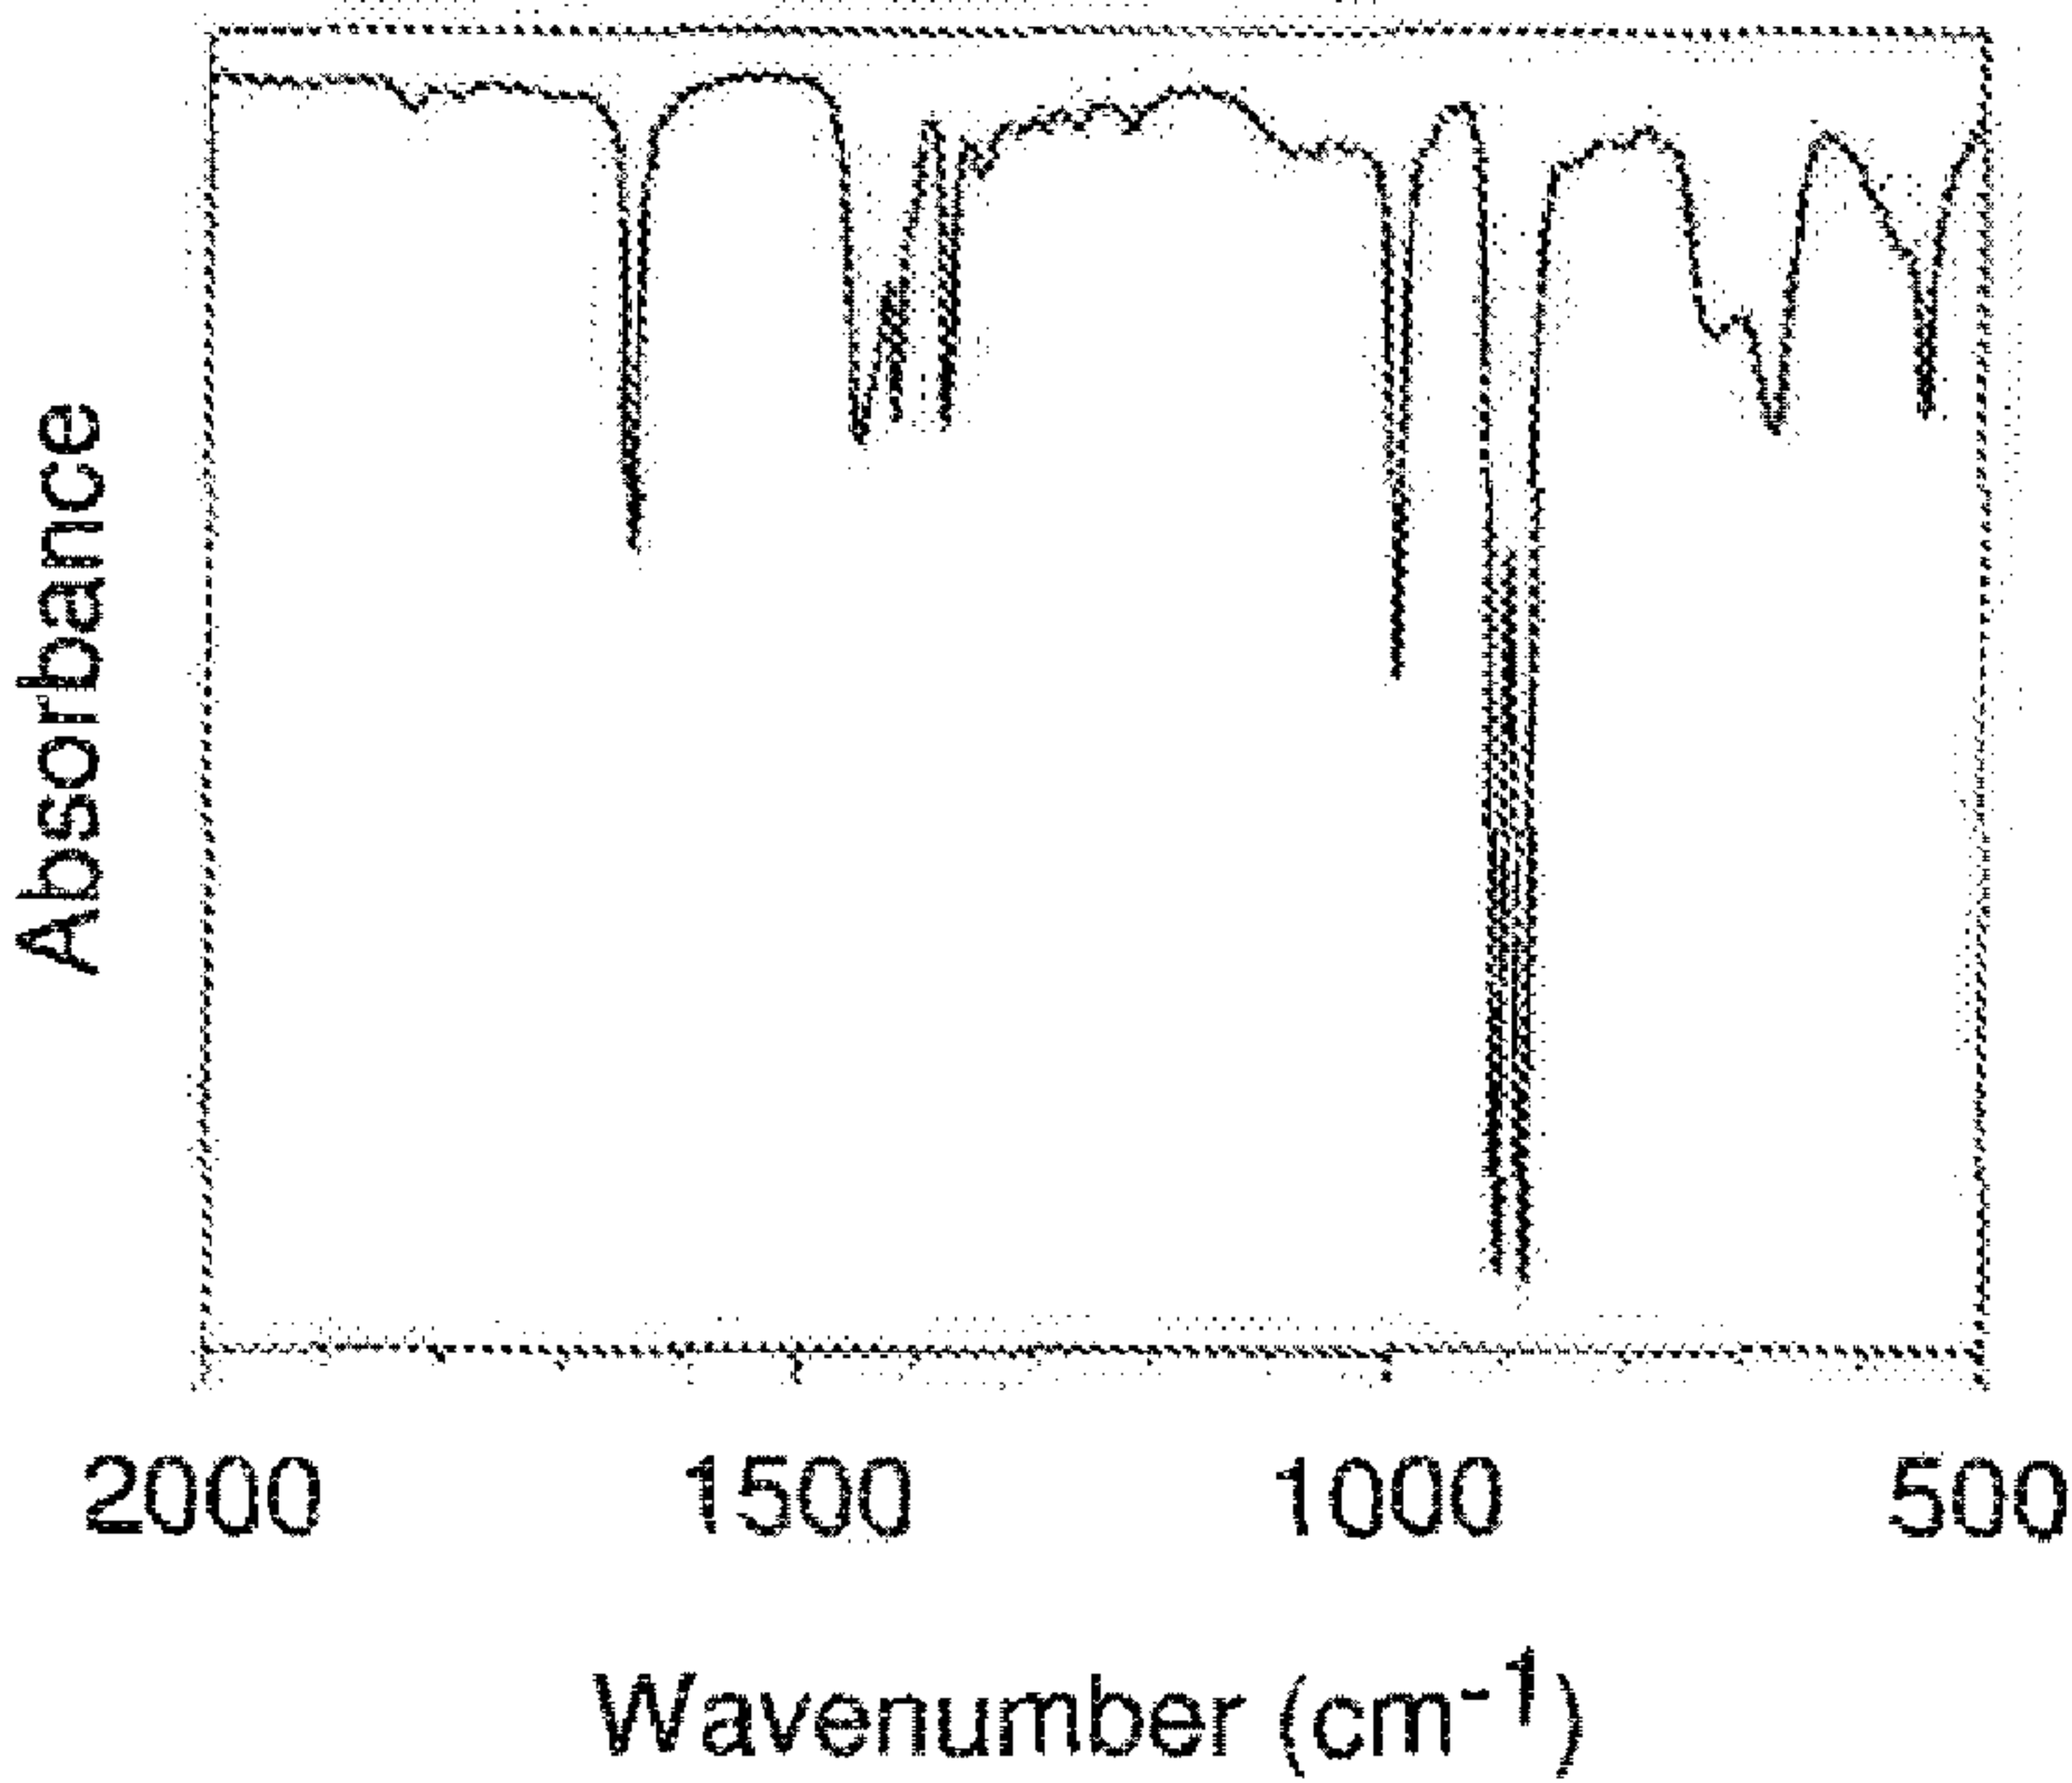


FIGURE 12

(57) **Abrégé/Abstract:**
Butadiene-isoprene diblock copolymer formed by a block of crystalline polybutadiene (hard block) and by a block of amorphous polyisoprene (soft block). Said butadiene-isoprene diblock copolymer can be advantageously used both in the footwear industry (for example, in the production of shoe soles), and in the production of tires for motor vehicles and/or trucks.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau

(43) International Publication Date
06 December 2018 (06.12.2018)



(10) International Publication Number
WO 2018/220538 A1

(51) International Patent Classification:

C08L 23/22 (2006.01) *C08L 53/02* (2006.01)
C08F 297/04 (2006.01)

(21) International Application Number:

PCT/IB2018/053829

(22) International Filing Date:

30 May 2018 (30.05.2018)

(25) Filing Language:

Italian

(26) Publication Language:

English

(30) Priority Data:

102017000059763 31 May 2017 (31.05.2017) IT

(71) Applicant: **VERSALIS S.P.A.** [IT/IT]; Piazza Boldrini, 1,
I-20097 San Donato Milanese (MI) (IT).

(72) Inventors: **SOMMAZZI, Anna**; Viale Giovanni XXIII,
34, I-28100 Novara (IT). **RICCI, Giovanni**; Via E. Sartori,
11/1, I-43126 Parma (IT). **MASI, Francesco**; Via Galvani,
7, I-26866 Sant'Angelo Lodigiano (LO) (IT). **LEONE,**
Giuseppe; Via Cesare Saldini, 38, I-20133 Milano (IT).

(74) Agent: **MAURO, Marina Eliana**; c/o Murgitroyd & Com-
pany, Piazza Borromeo, 12, I-20123 Milano (IT).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,
AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ,

CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO,
DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN,
HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP,
KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- in black and white; the international application as filed
contained color or greyscale and is available for download
from PATENTSCOPE

(54) Title: BUTADIENE-ISOPRENE DIBLOCK COPOLYMERS AND PROCESS FOR THE PREPARATION THEREOF

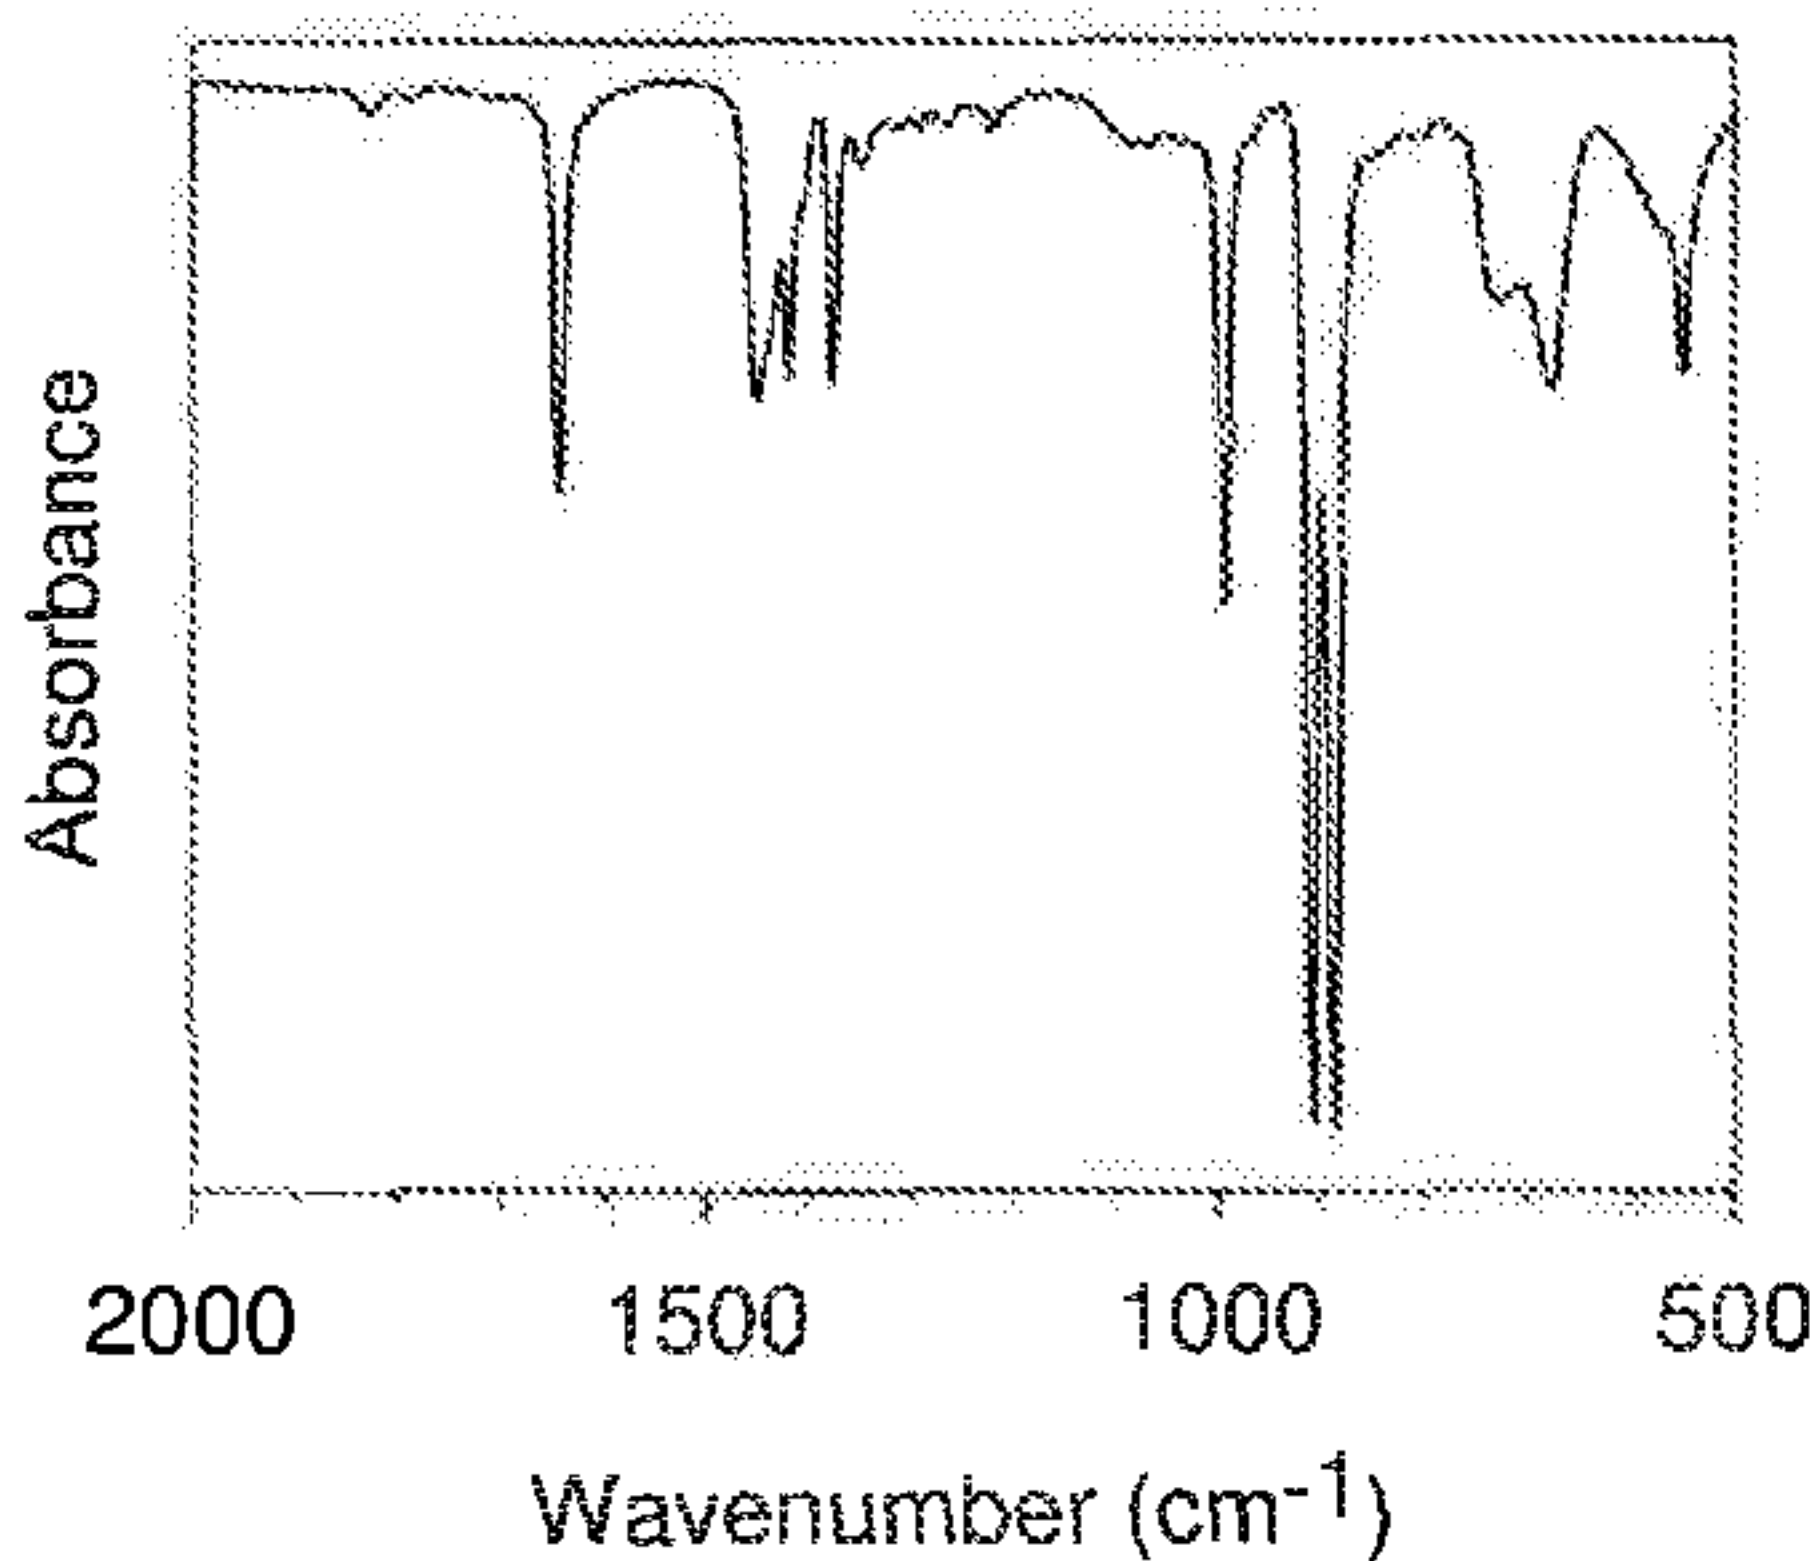


FIGURE 12

(57) Abstract: Butadiene-isoprene diblock copolymer formed by a block of crystalline polybutadiene (hard block) and by a block of amorphous polyisoprene (soft block). Said butadiene-isoprene diblock copolymer can be advantageously used both in the footwear industry (for example, in the production of shoe soles), and in the production of tires for motor vehicles and/or trucks.



WO 2018/220538 A1

BUTADIENE-ISOPRENE DIBLOCK COPOLYMERS AND PROCESS FOR THE PREPARATION THEREOF

DESCRIPTION

The present invention relates to a butadiene-isoprene diblock copolymer.

More particularly, the present invention relates to a diblock copolymer formed by a block of crystalline polybutadiene (hard block) and by a block of amorphous polyisoprene (soft block).

The present invention further relates to a process for the preparation of a butadiene-isoprene diblock copolymer formed by a block of crystalline polybutadiene (hard block) and by a block of amorphous polyisoprene (soft block) comprising the following steps: (i) subjecting 1,3-butadiene to living polymerization in the presence of a catalytic system comprising at least one iron complex and continuing said living polymerization until substantially complete 1,3-butadiene conversion; (ii) adding isoprene to the polymerization mixture obtained in step (i) and continuing said living polymerization until substantially complete isoprene conversion.

Said butadiene-isoprene diblock copolymer can be advantageously used both in the footwear industry (for example, in the production of shoe soles), and in the production of tires for motor vehicles and/or trucks.

The design and synthesis of diene block (co)polymers having a controlled microstructure represent a subject of great interest in the field of Polymer Science, precisely because said diene block (co)polymers can combine the properties of one or more homopolymers, providing better performance levels than those obtainable from the simple mixture of the corresponding diene homopolymers as described, for example, in Hamley I. W., "*Development in Block Copolymer Science and Technology*"

(2004), Hamley I. W. Ed., John Wiley & Sons Ltd, New York, Chapter 1, pg. 1-29.

A lot of work has therefore been performed in relation to the development of new catalytic systems able to provide diene (co)polymers consisting of stereoblocks having a different structure and/or tacticity such as, for example, (co)polymers consisting of amorpho-crystalline sequences of the same monomer. Said diene (co)polymers often display phase separation and at the same time allow a morphological complex to be obtained thanks to their individual molecular architecture: further details on said diene (co)polymers can be found, for example, in: Bates F. S. et al., "*Macromolecules*" (1984), Vol. 17(12), pg. 2607-2613; Cohen R. E. et al., "*Macromolecules*" (1982), Vol. 15(2), pg. 370-375; Gehlsen M. D. et al., "*Macromolecules*" (1992), Vol. 25(2), pg. 939-943.

Other studies have been performed in the field of stereoblock polymers related to polydienes, in particular polybutadiene. In fact, polybutadiene represents one of the most important polymers whose properties are strongly influenced by its microstructure, which can be of the *cis*-1,4, *trans*-1,4 and 1,2 type.

Cis-1,4-polybutadiene is a synthetic elastomer generally having a *cis*-1,4 content equal to 96% - 97%, a melting point (T_m) of about -2°C, a crystallization temperature (T_c) of about -25°C and a glass transition temperature (T_g) below -100°C, whose properties are very similar to those of natural rubber and whose main use is in the production of tires for motor vehicles and/or trucks. In particular, in the production of tires, polybutadiene with a high *cis*-1,4 unit content is used.

1,2 polybutadiene may have isotactic or syndiotactic tacticity. Specifically, syndiotactic 1,2 polybutadiene is a crystalline polymer with a melting point of about 200°C, is a typical thermoplastic polymer, which can be used in the production of films, pipes and as a reinforcing agent for rubbers, hence reinforcing the elastic modulus, the tenacity,

the abrasion resistance and the durability. However, syndiotactic 1,2 polybutadiene is difficult to process because of its high melting point, which enormously limits its application and use.

1,2/1,4/1,2 tri-block polybutadiene was synthesized through the anionic polymerization of 1,3-butadiene in cyclohexane using 1,1,4,4-tetraphenyl-1,4-dilithium butane (TPB-DiLi) as an initiator as described, for example, in Wang Y. et al., "*Journal of Applied Polymer Science*" (2003), Vol. 88, Issue 4, pg. 1049-1054.

Stereospecific tri-block polybutadienes having high *trans*-1,4/low *cis*-1,4/high *trans*-1,4 (HTPB-*b*-LCPB-*b*-HTPBs) were synthesized through the sequential anionic polymerization of 1,3-butadiene using barium salt of di (ethyleneglycol) ethylether/tri-*iso*-butyl-aluminum/dilithium (BaDEGEE/TIBA/DLi) as described, for example, in Zhang X. et al., "*Polymer*" (2009), Vol. 50, pg. 5427-5433.

Polybutadiene with a high *cis*-1,4 content was synthesized through living stereospecific polymerization of 1,3-butadiene in the presence of cobalt dichloride as the catalyst (CoCl_2) and methylaluminoxane (MAO) as co-catalyst as described, for example, in Nath D. C. D. et al., "*Macromolecular Chemistry and Physics*" (2002), Vol. 203, Issue 4, pg. 756-760.

The effect of triphenylphosphine (Ph_3P) on the living stereospecific polymerization of 1,3-butadiene in the presence of cobalt dichloride as catalyst (CoCl_2) and methylaluminoxane (MAO) as co-catalyst has also been studied, demonstrating that the addition of said triphenylphosphine (Ph_3P) changes the microtacticity of the polybutadiene obtained from a 99% content of *cis*-1,4 units to an 88% content of 1,2 units as described, for example, in Nath D. C. D. et al., "*Macromolecular Chemistry and Physics*" (2003), Vol. 204, Issue 16, pg. 2017-2022.

The synthesis of polybutadienes consisting of regio-blocks in the presence of cobalt

dichloride (CoCl_2) as catalyst through the reversible coordination of a Lewis base (for example, a phosphine) is described, for example, in Cai Z. et al., "*Macromolecules*" (2009), Vol. 42(20), pg. 7642-7643.

Further processes related to obtaining polybutadienes with different *cis*-1,4 unit and 1,2 unit contents in the presence of catalytic cobalt complexes and optionally phosphines, are described, for example, in: Ricci G. et al., "*Journal of Molecular Catalysis A: Chemical*" (2005), Vol. 226, pg. 235-241; Ricci G. et al., "*Macromolecules*" (2005), Vol. 38, pg. 1064-1070; Ricci G. et al., "*Journal of Organometallic Chemistry*" (2005), Vol. 690, pg. 1845-1854; Ricci G. et al., "*Advances in Organometallic Chemistry Research*" (2007), Yamamoto K. Ed., Nova Science Publisher, Inc., USA, pg. 1-36; Ricci G. et al., "*Coordination Chemistry Reviews*" (2010), Vol. 254, pg. 661-676; Ricci G. et al., "*Cobalt: Characteristics, Compounds, and Applications*" (2011), Lucas J. Vidmar Ed., Nova Science Publisher, Inc., USA, pg. 39-81; international patent applications WO 2014/097199, WO 2014/097167, WO 2014/097087, WO2014/097245, in the name of the Applicant.

Processes are also known related to obtaining polybutadienes with different *cis*-1,4 unit and 1,2 unit contents in the presence of catalytic iron complexes.

For example, polybutadiene with a syndiotactic 1,2 structure was obtained through the polymerization of 1,3-butadiene in the presence of the $\text{Fe}(\text{2-EHA})_3/\text{Al}^i\text{Bu}_3$ /hydrogen phosphite catalytic system (2-EHA = 2-ethylhexanoate; Al^iBu_3 = tri-*iso*-butyl-aluminum) as described, for example, in Lu J. et al., "*Journal of Applied Polymer Science*" (2006), Vol. 100, Issue 5, pg. 4265-4269.

Polybutadiene with a mixed 1,2, *cis*-1,4 e *trans*-1,4 structure was obtained through the polymerization of 1,3-butadiene in the presence of the $\text{Fe}(\text{2-EHA})_3/\text{Al}^i\text{Bu}_3$ /diethyl phosphite (2-EHA = 2-ethylhexanoate; Al^iBu_3 = tri-*iso*-butyl-aluminum) catalytic system

as described, for example, in Gong D. et al, "*Polymer*" (2009), Vol. 50, pg. 2826-2829.

Catalytic systems obtained through the combination of iron(III) carboxylates (for example, iron(III) 2-ethylhexanoate $[\text{Fe}(\text{2-EHA})_3]$ Fe(III) with tri-*iso*-butyl-aluminum (Al^iBu_3) in hexane, in the presence of phosphates (for example, triethylphosphate) are able to polymerize 1,3-butadiene to polybutadiene with a prevalently 1,2 structure and with a high degree of syndiotacticity as described, for example, in Gong D. et al., "*Polymer*" (2009), Vol. 50, pg. 5980-5986.

Catalytic systems comprising iron ter-pyridine complexes [for example, $\text{FeCl}_3(\text{ter-pyridine})$], in combination with appropriate alkylating agents, are useful in the stereospecific polymerization of conjugated dienes: said catalytic systems show discrete catalytic activity and are able to provide polybutadienes with a *trans*-1,4 structure and isoprene with a 1,2/3,4, structure as described, for example, in Nakayama Y. et al., "*Macromolecules*" (2003), Vol. 36(21), pg. 7953-7958.

Polybutadienes with a high 1,2 unit content were obtained through the use of catalytic systems containing iron(II) complexes with bidentate aromatic amines (for example, 2,2'-bipyridine (bipy), 1,10-phenanthroline (phen) and aluminum compounds as described, for example, in: Ricci G. et al., "*Journal of Molecular Catalysis A: Chemical*" (2003), Vol. 204-205, pg. 287-293; international patent application WO 02/102861.

Polybutadienes with "soft/hard" stereoblocks, with a mixed *cis*-1,4/1,2 structure were obtained using the 2-ethylhexanoate of iron/tri-*iso*-butylaluminum/diethyl phosphate $[\text{Fe}(\text{2-EHA})_3/\text{Al}^i\text{Bu}_3/\text{DEP}]$ catalytic system, appropriately varying the aluminum/iron (Al/Fe) ratio as described, for example, in Zheng W. et al., "*Journal of Polymer Science Part A: Polymer Chemistry*" (2015), Vol. 53, Issue 10, pg. 1182-1188.

Finally, stereoregular diblock polybutadienes formed by a polybutadiene block having a *cis*-1,4 structure and by a polybutadiene block having a syndiotactic 1,2 structure are

described, for example, in international patent application WO 2015/068095, WO 2015/068094, in the name of the Applicant.

Since, as reported above, diene block (co)polymers with a controlled microstructure represent a subject of great interest in the field of Polymer Science, the study of new diene block (co)polymers is still of great interest.

The Applicant has therefore set out to solve the problem of finding a butadiene-isoprene diblock copolymer formed by a block of crystalline polybutadiene (hard block) and by a block of amorphous polyisoprene (soft block).

The Applicant has also found a process for the preparation of a butadiene-isoprene diblock copolymer formed by a block of crystalline polybutadiene (hard block) and by a block of amorphous polyisoprene (soft block) comprising the following stages: (i) subjecting 1,3-butadiene to living polymerization in the presence of a catalytic system comprising at least one iron complex and continuing said living polymerization until substantially complete 1,3-butadiene conversion; (ii) adding isoprene to the polymerization mixture obtained in step (i) and continuing said living polymerization until substantially complete isoprene conversion. The use of the iron complex, thanks to its high catalytic activity and its low level of toxicity, is advantageous both from an economic point of view, and from the point of view of the environment and the health of operators.

Therefore, the subject matter of the present invention is a butadiene-isoprene diblock copolymer formed by a block of crystalline polybutadiene (hard block) and by a block of amorphous polyisoprene (soft block).

For the purpose of the present description and of the following claims, the term "butadiene-isoprene diblock copolymer" means a copolymer containing only two blocks, i.e. the block of crystalline polybutadiene (hard block) and the block of

amorphous polyisoprene (soft block), joined together by a single junction point and not interpenetrating.

For the purpose of the present description and of the following claims, the definitions of the numeric ranges always include the extremes unless specified otherwise.

For the purpose of the present description and of the following claims, the term "comprising" also includes the terms "which essentially consists of" or "which consists of".

For the purpose of the present description and of the following claims the expression "room temperature" means a temperature ranging from 20°C to 25°C.

In accordance with a preferred embodiment of the present invention, said butadiene-isoprene diblock copolymer is formed by: a block of crystalline polybutadiene (hard block) having a syndiotactic 1,2 units content $\geq 60\%$, preferably ranging from 64% to 80%, and a block of amorphous polyisoprene (soft block) having a 3,4 atactic units content $\geq 60\%$, preferably ranging from 65% to 75%.

In accordance with a preferred embodiment of the present invention, said butadiene-isoprene diblock copolymer has the following characteristics:

- upon infra-red analysis (FT-IR) typical bands of *cis*-1,4 and 1,2 syndiotactic butadiene units centered at 737 cm^{-1} and 911 cm^{-1} , respectively, and of isoprene *cis*-1,4 and 3,4 atactic units centered at 840 cm^{-1} and 890 cm^{-1} , respectively.

The infra-red analysis (FT-IR) was performed as stated below in the paragraph "Analysis and characterization methods".

In accordance with a further preferred embodiment of the present invention, in said butadiene-isoprene diblock copolymer:

- the block of crystalline polybutadiene (hard block) can have a melting point (T_m) greater than or equal to 65°C, preferably ranging from 70°C to 130°C, and a

crystallization temperature (T_c) greater than or equal to 50°C, preferably ranging from 55°C to 110°C;

- the block of amorphous polyisoprene (soft block) can have a glass transition temperature (T_g) lower than or equal to -35°C, preferably ranging from -40°C to -60° C.

Said glass transition temperature (T_g), said melting point (T_m) and said crystallization temperature (T_c), were determined through DSC - Differential Scanning Calorimetry - analysis, which was performed as stated below in the paragraph "Analysis and characterization methods".

In accordance with a further preferred embodiment of the present invention, said butadiene-isoprene diblock copolymer can have a polydispersion index (PDI) corresponding to the ratio M_w/M_n (M_w = weight average molecular weight; M_n = number average molecular weight) ranging from 2.0 to 2.6.

Said polydispersion index (PDI) was determined by GPC (Gel Permeation Chromatography) which was performed as stated below in the paragraph "Analysis and characterization methods".

It is to be noted that, in the present patent application, the presence of a narrow monomodal peak, i.e. of a polydispersion index (PDI) ranging from 2.0 to 2.6, indicates the presence of a homogeneous polymeric species excluding, at the same time, the presence of two different homopolymers (i.e. of a homopolymer with a crystalline structure and of a homopolymer with an amorphous structure).

It is also to be noted that the isolated fractions (i.e. extract soluble in ether and residue insoluble in ether) obtained by subjecting the butadiene-isoprene diblock copolymer object of the present invention to continuous extraction with boiling diethylether, for 4 hours, always have a composition/structure that is exactly like that of the starting

polymer.

The butadiene-isoprene diblock copolymer object of the present invention, subjected to AFM - Atomic Force Microscopy - presents two clearly distinctive domains relative to the block of crystalline polybutadiene (hard block) and to the block of amorphous polyisoprene (soft block) and, in particular, a homogeneous distribution of said domains as highlighted in Figures 13 and 23 reported below.

Said AFM - Atomic Force Microscopy - was performed as reported below in the paragraph "Analysis and characterization methods".

In the butadiene-isoprene diblock copolymer object to the present invention, the crystalline polybutadiene block can have a different degree of crystallinity depending on the syndiotactic triad [(rr) %] content: in particular, the degree of crystallinity increases as the syndiotactic triad [(rr) %] content increases. Preferably, said syndiotactic triad [(rr) %] content may be greater than or equal to 60%, preferably ranging from 65% to 80%.

The syndiotactic triad [(rr) %] content was determined through ^{13}C -NMR spectroscopy, which was performed as stated in the paragraph "Analysis and characterization methods".


In accordance with a preferred embodiment of the present invention, said butadiene-isoprene diblock copolymer may have an average molecular weight (M_w) ranging from 600000 g/mol to 1300000 g/mol, preferably ranging from 650000 g/mol to 1250000 g/mol.

As mentioned above, the present invention further relates to a process for the preparation of a butadiene-isoprene diblock copolymer formed by a block of crystalline polybutadiene (hard block) and by a block of an amorphous polyisoprene (soft block).

Therefore, a further subject matter of the present invention is a process for the

preparation of a butadiene-isoprene diblock copolymer formed by a block of crystalline polybutadiene (hard block) and by a block of an amorphous polyisoprene (soft block) comprising the following steps:

- (i) subjecting 1,3-butadiene to living polymerization in the presence of a catalytic system comprising at least one iron complex having general formula (I) or (II):

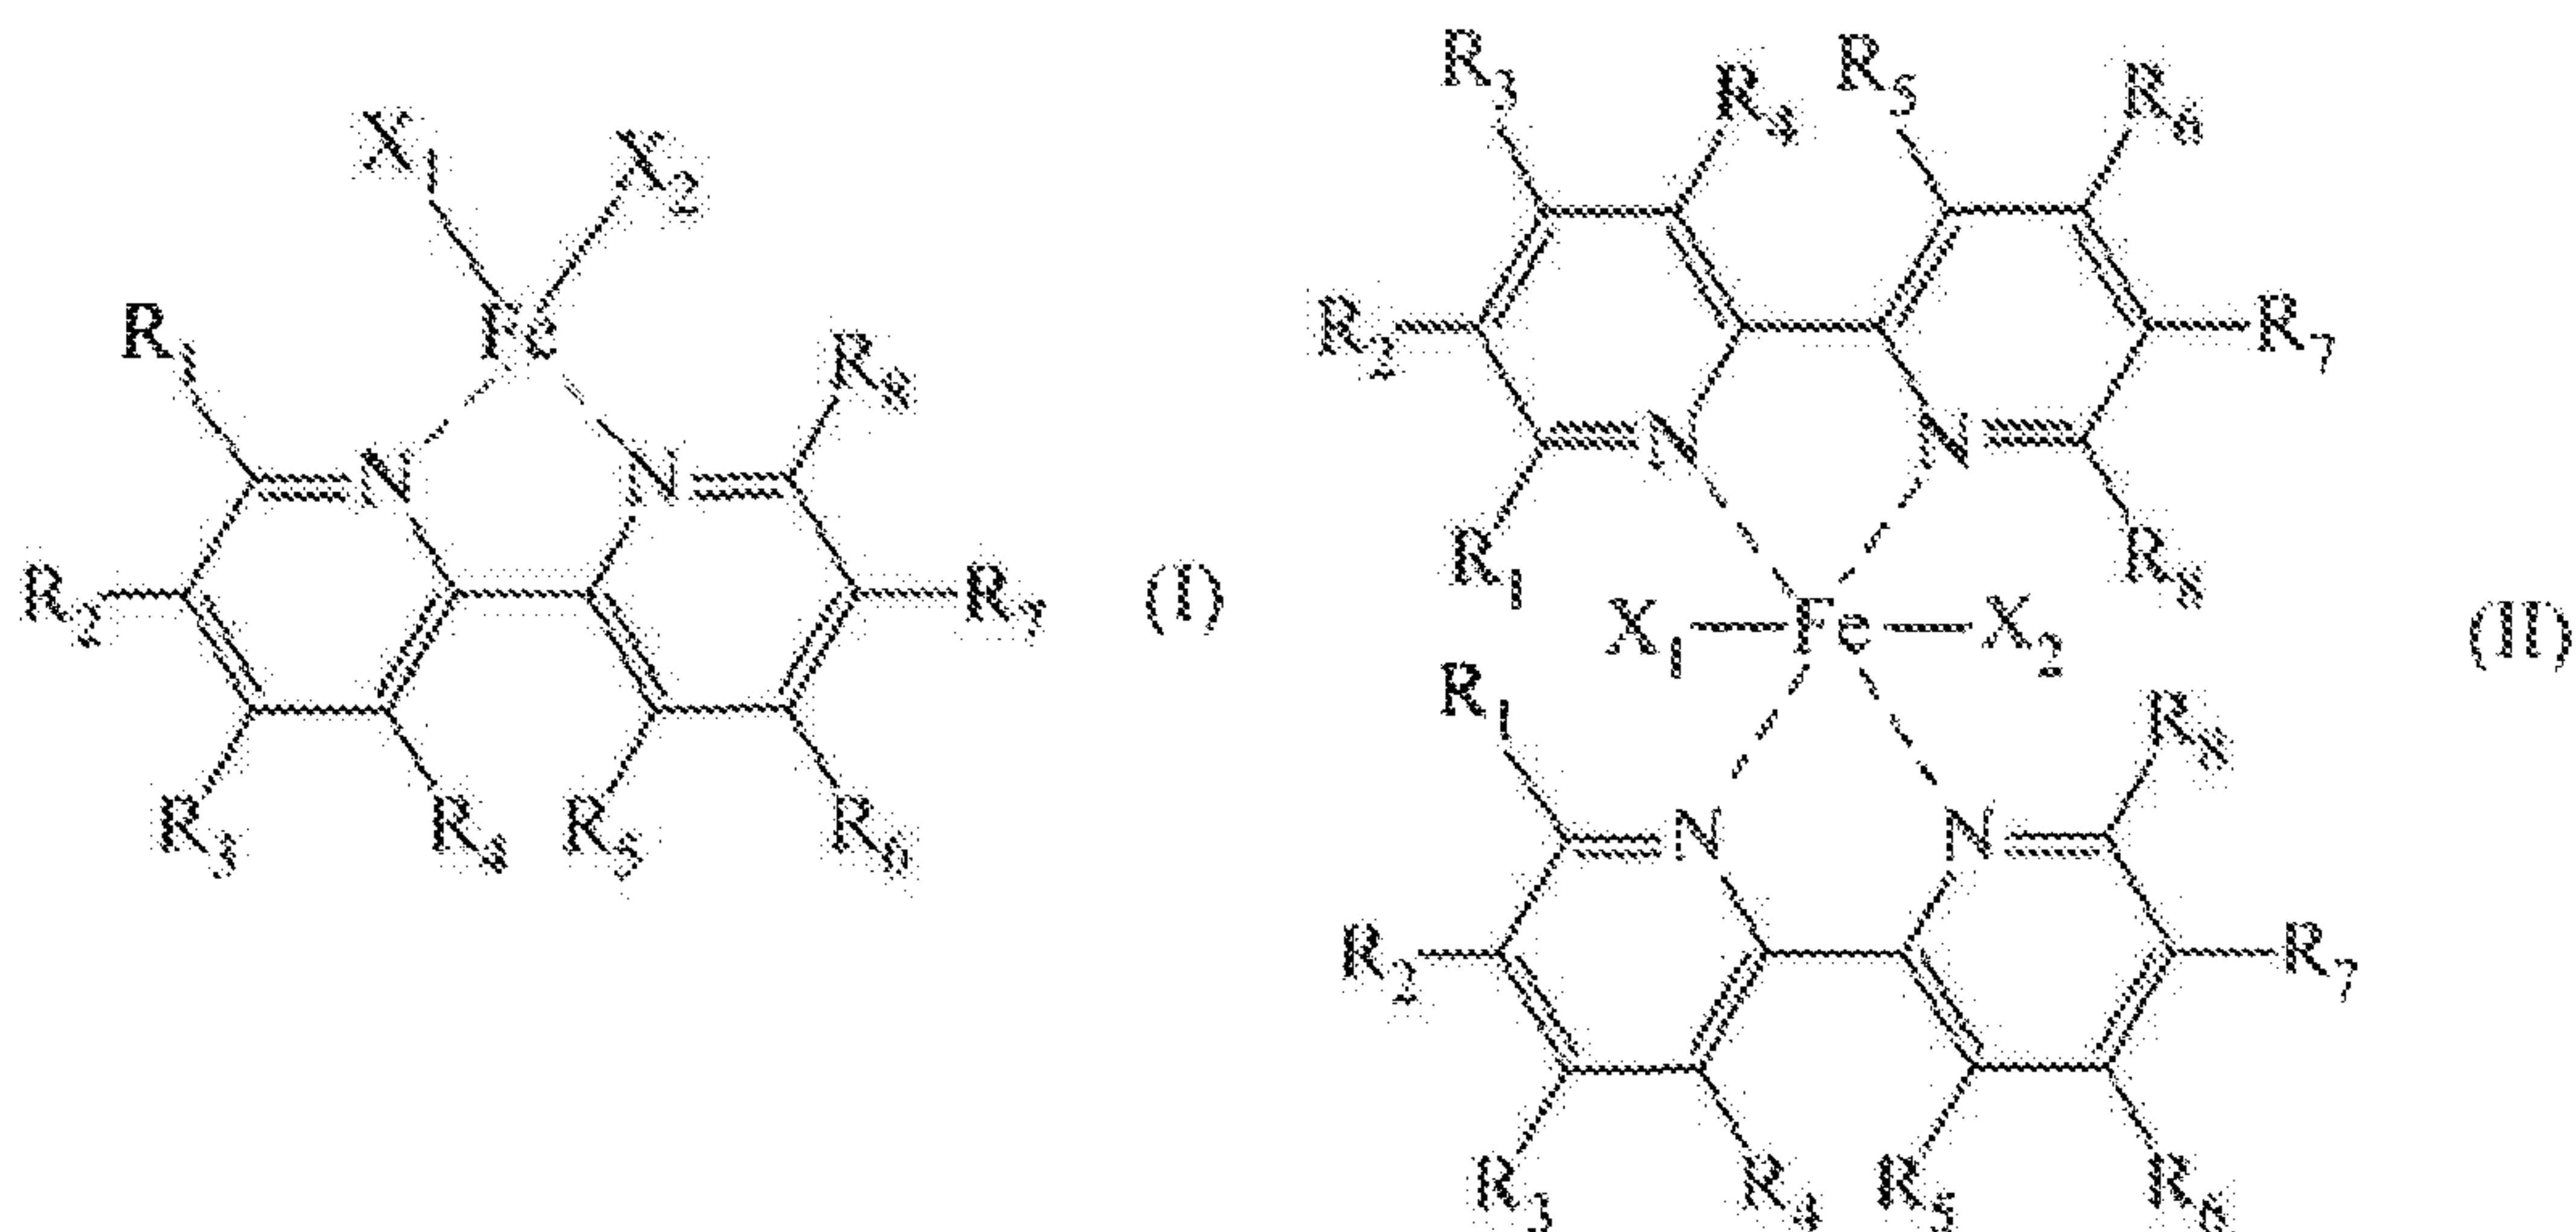

wherein:

- R_1 , R_2 , R_3 , R_4 , R_5 , R_6 , R_7 and R_8 , identical or different, represent a hydrogen atom; or they are selected from linear or branched, optionally halogenated, C_1 - C_{20} alkyl groups, preferably C_1 - C_{15} , optionally substituted cycloalkyl groups;
- or R_4 and R_5 , may be optionally linked together to form, together with the other atoms to which they are linked, a saturated, unsaturated or aromatic cycle containing from 4 to 6 carbon atoms, optionally substituted with linear or branched, C_1 - C_{20} alkyl groups, preferably C_1 - C_{15} , said cycle optionally containing heteroatoms such as, for example, oxygen, sulfur, nitrogen, silicon, phosphorous, selenium;
- or R_1 and R_2 or R_3 and R_2 , and/or R_3 and R_4 , and/or R_5 and R_6 , and/or R_6 and R_7 or R_7 and R_8 , may be optionally linked together to form together with

other atoms to which they are linked, a saturated, unsaturated or aromatic cycle containing from 4 to 6 carbon atoms, optionally substituted with linear or branched, C₁-C₂₀ alkyl groups, preferably C₁-C₁₅, said cycle optionally containing heteroatoms such as, for example, oxygen, sulfur, nitrogen, silicon, phosphorus, selenium;

- X₁ and X₂, identical or different, represent a halogen atom such as, for example, chlorine, bromine, iodine; or are selected from linear or branched C₁-C₂₀ alkyl groups, preferably C₁-C₁₅, -OCOR₉ groups or -OR₉ groups wherein R₉ is selected from linear or branched C₁-C₂₀ alkyl groups, preferably C₁-C₁₅;

and continuing said living polymerization until substantially complete conversion of 1,3-butadiene;

- (ii) adding isoprene to the polymerization mixture obtained in step (i) and continuing said living polymerization until substantially complete isoprene conversion.

For the purpose of the present description and of the following claims, the phrase "substantially complete conversion" means that the polymerization is continued until at least 98%, preferably at least 99%, more preferably 100%, of the monomer loaded, i.e. 1,3-butadiene in step (i) and isoprene in step (ii), has been polymerized.

In accordance with a preferred embodiment of the present invention, in said iron complex having general formula (I) or (II):

- R₁, R₂, R₃, R₄, R₅, R₆, R₇ and R₈, identical, represent a hydrogen atom;
- or R₁, R₂, R₃, R₆, R₇ and R₈, identical, represent a hydrogen atom and R₄ and R₅ are linked to form together with the other atoms to which they are linked a saturated, unsaturated, or aromatic cycle containing from 4 to 6 carbon atoms, preferably benzene;

- X_1 and X_2 , identical or different, represent a halogen atom such as, for example, chlorine, bromine, iodine, preferably chlorine.

Further details related to said iron complexes having general formula (I) or (II) as well as to the preparation thereof, can be found in international patent application WO 02/102861, the contents of which are incorporated herein as reference.

The aforementioned iron complex having general formula (I) or (II) can be considered, in accordance with the present invention, under any physical form such as, for example, the isolated and purified solid form, the form solvated with an appropriate solvent, or the one supported on suitable organic or inorganic solids, preferably having a granular or powdered physical form.

In accordance with a preferred embodiment of the present invention, said catalytic system may comprise (b) at least one co-catalyst selected from:

- (b₁) aluminum alkyls having general formula (III):



wherein X' represents a halogen atom such as, for example, chlorine, bromine, iodine, fluorine; R_{10} , identical or different, represent a hydrogen atom, or are selected from linear or branched C_1 - C_{20} alkyl groups, cycloalkyl groups, aryl groups, said groups being optionally substituted with one or more silicon or germanium atoms; and n is an integer ranging from 0 to 2;

- (b₂) organooxygenated compounds of an element M' other than carbon belonging to groups 13 or 14 of the Periodic Table of the Elements, preferably organooxygenated compounds of aluminum, gallium, tin.

Said organo-oxygenated compounds (b₂) can be defined as organic compounds of M' , wherein the latter is linked to at least one oxygen atom and to at least one organic group comprising an alkyl group having from 1 to 6 carbon atoms, preferably methyl.

It is to be noted that for the purpose of the present invention and of the following claims, the term "Periodic Table of the Elements" refers to the "IUPAC Periodic Table of the Elements", version dated 22 June 2007, available on the following website: www.iupac.org/fileadmin/user_upload/news/IUPAC_Periodic_Table-1Jun12.pdf.


Specific examples of aluminum alkyls having general formula (III) particularly useful for the purpose of the present invention are: tri-methyl-aluminum, tri-(2,3,3-tri-methyl-butyl)-aluminum, tri-(2,3-di-methyl-hexyl)-aluminum, tri-(2,3-di-methyl-butyl)-aluminum, tri-(2,3-di-methyl-pentyl)-aluminum, tri-(2,3-di-methyl-heptyl)-aluminum, tri-(2-methyl-3-ethyl-pentyl)-aluminum, tri-(2-methyl-3-ethyl-hexyl)-aluminum, tri-(2-methyl-3-ethyl-heptyl)-aluminum, tri-(2-methyl-3-propyl-hexyl)-aluminum, tri-ethyl-aluminum, tri-(2-ethyl-3-methyl-butyl)-aluminum, tri-(2-ethyl-3-methyl-pentyl)-aluminum, tri-(2,3-di-ethyl-pentyl-aluminum), tri-*n*-propyl-aluminum, tri-*iso*-propyl-aluminum, tri-(2-propyl-3-methyl-butyl)-aluminum, tri-(2-*iso*-propyl-3-methyl-butyl)-aluminum, tri-*n*-butyl-aluminum, tri-*iso*-butyl-aluminum (TIBA), tri-*tert*-butyl-aluminum, tri-(2-*iso*-butyl-3-methyl-pentyl)-aluminum, tri-(2,3,3-tri-methyl-pentyl)-aluminum, tri-(2,3,3-tri-methyl-hexyl)-aluminum, tri-(2-ethyl-3,3-di-methyl-butyl)-aluminum, tri-(2-ethyl-3,3-di-methyl-pentyl)-aluminum, tri-(2-*iso*-propyl-3,3-dimethyl-butyl)-aluminum, tri-(2-tri-methylsilyl-propyl)-aluminum, tri-2-methyl-3-phenyl-butyl)-aluminum, tri-(2-ethyl-3-phenyl-butyl)-aluminum, tri-(2,3-di-methyl-3-phenyl-butyl)-aluminum, tri-(2-phenyl-propyl)-aluminum, tri-[2-(4-fluoro-phenyl)-propyl]-aluminum, tri-[2-(4-chloro-phenyl)-propyl]-aluminum, tri-[2-(3-*iso*-propyl-phenyl-tri-(2-phenyl-butyl)-aluminum, tri-(3-methyl-2-phenyl-butyl)-aluminum, tri-(2-phenyl-pentyl)-aluminum, tri-[2-(penta-fluoro-phenyl)-propyl]-aluminum, tri-(2,2-diphenyl-ethyl)-aluminum, tri-(2-phenyl-methyl-propyl)-aluminum, tri-pentyl-aluminum, tri-hexyl-aluminum, tri-cyclohexyl-aluminum, tri-octyl-aluminum, di-ethyl-aluminum hydride, di-*n*-propyl-aluminum hydride, di-*n*-butyl-aluminum hydride, di-

iso-butyl-aluminum hydride (DIBAH), di-hexyl-aluminum hydride, di-*iso*-hexyl-aluminum hydride, di-octyl-aluminum hydride, di-*iso*-octyl-aluminum hydride, ethyl-aluminum di-hydride, *n*-propyl-aluminum di-hydride, *iso*-butyl-aluminum di-hydride, di-ethyl-aluminum chloride (DEAC), mono-ethyl-aluminum dichloride (EADC), di-methyl-aluminum chloride, di-*iso*-butyl-aluminum chloride, *iso*-butyl-aluminum dichloride, ethyl-aluminum-sesquichloride (EASC), as well as the corresponding compounds wherein one of the hydrocarbon substituents is substituted by a hydrogen atom and those wherein one or two of the hydrocarbon substituents are substituted with an *iso*-butyl group. Di-*iso*-butyl-aluminum hydride (DIBAH), tri-*iso*-butyl-aluminum (TIBA), di-ethyl-aluminum chloride (DEAC), mono-ethyl-aluminum dichloride (EADC), ethylaluminum-sesquichloride (EASC), are particularly preferred.

Preferably, when used for the formation of a catalytic copolymerization system in accordance with the present invention, the aluminum alkyls having general formula (III) can be placed in contact with an iron complex having general formula (I) or (II), in proportions such that the molar ratio between the iron contained in the iron complex having general formula (I) or (II) and the aluminum contained in the aluminum alkyls having general formula (III) can be ranging from 5 to 5000, preferably ranging from 10 to 1000. The sequence with which the iron complex having general formula (I) or (II) and the aluminum alkyl having general formula (III) are placed in contact with each other is not particularly critical.

Further details on aluminum alkyls having general formula (III) can be found in international patent application WO 2011/061151.

In accordance with a particularly preferred embodiment, said organo-oxygenated compounds (b_2) can be chosen from the aluminoxanes having general formula (IV):

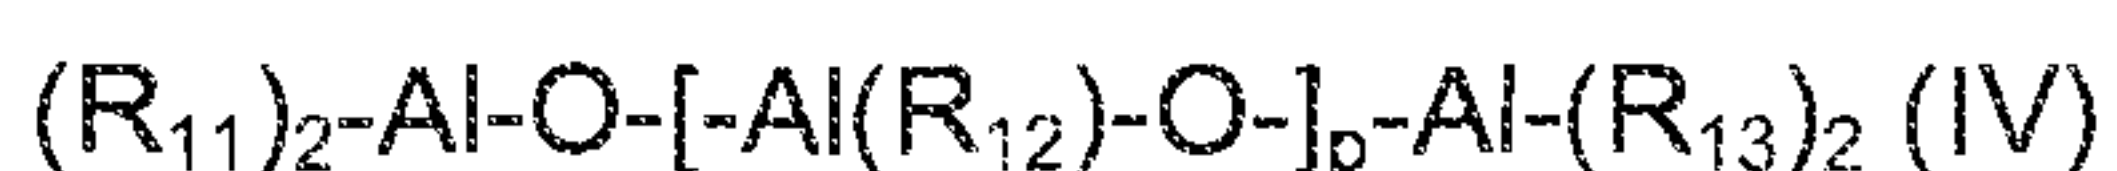

wherein R_{11} , R_{12} and R_{13} , identical or different, represent a hydrogen atom, or a halogen atom such as, for example, chlorine, bromine, iodine, fluorine; or are selected from linear or branched C_1 - C_{20} alkyl groups, cycloalkyl groups, aryl groups, said groups being optionally substituted with one or more silicon or germanium atoms; and p is an integer ranging from 0 to 1000.

As is known, aluminoxanes are compounds containing Al-O-Al bonds, with a variable O/Al ratio, obtainable according to processes known in the prior art such as, for example, by reaction, in controlled conditions, of an aluminum alkyl or an aluminum alkyl halogenide, with water, or with other compounds containing predetermined quantities of available water such as, for example, in the case of the reaction of aluminum trimethyl with aluminum sulfate hexahydrate, copper sulfate pentahydrate, or iron sulfate pentahydrate.

Said aluminoxanes and, in particular, methylaluminoxane (MAO), are compounds that can be obtained through known organometallic chemical processes as, for example, by adding trimethyl aluminum to a suspension in aluminum sulfate hexahydrate.

Preferably, when used for the formation of a catalytic copolymerization system in accordance with the present invention, the aluminoxanes having general formula (IV) can be placed in contact with an iron complex having general formula (I) or (II), in proportions such that the molar ratio between the aluminum (Al) contained in the aluminoxane having general formula (IV) and the iron contained in the iron complex having general formula (I) or (II) is ranging from 10 to 10000, preferably ranging from 100 to 5000. The sequence with which the iron complex having general formula (I) or (II) and the aluminoxane having general formula (IV) are placed in contact with each other is not particularly critical.

As well as the aforementioned preferred aluminoxanes having general formula (IV), the

definition of the compound (b₂) in accordance with the present invention also includes galloxanes wherein, in the general formula (IV), gallium is present in the place of aluminum and stannoxanes wherein, in the general formula (IV), tin is present in the place of aluminum, whose use as co-catalysts for the polymerization of olefins in the presence of metallocene complexes is known. Further details in relation to said galloxanes and stannoxanes can be found, for example, in the American patents US 5,128,295 and US 5,258,475.

Specific examples of aluminoxanes having general formula (IV) particularly useful for the purpose of the present invention are: methylaluminoxane (MAO), ethylaluminoxane, *n*-butylaluminoxane, tetra-*iso*-butylaluminoxane (TIBAO), *tert*-butylaluminoxane, tetra-(2,4,4-trimethylpentyl)aluminoxane (TIOAO), tetra-(2,3-dimethylbutyl)aluminoxane (TDMBAO), tetra-(2,3,3-trimethylbutyl)aluminoxane (TTMBAO). Methylaluminoxane (MAO) is particularly preferred.

Further details on aluminoxanes having general formula (IV) can be found in international patent application WO 2011/061151.

In general, the formation of the catalytic system comprising the iron complex having general formula (I) or (II) and the co-catalyst (b), is preferably performed in an inert liquid medium, more preferably in a hydrocarbon solvent. The choice of the iron complex having general formula (I) or (II) and the co-catalyst (b), as well as the particular methodology used, may vary depending on the molecular structures and the desired result, according to what is similarly reported in relevant literature accessible to an expert skilled in the art for other transition metal complexes with imine ligands, as reported, for example, by L. K. Johnson et al., in "*Journal of the American Chemical Society*" (1995), Vol. 117, pag. 6414-6415, and by van Koten G. et al, in "*Advances in Organometallic Chemistry*" (1982), Vol. 21, pag. 151-239.

For the purpose of the present description and of the following claims, the terms "mole" and "molar ratio" are used both with reference to compounds consisting of molecules and with reference to atoms and ions, omitting for the latter ones the terms gram atom or atomic ratio, even if they are scientifically more accurate.

For the purpose of the present invention, other additives or components may optionally be added to the aforementioned catalytic system so as to adapt it to satisfy specific practical requirements. The catalytic systems thus obtained can therefore be considered included within the scope of the present invention. Additives and/or components that can be added in the preparation and/or formulation of the catalytic system according to the present invention are, for example: inert solvents, such as, for example, aliphatic and/or aromatic hydrocarbons; aliphatic and/or aromatic ethers; weakly coordinating additives (e.g., Lewis bases) selected, for example, from non-polymerizable olefins; sterically hindered or electronically poor ethers; halogenating agents such as, for example, silicon halides, halogenated hydrocarbons, preferably chlorinated; or mixtures thereof.

Said catalytic system can be prepared, as already reported above, according to methods known in the prior art.

For example, said catalytic system can be prepared separately (preformed) and subsequently introduced into the (co)polymerization environment. On this point, said catalytic system can be prepared by making at least one iron complex having general formula (I) or (II) react with at least one co-catalyst (b), optionally in presence of other additives or components selected from those cited above, in presence of a solvent such as, for example, toluene, heptane, at a temperature ranging from 20°C to 60°C, for a time ranging from 10 seconds to 10 hours, preferably ranging from 30 seconds to 5 hours. Further details on the preparation of said catalytic system can be found in the

examples reported below.

Alternatively, said catalytic system can be prepared *in situ*, i.e. directly in the (co)polymerization environment. On this point, said catalytic system can be prepared by separately introducing the iron complex having general formula (I) or (II), the co-catalyst (b) and 1,3-butadiene, operating under the conditions wherein the polymerization is performed in step (i) of the process according to the present invention.

For the purpose of the present invention, the aforementioned catalytic systems can also be supported on inert solids, preferably consisting of silicon and/or aluminum oxides, such as, for example, silica, alumina or silico-aluminates. For supporting said catalytic systems the known supporting techniques can be used, generally comprising contact, in a suitable inert liquid medium, between the support, optionally activated by heating to temperatures over 200°C, and one or both components, i.e. the iron complex having general formula (I) or (II) and (b) the co-catalyst, of the catalytic system used in the present invention. It is not necessary, for the purposes of the present invention, for both components to be supported, since only the iron complex (a) having general formula (I) or (II), or the co-catalyst (b) may be present on the support surface. In the latter case, the missing component on the surface is subsequently placed in contact with the supported component when the active catalyst is to be formed by polymerization.

The scope of the present invention also includes the iron complex having general formula (I) or (II), and catalytic systems based thereon, which are supported on a solid through the functionalization of the latter and the formation of a covalent bond between the solid and the iron complex having general formula (I) or (II).

The quantity of iron complex having general formula (I) or (II) and co-catalyst (b) which

can be used in the (co)polymerization of conjugated dienes varies according to the (co)polymerization process to be performed. Said quantity is however such as to obtain a molar ratio between the iron contained in the iron complex having general formula (I) or (II) and the metal contained in the co-catalyst (b), e.g., aluminum in the case wherein the co-catalyst (b) is chosen from the aluminum alkyls (b₁) or from the aluminoxanes (b₂), boron in the case wherein the co-catalyst (b) is chosen from the compounds or mixtures of compounds (b₃) having general formula (IV), ranging from the values reported above.

In accordance with a preferred embodiment of the present invention, said process can be performed in the presence of an inert organic solvent, chosen, for example, from: saturated aliphatic hydrocarbons such as, for example, butane, pentane, hexane, heptane, or mixtures thereof; saturated cyclo-aliphatic hydrocarbons such as, for example, cyclopentane, cyclohexane, or mixtures thereof; mono-olefins such as, for example, 1-butene, 2-butene, or mixtures thereof; aromatic hydrocarbons such as, for example, benzene, toluene, xylene, or mixtures thereof; halogenated hydrocarbons such as, for example, methylene chloride, chloroform, carbon tetrachloride, trichloroethylene, perchloroethylene, 1,2-dichloroethane, chlorobenzene, bromobenzene, chlorotoluene, or mixtures thereof. Preferably, said solvent is chosen from saturated aliphatic hydrocarbons, more preferably toluene.

In accordance with a preferred embodiment of the present invention, in said process:

- in step (i), the concentration of 1,3-butadiene in said inert organic solvent can be ranging from 5% by weight to 50% by weight, preferably ranging from 10% by weight to 20% by weight, relative to the total weight of the 1,3-butadiene mixture and the inert organic solvent;
- in step (ii), the isoprene concentration can be ranging from 5% by weight to 50%

by weight, preferably ranging from 10% by weight to 20% by weight, relative to the total weight of the polymerization mixture obtained in said step (i).

In accordance with a preferred embodiment of the present invention, said process can be performed at a temperature ranging from -70°C to +100°C, preferably ranging from -20°C to +80°C.

With regard to pressure, it is preferable to operate at the pressure of the component(s) of the mixture to be copolymerized.

The aforementioned process can be performed both continuously and in batches.

For the purpose of understanding the present invention better and to put it into practice, below are some illustrative and non-limiting examples thereof.

EXAMPLES

Reagents and materials

The list below reports the reagents and materials used in the following examples of the invention, any pre-treatments thereof and their manufacturer:

- anhydrous iron(II) chloride (FeCl_2) (Aldrich): purity 97%, used as such;
- iron(II) chloride tetrahydrate ($\text{FeCl}_2 \cdot 4\text{H}_2\text{O}$) (Aldrich): purity 99.99%, used as such;
- 2,2'-bipyridine (Aldrich): purity $\geq 98\%$, used as such;
- 1,10-phenanthroline (Aldrich): purity $\geq 99\%$, used as such;
- phosphoric anhydride (P_2O_5) (Aldrich): purity $\geq 99\%$, used as such;
- methylaluminoxane (MAO) (toluene solution 10% in weight) (Aldrich): used as such;
- tri-/iso-butyl-aluminum (TIBA) (Aldrich): purity $\geq 99\%$, used as such;
- pentane (Fluka): purity 99%, refluxed over a sodium/potassium (Na/K) alloy in a nitrogen atmosphere for about 8 hours and subsequently distilled and maintained in said atmosphere, at 4°C, on molecular sieves;

- ~ heptane (Fluka): purity 99%, refluxed over a sodium/potassium (Na/K) alloy in a nitrogen atmosphere for about 8 hours and subsequently distilled and maintained in said atmosphere, at 4°C, on molecular sieves;
- ~ toluene (Fluka): purity $\geq 99.5\%$, refluxed over sodium (Na) in a nitrogen atmosphere for about 8 hours and subsequently distilled and maintained in said atmosphere, at 4°C, on molecular sieves;
- ~ diethylether (Aldrich): purity $\geq 99.8\%$, refluxed over a sodium/potassium (Na/K) alloy in a nitrogen atmosphere for about 8 hours and subsequently distilled and maintained in said atmosphere, at 4°C, on molecular sieves;
- ~ 1,2-dichlorobenzene (Aldrich): purity $\geq 99\%$, refluxed over calcium hydride (CaH_2) in a nitrogen atmosphere for about 8 hours and subsequently distilled and maintained in said atmosphere, at 4°C, on molecular sieves;
- ~ 1,3-butadiene (Air Liquide): purity $\geq 99.5\%$, evaporated from the container before each production, dried by passing it through a molecular sieve packed column and condensed inside the reactor that was pre-cooled to -20°C;
- ~ isoprene (Aldrich): purity $\geq 99\%$, refluxed over calcium hydride (CaH_2) for 2 hours, then distilled "trap-to-trap" and stored in a nitrogen atmosphere at 4°C;
- ~ ethanol (Carlo Erba, RPE): anhydriified through distillation on magnesium (Mg) and subsequently degassed;
- ~ methanol (Carlo Erba, RPE): used as such;
- ~ hydrochloric acid in 37% aqueous solution (Aldrich): used as such;
- ~ dichloromethane (CH_2Cl_2) (Acros): pure, $\geq 99.9\%$, used as such;
- ~ hydrofluoric acid (HF) (40% aqueous solution) (Aldrich): used as such;
- ~ sulfuric acid (H_2SO_4) (96% aqueous solution) (Aldrich): used as such;
- ~ nitric acid (HNO_3) (70% aqueous solution) (Aldrich): used as such;

- sodium carbonate (Na_2CO_3) (Aldrich): used as such;
- silver nitrate (AgNO_3) (Aldrich): used as such;
- deuterated tetrachloroethylene ($\text{C}_2\text{D}_2\text{Cl}_4$) (Acros): used as such;
- hexamethyldisilazane (HMDS) (Acros): used as such;
- deuterated chloroform (CDCl_3) (Aldrich): used as such;
- tetramethylsilane (TMS) (Acros): used as such;
- chloroform (CH_2Cl_3) (Aldrich): used as such.

Analysis and characterization methods

The analysis and characterization methods reported below were used.

Elementary analysis

a) Determination of Fe

For the determination of the quantity by weight of iron (Fe) in the iron complexes used in the present invention, an exactly weighed aliquot, operating in dry-box under nitrogen flow, of about 30 mg - 50 mg of sample, was placed in a 30 ml platinum crucible, together with a 1 ml mixture of 40% hydrofluoric acid (HF), 0.25 ml of 96% sulfuric acid (H_2SO_4) and 1 ml of 70% nitric acid (HNO_3). The crucible was then heated on a hot plate increasing the temperature until white sulfur fumes appeared (about 200°C). The mixture thus obtained was cooled to ambient temperature and 1 ml of 70% nitric acid (HNO_3) was added, then it was left again until fumes appeared. After repeating the sequence another two times, a clear, almost colorless, solution was obtained. 1 ml of nitric acid (HNO_3) and about 15 ml of water were then added cold, then heated to 80°C for about 30 minutes. The sample thus prepared was diluted with MilliQ pure water until it weighed about 50 g, precisely weighed, to obtain a solution on which the instrumental analytical determination was performed using a Thermo Optek IRIS Advantage Duo ICP-OES (plasma optical emission) spectrometer, for comparison

with solutions of known concentration. For this purpose, for every analyte, a calibration curve was prepared in the range 0 ppm - 10 ppm, measuring calibration solutions by dilution by weight of certified solutions.

The solution of sample prepared as above was then diluted again by weight in order to obtain concentrations close to the reference ones, before performing spectrophotometric measurement. All the samples were prepared in double quantities. The results were considered acceptable if the individual repeated test data did not have a relative deviation of more than 2% relative to their mean value.

b) Determination of chlorine

For said purpose, samples of the iron complexes used in the present invention, about 30 mg - 50 mg, were precisely weighed in 100 ml glass beakers in dry-box under nitrogen flow. 2 g of sodium carbonate (Na_2CO_3) were added and, outside the dry-box, 50 ml of MilliQ water. It was brought to the boil on the hot plate, under magnetic stirring, for about 30 minutes. It was left to cool, then 1/5 diluted sulfuric acid (H_2SO_4) was added, until acid reaction and was then titrated with 0.1 N silver nitrate (AgNO_3) with a potentiometric titrator.

c) Determination of carbon, hydrogen and nitrogen

The determination of carbon, hydrogen and nitrogen, in the iron complexes used in the present invention, as well as in the ligands used for the purpose of the present invention, was performed through a Carlo Erba automatic analyzer Mod. 1106.

^{13}C -NMR and ^1H -NMR spectra

The ^{13}C -NMR and ^1H -NMR spectra were recorded using a nuclear magnetic resonance spectrometer mod. Bruker Avance 400, using deuterated tetrachloroethylene ($\text{C}_2\text{D}_2\text{Cl}_4$) at 103°C, and hexamethyldisilazane (HDMS) as internal standard, or using deuterated chloroform (CDCl_3), at 25°C, and tetramethylsilane (TMS) as internal standard. For this

purpose, copolymeric solutions were used with concentrations equal to 10% by weight relative to the total weight of the copolymeric solution.

The microstructure of the butadiene-isoprene diblock copolymers according to the present invention [i.e. *cis*-1,4 (%) and 1,2 syndiotactic (%) unit content for polybutadiene and *cis*-1,4 (%), 3,4 atactic (%) unit content for polyisoprene] was determined through the analysis of the aforementioned spectra based on the contents reported in literature by Mochel, V. D., in "*Journal of Polymer Science Part A-1: Polymer Chemistry*" (1972), Vol. 10, Issue 4, pg. 1009-1018 for polybutadiene, and by Sato H. et al. in "*Journal of Polymer Science: Polymer Chemistry Edition*" (1979), Vol. 17, Issue 11, pg. 3551-3558, for polyisoprene. For that purpose:

- Figure 1 shows, by way of example, the ^1H -NMR spectrum of a butadiene-isoprene diblock copolymer object of the present invention from which, as reported below, it is possible to determine the composition and the microstructure of said copolymer;
- Figure 1/A, shows, by way of example, the ^{13}C -NMR spectrum of a butadiene-isoprene diblock copolymer object of the present invention (specifically showing only the olefinic zone relative to the C4 carbon of a 1,2 structure butadiene unit) from which, as reported below, it is possible to determine the percentage of syndiotactic triad [(rr) %] in the block of polybutadiene having a 1,2 structure of said copolymer.

In particular, in Figure 1:

A = area of the peaks ranging from 5.15 ppm to 5.65 ppm, corresponding to the two olefinic protons of a butadiene unit having a *cis*-1,4 structure and to one of the three olefinic protons of a butadiene unit having a 1,2 structure;

B = area of the peak ranging from 5.0 ppm to 5.15 ppm, relative to the olefinic proton

of a *cis*-1,4 isoprene unit;

C = area of the peaks ranging from 4.75 ppm to 5.0 ppm, corresponding to two of the three olefinic protons of a butadiene unit having a 1,2 structure;

D = area of the peaks ranging from 4.45 ppm to 4.75 ppm, corresponding to two of the three olefinic protons of a butadiene unit having a 3,4 structure.

The composition and the microstructure of the butadiene-isoprene diblock copolymers object of the present invention is therefore obtained from the following equations:

- total % content of isoprene units (*cis*-1,4 + 3,4):

$$\{(D + 2B) / [(D + 2B) + (A + C/2)]\} \times 100;$$

- total % content of butadiene units (*cis*-1,4 + 1,2):

$$\{(A + C/2) / [(D + 2B) + (A + C/2)]\} \times 100;$$

- percentage of 1,2 units in the butadiene block:

$$[C / (A + C/2)] \times 100;$$

- percentage of 3,4 units in the isoprene block:

$$[D / (D + 2B)] \times 100.$$

In particular, in Figure 1/A, the ^{13}C -NMR spectrum shown therein (as specified above, only the olefinic zone relative to the C4 carbon of a 1,2 structure butadiene unit is shown), the percentage of syndiotactic triads [(rr) %] in the block of polybutadiene having 1,2 structure has been obtained from the areas of the peaks related to the C4 olefinic carbon of a 1,2 unit, through the following equations:

- content of syndiotactic triads [(rr) %]:

$$[(rr) \%] = \{[rr] / [rr + mr + mm]\} \times 100$$

wherein:

[rr]: area of the peaks related to the syndiotactic triad;

[mr]: area of the peaks related to the atactic triad;

[mm]: area of the peaks related to the isotactic triad.

I.R. Spectra

The I.R. spectra (FT-IR) were recorded through Thermo Nicolet Nexus 670 and Bruker IFS 48 spectrophotometers.

The I.R. spectra (FT-IR) of the of the butadiene-isoprene diblock copolymers object of the present invention, were obtained from polymeric films on potassium bromide (KBr) tablets, said films being obtained through the deposition of a solution in hot 1,2-dichlorobenzene of the butadiene-isoprene diblock copolymer to be analyzed. The concentration of the copolymeric solutions analyzed was equal to 10% by weight relative to the total weight of the copolymeric solution.

Thermal analysis (DSC)

The DSC - Differential Scanning Calorimetry - thermal analysis, for the purpose of determining the melting point (T_m) and the crystallization temperature (T_c) of the butadiene-isoprene diblock copolymers object of the present invention, was performed using a Perkin Elmer Pyris differential scanning calorimeter. For this purpose, 5 mg of the butadiene-isoprene diblock copolymer obtained were analyzed, with a scanning speed ranging from 1°C/min to 20°C/min, in an inert nitrogen atmosphere.

The DSC - Differential Scanning Calorimetry - thermal analysis, for the purpose of determining the glass transition temperature (T_g) of the butadiene-isoprene diblock copolymers obtained, was performed by means of the aforementioned calorimeter, using the following thermal program: isotherm for 3 min at +70°C; cooling from +70°C to -90°C at a speed of 10°C/min; isotherm for 3 min at -90°C; heating from -90°C to +70°C at a speed of 10°C/min.

Determination of the molecular weight

The determination of the molecular weight (MW) of the butadiene-isoprene diblock

copolymers object of the present invention was performed through GPC (Gel Permeation Chromatography), using the Waters® Alliance® GPC/V 2000 System by Waters Corporation which uses two detection lines: "Refractive Index" - RI and "Viscometer" operating under the following conditions:

- two PLgel Mixed-B columns;
- solvent/eluent: 1,2-dichlorobenzene (Aldrich);
- flow rate: 0.8 ml/min;
- temperature: 145°C;
- molecular mass calculation: Universal Calibration method.

The weight-average molecular weight (M_w) and the polydispersion index (PDI) are reported, corresponding to the ratio M_w/M_n (M_n = number average molecular weight).

AFM - Atomic Force Microscopy

For the purpose, a thin film of the butadiene-isoprene diblock copolymer object of the present invention to be analyzed was prepared, by depositing a solution in chloroform or in toluene, of said copolymer, through spin-coating on a silicon substrate.


The analysis was performed in the absence of dynamic contact (not contact mode or tapping mode), using an NTEGRA Spectra Atomic Force Microscope made by N-MDT.

During the scanning of the surface of said thin film, the amplitude variations of the oscillations of the tip provide topographic information related to the surface thereof (HEIGHT image). Furthermore, the phase variations of the oscillations of the tip may be used to discriminate between different types of materials present on the surface of said film (different material phases). By way of example, Figures 13 and 23 below show the images obtained from the analysis performed on the butadiene-isoprene diblock copolymers formed by the crystalline polybutadiene (hard block)-amorphous polyisoprene (soft block) of Example 10 and Example 16, respectively, which can be

compared with the images of Figure 27 obtained from the analysis performed on the mechanical mixture of two homopolymers (Example 19).

EXAMPLE 1

Synthesis of Fe(bipy)Cl₂

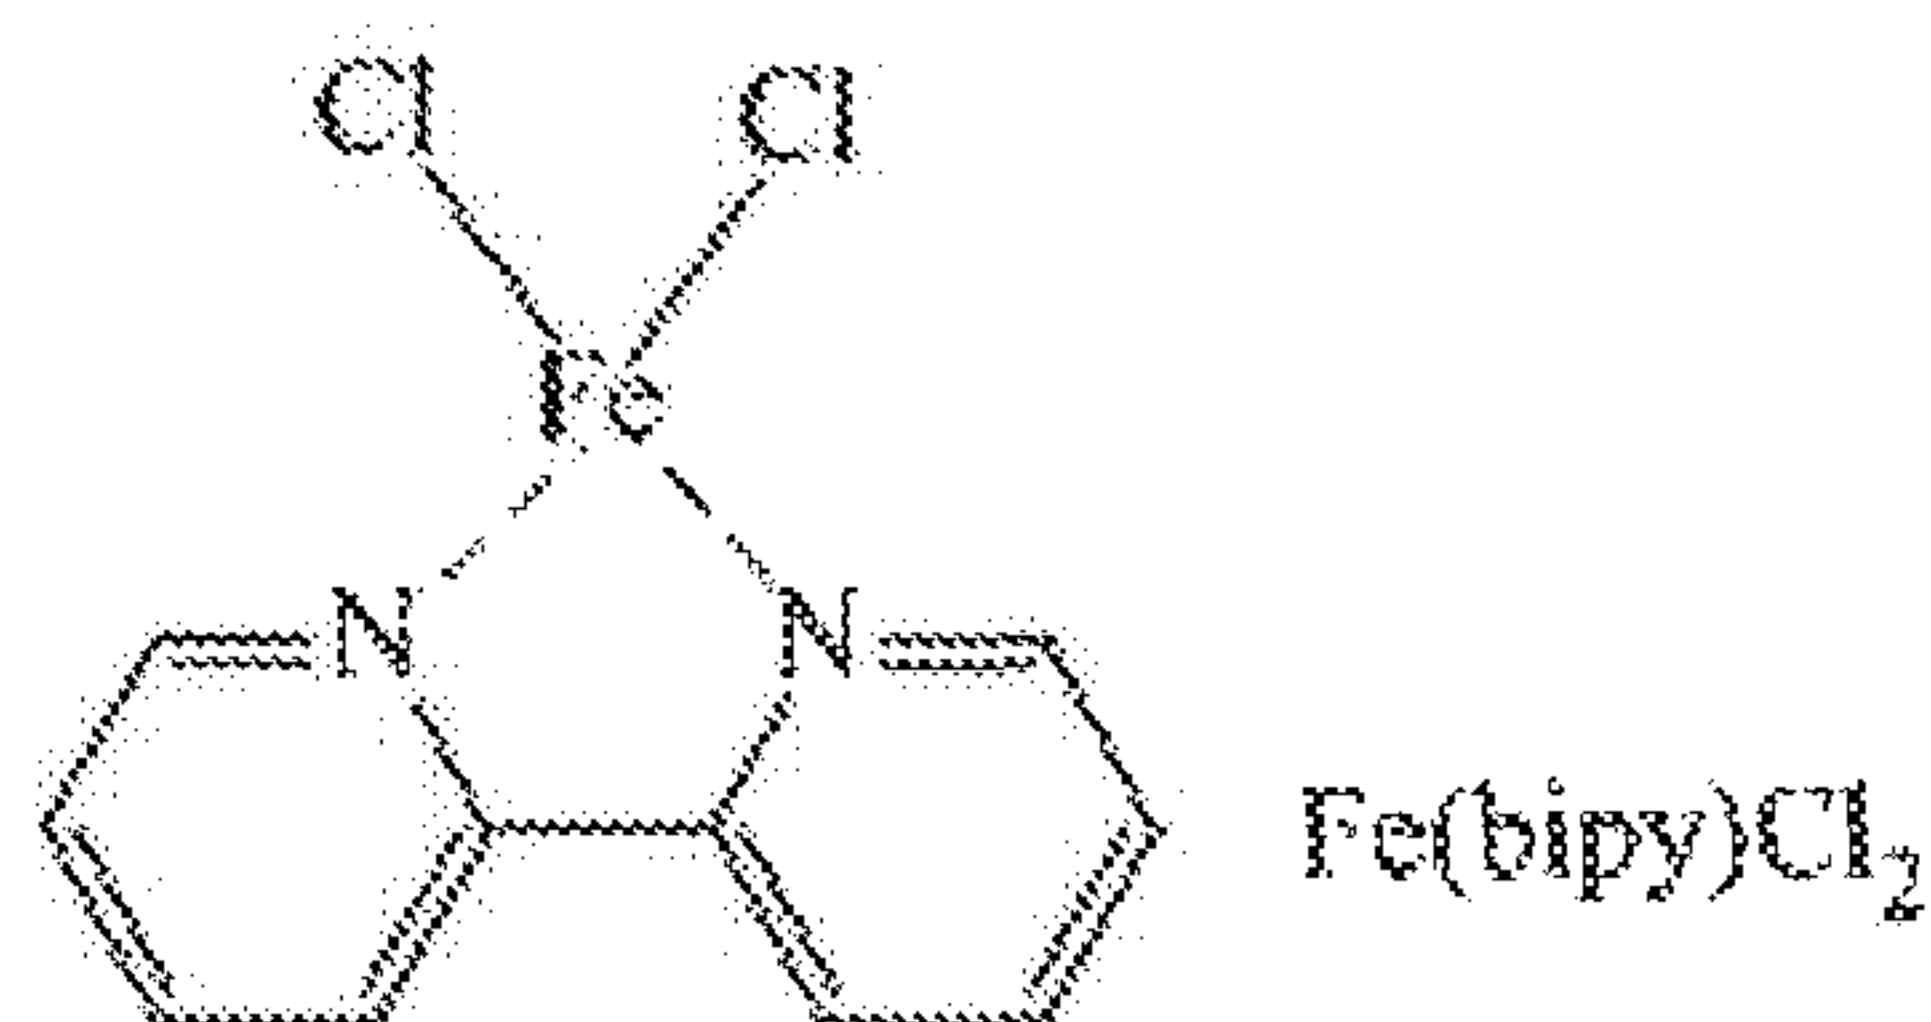


0.585 g (4.61 mmoles) of anhydrous iron dichloride (FeCl₂) and 60 ml of ethanol (anhydrous and degassed) were loaded into a 250 ml flask, in an inert atmosphere: the whole was left, under stirring, at 60°C, until the dissolution of the anhydrous iron dichloride (FeCl₂). Subsequently, 0.504 g (3.23 mmoles) of 2,2'-bipyridine (bipy) dissolved in 30 ml of ethanol (anhydrous and degassed) were added slowly: the whole was left under stirring, in an inert atmosphere, at 60°C, for 5 minutes. The suspension obtained was cooled to room temperature, and the solid obtained was recovered by filtration, washed with ethanol (anhydrous and degassed) (2 x 5 ml) and vacuum dried, at room temperature, obtaining 0.730 g of a solid product corresponding to the complex Fe(bipy)Cl₂, equal to an 80% conversion relative to the 2,2'-bipyridine (bipy) loaded.

Molecular weight (MW): 282.93.

Elementary analysis [found (calculated for C₁₀H₈Cl₂FeN₂)]: C: 42.55% (42.45%), H: 2.96% (2.85%), N: 9.80% (9.90%), Cl: 25.30% (25.06%), Fe: 19.82% (19.74%).

EXAMPLE 2

Synthesis of Fe(phen)Cl₂

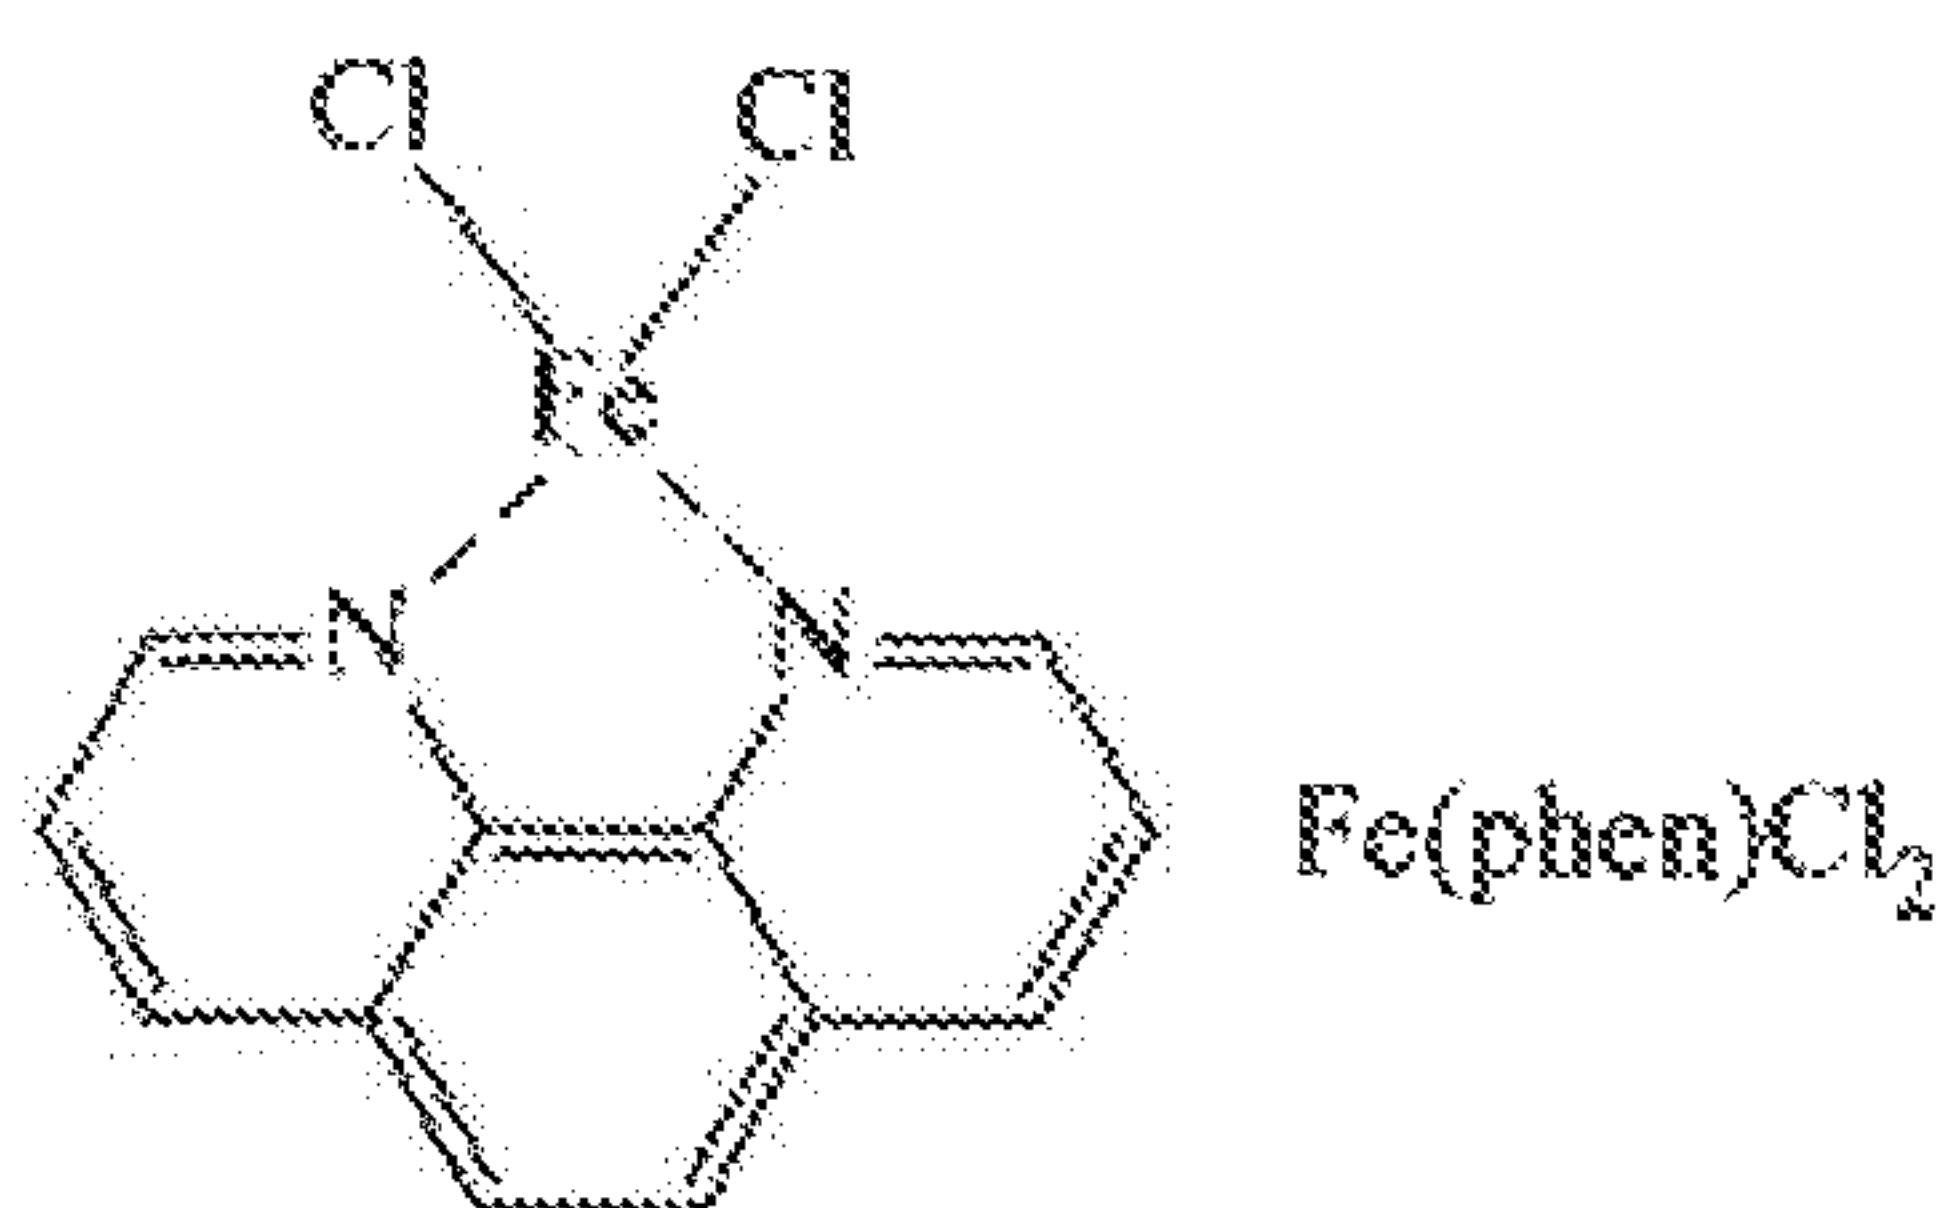


0.724 g (5.71 mmoles) of anhydrous iron dichloride (FeCl_2) and 65 ml of ethanol (anhydrous and degassed) were loaded into a 250 ml flask, in an inert atmosphere: the whole was left, under stirring, in an inert atmosphere, at 60°C , until the dissolution of the anhydrous iron dichloride (FeCl_2). Subsequently, 0.721 g (4 mmoles) of 1,10-phenanthroline (phen) dissolved in 40 ml of ethanol (anhydrous and degassed) were added slowly: the whole was left under stirring, in an inert atmosphere, at 60°C , for 5 minutes. The solution obtained was cooled to room temperature, and the precipitate obtained was recovered by filtration, washed with ethanol (anhydrous and degassed) (2 x 5 ml) and vacuum dried, at room temperature, obtaining 0.983 g of a solid product corresponding to the complex Fe(phen)Cl_2 , equal to an 80% conversion relative to the 1,10-phenanthroline (phen) loaded.

Molecular weight (MW): 306.96.

Elementary analysis [found (calculated for $\text{C}_{12}\text{H}_8\text{Cl}_2\text{FeN}_2$)]: C: 46.87% (46.95%), H: 2.66% (2.63%), N: 9.20% (9.13%), Cl: 23.35% (23.10%), Fe: 18.22% (18.19%).

EXAMPLE 3

Synthesis of $\text{Fe(bipy)}_2\text{Cl}_2$

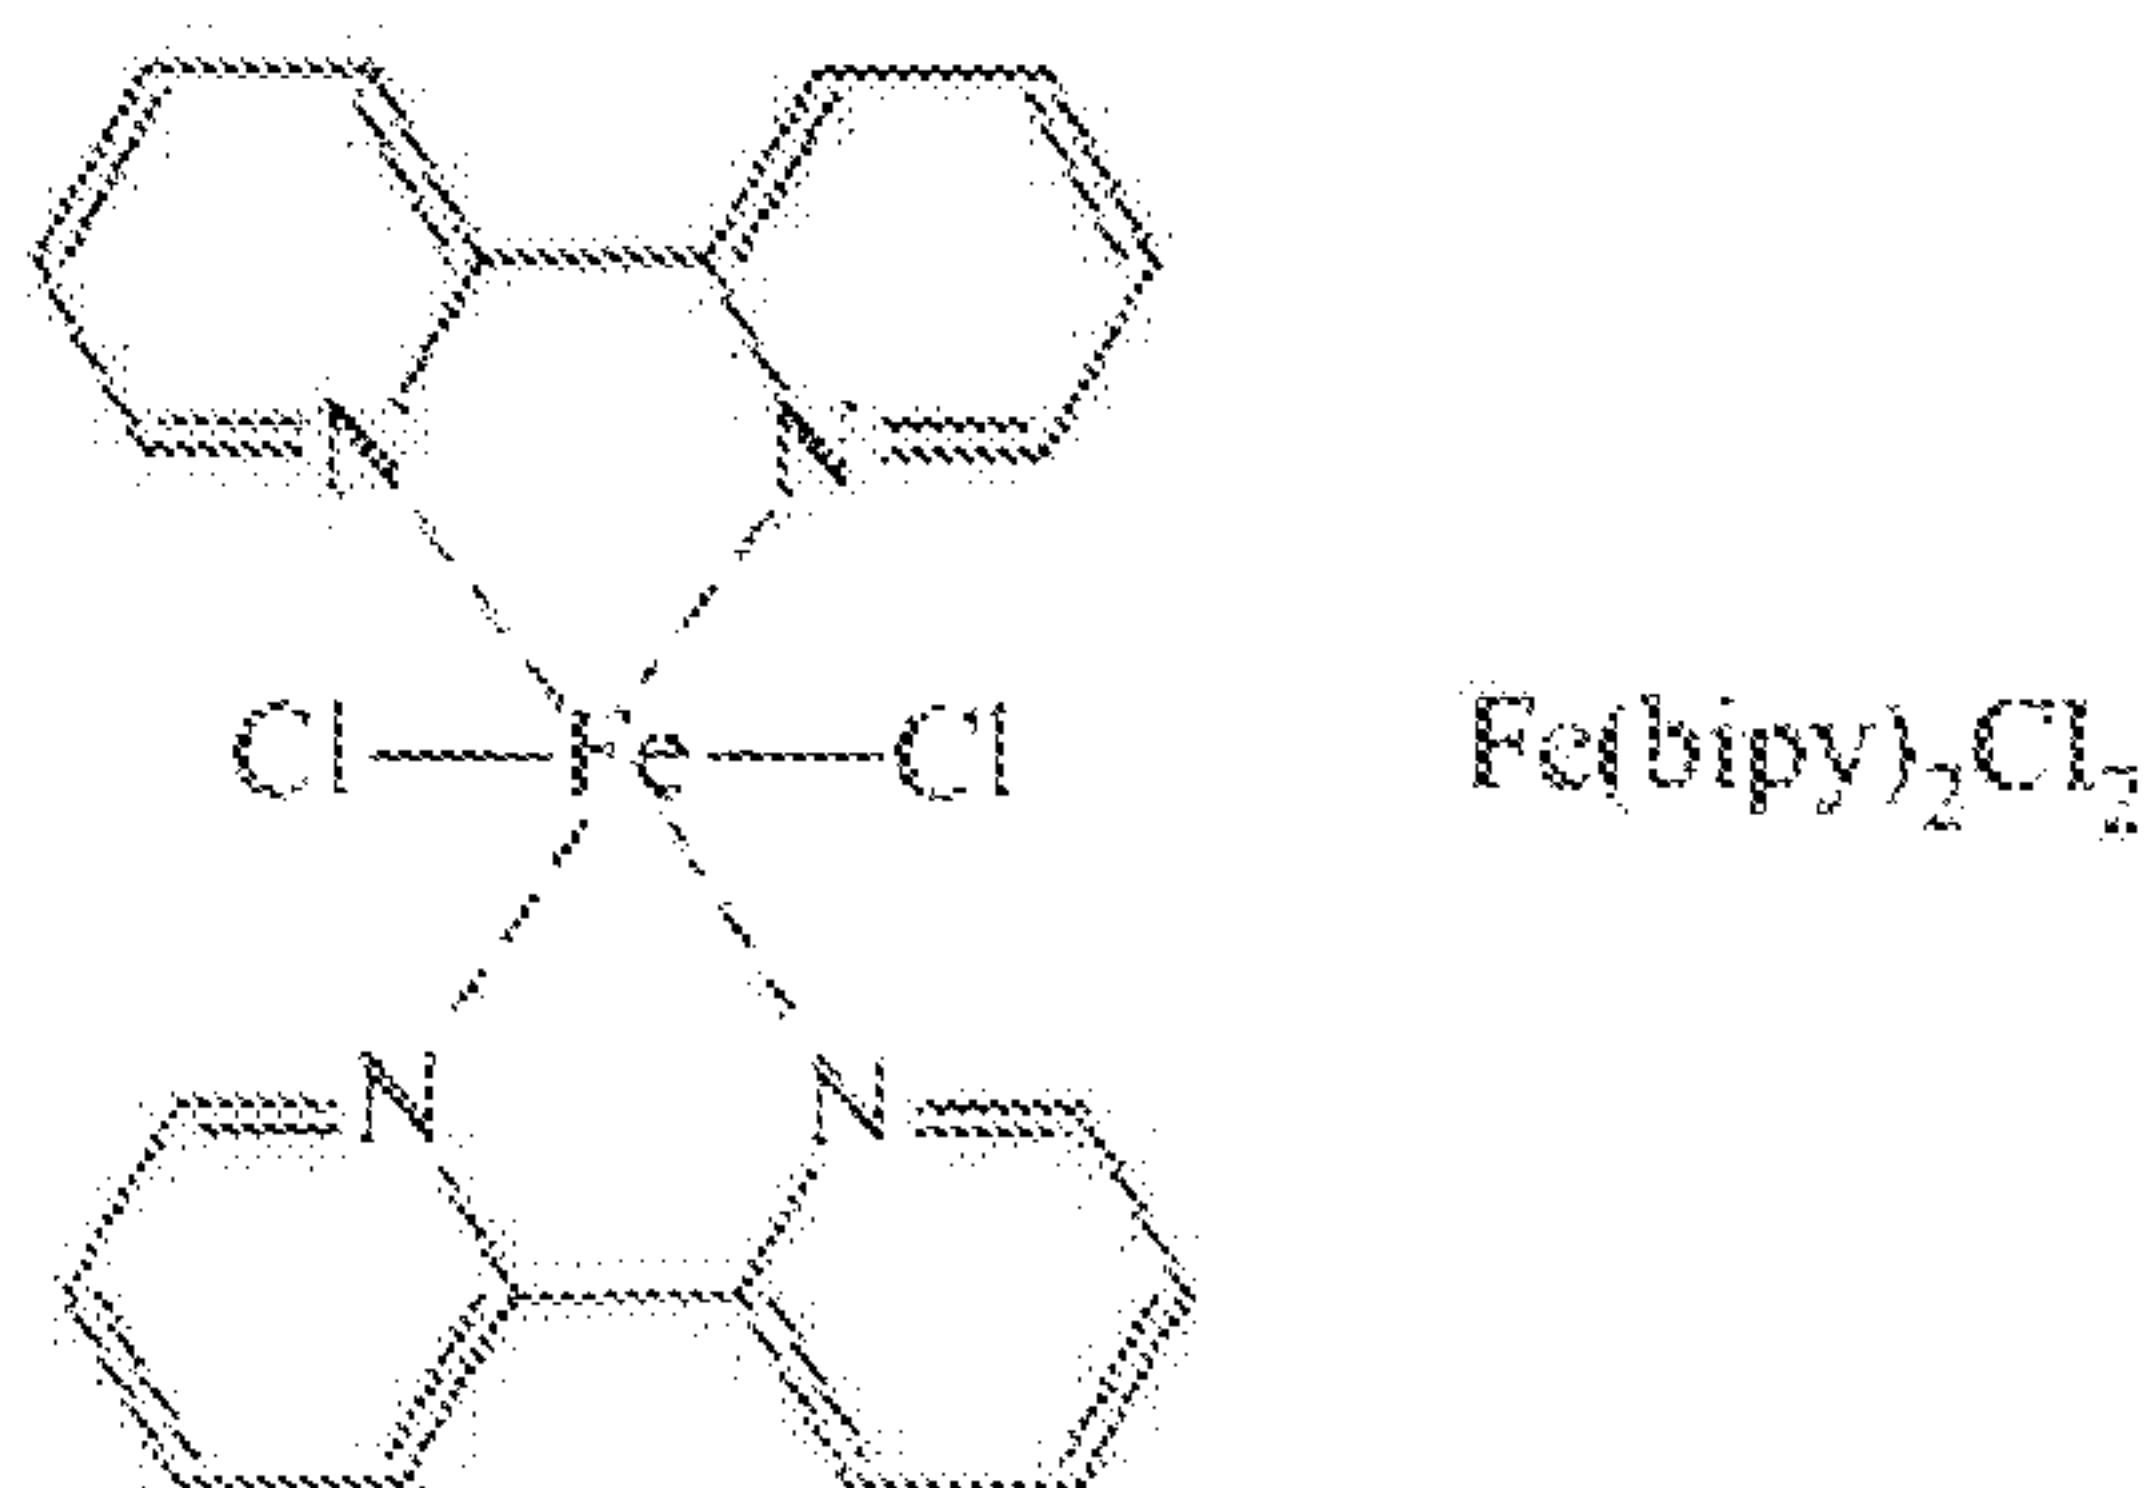


1.29 g (6.5 mmoles) of iron dichloride tetrahydrate ($\text{FeCl}_2 \cdot 4\text{H}_2\text{O}$), 30 ml of water and 3.05 g (19.5 mmoles) of 2,2'-bipyridine (bipy) were loaded, in an inert atmosphere, into a 100 ml flask: the whole was left, under stirring, at room temperature, for 1 hour. The reaction mixture obtained was vacuum dried, at 50°C , obtaining a solid that was vacuum heated at 100°C , for 12 hours, in the presence of phosphoric anhydride (P_2O_5) obtaining 2.4 g of a solid product corresponding to the complex $\text{Fe}(\text{bipy})_2\text{Cl}_2$, equal to an 85% conversion relative to the iron dichloride tetrahydrate ($\text{FeCl}_2 \cdot 4\text{H}_2\text{O}$) loaded.

Molecular weight (MW): 439.12.

Elementary analysis [found (calculated for $\text{C}_{20}\text{H}_{16}\text{Cl}_2\text{FeN}_4$)]: C: 54.75% (54.70%), H: 3.82% (3.67%), N: 12.67% (12.76%), Cl: 15.97% (16.15%), Fe: 12.60% (12.72%).

EXAMPLE 4

Synthesis of $\text{Fe}(\text{phen})_2\text{Cl}_2$

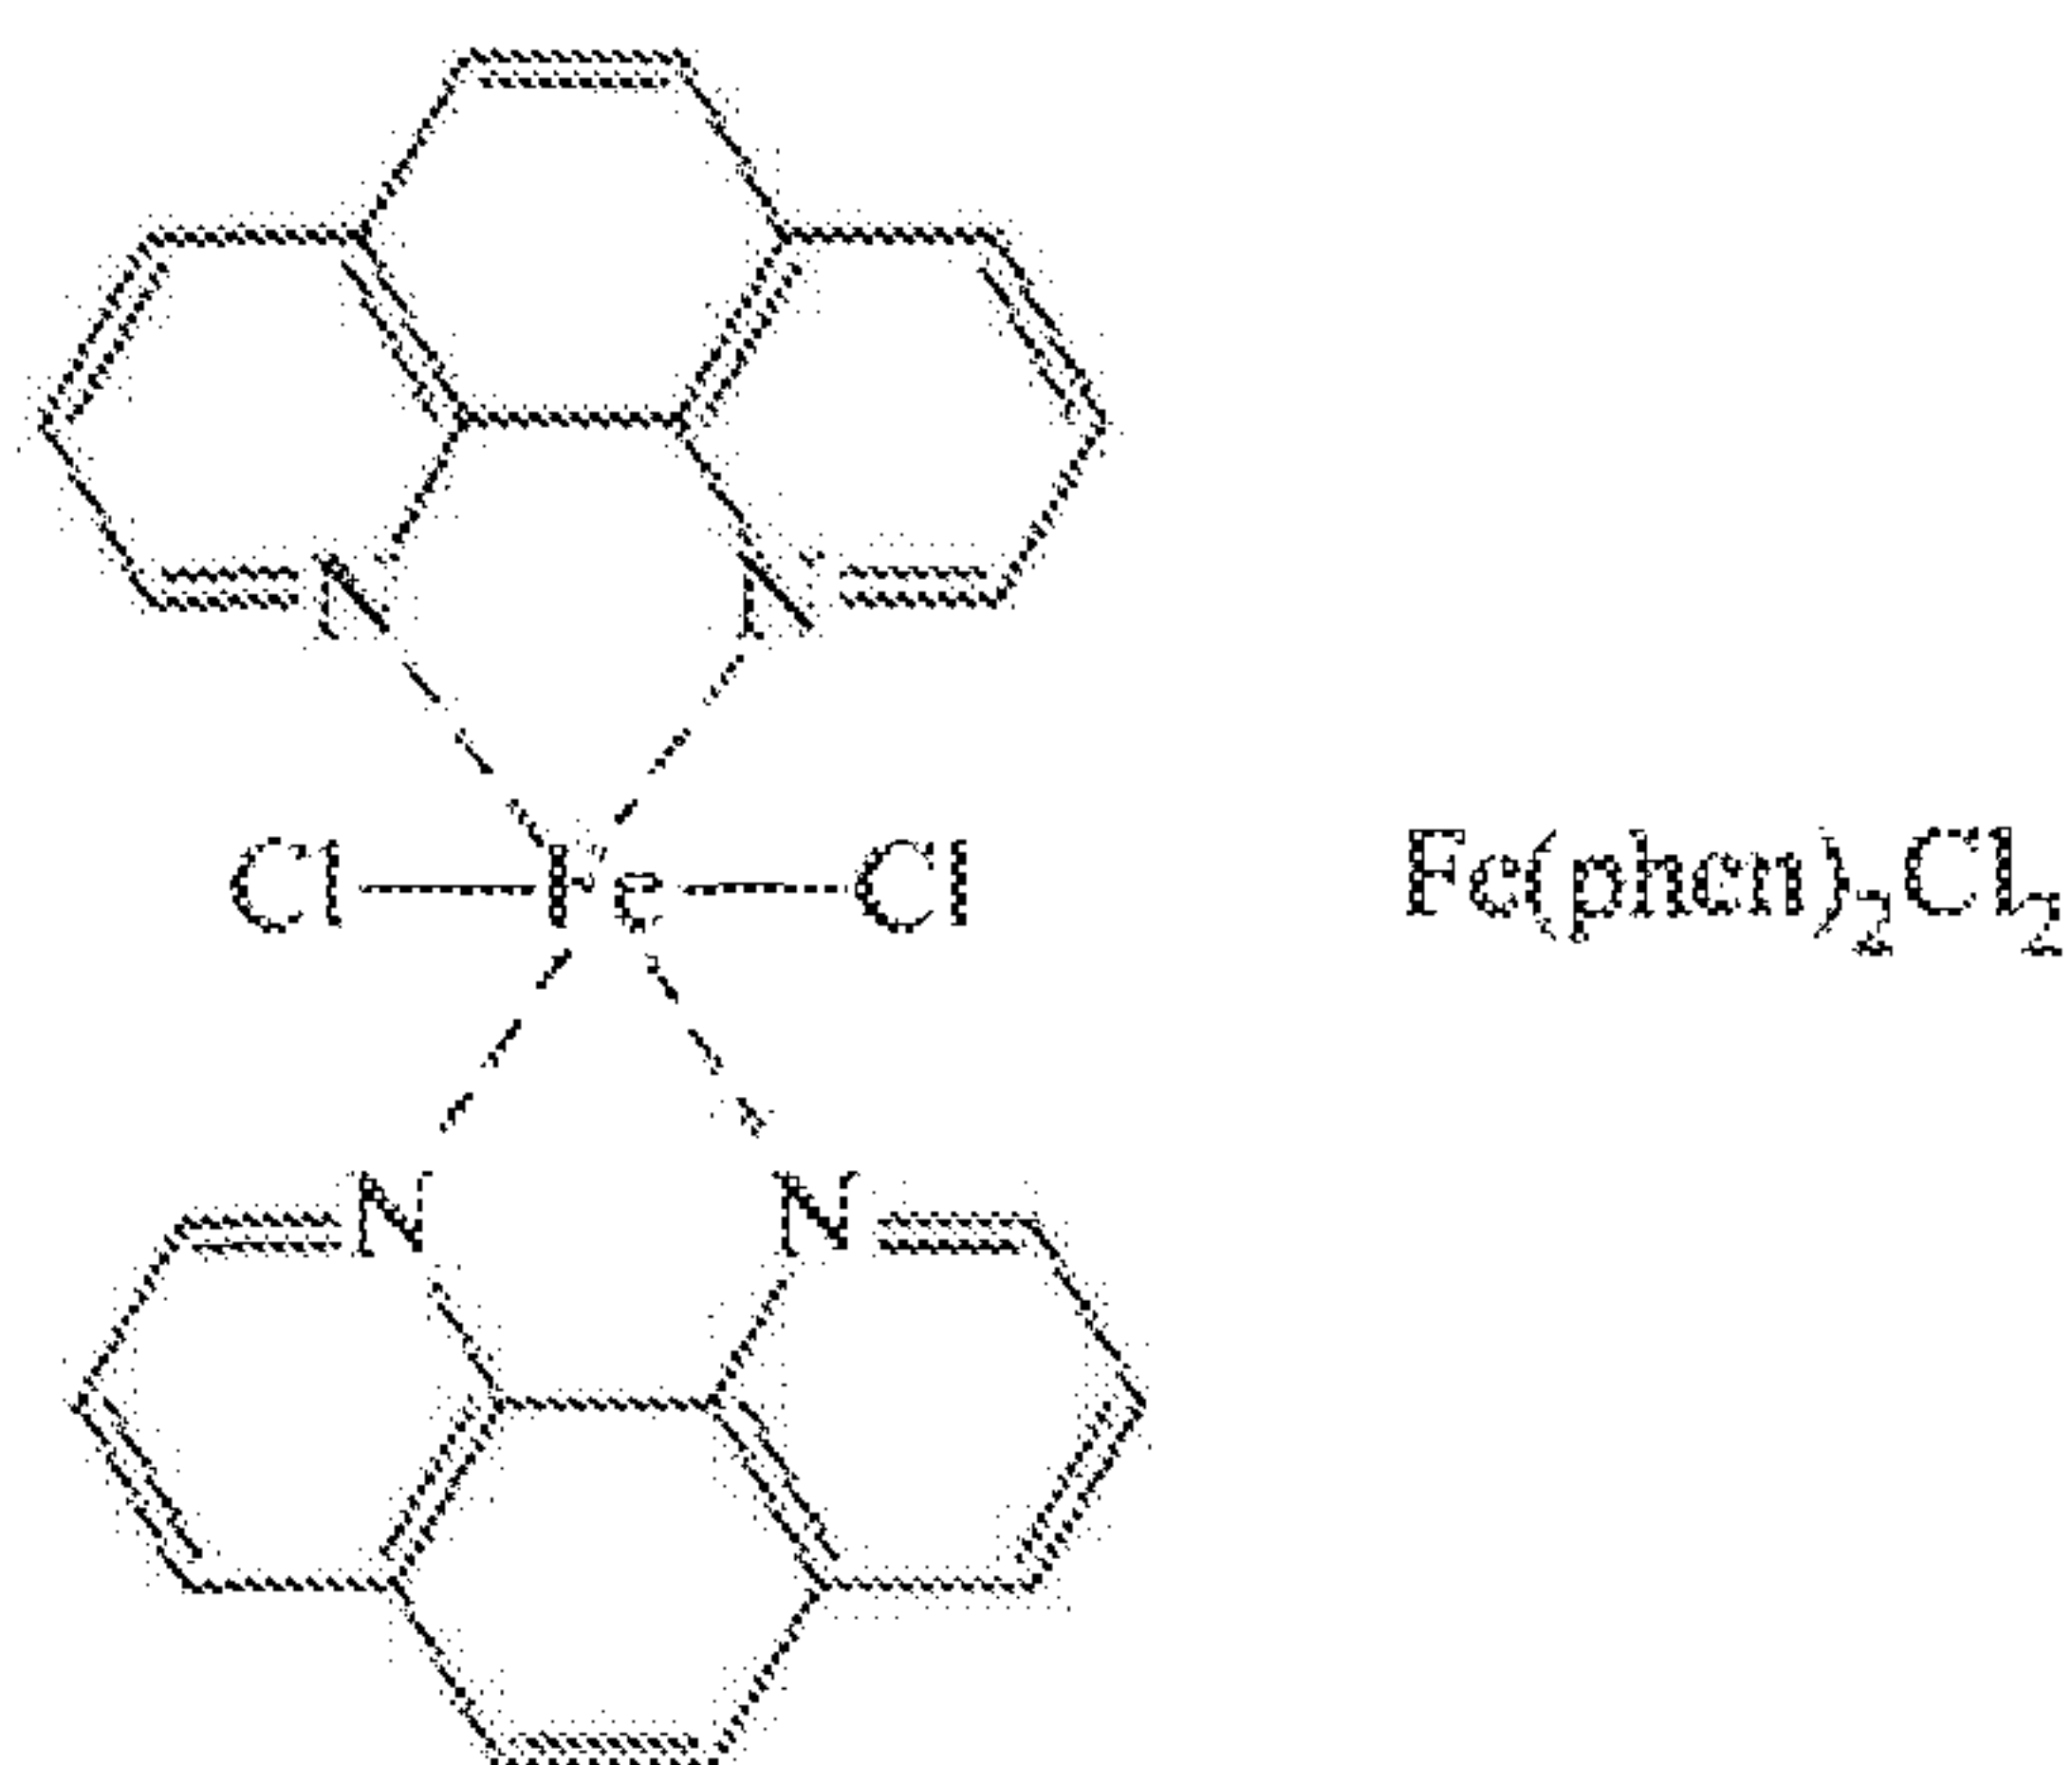

1.29 g (6.5 mmoles) of iron dichloride tetrahydrate ($\text{FeCl}_2 \cdot 4\text{H}_2\text{O}$), 30 ml of water and 3.62 g (19.5 mmoles) of 1,10-phenanthroline (phen) were loaded, in an inert atmosphere, into a 100 ml flask: the whole was left, under stirring, at room temperature, for 1 hour. The reaction mixture obtained was vacuum dried, at 50°C ,

obtaining a solid that was vacuum heated at 160°C, for 12 hours, in the presence of phosphoric anhydride (P_2O_5) obtaining 2.7 g of a solid product corresponding to the complex $Fe(phen)_2Cl_2$, equal to an 85% conversion relative to the iron dichloride tetrahydrate ($FeCl_2 \cdot 4H_2O$) loaded.

Molecular weight (MW): 487.16.

Elementary analysis [found (calculated for $C_{24}H_{16}Cl_2FeN_4$)]: C: 59.23% (59.17%), H: 3.56% (3.31%), N: 11.58% (11.50%), Cl: 14.62% (14.55%), Fe: 11.66% (11.46%).

EXAMPLE 5

Synthesis of crystalline polybutadiene having a 64.6% content of 1,2 syndiotactic units (reference homopolymer)

2 ml of 1,3-butadiene equal to about 1.4 g were condensed, cold (-20°C), in a 25 ml test tube. Subsequently, 14.59 ml of toluene were added and the temperature of the solution thus obtained was brought to +40°C. Then, methylaluminoxane (MAO) in toluene solution (0.315 ml; 5×10^{-4} moles, equal to about 0.029 g) was added, and, subsequently, the $Fe(bipy)_2Cl_2$ (1.1 ml of toluene solution at a concentration of 2 mg/ml; 5×10^{-6} moles, equal to about 2.2 mg) obtained as described in Example 3. The whole was kept, under magnetic stirring, at +40°C, for 5 minutes. The polymerization was then stopped by adding 2 ml of methanol containing some drops of hydrochloric acid. The polymer obtained was then coagulated by adding 40 ml of a methanol solution containing 4% of Irganox[®] 1076 antioxidant (Ciba) obtaining 1.4 g of polybutadiene having a 1,2-cis syndiotactic unit content of 64.6%: further characteristics of the procedure and of the polybutadiene obtained are reported in Table 1.

Figure 2 shows the FT-IR spectrum of the polybutadiene obtained.

Figure 3 shows the ^1H -NMR (bottom) and ^{13}C -NMR (top) spectra of the polybutadiene

obtained.

EXAMPLE 6

Synthesis of crystalline polybutadiene having a 68.3% content of 1,2 syndiotactic units (reference homopolymer)

2 ml of 1,3-butadiene equal to about 1.4 g were condensed, cold (-20°C), in a 25 ml test tube. Subsequently, 14.59 ml of toluene were added and the temperature of the solution thus obtained was brought to $+22^{\circ}\text{C}$. Then, methylaluminoxane (MAO) in toluene solution (0.315 ml; 5×10^{-4} moles, equal to about 0.029 g) was added, and, subsequently, the $\text{Fe}(\text{bipy})_2\text{Cl}_2$ (1.1 ml of toluene solution at a concentration of 2 mg/ml; 5×10^{-6} moles, equal to about 2.2 mg) obtained as described in Example 3. The whole was kept, under magnetic stirring, at $+22^{\circ}\text{C}$, for 5 minutes. The polymerization was then stopped by adding 2 ml of methanol containing some drops of hydrochloric acid. The polymer obtained was then coagulated by adding 40 ml of a methanol solution containing 4% of Irganox[®] 1076 antioxidant (Ciba) obtaining 1.4 g of polybutadiene having a 1,2-cis syndiotactic unit content of 68.3%; further characteristics of the procedure and of the polybutadiene obtained are reported in Table 1.

Figure 4 shows the FT-IR spectrum of the polybutadiene obtained.

Figure 5 shows the ^1H -NMR (bottom) and ^{13}C -NMR (top) spectra of the polybutadiene obtained.

EXAMPLE 7

Synthesis of crystalline polybutadiene having a 77.4% content of 1,2 syndiotactic units (reference homopolymer)

2 ml of 1,3-butadiene equal to about 1.4 g were condensed, cold (-20°C), in a 25 ml test tube. Subsequently, 14.59 ml of toluene were added and the temperature of the

solution thus obtained was brought to 0°C. Then, methylaluminoxane (MAO) in toluene solution (0.315 ml; 5×10^{-4} moles, equal to about 0.029 g) was added, and, subsequently, the $\text{Fe}(\text{bipy})_2\text{Cl}_2$ (1.1 ml of toluene solution at a concentration of 2 mg/ml; 5×10^{-6} moles, equal to about 2.2 mg) obtained as described in Example 3. The whole was kept, under magnetic stirring, at 0°C, for 15 minutes. The polymerization was then stopped by adding 2 ml of methanol containing some drops of hydrochloric acid. The polymer obtained was then coagulated by adding 40 ml of a methanol solution containing 4% of Irganox[®] 1076 antioxidant (Ciba) obtaining 1.4 g of polybutadiene having a 1,2-cis syndiotactic unit content of 77.4%: further characteristics of the procedure and of the polybutadiene obtained are reported in Table 1.

Figure 6 shows the FT-IR spectrum of the polybutadiene obtained.

Figure 7 shows the ^1H -NMR (bottom) and ^{13}C -NMR (top) spectra of the polybutadiene obtained.

EXAMPLE 8

Synthesis of crystalline polybutadiene having a 83.2% content of 1,2 syndiotactic units (reference homopolymer)

2 ml of 1,3-butadiene equal to about 1.4 g were condensed, cold (-20°C), in a 25 ml test tube. Subsequently, 14.59 ml of toluene were added and the temperature of the solution thus obtained was brought to -20°C. Then, methylaluminoxane (MAO) in toluene solution (0.315 ml; 5×10^{-4} moles, equal to about 0.029 g) was added, and, subsequently, the $\text{Fe}(\text{bipy})_2\text{Cl}_2$ (1.1 ml of toluene solution at a concentration of 2 mg/ml; 5×10^{-6} moles, equal to about 2.2 mg) obtained as described in Example 3. The whole was kept, under magnetic stirring, at -20°C, for 30 minutes. The polymerization was then stopped by adding 2 ml of methanol containing some drops of hydrochloric

acid. The polymer obtained was then coagulated by adding 40 ml of a methanol solution containing 4% of Irganox[®] 1076 antioxidant (Ciba) obtaining 1.4 g of polybutadiene having a 1,2-cis syndiotactic unit content of 83.2%: further characteristics of the procedure and of the polybutadiene obtained are reported in Table 1.

Figure 8 shows the FT-IR spectrum of the polybutadiene obtained.

Figure 9 shows the ¹H-NMR (bottom) and ¹³C-NMR (top) spectra of the polybutadiene obtained.

EXAMPLE 9

Synthesis of amorphous polyisoprene having a 67.0% content of 3,4 atactic units (reference homopolymer)

2 ml of isoprene equal to about 1.36 g were loaded into a 25 ml test tube. Subsequently, 14.59 ml of toluene were added and the temperature of the solution thus obtained was brought to +20°C. Then, methylaluminoxane (MAO) in toluene solution (0.315 ml; 5×10^{-4} moles, equal to about 0.029 g) was added, and, subsequently, the Fe(bipy)₂Cl₂ (1.1 ml of toluene solution at a concentration of 2 mg/ml; 5×10^{-6} moles, equal to about 2.2 mg) obtained as described in Example 3. The whole was kept, under magnetic stirring, at +20°C, for 5 minutes. The polymerization was then stopped by adding 2 ml of methanol containing some drops of hydrochloric acid. The polymer obtained was then coagulated by adding 40 ml of a methanol solution containing 4% of Irganox[®] 1076 antioxidant (Ciba) obtaining 1.36 g of polyisoprene having a 3,4-cis atactic unit content of 67.0%: further characteristics of the procedure and of the polyisoprene obtained are reported in Table 1.

Figure 10 shows the FT-IR spectrum of the polyisoprene obtained.

Figure 11 shows the ¹H-NMR (bottom) and ¹³C-NMR (top) spectra of the polyisoprene

obtained.

EXAMPLE 10

Synthesis of butadiene-isoprene diblock copolymer formed by crystalline polybutadiene (hard block)-amorphous polyisoprene (soft block) (invention)

2 ml of 1,3-butadiene equal to 1.4 g in toluene solution (56.6 ml) and methylaluminoxane (MAO) in toluene solution (0.315 ml; 5×10^{-4} moles, equal to about 0.029 g) were loaded into a 100 ml test tube cooled to -20°C : the solution obtained was brought to $+40^{\circ}\text{C}$ and, subsequently, the $\text{Fe}(\text{bipy})_2\text{Cl}_2$ complex (1.1 ml of toluene solution at a concentration of 2 mg/ml; 5×10^{-6} moles, equal to about 2.2 mg) obtained as described in Example 3, was added. The whole was kept, under magnetic stirring, at $+40^{\circ}\text{C}$, for 30 minutes and, subsequently, 2 ml of isoprene equal to about 1.36 g in toluene solution (8 ml) were added. The polymerization was left to proceed, under magnetic stirring, at $+40^{\circ}\text{C}$, for a further 30 minutes. The polymerization was then stopped by adding 2 ml of methanol containing some drops of hydrochloric acid. The polymer obtained was then coagulated by adding 40 ml of a methanol solution containing 4% of Irganox[®] 1076 antioxidant (Ciba) obtaining 2.76 g of butadiene-isoprene diblock copolymer formed by a block of crystalline polybutadiene (hard block) having a 1,2 syndiotactic unit content of 65.0% and by a block of amorphous polyisoprene (soft block) having a 3,4 atactic unit content of 69.2%: further characteristics of the procedure and of the butadiene-isoprene diblock copolymer obtained are reported in Table 1.

Figure 12 shows the FT-IR spectrum of the butadiene-isoprene diblock copolymer obtained.

Figure 13 shows the phase images obtained through AFM - Atomic Force Microscopy - of the butadiene-isoprene diblock copolymer obtained.

EXAMPLE 11

Synthesis of butadiene-isoprene diblock copolymer formed by crystalline polybutadiene (hard block)-amorphous polyisoprene (soft block) (invention)

3 ml of 1,3-butadiene equal to 2.1 g in toluene solution (56.6 ml) and methylaluminoxane (MAO) in toluene solution (0.315 ml; 5×10^{-4} moles, equal to about 0.029 g) were loaded into a 100 ml test tube cooled to -20°C : the solution obtained was brought to $+40^{\circ}\text{C}$ and, subsequently, the $\text{Fe}(\text{bipy})_2\text{Cl}_2$ complex (1.1 ml of toluene solution at a concentration of 2 mg/ml; 5×10^{-6} moles, equal to about 2.2 mg) obtained as described in Example 3, was added. The whole was kept, under magnetic stirring, at $+40^{\circ}\text{C}$, for 30 minutes and, subsequently, 1 ml of isoprene equal to about 0.68 g in toluene solution (8 ml) was added: the polymerization was left to proceed, under magnetic stirring, at $+40^{\circ}\text{C}$, for a further 45 minutes. The polymerization was then stopped by adding 2 ml of methanol containing some drops of hydrochloric acid. The polymer obtained was then coagulated by adding 40 ml of a methanol solution containing 4% of Irganox[®] 1076 antioxidant (Ciba) obtaining 2.78 g of butadiene-isoprene diblock copolymer formed by a block of crystalline polybutadiene (hard block) having a 1,2 syndiotactic unit content of 65.3% and by a block of amorphous polyisoprene (soft block) having a 3,4 atactic unit content of 69.5%: further characteristics of the procedure and of the butadiene-isoprene diblock copolymer obtained are reported in Table 1.

Figure 14 shows the FT-IR spectrum of the butadiene-isoprene diblock copolymer obtained.

EXAMPLE 12

Synthesis of butadiene-isoprene diblock copolymer formed by crystalline polybutadiene (hard block)-amorphous polyisoprene (soft block) (invention)

1 ml of 1,3-butadiene equal to 0.7 g in toluene solution (56.6 ml) and methylaluminoxane (MAO) in toluene solution (0.315 ml; 5×10^{-4} moles, equal to about 0.029 g) were loaded into a 100 ml test tube cooled to -20°C : the solution obtained was brought to $+40^{\circ}\text{C}$ and, subsequently, the $\text{Fe}(\text{bipy})_2\text{Cl}_2$ complex (1.1 ml of toluene solution at a concentration of 2 mg/ml; 5×10^{-6} moles, equal to about 2.2 mg) obtained as described in Example 3, was added. The whole was kept, under magnetic stirring, at $+40^{\circ}\text{C}$, for 45 minutes and, subsequently, 3 ml of isoprene equal to about 2.04 g in toluene solution (8 ml) were added: the polymerization was left to proceed, under magnetic stirring, at $+40^{\circ}\text{C}$, for a further 60 minutes. The polymerization was then stopped by adding 2 ml of methanol containing some drops of hydrochloric acid. The polymer obtained was then coagulated by adding 40 ml of a methanol solution containing 4% of Irganox[®] 1076 antioxidant (Ciba) obtaining 2.76 g of butadiene-isoprene diblock copolymer formed by a block of crystalline polybutadiene (hard block) having a 1,2 syndiotactic unit content of 66.6% and by a block of amorphous polyisoprene (soft block) having a 3,4 atactic unit content of 73%: further characteristics of the procedure and of the butadiene-isoprene diblock copolymer obtained are reported in Table 1.

Figure 15 shows the FT-IR spectrum of the butadiene-isoprene diblock copolymer obtained.

Figure 16 shows the ^1H -NMR (bottom) and ^{13}C -NMR (top) spectra of the butadiene-isoprene diblock copolymer obtained.

EXAMPLE 13

Synthesis of butadiene-isoprene diblock copolymer formed by crystalline polybutadiene (hard block)-amorphous polyisoprene (soft block) (invention)

2 ml of 1,3-butadiene equal to 1.4 g in toluene solution (57 ml) and methylaluminoxane

(MAO) in toluene solution (0.315 ml; 5×10^{-4} moles, equal to about 0.029 g) were loaded into a 100 ml test tube cooled to -20°C : the solution obtained was brought to $+22^{\circ}\text{C}$ and, subsequently, the $\text{Fe}(\text{bipy})\text{Cl}_2$ complex (0.7 ml of toluene solution at a concentration of 2 mg/ml; 5×10^{-6} moles, equal to about 1.4 mg) obtained as described in Example 1, was added. The whole was kept, under magnetic stirring, at $+22^{\circ}\text{C}$, for 75 minutes and, subsequently, 2 ml of isoprene equal to about 1.36 g in toluene solution (8 ml) were added: the polymerization was left to proceed, under magnetic stirring, at $+22^{\circ}\text{C}$, for a further 60 minutes. The polymerization was then stopped by adding 2 ml of methanol containing some drops of hydrochloric acid. The polymer obtained was then coagulated by adding 40 ml of a methanol solution containing 4% of Irganox[®] 1076 antioxidant (Ciba) obtaining 2.76 g of butadiene-isoprene diblock copolymer formed by a block of crystalline polybutadiene (hard block) having a 1,2 syndiotactic unit content of 66.9% and by a block of amorphous polyisoprene (soft block) having a 3,4 atactic unit content of 68%: further characteristics of the procedure and of the butadiene-isoprene diblock copolymer obtained are reported in Table 1.

Figure 17 shows the FT-IR spectrum of the butadiene-isoprene diblock copolymer obtained.

Figure 18 shows the ^1H -NMR (bottom) and ^{13}C -NMR (top) spectra of the butadiene-isoprene diblock copolymer obtained.

EXAMPLE 14

Synthesis of butadiene-isoprene diblock copolymer formed by crystalline polybutadiene (hard block)-amorphous polyisoprene (soft block) (invention)

1 ml of 1,3-butadiene equal to 0.7 g in toluene solution (57 ml) and methylaluminoxane (MAO) in toluene solution (0.315 ml; 5×10^{-4} moles, equal to about 0.029 g) was loaded into a 100 ml test tube cooled to -20°C : the solution obtained was brought to $+22^{\circ}\text{C}$

and, subsequently, the $\text{Fe}(\text{bipy})\text{Cl}_2$ complex (0.7 ml of toluene solution at a concentration of 2 mg/ml; 5×10^{-6} moles, equal to about 1.4 mg) obtained as described in Example 1, was added. The whole was kept, under magnetic stirring, at $+22^\circ\text{C}$, for 60 minutes and, subsequently, 3 ml of isoprene equal to about 2.04 g in toluene solution (8 ml) were added: the polymerization was left to proceed, under magnetic stirring, at $+22^\circ\text{C}$, for a further 75 minutes. The polymerization was then stopped by adding 2 ml of methanol containing some drops of hydrochloric acid. The polymer obtained was then coagulated by adding 40 ml of a methanol solution containing 4% of Irganox[®] 1076 antioxidant (Ciba) obtaining 2.74 g of butadiene-isoprene diblock copolymer formed by a block of crystalline polybutadiene (hard block) having a 1,2 syndiotactic unit content of 68.0% and by a block of amorphous polyisoprene (soft block) having a 3,4 atactic unit content of 68.7%: further characteristics of the procedure and of the butadiene-isoprene diblock copolymer obtained are reported in Table 1.

Figure 19 shows the FT-IR spectrum of the butadiene-isoprene diblock copolymer obtained.

EXAMPLE 15

Synthesis of butadiene-isoprene diblock copolymer formed by crystalline polybutadiene (hard block)-amorphous polyisoprene (soft block) (invention)

2 ml of 1,3-butadiene equal to 1.4 g in toluene solution (56.5 ml) and methylaluminoxane (MAO) in toluene solution (0.315 ml; 5×10^{-4} moles, equal to about 0.029 g) were loaded into a 100 ml test tube cooled to -20°C : the solution obtained was brought to 0°C and, subsequently, the $\text{Fe}(\text{phen})_2\text{Cl}_2$ complex (1.2 ml of toluene solution at a concentration of 2 mg/ml; 5×10^{-6} moles, equal to about 2.4 mg) obtained as described in Example 4, was added. The whole was kept, under magnetic stirring,

at 0°C, for 75 minutes and, subsequently, the temperature was brought to +22°C and 2 ml of isoprene equal to about 1.36 g in toluene solution (8 ml) were added: the polymerization was left to proceed, under magnetic stirring, at +22°C, for a further 90 minutes. The polymerization was then stopped by adding 2 ml of methanol containing some drops of hydrochloric acid. The polymer obtained was then coagulated by adding 40 ml of a methanol solution containing 4% of Irganox[®] 1076 antioxidant (Ciba) obtaining 2.74 g of butadiene-isoprene diblock copolymer formed by a block of crystalline polybutadiene (hard block) having a 1,2 syndiotactic unit content of 71.8% and by a block of amorphous polyisoprene (soft block) having a 3,4 atactic unit content of 69.1%: further characteristics of the procedure and of the butadiene-isoprene diblock copolymer obtained are reported in Table 1.

Figure 20 shows the FT-IR spectrum of the butadiene-isoprene diblock copolymer obtained.

EXAMPLE 16

Synthesis of butadiene-isoprene diblock copolymer formed by crystalline polybutadiene (hard block)-amorphous poly(isoprene (soft block) (invention)

3 ml of 1,3-butadiene equal to 1.4 g in toluene solution (56.5 ml) and methylaluminoxane (MAO) in toluene solution (0.315 ml; 5×10^{-4} moles, equal to about 0.029 g) were loaded into a 100 ml test tube cooled to -20°C: the solution obtained was brought to 0°C and, subsequently, the Fe(phen)₂Cl₂ complex (1.2 ml of toluene solution at a concentration of 2 mg/ml; 5×10^{-6} moles, equal to about 2.4 mg) obtained as described in Example 4, was added. The whole was kept, under magnetic stirring, at 0°C, for 75 minutes and, subsequently, the temperature was brought to +22°C and 1 ml of isoprene equal to about 0.68 g in toluene solution (8 ml) was added: the polymerization was left to proceed, under magnetic stirring, at +22°C, for a further 90

minutes. The polymerization was then stopped by adding 2 ml of methanol containing some drops of hydrochloric acid. The polymer obtained was then coagulated by adding 40 ml of a methanol solution containing 4% of Irganox[®] 1076 antioxidant (Ciba) obtaining 2.08 g of butadiene-isoprene diblock copolymer formed by a block of crystalline polybutadiene (hard block) having a 1,2 syndiotactic unit content of 72.9% and by a block of amorphous polyisoprene (soft block) having a 3,4 atactic unit content of 68.9%: further characteristics of the procedure and of the butadiene-isoprene diblock copolymer obtained are reported in Table 1.

Figure 21 shows the FT-IR spectrum of the butadiene-isoprene diblock copolymer obtained.

Figure 22 shows the ¹H-NMR (bottom) and ¹³C-NMR (top) spectra of the butadiene-isoprene diblock copolymer obtained.

Figure 23 shows the phase images obtained through AFM - Atomic Force Microscopy - of the butadiene-isoprene diblock copolymer obtained.

EXAMPLE 17

Synthesis of butadiene-isoprene diblock copolymer formed by crystalline polybutadiene (hard block)-amorphous polyisoprene (soft block) (invention)

2 ml of 1,3-butadiene equal to 1.4 g in toluene solution (56.9 ml) and methylaluminoxane (MAO) in toluene solution (0.315 ml; 5×10^{-4} moles, equal to about 0.029 g) were loaded into a 100 ml test tube cooled to -20°C: the solution obtained was brought to -20°C and, subsequently, the Fe(bipy)Cl₂ complex (0.75 ml of toluene solution at a concentration of 2 mg/ml; 5×10^{-6} moles, equal to about 1.5 mg) obtained as described in Example 2, was added. The whole was kept, under magnetic stirring, at -20°C, for 90 minutes and, subsequently, the temperature was brought to +22°C and 2 ml of isoprene equal to about 1.36 g in toluene solution (8 ml) were added. The

polymerization was left to proceed, under magnetic stirring, at +22°C, for a further 120 minutes: the polymerization was then stopped by adding 2 ml of methanol containing some drops of hydrochloric acid. The polymer obtained was then coagulated by adding 40 ml of a methanol solution containing 4% of Irganox[®] 1076 antioxidant (Ciba) obtaining 2.76 g of butadiene-isoprene diblock copolymer formed by a block of crystalline polybutadiene (hard block) having a 1,2 syndiotactic unit content of 79.0% and by a block of amorphous polyisoprene (soft block) having a 3,4 atactic unit content of 69.9%: further characteristics of the procedure and of the butadiene-isoprene diblock copolymer obtained are reported in Table 1.

Figure 24 shows the FT-IR spectrum of the butadiene-isoprene diblock copolymer obtained.

EXAMPLE 18

Synthesis of butadiene-isoprene diblock copolymer formed by crystalline polybutadiene (hard block)-amorphous polyisoprene (soft block) (invention)

1 ml of 1,3-butadiene equal to 0.7 g in toluene solution (56.9 ml) and methylaluminoxane (MAO) in toluene solution (0.315 ml; 5×10^{-4} moles, equal to about 0.029 g) was loaded into a 100 ml test tube cooled to -20°C: the solution obtained was brought to -20°C and, subsequently, the Fe(bipy)Cl₂ complex (0.75 ml of toluene solution at a concentration of 2 mg/ml; 5×10^{-6} moles, equal to about 1.5 mg) obtained as described in Example 2, was added. The whole was kept, under magnetic stirring, at -20°C, for 120 minutes and, subsequently, the temperature was brought to +22°C and 3 ml of isoprene equal to about 2.04 g in toluene solution (8 ml) were added: the polymerization was left to proceed, under magnetic stirring, at +22°C, for a further 180 minutes. The polymerization was then stopped by adding 2 ml of methanol containing some drops of hydrochloric acid. The polymer obtained was then coagulated by adding

40 ml of a methanol solution containing 4% of Irganox[®] 1076 antioxidant (Ciba) obtaining 2.74 g of butadiene-isoprene diblock copolymer formed by a block of crystalline polybutadiene (hard block) having a 1,2 syndiotactic unit content of 77.6% and by a block of amorphous polyisoprene (soft block) having a 3,4 atactic unit content of 71.2%: further characteristics of the procedure and of the butadiene-isoprene diblock copolymer obtained are reported in Table 1.

Figure 25 shows the FT-IR spectrum of the butadiene-isoprene diblock copolymer obtained.

Figure 26 shows the ¹H-NMR (bottom) and ¹³C-NMR (top) spectra of the butadiene-isoprene diblock copolymer obtained.

EXAMPLE 19

Preparation of a mechanical mixture of crystalline 1,2 syndiotactic polybutadiene and amorphous 3,4 atactic polyisoprene (comparative)

1.54 g of crystalline polybutadiene having a 1,2 syndiotactic unit content of 77.4% obtained as described in Example 7, 0.45 g of amorphous polyisoprene having a 3,4 atactic unit content of 67.0% obtained as described in Example 9 and 50 ml of toluene were placed in a 100 ml test tube: the whole was maintained, under magnetic stirring, for 120 minutes, until complete solubilization of the two polymers, i.e. until a perfectly homogeneous solution was obtained. To the solution thus obtained, methanol in great excess (200 ml) was added, obtaining the precipitation of a solid product that was recovered through filtration and vacuum dried, at room temperature, for one night.

Figure 27 shows the phase images obtained through AFM - Atomic Force Microscopy - of the mechanical mixture of crystalline 1,2 syndiotactic polybutadiene and amorphous 3,4 atactic polyisoprene obtained.

EXAMPLE 20

Extraction in diethylether of butadiene-isoprene diblock copolymer formed by crystalline polybutadiene (hard block)-amorphous polyisoprene (soft block)

2 grams of butadiene-isoprene diblock copolymer formed by crystalline polybutadiene (hard block)-amorphous polyisoprene (soft block) obtained as described in Example 10, were continuously extracted for about 3 hours, with boiling diethylether (100 ml).

At the end of the extraction the ether solution containing one part of the butadiene-isoprene diblock copolymer (soluble fraction in diethylether) was reduced in volume (to about 20 ml), then excess methanol was added (about 100 ml) so as to obtain the coagulation and precipitation of the dissolved copolymer: the whole was filtered and the residue on the filter was vacuum dried, at room temperature for one night, obtaining 0.770 g (yield 38.5% relative to the copolymer loaded) of copolymer.

The residue not extracted was in turn recovered, and then vacuum dried, at room temperature for one night, obtaining 1.230 g (yield 61.5% relative to the copolymer loaded) of copolymer.

The two fractions were examined through infra-red spectroscopy (FT-IR), highlighting a very similar structure, confirming the fact that the polymer material obtained is effectively a copolymer, and not a mixture of homopolymers.

TABLE 1

Copolymerization of 1,3-butadiene and isoprene with catalytic systems comprising iron complexes

Example	Conversion (%)	(Copolymer composition B ⁽¹⁾)	PB ⁽³⁾		block		PI ⁽⁴⁾		T _m ⁽⁵⁾ (°C)	T _c ⁽⁶⁾ (°C)	T _g ⁽⁷⁾ (°C)	M _w (g/mol)	M _w /M _n
			cis-1,4 (%)	1,2 (%)	[rr] ⁽⁸⁾ (%)	microstructure	cis-14 (%)	3,4 (%)					
5	100	100	35.4	64.6	71.5		-	-	73.9	49.9	-	423700	2.1
6	100	100	31.7	68.3	73.0		-	-	93.0	72.1	-	556100	2.5
7	100	100	22.6	77.4	77.8		-	-	100	89.8	-	629100	2.1
8	100	100	16.8	83.2	82.0		-	-	115	101.9	-	856300	2.6
9	100	-	-	-	-		33.0	67.0	-	-	-49.8	211910	1.6
10	100	56.5	35.0	65.0	65.9		30.8	69.2	70.9	57.2	-42.5	681400	2.4
11	100	79.6	34.7	65.3	66.7		30.5	69.5	76.6	70.7	-55.3	693000	2.0
12	100	30.2	33.4	66.6	67.0		27.0	73.0	72.4	60.1	-51.6	654000	2.1
13	100	56.5	33.1	66.9	69.8		32.0	68.0	86.3	68.2	-48.2	829100	2.3
14	100	30.2	32.0	68.0	70.1		31.3	68.7	85.9	69.7	-41.5	801500	2.6
15	100	30.2	28.2	71.8	75.9		30.9	69.1	118.7	105.1	45.7	857600	2.1
16	100	79.6	27.1	72.9	76.2		31.1	68.9	118.7	107.2	-44.5	894500	2.2
17	100	56.5	21.0	79.0	79.7		30.1	69.9	121.8	111.3	-46.1	1216800	2.4
18	100	30.2	22.4	77.6	80.3		28.8	71.2	120.2	109.7	-45.0	954760	2.3

⁽¹⁾; B = 1,3-butadiene;

- (2). I = isoprene;
- (3). PB = polybutadiene;
- (4). PI = polyisoprene;
- (5). T_m = melting point;
- (6). T_c = crystallization temperature;
- (7). T_g = glass transition temperature;
- (8). [rr] = content of syndiotactic triads in the block of polybutadiene with a 1,2 syndiotactic structure determined through ^{13}C -NMR analysis;


In Table 1:

- the melting point (T_m) in Examples 5-8 refers to homopolymer polybutadiene;
- the melting point (T_m) in Examples 10-18 refers to the block of crystalline polybutadiene (hard block);
- the crystallization temperature (T_c) in Examples 5-8 refers to homopolymer polybutadiene;
- the crystallization temperature (T_c) in Examples 10-18 refers to the block of crystalline polybutadiene (hard block);
- the glass transition temperature (T_g) in Examples 9 refers to homopolymer polyisoprene;
- the glass transition temperature (T_g) in Examples 10-18 refers to the block of amorphous polyisoprene (soft block).

CLAIMS

1. Butadiene-isoprene diblock copolymer formed by a block of crystalline polybutadiene (hard block) and by a block of amorphous polyisoprene (soft block).
2. Butadiene-isoprene diblock copolymer according to claim 1, wherein said diblock-butadiene-isoprene copolymer is formed by: a block of crystalline polybutadiene (hard block) having a syndiotactic 1,2 unit content $\geq 60\%$, preferably ranging from 64% to 80%, and by a block of amorphous polyisoprene (soft block) having a 3,4 atactic unit content $\geq 60\%$, preferably ranging from 65% to 75%.
3. Butadiene-isoprene diblock copolymer according to claim 1 or 2, wherein said butadiene-isoprene diblock copolymer has the following characteristics:
 - upon infra-red analysis (FT-IR) typical bands of *cis*-1,4 and 1,2 syndiotactic butadiene units centered at 737 cm^{-1} and 911 cm^{-1} , respectively, and of isoprene *cis*-1,4 and 3,4 atactic units centered at 840 cm^{-1} and 890 cm^{-1} , respectively.
4. Butadiene-isoprene diblock copolymer according to any one of the previous claims, wherein in said butadiene-isoprene diblock copolymer:
 - the block of crystalline polybutadiene (hard block) has a melting point (T_m) greater than or equal to 65°C , preferably ranging from 70°C to 130°C , and a crystallization temperature (T_c) greater than or equal to 50°C , preferably ranging from 55°C to 110°C ;
 - the block of amorphous polyisoprene (soft block) has a glass transition temperature (T_g) lower than or equal to -35°C , preferably ranging from -40°C to -60°C .

5. Butadiene-isoprene diblock copolymer according to any one of the previous claims, wherein said butadiene-isoprene diblock copolymer has a polydispersion index (PDI) corresponding to the M_w/M_n ratio (M_w = weight average molecular weight, M_n = number average molecular weight) ranging from 2.0 to 2.6.
6. Butadiene-isoprene diblock copolymer according to any one of the previous claims, wherein said butadiene-isoprene diblock copolymer has a weight average molecular weight (M_w) ranging from 600000 g/mol to 1300000 g/mol, preferably ranging from 650000 g/mol to 1250000 g/mol.
7. Process for the preparation of a butadiene-isoprene diblock copolymer formed by a crystalline polybutadiene hard block and an amorphous polyisoprene soft block comprising the following steps:
 - (i) subjecting 1,3-butadiene to living polymerization in the presence of a catalytic system comprising at least one iron complex having general formula (I) or (II):

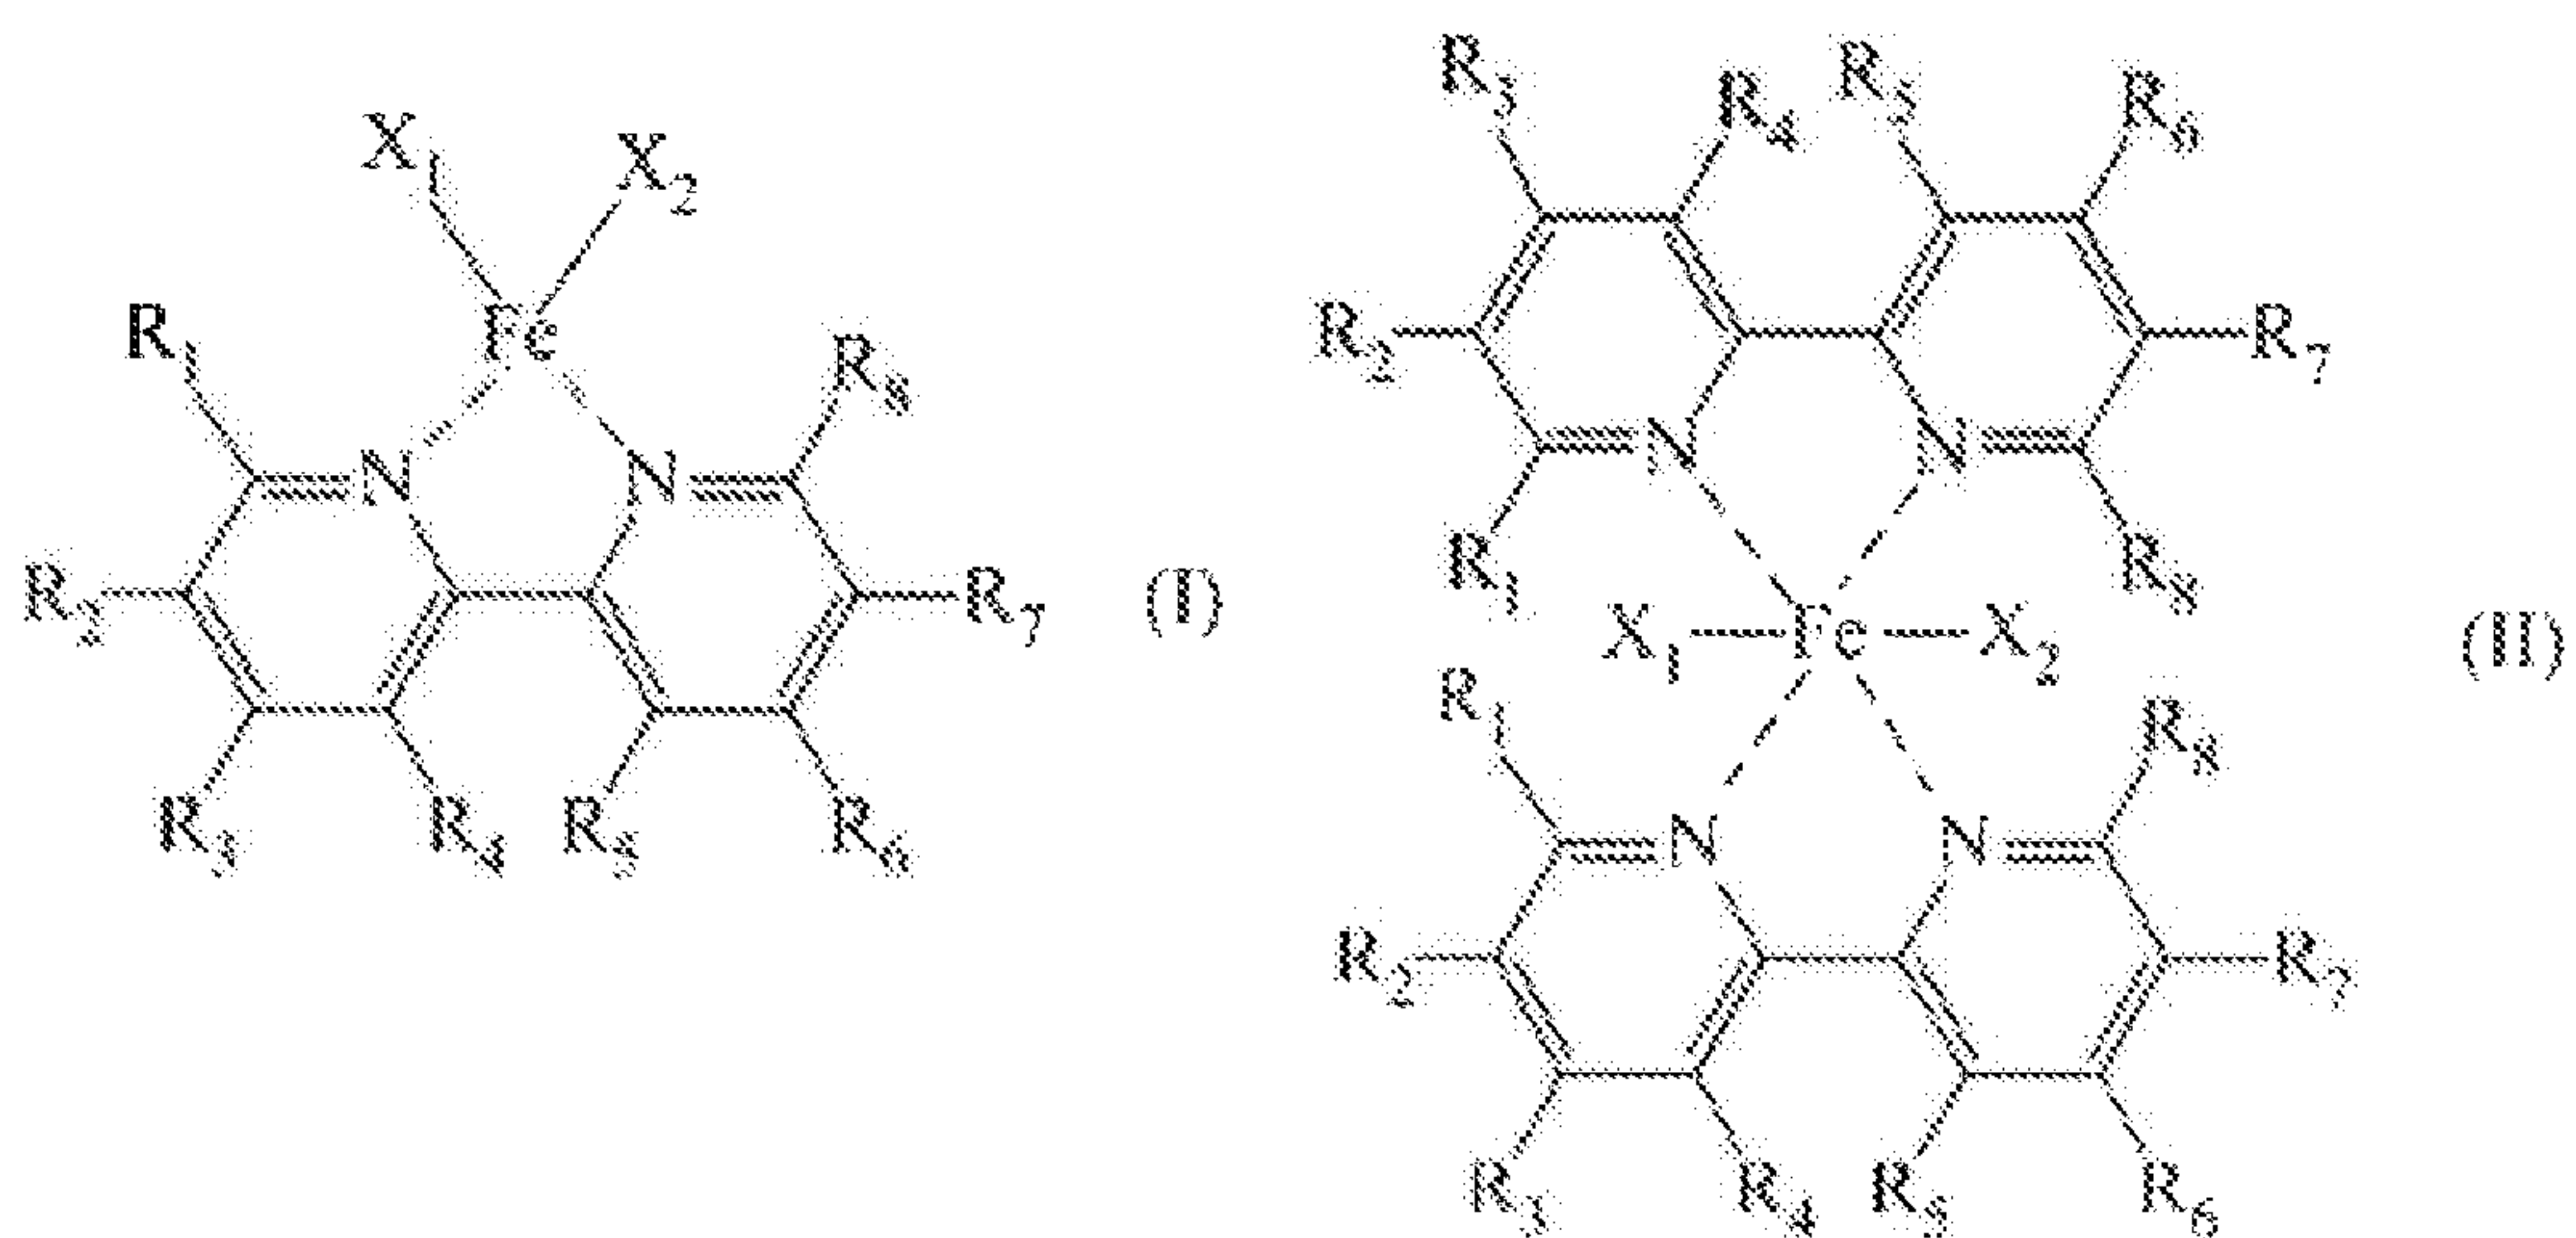

wherein:

R_1 , R_2 , R_3 , R_4 , R_5 , R_6 , R_7 and R_8 , identical or different, represent a hydrogen atom; or they are selected from linear or branched,

- optionally halogenated, C₁-C₂₀ alkyl groups, preferably C₁-C₁₅, optionally substituted cycloalkyl groups;
- or R₄ and R₅, may be optionally linked together to form, together with the other atoms to which they are linked, a saturated, unsaturated or aromatic cycle containing from 4 to 6 carbon atoms, optionally substituted with linear or branched, C₁-C₂₀ alkyl groups, preferably C₁-C₁₅, said cycle optionally containing heteroatoms such as, for example, oxygen, sulfur, nitrogen, silicon, phosphorous, selenium;
 - or R₁ and R₂ or R₃ and R₂, and/or R₃ and R₄, and/or R₅ and R₆, and/or R₆ and R₇ or R₇ and R₈, may be optionally linked together to form together with other atoms to which they are linked, a saturated, unsaturated or aromatic cycle containing from 4 to 6 carbon atoms, optionally substituted with linear or branched, C₁-C₂₀ alkyl groups, preferably C₁-C₁₅, said cycle optionally containing heteroatoms such as, for example, oxygen, sulfur, nitrogen, silicon, phosphorus, selenium;
 - X₁ and X₂, identical or different, represent a halogen atom such as, for example, chlorine, bromine, iodine; or are selected from linear or branched C₁-C₂₀ alkyl groups, preferably C₁-C₁₅, -OCOR₉ groups or -OR₉ groups wherein R₉ is selected from linear or branched C₁-C₂₀ alkyl groups, preferably C₁-C₁₅;

and continuing said living polymerization until substantially complete conversion of 1,3-butadiene;

- (ii) adding isoprene to the polymerization mixture obtained in step (i) and continuing said living polymerization until substantially complete isoprene

conversion.

8. Process for the preparation of a butadiene-isoprene diblock copolymer according to claim 7, wherein in said iron complex having general formula (I) or (II):

- $R_1, R_2, R_3, R_4, R_5, R_6, R_7$ and R_8 , identical, represent a hydrogen atom;
- or R_1, R_2, R_3, R_6, R_7 and R_8 , identical, represent a hydrogen atom and R_4 and R_5 are linked to form together with the other atoms to which they are linked a saturated, unsaturated, or aromatic cycle containing from 4 with 6 carbon atoms, preferably benzene;
- X_1 and X_2 , identical or different, represent a halogen atom such as chlorine, bromine, iodine, preferably chlorine.

9. Process for the preparation of a butadiene-isoprene diblock copolymer according to claim 7 or 8, wherein said catalytic system comprises (b) at least one co-catalyst selected from:


(b₁) aluminum alkyls having general formula (III):



wherein X' represents a halogen atom such as chlorine, bromine, iodine, fluorine; R_{10} , identical or different, represent a hydrogen atom, or are selected from linear or branched C_1 - C_{20} alkyl groups, cycloalkyl groups, aryl groups, said groups being optionally substituted with one or more silicon or germanium atoms; and n is an integer ranging from 0 to 2; preferably selected from di-iso-butyl aluminum hydride (DIBAH), tri-iso-butyl aluminum (TIBA), diethyl aluminum chloride (DEAC), monoethylaluminum dichloride (EADC), ethylaluminium sesquichloride (EASC);

(b₂) organooxygenated compounds of an element M' other than carbon

belonging to groups 13 or 14 of the Periodic Table of the Elements, preferably organooxygenated compounds of aluminum, gallium, tin; preferably selected from aluminoxanes having general formula (IV);

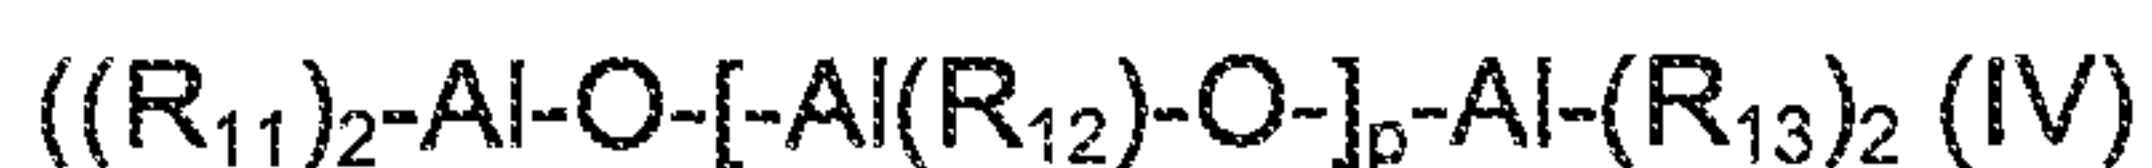

wherein R_{11} , R_{12} and R_{13} , identical or different, represent a hydrogen atom, a halogen atom such as chlorine, bromine, iodine, fluorine; or are selected from linear or branched C_1 - C_{20} alkyl groups, cycloalkyl groups, aryl groups, said groups being optionally substituted with one or more silicon or germanium atoms; and p is an integer ranging from 0 to 1000; preferably is methylaluminoxane (MAO).

10. Process for the preparation of a butadiene-isoprene diblock copolymer according to any one of claims 7 to 9, wherein:

- said process is performed in the presence of an inert organic solvent selected from: saturated aliphatic hydrocarbons such as butane, pentane, hexane, heptane, or mixtures thereof; saturated cycloaliphatic hydrocarbons such as cyclopentane, cyclohexane, or mixtures thereof; mono-olefins such as 1-butene, 2-butene, or mixtures thereof; aromatic hydrocarbons such as benzene, toluene, xylene, or mixtures thereof; halogenated hydrocarbons such as methylene chloride, chloroform, carbon tetrachloride, trichlorethylene, perchlorethylene, 1,2-dichloroethane, chlorobenzene, bromobenzene, chlorotoluene, or mixtures thereof; preferably, said solvent is selected from saturated aliphatic hydrocarbons, more preferably toluene; and/or
- in step (i) of said process, the concentration of 1,3-butadiene in said inert organic solvent is ranging from 5% by weight to 50% by weight, preferably

- ranging from 10% by weight to 20% by weight, relative to the total weight of the 1,3-butadiene mixture and the inert organic solvent; and/or
- ~ in step (ii) of said process, the isoprene concentration is ranging from 5% by weight to 50% by weight, preferably ranging from 10% by weight to 20% by weight, relative to the total weight of the polymerization mixture obtained in said step (i); and/or
 - ~ said process is performed at a temperature ranging from -70°C to +100°C, preferably ranging from -20°C to +80°C.

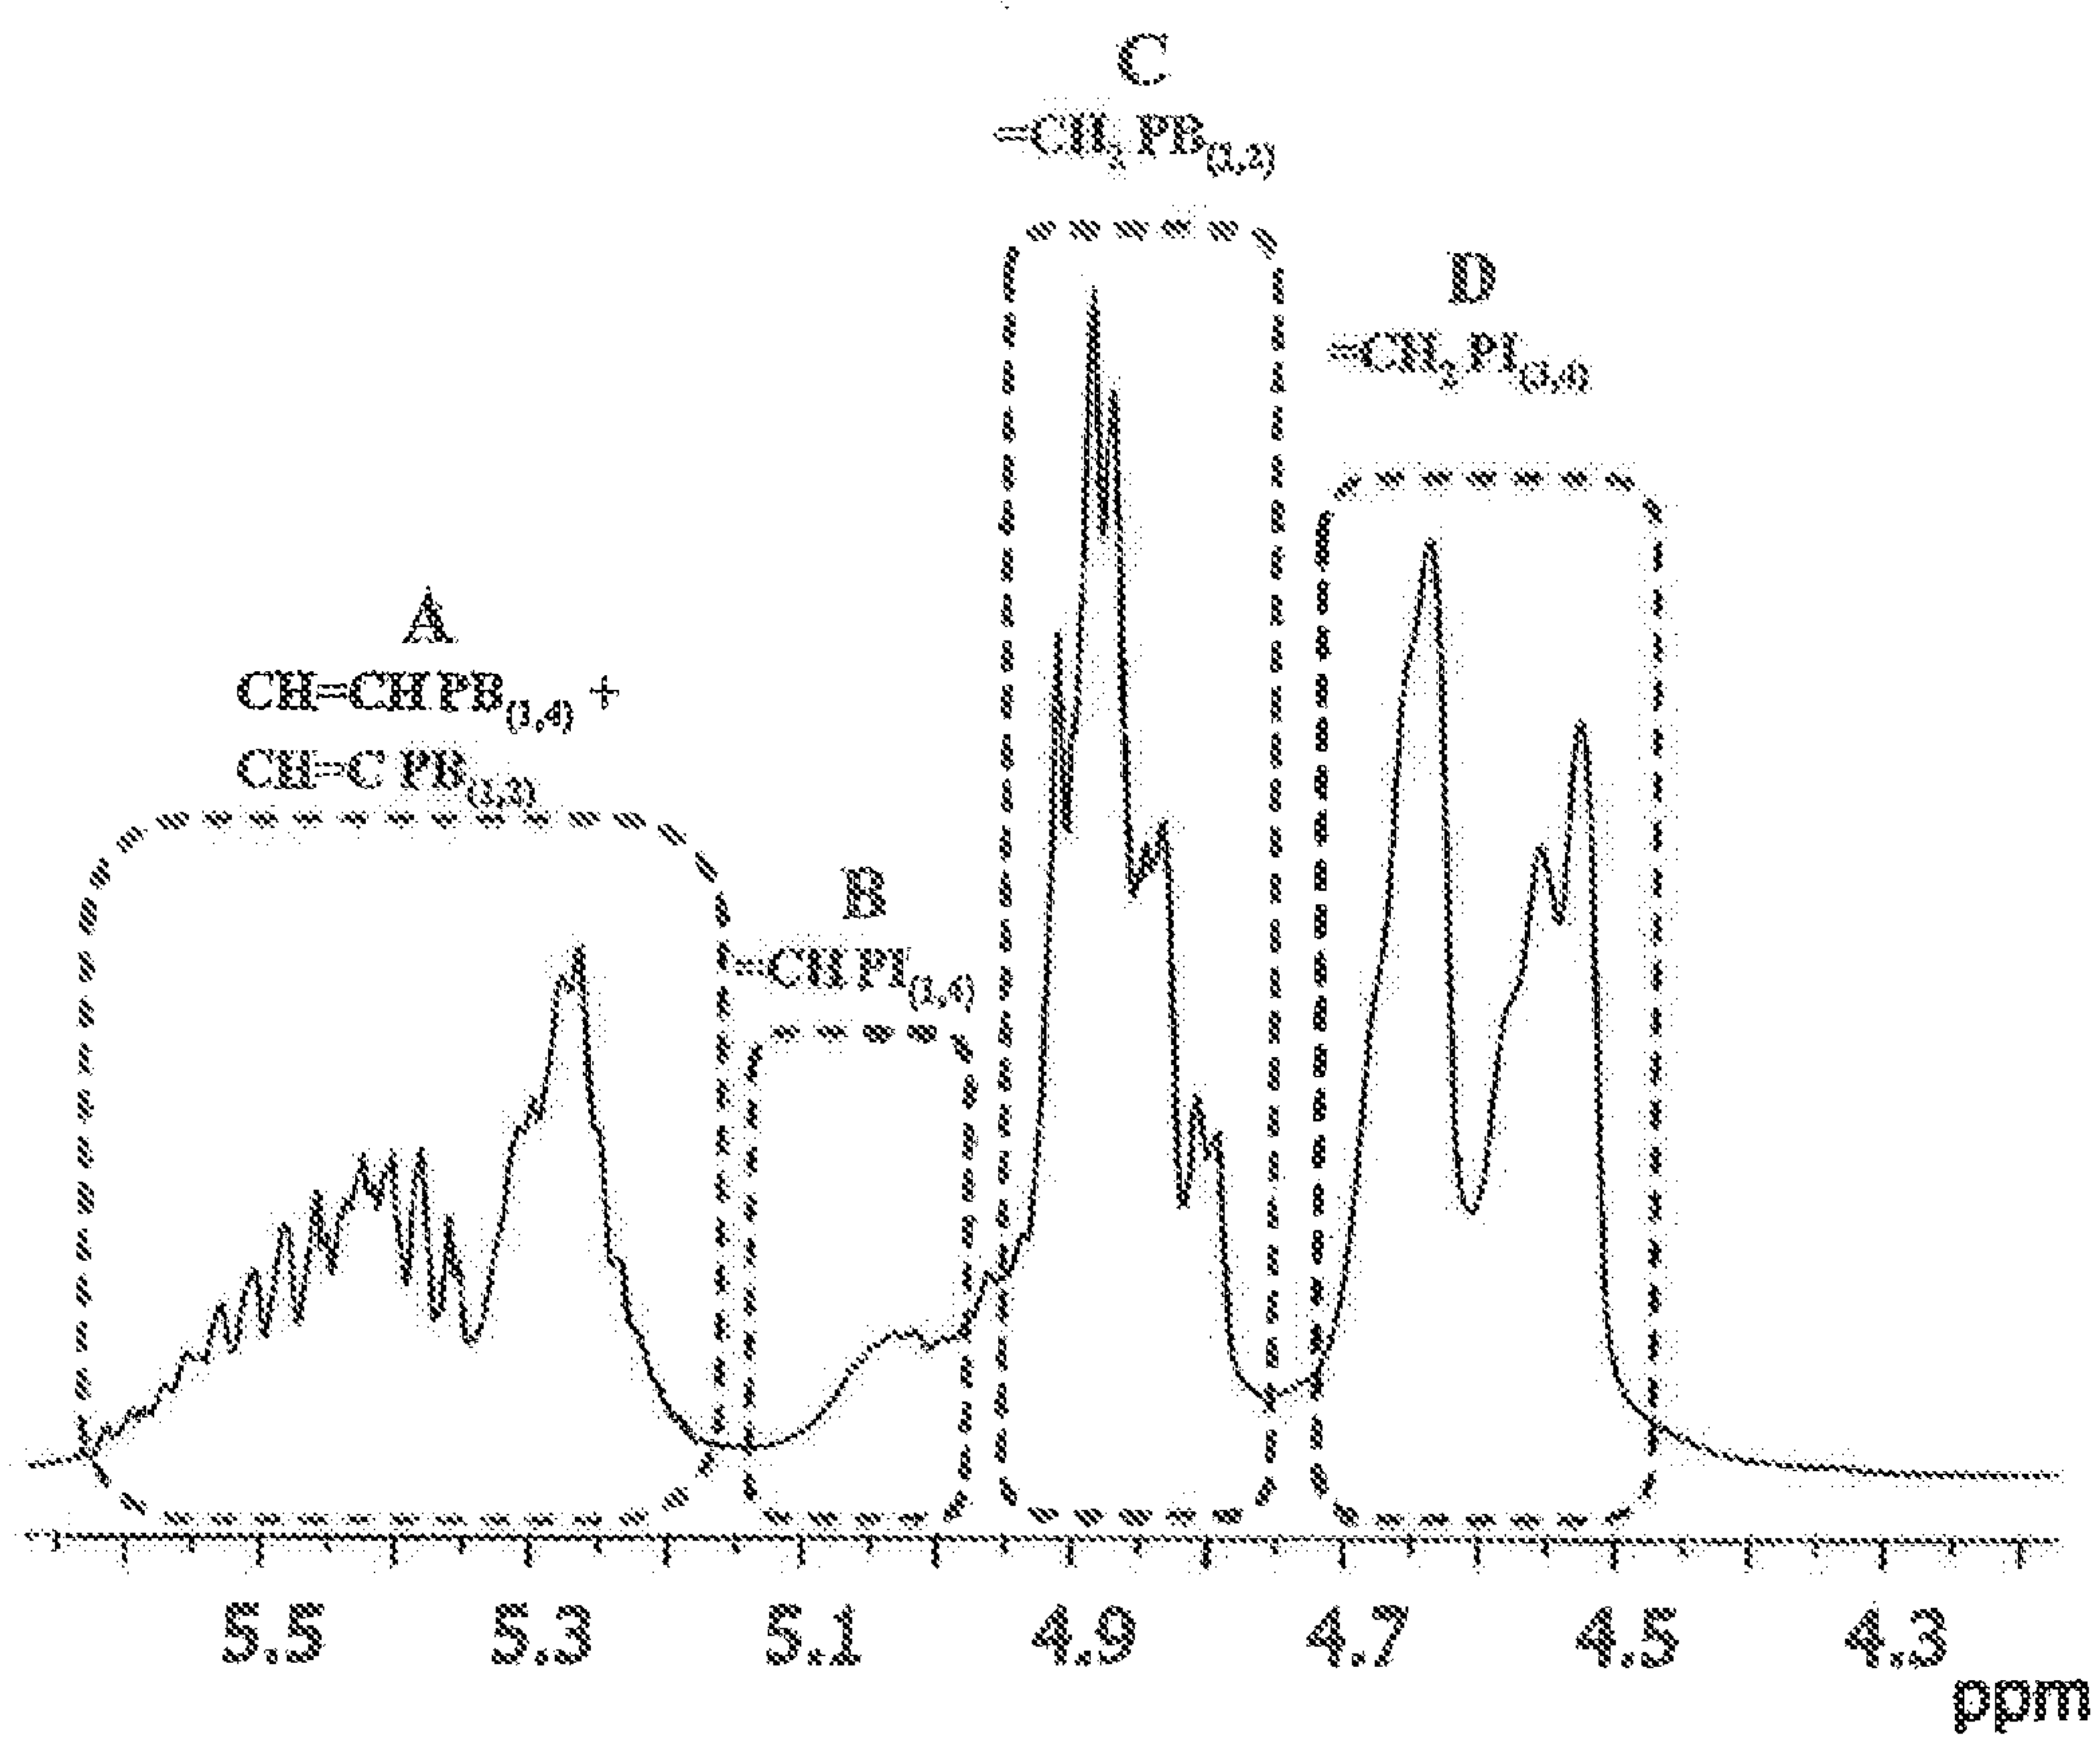


FIGURE 1

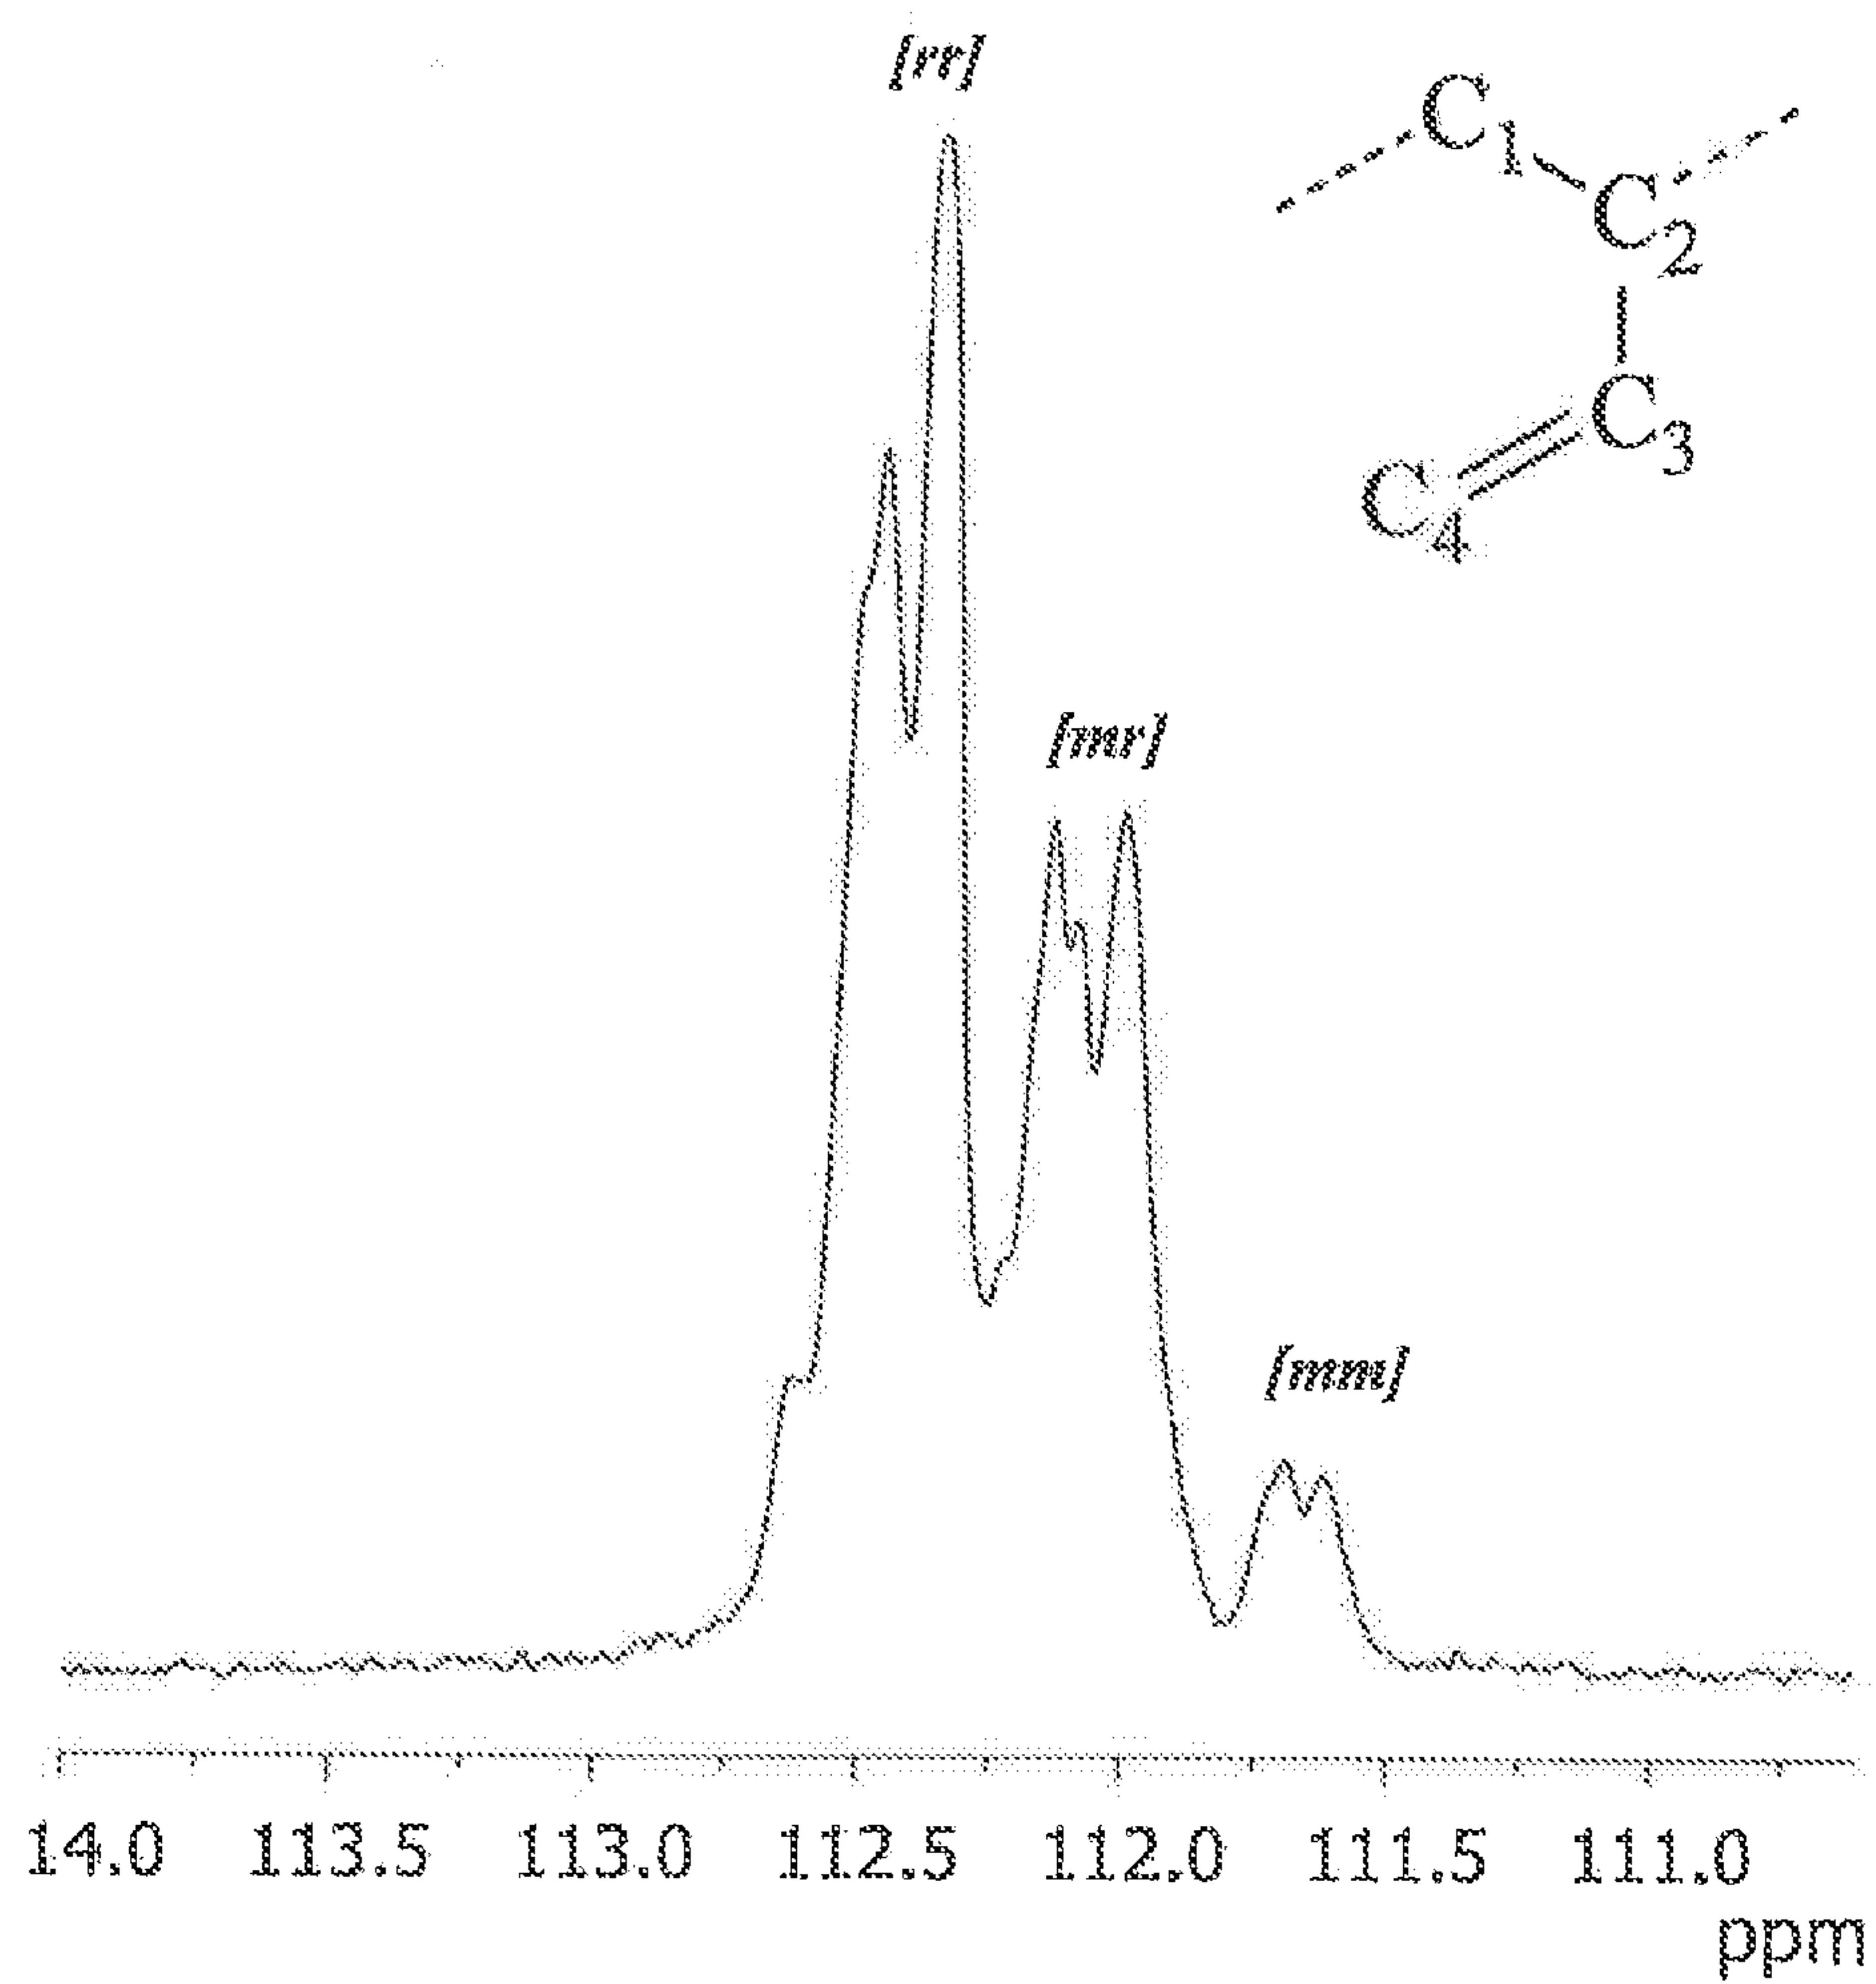


FIGURE 1/A

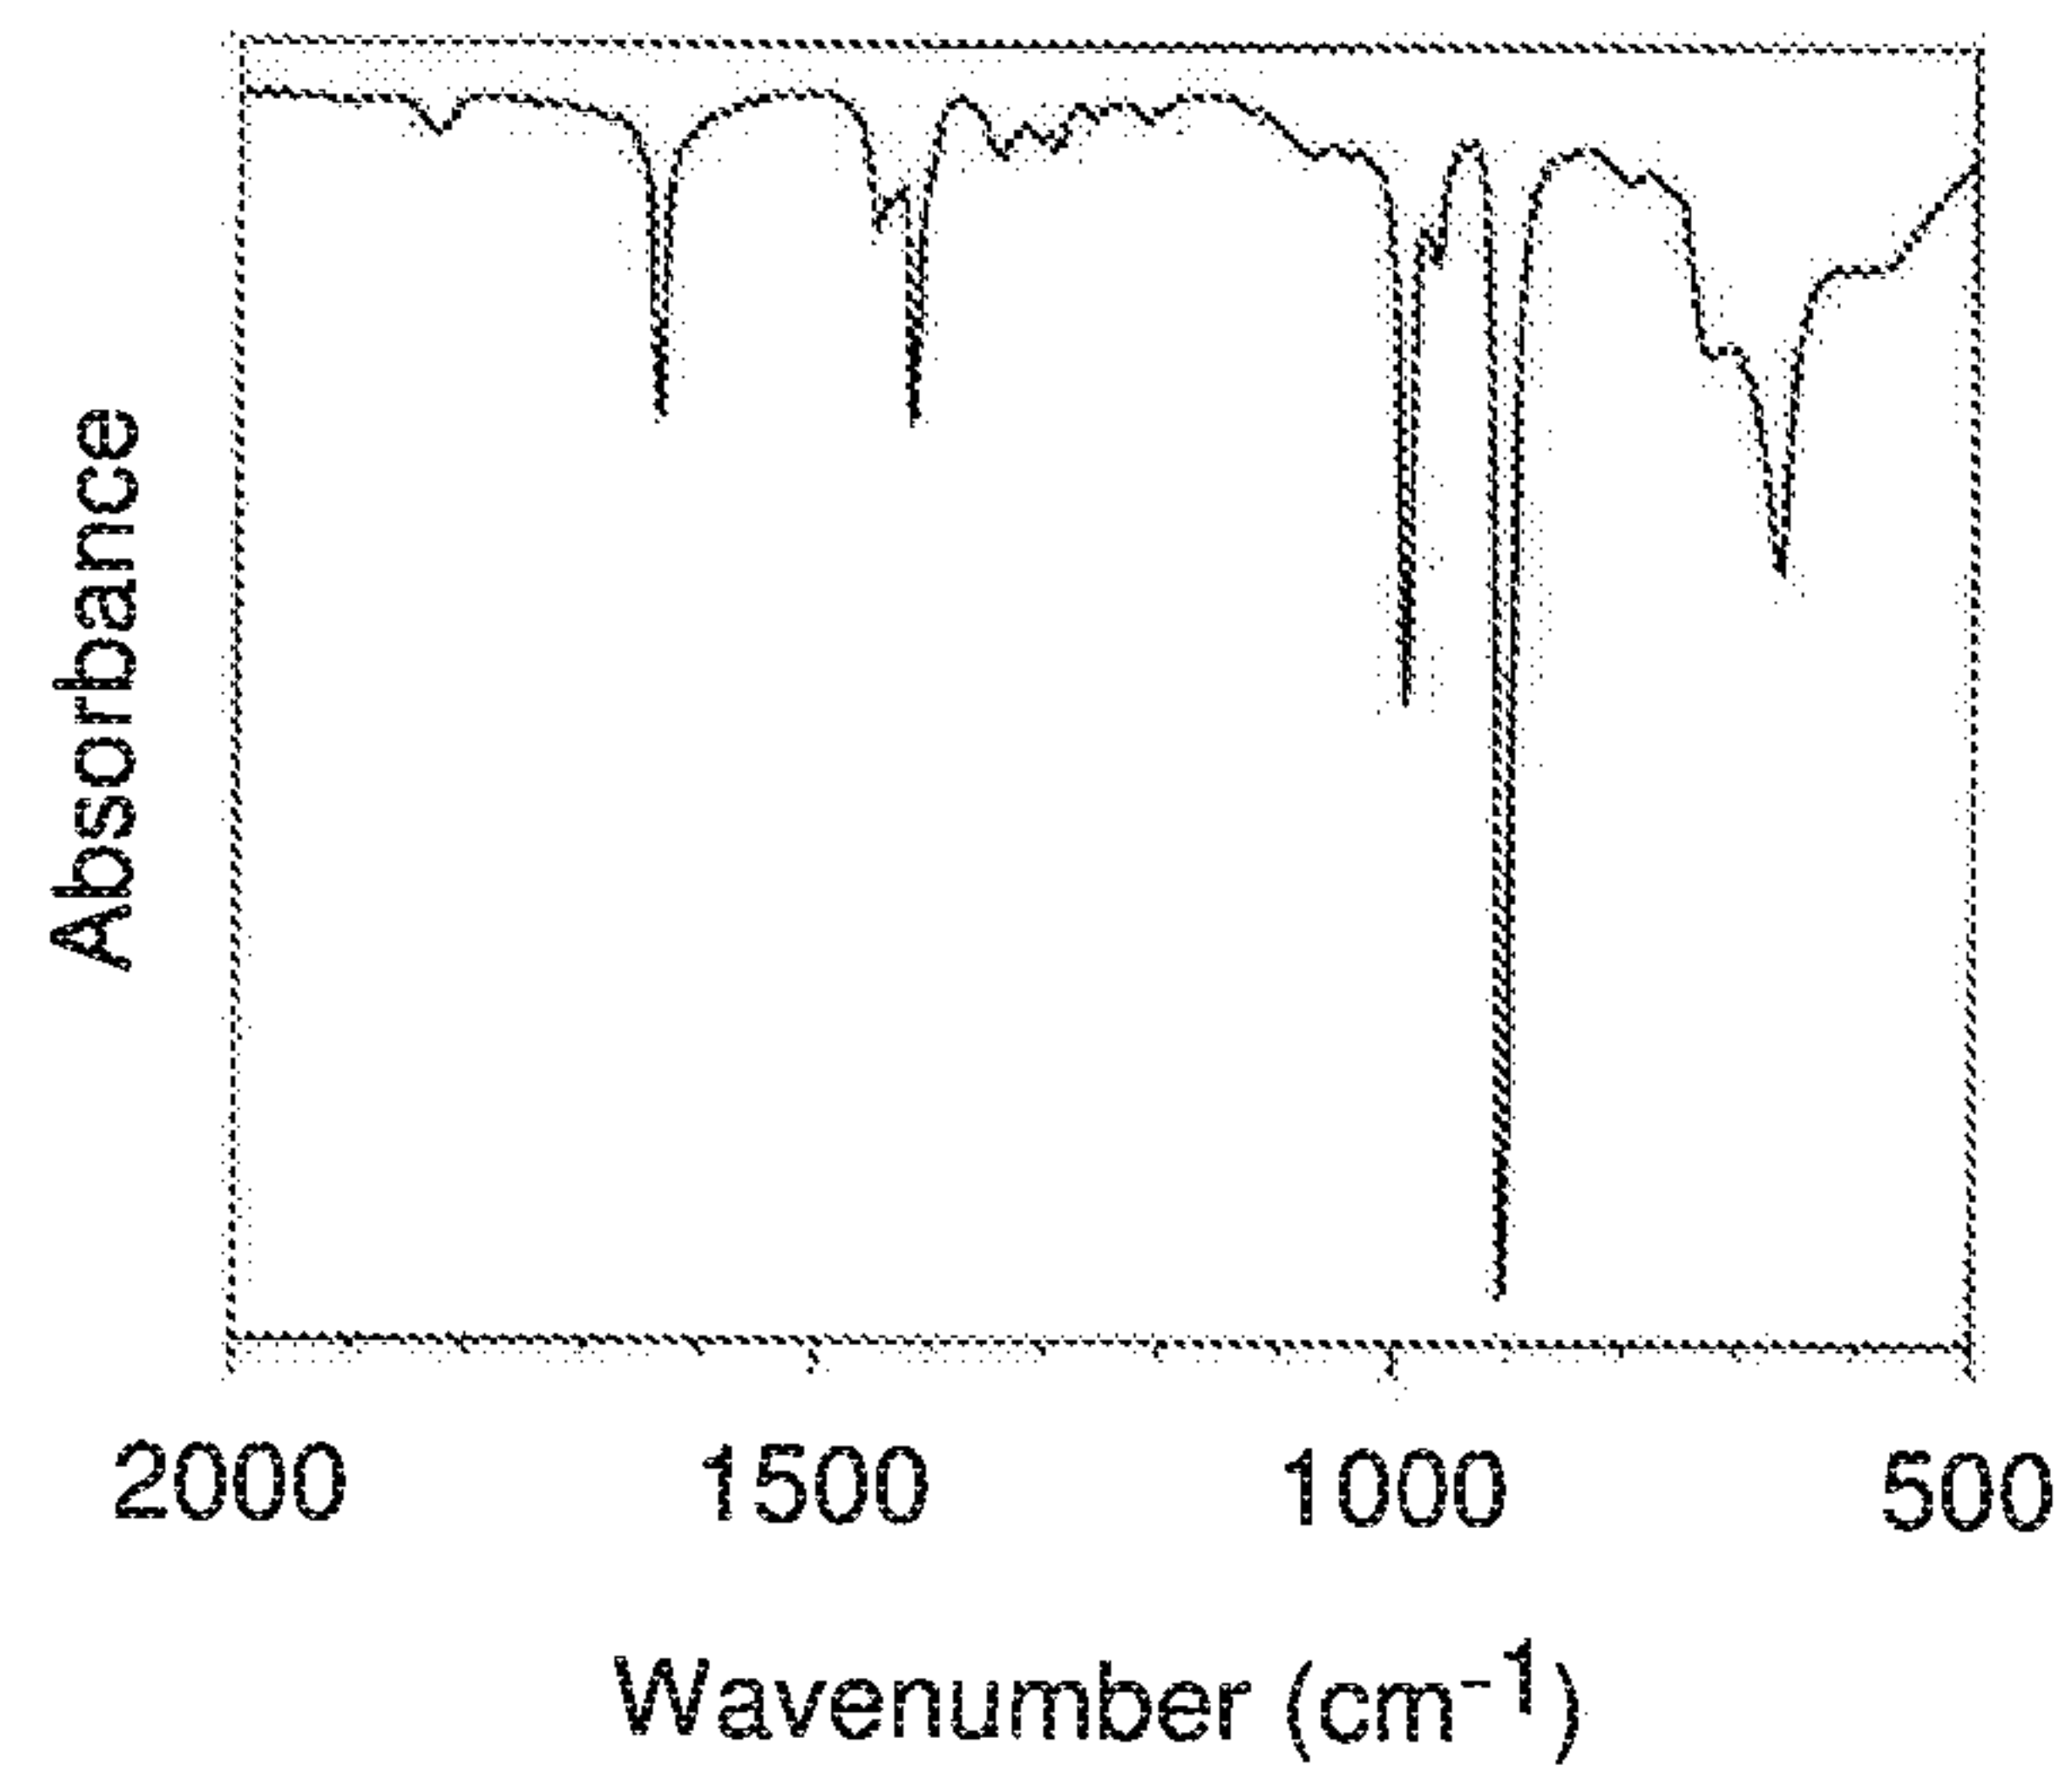


FIGURE 2

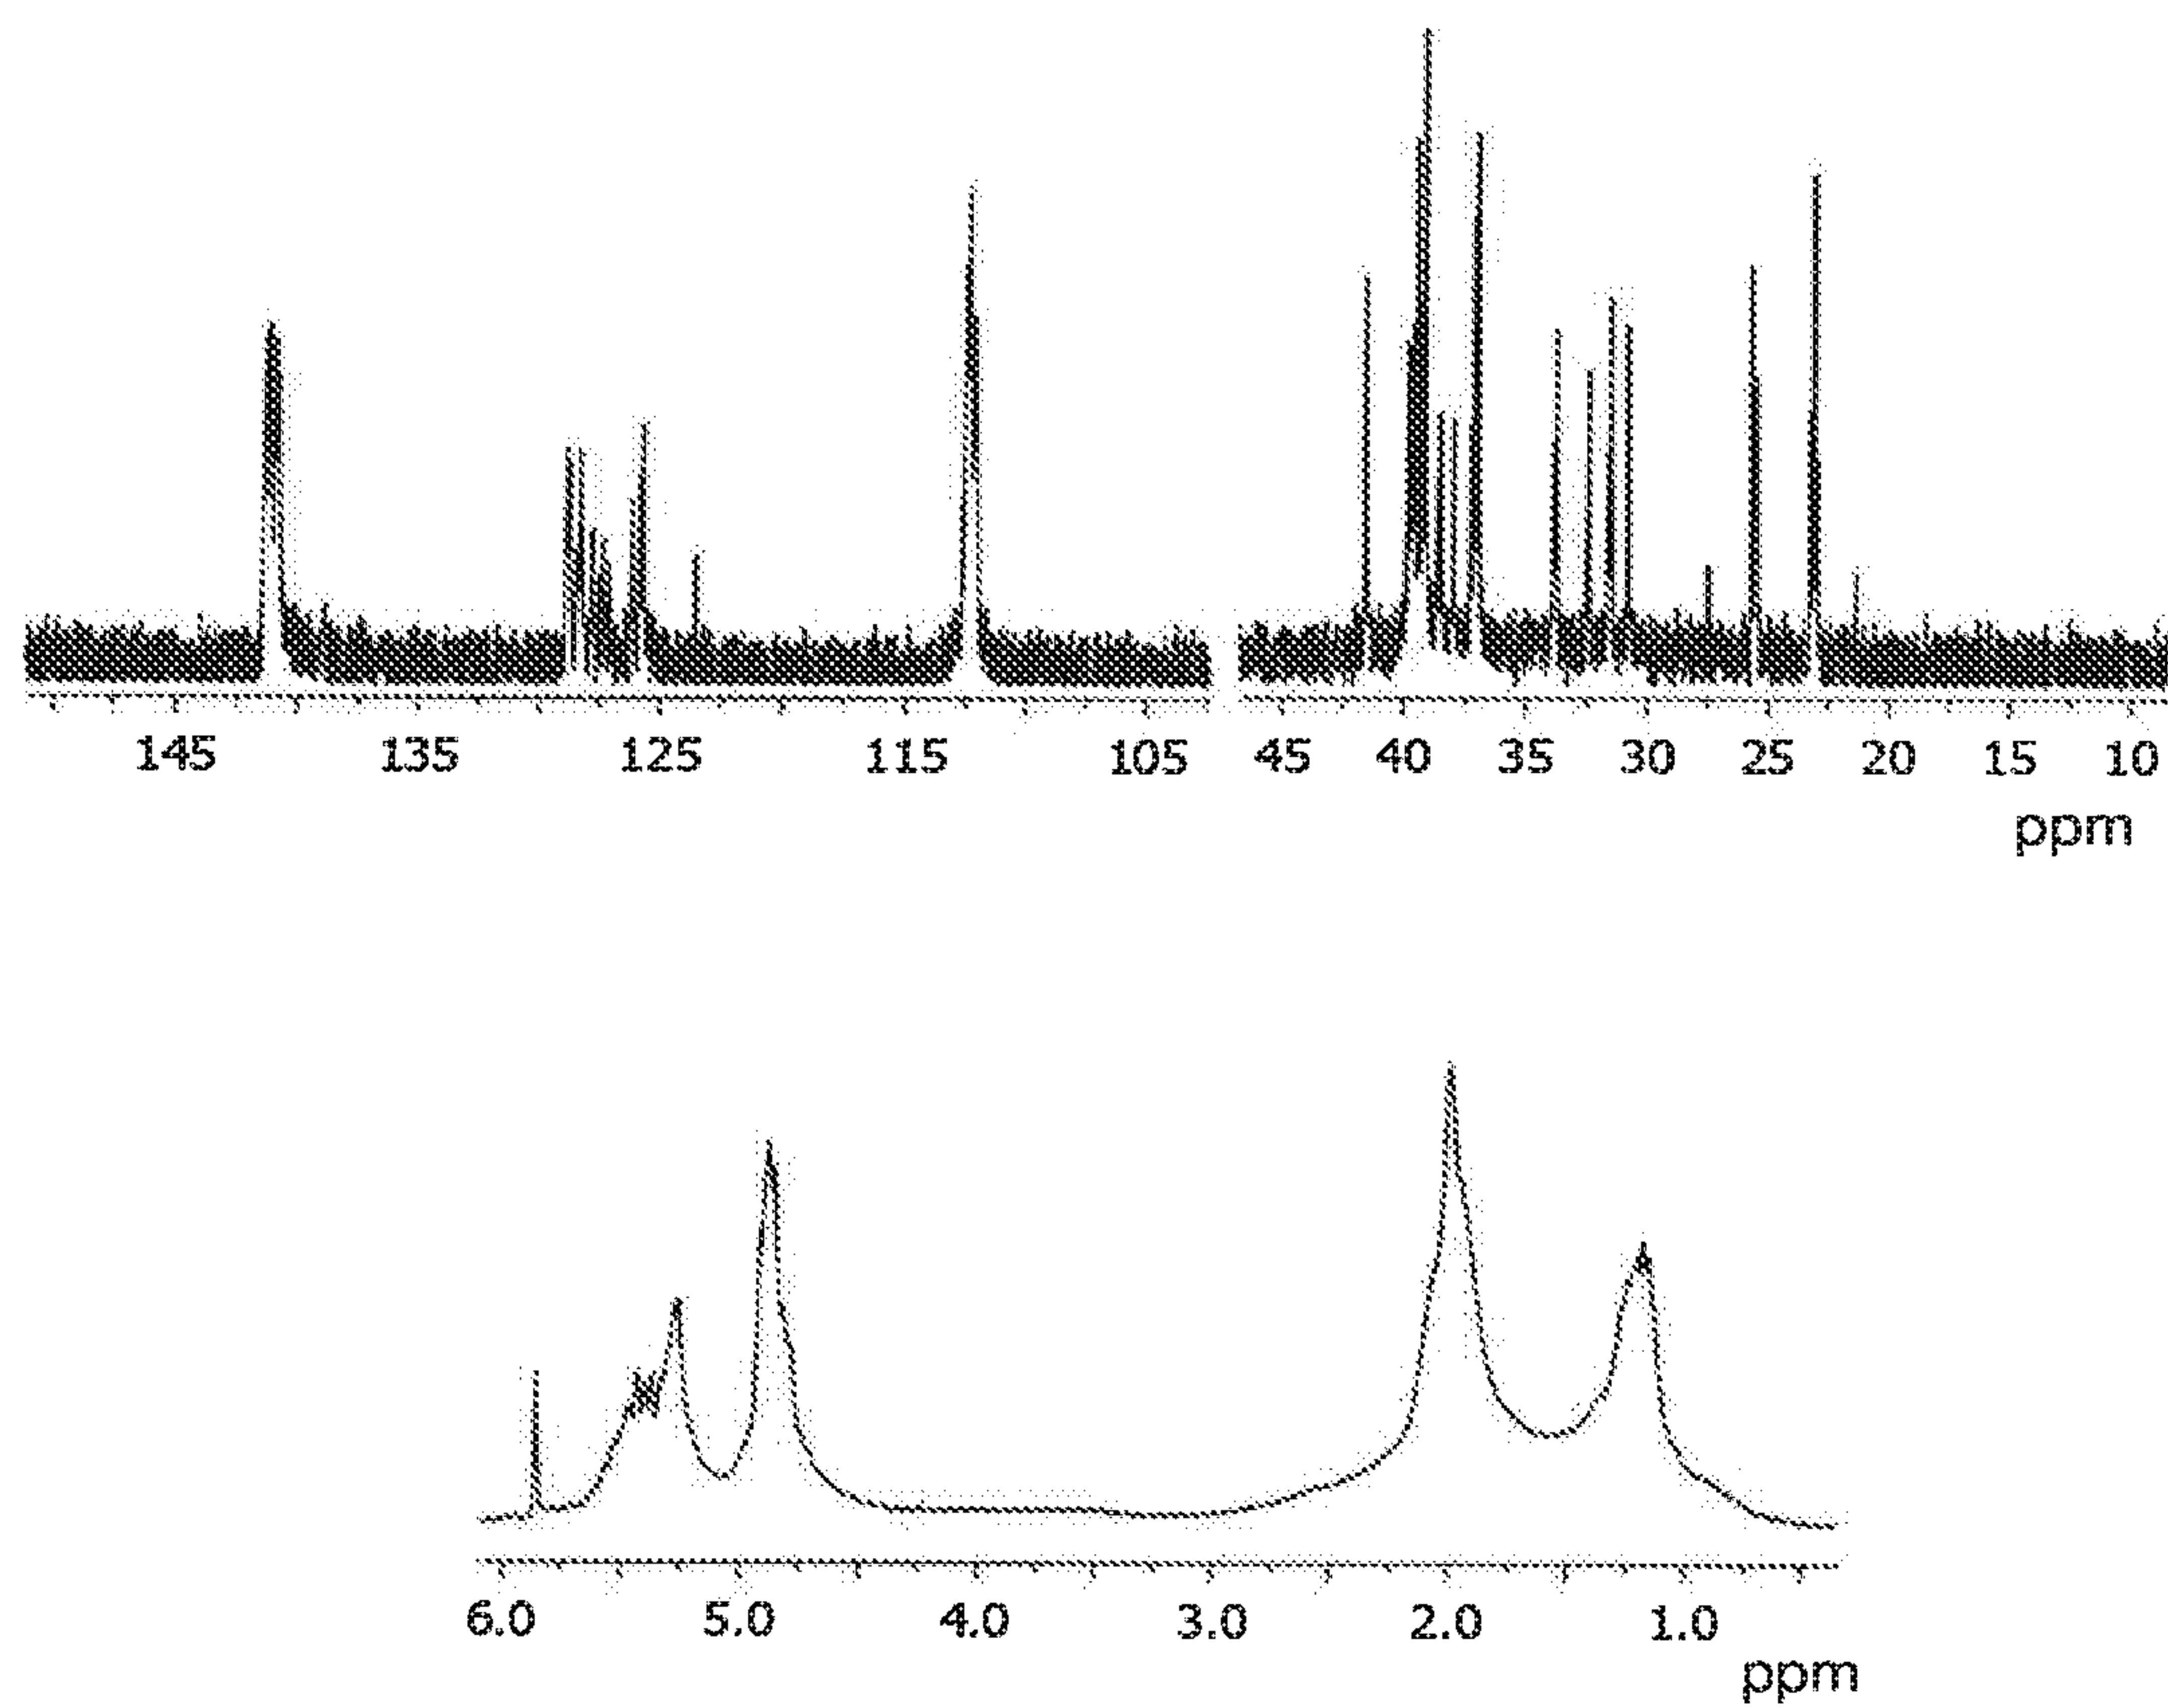


FIGURE 3

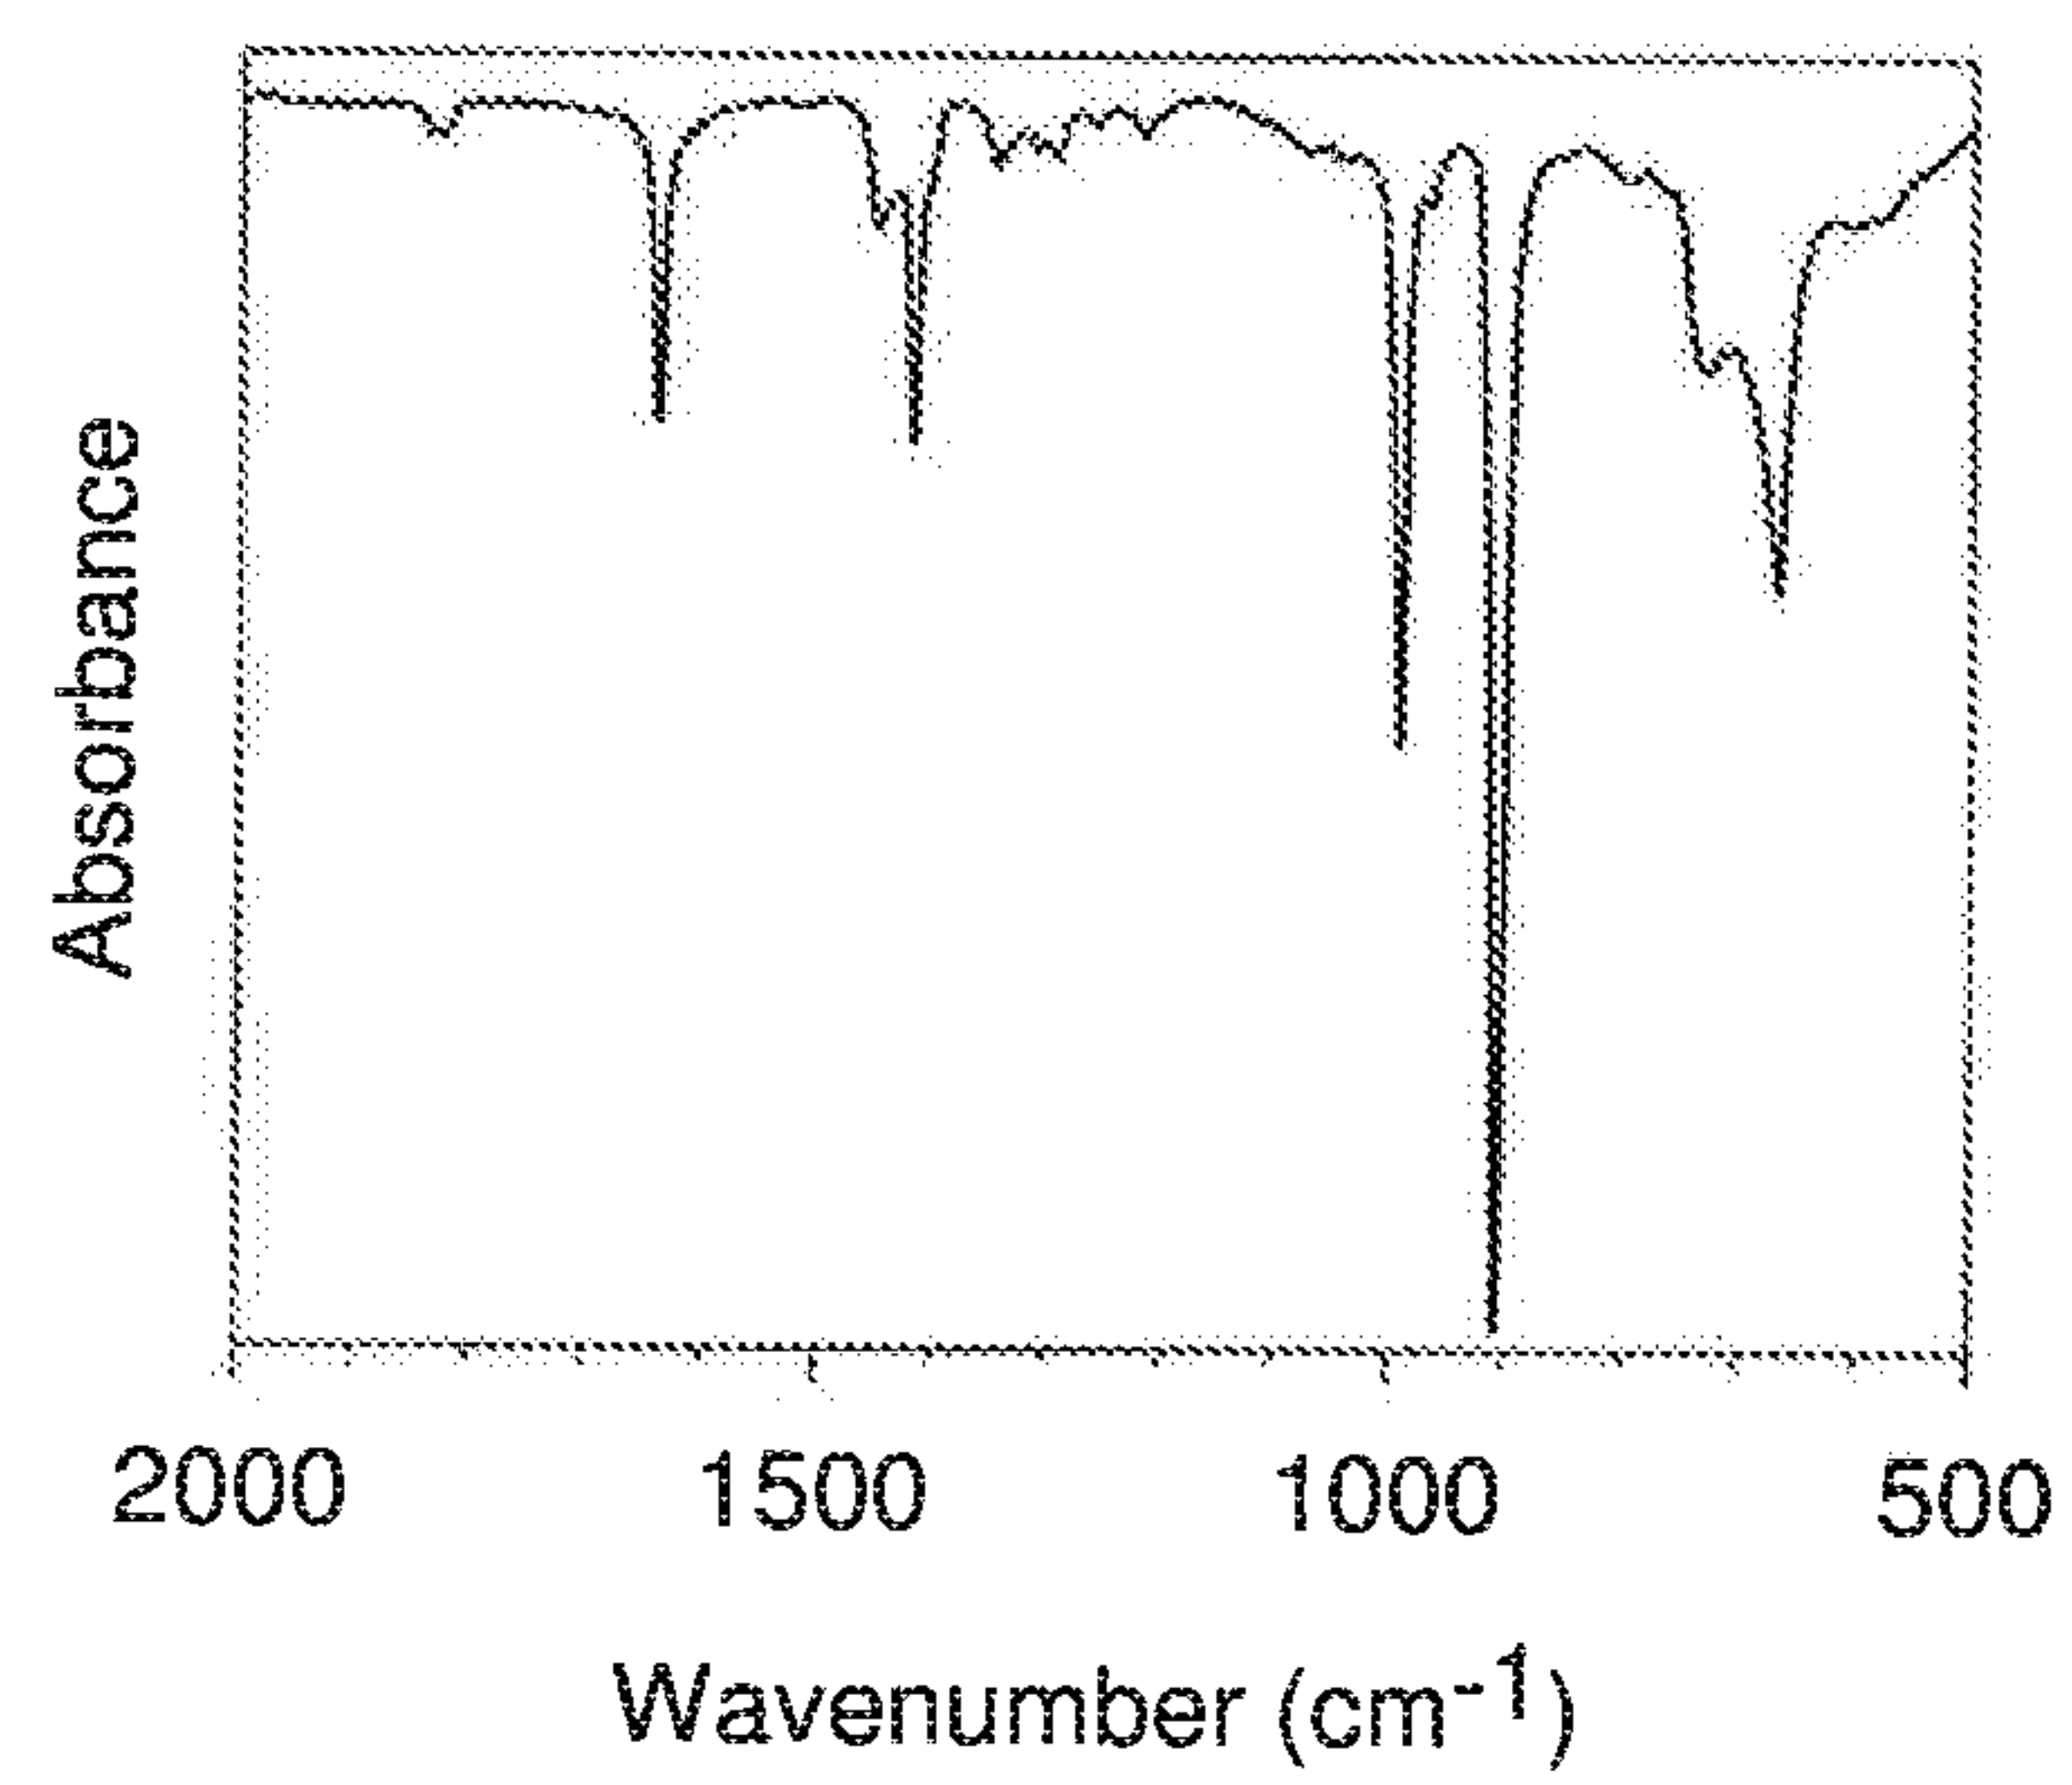


FIGURE 4

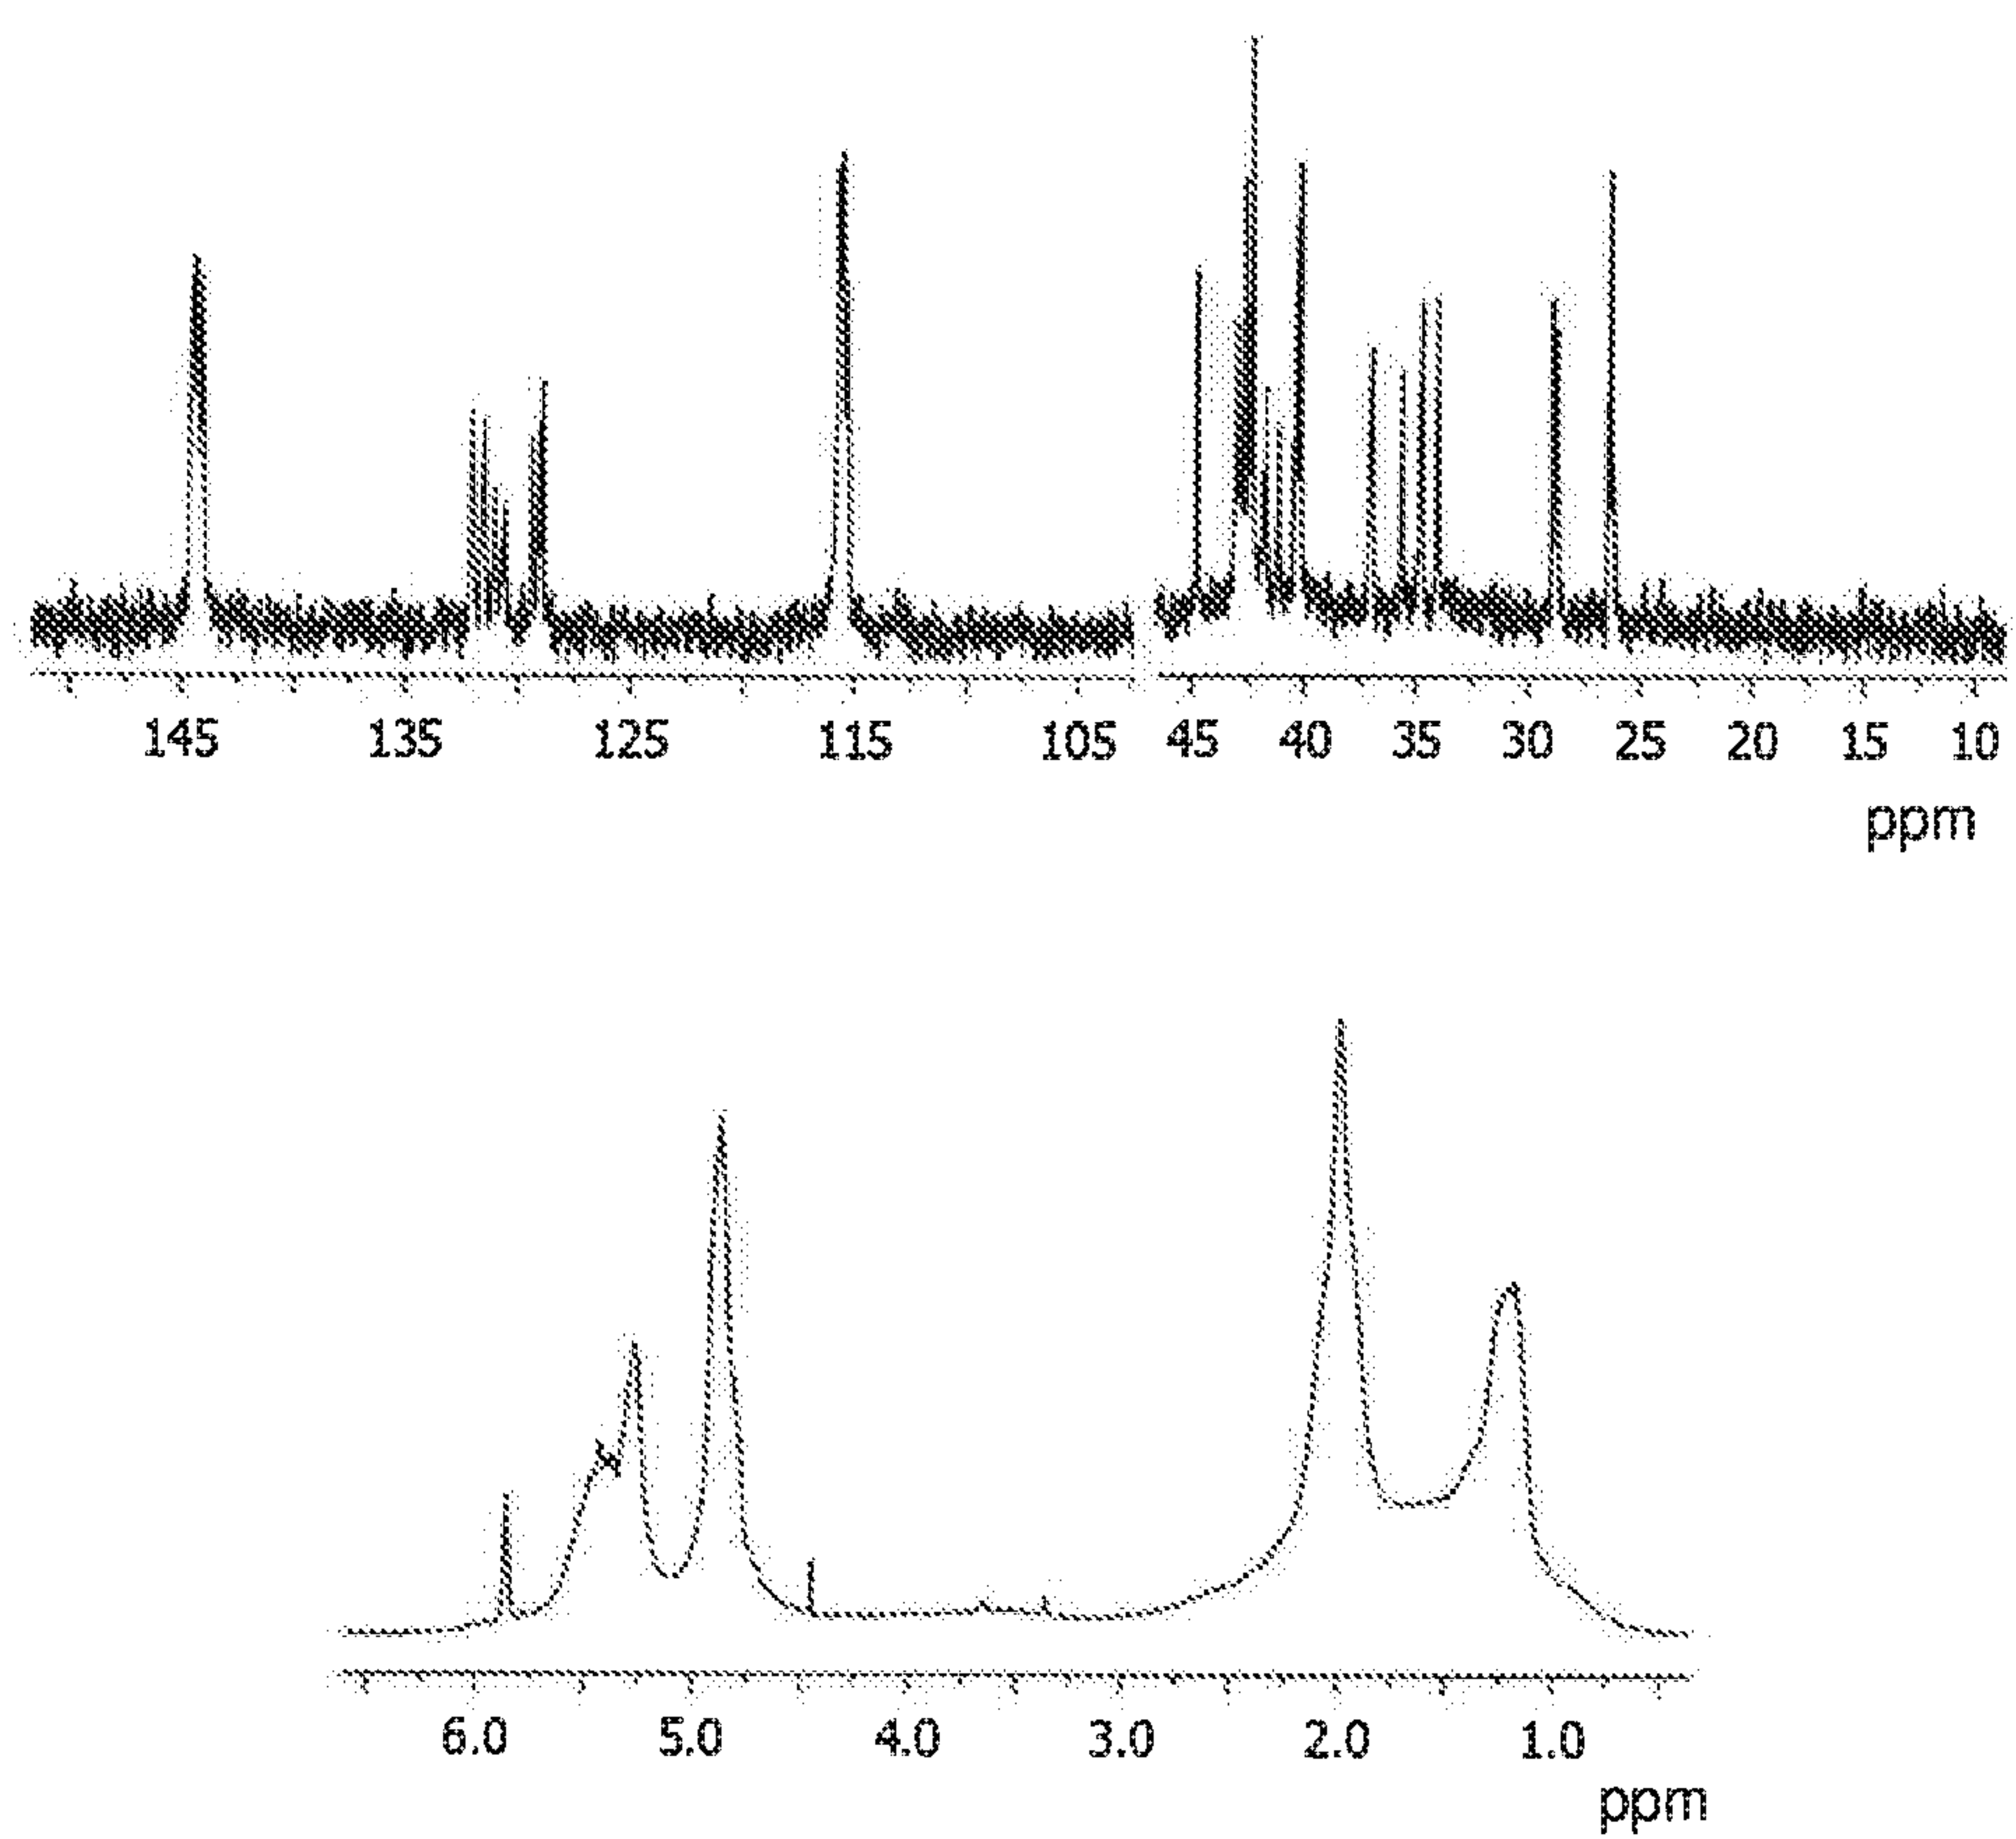


FIGURE 5

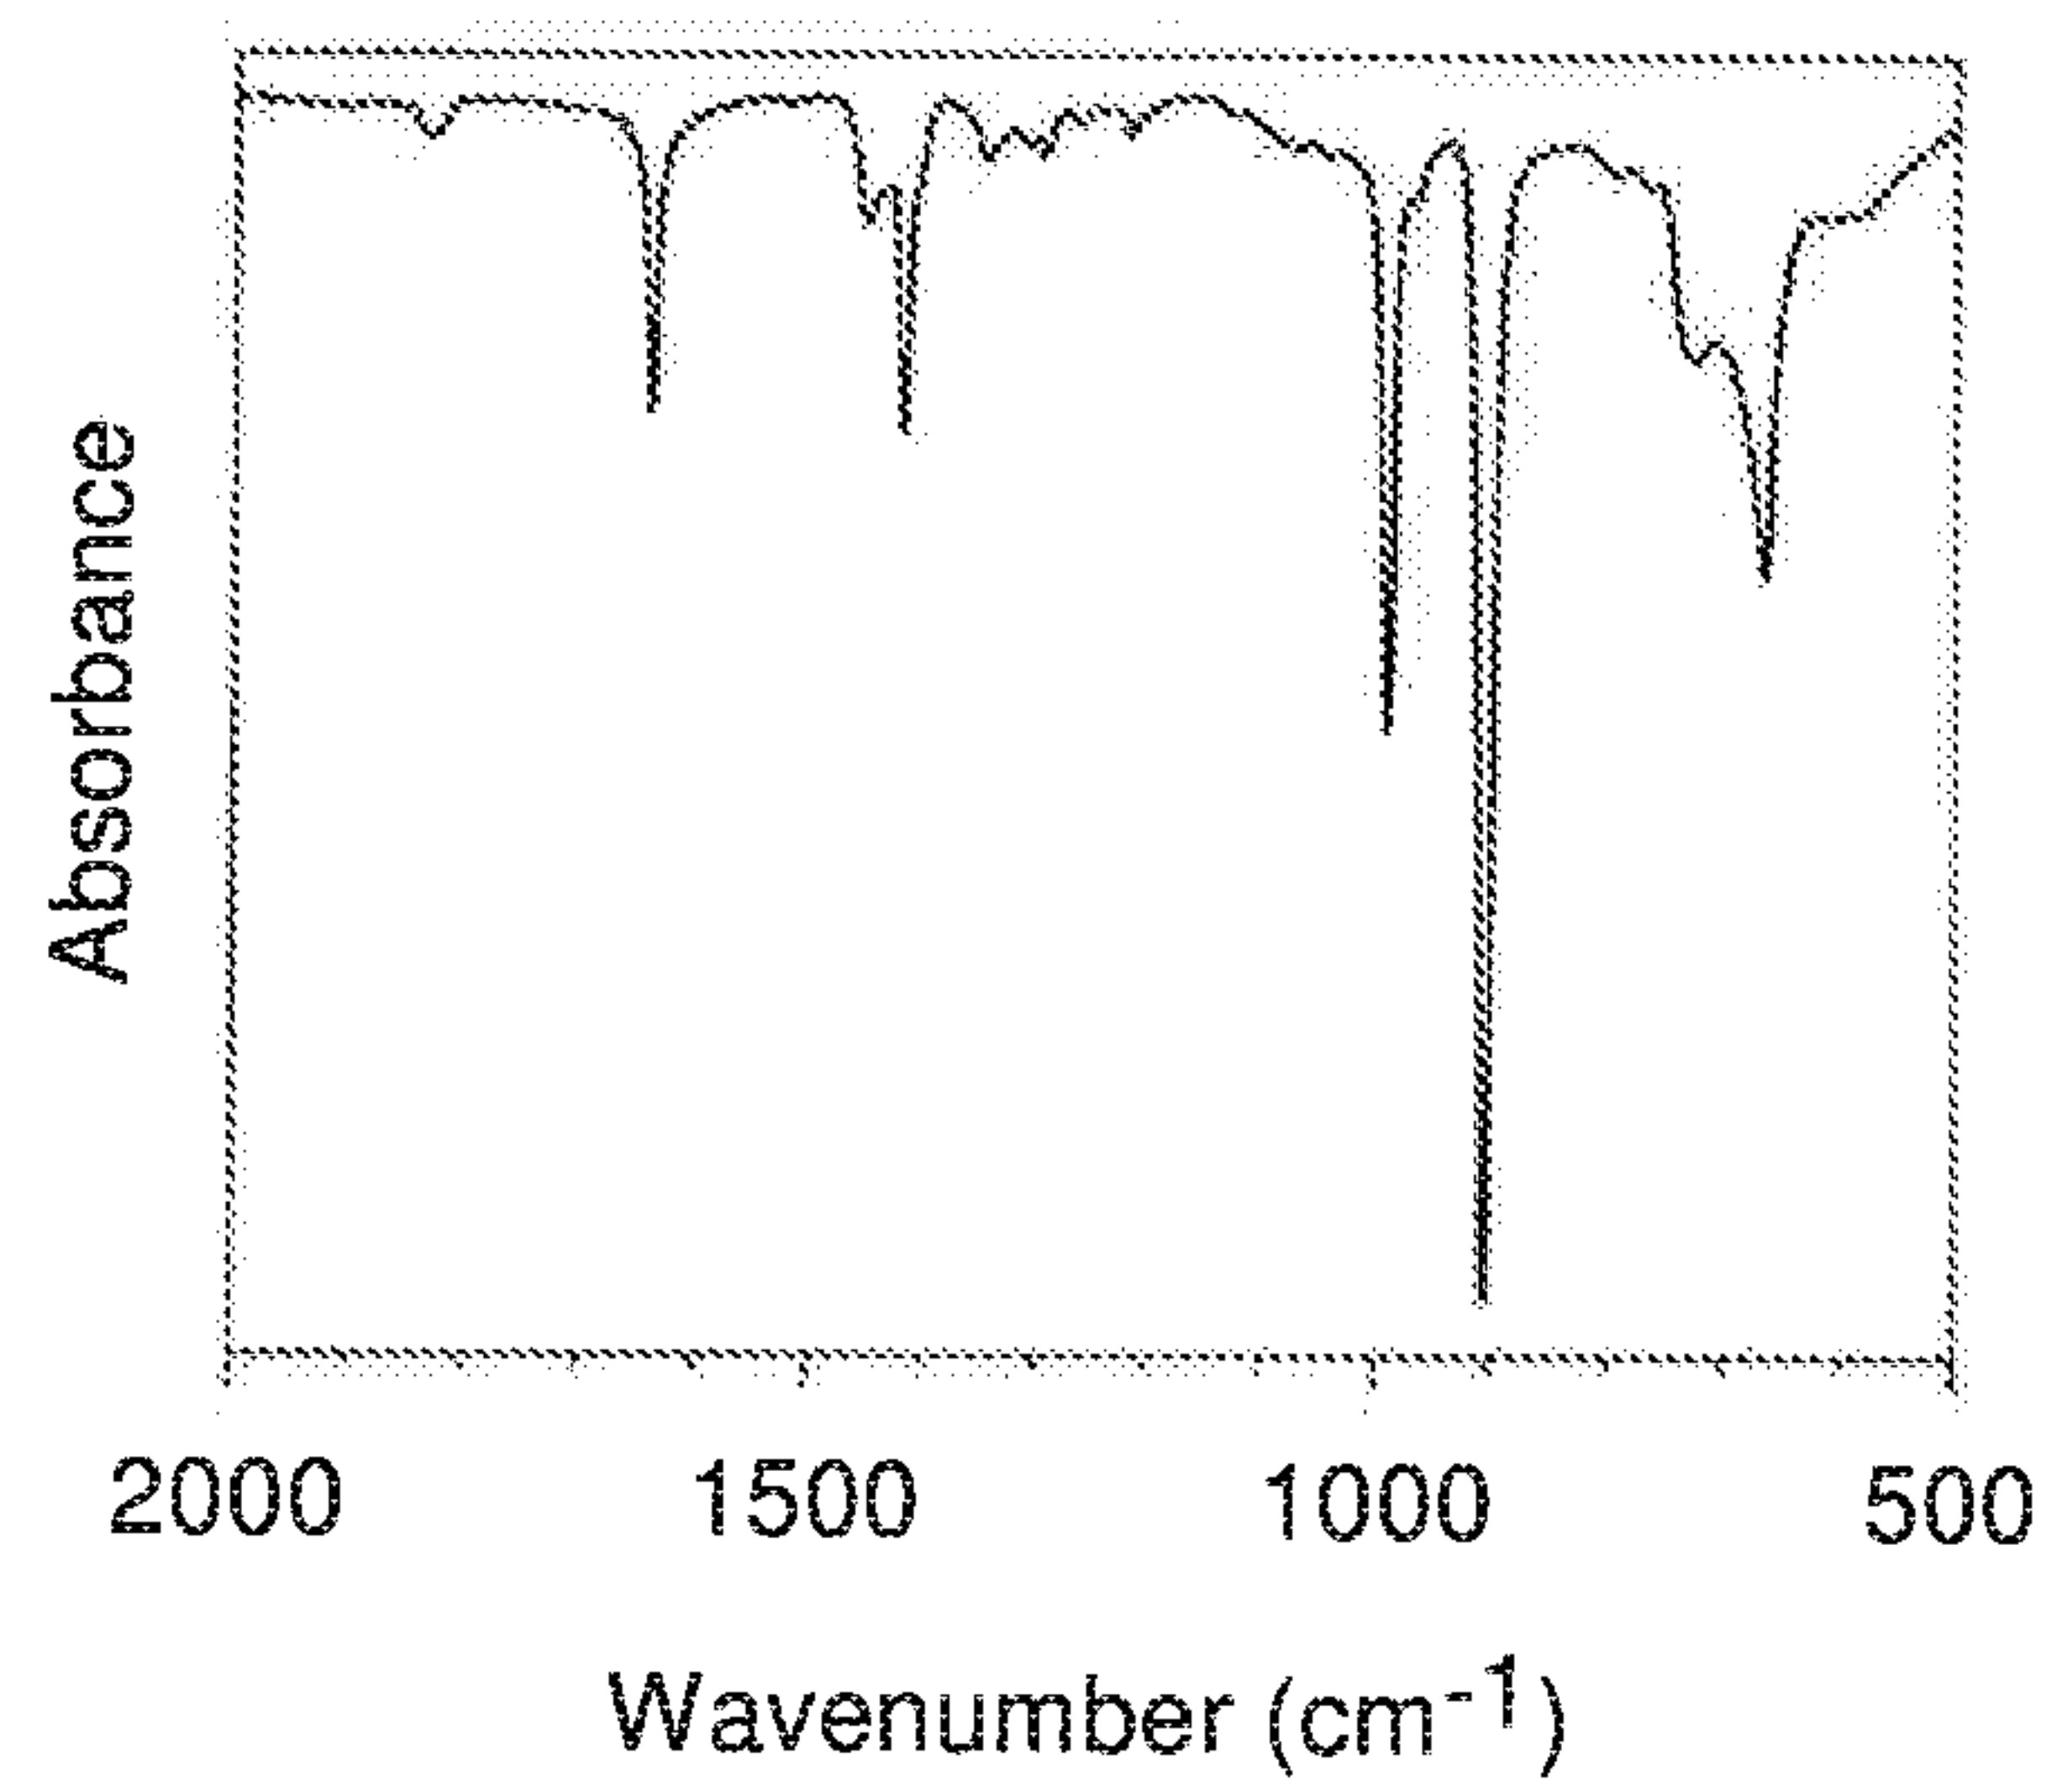


FIGURE 6

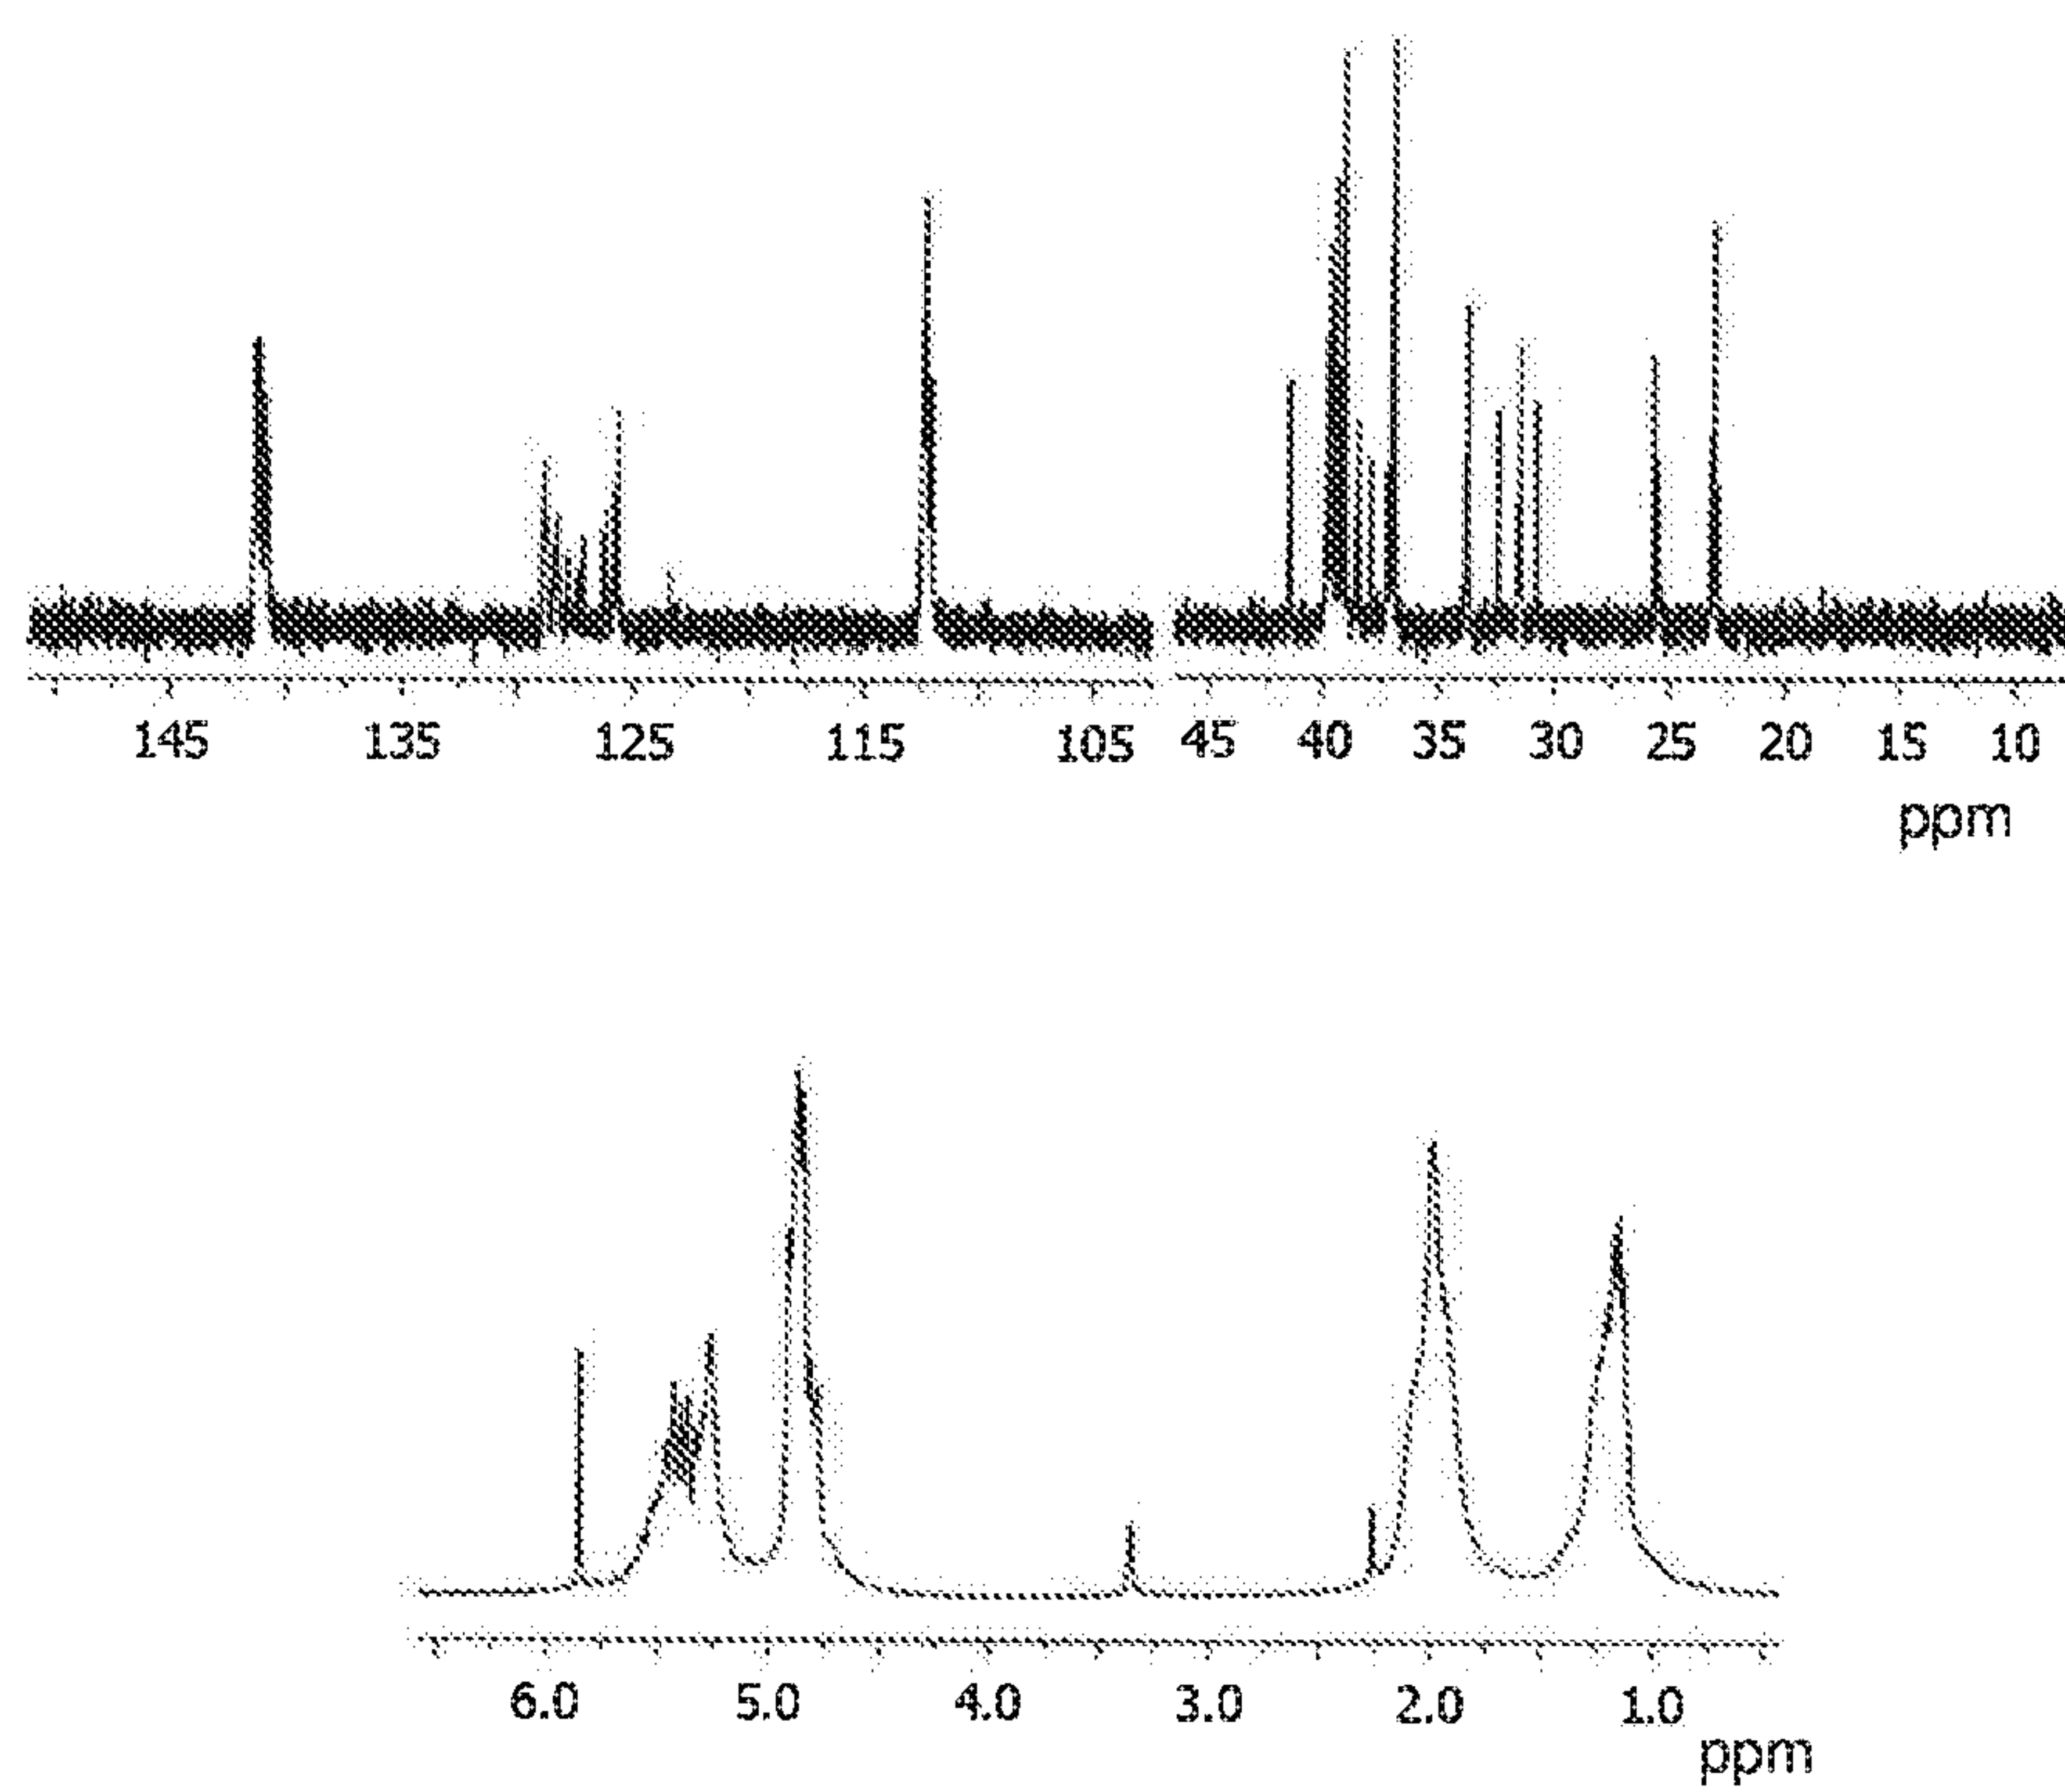


FIGURE 7

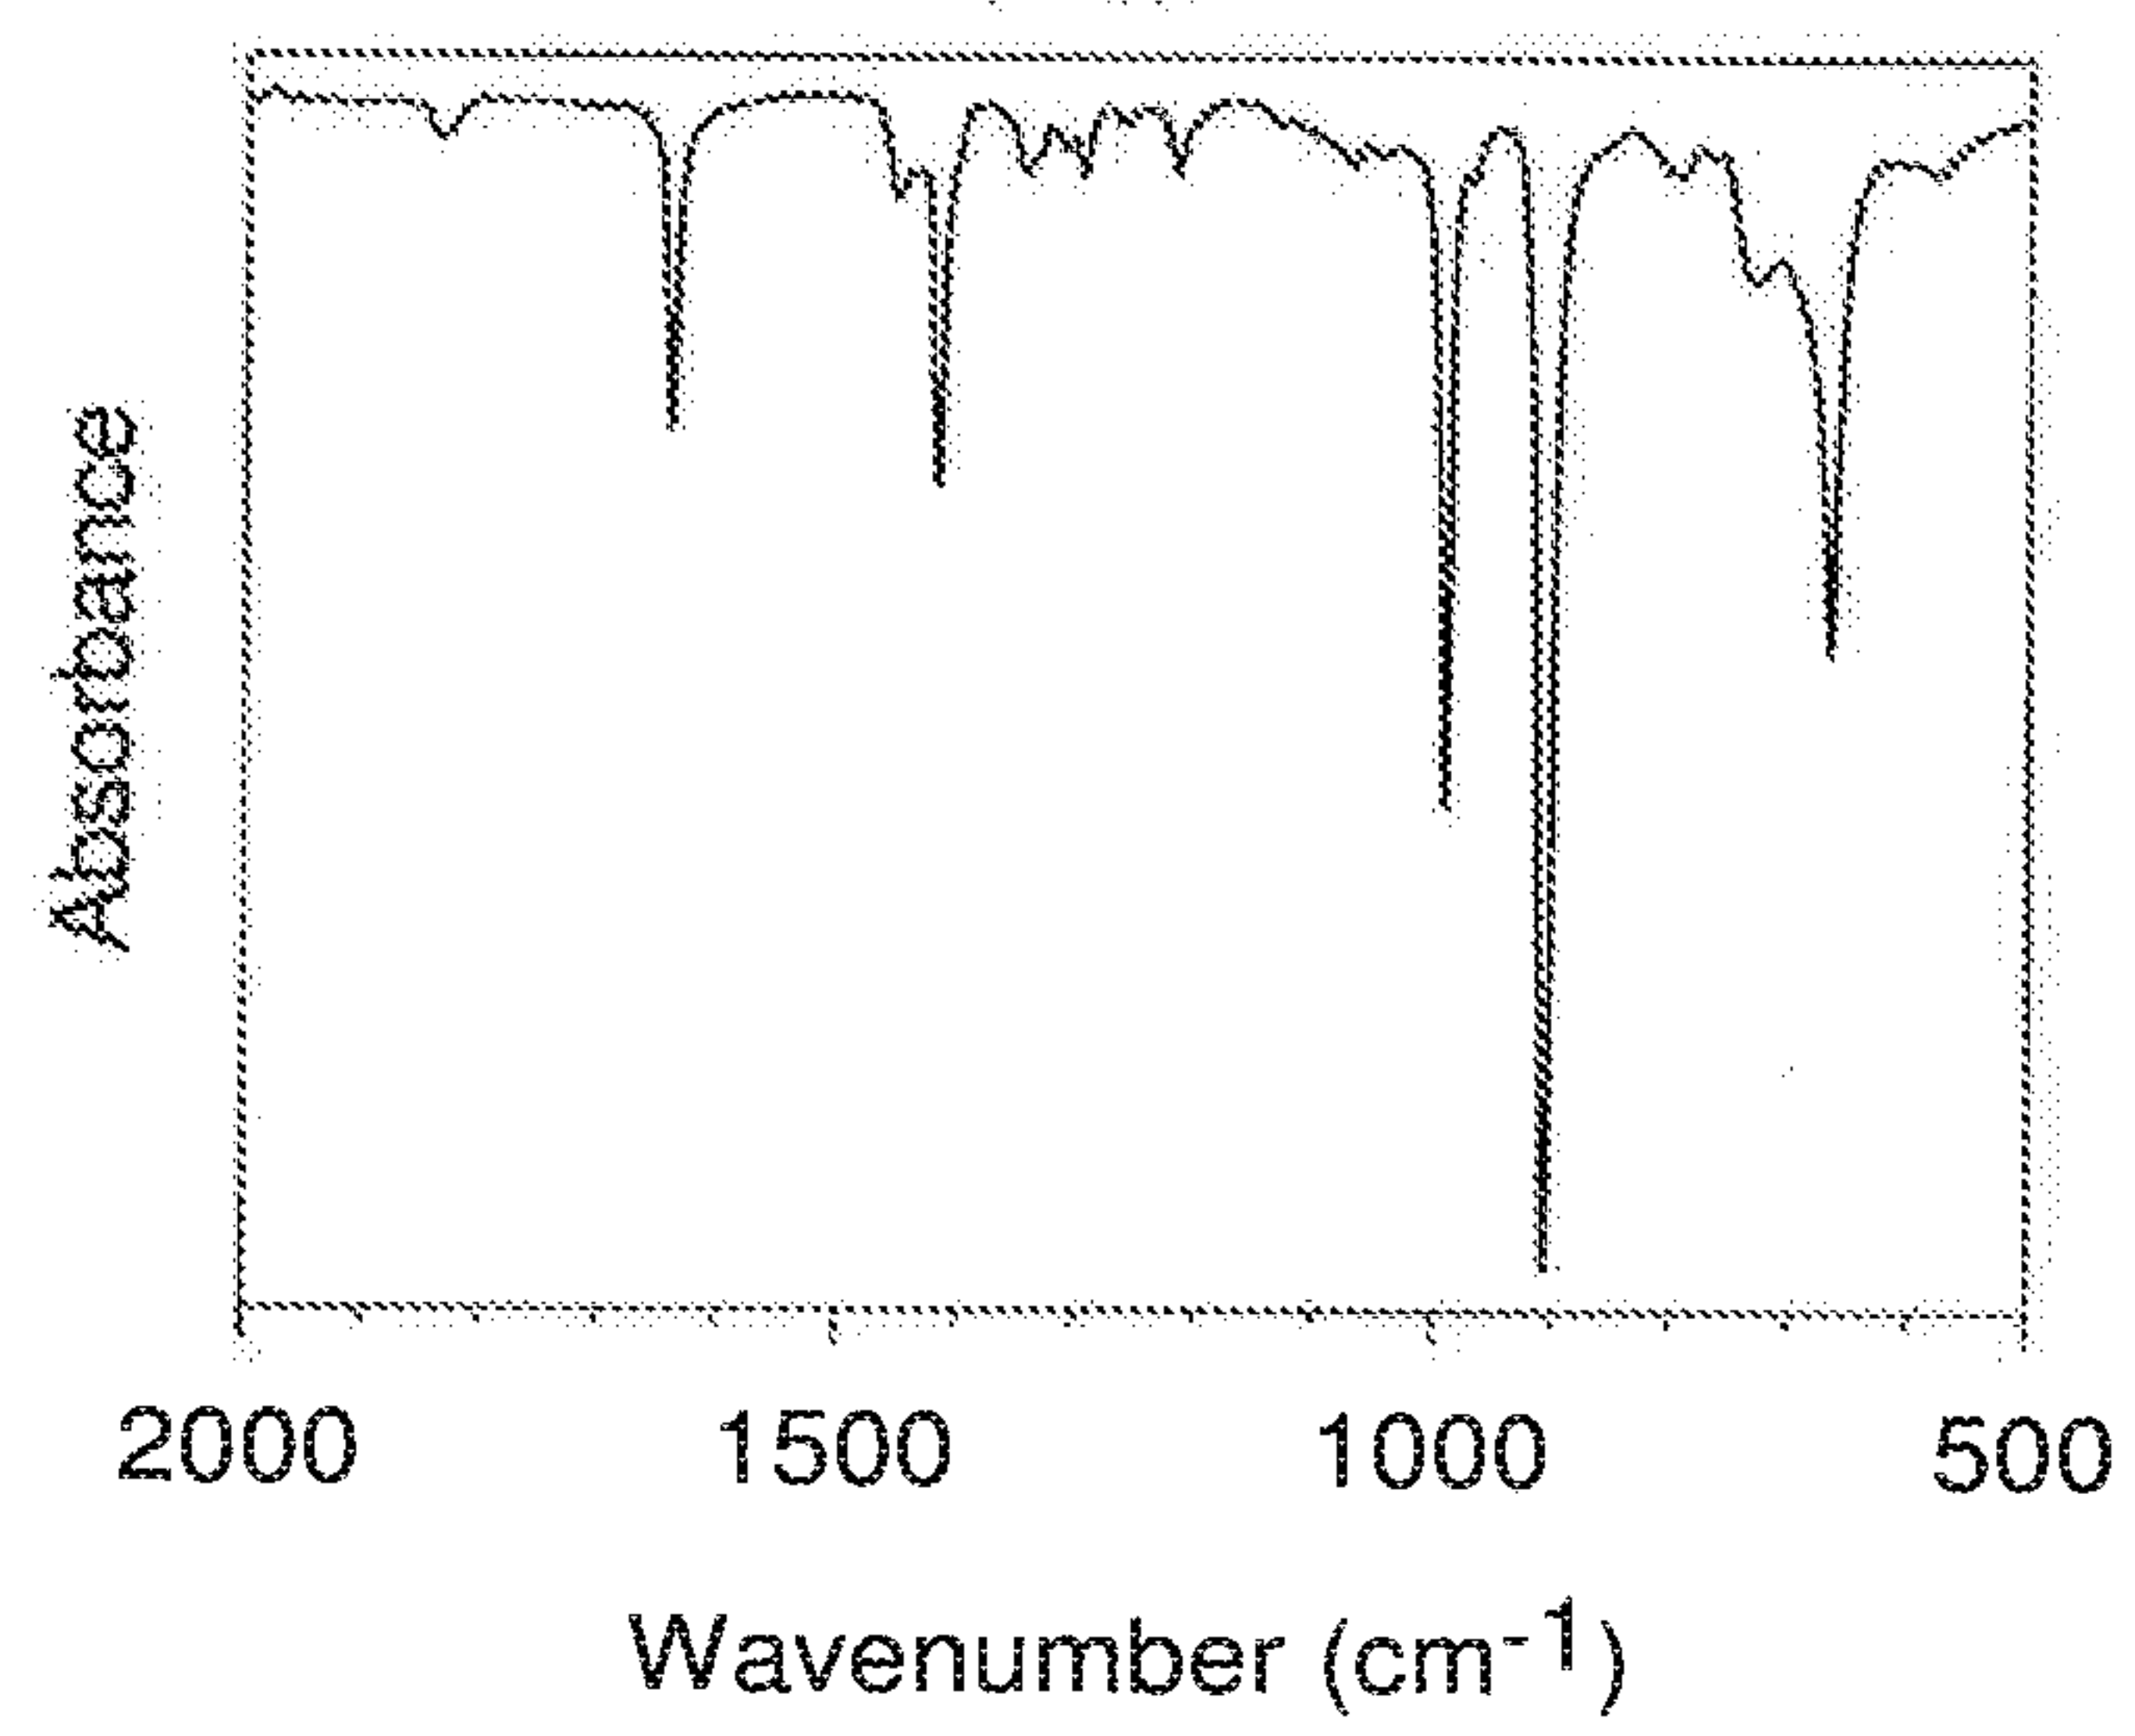


FIGURE 8

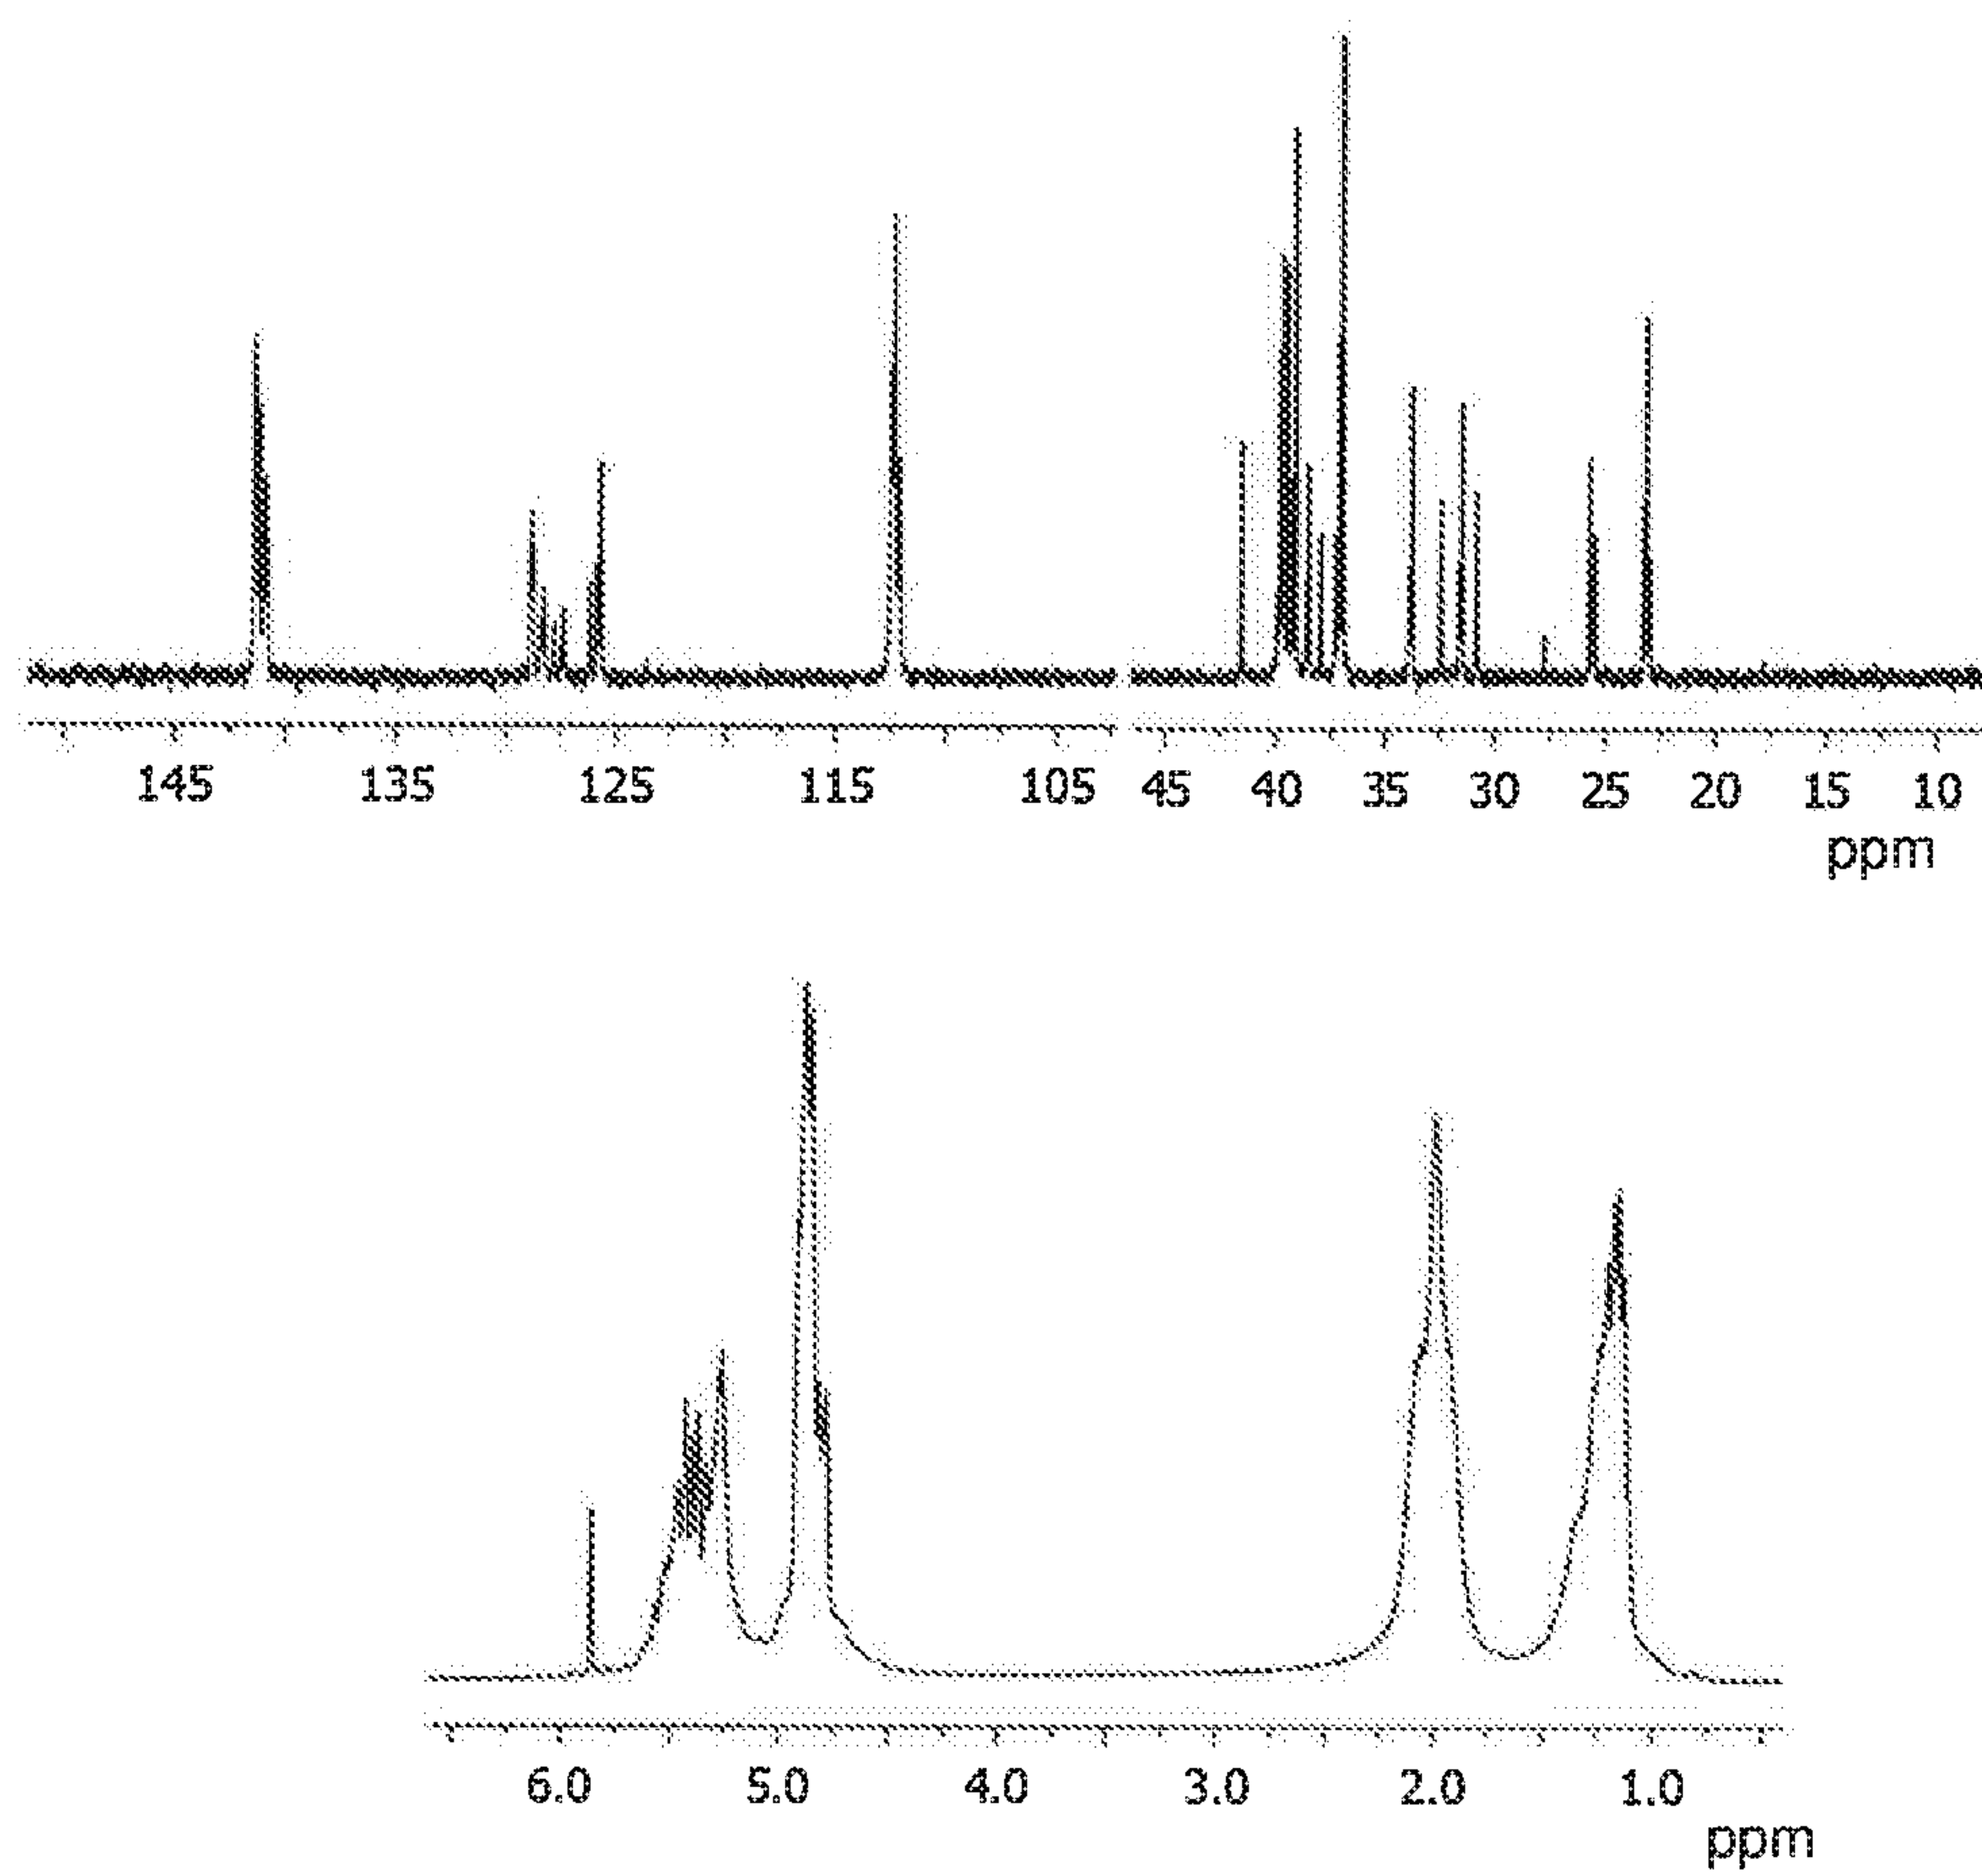


FIGURE 9

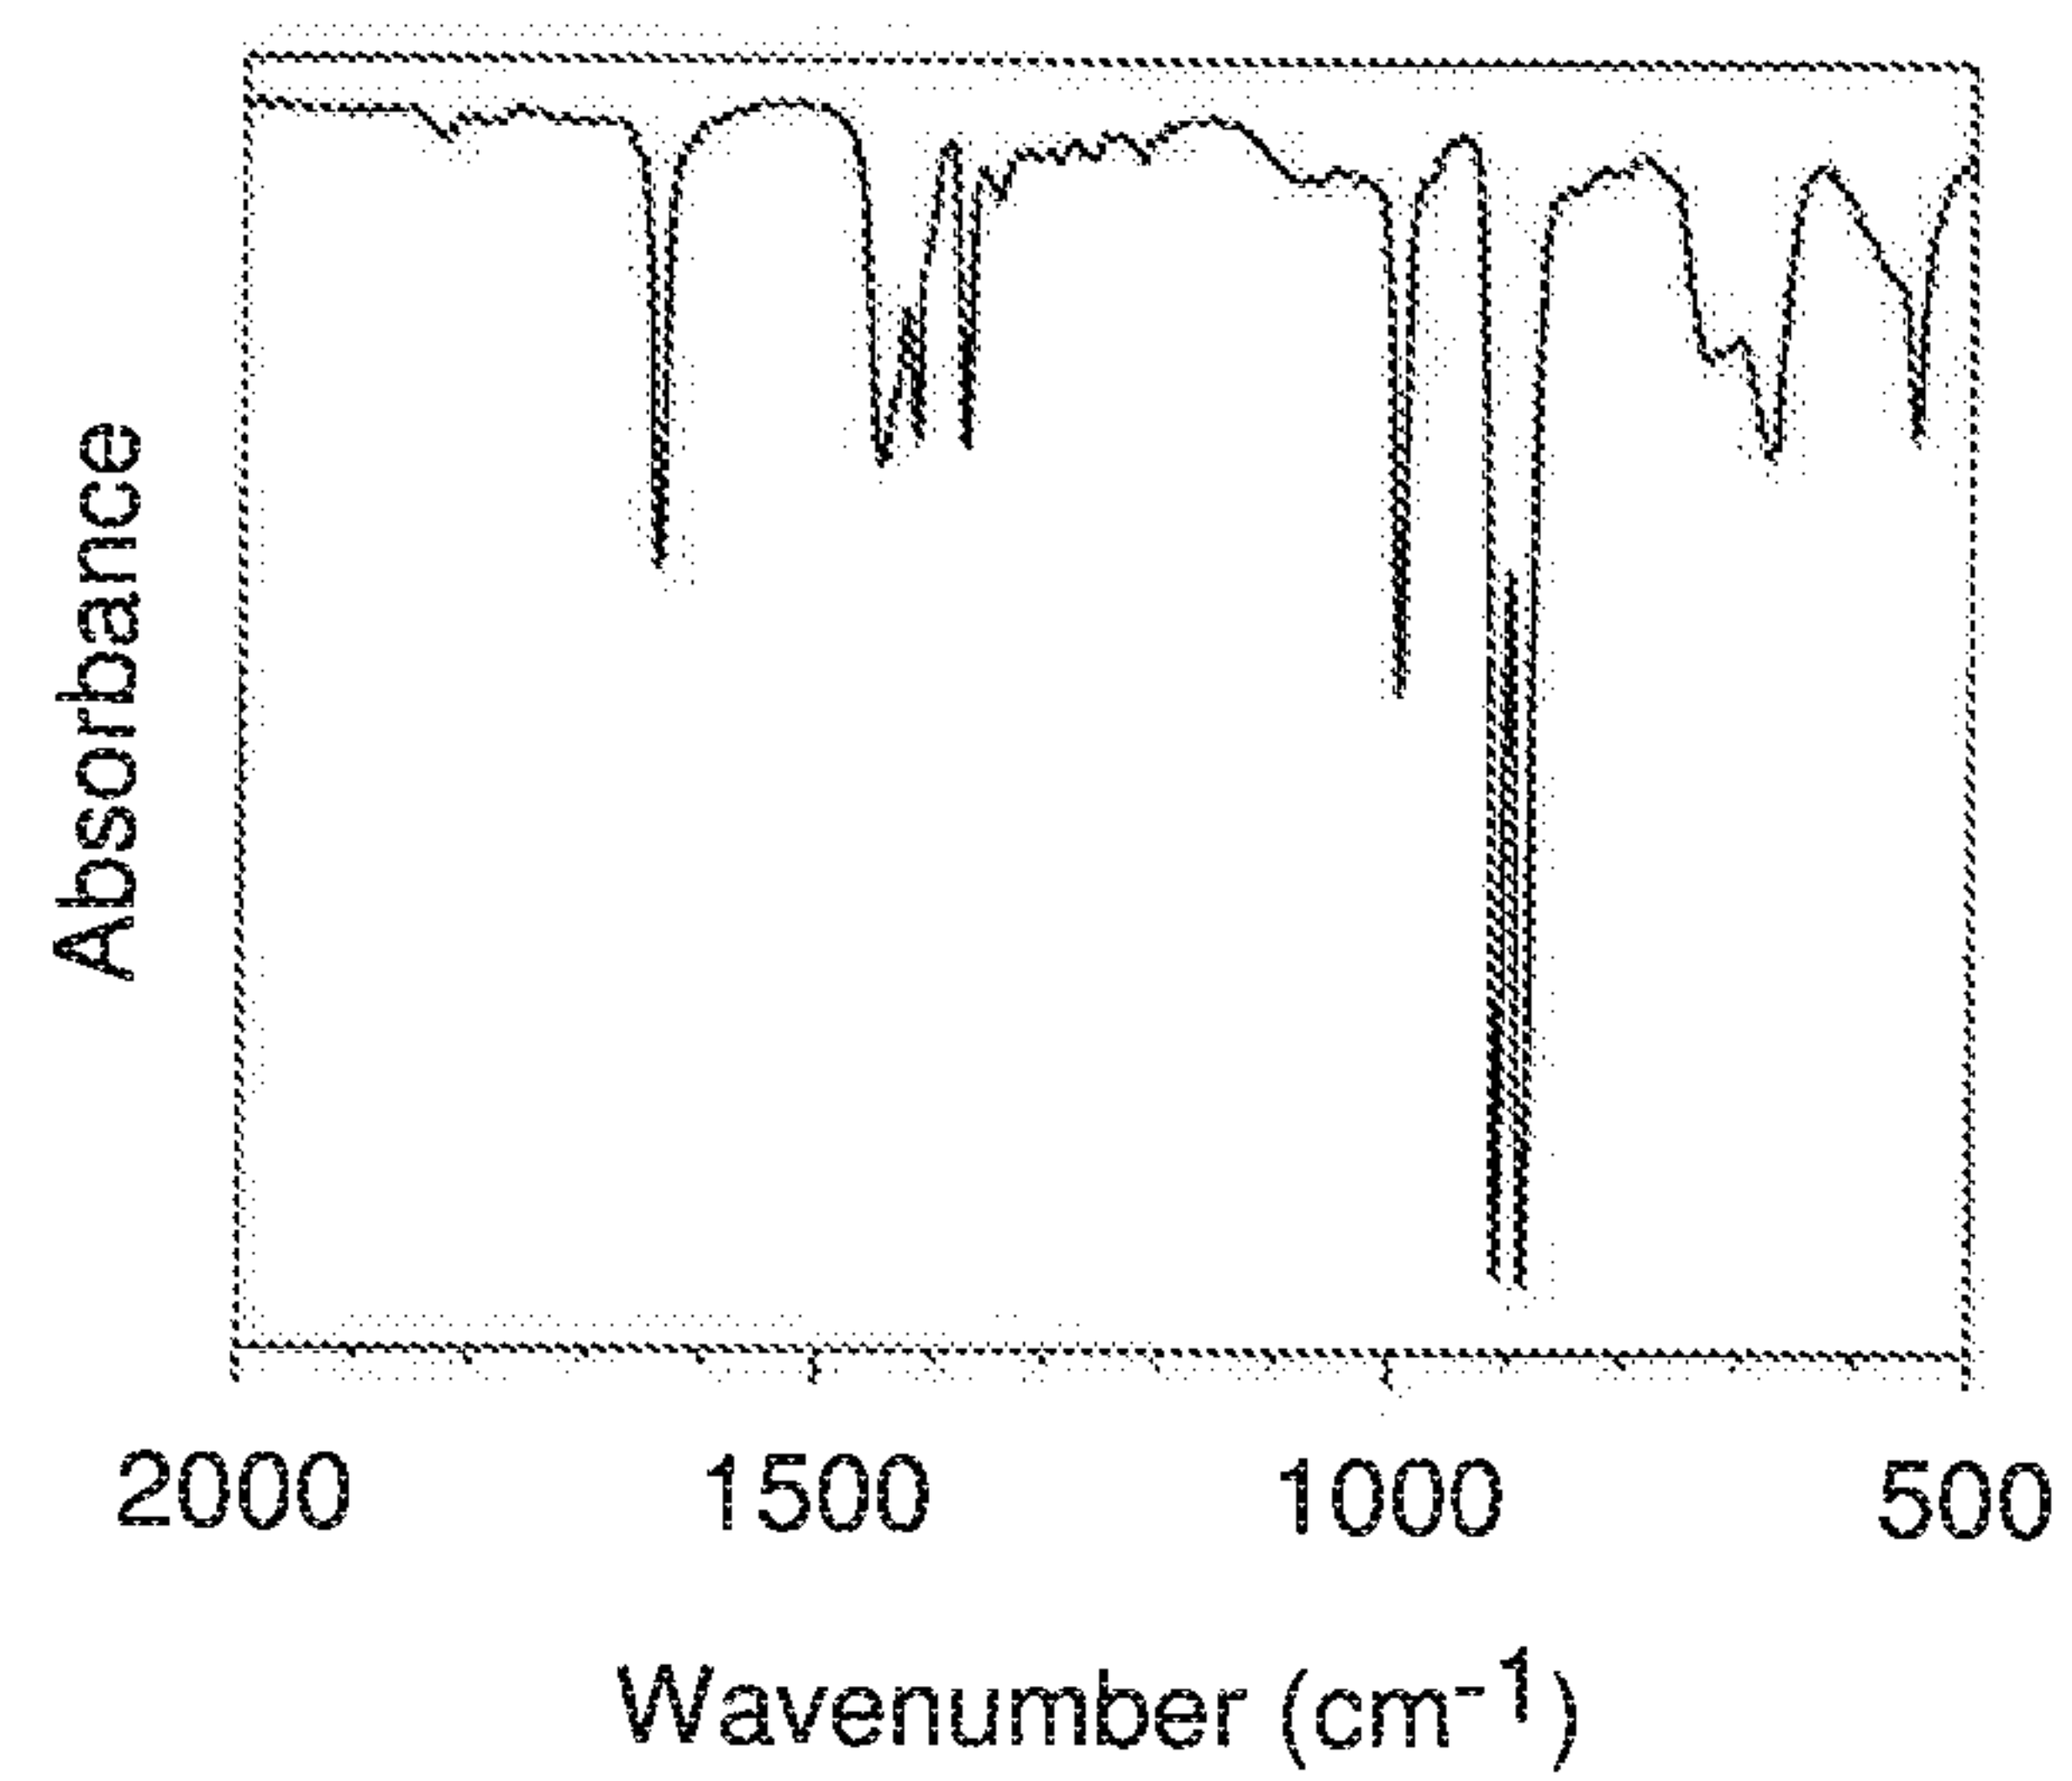


FIGURE 10

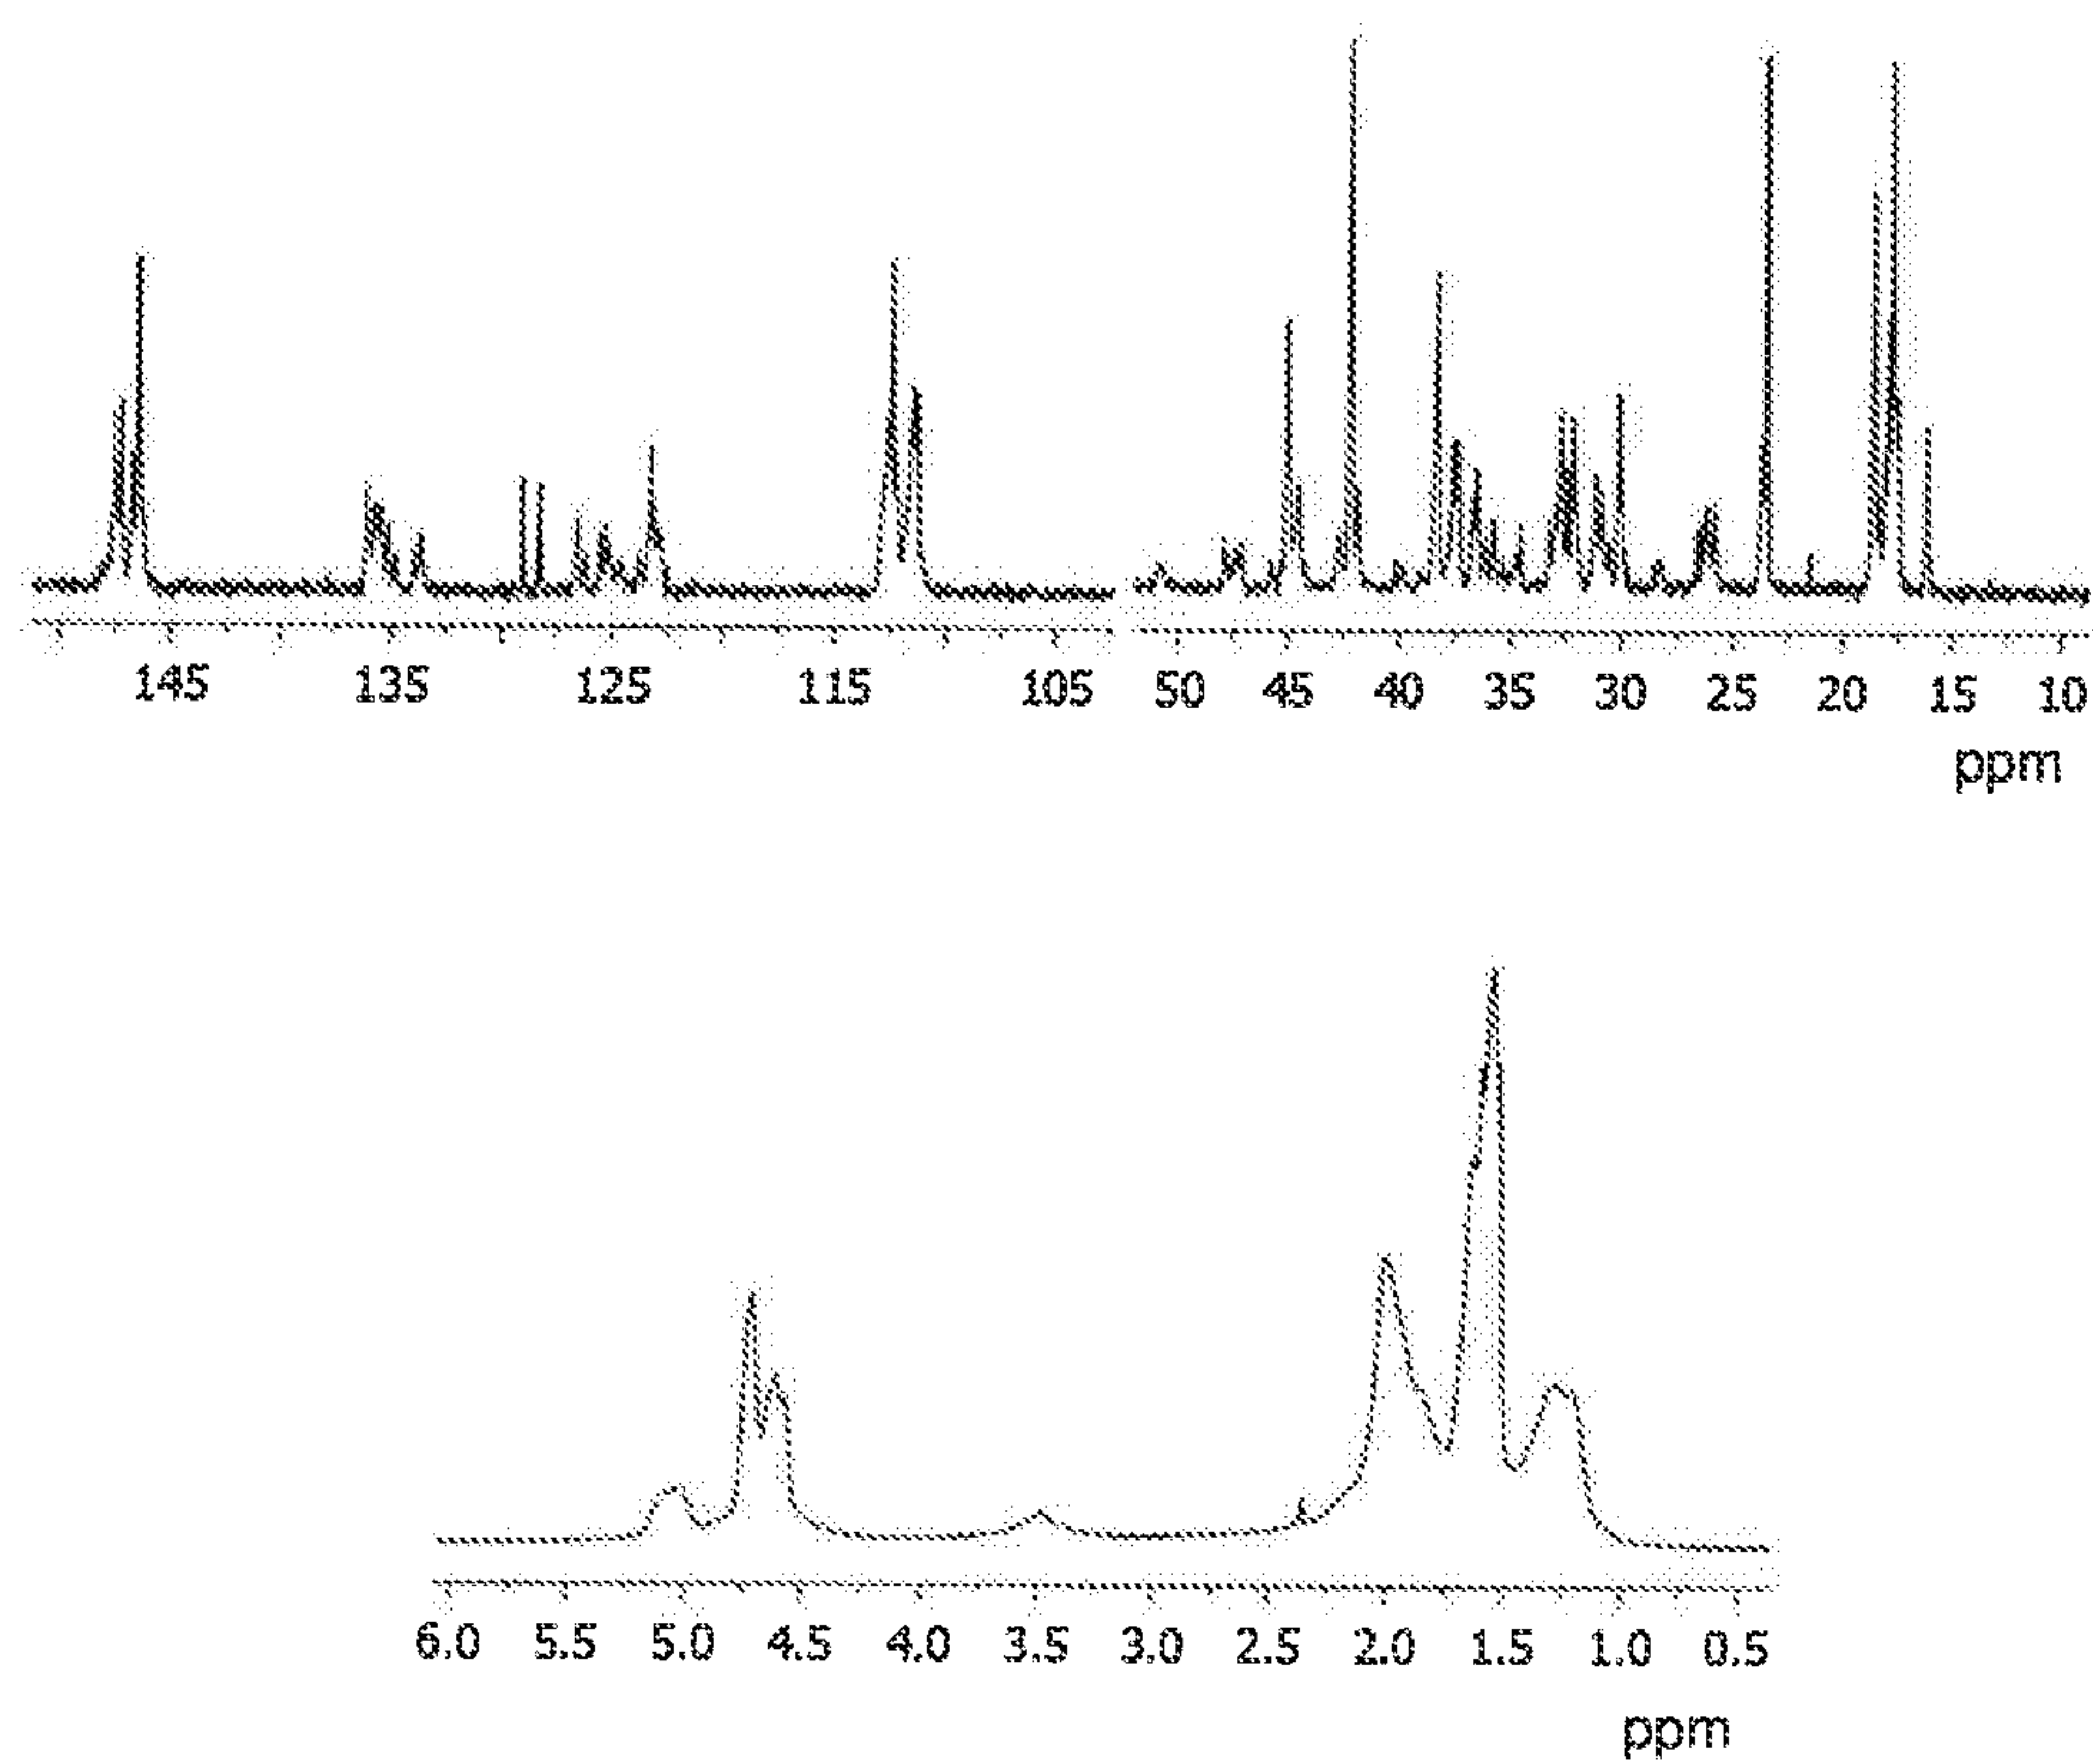


FIGURE 11

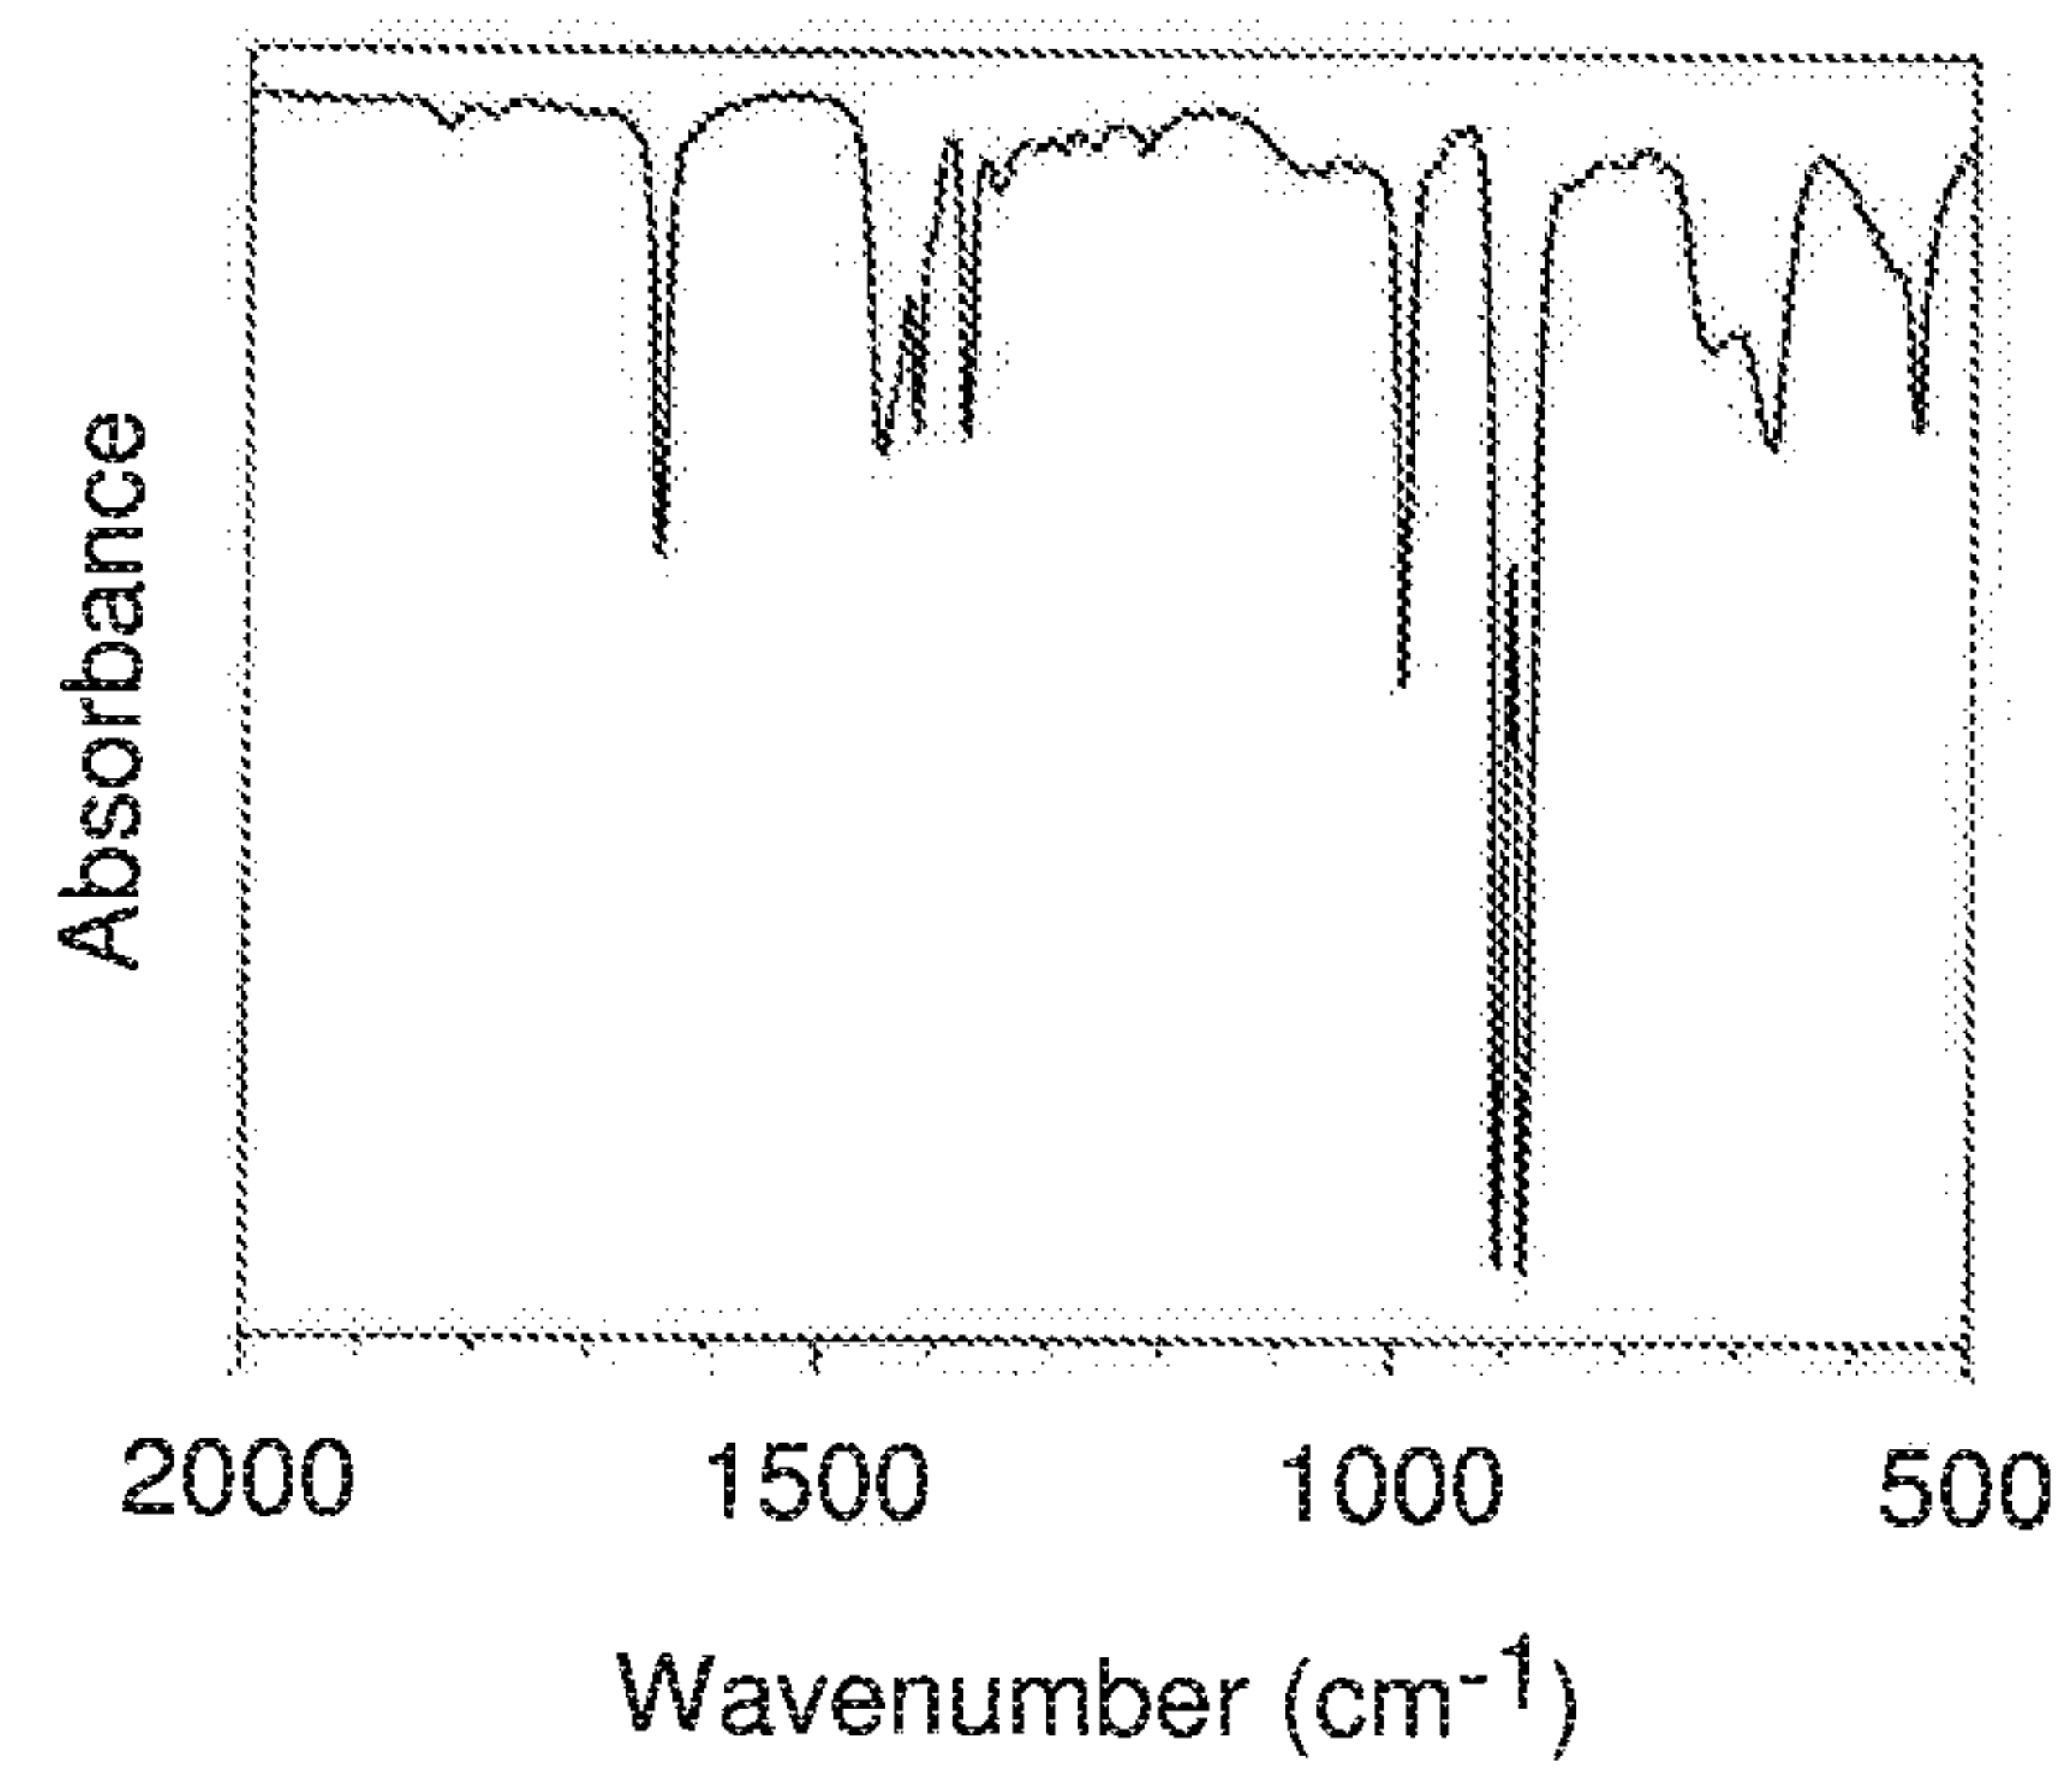


FIGURE 12

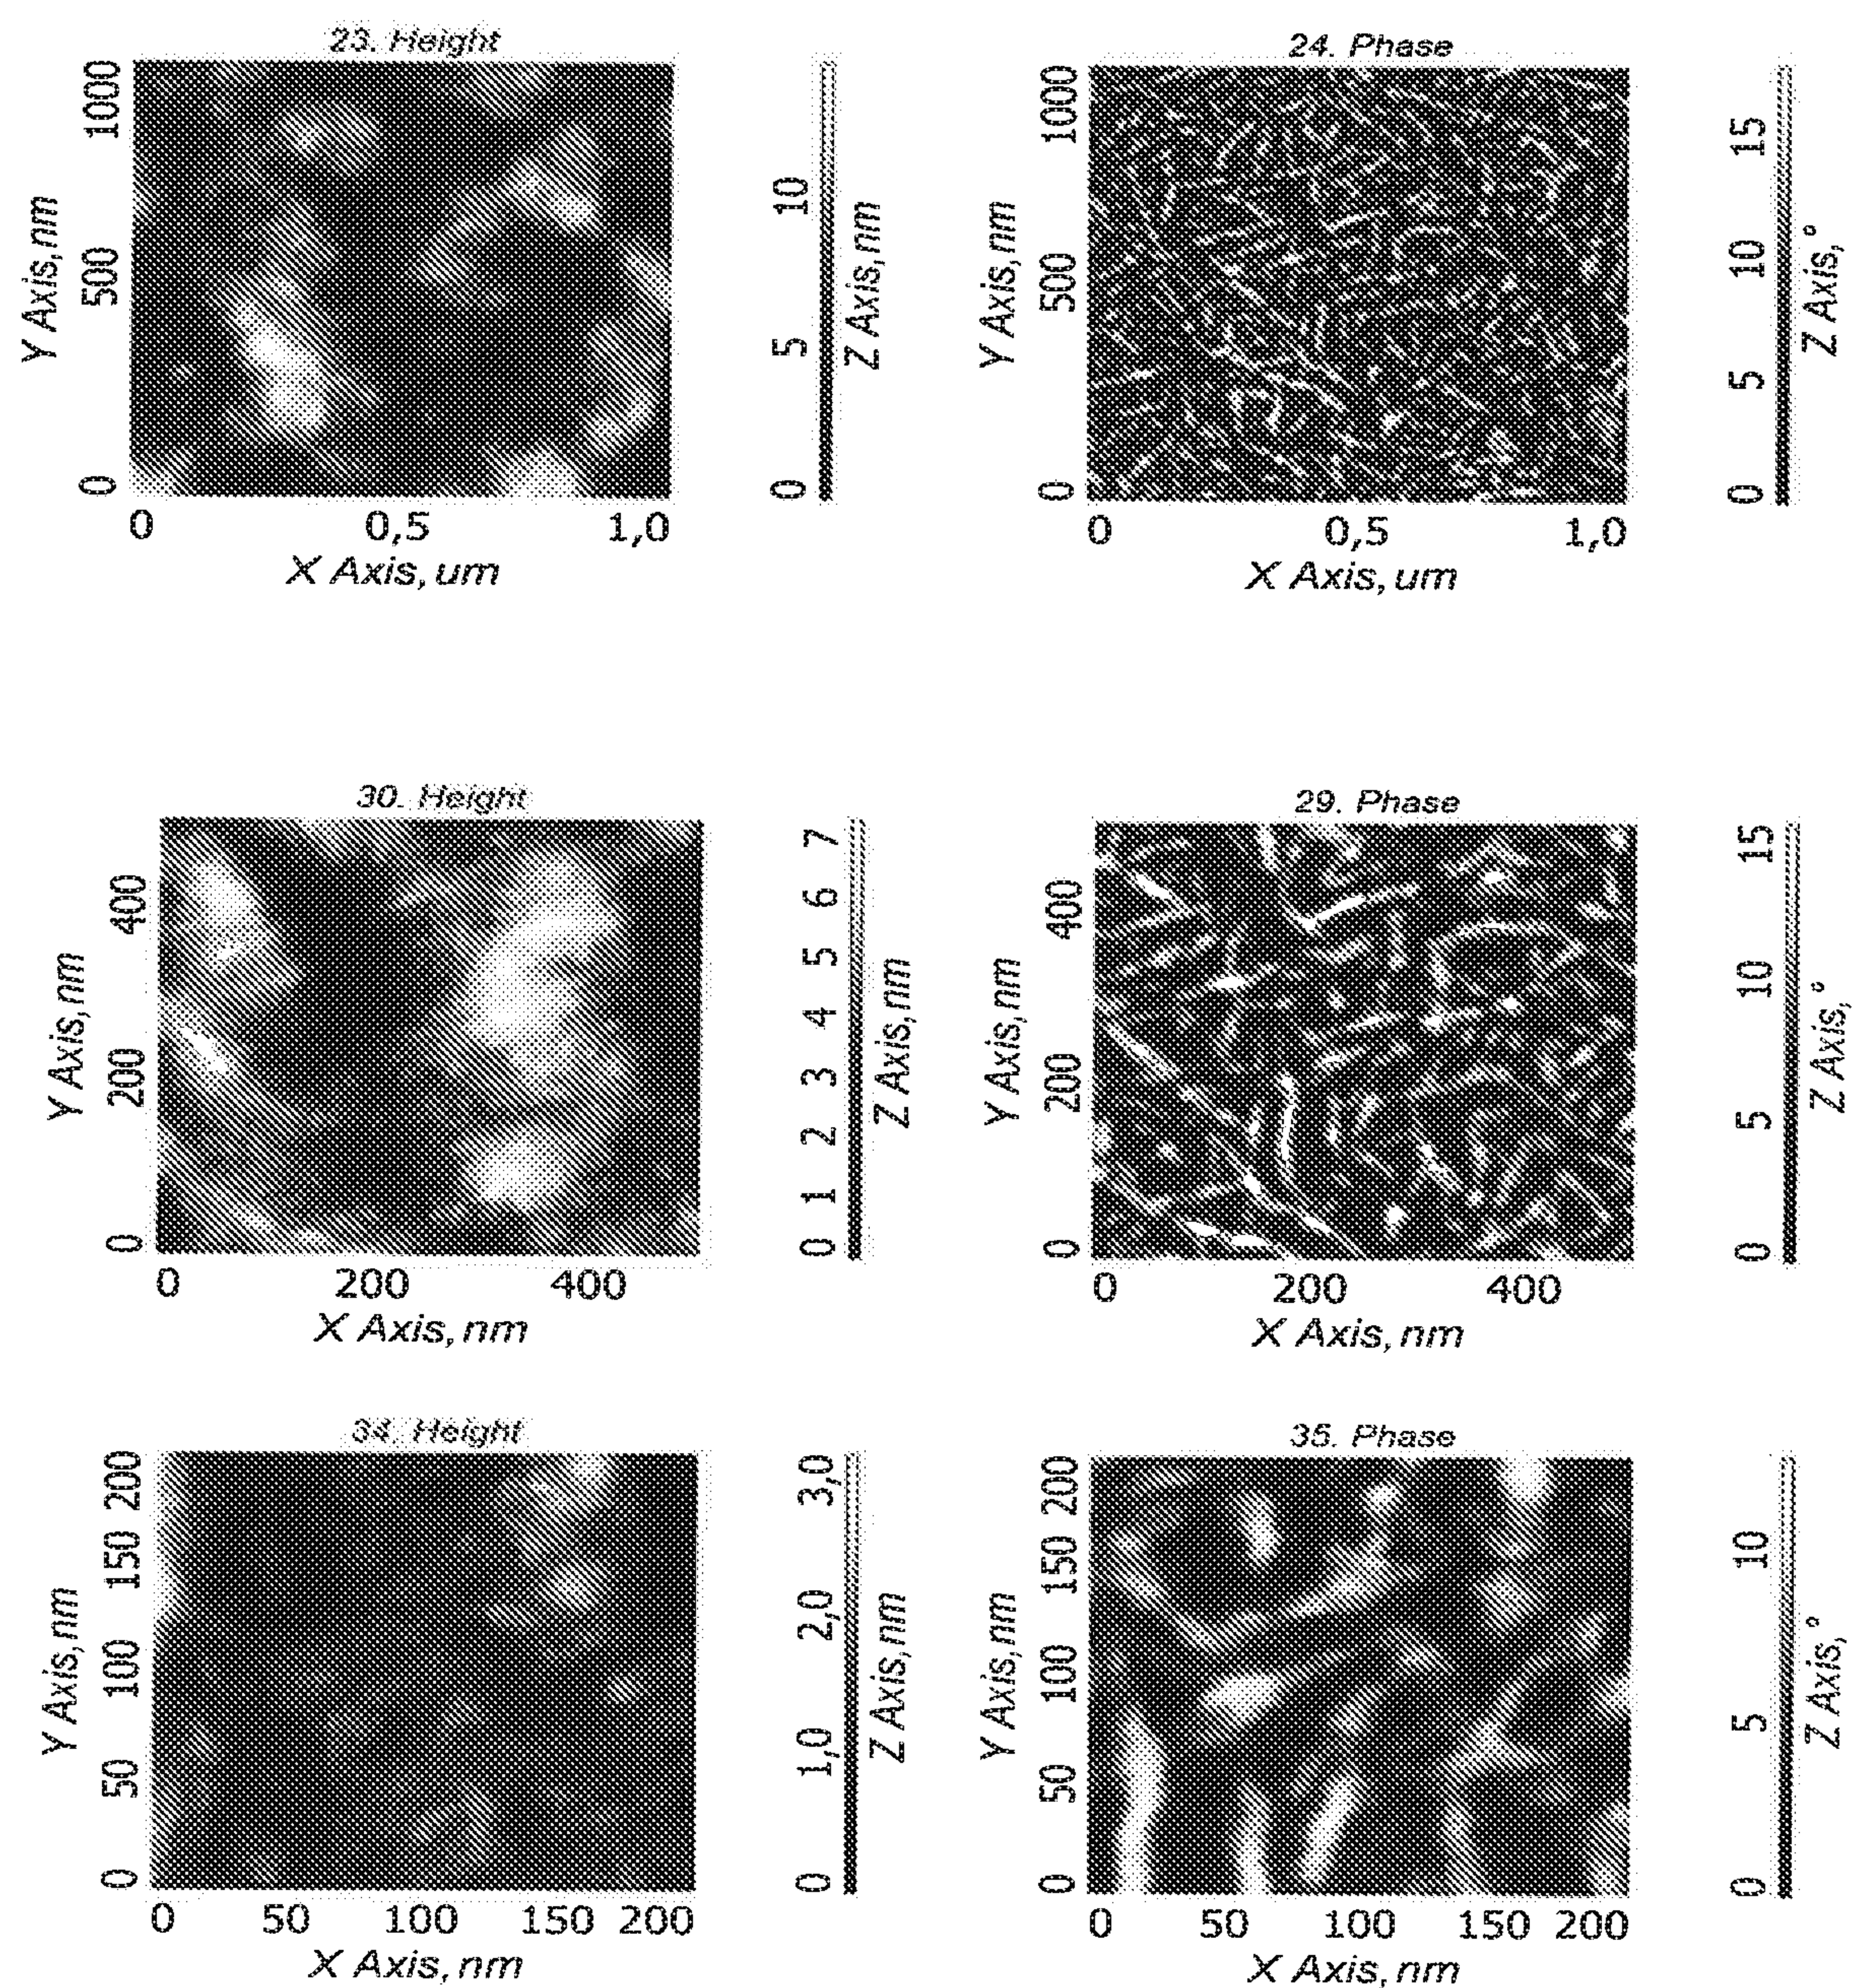


FIGURE 13

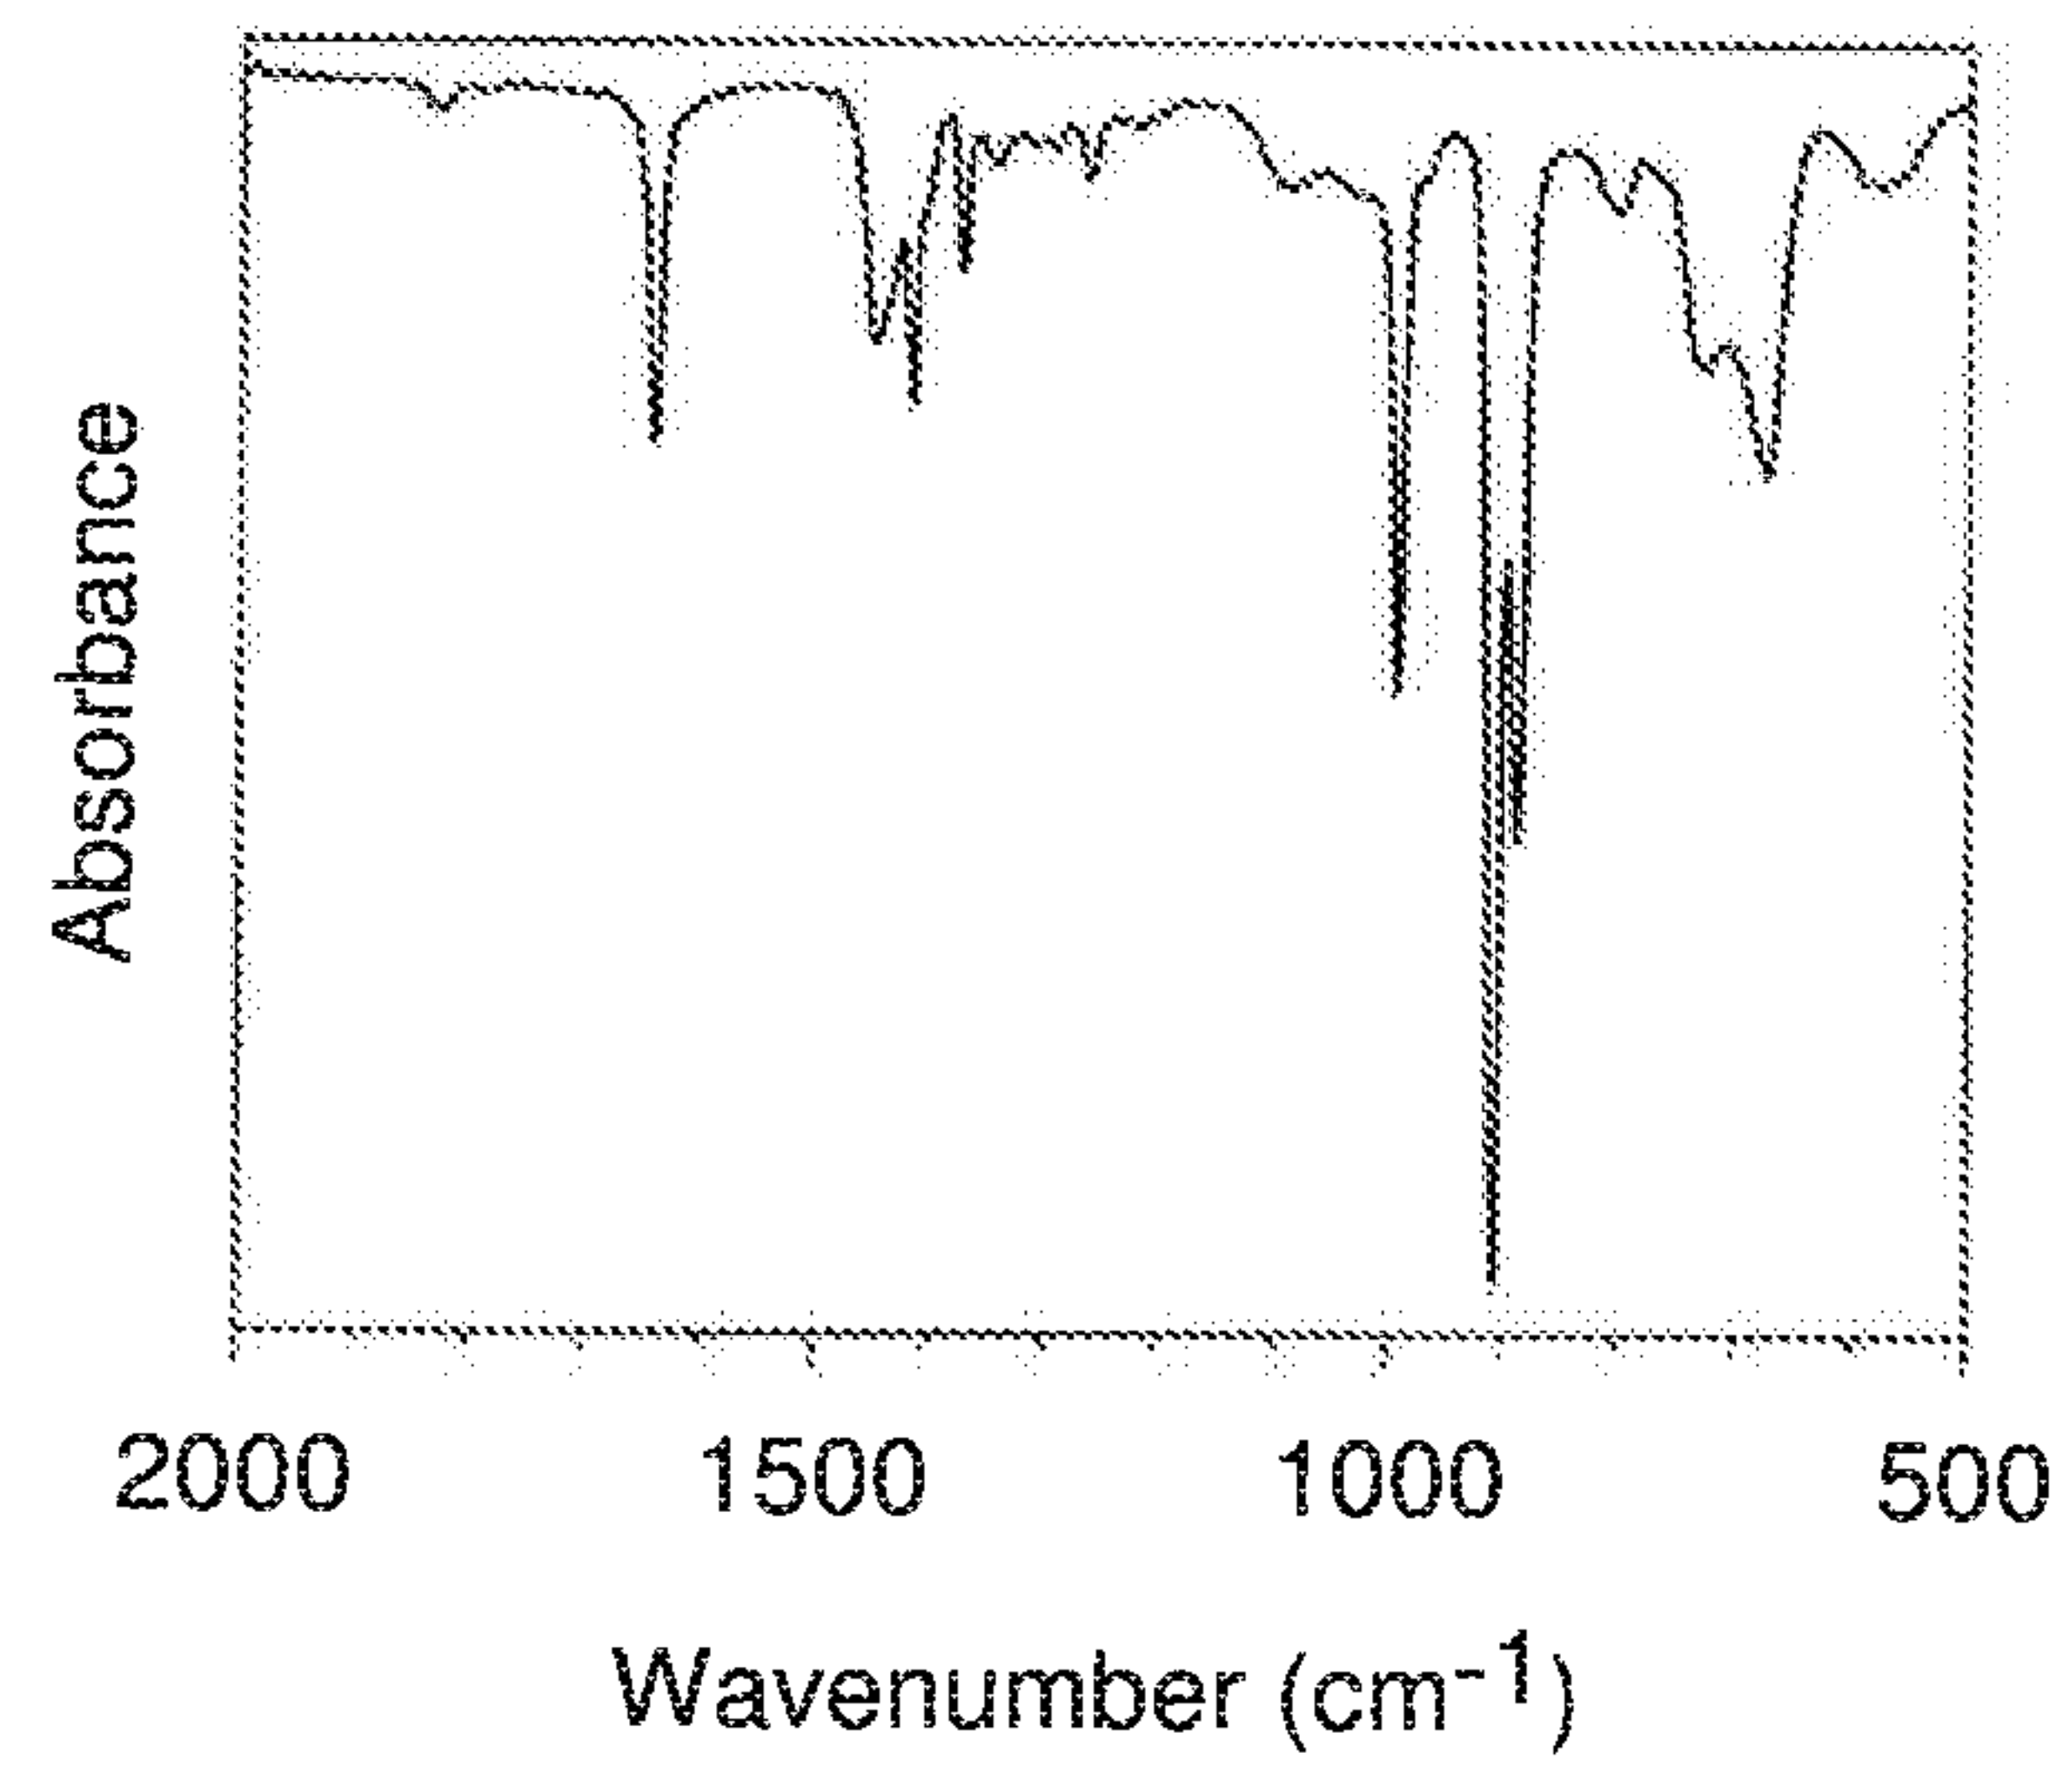


FIGURE 14

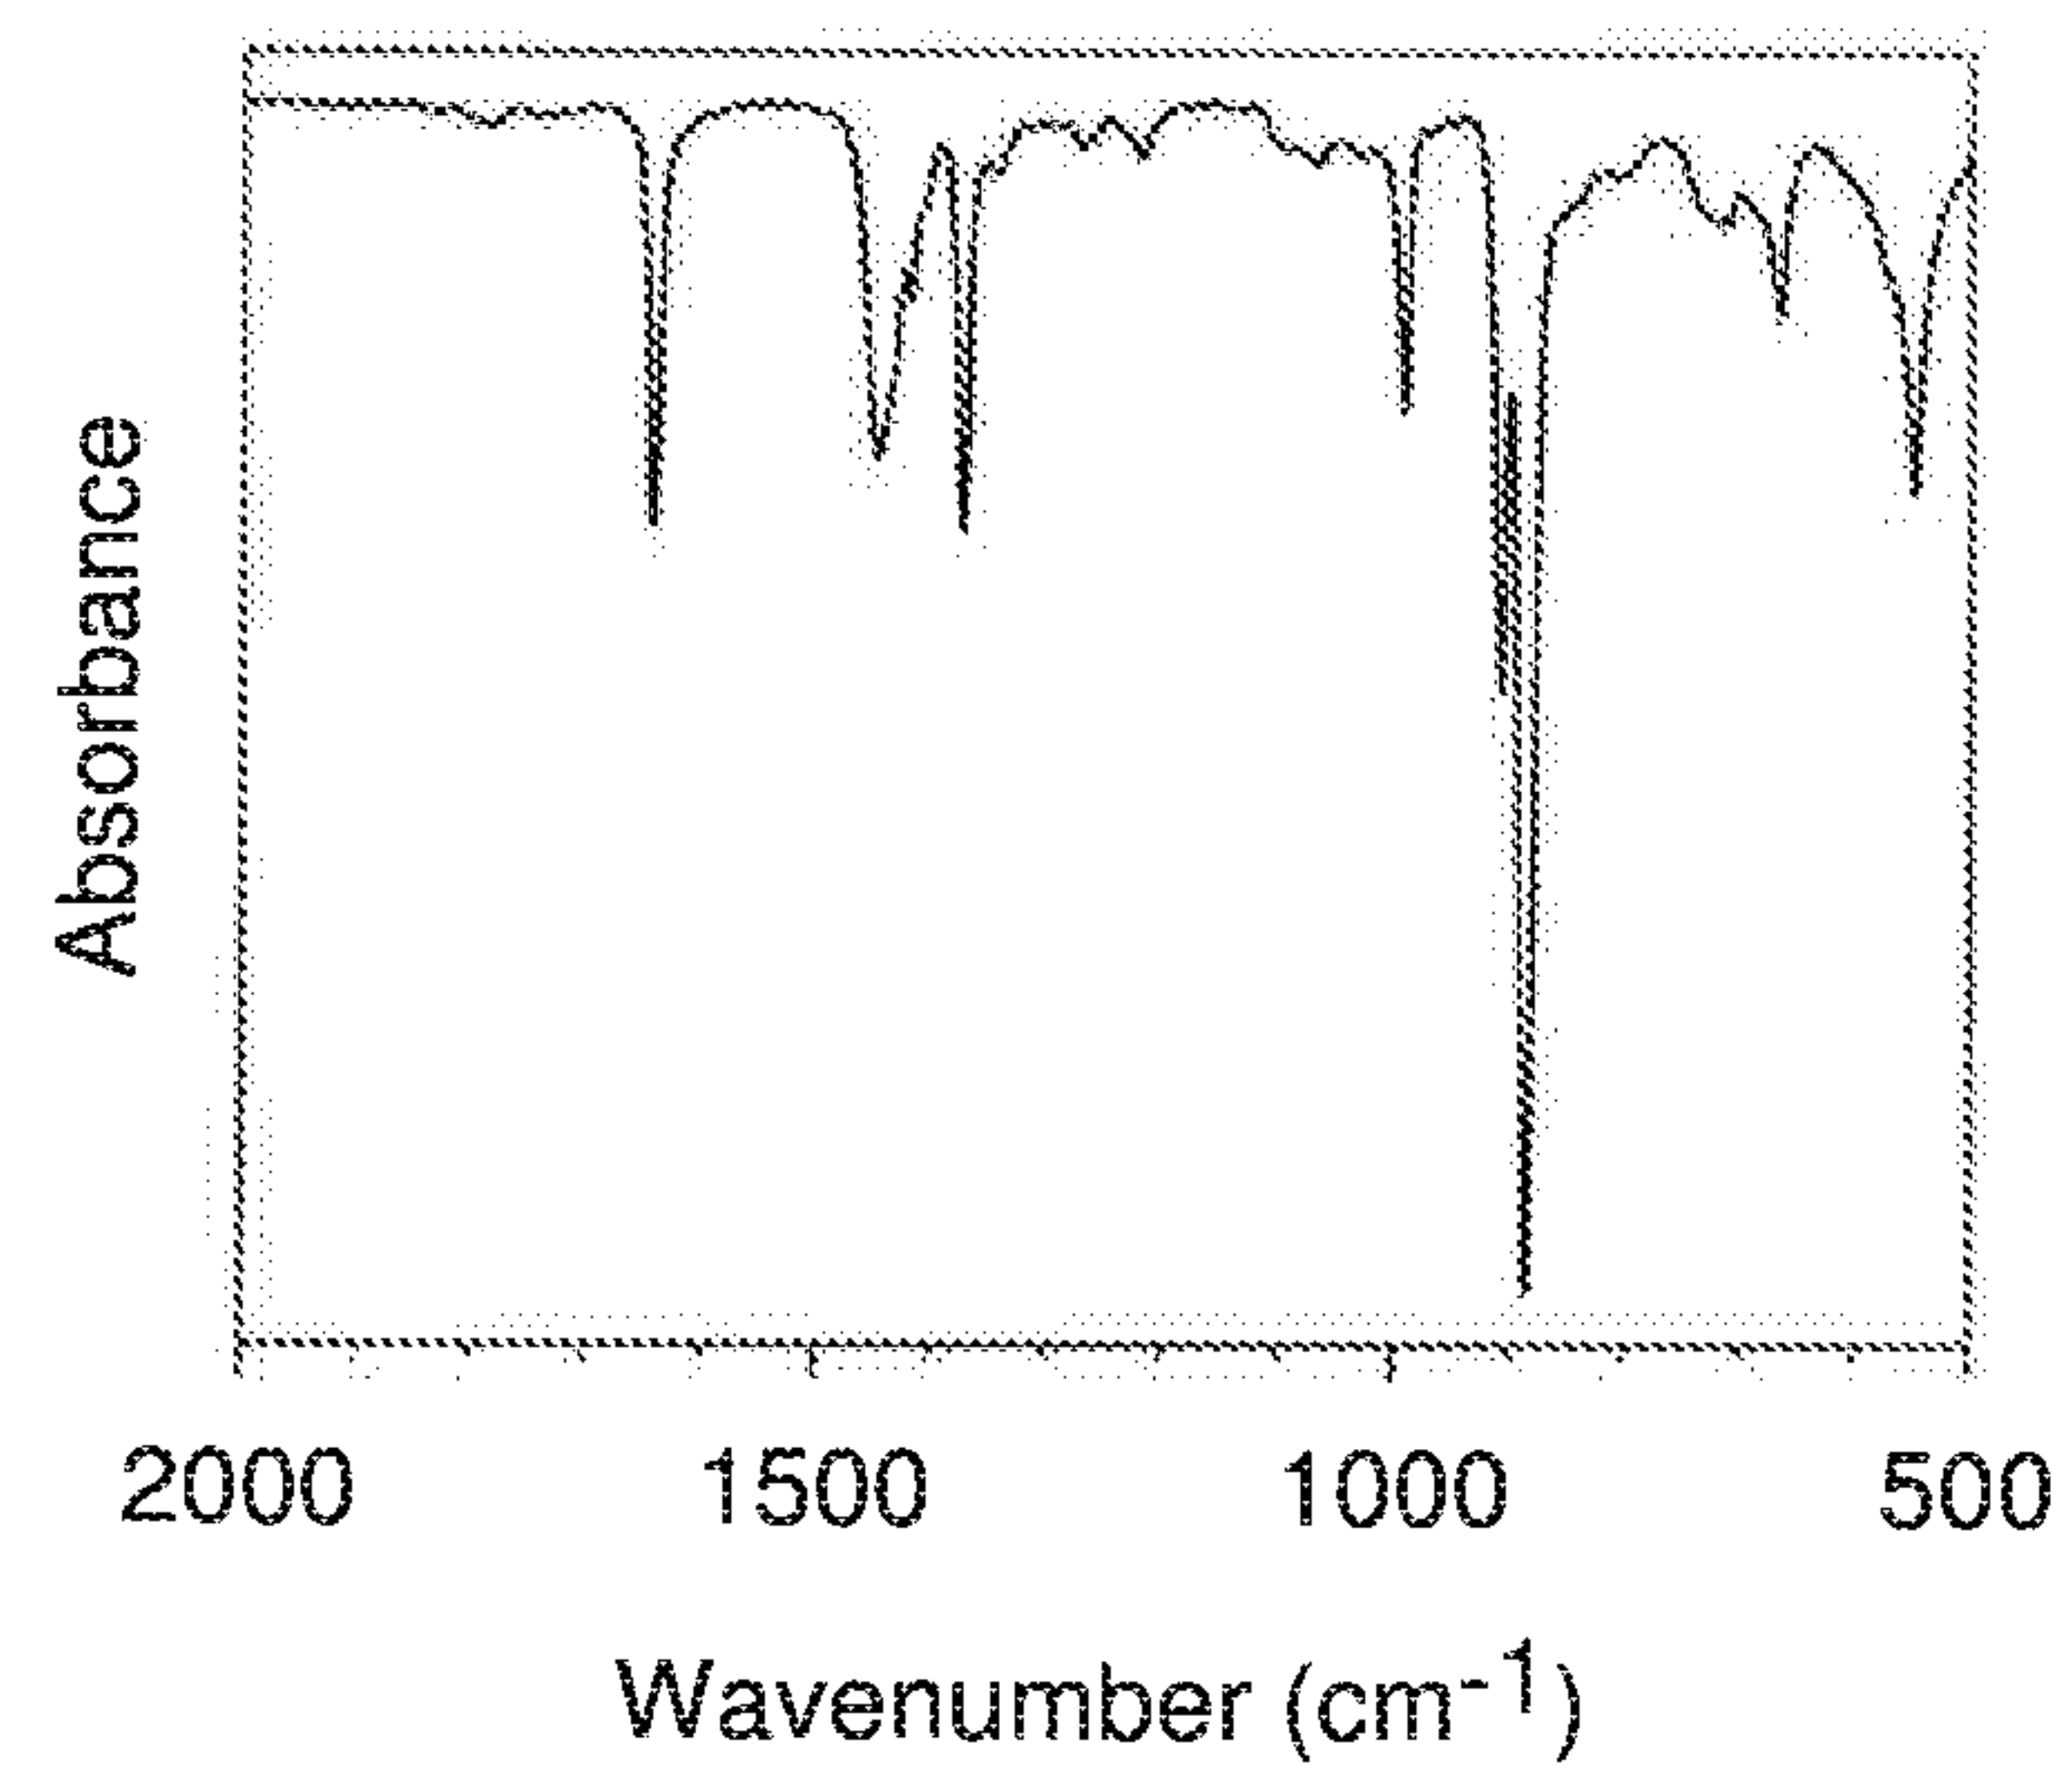


FIGURE 15

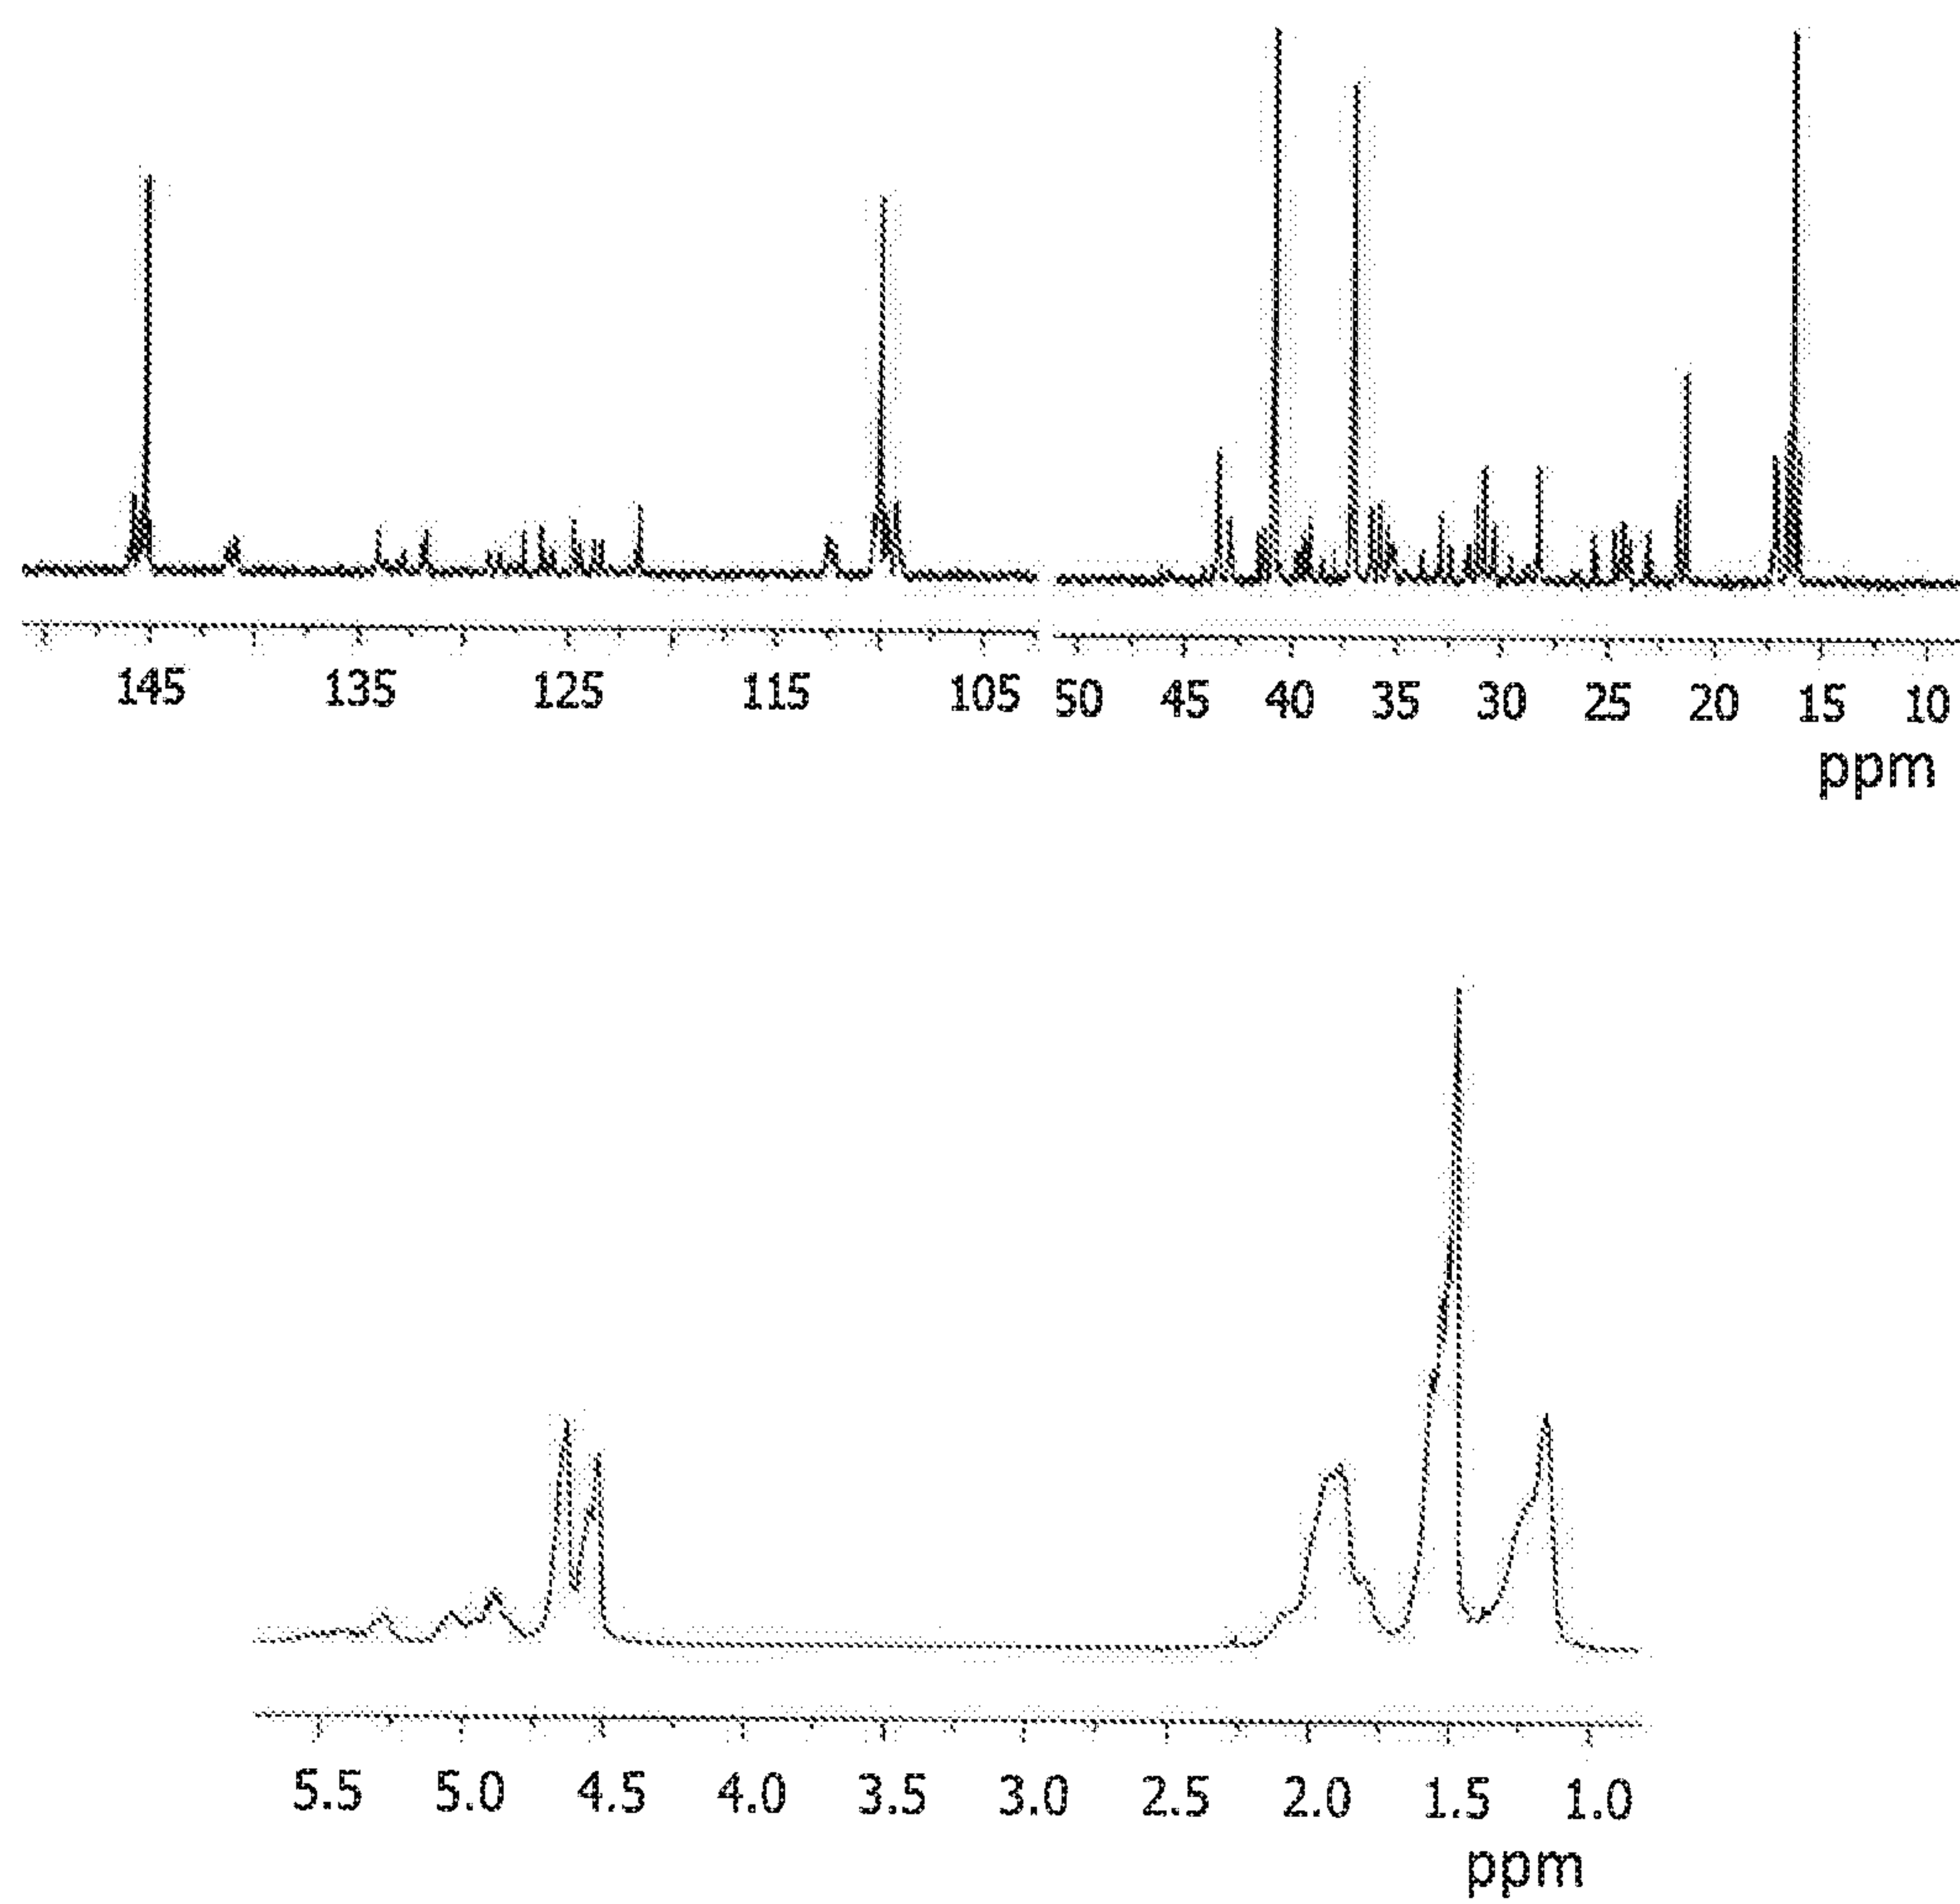


FIGURE 16

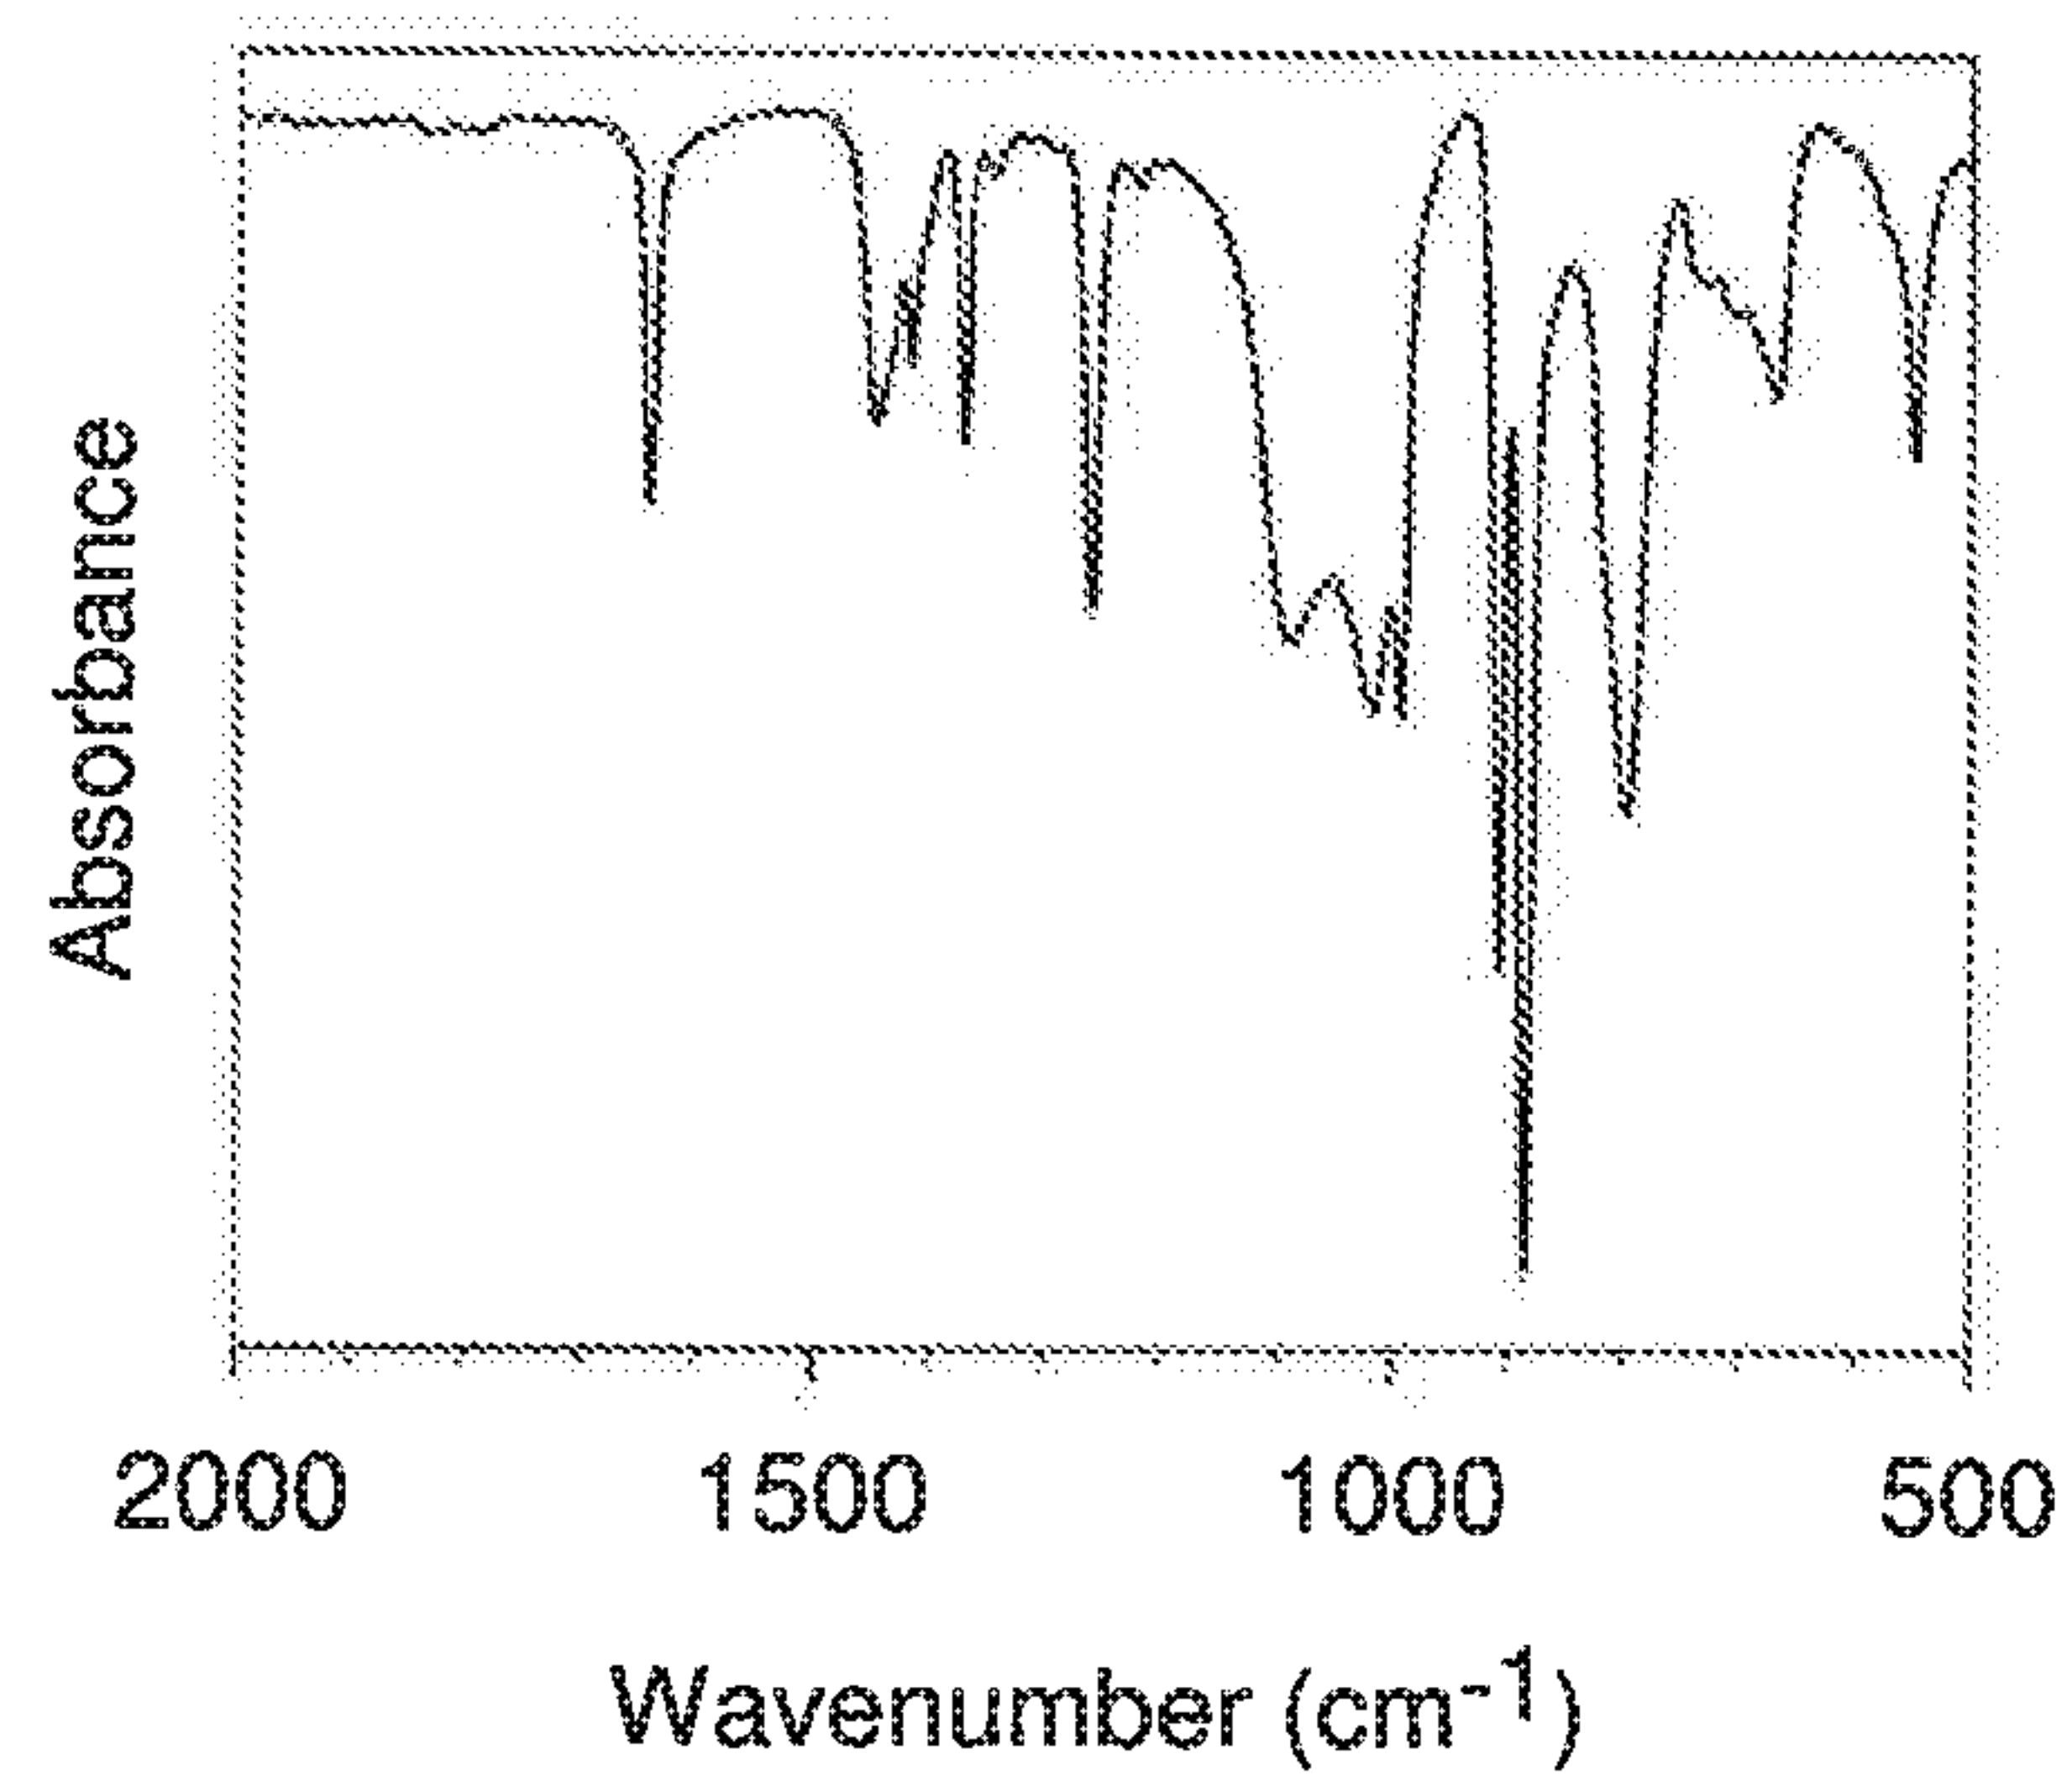


FIGURE 17

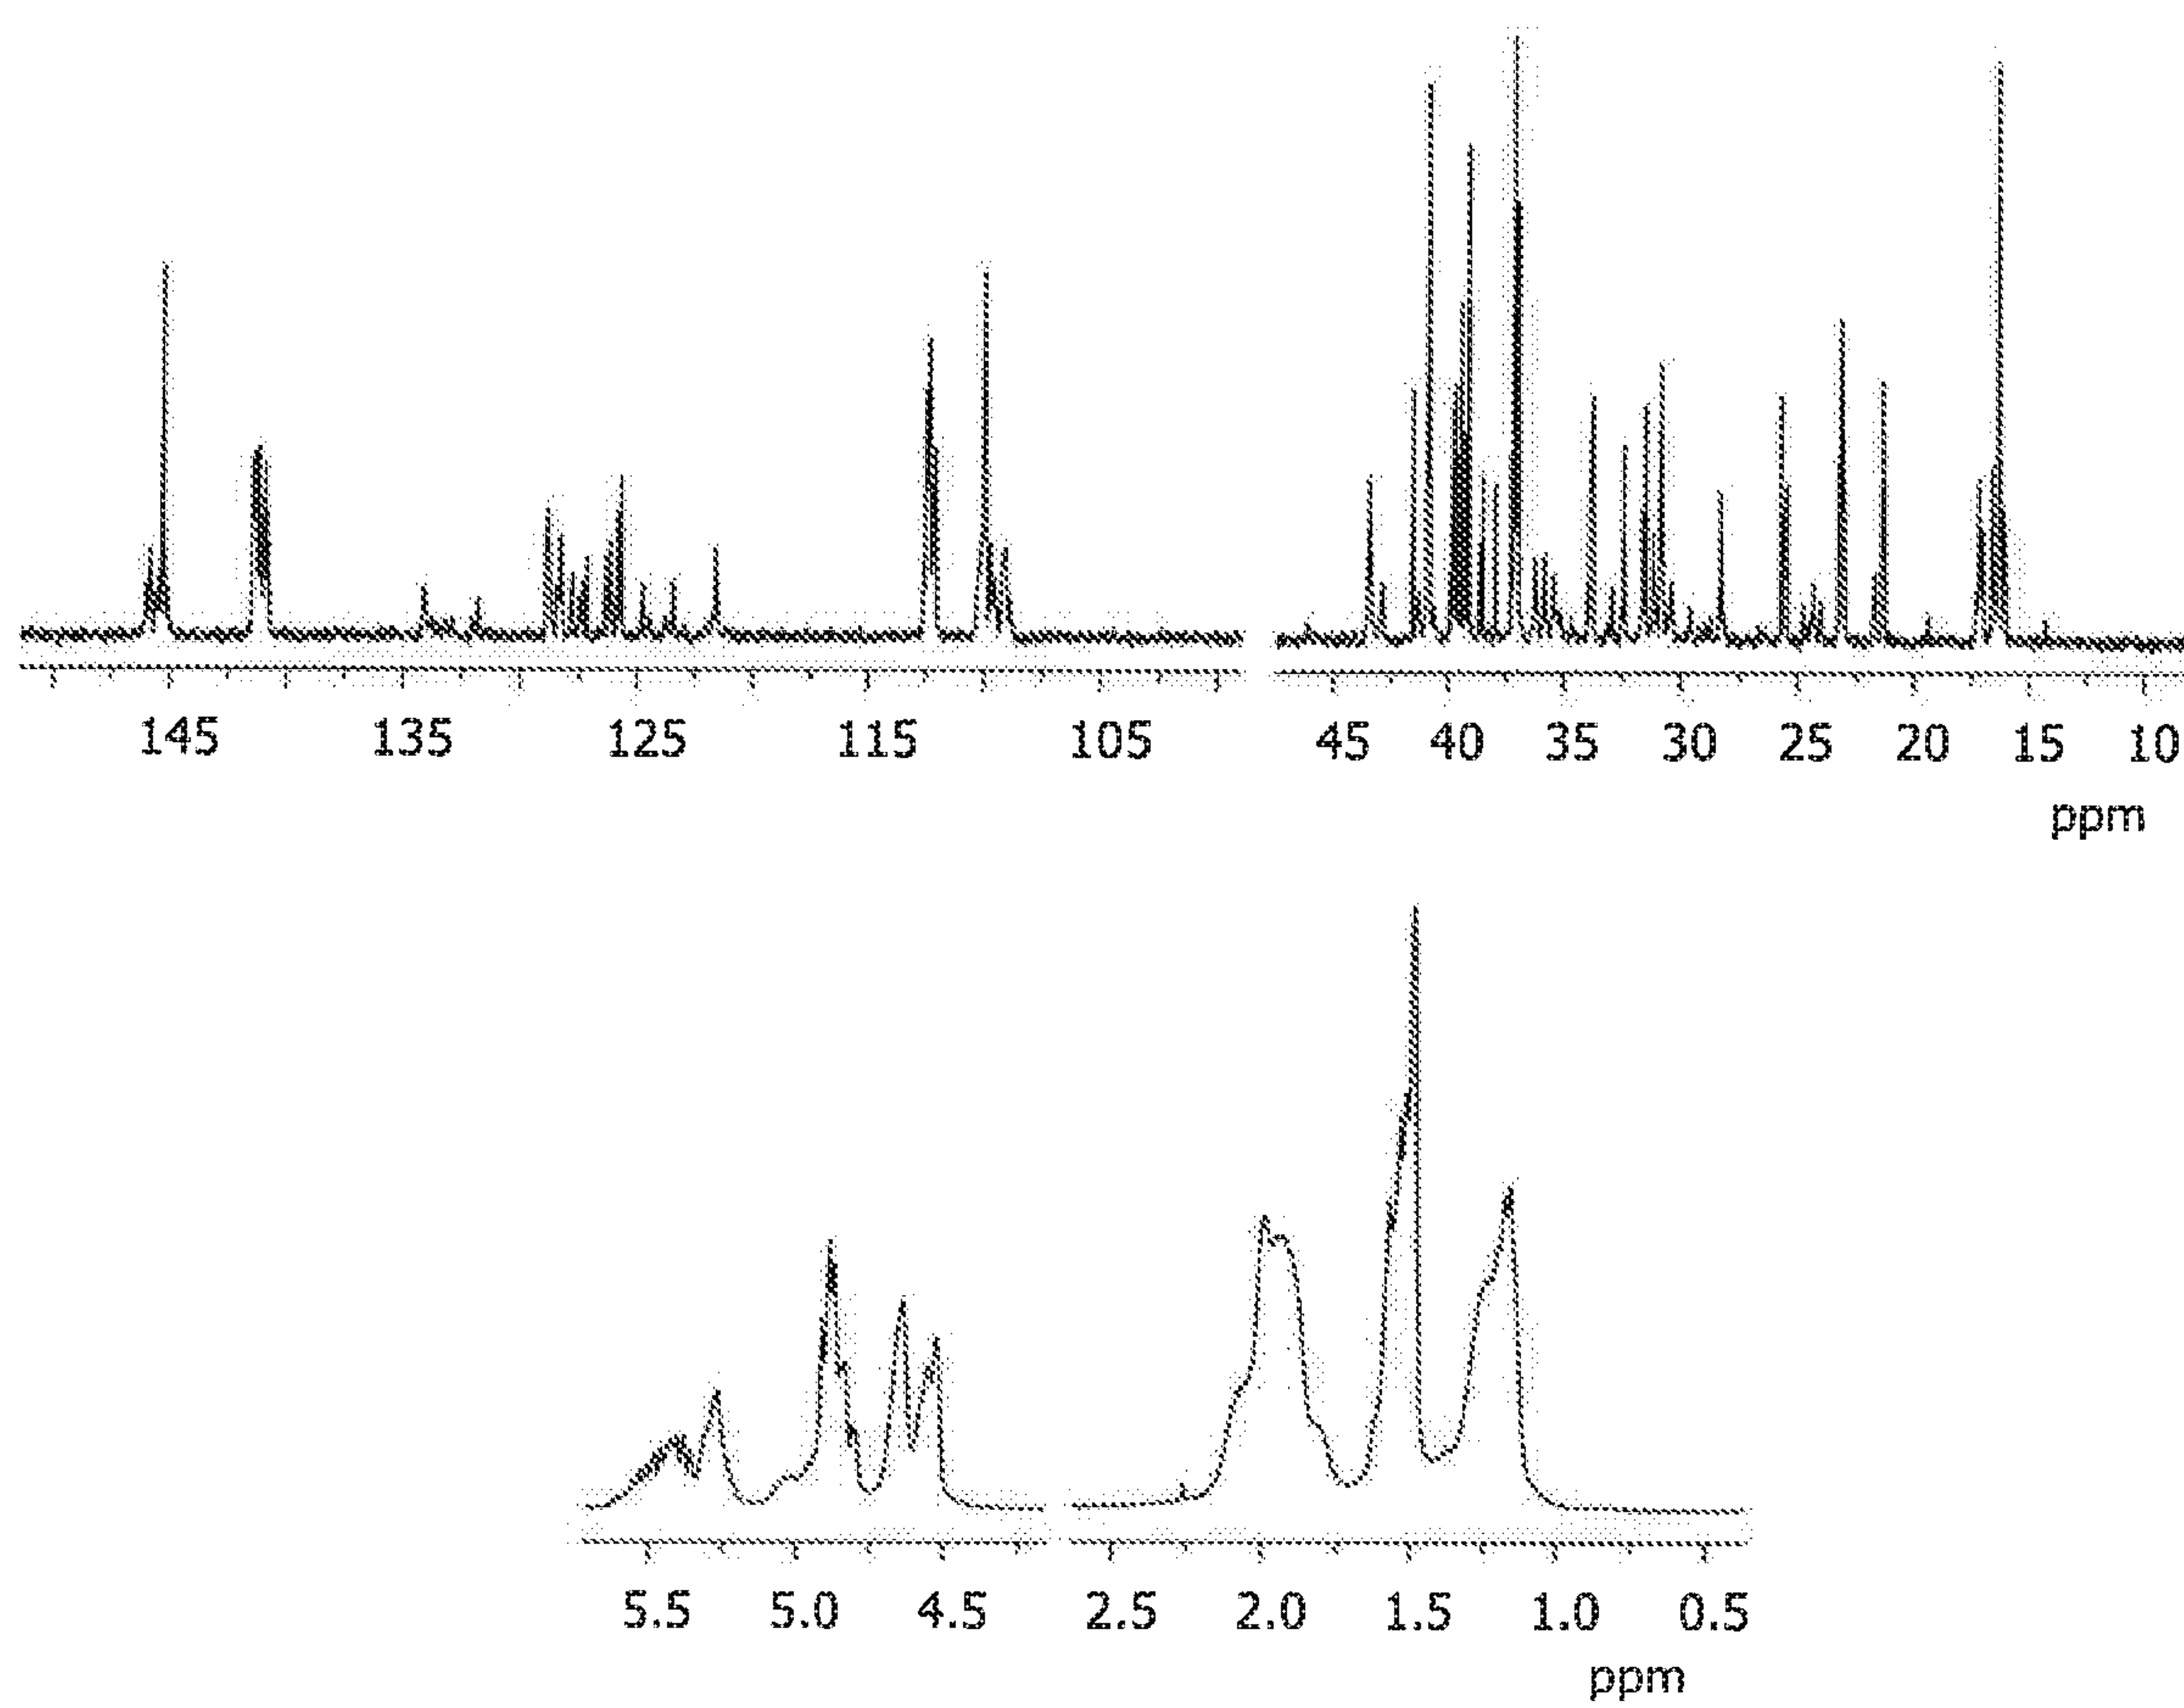


FIGURE 18

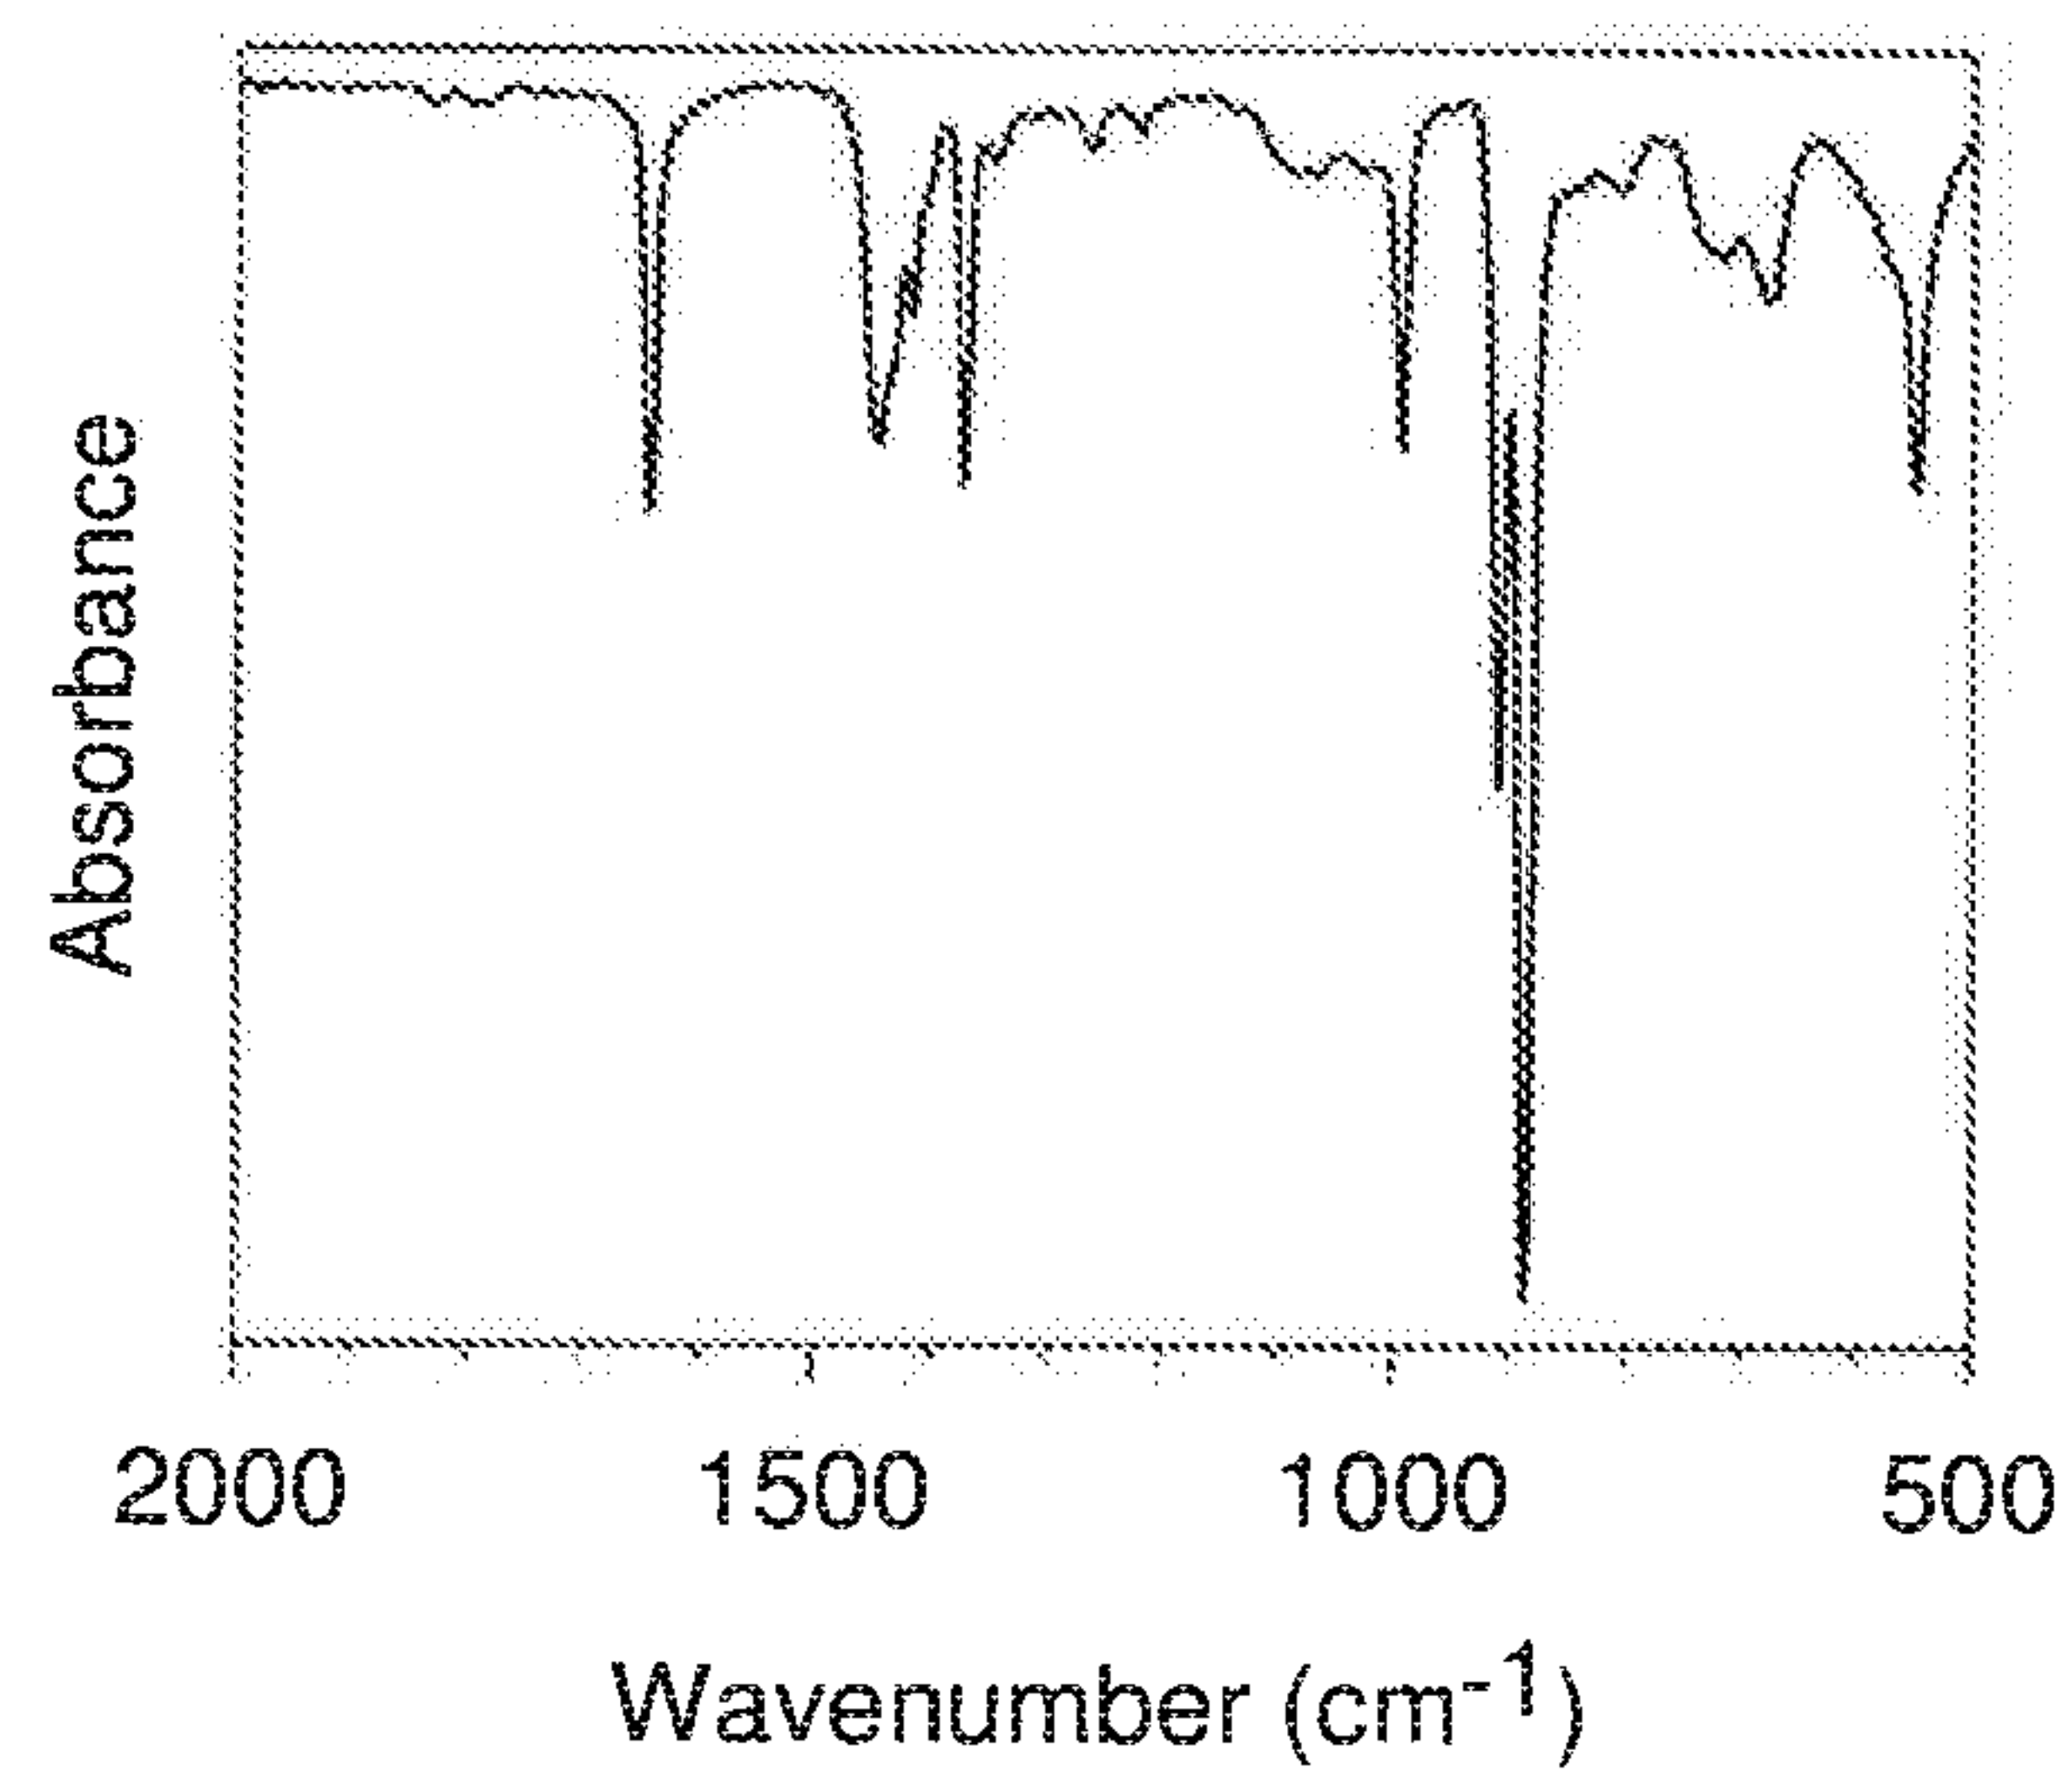


FIGURE 19

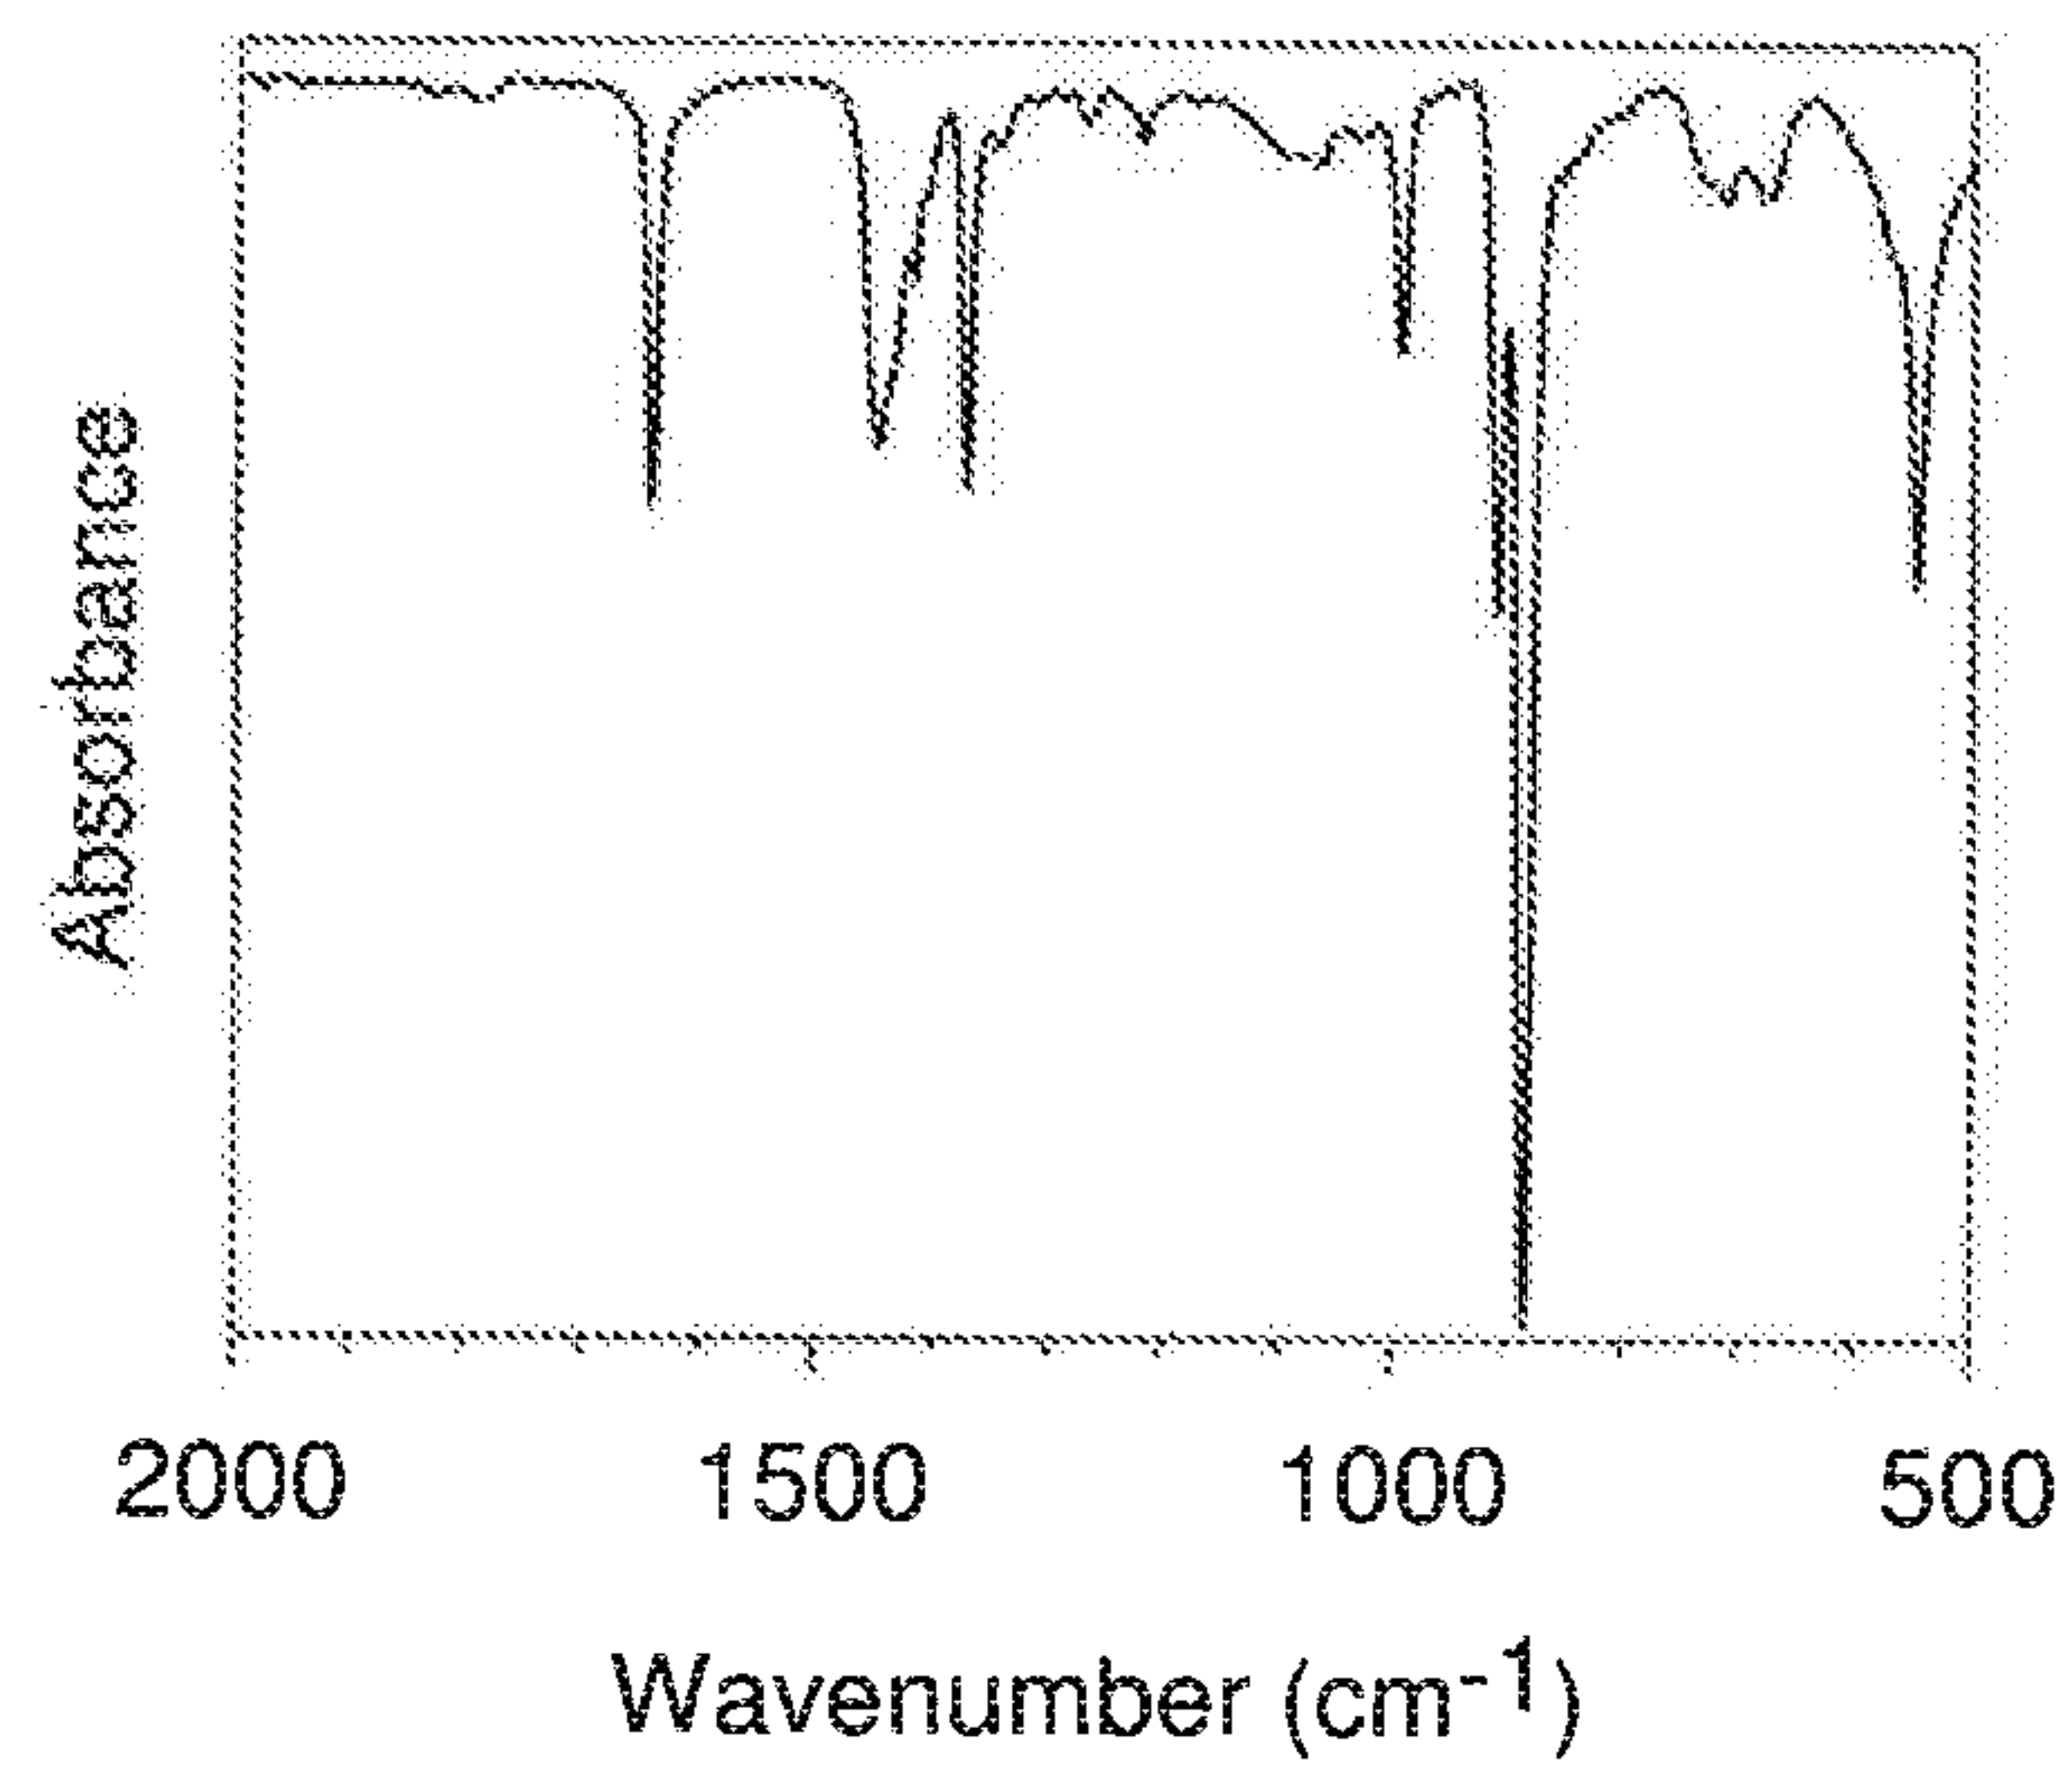


FIGURE 20

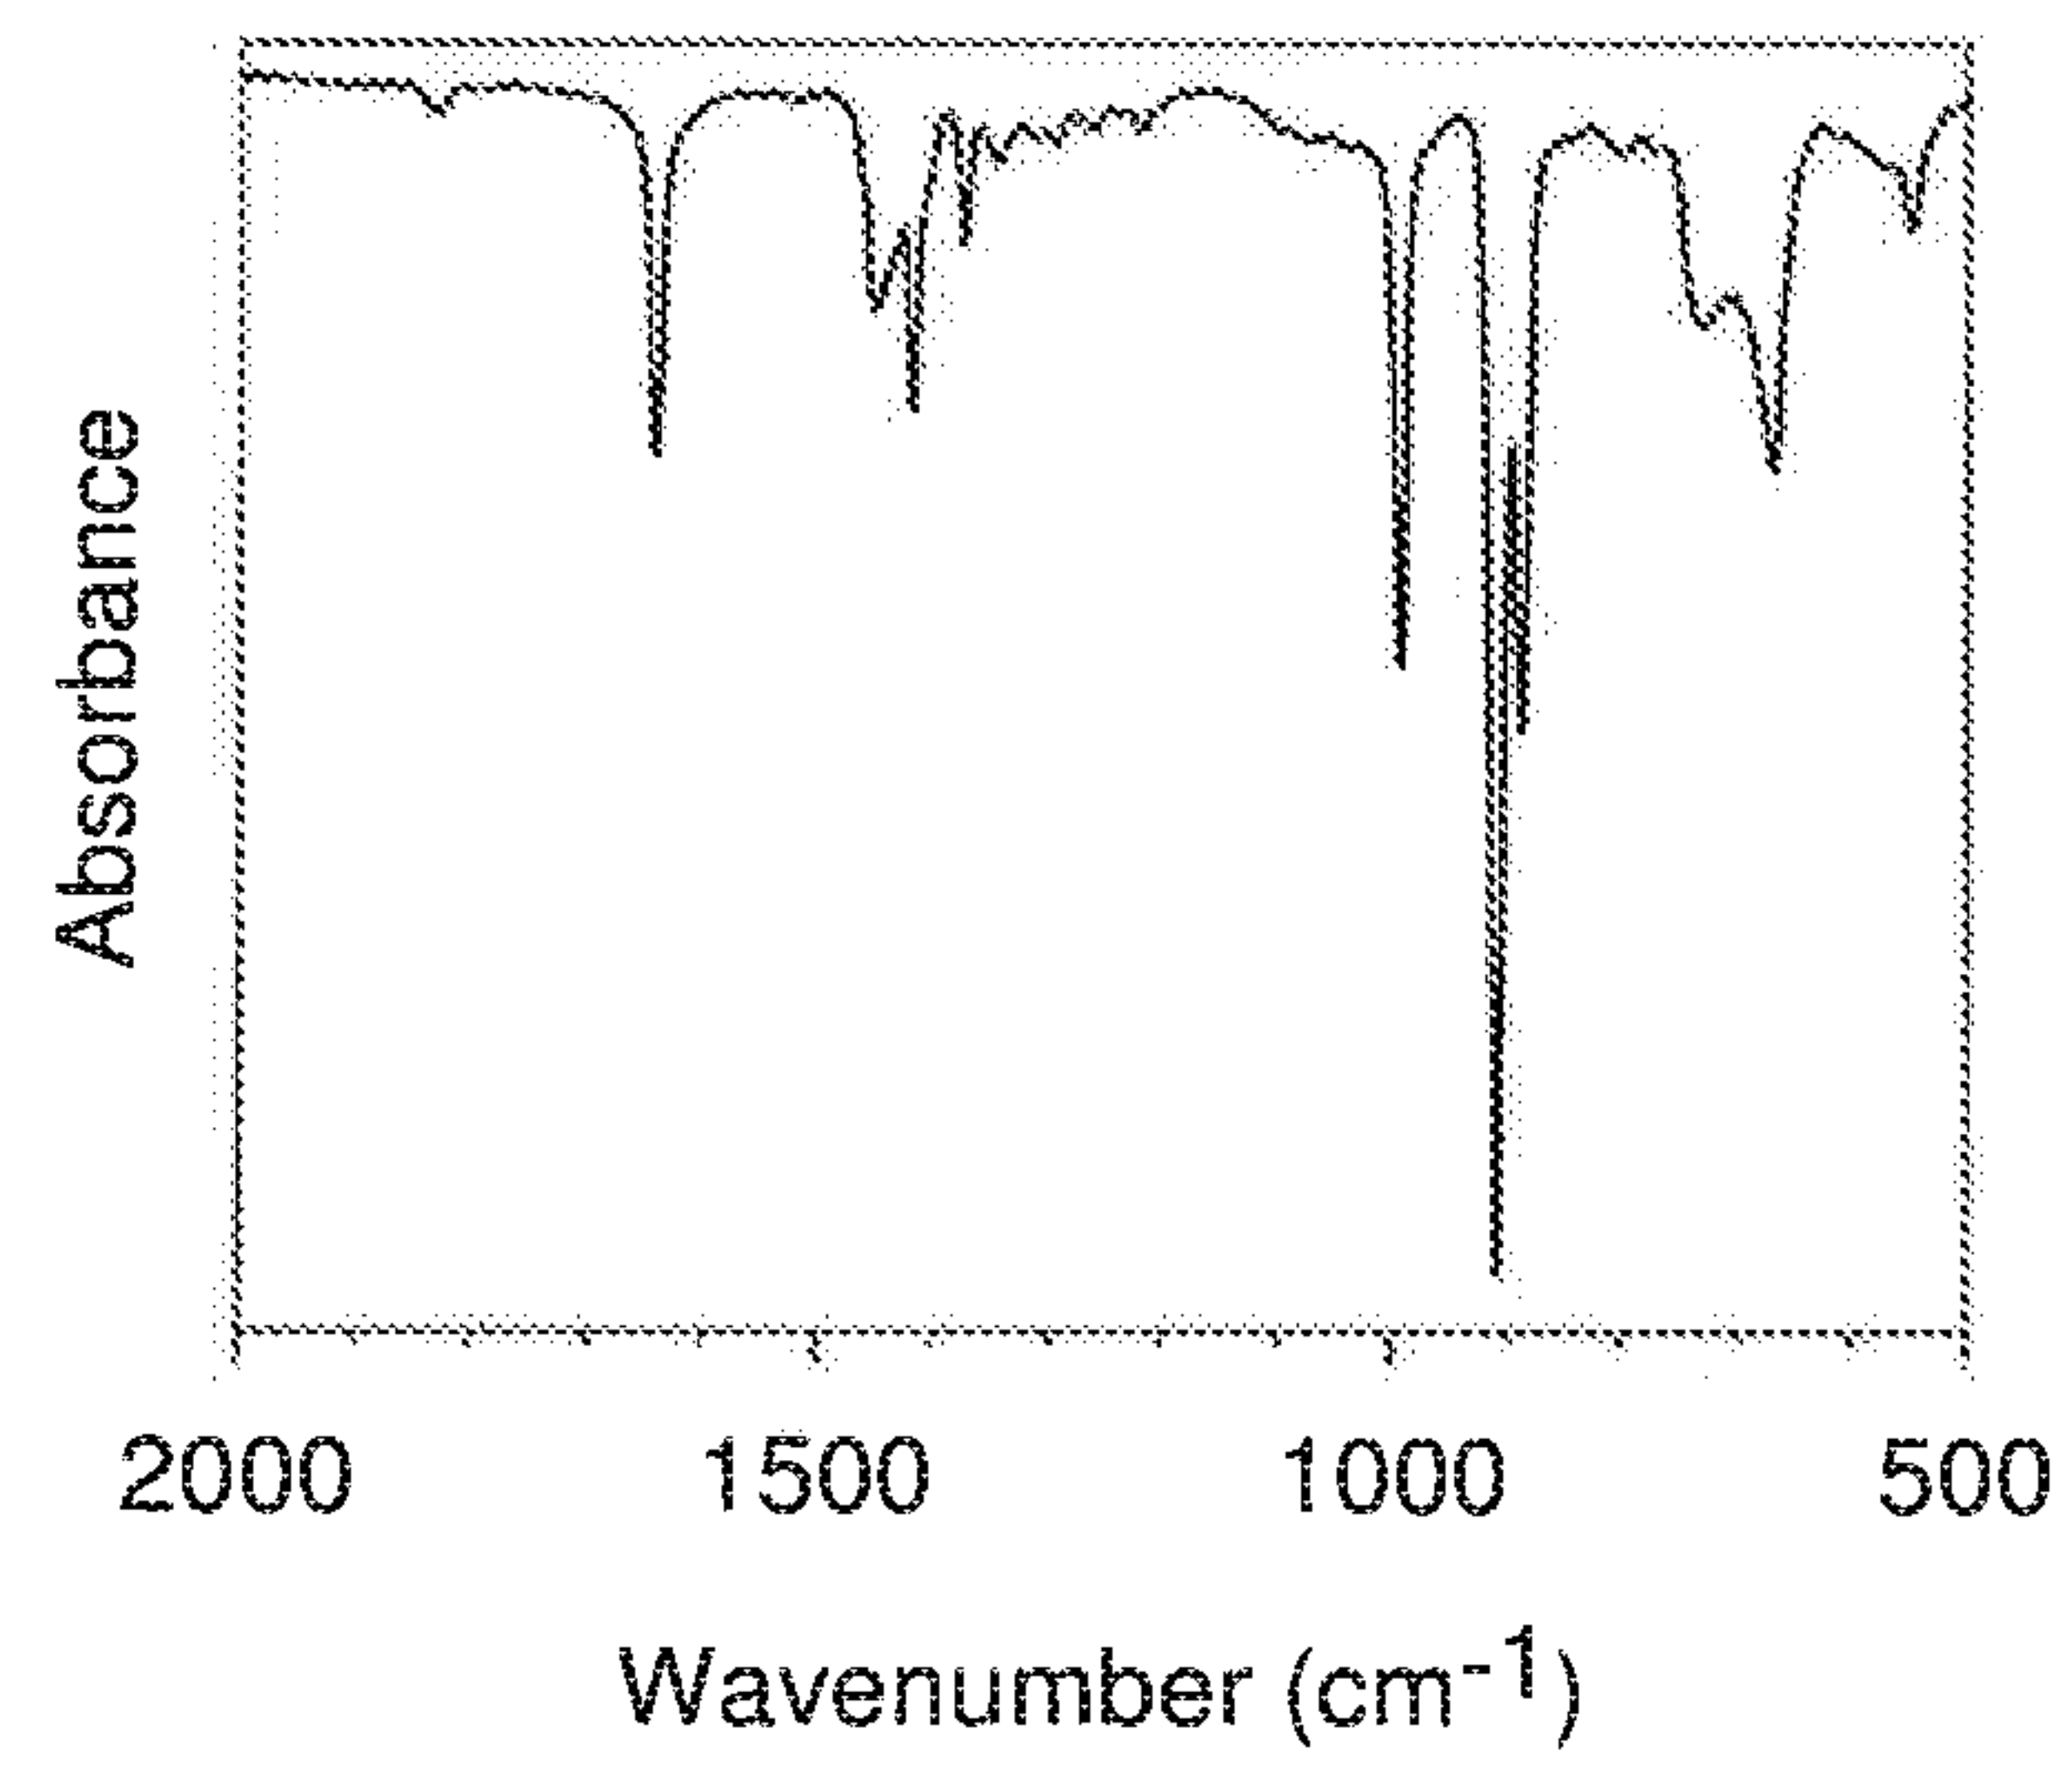


FIGURE 21

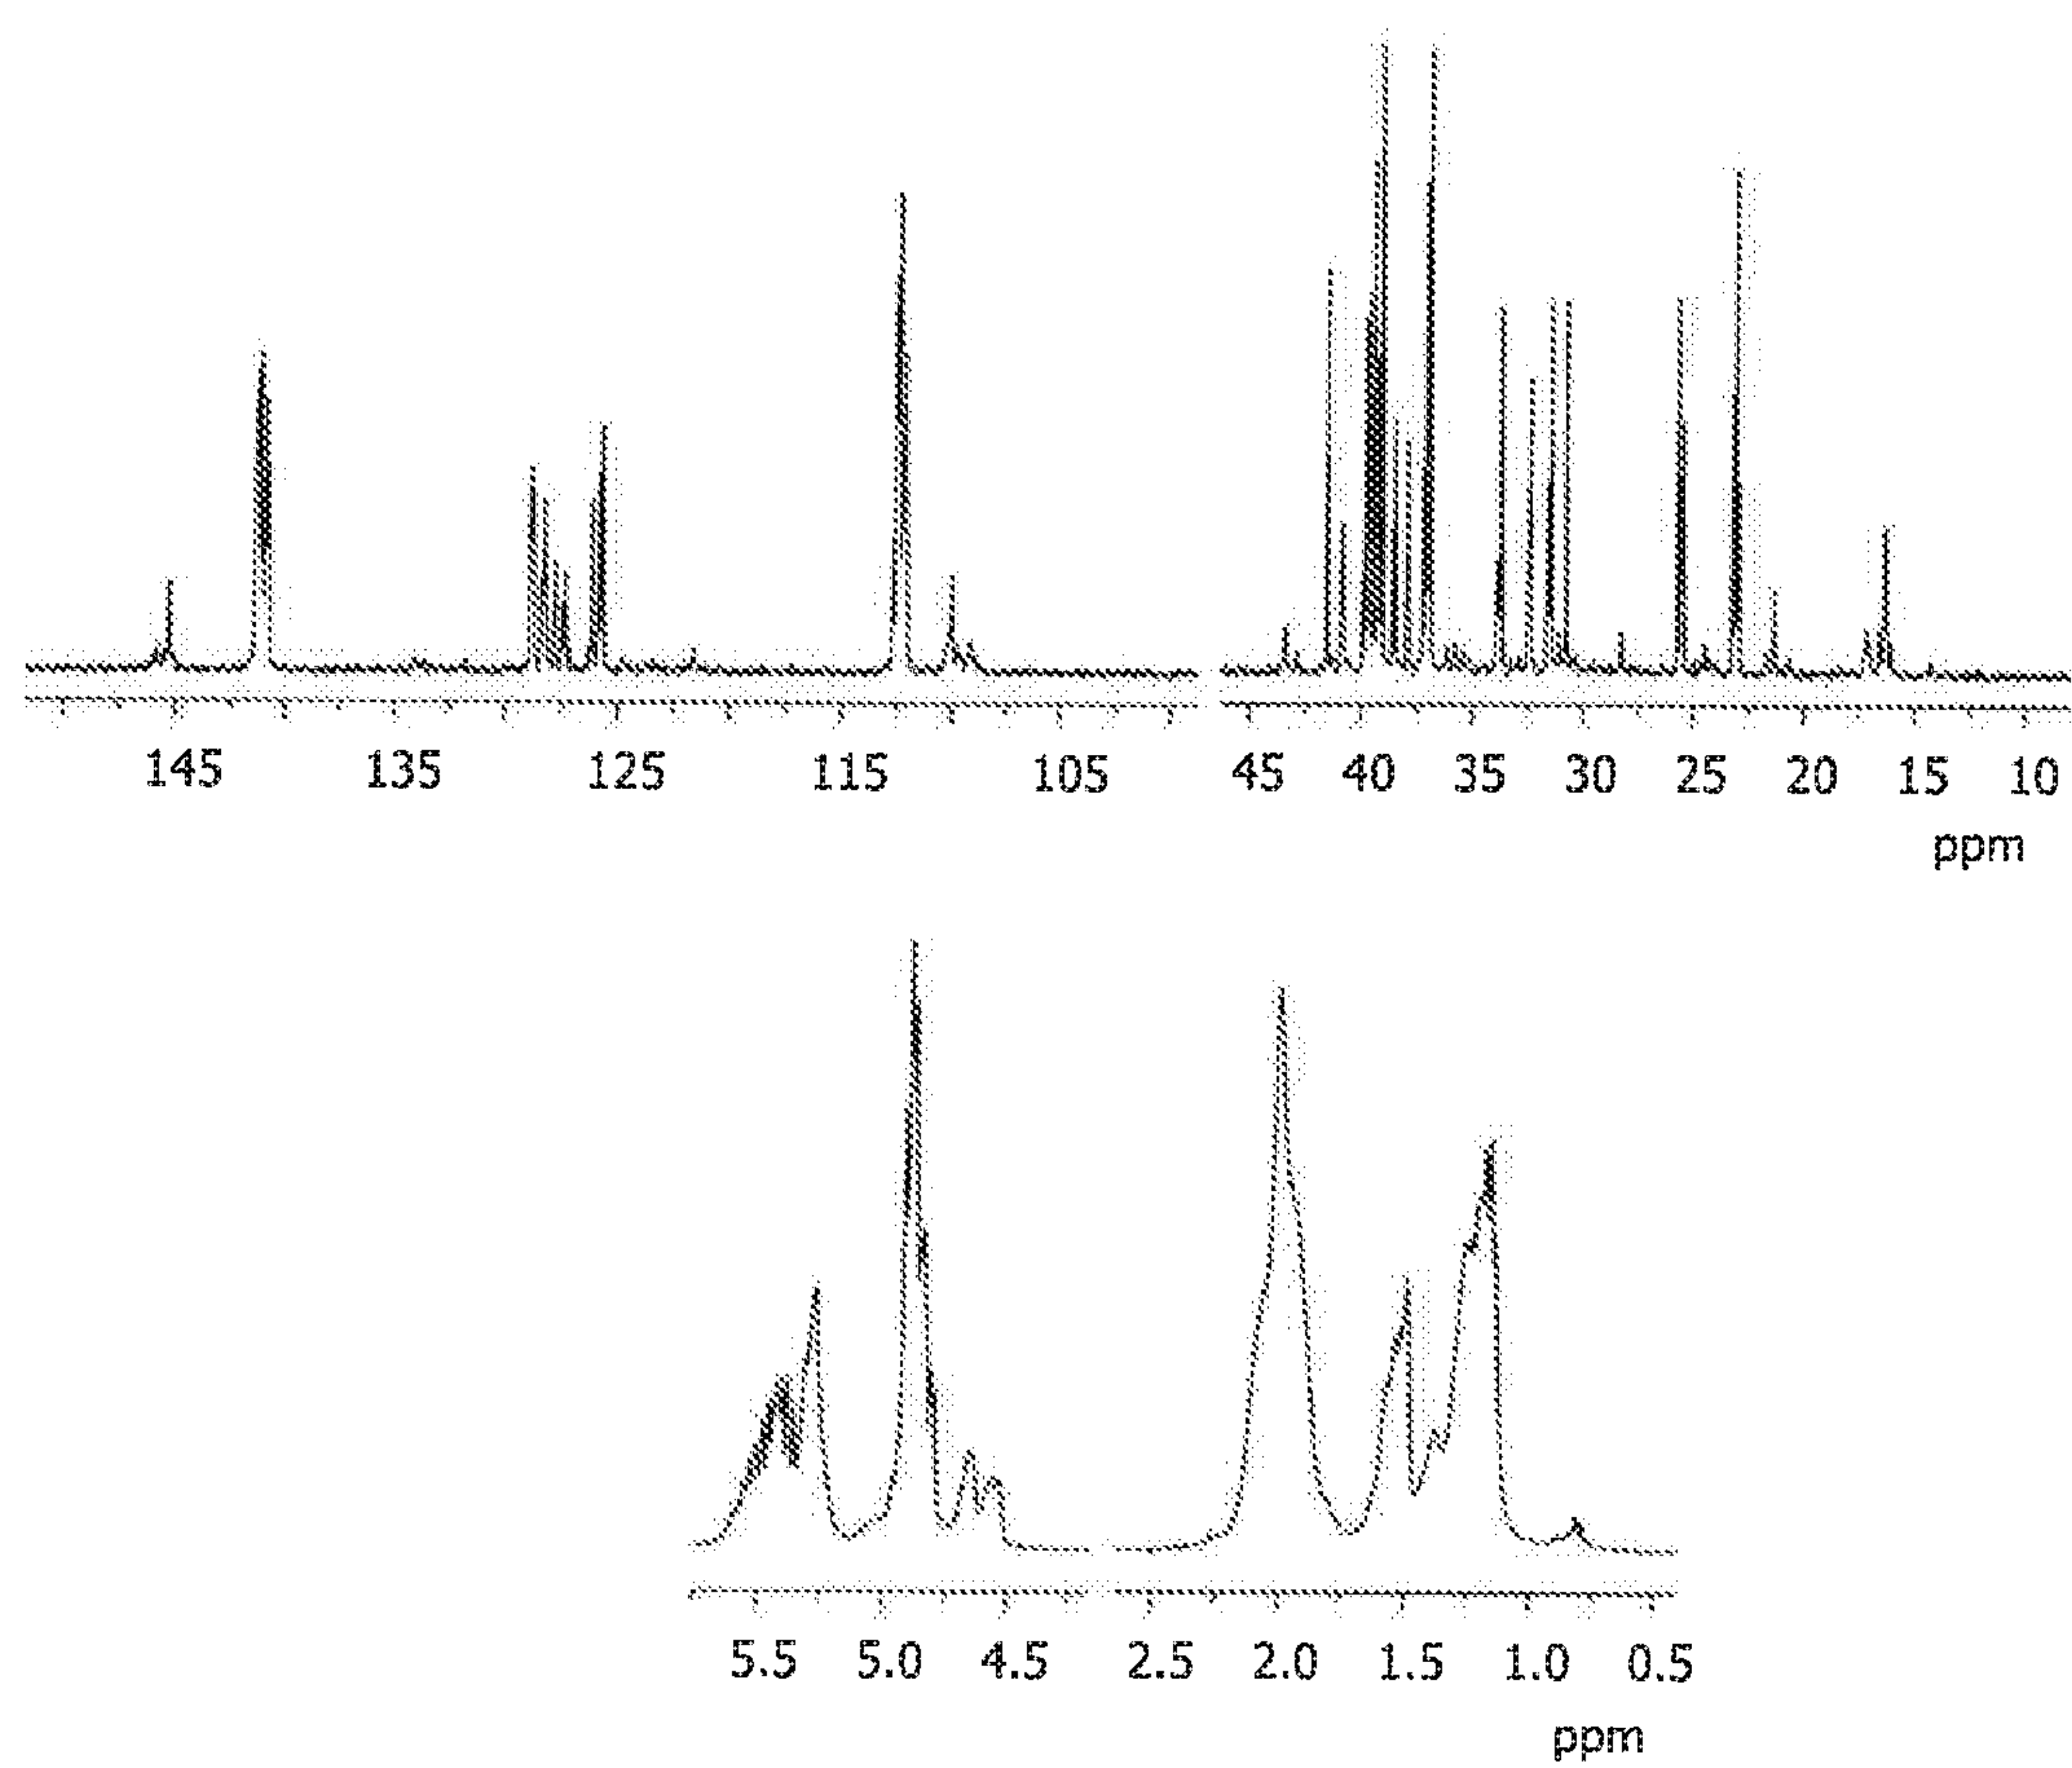


FIGURE 22

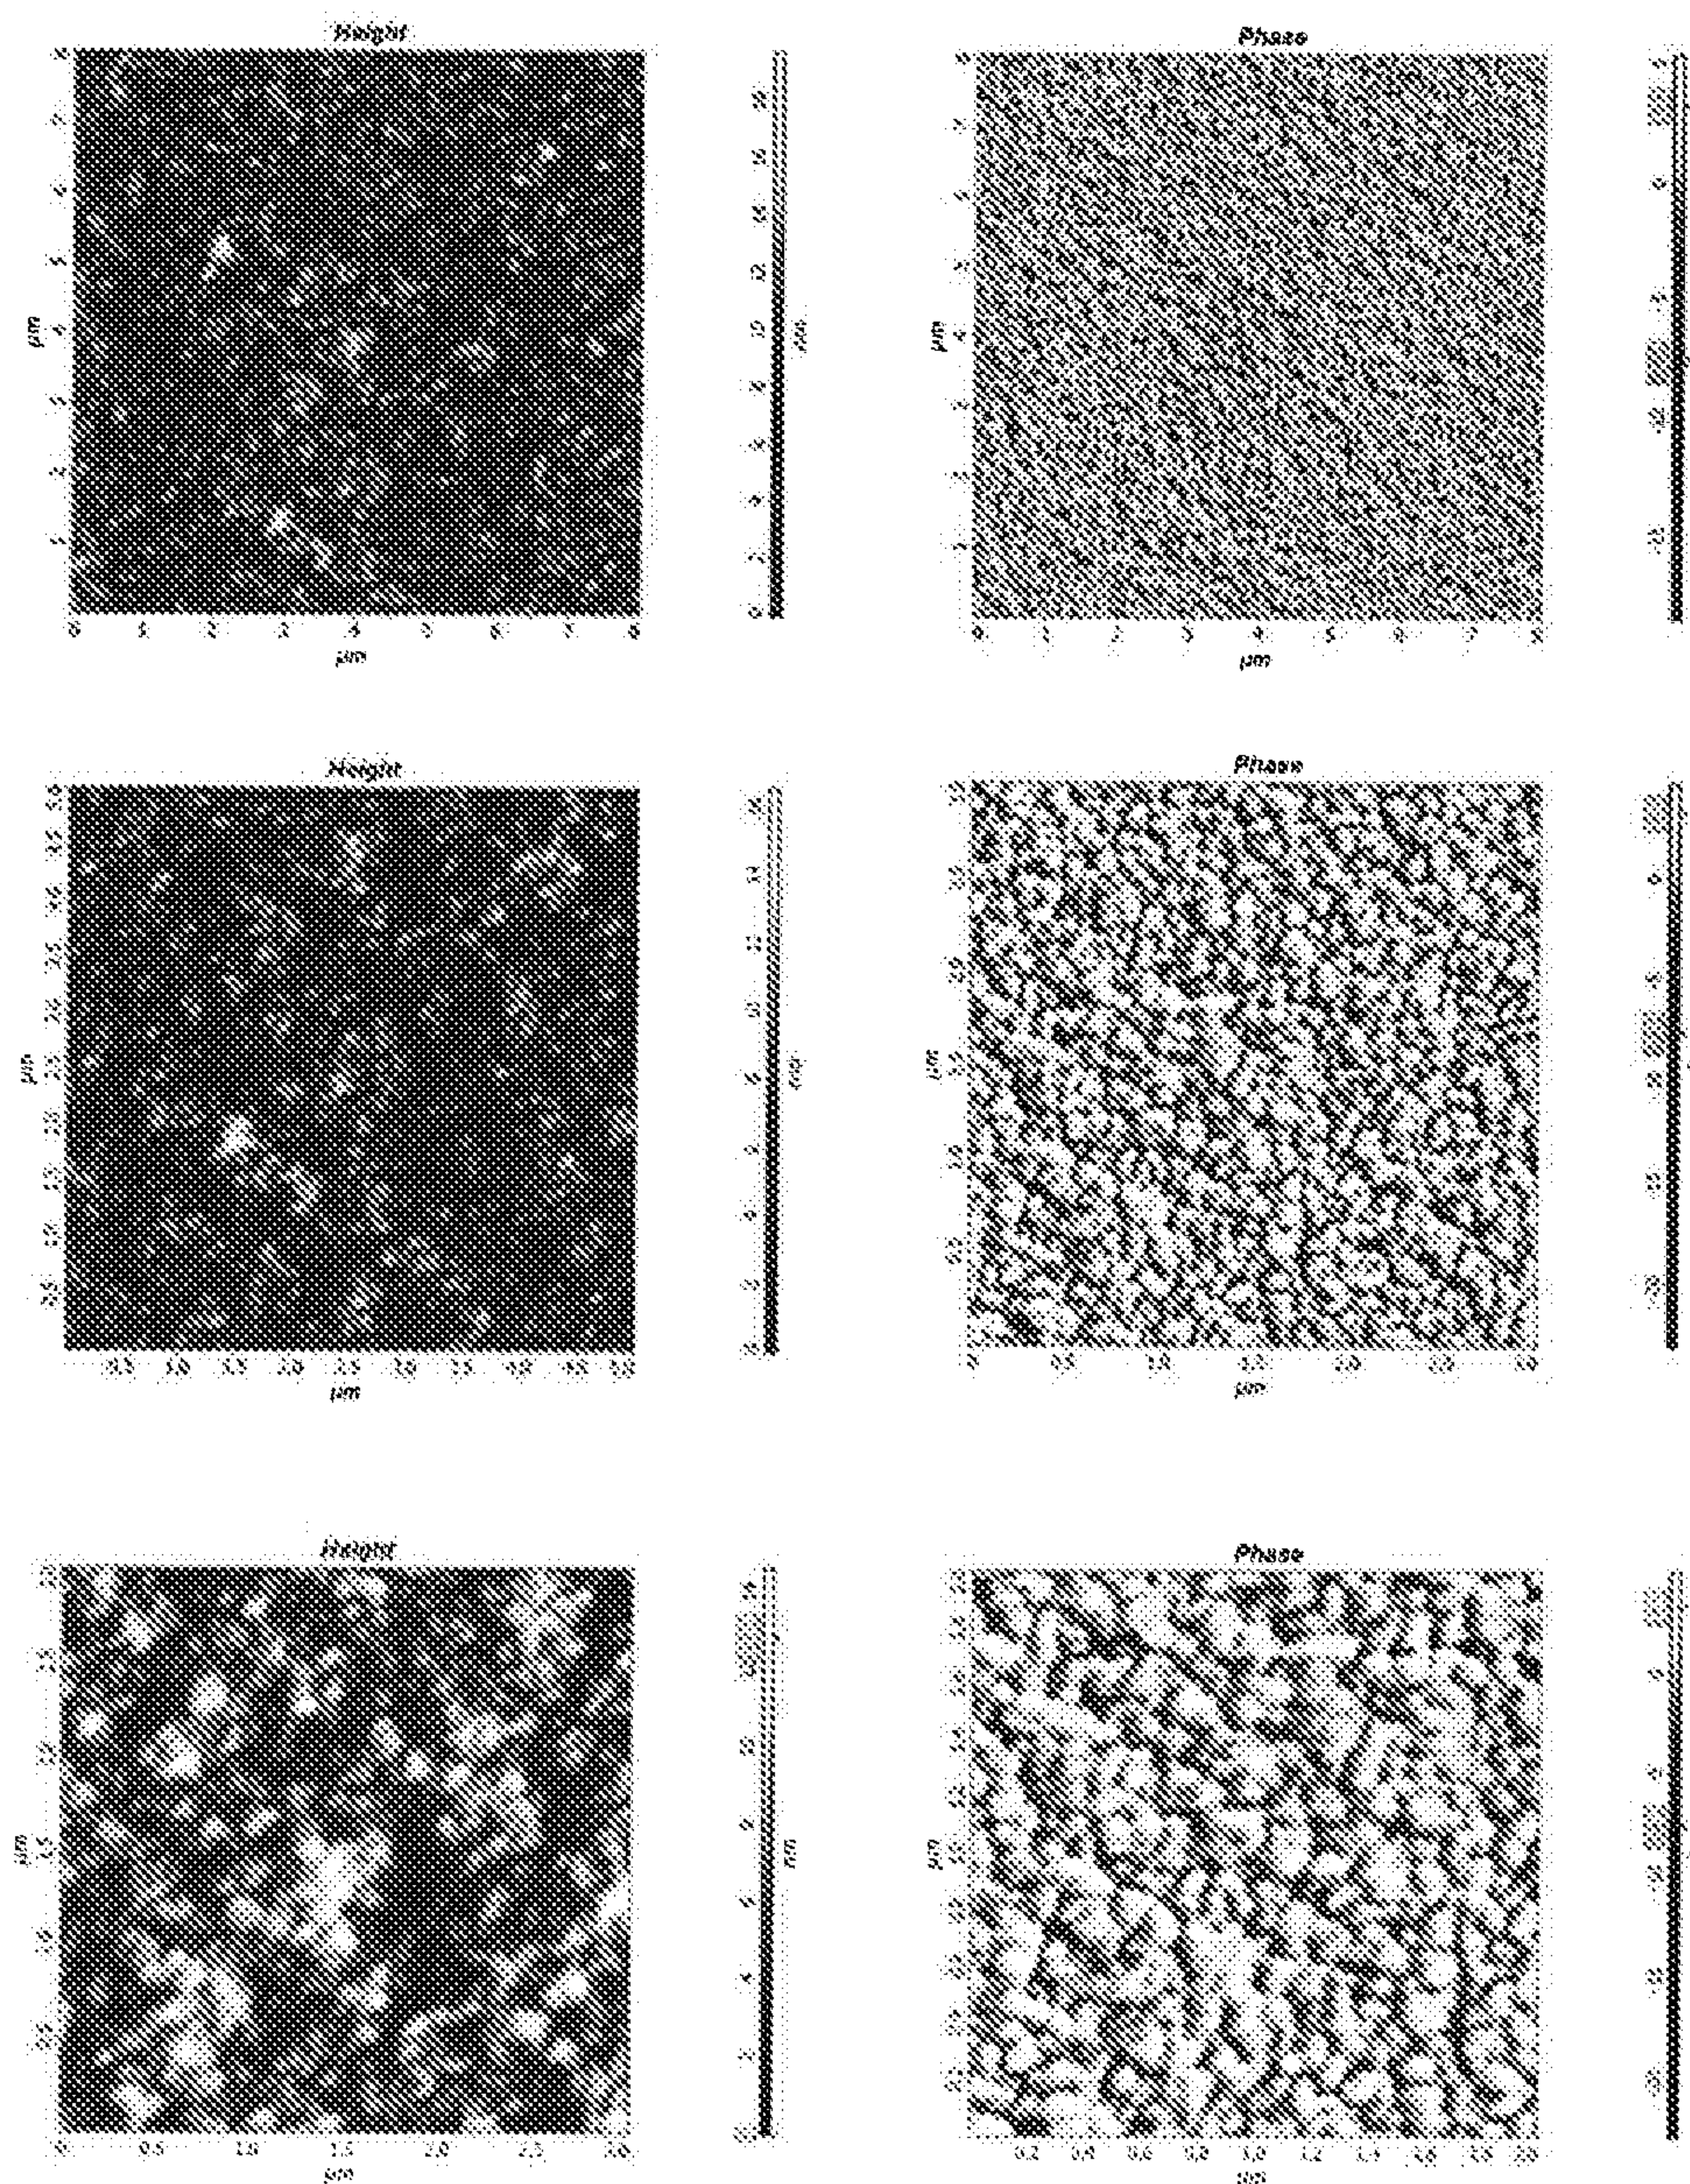


FIGURE 23

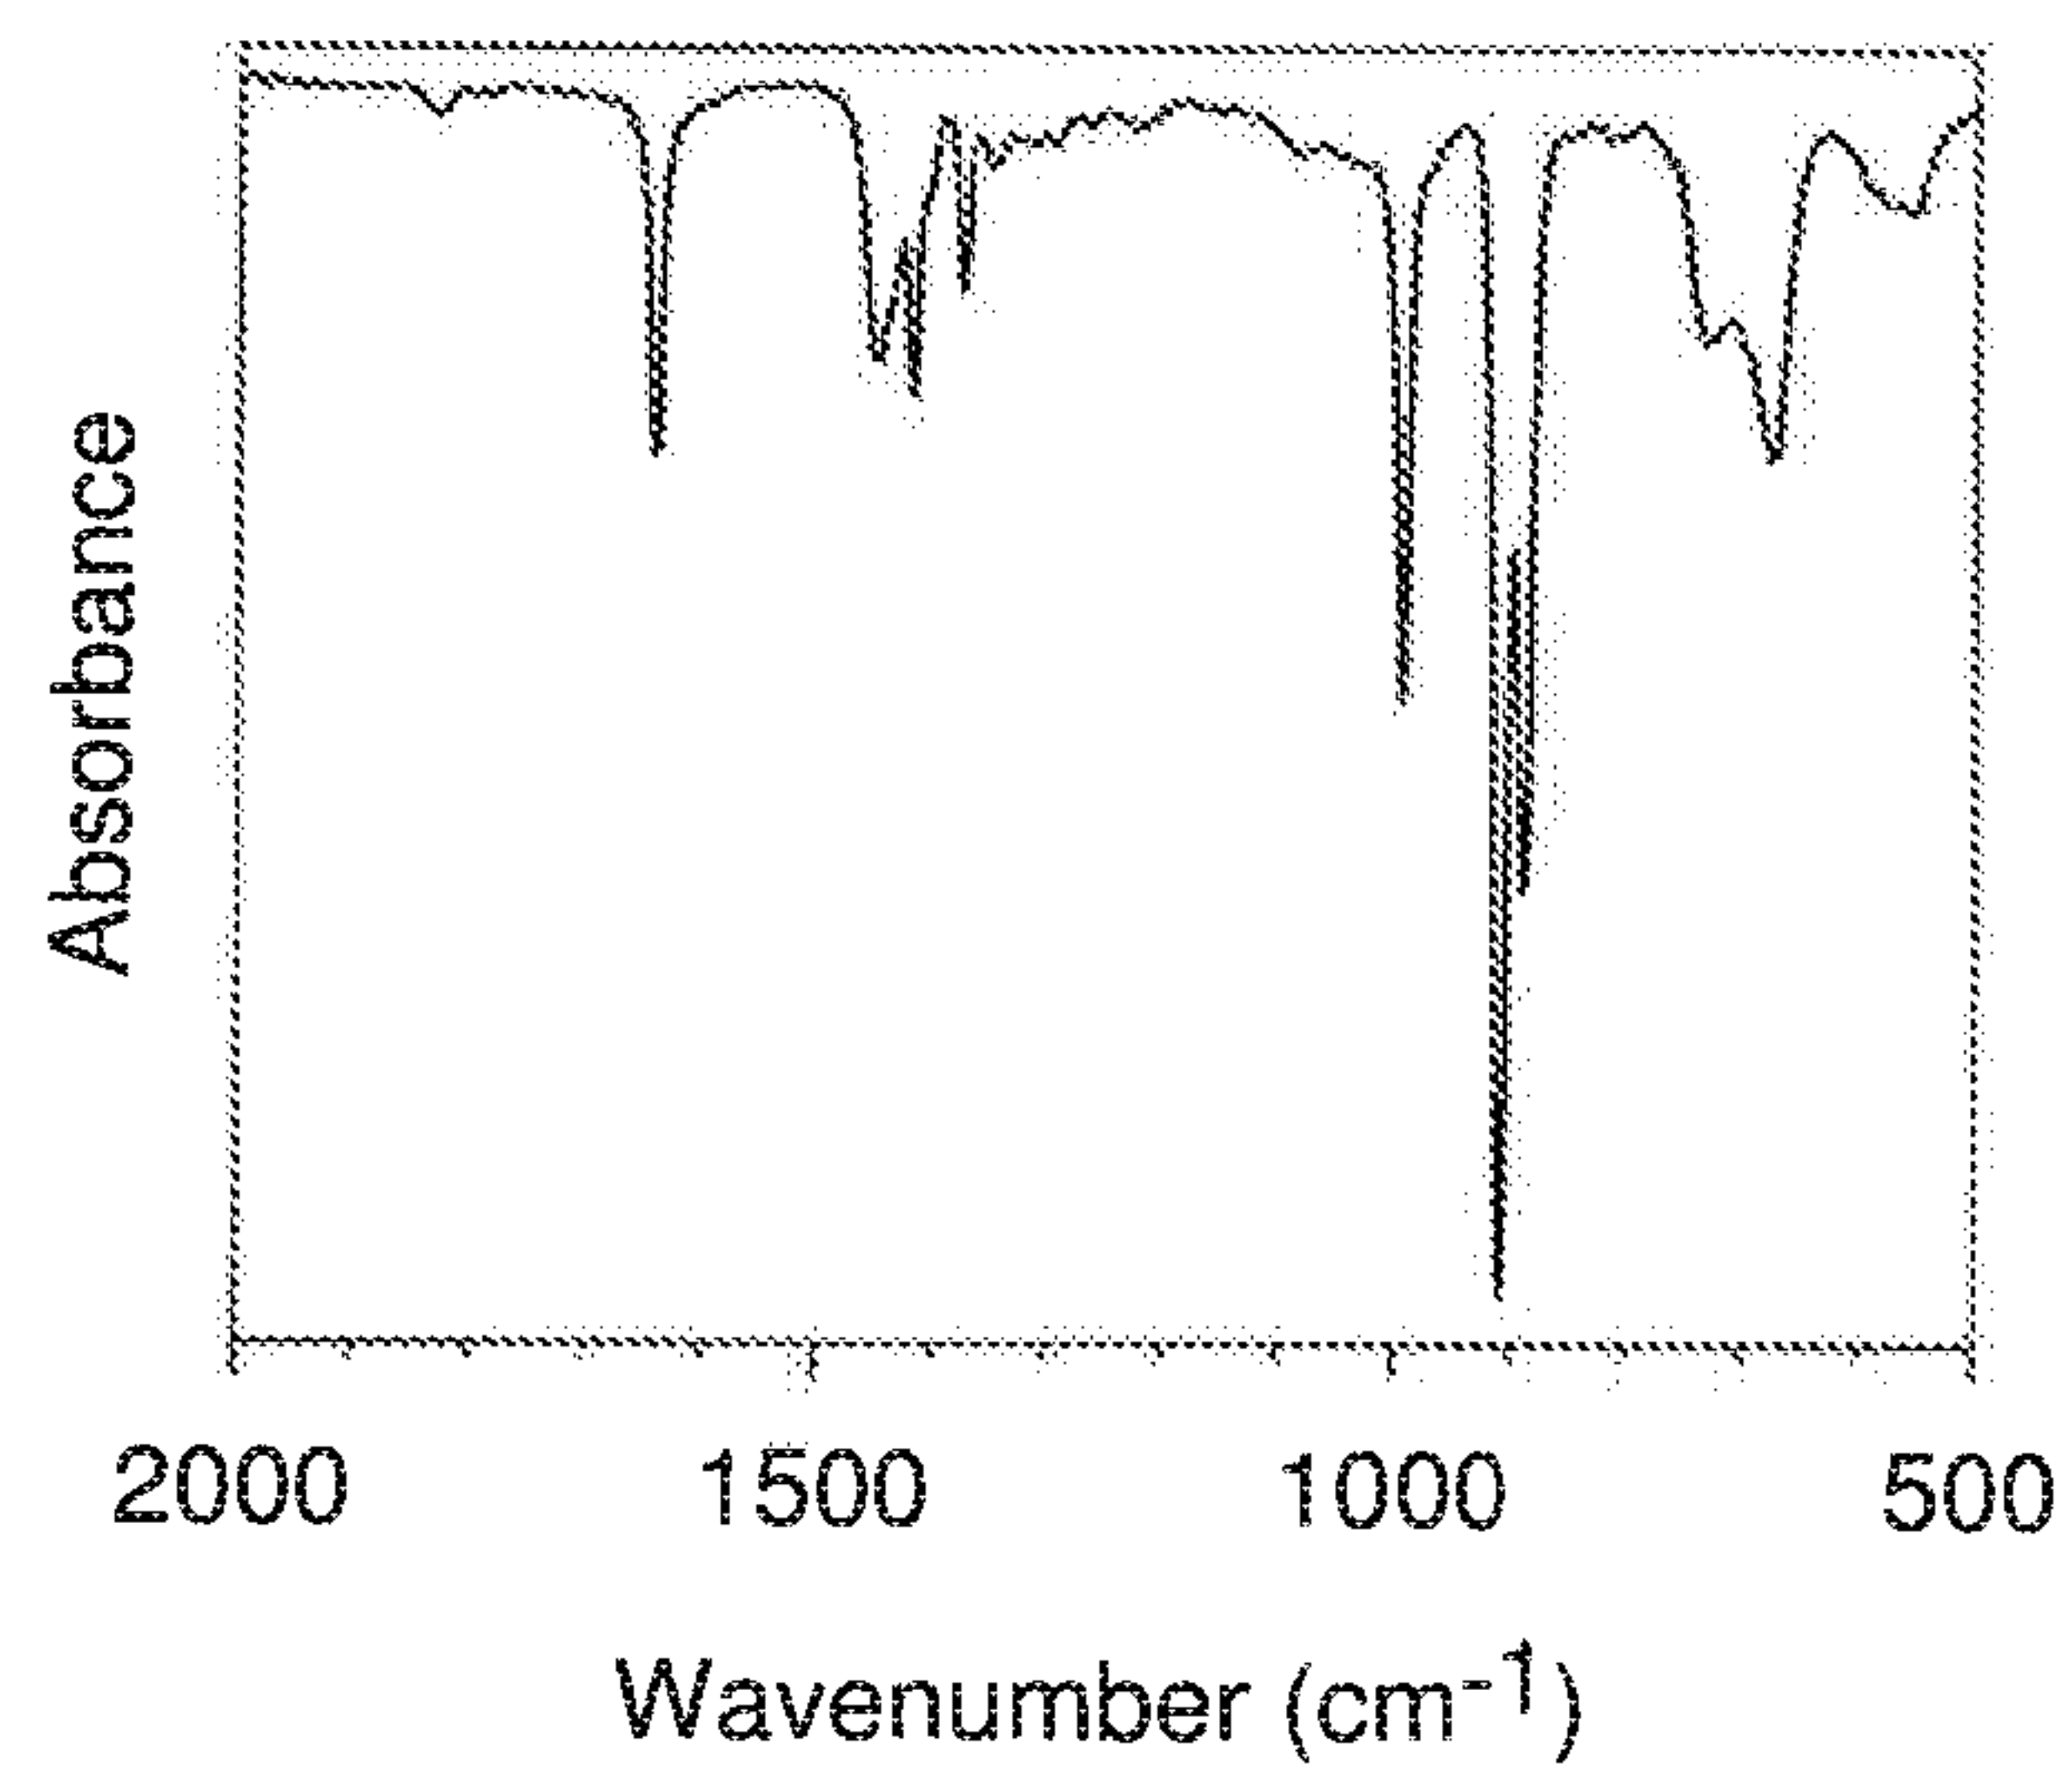


FIGURE 24

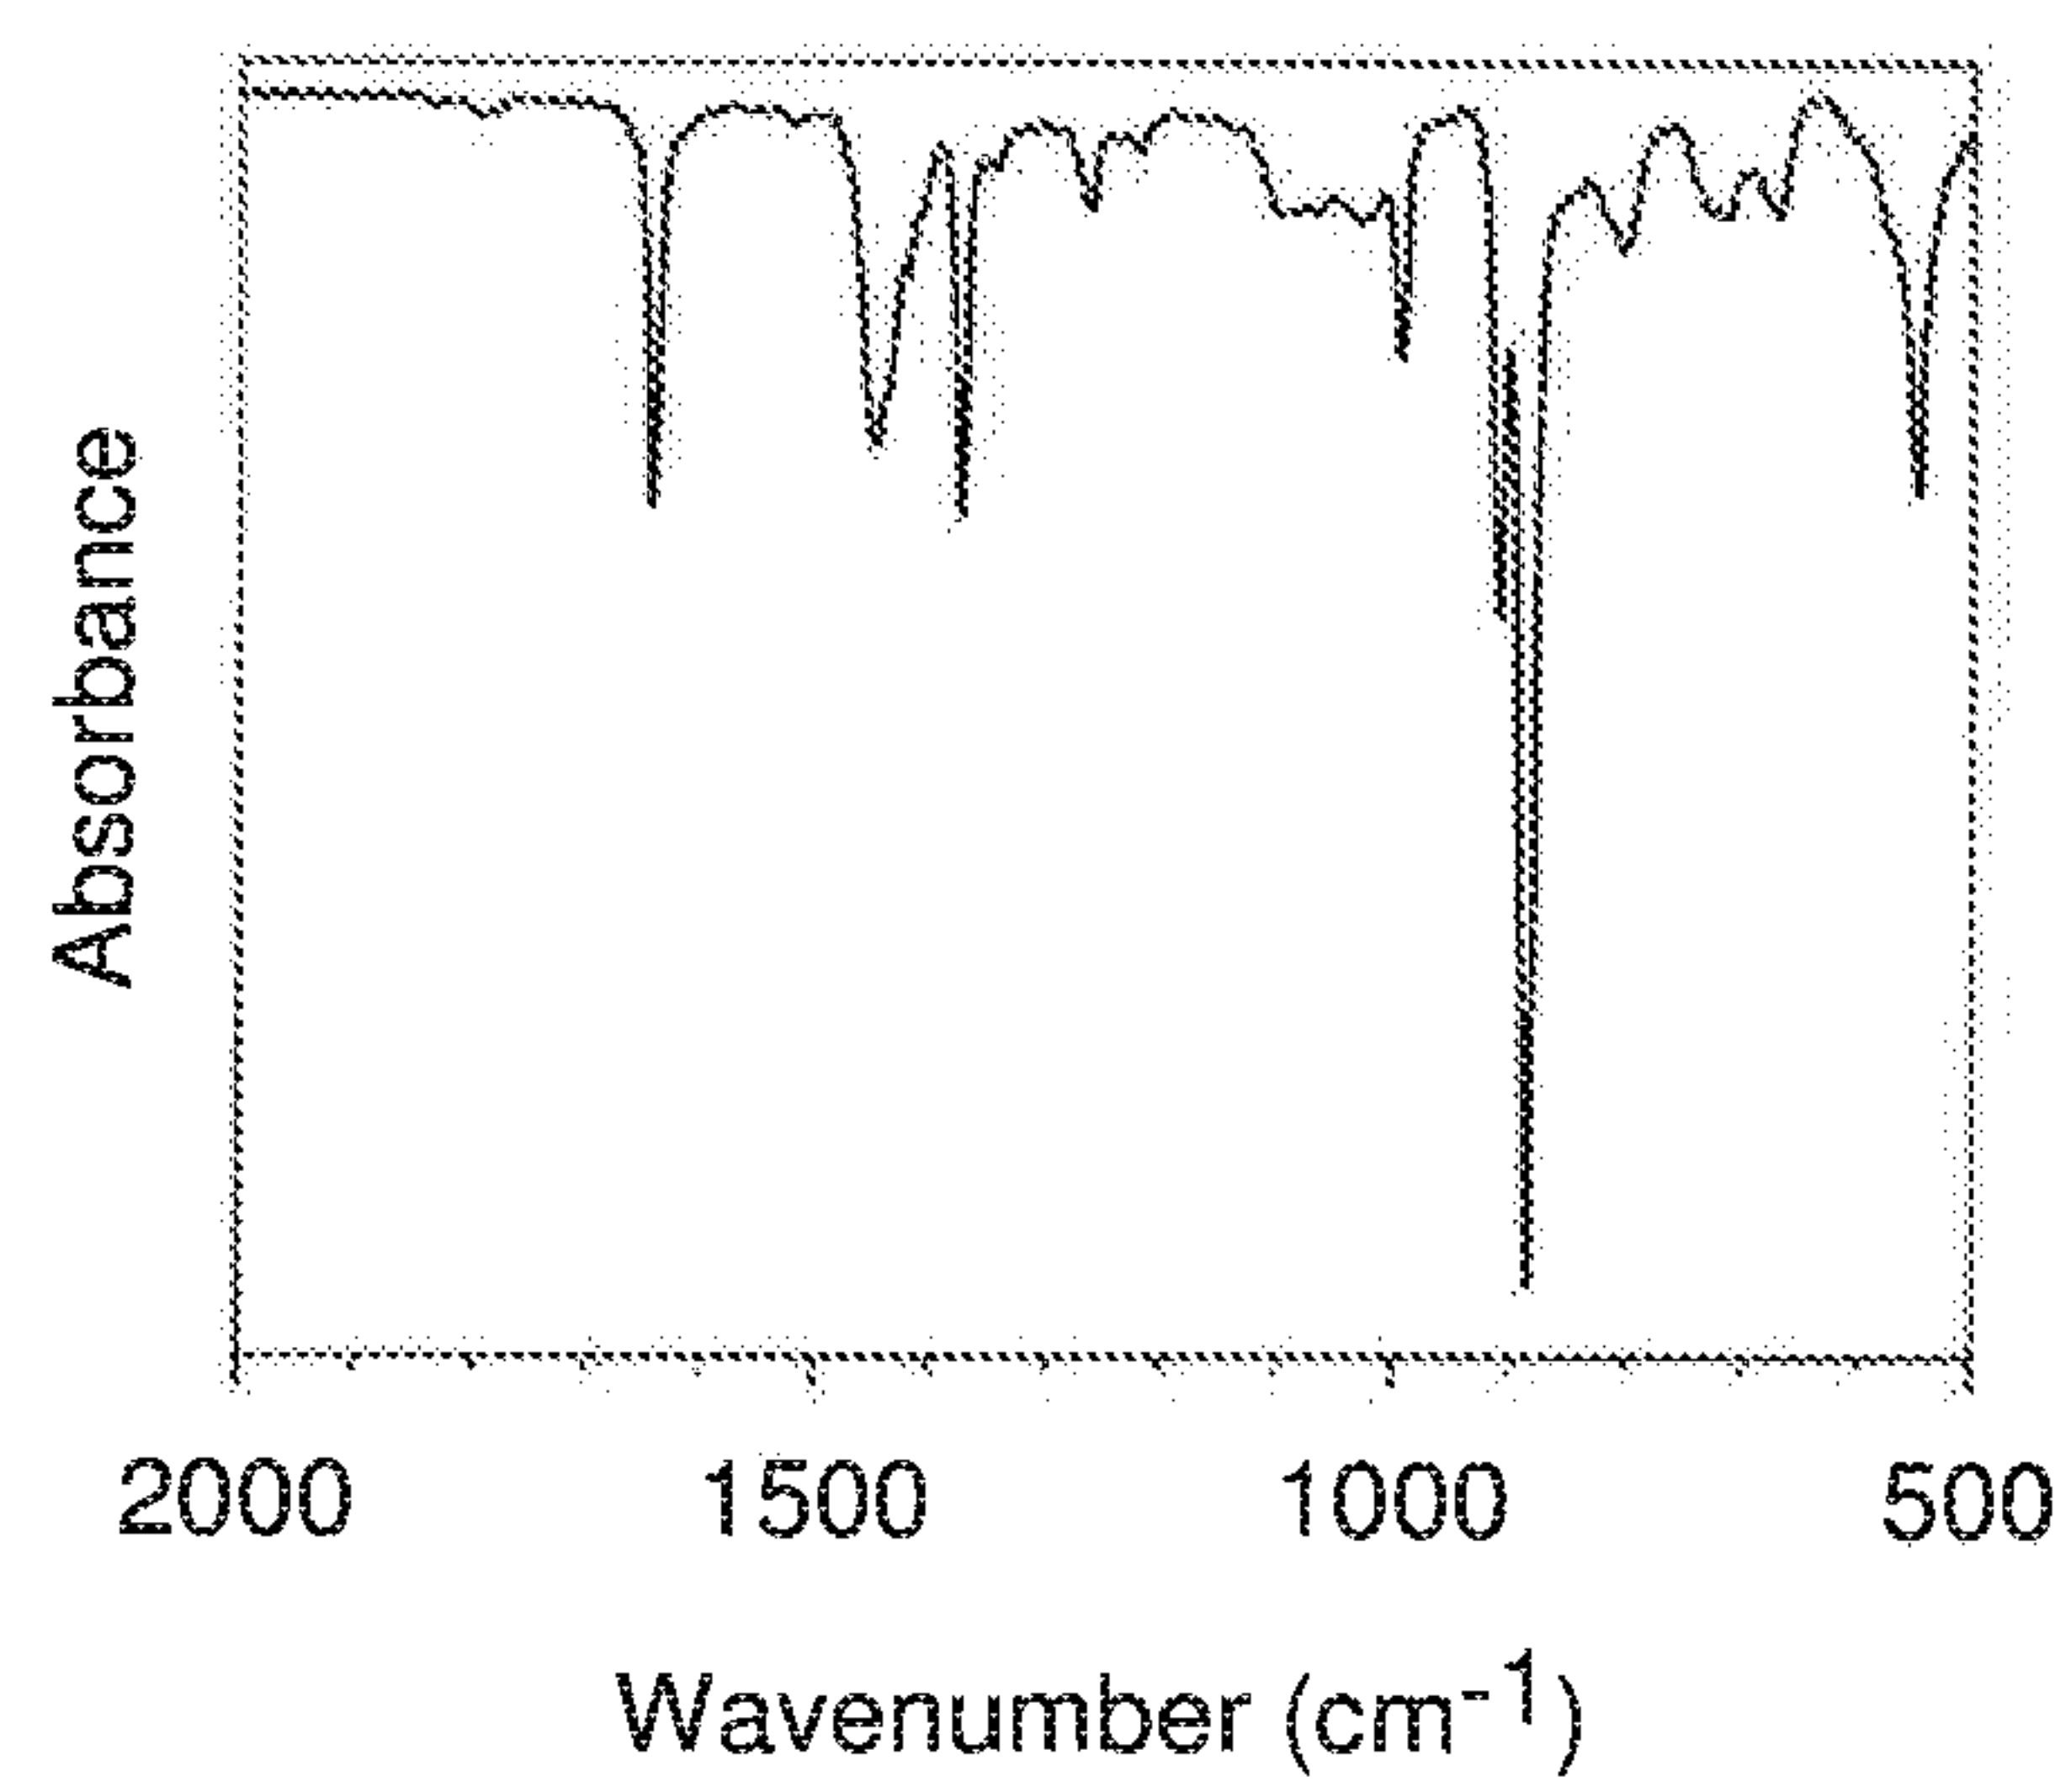


FIGURE 25

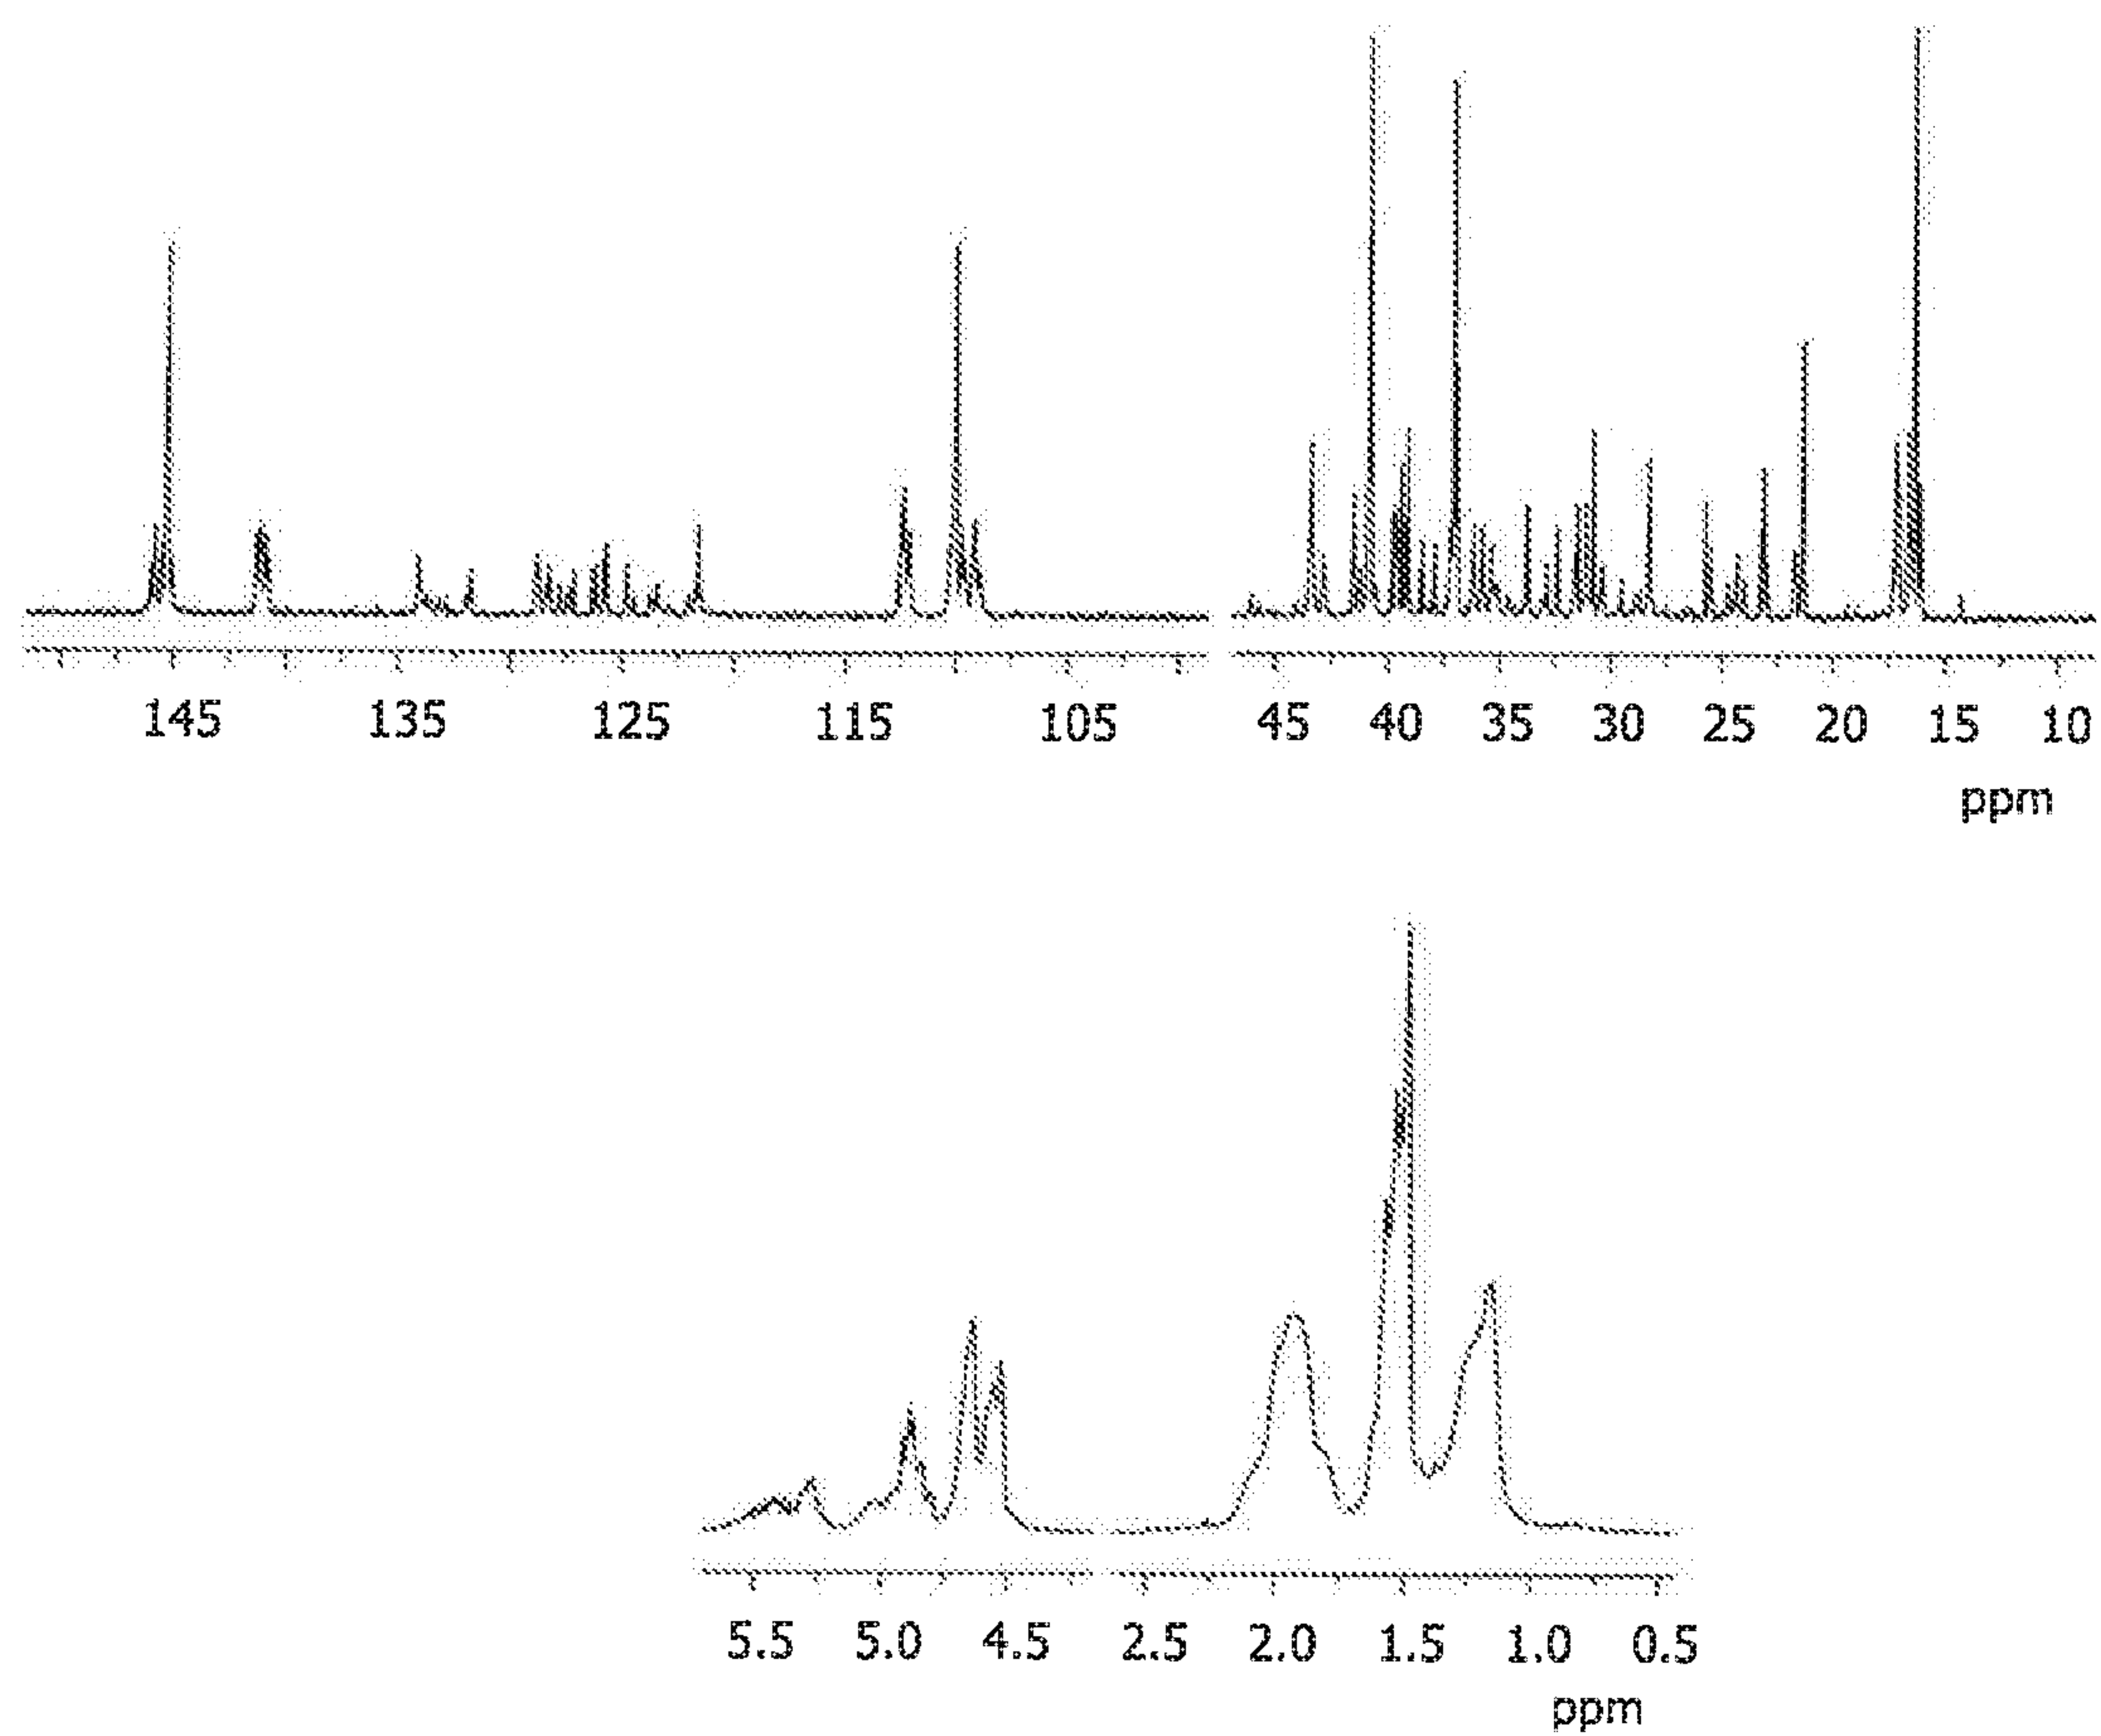


FIGURE 26

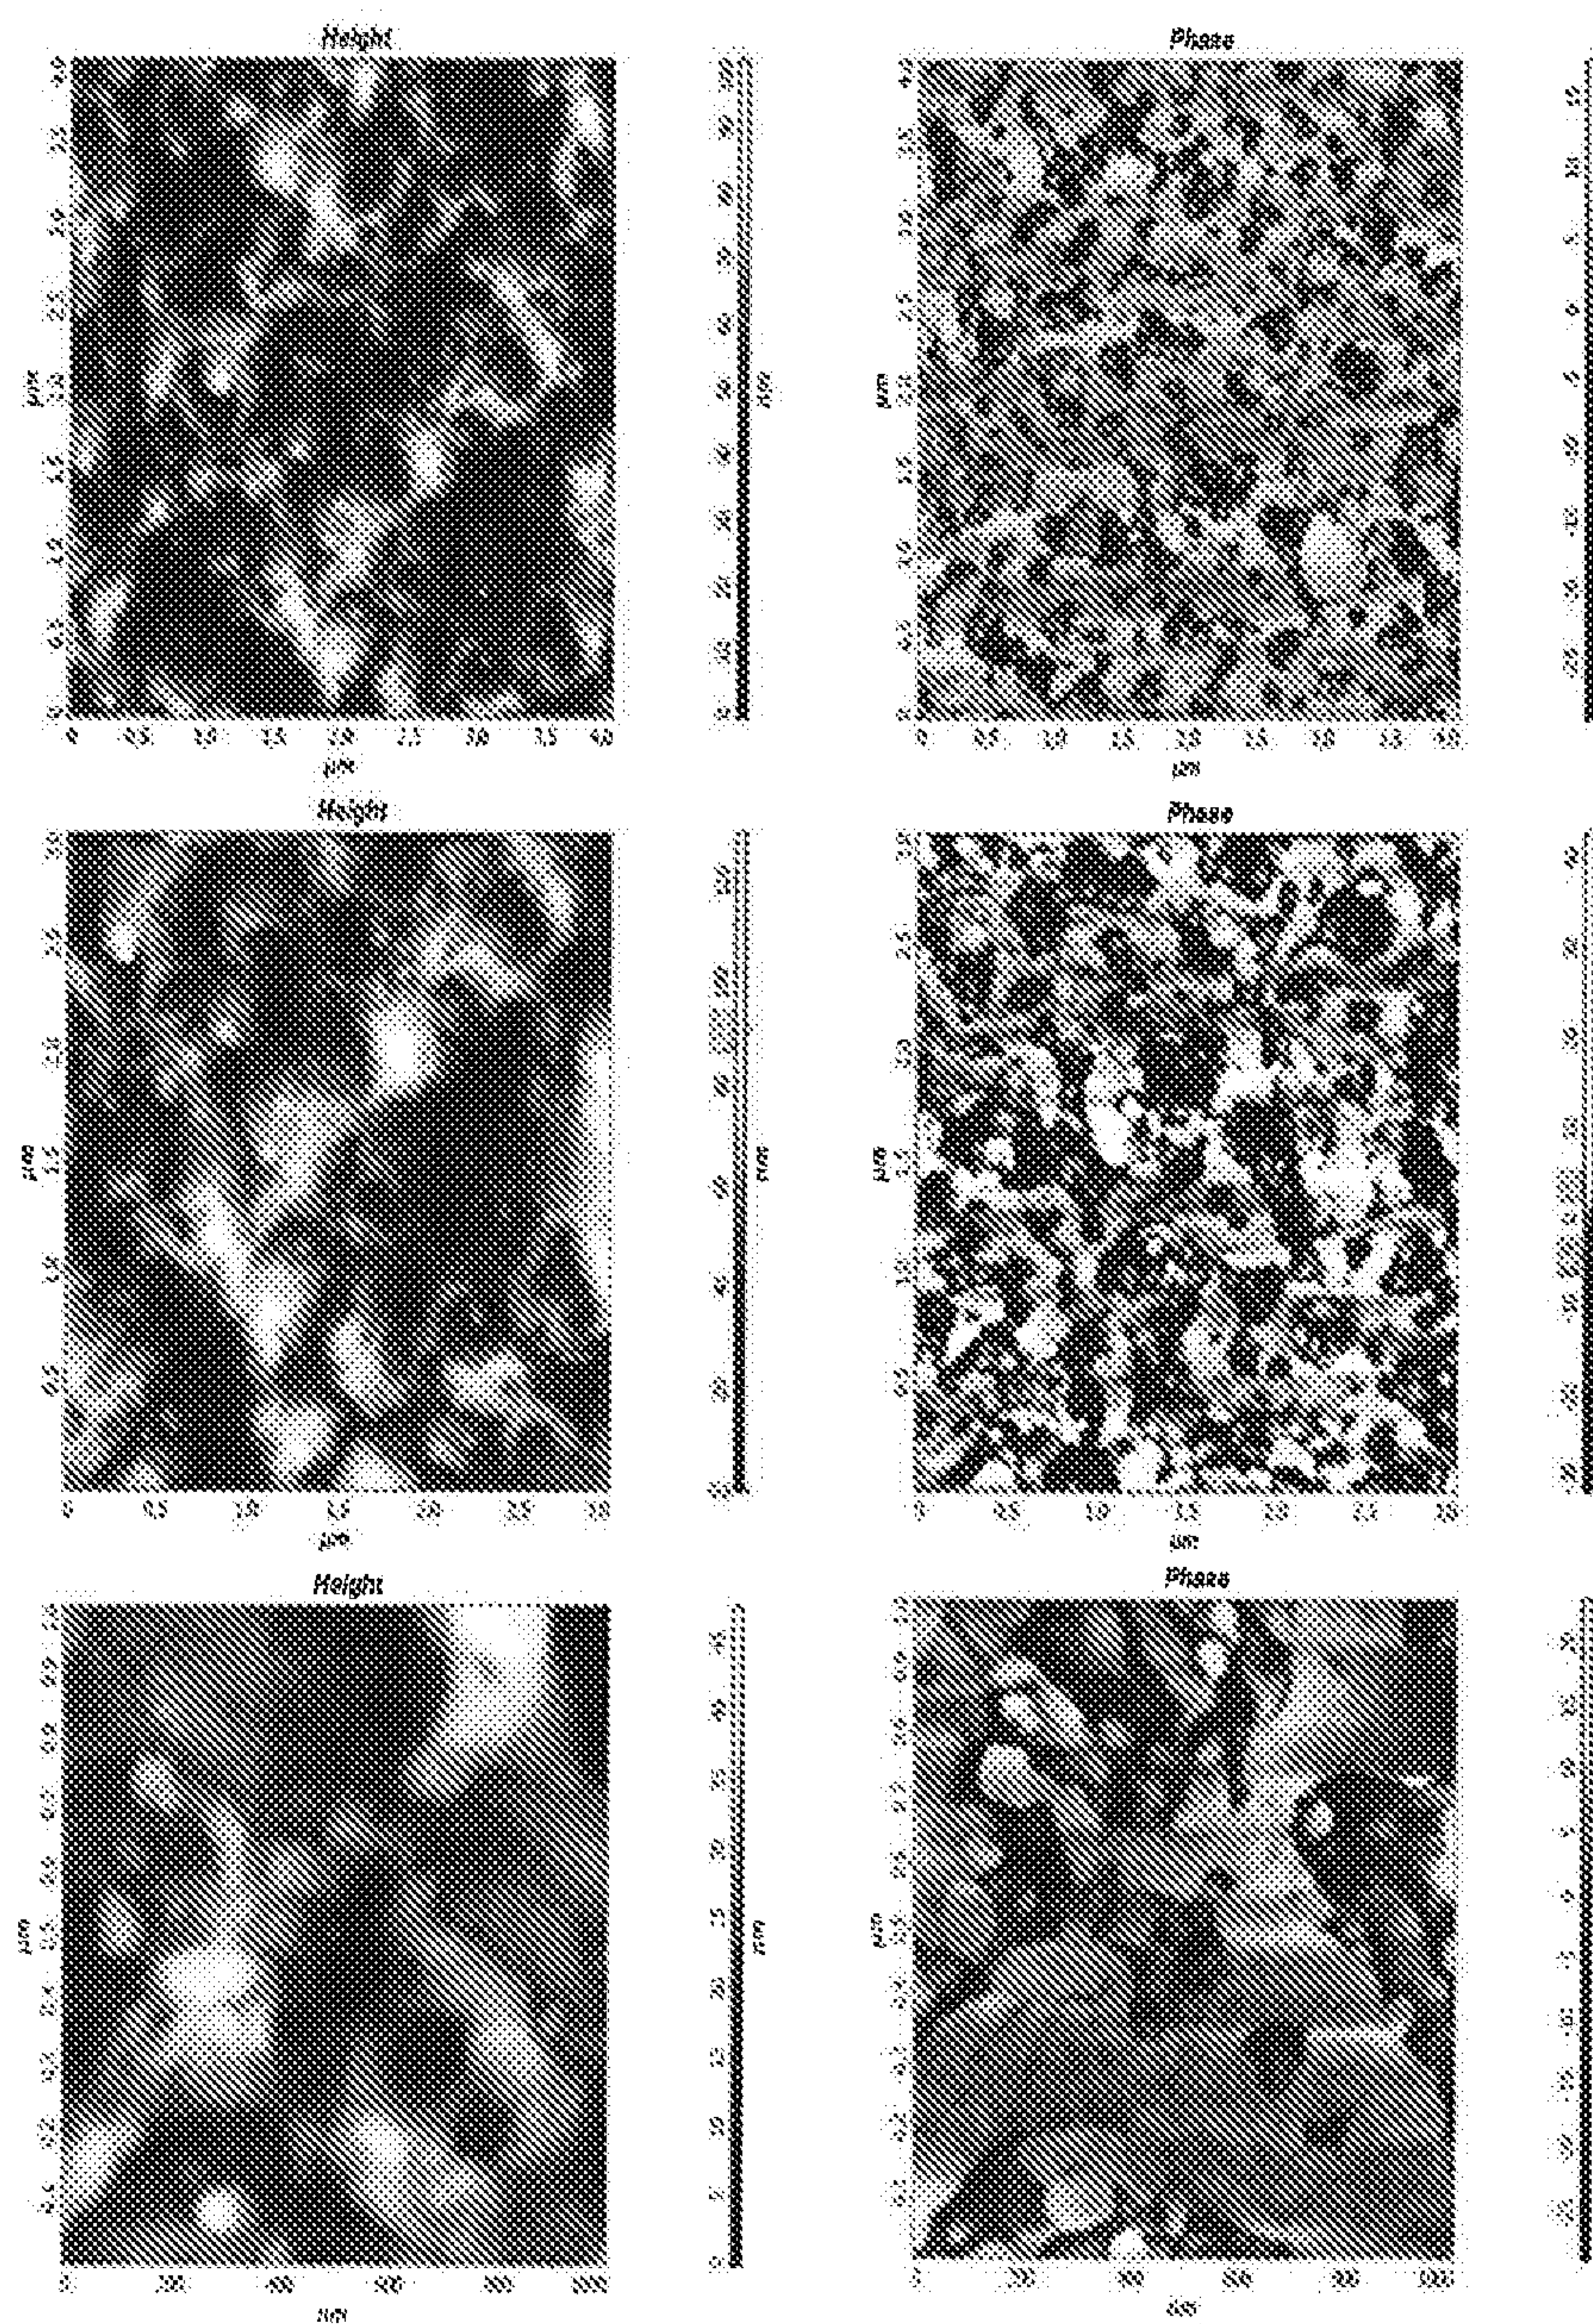


FIGURE 27

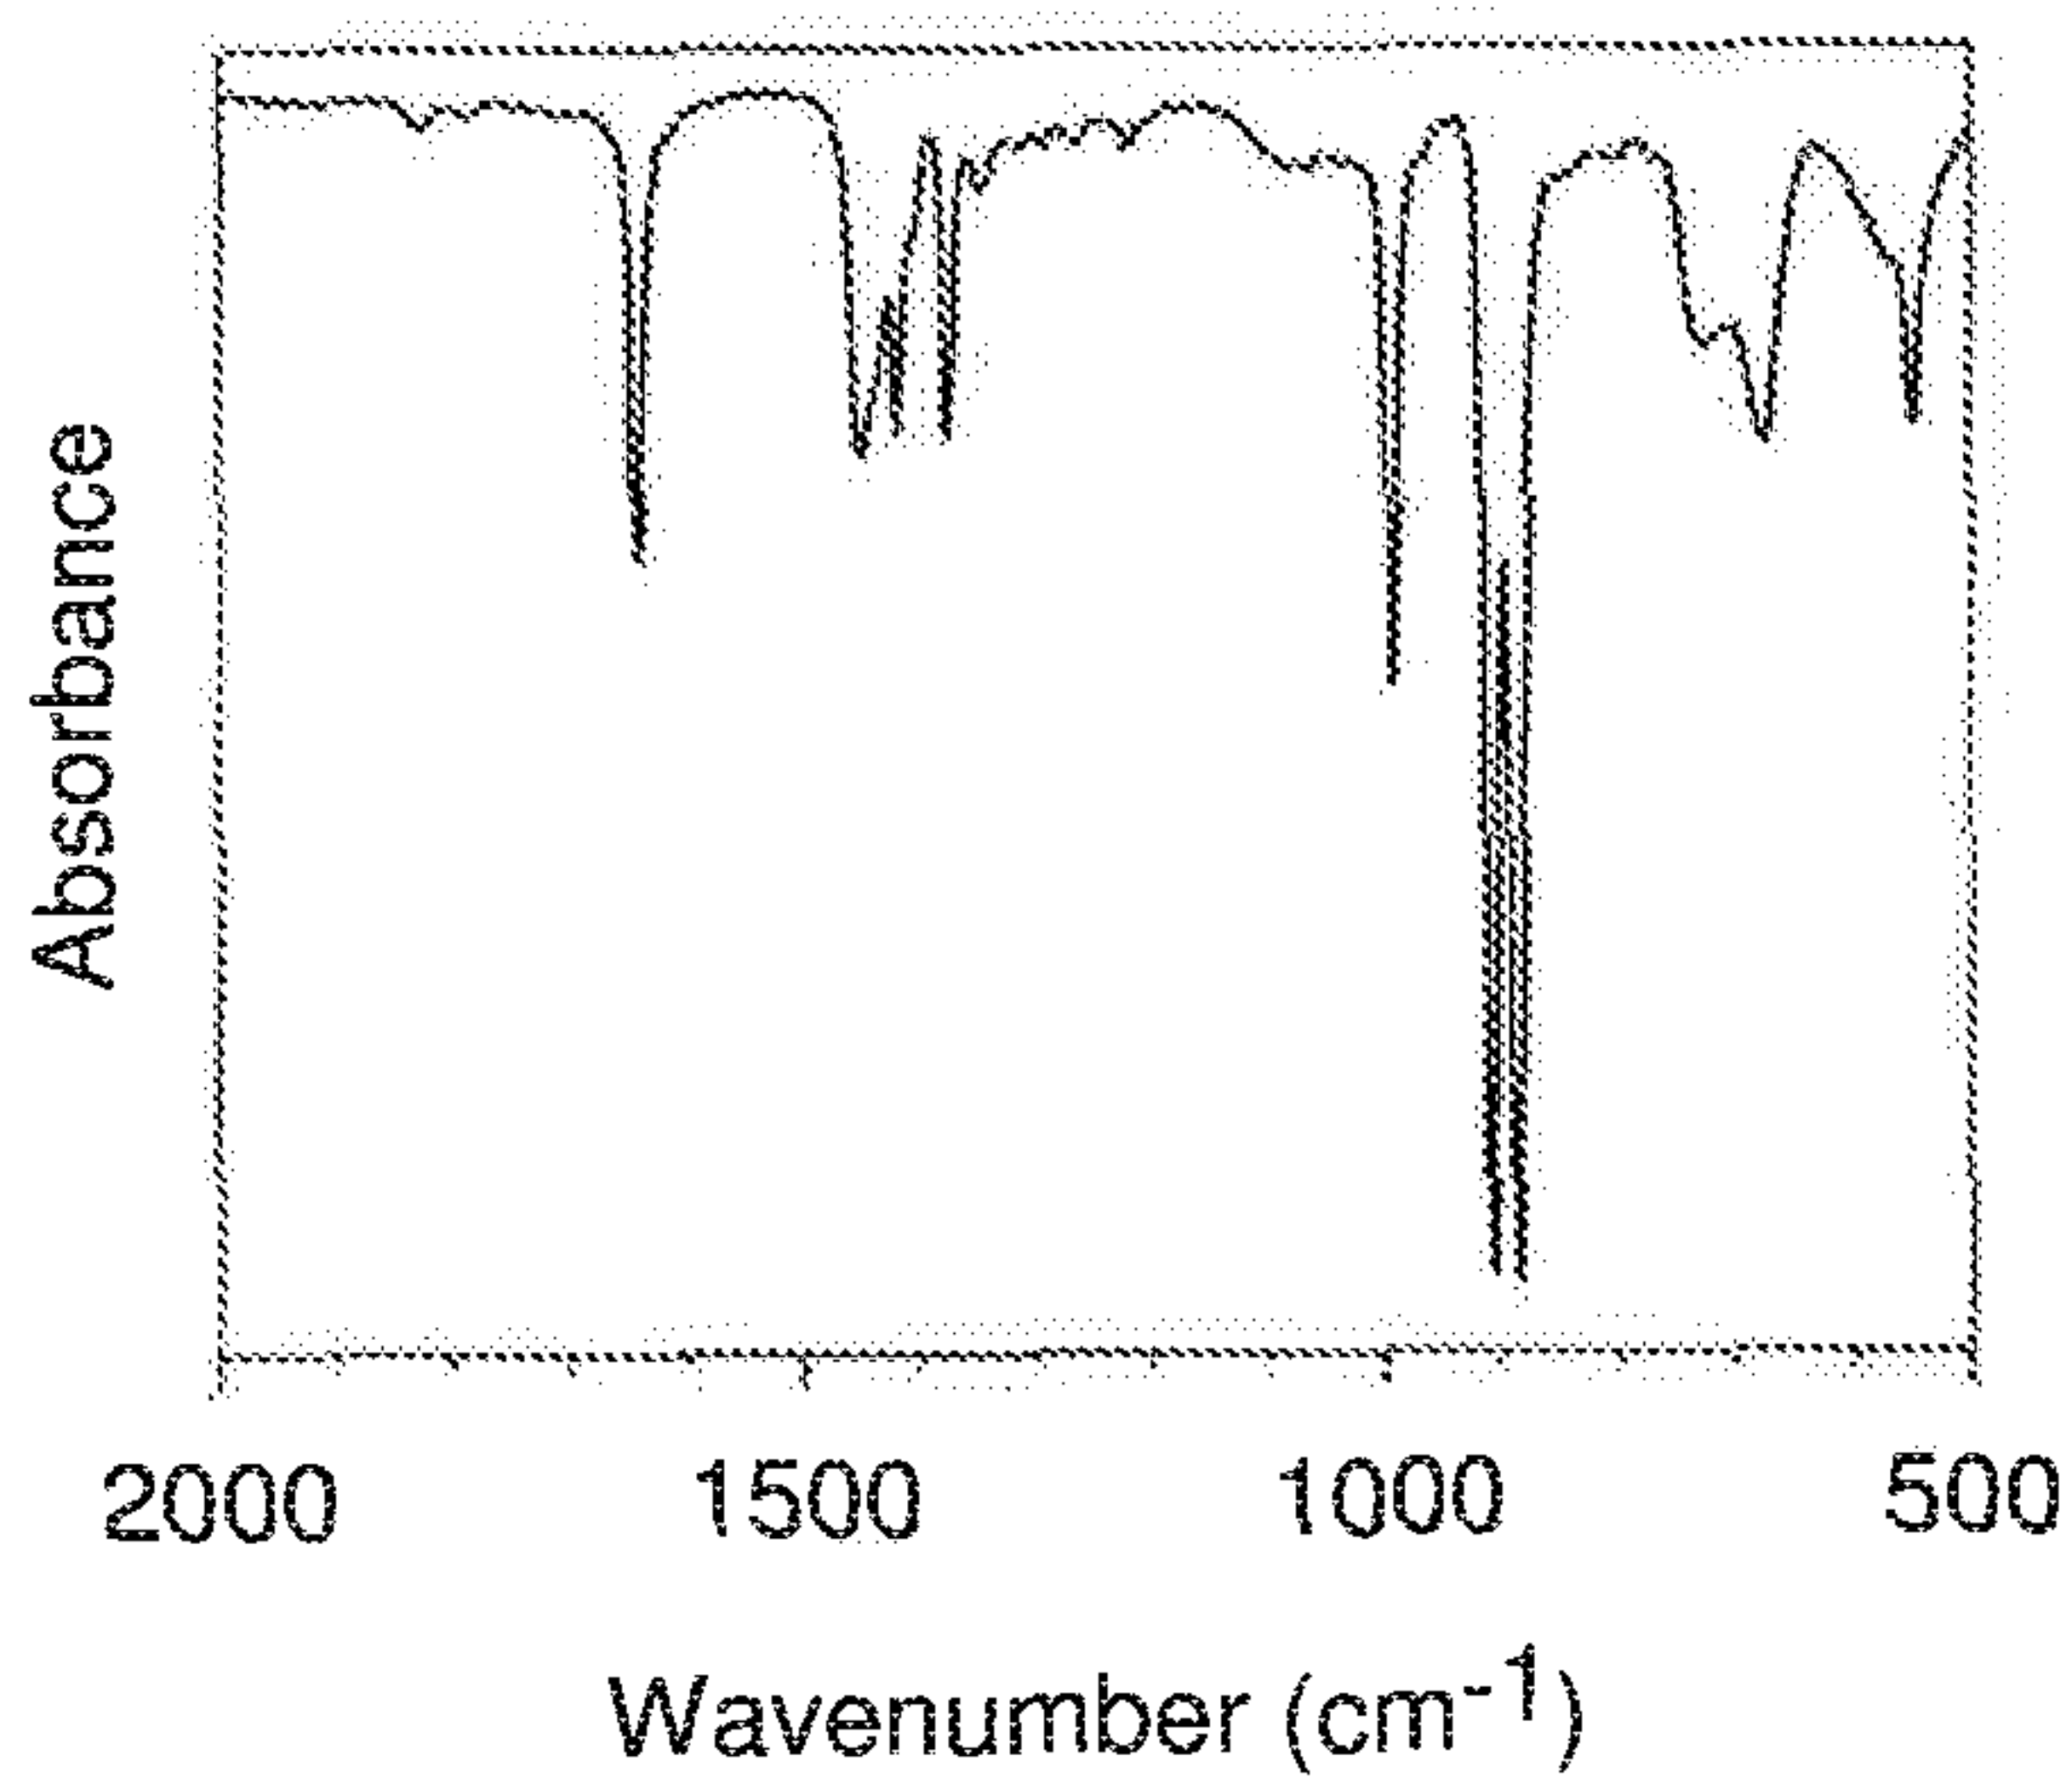


FIGURE 12