



(51) International Patent Classification:

C09B 35/023 (2006.01) *C09B 35/04* (2006.01)
C09B 35/037 (2006.01) *D21H 21/28* (2006.01)

(21) International Application Number:

PCT/EP2011/071289

(22) International Filing Date:

29 November 2011 (29.11.2011)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

10193153.3 30 November 2010 (30.11.2010) EP
61/482,351 4 May 2011 (04.05.2011) US

(71) Applicant (for all designated States except US): **KEMIRA OYJ** [FI/FI]; Porkkalankatu 3, FIN-00180 Helsinki (FI).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **MEIER, Helmut-Martin** [DE/DE]; Am Obersthof 3, 40883 Ratingen (DE). **HEIDE, Christof** [DE/DE]; Habichtweg 13, 51429 Bergisch Gladbach (DE). **STRUMPF, Klaus-Günter** [DE/DE]; Weiherstr. 102, 51373 Leverkusen (DE). **HÜBBE, Thomas** [DE/DE]; Hochwinkel 22, 51069 Köln (DE).

(74) Agent: **BUBLAK, Wolfgang**; Bardehle Pagenberg, Prinzregentenplatz 7, 81675 München (DE).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report (Art. 21(3))

(54) Title: AZO DYES

(57) Abstract: The present invention relates to new azo dyes, a process for their preparation, and their use for dyeing or printing fibrous materials, to produce materials with brownish shades.



WO 2012/072632 A1

Azo dyes


5 The invention relates to new azo dyes, a process for their preparation, and their use for dyeing or printing materials, in particular organic or fiber-containing materials, to produce materials with brownish shades.

10 In order to produce papers with a brown shade, it is known to dye paper with mixtures of different dyes. For example, WO-A 2007/057370 is directed to liquid formulations containing the direct dyes C.I. Direct Brown 44 and Direct Yellow 11. EP-A-1 258 562 relates to dye mixtures containing two anionic dyes each with a different, defined absorption maximum. WO-A 2004/048478 teaches the production of a low-salt
15 liquid formulation of C.I. Direct Brown 44. The production process comprises production of vesuvine from m-phenylenediamine and direct conversion to C.I. Direct Brown 44. Vesuvine and its coupling products, such as C.I. Direct Brown 44, have been known since the beginning of dye chemistry. For instance, the Colour Index (C.I.) shows that C.I.
20 Direct Brown 44 is obtained by formally coupling two parts of sulfanilic acid onto one part of vesuvine (Bismarck Brown C.I. 21000). However, the lightfastness of the produced brown papers is often not sufficient. From JP 2001-004833 A1 there is known a polarizing film for liquid crystal projector including an azo compound of specified structure which
25 contains at least two azo groups linked by three aromatic groups.

 In paper mills or paper processing industry, brownish papers often are stored without being prevented from the influence of light or weather, which results in change of color or color shade. Therefore, there is a need
30 for improving the lightfastness of brownish papers.

Surprisingly, it has been found that this problem can be solved by new azo dyes containing at least two azo groups, and aromatic and/or heterocyclic groups. These azo dyes are soluble in water and enable the production of materials, in particular of organic or fiber-containing materials, e.g. paper or board, in brownish shades and with high lightfastness. In particular, it was surprising that the brownish shade could be obtained with the use of one dye only, in contrast to the prior art which commonly uses dye mixtures for that purpose.







Thus, the present invention provides compounds of the general formula (1)

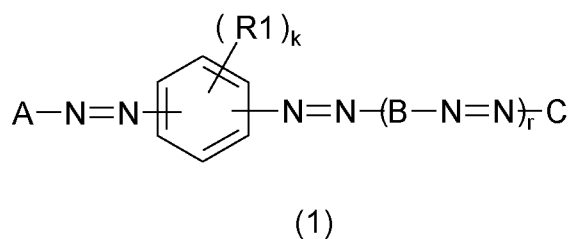



wherein


- 15 R1 represents hydrogen; substituted or unsubstituted C₁₋₅-alkyl; substituted or unsubstituted C₁₋₅-alkoxyl; substituted or unsubstituted aryl; substituted or unsubstituted phenyl; p-C₁₋₅-alkoxyphenyl; di(C₁₋₅-alkyl)amino groups; amino, sulfonic, carboxyl, hydroxyl, halogen, or nitro groups, wherein R1 is
- 20 attached to the aromatic ring at any position;
- k is an integer from 1 to 4;
- r is an integer of 0 or 1;
- A, C represent, independently of each other,

3

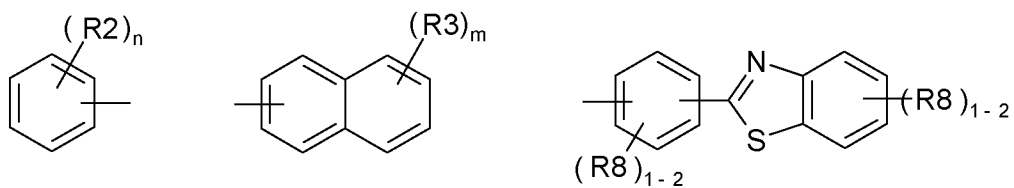


or tautomeric forms



, wherein D represents C with the proviso that D is not equal to 

B represents

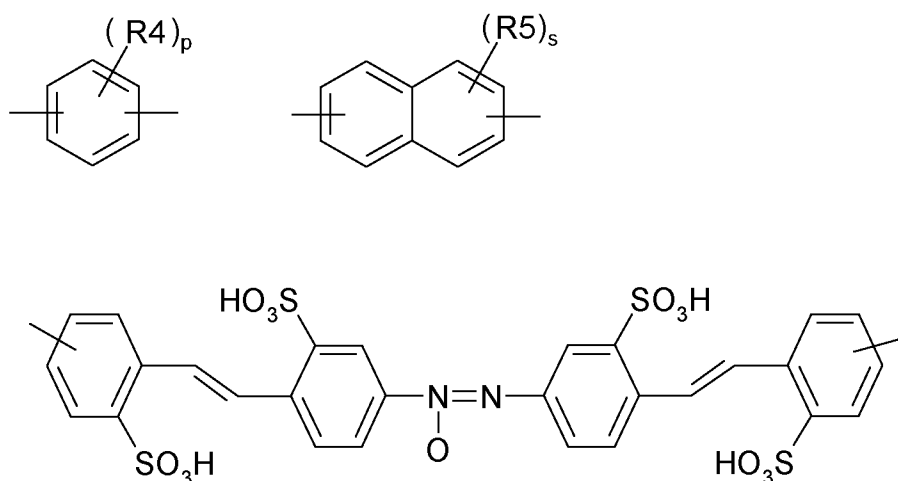

wherein

5 R2, R3, R4, R5, independently of each other, represent hydrogen; substituted or unsubstituted C_{1-5} -alkyl; substituted or unsubstituted C_{1-5} -alkoxyl; substituted or unsubstituted aryl; substituted or unsubstituted phenyl; p- C_{1-5} -alkoxyphenyl; di(C_{1-5} -alkyl)amino groups; amino, sulfonic, carboxyl, hydroxyl, halogen, or nitro groups; wherein R2, R3, R4, R5 are attached to
10 the aromatic ring at any position;


and wherein

R8, R10, and R11, independently of each other, represent hydrogen, substituted or unsubstituted C_{1-4} -alkyl, substituted or unsubstituted C_{1-4} -alkoxy, substituted or unsubstituted aryl;
15 substituted or unsubstituted phenyl; sulfonic, carboxyl, amino, nitro, hydroxyl, or halogen groups, and
X represents O, S, NH, SO_2 , $CH=CH$, $NHCO$, $NH-CO-NH$, $N=N$, $N=N(O)$;

m, s independently of each other, are an integer from 1 to 4; and

20 n, p independently of each other, are an integer from 1 to 3.

A more preferred compound of formula (1) is represented by formula (1a)

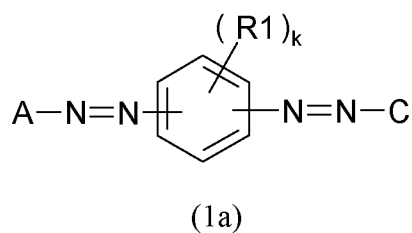


wherein

R1 represents hydrogen; substituted or unsubstituted C₁₋₅-alkyl, substituted or unsubstituted C₁₋₅-alkoxyl, amino, sulfonic, or hydroxyl groups, wherein R1 is attached to the aromatic ring at any position;

k is an integer from 1 to 2;

A, C represent, independently of each other,

10

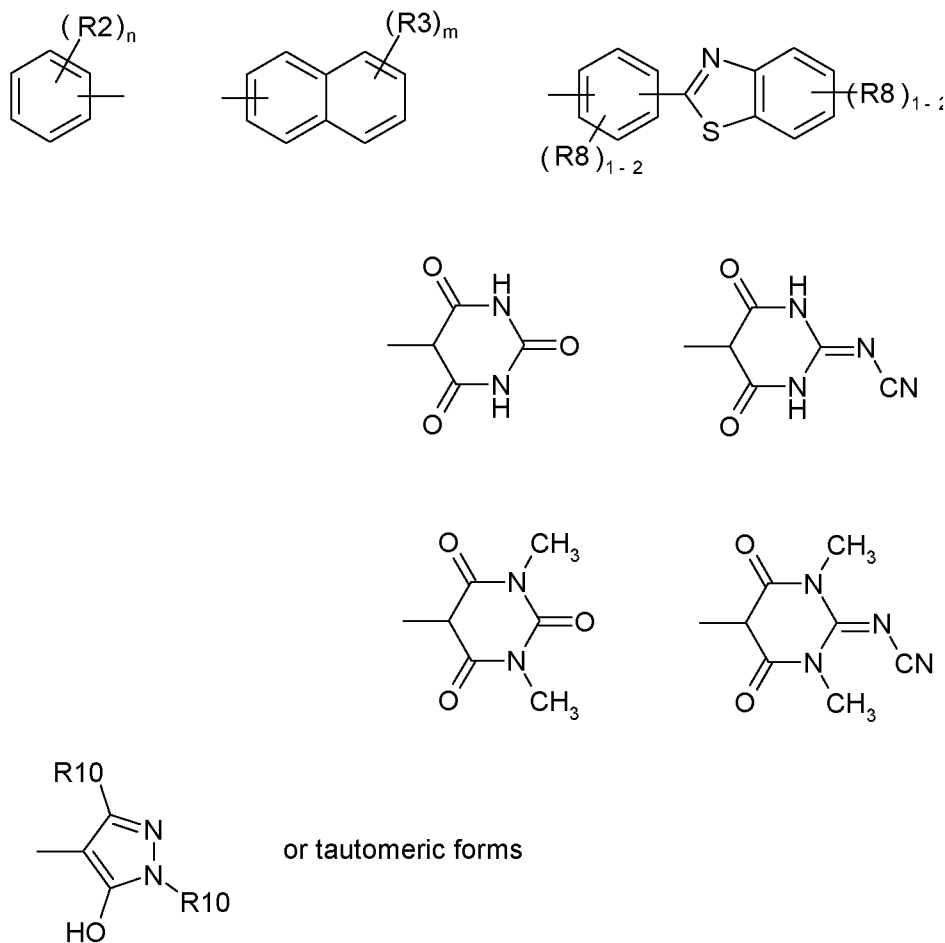


m, n independently of each other, are an integer from 1 to 3;


R2, R3, R8, and R10 are defined as described above.

Surprisingly, it was found that compounds of formula (1) are soluble in water, and materials dyed with those dyes show improved lightfastness.


The invention also refers to a process for preparing the compounds of formula (1), comprising diazotizing a compound of formula (2)



coupling the obtained product, depending on the value of r (0 or 1), with a compound of the general structure of B or C as defined above. If r is 0, the product is coupled to a compound of the general structure of C. If r is 1, the product is coupled to a compound of the general structure of B followed by diazotizing and coupling to a compound of the general structure of C.

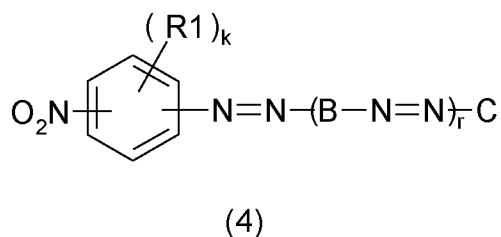

The resulting compound (4) is treated with a reducing agent, such as sugar, dextrose, formaldehyde, sodium hydrosulfite or hydrogen, to reduce the nitro group to an amino group and yield compound (5).

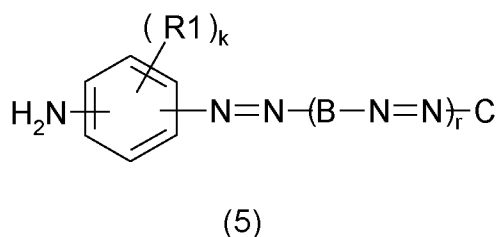

That compound (5) is diazotized and coupled to a compound of the general structure A to obtain the compound of formula (1).

Further, the invention refers to the use of the compounds of formula (1)
5 for dyeing or printing materials, in particular materials containing cellulose and/or polyamide, preferably paper or board. In addition, the invention relates to a process for dyeing or printing materials, in particular materials containing cellulose and/or polyamide, preferably paper or board, and to materials or paper obtained by that process.
10 Preferred embodiments of the invention are described in the description hereinafter and the claims. In the present invention, the term paper is used to cover paper or board.

In formula (1), the substituents R1 to R4, R8, R10 and R11 each are,
15 independently of each other, attached to the corresponding aromatic rings at any position thereof. Likewise, the substituents A, B, C and D are attached to the azo groups at any position. In the context of the invention, the alkyl or alkoxy group can be linear or branched. If the alkyl, alkoxy, phenyl or aryl group is substituted, the possible substituents are amino,
20 hydroxyl, sulfonic, or carboxylic groups, which can be attached at any position of the alkyl, alkoxy, phenyl or aryl group.




In the present invention, a sulfonic group means the group $-\text{SO}_3\text{M}$, wherein M is a cation. Preferably M is hydrogen, alkaline metal, earth
25 alkaline metal, ammonium, or mono-, di-, tri- or tetra-substituted ammonium, in particular M is mono- C_{1-5} -alkyl-, di- C_{1-5} -alkyl-, tri- C_{1-5} -alkyl-, tetra- C_{1-5} -alkylammonium, mono- C_{1-5} -hydroxyalkyl-, di- C_{1-5} -hydroxyalkyl-, tri- C_{1-5} -hydroxyalkyl-, tetra- C_{1-5} -hydroxyalkyl-ammonium, or benzyltri- C_{1-5} -hydroxyalkylammonium; or ammonium
30 based on amines derived from nitrogen-containing five- or six-membered saturated heterocycles, such as pyrrolidine, piperidine, morpholine or piperazine or their N-monoalkyl- or N,N-dialkyl-substituted products. In the present invention, sulfonic and carboxyl groups are present in the

form of free acids or in the form of salts, preferably alkali, earth alkali, ammonium, alkyl ammonium, or alkanol ammonium salts, in particular as alkanol ammonium salts. Preferred ammonium salts are defined above.


- 5 The substituents R1 to R4, R8, and R11, independently of each other, preferably represent sulfonic, carboxyl, hydroxyl, methoxy or amino groups. Preferably, R8, R10, and R11, independently of each other, represent hydrogen, substituted or unsubstituted C₁₋₄-alkoxy, substituted or unsubstituted aryl, sulfonic, carboxyl, amino, or hydroxyl. In a more preferred embodiment, R10 represents substituted or unsubstituted aryl. In particular, R10 represents hydrogen, CH₃, COOH, COOalkyl, Cl, sulfonic (in particular SO₃H), or aryl substituted by hydrogen, CH₃, COOH, COOalkyl, Cl, or sulfonic (in particular SO₃H) groups. In preferred embodiments of formula (1), k is 1 to 3, most preferably 1 or 2.






15

Preferred compounds of formula (1) are:

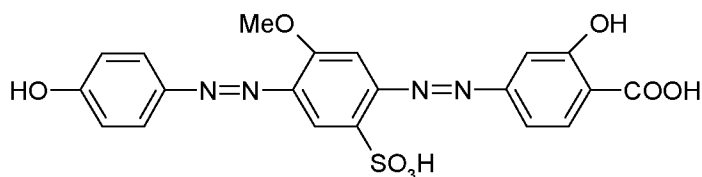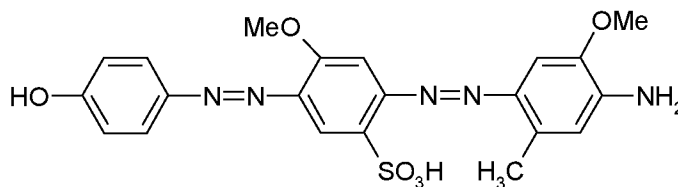
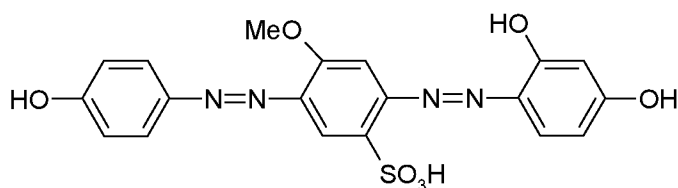


20





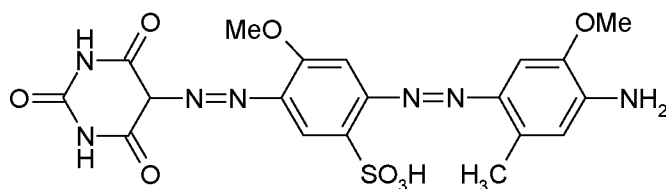


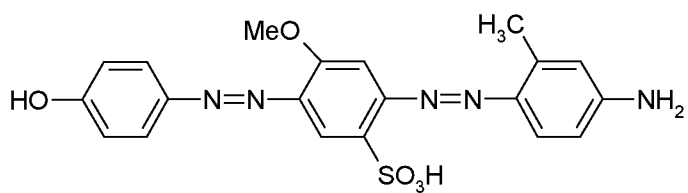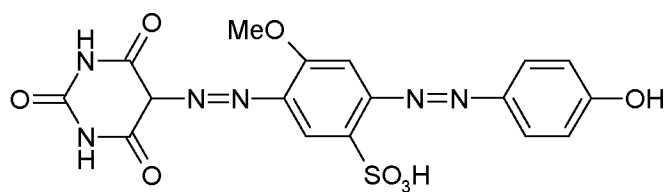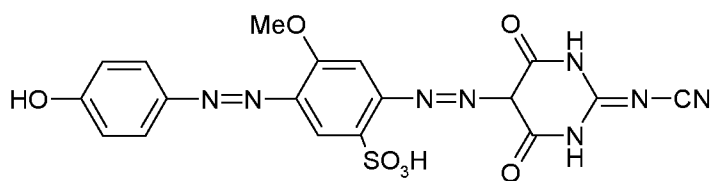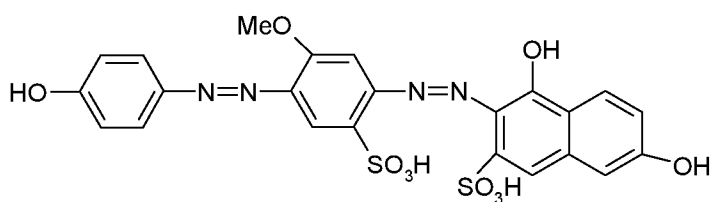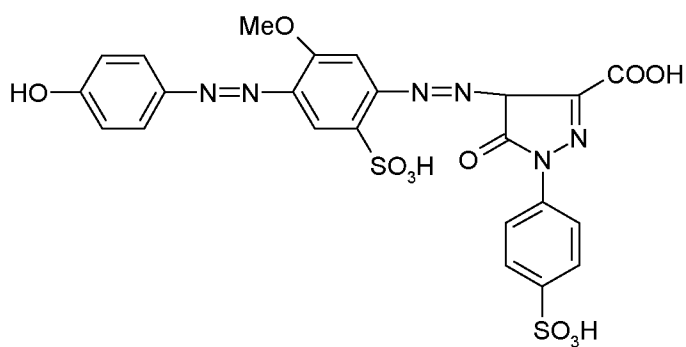



5

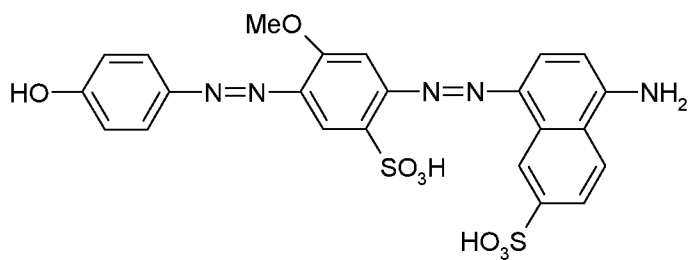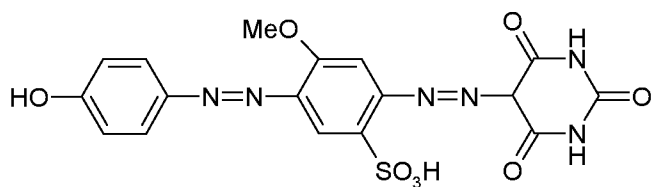


10

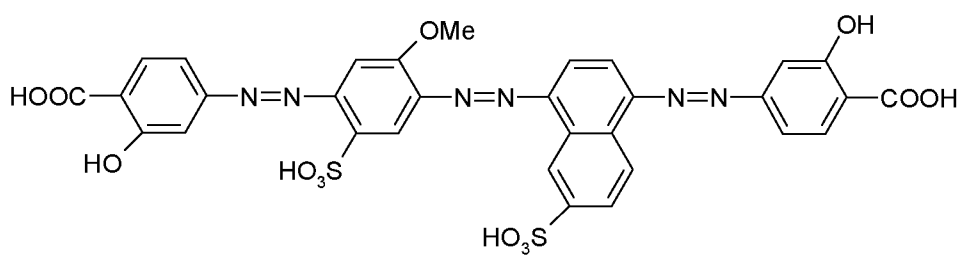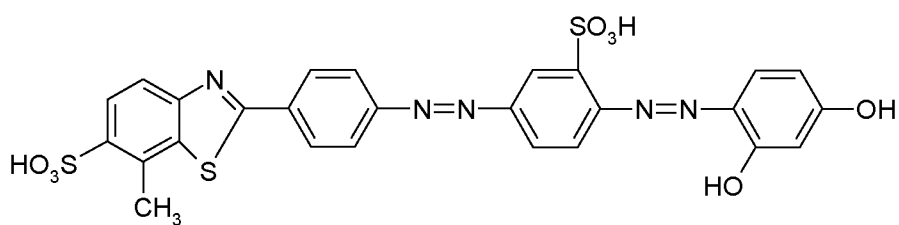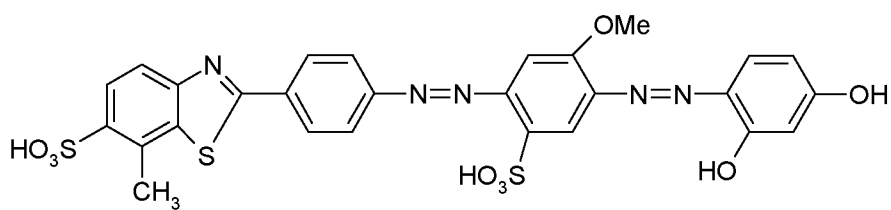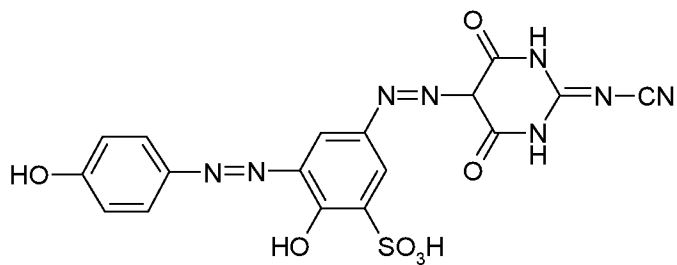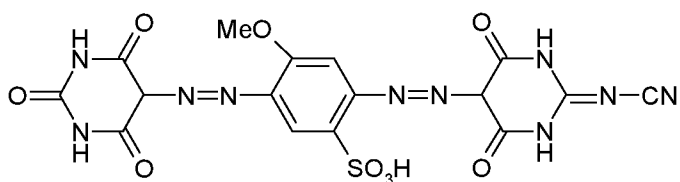






5

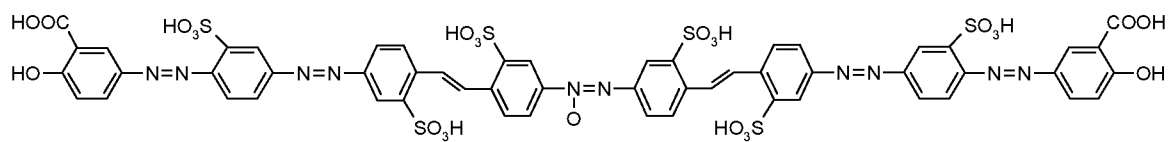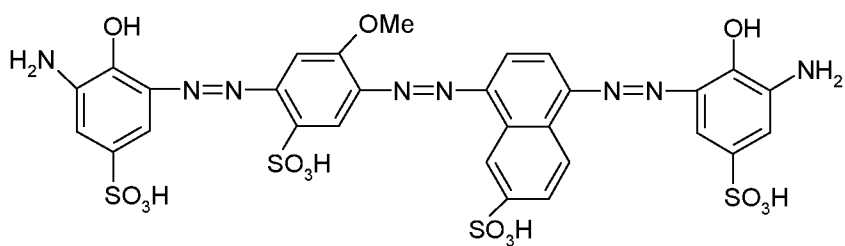


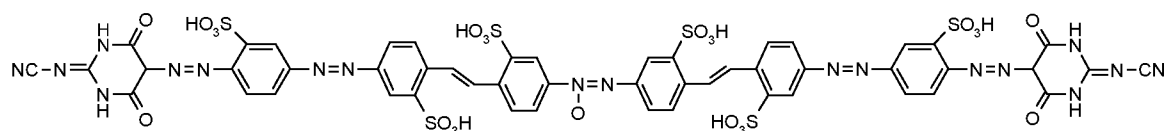


More preferred compounds of formula (1) are:

5

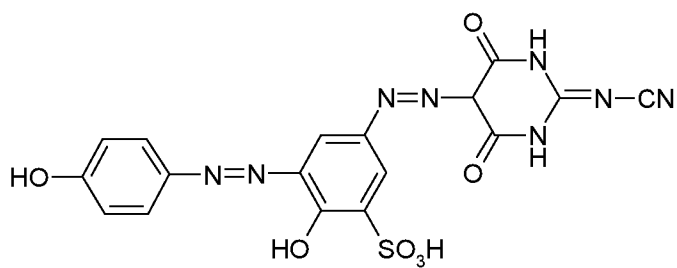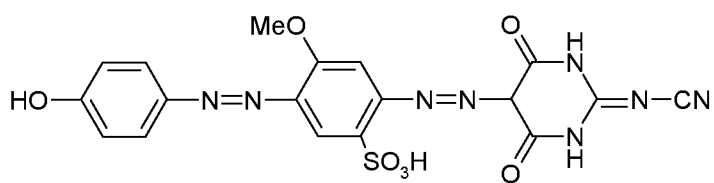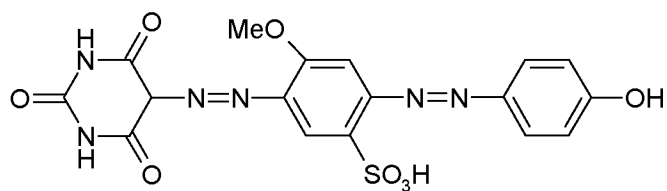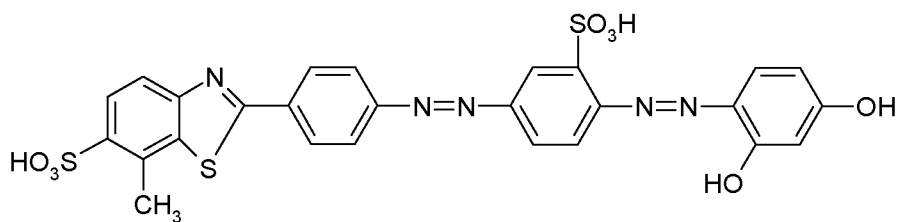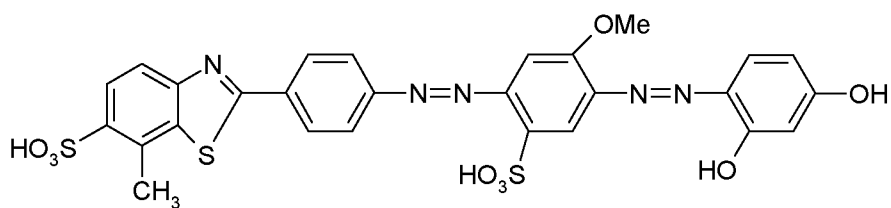


10

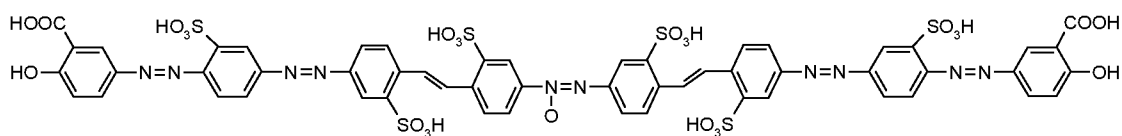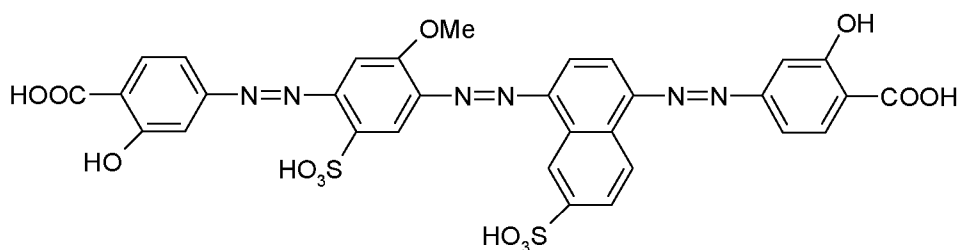

5


The invention also provides a process for preparing the compounds of formula (1) using known procedures, such as diazotization and coupling steps. Generally, the compounds can be prepared by diazotizing a starting primary aromatic amine, and coupling to another primary aromatic amine. The obtained reaction product is diazotized again and coupled to a third primary aromatic amine which, depending on the desired compound of formula (1), in turn can be diazotized and coupled to a fourth compound to yield the desired compound. In addition, it is also possible to use a nitro group-containing compound as precursor for a primary amino group-containing compound by reducing the nitro group with appropriate reagents.

As an example, the synthesis of the above described preferred dye having the formula

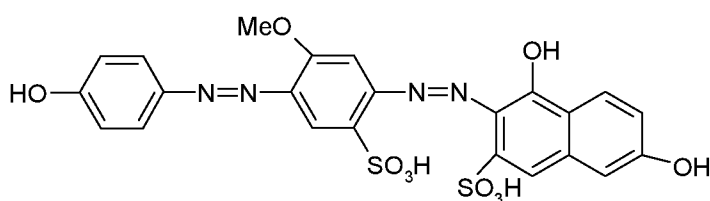


20

can be accomplished by starting with 5-amino-4-methoxy-2-nitrobenzenesulfonic acid having the formula




5

which is diazotized and reacted with phenol to a nitro group-containing compound of the following formula.

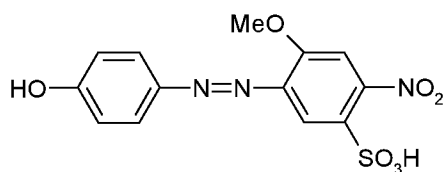

10


After reducing the nitro group by an appropriate reducing agent, e.g. a saccharide or sugar, to an amino group, the molecule is diazotized and coupled to di-hydroxy-J-acid having the formula



15


to yield the desired dye.

Further, it is possible to react nitro group-containing molecules in presence of a reducing agent to build up the connecting $N=N(O)$ group between two molecules. As an example, the synthesis of the above described dye having the formula



25


can be accomplished by starting with an appropriate azo compound, such as



5


Two molecules are reacted with each other to build the desired dye by means of a reducing agent, such as sugar.

It is also possible to start with appropriate azo compounds and react those with corresponding amino-containing compounds to yield the desired dyes. As an example, the synthesis of the above described dye having the formula

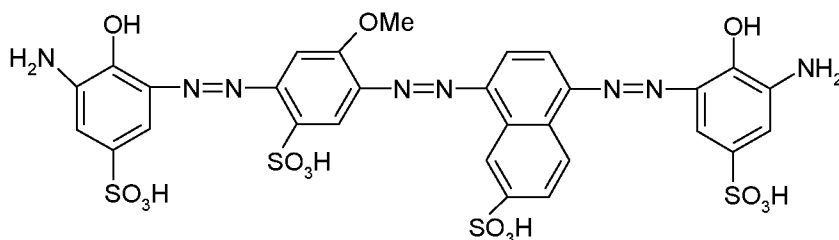


15

can be accomplished by starting with an appropriate azo compound, such as 5-amino-8-((4-amino-2-methoxy-5-sulfophenyl)diazenyl)naphthalene-2-sulfonic acid having the formula

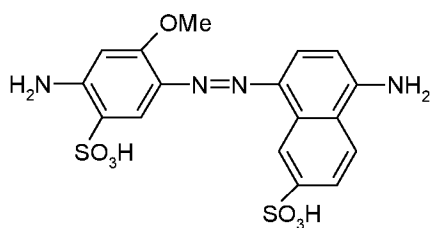

20

which is tetra-azotized and coupled with



3-amino-4-hydroxybenzenesulfonic acid

to yield the desired azo dye.

- 5 Thus, the preparation involves diazotization and coupling process steps, and optionally reduction steps.

Azo dyes and their production involving diazotization and coupling processes are well-known and familiar to those skilled in the art.

10

In a further preferred embodiment, generally first a diazonium salt is prepared followed by a coupling reaction. In a suitable embodiment, an amine compound is dissolved or suspended in aqueous hydrochloric or sulfuric acid, and a concentrated aqueous sodium nitrite solution is added. An excess of 2.5-3 equivalents of acid per equivalent of amine compound is further added at a temperature of 0-10°C, preferably of 0-5°C, to generate the diazonium salt. The obtained acidic diazonium salt is added to a, preferably aqueous, solution of the coupling component. The coupling reaction may be completed after mixing of the components.

20


Another suitable procedure starts with solving the amine compound in water or weak alkaline solution, and adding the calculated amount of sodium nitrite solution to this amine solution. The obtained amine-nitrite solution is stirred into an ice-cooled acid solution which is present in a vessel. It is also possible to add the acid or ice-cooled acid solution to the amine-nitrite solution at a temperature of 0-10°C, preferably of 0-5°C. Depending on the amine compound even 0-40°C may be possible.

25

Further, it is possible to dissolve water-insoluble amine compounds in organic solvents, such as ethanol, acetone, pyridine, acetic acid, or formic acid. After addition of acid, diazotizing is carried out in the usual manner by means of sodium nitrite solution. Instead of sodium nitrite, 5 diazotization agents, such as nitrosyl sulfuric acid, nitrosyl chloride, alkyl nitrite or nitrous gases also can be used. Further, it is possible to add emulsifiers, dispersing agents or surfactants during the reaction.


10 The preparation process is not limited to the methods described above, but may be carried out by applying procedures known from the state of the art for diazotization and coupling procedures or as known from the literature (e.g. Klaus Hunger (Editor), *Industrial Dyes*, Wiley-VCH, Weinheim, 2003, pages 19, 28).

15 In a preferred process of the invention, the compounds of formula (1) are obtained by the following procedure. The process starts with an amine compound of formula (2)




20

which is diazotized and coupled, depending on the value of r (0 or 1), with a compound of the general structure of B or C as defined above. If r is 0, the product is diazotized and coupled to a compound of the general structure of C. If r is 1, the product is diazotized and coupled to a 25 compound of the general structure of B followed by diazotizing and coupling to a compound of the general structure of C.

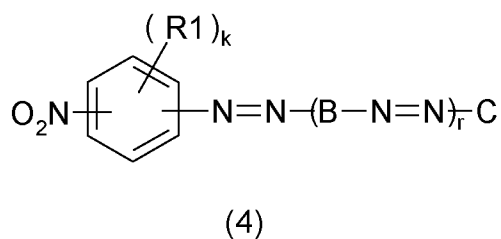


The resulting compound (4) is treated with a reducing agent, such as sugar, dextrose, formaldehyde, sodium hydrosulfite, or hydrogen, to
 5 reduce the nitro group to an amino group and yield compound (5).

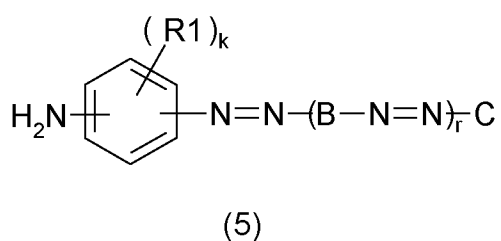

The compound (5) is diazotized and coupled to a compound of the
 10 general structure A to obtain the compound of formula (1).


Furthermore, it is also possible to start with appropriate azo compounds with amino groups to yield the azo dyes of the invention.

15 Preferred compounds of formula (2) are:

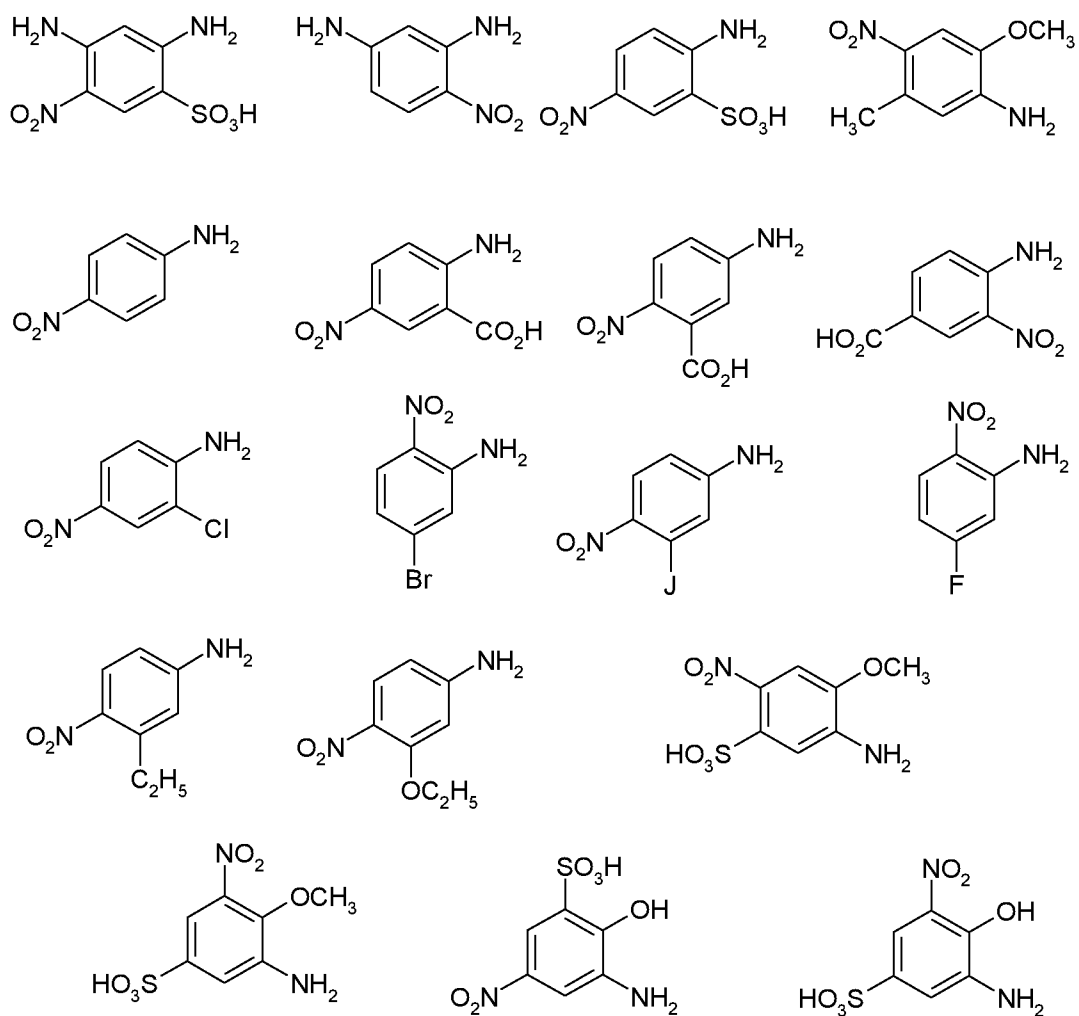


The substituents shown also may be located at other positions of the aromatic rings.

Preferred compounds of formula (4) are:

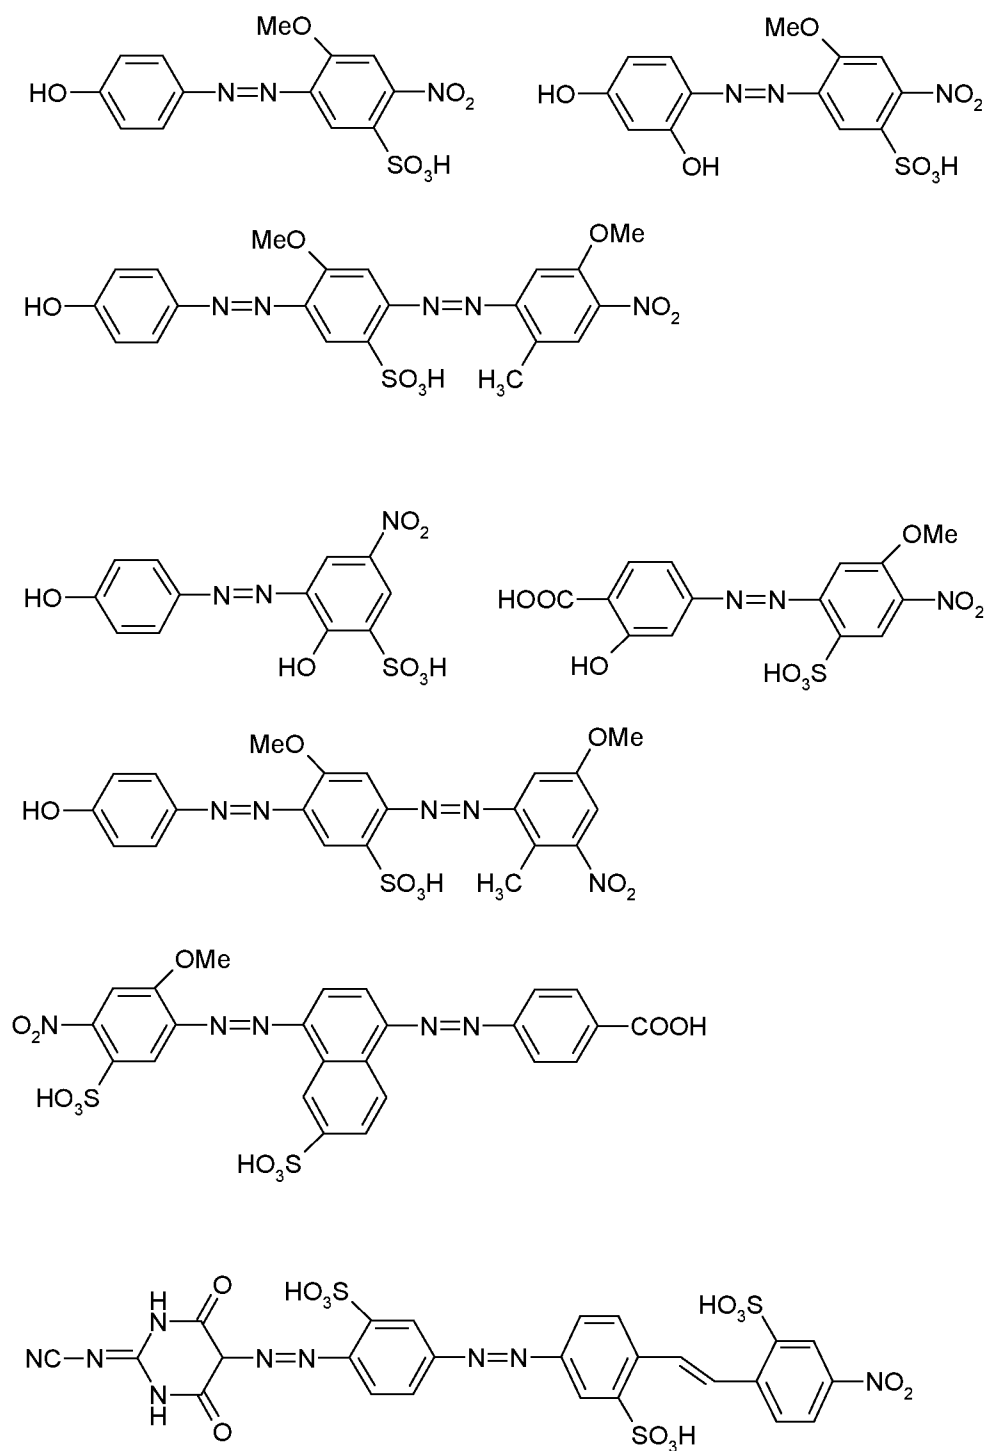

Preferred compounds of formula (5) are:

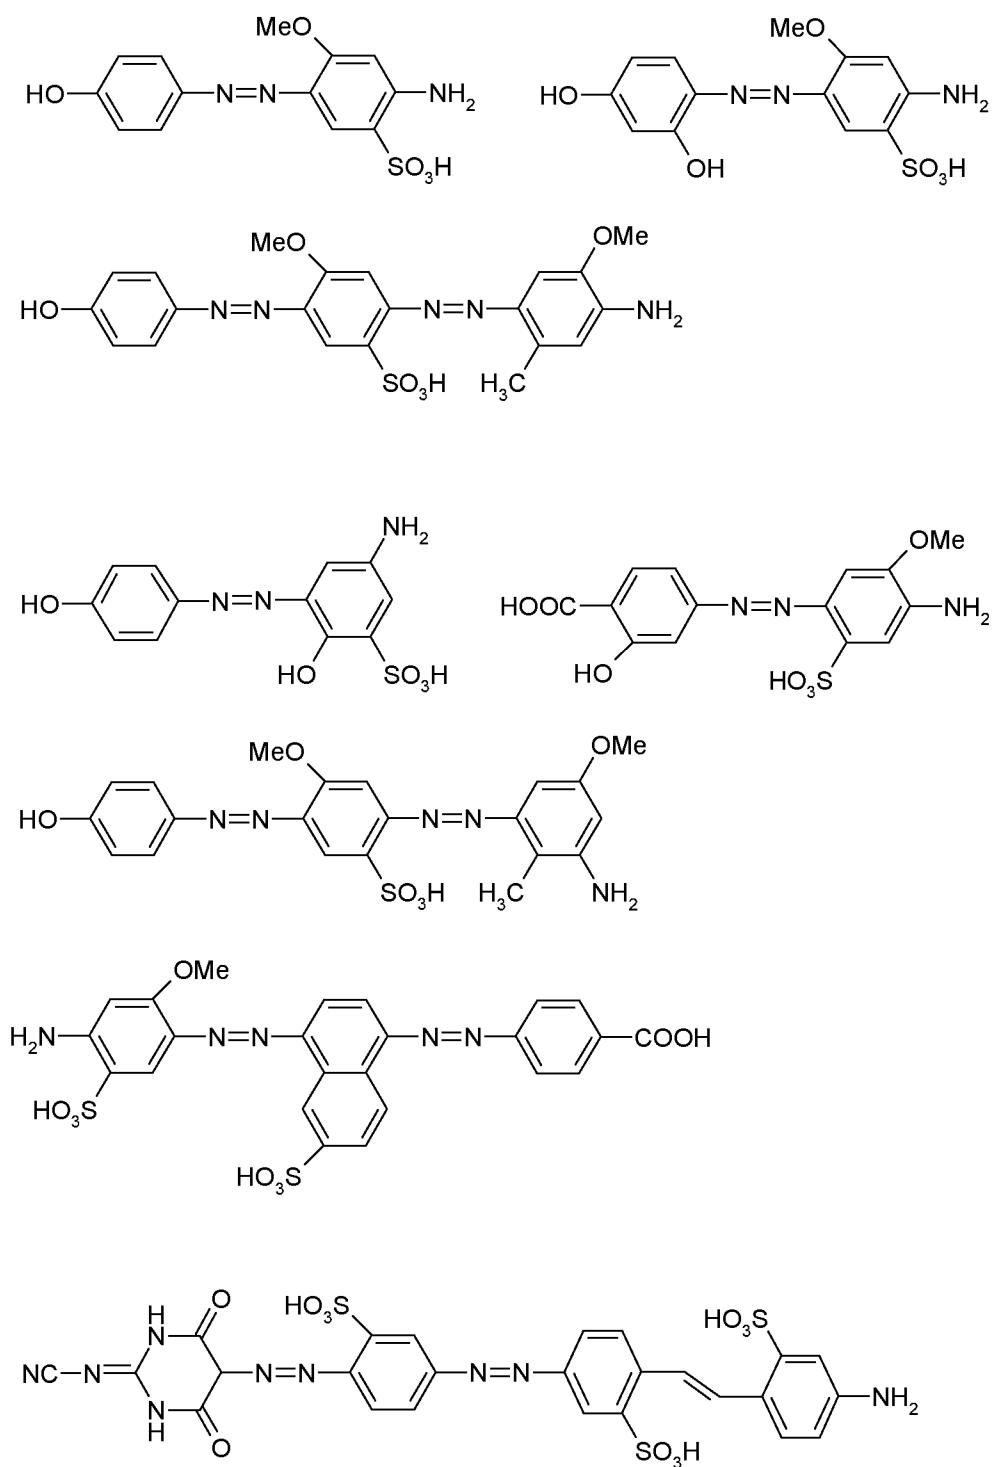

The dyes of formula (1) can be isolated from the reaction medium by
 5 conventional processes, for example by salting out with an alkali metal
 salt, filtering and drying, if appropriate under reduced pressure and at
 elevated temperature. Depending on the reaction and/or isolation

conditions, the dyes of formula (1) can be obtained as free acid, as salt or as mixed salt which contains for example one or more cations selected from alkali metals ion, for example the sodium ion, or an ammonium ion or alkyl ammonium cation, for example mono-, di- or trimethyl-, or -ethyl ammonium cations, or an alkanol ammonium cation, for example mono-, di- or tri-ethanol ammonium cations. The dyes can be converted from the free acid into a salt or into a mixed salt or vice versa or from one salt form into another one by conventional techniques. If desired, the dyes can be further purified by diafiltration, wherein undesired salts and synthesis by-products are separated from the crude anionic dye. The removal of undesired salts and synthesis by-products and a partial removal of water from the crude dye solution can be carried out by means of a semi-permeable membrane by applying a pressure whereby the dye is obtained, without the undesired salts and synthesis by-products, as a solution and if desired as a solid material in a conventional manner. Such procedures belong to the state of the art and are described for example in WO-A 2007/057370.

The compounds of formula (1) can be utilized in form of a liquid formulation, preferably an aqueous liquid formulation, a moist press cake, or in dried form. In the last two cases, when preparing a solution alkylamine is preferably added.

According to a more preferred embodiment of the invention, the compound of formula (1) is present or used in form of an aqueous liquid formulation comprising at least one alkylamine whose one, two or three alkyl radicals may each be substituted by one or two hydroxyl groups and/or amino groups and/or interrupted by one or two oxygen atoms in ether function, the alkylamine being present in an amount of 0.5-15% by weight based on the total weight of the liquid formulation. Preference is given to alkylamines whose two or three alkyl radicals may each be substituted by one or two hydroxyl groups and/or interrupted by one or two oxygen atoms in ether function. Particular preference is given to

mono-, di- and trialkanolamines. Preferred alkylamines are ethanolamine, diethanolamine, triethanolamine, dimethylethanolamine, N-methyldiethanolamine, monomethylethanolamine, 2-(2-aminoethoxy)ethanol, aminoethylethanolamine. Particular preference is given to ethanolamine, especially diethanolamine and triethanolamine and ethoxylated or propoxylated triethanolamine.

Suitable additives in the liquid formulation can be C₁-C₄-alkanols, for example methanol, ethanol, propanol, isopropanol, butanol, isobutanol, sec-butanol or tert-butanol; carboxamides, such as N,N-dimethylformamide or N,N-dimethylacetamide; ketones or keto alcohols, such as acetone, methyl ethyl ketone or 2-methyl-2-hydroxypentane-4-one; mono-, oligo- or polyalkylene glycols or -thioglycols which have C₂-C₆-alkylene units, such as ethylene glycol, 1,2- or 1,3-propylene glycol, 1,2- or 1,4-butyleneglycol, hexane-1,6-diol, diethylene glycol, triethylene glycol, dipropylene glycol, thiodiglycol, polyethylene glycol or polypropylene glycol; other polyols, such as glycerol or hexane-1,2,6-triol; C₁-C₄-alkyl ethers of polyhydric alcohols, such as ethylene glycol monomethyl ether, ethylene glycol monoethyl ether, diethylene glycol monomethyl ether, diethylene glycol monoethyl ether, diethylene glycol monobutyl ether (butyldiglycol) or triethylene glycol monomethyl ether or triethylene glycol monoethyl ether; C₁-C₄-alkyl esters of polyhydric alcohols, γ -butyrolactone or dimethylsulfoxide. Suitable solubilizing additives are further lactams, such as ϵ -caprolactam, pyrrolidin-2-one or N-methylpyrrolidin-2-one, cyclic ureas, such as 1,3-dimethylimidazolidin-2-one or 1,3-dimethylhexahydropyrimidin-2-one, and also polyacrylic acids, polyacrylic acid derivatives, polyvinyl acetates, polyvinyl alcohols, polyvinylpyrrolidones, polysiloxanes or copolymers of the respective monomers. It is further possible to use oligomers of ethylene oxide or propylene oxide or derivatives of these oligomers.

The dyes of formula (1) and their salts are particularly suitable for dyeing or printing organic material, fibrous or fiber-containing material, in particular materials containing lignocellulosic material, cellulose and/or polyamide, preferably materials consisting of natural or synthetic polyamides, cellulose, lignocellulosic material, or substrates like wool, leather, textile or paper or board. The material may be of wood and/or straw origin, mechanically and/or chemically produced, in particular by any suitable pulping or refining technique normally employed in papermaking, e.g. by thermomechanical pulping (TMP), chemi-mechanical pulping (CMP), chemithermomechanical pulping (CTMP), groundwood pulping (GW), alkaline sulphate (kraft) pulping, acid sulphite pulping and/or semichemical pulping. The material may also contain or consist of recycled fiber or pulp, especially made of waste paper. Polyamide or lignocellulosic material may be in fibrous or non-fibrous form. The fibrous material is preferably of wood and/or straw origin, mechanically and/or chemically obtained, e.g. by thermomechanical pulping (TMP), chemimechanical pulping (CMP), chemithermomechanical pulping (CTMP), groundwood pulping (GW), alkaline sulphate (kraft) pulping, acid sulphite pulping and/or semichemical pulping. The fibrous material or pulp may also contain or consist of recycled fiber or pulp, especially made of waste paper. The pulp used may contain, in addition to the fibrous material, e.g. fillers and/or auxiliary chemicals, before or after dyeing the pulp. In a most preferred embodiment, the material is paper or board. The obtained shades can be orange to brownish, or reddish to brownish. Further, the dyes of formula (1) and their salts are suitable for producing printing inks, especially ink-jet inks, and for using these inks for printing materials, in particular organic or fibrous material, for example materials consisting of natural or synthetic polyamides, cellulose or substrates like wool, leather, textile, paper or board. Preferably, the dyes of formula (1) and their salts are used to dye paper in orange to brownish shades, in particular in brownish shades.

The invention also relates to a process for dyeing or printing organic material, fibrous or fiber-containing material, in particular materials containing lignocellulosic material, cellulose and/or polyamide, preferably lignocellulosic- or cellulose-containing material, wherein the material is brought into contact with the compound of formula (1), wherein that compound is contained in a liquid formulation, a moist press cake, or in dried form, as described above. Preferably the material is brought into contact with an aqueous liquid formulation containing the compound of formula (1). Suitable materials are the same as described above with respect to the use of the dye of formula (1). The material may be of wood and/or straw origin, mechanically and/or chemically produced, in particular by any suitable pulping or refining technique normally employed in papermaking, e.g. by thermomechanical pulping (TMP), chemimechanical pulping (CMP), chemithermomechanical pulping (CTMP), groundwood pulping (GW), alkaline sulphate (kraft) pulping, acid sulphite pulping and/or semichemical pulping. The material may also contain or consist of recycled fiber or pulp, especially made of waste paper. Polyamide or lignocellulosic material may be in fibrous or non-fibrous form. The fibrous material is preferably of wood and/or straw origin, mechanically and/or chemically obtained, e.g. by thermomechanical pulping (TMP), chemimechanical pulping (CMP), chemithermomechanical pulping (CTMP), groundwood pulping (GW), alkaline sulphate (kraft) pulping, acid sulphite pulping and/or semichemical pulping. The fibrous material or pulp may also contain or consist of recycled fiber or pulp, especially made of waste paper. The pulp used may contain, in addition to the fibrous material, e.g. fillers and/or auxiliary chemicals, before or after dyeing the pulp. The dyeing of paper can be carried out in the pulp.

The invention also relates to a process for dyeing paper or board, wherein a pulp or a paper sheet or web is brought into contact with an aqueous preparation or formulation as described above. Preferably, the paper

sheet or web is contacted with the aqueous preparation in a size press, or in a coating application, preferably in a coating colour.

5 The following Examples illustrate the invention without limiting its scope.

EXAMPLES

10 The Examples demonstrate the synthesis of dyes of formula (1) and of comparative dyes, and their use in an aqueous preparation for dyeing paper. The lightfastness of the obtained paper was determined according to the test method described below. In case that products were salted out in the examples, the term x % b.v. means x % of volume of reaction mixture in g salt.

15

Dyeing process:

7 parts by weight of chemically bleached pinewood sulfite cellulose and 3 parts by weight of chemically bleached birchwood sulfite cellulose were beaten into water in a mixer. 1 part by weight of the liquid dye preparation was added to this stuff. Paper was made from that after a mixing time of 20 minutes.

20

Lightfastness test according to EN ISO 105-B02:

25 Test for color fastness - Part B02: Color fastness to artificial light: The xenon arc fading lamp test (ISO 105-B02:1994, including amendment 1:1998), which is commonly used by those skilled in the art, was used. Lightfastness is defined by the degree of decomposition of dyeing or printings on paper by sun light or artificial light. In the present test, paper having been dyed and radiated by the xenon arc fading lamp was measured against the standard blue wool scale ranging from 1 (lowest lightfastness) to 8 (highest lightfastness). The blue wool scale consists of 8 different blue dyes on wool with gradually increasing lightfastness from 1 to 8. After radiation of the dyed paper samples by the xenon arc

30

fading lamp in a weather-o-meter (a device which simulates rain and sunshine) the lightfastness was evaluated by comparison with the blue wool scale.

5 **Comparative Example 1**

Preparation of Direct Brown 44 according to WO-A 2007/057370

Stage 1:

28.12 g of m-phenylenediamine and 8.76 g of 20% by weight of hydrochloric acid were added to 344 ml of water. Ice was added in an amount of 338 g. Then, 15.04 g of sodium nitrite were introduced, followed by the dropwise addition of 78.86 g of 20% by weight hydrochloric acid within 50 minutes at $<3^{\circ}\text{C}$. After 10 minutes further 1.73 g of m-phenylenediamine were added and a pH of 3 was set using 13 g of aqueous sodium hydroxide solution (25% by weight). This was followed by stirring at 3°C for 1 hour.

Stage 2:

To a solution of 34.6 g of sulfanilic acid in 273.46 g of water and 32.4 g of aqueous sodium hydroxide solution (25% by weight) were added 279 g of ice and 68.9 g of sodium nitrite. The mixture was admixed with 82.76 g of hydrochloric acid (20% by weight) at $0-5^{\circ}\text{C}$ and subsequently stirred for 30 minutes. The obtained product was combined with the stage 1 product at 20°C in the course of 90 minutes. All the time, the pH was maintained at pH 5 using aqueous sodium hydroxide solution (25% by weight). After 3 hours at 20°C the obtained mixture was adjusted to pH 7.5 and then heated to $55-60^{\circ}\text{C}$. Hydrochloric acid (20% by weight) was used to adjust the pH to 1, and the solids were filtered off with suction and washed with water to obtain about 300 g of a moist press cake of Direct Brown 44 whose solids content was 22% by weight (sodium content: $<0.5\%$ by weight in the dry material).

Production of a liquid formulation of Direct Brown 44:

80.33 g of the moist press cake (corresponding to 20.0 g dry weight) were dissolved with 5.25 g of diethanolamine, 3.44 g of aqueous

ammonium hydroxide solution (25% NH_3), 5 g of polyethylene glycol (average molecular weight: 200) and water to form 100 g of liquid dye.

Paper was made using the above described dyeing process.

- 5 Lightfastness was measured according to EN ISO 105-B02 with the result: 1, i.e. lowest lightfastness.

Comparative Example 2

Preparation of Direct Yellow 11 according to WO-A 2007/057370

- 10 1.10 kg of 5-nitro-o-toluenesulfonic acid (83% by weight, 33.5 mol) was added to 1.5 l of water. A total of 278 g of solid lithium hydroxide (56% pure by weight) was then added continuously in small amounts. 67 g of diethanolamine were added and the mixture was stirred at 50-60°C for 20 hours and then at 58°C for 5 hours. Thereafter, 1.7 liters of water were
- 15 added and a pH of 9.0 was set with glacial acetic acid. The dye was dissolved with 1.85 kg of urea and adjusted to final color strength, compared to a previously defined standard sample, with water. The product was obtained in an amount of 7.26 kg and had a dye content of about 12% by weight.

20

Direct Brown 44 (D.Br. 44) and Direct Yellow 11 (D.Y. 11) were mixed according to WO-A 2007/057370 resulting in the following composition:

- 9.4 % D.Br. 44 (dry)
- 6.6 % D.Y. 11 (dry)
- 25 3.13 % Diethanolamine
- 0.43 % NH_3
- 2.50 % Polyethylene glycol 200 and
- water,
- to form 100 g of liquid dye.

30

Paper was made using the above described dyeing process.

Lightfastness was measured according to EN ISO 105-B02 with the result: 1, i.e. lowest lightfastness.

Example 1**Stage 1**

In a 2L beaker with stirrer, 1000 mL of distilled water and 71.88 g (289.86 mmol) of 5-amino-4-methoxy-2-nitrobenzenesulfonic acid (calculated as free acid) were mixed at 50°C resulting in pH=7.1. To this solution, 44 mL (318.84 mmol) of sodium nitrite solution (500 g/L) was added. This solution then was dripped within 20 min. to 100 mL of hydrochloric acid (30 % b.w.), 100 mL of dist. water, and 150 g of ice at -10°C. During addition the temperature was controlled at 20-25°C. The suspension of the diazonium salt was stirred for 2 hours at 20-25°C. Excess of nitrite was destroyed by addition of amidosulfonic acid. 1630 g of diazonium salt suspension was obtained.

Coupling:

Into a 2L beaker containing 14.3 g (152.2 mmol) of phenol in 250 mL of dist. water at room temperature, adjusted with sodium carbonate to pH 7.5-8.0, 815 g of diazonium salt suspension of stage 1 was added within 20 min. at constant pH 7.5, controlled by 140 mL of sodium carbonate solution (20 % b.v.). The batch was stirred for 1 hour at room temperature, pH 7.5.

Reduction with sugar:

To 1515 g of suspension (from the coupling step) at 50 °C, mixed with 46 mL of caustic soda (400 g/L) to obtain pH 11.3-11.5, was added a solution of 40.8 g (205.79 mmol) of dextrose in 200 mL of dist. water within 10 min. During the addition the temperature is increased to 65°C. After having added the solution the pH decreased to <10 and was adjusted again to 11.3 by using 25 mL of caustic soda (400 g/L). The reaction mixture was stirred for 20 min. at 68-70°C and 155 mL of HCl (30 % b.w.), and 300 g of NaCl (solid) were added. The product was isolated by filtration to yield 113.7 g of press cake (145 mmol of stage 1 product).


Stage 2

In a 1L beaker with stirrer, 250 mL of distilled water and 22.7 g (29 mmol) of press cake stage 1 product were mixed at room temperature.

Lithium hydroxide (1.4 g) was added resulting in pH=7.5-8.0. To this solution, 25 mL (36.23 mmol) of sodium nitrite solution (100 g/L) was added. This solution then was dripped within 20 min. to 20 mL of hydrochloric acid (30 % b.w.), 25 mL of dist. water, and 50 g of ice at -
5 10°C. During addition the temperature was controlled at 10°C. The suspension of the diazonium salt was stirred for 2 hours at 10°C. Excess of nitrite was destroyed by addition of amidosulfonic acid. 472 g of diazonium salt suspension was obtained.

Coupling:

10 Into a 1L beaker containing 1.9 g (17.39 mmol) of m-toluidine, 236 g of diazonium salt suspension of stage 2 was added within 10 min. at constant pH 7.5, controlled by 48 mL of sodium carbonate solution (20 % b.v.). The batch was stirred for 2 hours at room temperature, pH 8. 500 mL of solution was salted out using 100 g of sodium chloride (20% b.v.).
15 The product was isolated by filtration to yield 6.7 g of press cake (14.5 mmol of stage 2 product). The moist press cake was dried in vacuum at 60°C to yield 4.5 g of product of formula

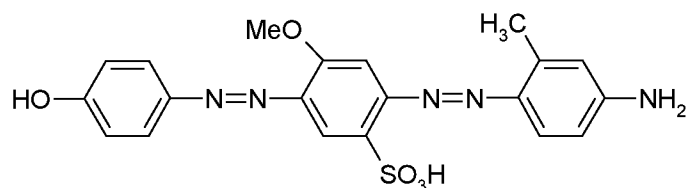

20 Paper was made using the above described dyeing process.

Lightfastness was measured to EN ISO 105-B02 with the result: 3.

Example 2

25 Stage 1

In a 2L beaker with stirrer, 1000 mL of distilled water and 71.88 g (289.86 mmol) of 5-amino-4-methoxy-2-nitrobenzenesulfonic acid (calculated as free acid) were mixed at 50°C resulting in pH=7.1. To this solution, 44 mL (318.84 mmol) of sodium nitrite solution (500 g/L) was
30 added. This solution then was dripped within 20 min. to 100 mL of

hydrochloric acid (30 % b.w.), 100 mL of dist. water, and 150 g of ice at -10°C. During addition the temperature was controlled at 20-25°C. The suspension of the diazonium salt was stirred for 2 hours at 20-25°C. Excess of nitrite was destroyed by addition of amidosulfonic acid. 1630 g of diazonium salt suspension was obtained.

Coupling:

Into a 2L beaker containing 14.3 g (152.2 mmol) of phenol in 250 mL of dist. water at room temperature, adjusted with sodium carbonate to pH 7.5-8.0, 815 g of diazonium salt stage 1 suspension was added within 20 min. at constant pH 7.5, controlled by 140 mL of sodium carbonate solution (20 % b.v.). The batch was stirred for 1 h at room temperature, pH 7.5.

Reduction with sugar:


To 1515 g of suspension (of the coupling step) at 50 °C, mixed with 46 mL of caustic soda (400g/L) at pH 11.3-11.5, was added a solution of 40.8 g (205.79 mmol) of dextrose in 200 mL of dist. water within 10 min. During the addition the temperature was increased to 65°C. After addition of the solution the pH has decreased to <10 and was adjusted again to 11.3 by 25 mL of caustic soda (400g/L). The reaction mixture was stirred for 20 min. at 68-70°C and 155 mL of HCl (30 % b.w.), and 300 g of NaCl (solid) were added. The product was isolated by filtration to yield 113.7 g of press cake (145 mmol of stage 1 product).

Stage 2

In a 1L beaker with stirrer, 250 mL of distilled water and 22.7 g (29 mmol) of press cake stage 1 product were mixed at room temperature. Lithium hydroxide (1.4 g) was added resulting in pH=7.5-8.0. To this solution, 25 mL (36.23 mmol) of sodium nitrite solution (100 g/L) was added. This solution then was dripped within 20 min. to 20 mL of hydrochloric acid (30 % b.w.), 25 mL of dist. water, and 50 g of ice at -10°C. During addition the temperature was controlled at 10°C. The suspension of the diazonium salt was stirred for 2 hours at 10°C. Excess of nitrite was destroyed by addition of amidosulfonic acid. 472 g of diazonium salt suspension was obtained.

Coupling:

Into a 1L beaker containing 1.64 g (17.39 mmol) of phenol in 100 mL of dist. water at room temperature, adjusted with sodium carbonate to pH 7.5-8.0, 236 g of diazonium salt stage 2 suspension was added within 10 min. at constant pH 7.5, controlled by 45 mL of sodium carbonate solution (20 % b.v.). The batch was stirred for 2 hours at room temperature, pH 7.8. 450 mL of solution was salted out using 67.5 g of sodium chloride (15% b.v.). The product was isolated by filtration to yield 4.2 g of press cake (14.5 mmol of product stage 2). The moist press cake was dried in vacuum at 60°C to yield 2.9 g of product of formula

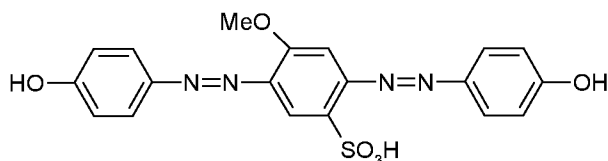

Paper was made using the above described dyeing process.

Lightfastness was measured to EN ISO 105-B02 with the result: 3.

Example 3**Stage 1**

In a 2L beaker with stirrer, 1000 mL of distilled water and 71.88 g (289.86 mmol) of 5-amino-4-methoxy-2-nitrobenzenesulfonic acid (calculated as free acid) were mixed at 50°C resulting in pH=7.1. To this solution, 44 mL (318.84 mmol) of sodium nitrite solution (500 g/L) was added. This solution then was dripped within 20 min. to 100 mL of hydrochloric acid (30 % b.w.), 100 mL of dist. water, and 150 g of ice at -10°C. During addition the temperature was controlled at 20-25°C. The suspension of the diazonium salt was stirred for 2 hours at 20-25°C. Excess of nitrite was destroyed by addition of amidosulfonic acid. 1630 g of diazonium salt suspension was obtained.

Coupling:

Into a 2L beaker containing 14.3 g (152.2 mmol) of phenol in 250 mL of dist. water at room temperature, adjusted with sodium carbonate to pH 7.5-8.0, 815 g of diazonium salt stage 1 suspension was added within 20 min. at constant pH 7.5, controlled by 140 mL of sodium carbonate solution (20 % b.v.). The batch was stirred for 1 h at room temperature, pH 7.5.

Reduction with sugar:

To 1515 g of suspension (of the coupling stage) at 50 °C, mixed with 46 mL of caustic soda (400 g/L) at pH 11.3-11.5, was added a solution of 40.8 g (205.79 mmol) of dextrose in 200 mL of dist. water within 10 min. During the addition the temperature was increased to 65°C. After addition of the solution the pH had decreased to <10 and was adjusted again to 11.3 by 25 mL of caustic soda (400 g/L). The reaction mixture was stirred for 20 min. at 68-70°C and 155 mL of HCl (30 % b.w.), and 300 g of NaCl (solid) were added. The product was isolated by filtration to yield 113.7 g of press cake (145 mmol of stage 1 product).


Stage 2

In a 1L beaker with stirrer, 375 mL of distilled water and 34.1 g (43.48 mmol) of press cake stage 1 product were mixed at room temperature. Lithium hydroxide (2.3 g) was added resulting in pH=8.6. To this solution 25 mL (36.23 mmol) of sodium nitrite solution (100 g/L) was added. This solution then was dripped within 20 min. to 30 mL of hydrochloric acid (30 % b.w.), 50 mL of dist. water, and 50 g of ice at -10°C. During addition the temperature was controlled at 10-15°C. The suspension of the diazonium salt was stirred for 2 hours at 10-15°C. Excess of nitrite was destroyed by addition of amidosulfonic acid. 618.8 g of diazonium salt suspension was obtained.

Coupling:

Into a 1L beaker containing 2.4 g (15.94 mmol) of cyanoimino barbituric acid, solved with sodium carbonate solution in 150 mL of dist. water at pH 7.5, 206.3 g of diazonium salt stage 2 suspension was added within 5 min. at constant pH 7.5, controlled by 60 mL of sodium carbonate solution (20 % b.v.). The batch was stirred for 2 hours at room

temperature, pH 8.6. The product was isolated by filtration to yield 23.6 g of press cake (14.5 mmol of stage 2 product). The moist press cake was dried in vacuum at 60°C to yield 5.6 g of product of formula

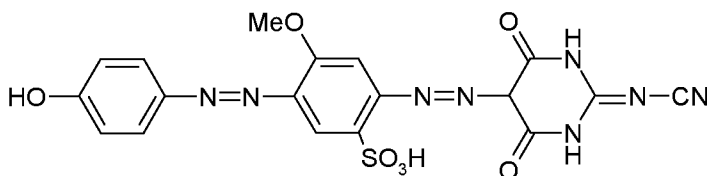

5

Paper was made using the above described dyeing process.

Lightfastness was measured to EN ISO 105-B02 with the result: 3.

10 **Example 4**

Stage 1

In a 2L beaker with stirrer, 1000 mL of distilled water and 71.88 g (289.86 mmol) of 5-amino-4-methoxy-2-nitrobenzenesulfonic acid (calculated as free acid) were mixed at 50°C resulting in pH=7.1. To this solution, 44 mL (318.84 mmol) of sodium nitrite solution (500 g/L) was added. This solution then was dripped within 20 min. to 100 mL of hydrochloric acid (30 % b.w.), 100 mL of dist. water, and 150 g of ice at -10°C. During addition the temperature was controlled at 20-25°C. The suspension of the diazonium salt was stirred for 2 hours at 20-25°C.

20 Excess of nitrite was destroyed by addition of amidosulfonic acid. 1630 g of diazonium salt suspension was obtained.

Coupling:

Into a 3L beaker containing 19.5 g (152.2 mmol) of barbituric acid in 700 mL of dist. water at room temperature, adjusted with 7.6 g of LiOH to pH 10.8, 815 g of diazonium salt stage 1 suspension was added within 15 min. at constant pH 7.5, controlled by 112 mL of sodium carbonate solution (20 % b.v.). The batch was stirred for 1 hour at room temperature, pH 7.8 yielding 1.75 L of suspension of coupling.

25

Reduction with sugar:


To 1.75 L of suspension at 50 °C, mixed with 76 mL of caustic soda (400 g/L) at pH 12, was added a solution of 40.8 g (205.79 mmol) of glucose in 150 mL of dist. water within 10 min. During the addition the temperature was increased to 70°C. After addition of the solution the pH had decreased to 10. The reaction mixture was stirred for 20 min. at 68-70°C and 65 mL of HCl (30 % b.w.), and 200 g of NaCl (solid) were added. The product was isolated by filtration to yield 93.1 g of press cake (145 mmol of stage 1 product).

Stage 2

In a 1L beaker with stirrer, 400 mL of distilled water and 18.6 g (29 mmol) of press cake stage 1 product were mixed at room temperature. Lithium hydroxide (1.7 g) was added resulting in pH=8.6. To this solution, 25 mL (36.23 mmol) of sodium nitrite solution (100 g/L) was added. This solution then was dripped within 20 min. to 25 mL of hydrochloric acid (30 % b.w.), 50 mL of dist. water, and 50 g of ice at -5°C. During addition the temperature was controlled at 15°C. The suspension of the diazonium salt was stirred for 2 hours at 15°C. Excess of nitrite was destroyed by addition of amidosulfonic acid. 634.6 g of diazonium salt suspension was obtained.

Coupling:

Into a 1L beaker containing 1.5 g (15.94 mmol) of phenol, solved in 150 mL of dist. water at pH 7.5, 317.3 g of diazonium salt stage 2 suspension was added within 10 min. at constant pH 7.5, controlled by 50 mL of sodium carbonate solution (20 % b.v.). The batch was stirred for 1.5 hours at room temperature, pH 8.4. The product was isolated by filtration to yield 10.9 g of press cake (14.5 mmol of stage 2 product). The moist press cake was dried in vacuum at 60°C to yield 3.4 g of product of formula

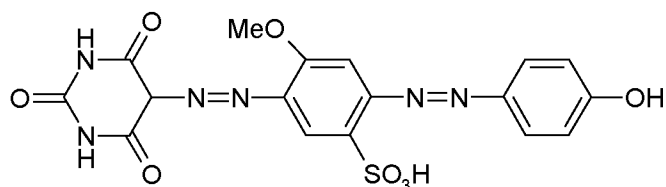

Paper was made using the above described dyeing process.

Lightfastness was measured to EN ISO 105-B02 with the result: 3.


5

All papers obtained in the Examples and Comparative Examples exhibited brownish shades.

10 The examples show that the dyes of the invention provide paper with higher lightfastness than paper produced with known dye mixtures.







CLAIMS

- 5 1. A compound of formula (1)

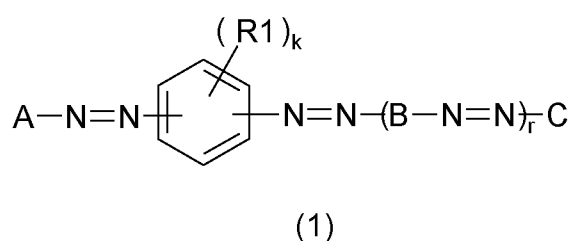


wherein


- 10 R1 represents hydrogen; substituted or unsubstituted C₁₋₅-alkyl; substituted or unsubstituted C₁₋₅-alkoxyl; substituted or unsubstituted aryl; substituted or unsubstituted phenyl; p-C₁₋₅-alkoxyphenyl; di(C₁₋₅-alkyl)amino groups; amino, sulfonic, carboxyl, hydroxyl, halogen, or nitro groups; wherein R1 is
- 15 attached to the aromatic ring at any position;
- k is an integer from 1 to 4,
- r is an integer of 0 or 1;
- A, C represent, independently of each other,

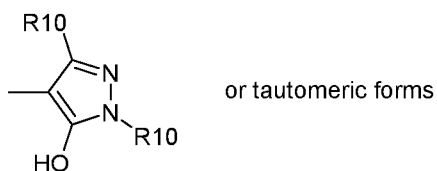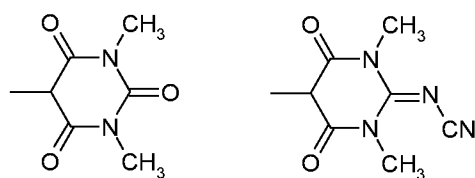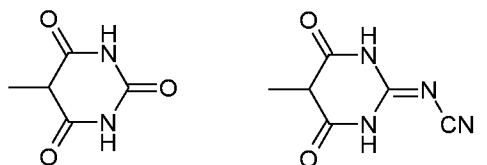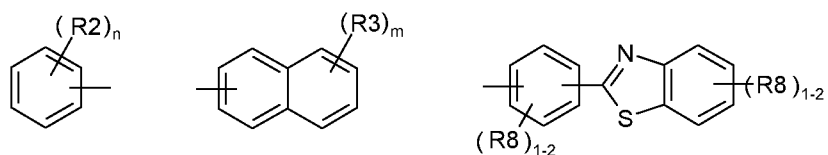

, wherein D represents C with the proviso that D is not equal to



B represents

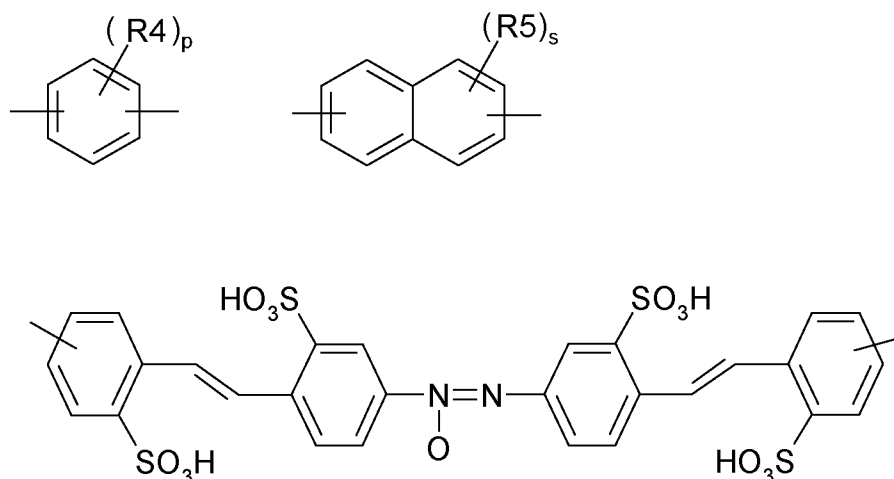

wherein


- 5 R2, R3, R4, R5, independently of each other, represent hydrogen; substituted or unsubstituted C_{1-5} -alkyl; substituted or unsubstituted C_{1-5} -alkoxyl; substituted or unsubstituted aryl; substituted or unsubstituted phenyl; p- C_{1-5} -alkoxyphenyl; di(C_{1-5} -alkyl)amino groups; amino, sulfonic, carboxyl, hydroxyl, halogen, or nitro groups; wherein R2, R3, R4, R5 are attached to the aromatic ring at any position;
- 10

and wherein

- 15 R8, R10, and R11, independently of each other, represent hydrogen, substituted or unsubstituted C_{1-4} -alkyl, substituted or unsubstituted C_{1-4} -alkoxy, substituted or unsubstituted aryl, substituted or unsubstituted phenyl, sulfonic, carboxyl, amino, nitro, hydroxyl, or halogen groups, and X represents O, S, NH, SO_2 , $CH=CH$, $NHCO$, $NH-CO-NH$, $N=N$, $N=N(O)$;
- 20

- m, s independently of each other, are an integer from 1 to 4; and
n, p independently of each other, are an integer from 1 to 3.

2. The compound of claim 1, having the following structure:

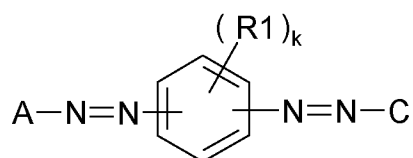







wherein

5 R1 represents hydrogen; substituted or unsubstituted C₁₋₅-alkyl; substituted or unsubstituted C₁₋₅-alkoxyl; amino, sulfonic, or hydroxyl groups, wherein R1 is attached to the aromatic ring at any position;

k is an integer from 1 to 2;

A, C represent, independently of each other,

10

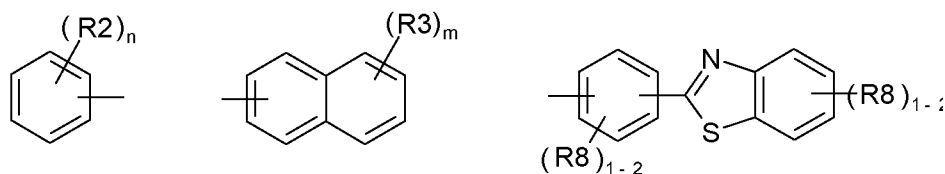


or tautomeric forms

m, n independently of each other, are an integer from 1 to 3;


R2, R3, R8 and R10 are defined as described above.

3. The compound of claim 1, having the following structure:

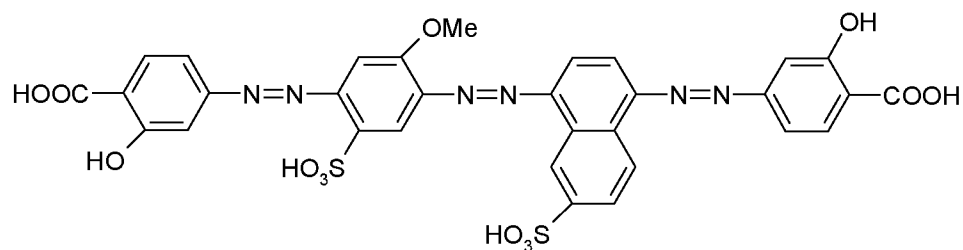


5

4. The compound of claim 1, having the following structure:

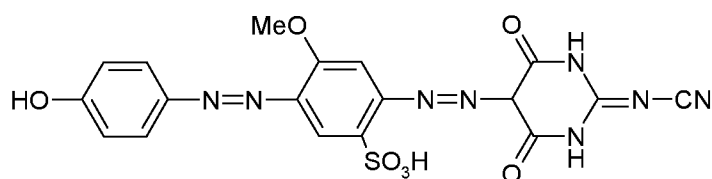


10

5. The compound of claim 1, having the following structure:

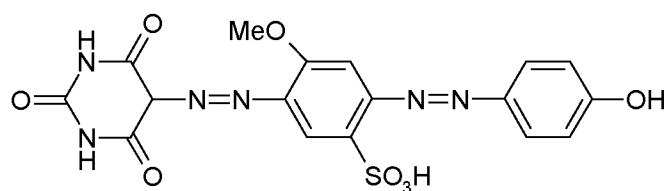


15

6. The compound of claim 1, having the following structure:

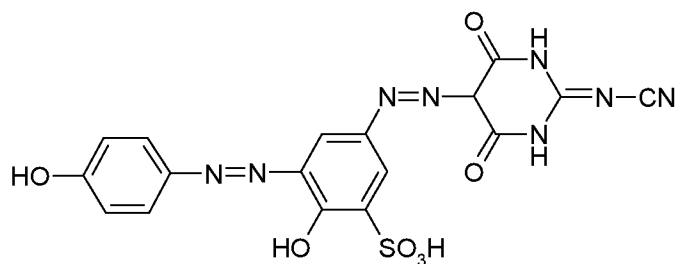


20


7. The compound of claim 1, having the following structure:

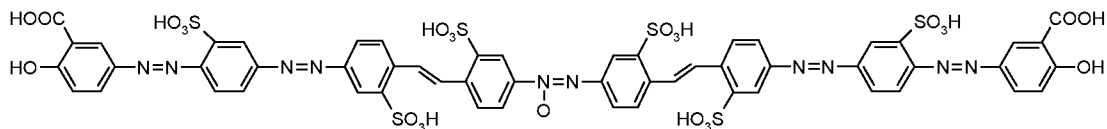


- 5 8. The compound of any of the preceding claims, wherein in the sulfonic group with the meaning $-\text{SO}_3\text{M}$, M is a cation, preferably M is hydrogen, alkaline metal, earth alkaline metal, ammonium, or mono-, di-, tri- or tetra-substituted ammonium, in particular M is mono- C_{1-5} -alkyl-, di- C_{1-5} -alkyl-, tri- C_{1-5} -alkyl-, tetra- C_{1-5} -alkylammonium, mono- C_{1-5} -hydroxyalkyl-, di- C_{1-5} -hydroxyalkyl-, tri- C_{1-5} -hydroxyalkyl-, tetra- C_{1-5} -hydroxyalkyl-ammonium, or benzyltri- C_{1-5} -hydroxyalkylammonium.
- 10
- 15 9. A process for preparing a compound of formula (1) according to claim 1, comprising diazotizing a compound of formula (2)



20 coupling the obtained product with a compound of the general structure of B or C as defined above, depending on the value of r, optionally diazotizing again and coupling to a compound of the general structure C,

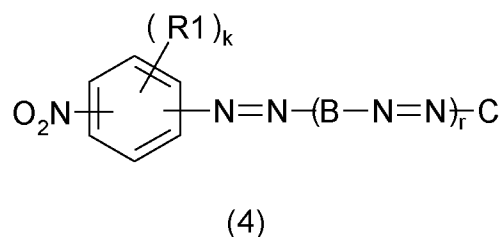

treating the resulting compound (4) with a reducing agent yielding compound (5)

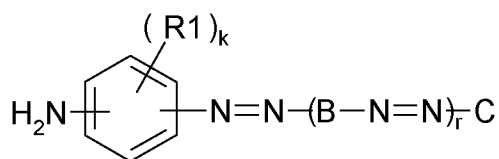

(5)

- 5 and diazotizing compound (5) and coupling to a compound of the general structure of A to obtain the compound of formula (1).
10. Use of a compound of formula (1) according to any of claims 1 to 8, for dyeing or printing materials.
- 10 11. The use according to claim 10, wherein the materials used contain cellulose and/or polyamide, in particular cellulose.
12. The use according to claim 10 or 11, wherein the material used is
- 15 paper or board.
13. The use according to any of claims 10 to 12, wherein the material used is a fiber-containing or fibrous material.
- 20 14. A process for dyeing or printing materials, wherein the material is brought into contact with a compound of formula (1) according to any of claims 1 to 8 or prepared according to claim 8 or 9.
15. A product or paper obtainable by a process according to claim 14.

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2011/071289

A. CLASSIFICATION OF SUBJECT MATTER

INV. C09B35/023 C09B35/037 C09B35/04 D21H21/28
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

C09B D06P D21H

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, CHEM ABS Data, WPI Data, BEILSTEIN Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2008/282931 A1 (NIVEN STUART COOK [GB] ET AL) 20 November 2008 (2008-11-20) page 1, lines 6-8 page 13; example 120 page 4, line 61	1,2, 10-14
X	----- WO 2009/063880 A1 (MITSUBISHI CHEM CORP [JP]; SHIGA YASUSHI [JP]; ISHIDA MIO [JP]) 22 May 2009 (2009-05-22) page 1, paragraph 0001 page 4; table 1; compound last the whole document	1,2,10, 14
X	----- GB 1 337 896 A (BAYER AG) 21 November 1973 (1973-11-21) page 1, lines 6-8 page 13; example 120 page 4, line 61	1,2, 10-14
	----- -/-	



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

31 January 2012

Date of mailing of the international search report

21/02/2012

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Durand-Oral, Ilknur

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2011/071289

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 3 840 514 A (SAILER A ET AL) 8 October 1974 (1974-10-08) column 1, lines 45-51 column 8; example 59 column 2, lines 43-45 -----	1,2
X	US 5 413 630 A (SCHWARZ WILLIAM M [US] ET AL) 9 May 1995 (1995-05-09) column 1, lines 5-6 columns 59-60; compound 4th -----	1,2, 10-14
X	US 5 663 309 A (HURTER RUDOLF [CH]) 2 September 1997 (1997-09-02) column 1, lines 5-9 columns 37-38; compound 76 column 6, lines 30-35 -----	1,2, 10-14
X	US 5 883 233 A (CATLIN JOSEPH C [US] ET AL) 16 March 1999 (1999-03-16) column 1, lines 5-6 column 1, lines 57-63 column 12; claim 1 -----	1-15
A	US 5 288 294 A (KAESER ADOLF [CH]) 22 February 1994 (1994-02-22) the whole document -----	1-15
A	US 5 559 217 A (KAESER ADOLF [CH]) 24 September 1996 (1996-09-24) the whole document -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2011/071289

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2008282931 A1	20-11-2008	BR PI0415940 A	02-01-2007
		CA 2544803 A1	19-05-2005
		CN 1878839 A	13-12-2006
		EP 1682618 A1	26-07-2006
		JP 2007515507 A	14-06-2007
		KR 20060123288 A	01-12-2006
		US 2008282931 A1	20-11-2008
		WO 2005044924 A1	19-05-2005

WO 2009063880 A1	22-05-2009	JP 2009138189 A	25-06-2009
		US 2010292450 A1	18-11-2010
		WO 2009063880 A1	22-05-2009

GB 1337896 A	21-11-1973	BE 781064 A1	22-09-1972
		CA 991360 A1	22-06-1976
		CH 417872 D	31-05-1974
		CH 556431 A	29-11-1974
		DD 95548 A5	12-02-1973
		DE 2113836 A1	28-09-1972
		FR 2130599 A1	03-11-1972
		GB 1337896 A	21-11-1973
		IT 952324 B	20-07-1973
		NL 7203770 A	26-09-1972

US 3840514 A	08-10-1974	NONE	

US 5413630 A	09-05-1995	NONE	

US 5663309 A	02-09-1997	DE 59508602 D1	31-08-2000
		EP 0719837 A2	03-07-1996
		ES 2149945 T3	16-11-2000
		JP 8217983 A	27-08-1996
		US 5663309 A	02-09-1997

US 5883233 A	16-03-1999	AT 227758 T	15-11-2002
		CA 2277533 A1	24-01-2000
		DE 69903889 D1	19-12-2002
		DE 69903889 T2	10-04-2003
		EP 0974620 A1	26-01-2000
		ES 2187101 T3	16-05-2003
		JP 2000053878 A	22-02-2000
		TW 469288 B	21-12-2001
		US 5883233 A	16-03-1999

US 5288294 A	22-02-1994	DE 59208643 D1	31-07-1997
		EP 0534903 A1	31-03-1993
		ES 2104881 T3	16-10-1997
		JP 3157305 B2	16-04-2001
		JP 5263396 A	12-10-1993
		US 5288294 A	22-02-1994

US 5559217 A	24-09-1996	NONE	
