



(86) Date de dépôt PCT/PCT Filing Date: 2003/05/23
 (87) Date publication PCT/PCT Publication Date: 2003/12/04
 (45) Date de délivrance/Issue Date: 2011/11/08
 (85) Entrée phase nationale/National Entry: 2004/11/19
 (86) N° demande PCT/PCT Application No.: US 2003/016514
 (87) N° publication PCT/PCT Publication No.: 2003/099245
 (30) Priorité/Priority: 2002/05/23 (US60/382,884)

(51) Cl.Int./Int.Cl. *A61K 8/21* (2006.01),
A61K 6/00 (2006.01), *A61K 8/25* (2006.01),
A61K 8/34 (2006.01), *A61K 8/92* (2006.01),
A61Q 11/00 (2006.01)
 (72) Inventeurs/Inventors:
 SIMONTON, THOMAS C., US;
 PETERSON, KENNETH S., US;
 SHERMAN, JAMES M., US
 (73) Propriétaire/Owner:
 DENTSPLY INTERNATIONAL, INC., US
 (74) Agent: SMART & BIGGAR

(54) Titre : VERNIS DENTAIRE ANTI-CARIE
 (54) Title: ANTI-CARIES DENTAL VARNISH

(57) **Abrégé/Abstract:**

A sustained-release, dental fluoride varnish material includes about 5 percent by weight of NaF; up to about 10 percent by weight of glycerin; up to about 5 percent by weight of fumed silica; and optionally, an amount of varnish additives selected from the group consisting of flavorants, rosins, gums and alcohols.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
4 December 2003 (04.12.2003)

PCT

(10) International Publication Number
WO 03/099245 A1

- (51) International Patent Classification⁷: **A61K 7/16**, 6/00 (US). **SHERMAN, James, M.**; 2610 Wexford Lane, York, PA 17404 (US).
- (21) International Application Number: PCT/US03/16514
- (22) International Filing Date: 23 May 2003 (23.05.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/382,884 23 May 2002 (23.05.2002) US
- (71) Applicant: **DENTSPLY INTERNATIONAL, INC.** [US/US]; 570 West College Avenue, P.O. Box 872, York, PA 17405-0872 (US).
- (72) Inventors: **SIMONTON, Thomas, C.**; 56 Carriage House Dr., Willow Street, PA 17584 (US). **PETERSON, Kenneth, S.**; 2494 Water Valley Road, Lancaster, PA 17603
- (74) Agents: **HURA, Douglas, J.** et al.; Dentsply International Inc., 570 West College Avenue, P.O. Box 872, York, PA 17404-0872 (US).
- (81) Designated State (*national*): CA.
- (84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).
- Published:**
— with international search report
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.



WO 03/099245 A1

(54) Title: ANTI-CARIES DENTAL VARNISH

(57) Abstract: A sustained-release, dental fluoride varnish material includes about 5 percent by weight of NaF; up to about 10 percent by weight of glycerin; up to about 5 percent by weight of fumed silica; and optionally, an amount of varnish additives selected from the group consisting of flavorants, rosins, gums and alcohols.

ANTI-CARIES DENTAL VARNISH

TECHNICAL FIELD

The present invention is generally directed toward anti-caries dental materials. More particularly, the invention is directed toward such materials containing a sustained-release fluoride compound. Specifically, the invention relates to such materials containing a fluoride release controlling amount of glycerin and fumed silica.

BACKGROUND OF THE INVENTION

The present invention relates to compositions for preventing dental caries. More particularly, it relates to fluoride-containing compositions that have enhanced activity in preventing dental caries. The use of soluble fluoride salts, such as stannous fluoride and about 5% by weight of sodium fluoride, to reduce the incidence of dental caries in the general population is a well-known and ongoing endeavor. The administration of these fluoride compounds takes many forms, including the fluoridation of drinking water, professional treatment by dentists and incorporation in oral hygiene compositions such as dentifrices and mouthrinses.

Of particular interest is the use of fluoride-containing varnish materials by dental professionals. Such materials are applied to the

64053-506

dentition and become adhered thereto. Over time, the fluoride is released, promoting remineralization of the tooth structure. Varnishes are also used to reduce tooth hypersensitivity.

Notwithstanding the widespread acceptance of such compositions,
5 there is an ongoing search for more effective compositions and, therefore, there is a need to enhance the fluoride activity of various fluoride compounds by the addition of other compounds. For example, there has been suggested the use of various zinc salts to enhance the activity of fluoride compounds.

SUMMARY OF THE INVENTION

10 In general, a sustained-release, dental fluoride varnish material comprises about 5 percent by weight of sodium fluoride (NaF); up to about 10 percent by weight of glycerin; up to about 5 percent by weight of fumed silica; and optionally, an amount of varnish additives selected from the group consisting of flavorants, rosins, gums and alcohols.

15 According to one aspect of the present invention, there is provided a sustained-release, dental fluoride varnish material comprising about 5 percent by weight of sodium fluoride (NaF); from about 1 to about 10 percent by weight of glycerin; from about 1 to about 5 percent by weight of fumed silica; and optionally, an amount of a varnish additive acceptable for dental use, wherein the varnish additive
20 is selected from the group consisting of a flavorant, a rosin, a gum, an alcohol or any combination thereof.

In one embodiment of the present invention, the varnish comprises from about 33 to about 75 percent by weight of said gum.

BRIEF DESCRIPTION OF THE DRAWING

FIG. 1 is a graph depicting the fluoride release function of a number of inventive samples plotted versus the glycerin content thereof.

PREFERRED EMBODIMENTS FOR CARRYING OUT THE INVENTION

An anti-caries dental varnish embodying the concepts of the present invention, contains about 5 percent by weight of NaF; up to about 10 percent by weight of glycerin; up to about 5 percent by weight of fumed silica; and an amount of varnish additives selected from the group consisting of flavorants, rosins, gums and alcohols. The inventive composition may also contain water.

The inventive fluoride varnish is a straw yellow to caramel brown, viscous material containing 5% sodium fluoride in a natural resin and alcohol/water base. The varnish is applied to a dry tooth by conventional techniques, and upon contact with saliva becomes adhered. Over time fluoride is released to the tooth surface promoting remineralization and desensitization.

Preferred rosins are those generally accepted for dental use, and include for example, vinsol rosin or wood rosin, both available from Hercules. The use of a rosin is optional, and the amount of such

a rosin will vary depending upon the desired characteristics of the end product and upon the physical properties of the rosin itself.

Similarly, preferred gums include those generally accepted for dental use, and include for example, Portuguese gum available from Calo, Arentinian gum available from AKZO, and other gums such as Brazilian gum and the like. In a preferred embodiment of the invention, from about 50 to about 75 percent by weight (% W/W) is employed.

Similarly still, preferred alcohols include those generally accepted for dental use, and include for example, ethanol. From about 20 to 35 percent by weight of ethanol is preferred.

GENERAL EXPERIMENTAL

As an example of a fluoride composition according to the present invention, the following material was prepared.

64053-506

| Addition Order | Ingredient | %W/W | Grams |
|----------------|---------------------|------|-------|
| | | 49 | 49-5x |
| 1 | Ethanol 190 proof | 24 | 120 |
| 2 | Portuguese Gum Calo | 63.5 | 317.5 |
| 3 | Glycerin | 5 | 25 |
| 4 (vacuum mix) | Aerosil* 200 | 1.5 | 7.5 |
| 5 (vacuum mix) | NaF | 5 | 25 |
| 6 | Flavor | 1 | 5 |
| Total | | 100 | 500 |

As further examples, the dental varnish compositions as shown in TABLE I were also prepared.

TABLE I

| Sample ID | JS1 | JS2 | JS3 | JS4 | JS5 | JS6 | JS8 |
|-------------------|------|------|------|------|------|------|------|
| | %W/W | %W/W | %W/W | %W/W | %W/W | %W/W | %W/W |
| Ethanol 190 proof | 24 | 26 | 25 | 25 | 26 | 26 | 25 |
| Wood Rosin | 20 | 33 | 33 | 17.5 | 18 | 28 | 34 |
| Gum Rosin | 50 | 33 | 33 | 47.5 | 50 | 40 | 34 |
| Glycerin | 1 | 3 | 4 | 5 | 1 | 1 | 2 |
| Sodium Fluoride | 5 | 5 | 5 | 5 | 5 | 5 | 5 |

These samples, JS1-JS8, were then tested for fluoride release.

The fluoride release data versus the amount of glycerin is plotted in

*Trade-mark

64053-506

FIG. 1. As can be seen in FIG. 1, the inventive composition shows improved fluoride release with even low amounts of glycerin, and shows even further improved release with higher amounts.

Another batch of samples were prepared as shown in TABLE II, each using Brazilian Gum in a dental varnish.

TABLE II

| Ingredient | %W/W | | | |
|--|------|-------|------|-------|
| | 1 | 2 | 3 | 4 |
| Ethanol 200 proof | 25 | 24.75 | 24.6 | 24.25 |
| Water | | 0.25 | 0.5 | 0.75 |
| Ethanol 190 proof | | | | |
| FF Wood | | | | |
| Brazilian Gum | 70 | 70 | 70 | 70 |
| NaF | 5 | 5 | 5 | 5 |
| Glycerine | | | | |
| Comments | | | | |
| Total | 100 | 100 | 100 | 100 |
| Graph ID | 0 | 1 | 2 | 3 |
| Note: Water % above are % total in formulation | | | | |
| 190 Proof is 95% ethanol and 5% water. | | | | |
| | | | | |

TABLE II (continued)

| 5 | 6 | 7 | 7a |
|-----|-------|-----|-----|
| 24 | 23.75 | | |
| 1 | 1.25 | | |
| | | 25 | 25 |
| | | | |
| 70 | 70 | 70 | 66 |
| 5 | 5 | 5 | 5 |
| | | | 4 |
| | | | |
| 100 | 100 | 100 | 100 |
| 4 | 5 | 5E | 5G |
| | | | |
| | | | |

The test procedure for determining fluoride release showed amount of fluoride ion released to solution after 3 hours. For each test sample, three replicates are prepared. Sample cups were ¼ oz. white polypropylene with a 33mm opening and lid. (The manufacturer is Mold-Rite Plastics, NY.) Cup ID is 1/4oz 33mm RS PP wht. Each sample cup was numbered and weighed. Between 0.05g and 0.12 g of varnish were then painted around the inside of each cup, with the varnish confined to the bottom half of the cup. The varnish was painted uniformly without thick areas.

The painted cups were then reweighed immediately after varnish application, and then each cup was filled with distilled water and capped. Fluoride release was determined after three (3) hours. The total fluoride released is sensitive to contact time.

To determine fluoride release after 3 hours, the water was poured from the sample cups into separate small plastic beakers filled with 10ml of TISAB. After calibration a F1 meter was employed to measure and record F1 ion concentration for each sample. A prophy paste sample as a control to check calibration prior to measuring varnish sample was prepared according to test method GM-111-93.

The ppm/g (parts per million per gram) released was determined by taking the fluoride reading in ppm and dividing by the varnish weight, taking into account any multipliers used during meter calibration.

It should be evident therefore, that a dental material such as a dental varnish, according to the present discussion, provides an improved anti-caries dental product, and otherwise is an advancement in the art. The invention has been exemplified herein without attempting to show all variations of the invention as to material component, grade, amount or the like, all such modifications being evident to those of ordinary skill in the art and readily determinable from the present discussion. The scope of the invention will therefore, be determined only by the claims.

64053-506

CLAIMS:

1. A sustained-release, dental fluoride varnish material comprising about 5 percent by weight of sodium fluoride (NaF); from about 1 to about 10 percent by weight of glycerin; from about 1 to about 5 percent by weight of fumed silica; and
5 optionally, an amount of a varnish additive acceptable for dental use, wherein the varnish additive is a flavorant, a rosin, a gum, an alcohol or any combination thereof.
2. The varnish material as in claim 1, comprising about 5 percent by weight of said glycerin.
3. The varnish as in claim 1, comprising from about 33 to about 75 percent
10 by weight of said gum.
4. The varnish as in claim 3, wherein said gum is Portuguese gum or Brazilian gum.
5. The varnish as in claim 1, wherein said alcohol is present in an amount of from about 20 to about 35 percent by weight of the varnish.
- 15 6. The varnish as in claim 5, wherein said alcohol is ethanol.

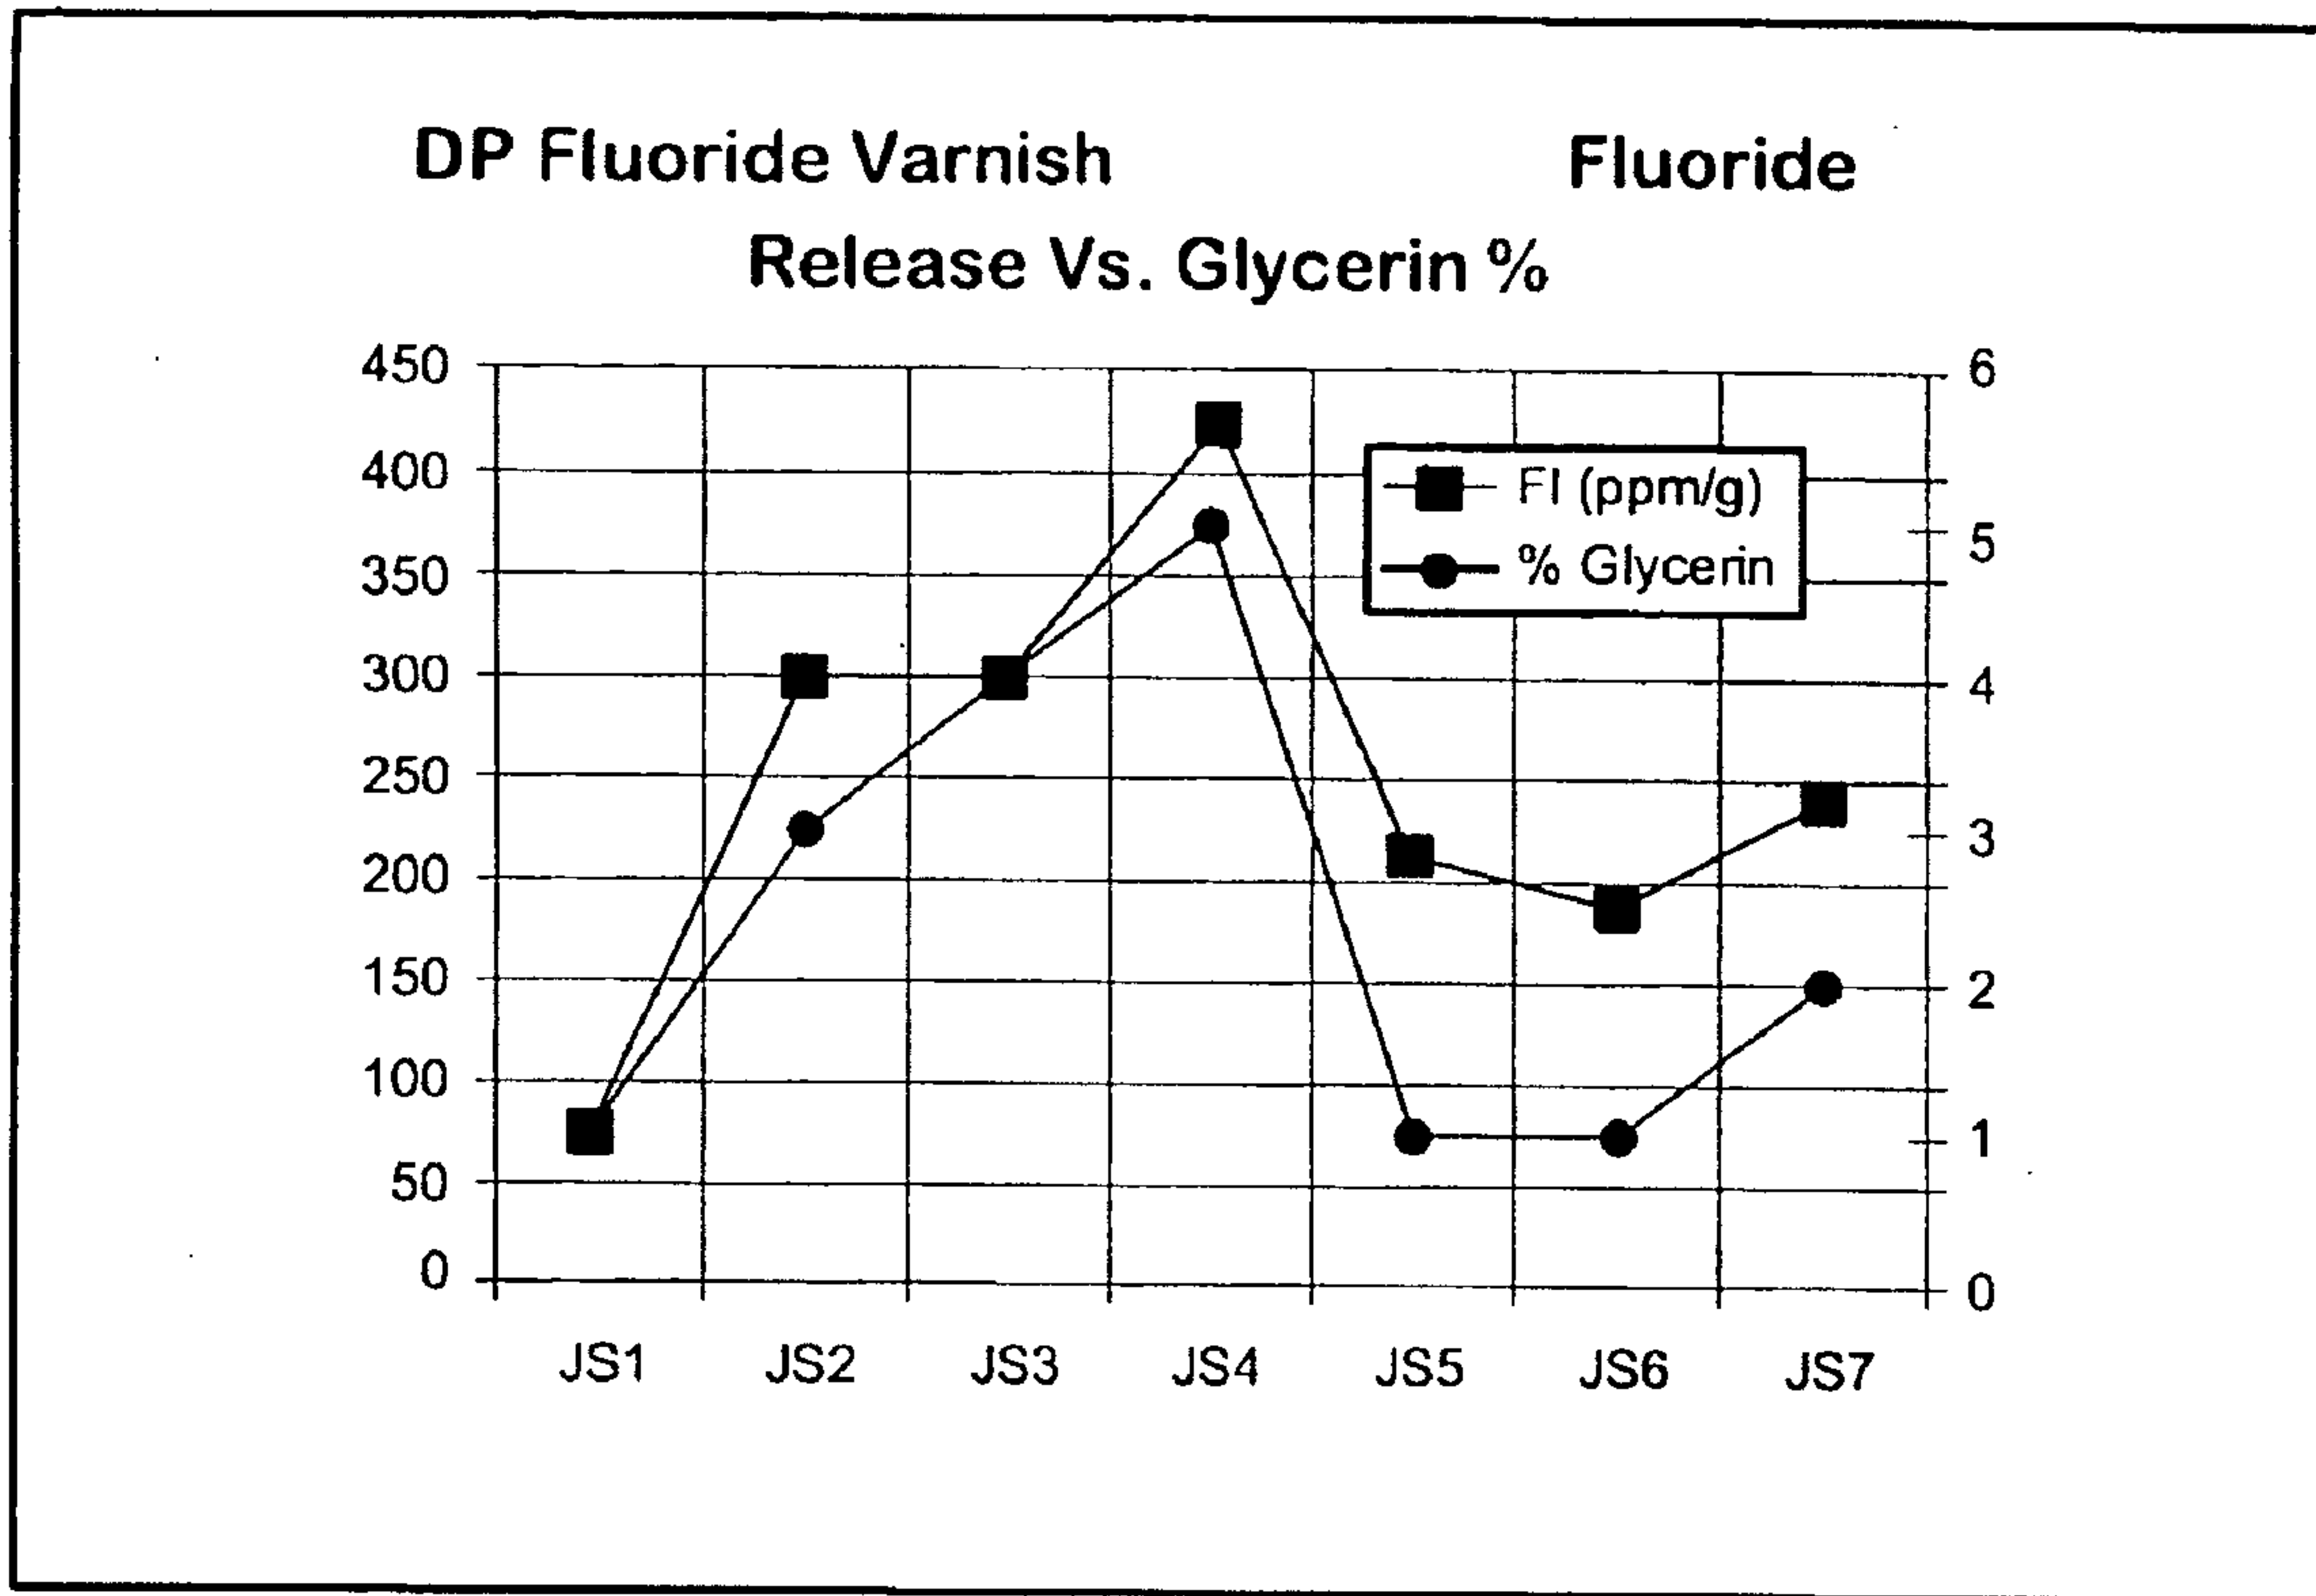


Fig. 1