



(72) SCHIMITZEK, PETER, DE


(71) CSB-SYSTEM SOFTWARE-ENTWICKLUNG &
UNTERNEHMENSBERATUNG AG, DE

(51) Int.Cl.⁷ A22B 5/00, G06T 7/40, G01N 33/12, G06T 5/00

(30) 1998/08/20 (198 37 806.8) DE

(54) **PROCEDE D'EVALUATION DE MOITIÉS D'ANIMAUX
ABATTUS PAR TRAITEMENT D'IMAGES OPTIQUE**

(54) **METHOD FOR EVALUATING THE HALVES OF
SLAUGHTERED ANIMALS BY OPTICAL IMAGE
PROCESSING**

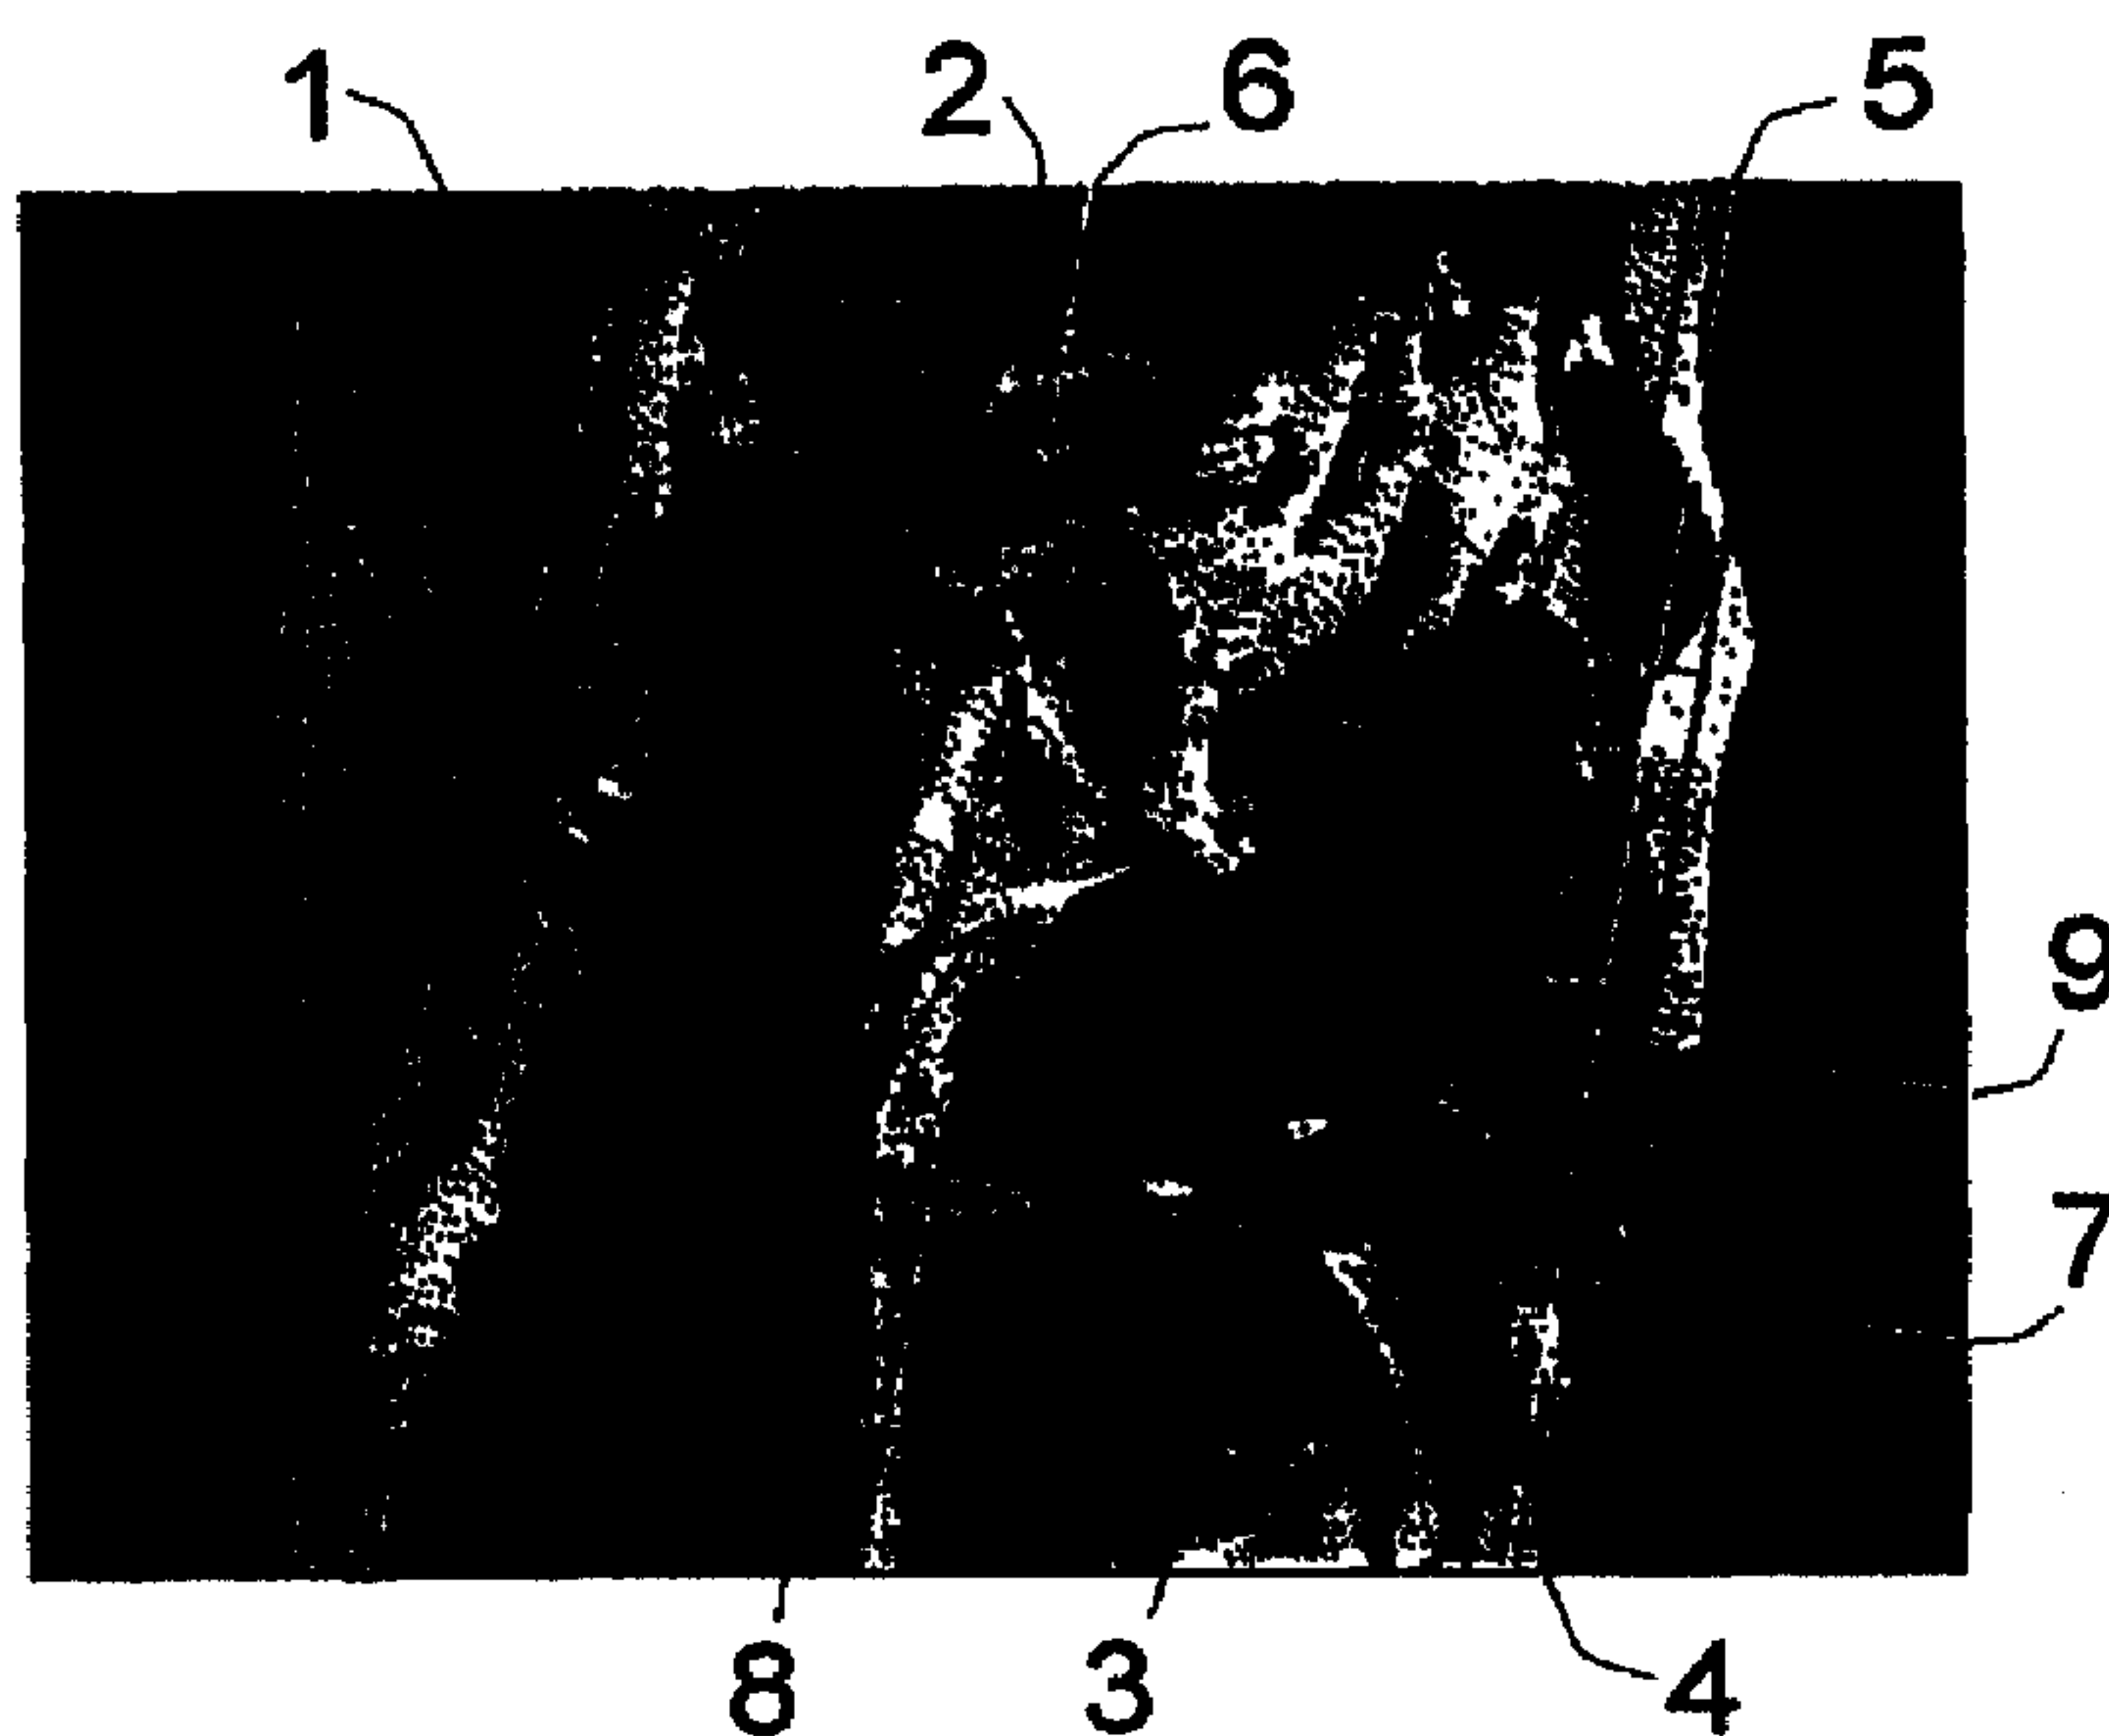

(57) L'invention concerne un procédé d'évaluation de moitiés d'animaux abattus par traitement d'images optique. On obtient un procédé simple, facile à mettre en oeuvre en ce qui concerne la technique de calcul, permettant une évaluation suffisamment sûre, mais si on s'est écarté du plan de symétrie à cause d'une erreur de découpe, lors de la découpe des animaux abattus, par le fait que deux points significatifs et une ligne (5) sont détectés de façon sûre sur le plan photogramétrique et qu'en plus une parallèle (6) et une verticale (7) sont calculées. Comme premier point significatif, on utilise l'extrémité côté corps de l'os de raccordement (2) et, comme première direction, l'axe central du tissu sous-cutané (4) dorsal.

(57) The invention relates to a method for evaluating the halves of slaughtered animals by optical image processing. A simple computerized method for sufficiently reliable evaluation is obtained even when the symmetry plane has been missed during cutting of the slaughtered animals due to cutting error by detecting two salient points and a straight line (5) in a photogrammetric reliable manner and by additionally calculating a parallel line (6) and a vertical line (7), wherein the end of the connecting bone (2) on the body side is used as first salient point and the central extension of the back fat (4) is used as a first direction.





PCT
 WELTORGANISATION FÜR GEISTIGES EIGENTUM
 Internationales Büro
 INTERNATIONALE ANMELDUNG VERÖFFENTLICHT NACH DEM VERTRAG ÜBER DIE
 INTERNATIONALE ZUSAMMENARBEIT AUF DEM GEBIET DES PATENTWESENS (PCT)

<p>(51) Internationale Patentklassifikation ⁷ : A22B 5/00, G01N 33/12, G06T 5/00, 7/40</p>	<p>A1</p>	<p>(11) Internationale Veröffentlichungsnummer: WO 00/10396 (43) Internationales Veröffentlichungsdatum: 2. März 2000 (02.03.00)</p>
<p>(21) Internationales Aktenzeichen: PCT/DE99/01854 (22) Internationales Anmeldedatum: 22. Juni 1999 (22.06.99) (30) Prioritätsdaten: 198 37 806.8 20. August 1998 (20.08.98) DE (71) Anmelder (für alle Bestimmungsstaaten ausser US): CSB-SYSTEM SOFTWARE-ENTWICKLUNG & UNTERNEHMENSBERATUNG AG [DE/DE]; An Fürthenrode, D-52511 Geilenkirchen (DE). (72) Erfinder; und (75) Erfinder/Anmelder (nur für US): SCHIMITZEK, Peter [DE/DE]; Tizianstrasse 4, D-52511 Geilenkirchen (DE). (74) Anwalt: HAUSSINGEN, Peter; Seidenbeutel 1, D-06526 Sangerhausen (DE).</p>	<p>(81) Bestimmungsstaaten: BR, CA, CN, PL, US, eurasisches Patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), europäisches Patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Veröffentlicht Mit internationalem Recherchenbericht.</p>	

(54) Title: **METHOD FOR EVALUATING THE HALVES OF SLAUGHTERED ANIMALS BY OPTICAL IMAGE PROCESSING**

(54) Bezeichnung: **VERFAHREN ZUR BEWERTUNG VON SCHLACHTTIERHÄLFTEN DURCH OPTISCHE BILDVERARBEITUNG**


(57) Abstract

The invention relates to a method for evaluating the halves of slaughtered animals by optical image processing. A simple computerized method for sufficiently reliable evaluation is obtained even when the symmetry plane has been missed during cutting of the slaughtered animals due to cutting error by detecting two salient points and a straight line (5) in a photogrammetric reliable manner and by additionally calculating a parallel line (6) and a vertical line (7), wherein the end of the connecting bone (2) on the body side is used as first salient point and the central extension of the back fat (4) is used as a first direction.

(57) Zusammenfassung

Die Erfindung bezeichnet ein Verfahren zur Bewertung von Schlachttierhälften durch optische Bildverarbeitung. Ein einfaches rechentechnisch zu realisierendes

Verfahren für eine hinreichend sichere Bewertung, auch wenn durch Spaltfehler die Symmetrieebene bei der Spaltung der Schlachttiere verlassen wird, wird erzielt, indem zwei markante Punkte und eine Gerade (5) photogrammetrisch sicher erfaßt und dazu eine Parallele (6) und eine Senkrechte (7) berechnet werden, wobei als ein erster markanter Punkt das körperseitige Ende des Schloßknochens (2) und als erste Richtung der mittlere Verlauf des Rückenspecks (4) benutzt werden.

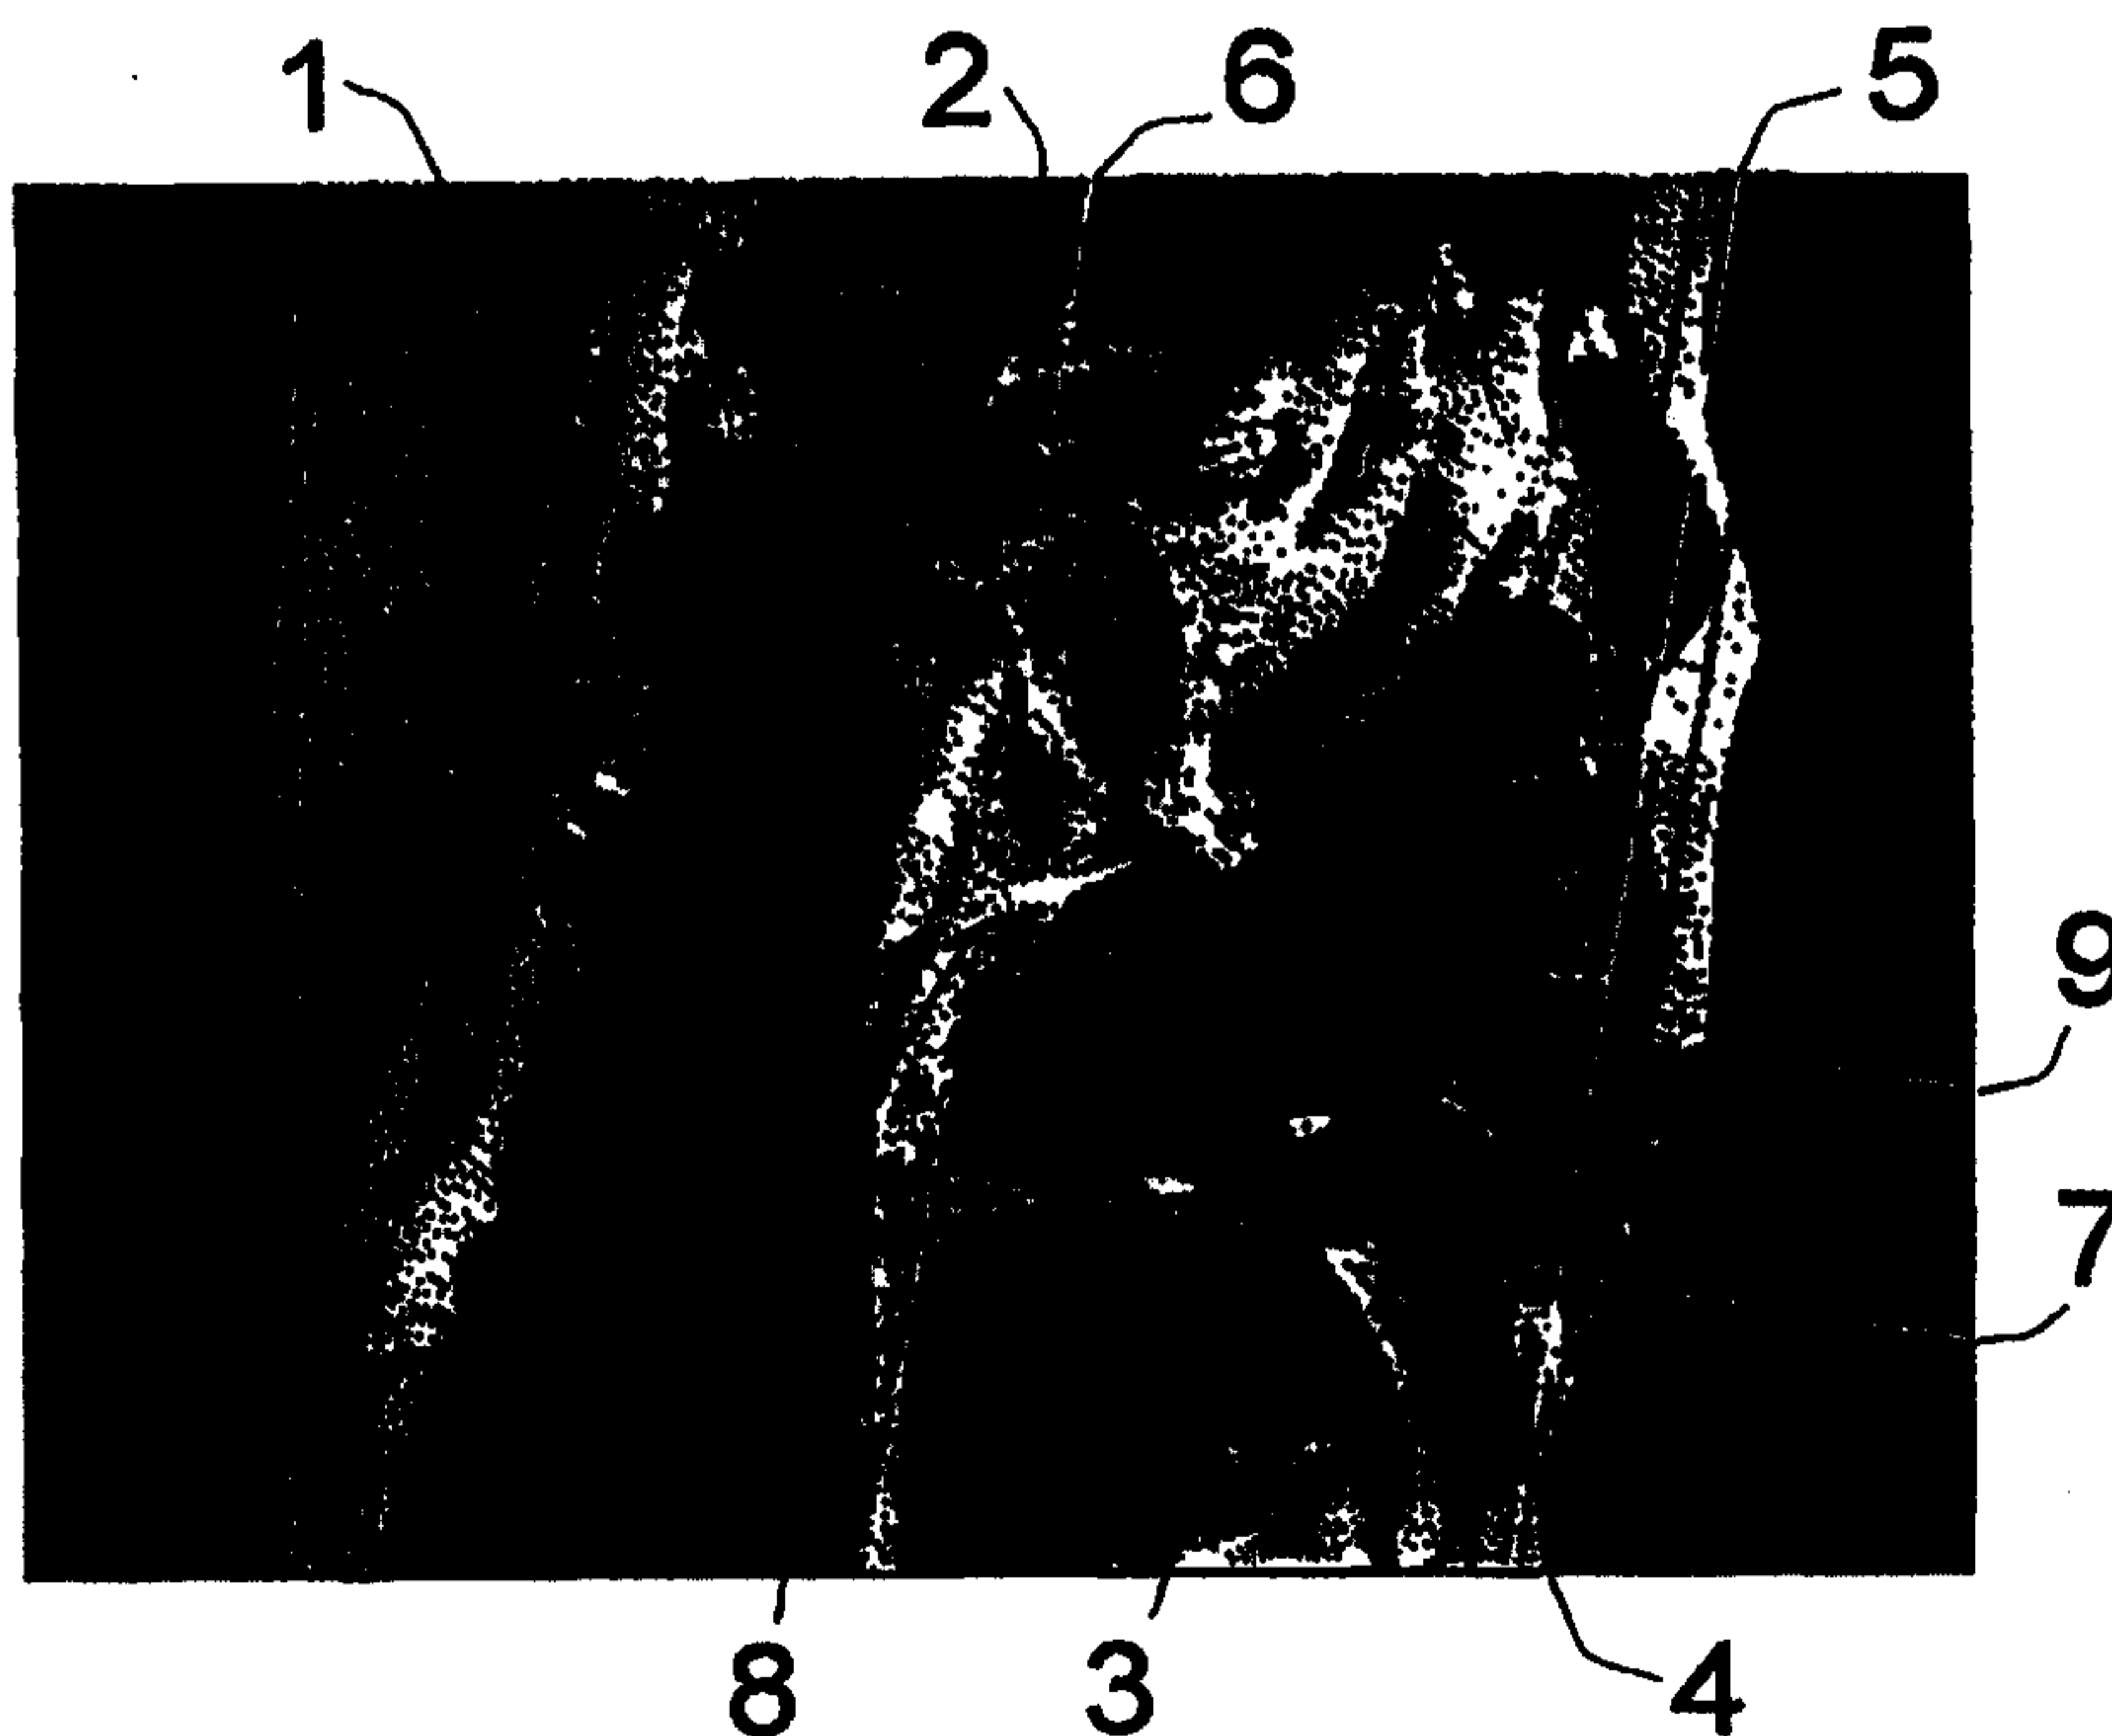

WO 00/10396

PCT/DE 99/01854

-1-

METHOD FOR EVALUATING THE HALVES OF SLAUGHTERED ANIMALS BY
OPTICAL IMAGE

5

The invention defines a method for evaluating half carcasses, also known as sides, of slaughtered animals that are detected at the product entrance, classification points, or product exit in slaughterhouses and meat packing facilities, by optical image processing. As a rule, inside the slaughterhouses and meat packing facilities, these half carcasses are transported, hanging from a hook, by means of special transport systems. The evaluation presented here is designed in particular for sides of pork, but it is also suitable in principle for sides of cattle, sheep, goats, or other large and small slaughtered animals.

15

In general, the sides of pork are registered, weighed and evaluated. The sides of pork are evaluated commercially by an appropriate official market classification. The thickness of the fat and of the flesh is detected at legally prescribed points specific to particular countries or states. For sorting purposes, a market value determination of the carcasses is made, as a rule; the finding is more conclusive if many further specific parameters are included, but usually these are not standardized.

20

25

German Patents DE 41 09 345 C2 and DE 44 08 604 C2 disclose an analysis or evaluation of carcass halves by means of image processing. In this processing, a photogrammetrical assessment of partial images of the carcass halves is done, beginning at the rumpbone. A disadvantage of such methods is that the rumpbone, as a prominent point in the picture of the carcass halves, is not adequately reliably selectable under the usual conditions in slaughterhouses, since because of

30

35

WO 00/10396 PCT/DE 99/01854

mistakes in splitting the carcass that sometimes occur (if the division is not precisely in the plane of symmetry of the carcass), portions of the spinal column are missing from one half of the carcass or are covered with leaf fat, also known as pork flare, yet the spine is known to be located in only a narrow region of the plane of symmetry of the body of the animal. Another disadvantage is that selecting the spinal column is complicated and requires much computation by way of object analysis with predefined contour and object parameters.

The object of the invention is to develop a method that assures evaluation of carcass halves by image processing while overcoming the above disadvantages; in particular with a method that is simple to achieve in terms of computation, adequately reliable evaluation is intended to be accomplished, even if splitting errors mean that the plane of symmetry is missed when the carcasses are split.

This object is attained with the characteristics recited in claim 1. Further features of the invention will become apparent from the dependent claims.

The object is attained essentially in that for the photogrammetrical evaluation and assessment, only those body components that extend anatomically over a wide region relative to the plane of symmetry of the carcass and are reliably detectable visually are used; the hipbone, the gluteus medius muscle (MGM), in particular, and the back fat meet these requirements.

Because there are two hipbones, which meet solely in the plane of symmetry (inside the hip joint), the cut always runs through a hipbone and is thus optically visible and can be reliably evaluated by computation. Because it cannot be

-3-

WO 00/10396 PCT/DE 99/01854

overlapped by leaf fat, the split surface cannot be visually concealed. The MGM and the back fat extend in the same over broad portions of the width of the back and are always reliably selectable visually and by computation by way of the transitions in brightness or color.

One advantageous exemplary embodiment of the invention is explained in further detail in conjunction with Fig. 1 in the form of photogrammetrical evaluation.

In Fig. 1, an image region 1 furnished for photogrammetrical evaluation includes an optical picture of the loin and leg region of the carcass half, including the end of the hipbone 2 nearer the body, the end of the MGM 3 nearer the body, and the outer boundary of the back fat 4. The oval-rounded hipbone (bright in front of a red peripheral region), which is readily visible and selectable by computation because of the transitions in brightness or color, is detected, and advantageously the end of the hipbone 2 nearer the body is made available, as a first prominent point, to the photogrammetrical evaluation. The back fat is also detected with respect to its boundaries on the basis of the brightness or color transitions (bright in front of a red peripheral region or background) and made available to the photogrammetrical evaluation in the form of a first straight line 5, in terms of its mean course. It is conceivable at the same time to detect its boundaries and the surface area or the width to be determined or detected, and to make a point of minimal fat thickness available as a second prominent point to the photogrammetrical evaluation. However, it is advantageous to detect the MGM 3 on the basis of the brightness or color transitions (red in front of a bright peripheral region) and to furnish the end of the MGM 3 nearer the body to the photogrammetrical evaluation as a second prominent point. Given a known side of the carcass

-4-

WO 00/10396 PCT/DE 99/01854

half, the straight line 5 can be represented by computation as a parallel 6 through the first prominent point - in the form of the end of the hipbone 2 nearer the body - whereupon a vertical 7 through the second point is unequivocally
5 determined; this vertical is advantageously calculated with respect to its segments as far as the parallel 6 and the outer boundary of the back fat 4. An advantageous refinement provides the calculation of the length from the first prominent point - in the form of the end of the hipbone 2
10 nearer the body - to the base point of the vertical 7; further base points 8 derived from this length can also be calculated - such as a point which divides this line in a ratio of 2:1 and by which further verticals 9 are determined - and their segments are advantageously calculated
15 analogously. The calculated lengths of the segments or area values between them serve as specific parameters for evaluating the carcass half. It is especially advantageous, by way of this computationally reliable selection of two points and one direction, to simulate the classical two-point
20 method in modified form photogrammetrically.

WO 00/10396 PCT/DE 99/01854

Reference Numerals Used

- 1 Image region
- 5 2 End of a hipbone nearer the body
- 3 End of the MGM nearer the body
- 4 Back fat
- 5 Straight line
- 6 Parallel
- 10 7 Vertical
- 8 Further base points
- 9 Further vertical

WO 00/10396 PCT/DE 99/01854

-6-

Claims

1. A method for evaluating carcass halves by optical
5 image processing, in which an image region (1) furnished for
photogrammetrical evaluation contains an optical picture
taken of the loin and leg region of the carcass half, and
readily visible body components are detected by computation
and specific parameters for the evaluation are ascertained,

10

characterized in that

two prominent points and one straight line (5) are
reliably detected photogrammetrically, with the end of an
15 hipbone (2) nearer the body is used as a first prominent
point, and the mean course of the back fat (4) is used as the
straight line (5);

15

- that a parallel (6) through the first prominent point
20 and a vertical (7) through the second prominent point
relative to the straight line (5) are calculated; and

20

- that the length of the segments of the vertical (7)
to the parallel (6) and to the outer boundary of the back fat
25 (4) are used as specific parameters for the evaluation.

25

2. The method for evaluating carcass halves by optical
image processing of claim 1, characterized in that

30 as the second prominent point, the point of minimal fat
thickness of the back fat (4) or the end of the MGM (3)
nearer the body is reliably detected photogrammetrically.

30

3. The method for evaluating carcass halves by optical
35 image processing of claim 1 or claim 2, characterized in that

35

-7-

WO 00/10396 PCT/DE 99/01854

the length of the distance on the parallel (6) from the first prominent point to the base point of the vertical (7) is calculated.

40 4. The method for evaluating carcass halves by optical image processing of claim 3, characterized in that from the calculated length of the distance, further base points (7) on the parallel (6) and further verticals (8) are calculated.

45 5. The method for evaluating carcass halves by optical image processing of one of claims 1-4, characterized in that a two-point method modified for reliable photogrammetrical detection is realized.

50 One Drawing Page Follows

Fig. 1

