US005561748A

United States Patent [19]

Niu et al.

[11] Patent Number: 5,561,748

[45] Date of Patent: Oct. 1, 1996

[54] **METHOD AND APPARATUS FOR CREATING SOLID MODELS FROM TWO-DIMENSIONAL DRAWINGS ON A GRAPHICS DISPLAY**

[75] Inventors: **Xingzhang F. Niu**, Rosemead; **Liangpin Chen**, Monterey Park, both of Calif.

[73] Assignee: **International Business Machines Corporation**, Armonk, N.Y.

[21] Appl. No.: **148,015**

[22] Filed: **Nov. 3, 1993**

Related U.S. Application Data

[63] Continuation of Ser. No. 618,138, Nov. 26, 1990, abandoned.

[51] **Int. Cl.**[6] **G06F 15/60**

[52] **U.S. Cl.** **395/120**; 395/141

[58] **Field of Search** 395/120, 122, 395/125, 119, 141; 340/723

[56] **References Cited**

U.S. PATENT DOCUMENTS

4,845,651	7/1989	Aizawa et al.	395/125
4,849,913	7/1989	Ward et al.	364/468
4,912,664	3/1990	Weiss et al.	364/577
4,933,865	6/1990	Yamamoto	382/16
4,962,472	10/1990	Seki et al.	364/900
5,027,292	6/1991	Rossignac et al.	395/122

OTHER PUBLICATIONS


"3D Solid Modeling Software Development for Industrial and Academic Purposes," J. Carlos Siska et al., *Computers & Graphics*, vol. 12, No. ¾, 1988, pp. 381–389.

Primary Examiner—Heather R. Herndon
Assistant Examiner—Michael S. Smith
Attorney, Agent, or Firm—David J. Kappos; Duke W. Yee; Andrew J. Dillon

[57] **ABSTRACT**

An improved apparatus and method for designing and displaying three dimensional solid representations from a two dimensional drawing. The invention prompts the user to select a two-dimensional view as a profile for extrusion. This is accomplished by selecting all the elements from a geometry to include in the extrusion. Thereafter, the user is prompted to select a front and back cutting face for the extrusion. The system thereafter transforms the selected two dimensional elements into three dimensional geometries.

8 Claims, 16 Drawing Sheets

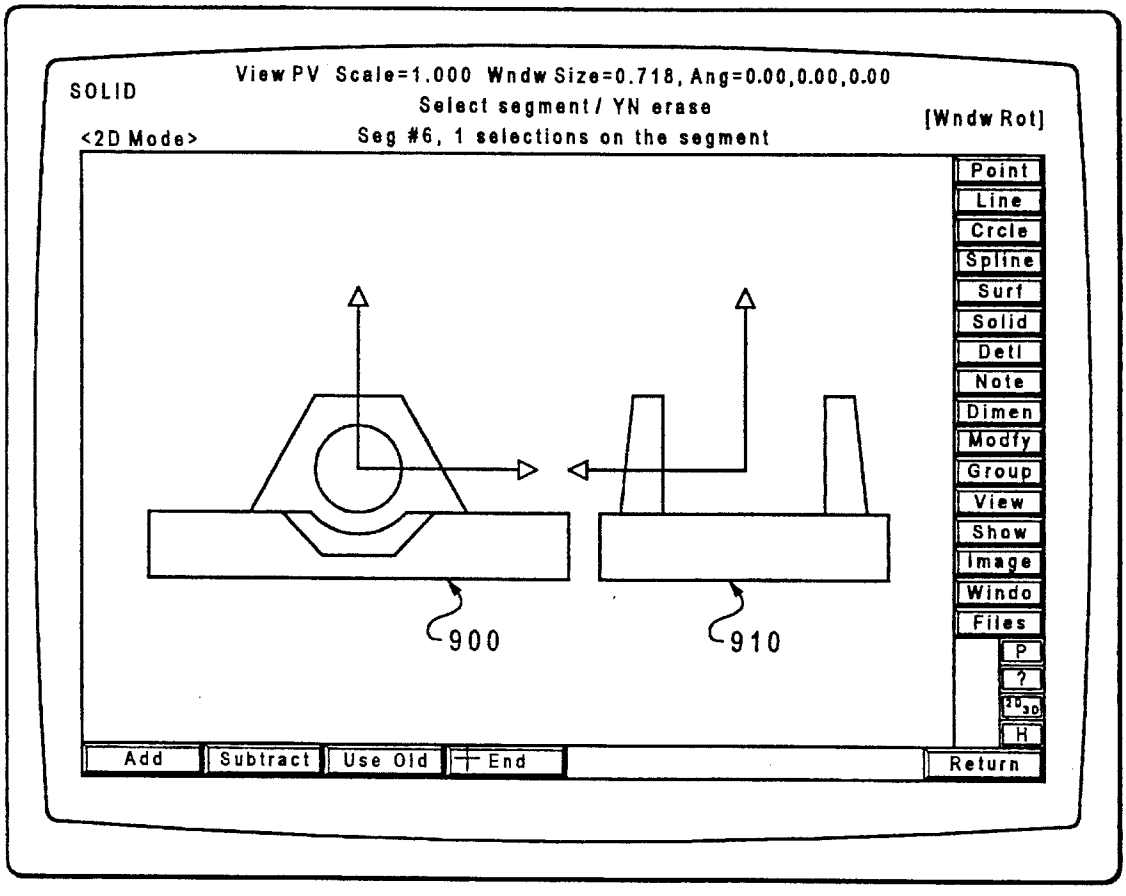

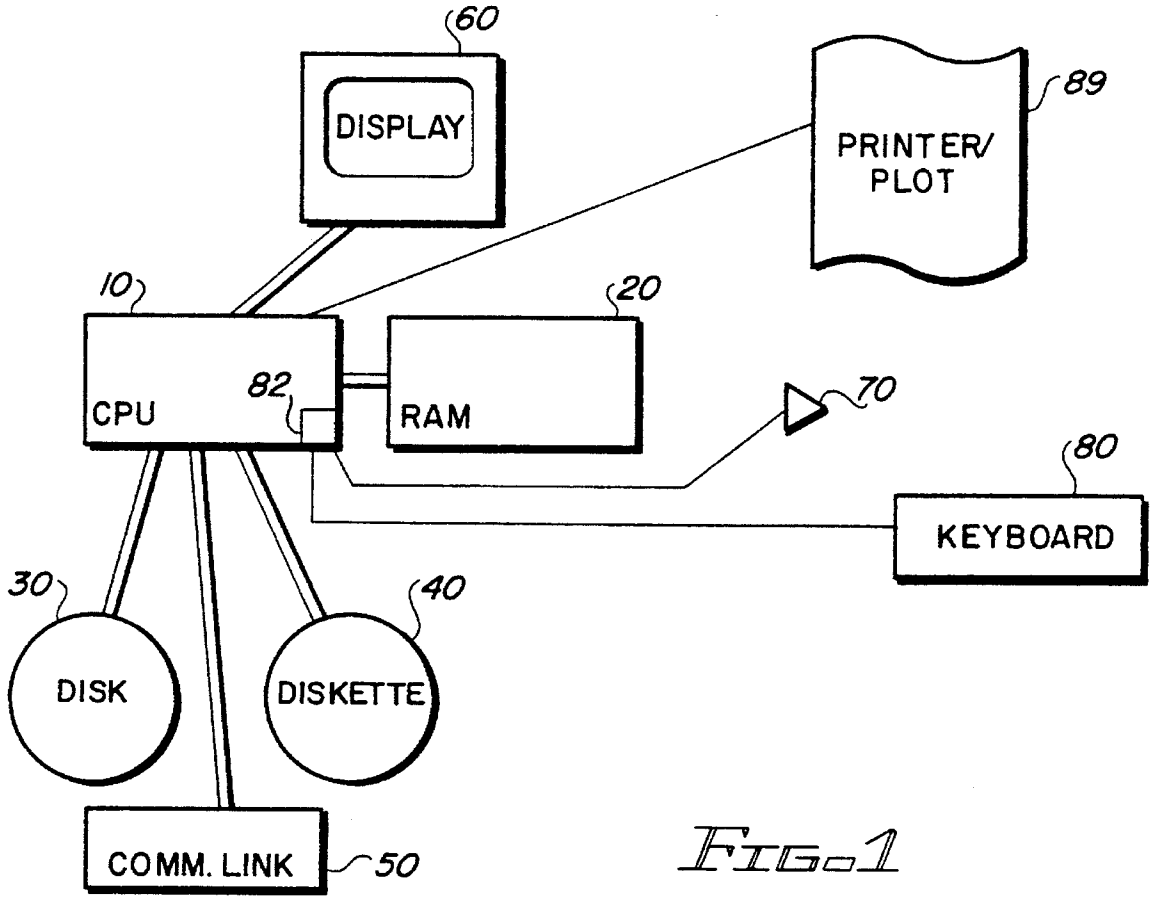


FIG-1

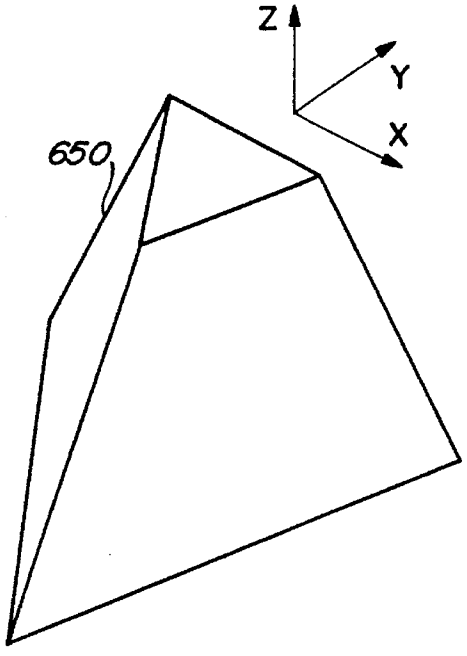


FIG-7

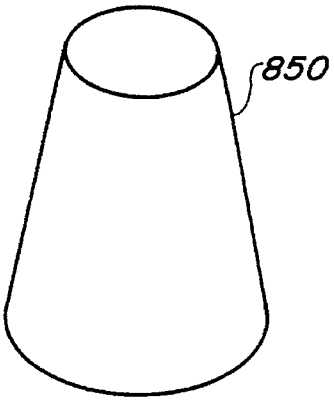


FIG-8K

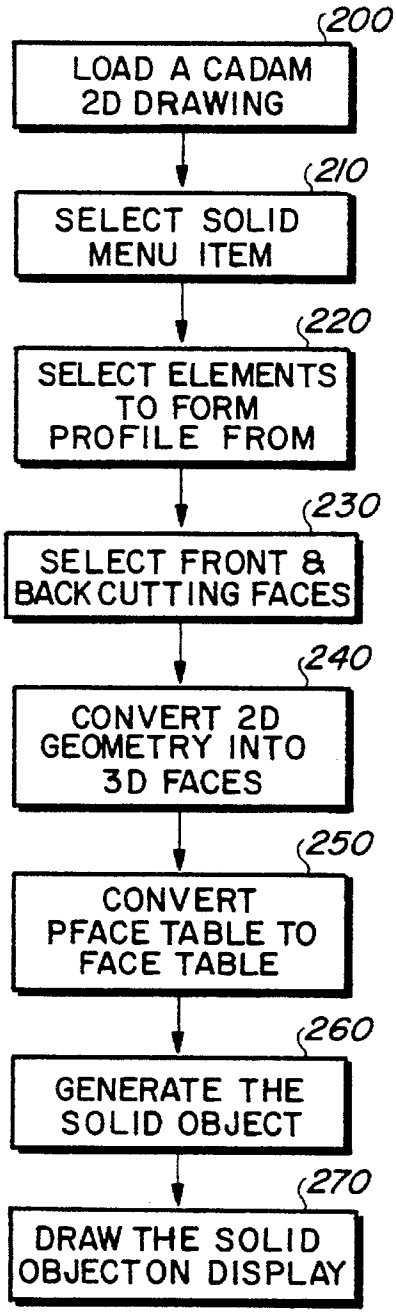

200
LOAD A CADAM 2D DRAWING
210
SELECT SOLID MENU ITEM
220
SELECT ELEMENTS TO FORM PROFILE FROM
230
SELECT FRONT & BACK CUTTING FACES
240
CONVERT 2D GEOMETRY INTO 3D FACES
250
CONVERT PFACE TABLE TO FACE TABLE
260
GENERATE THE SOLID OBJECT
270
DRAW THE SOLID OBJECTON DISPLAY

FIG-2

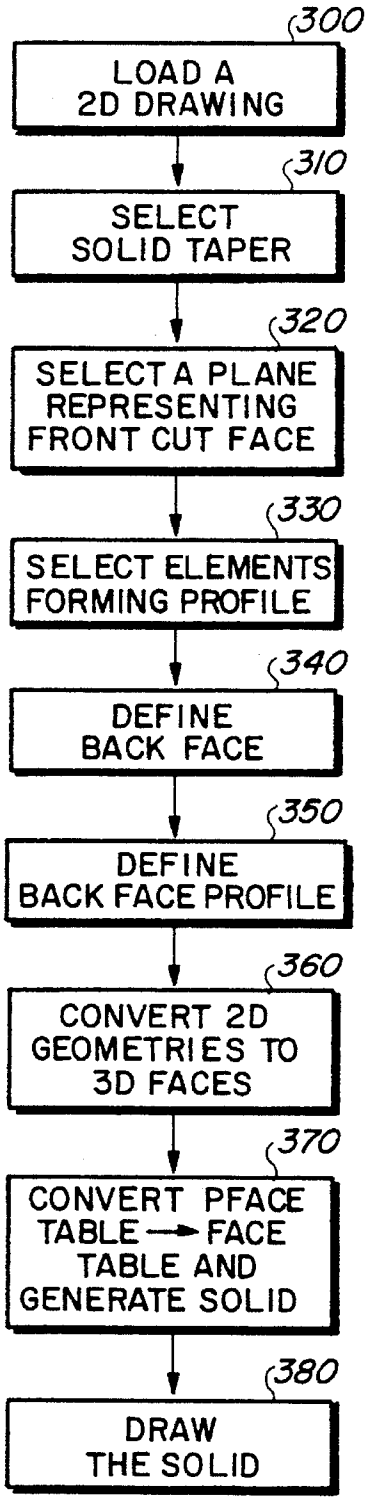

300
LOAD A 2D DRAWING
310
SELECT SOLID TAPER
320
SELECT A PLANE REPRESENTING FRONT CUT FACE
330
SELECT ELEMENTS FORMING PROFILE
340
DEFINE BACK FACE
350
DEFINE BACK FACE PROFILE
360
CONVERT 2D GEOMETRIES TO 3D FACES
370
CONVERT PFACE TABLE → FACE TABLE AND GENERATE SOLID
380
DRAW THE SOLID

FIG-3




FIG. 4A




FIG. 4B




FIG. 4C




FIG. 4D




FIG. 4E




FIG. 4F




FIG. 4G




FIG. 4H

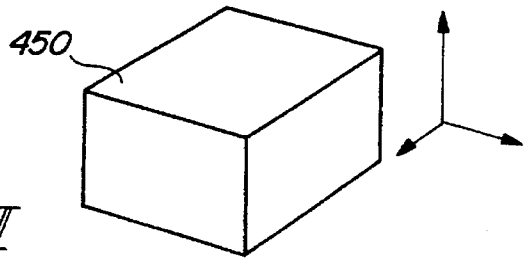


FIG. 4I




FIG. 5A




FIG. 5B




FIG. 5C




FIG. 5D




FIG. 5E




FIG. 5F




FIG. 5G




FIG. 5H

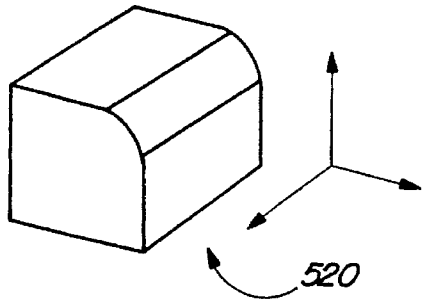


FIG. 5I




FIG-6A

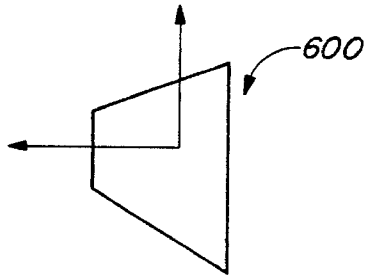


FIG-6B




FIG-6C

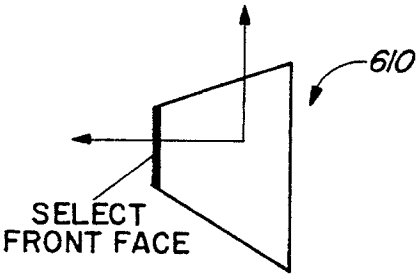


FIG-6D

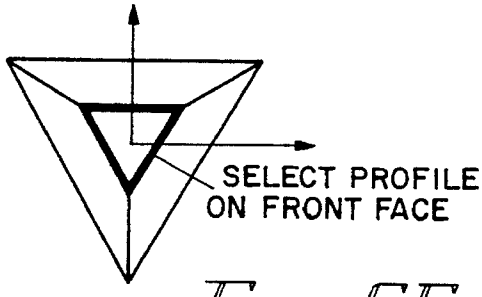


FIG-6E

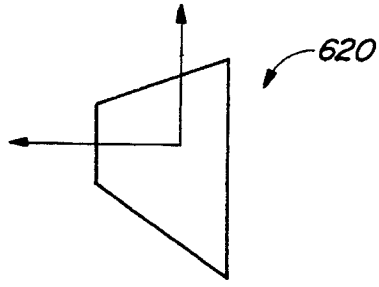


FIG-6F




FIG-6G

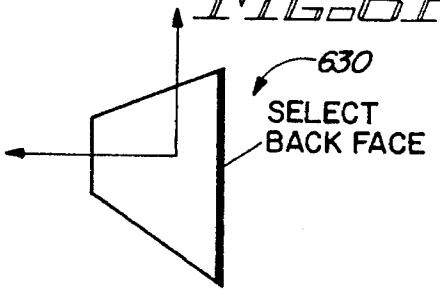


FIG-6H

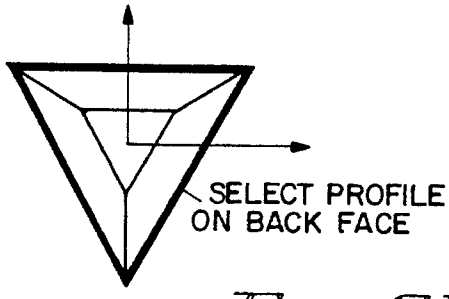


FIG-6I

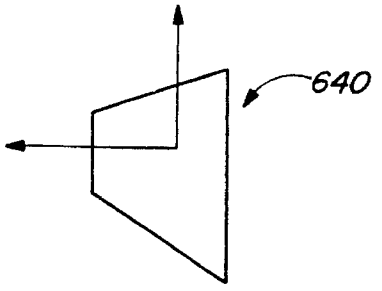


FIG-6J




FIG-8A

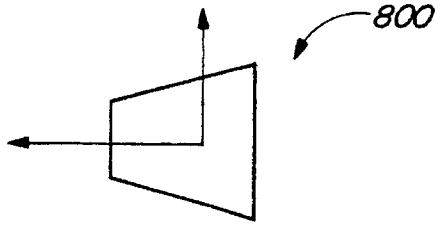


FIG-8B




FIG-8C

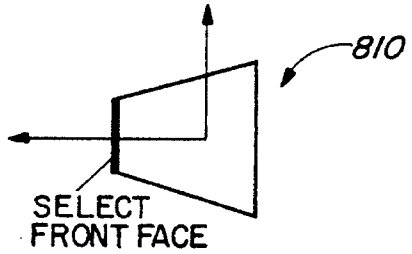


FIG-8D

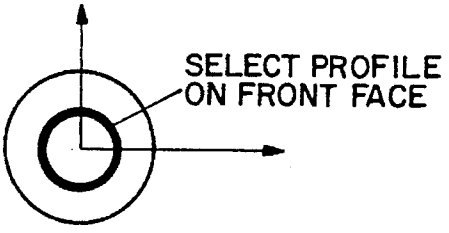


FIG-8E

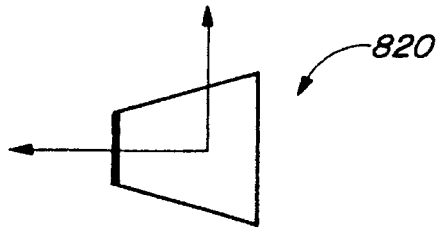


FIG-8F




FIG-8G

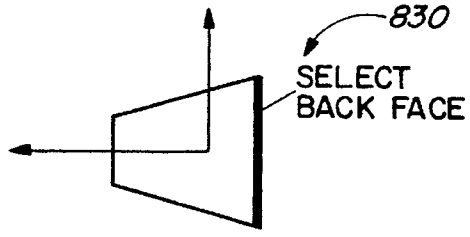


FIG-8H

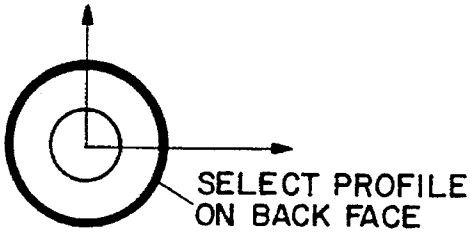


FIG-8I

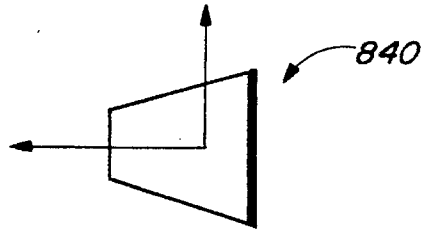


FIG-8J

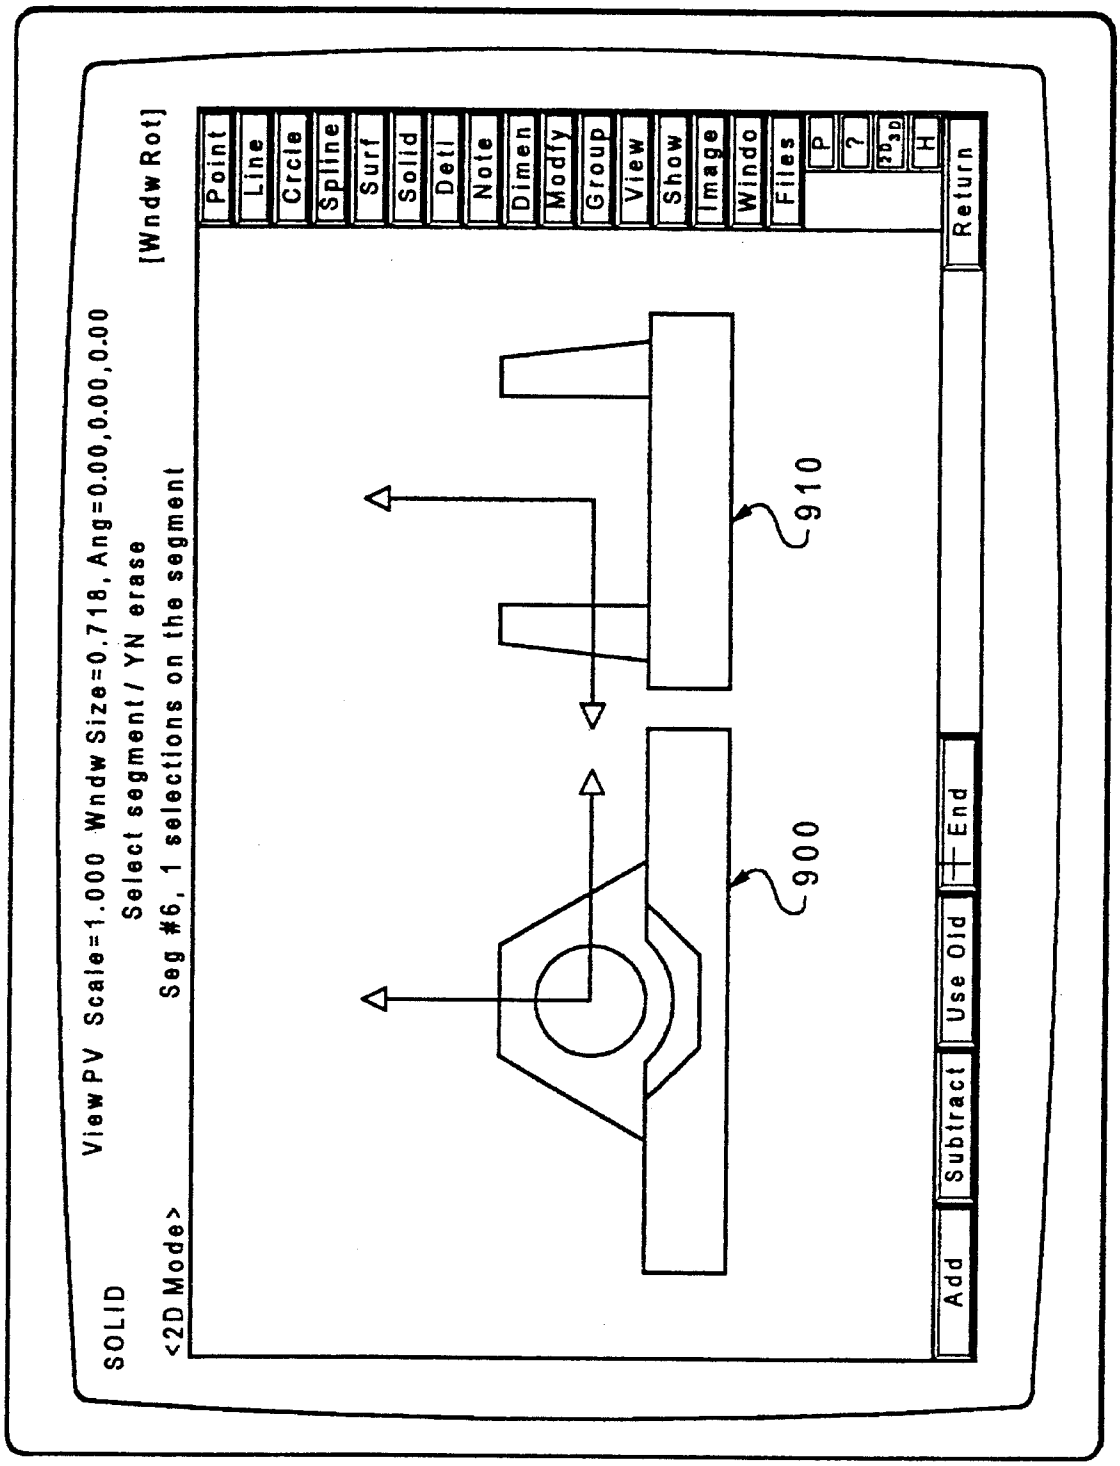

SOLID
View PV Scale=1.000 Wndw Size=0.718, Ang=0.00,0.00,0.00
[Wndw Rot]
Select segment / YN erase
<2D Mode>
Seg #6, 1 selections on the segment
Point
Line
Crcle
Spline
Surf
Solid
Detl
Note
Dimen
Modfy
Group
View
Show
Image
Windo
Files
P
?
2D 3D
H
Return
End
Use Old
Subtract
Add
910
900

Fig. 9

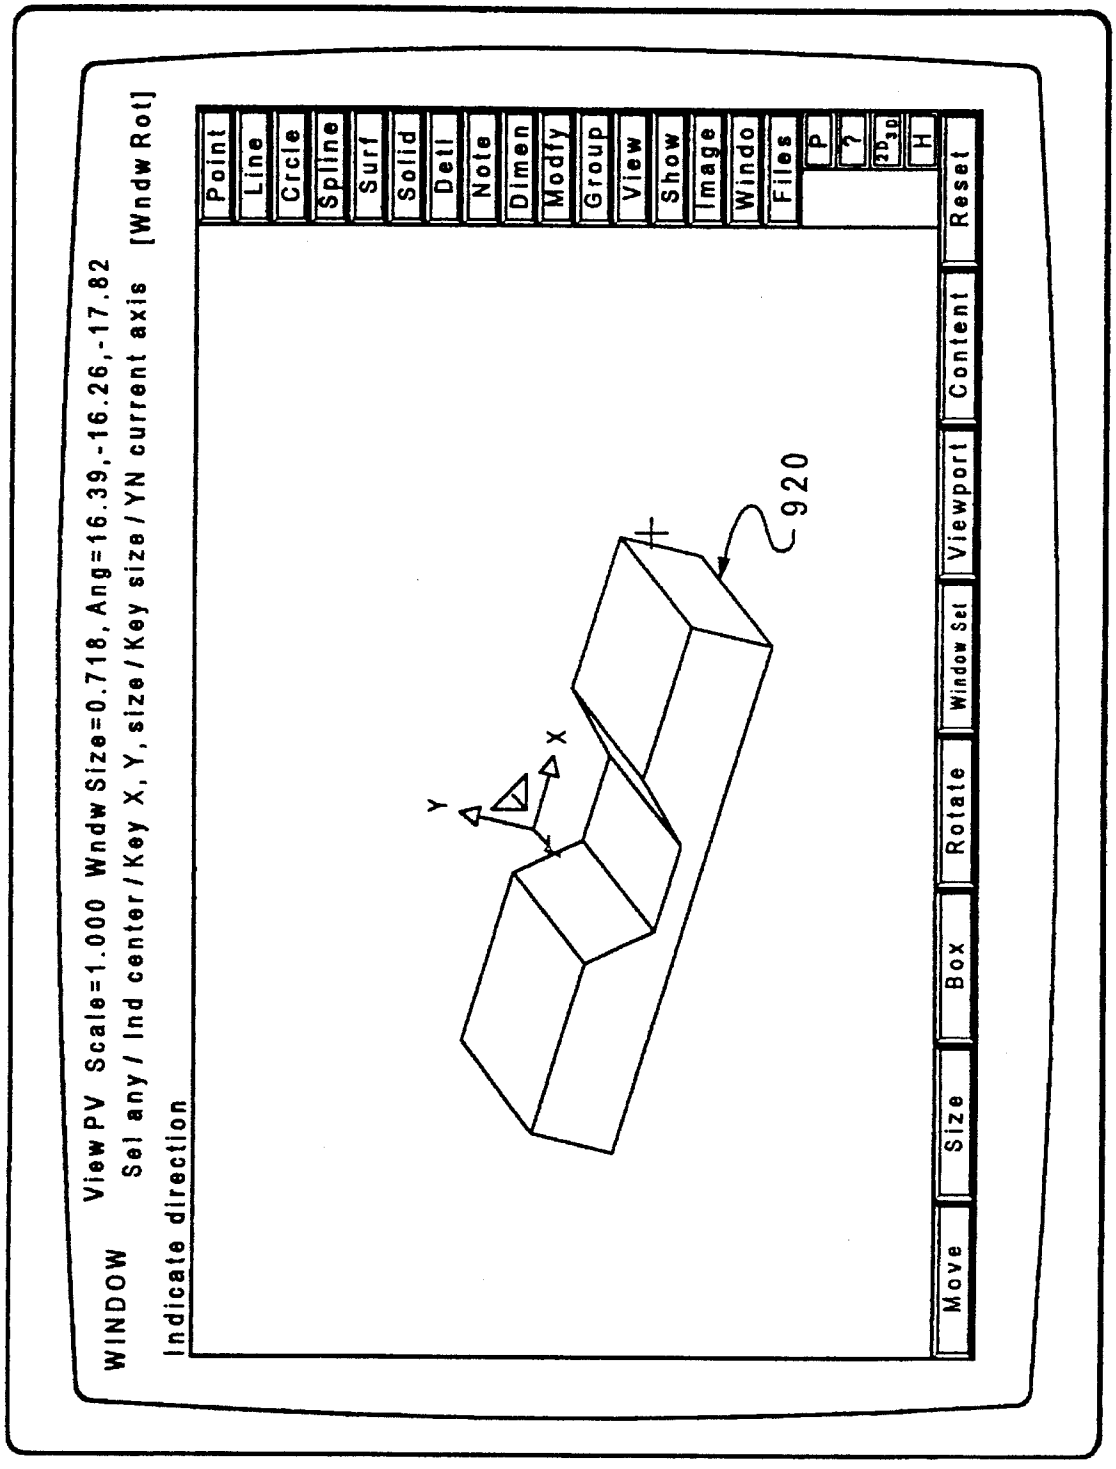

WINDOW View PV Scale=1.000 Wndw Size=0.718, Ang=16.39,-16.26,-17.82
Sel any / Ind center / Key X, Y, size / Key size / YN current axis [Wndw Rot]
Indicate direction
Point
Line
Crcle
Spline
Surf
Solid
Detl
Note
Dimen
Modfy
Group
View
Show
Image
Windo
Files
P
?
2D 3D
H
Reset
Content
Viewport
Window Sel
Rotate
Box
Size
Move
920
Y
X

Fig. 10

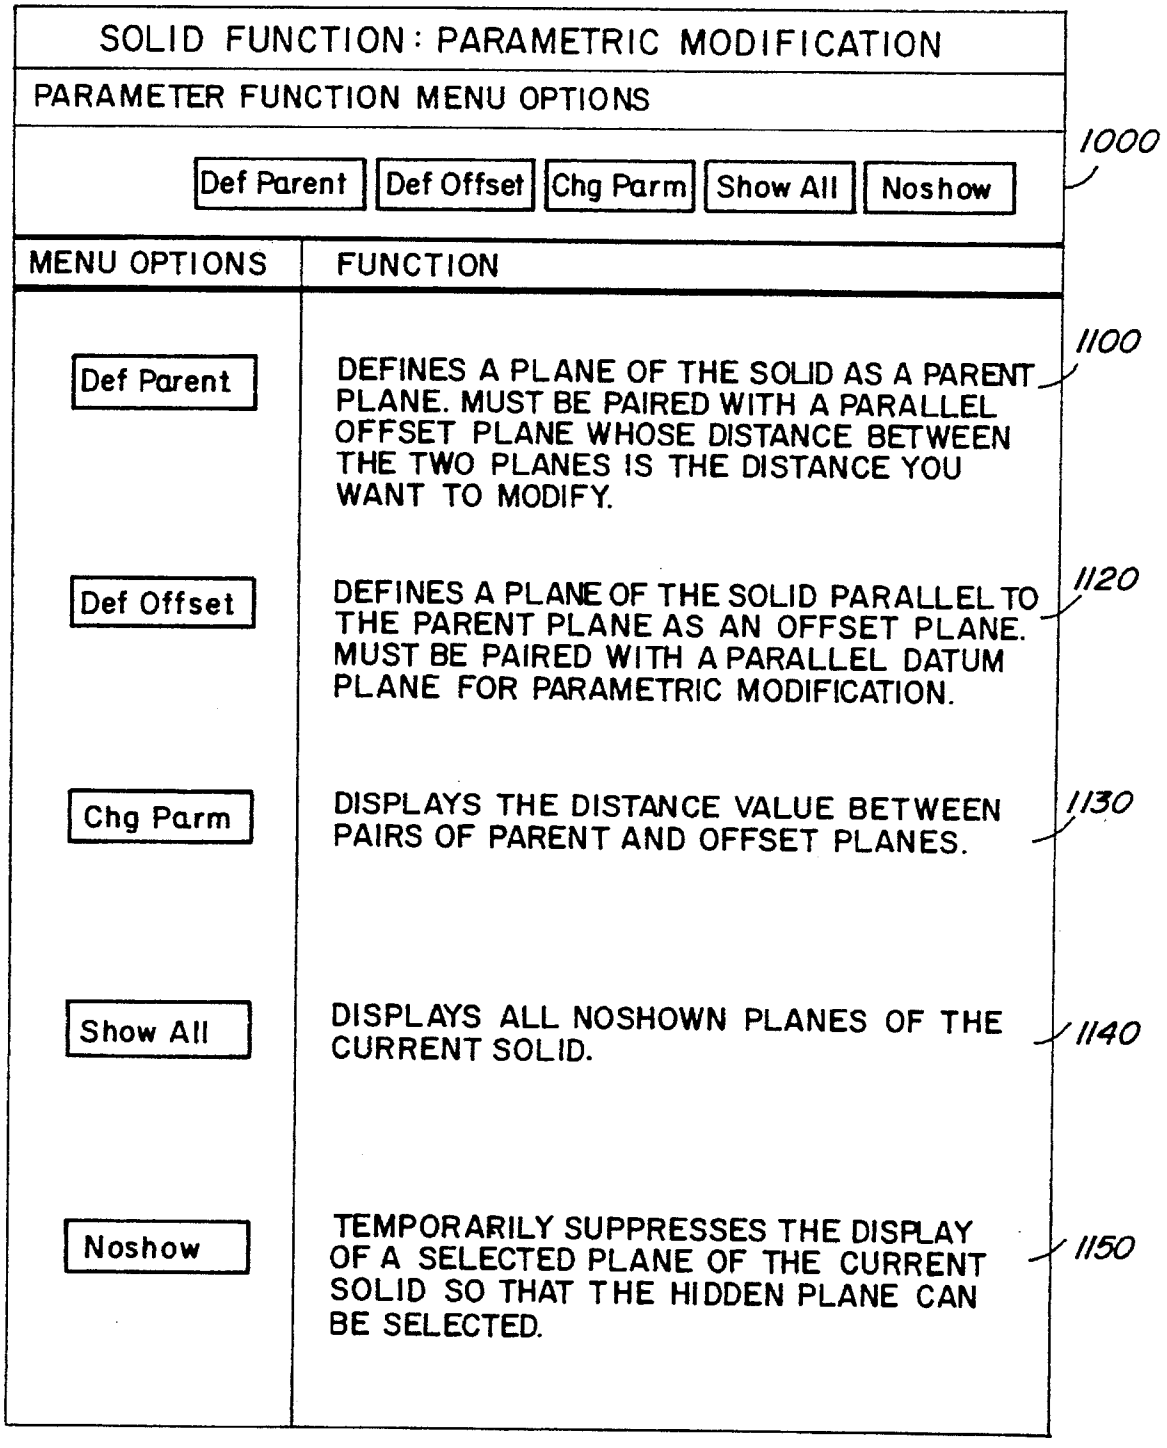

SOLID FUNCTION: PARAMETRIC MODIFICATION
PARAMETER FUNCTION MENU OPTIONS
Def Parent
Def Offset
Chg Parm
Show All
Noshow
1000
MENU OPTIONS
FUNCTION
Def Parent
DEFINES A PLANE OF THE SOLID AS A PARENT PLANE. MUST BE PAIRED WITH A PARALLEL OFFSET PLANE WHOSE DISTANCE BETWEEN THE TWO PLANES IS THE DISTANCE YOU WANT TO MODIFY.
1100
Def Offset
DEFINES A PLANE OF THE SOLID PARALLEL TO THE PARENT PLANE AS AN OFFSET PLANE. MUST BE PAIRED WITH A PARALLEL DATUM PLANE FOR PARAMETRIC MODIFICATION.
1120
Chg Parm
DISPLAYS THE DISTANCE VALUE BETWEEN PAIRS OF PARENT AND OFFSET PLANES.
1130
Show All
DISPLAYS ALL NOSHOWN PLANES OF THE CURRENT SOLID.
1140
Noshow
TEMPORARILY SUPPRESSES THE DISPLAY OF A SELECTED PLANE OF THE CURRENT SOLID SO THAT THE HIDDEN PLANE CAN BE SELECTED.
1150

FIG. 11

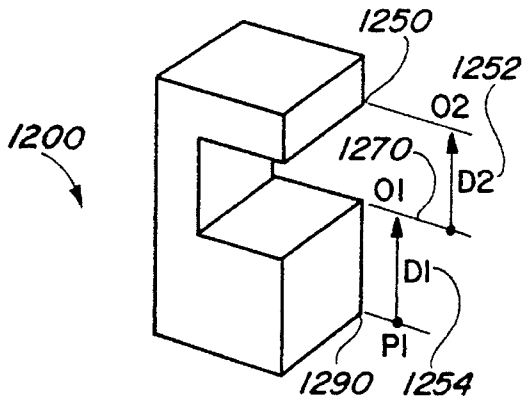


FIG-12A

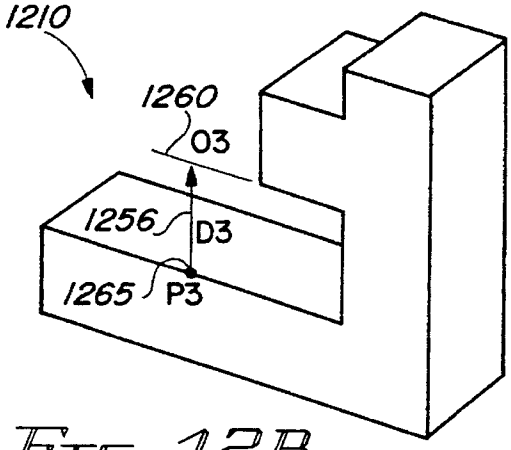


FIG-12B

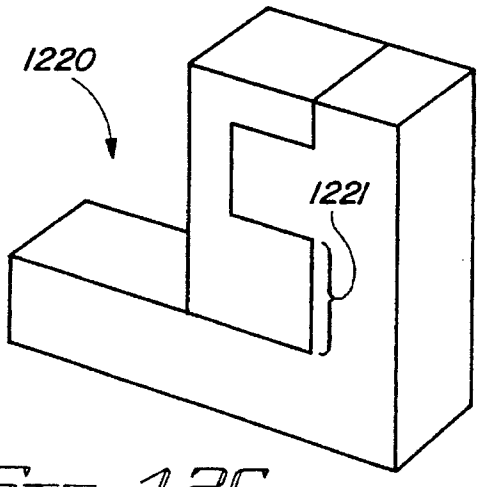


FIG-12C

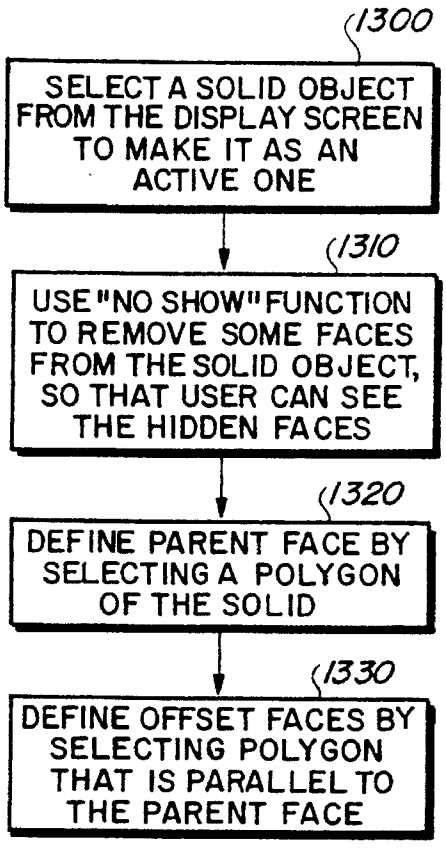


FIG-13

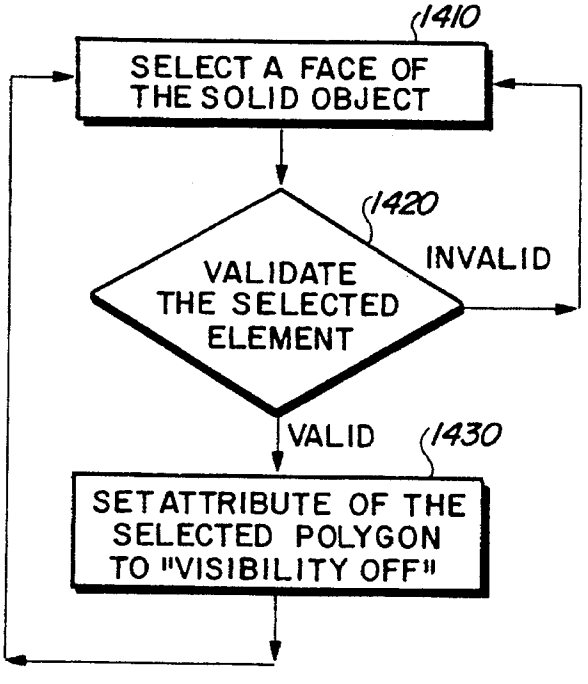


FIG-14

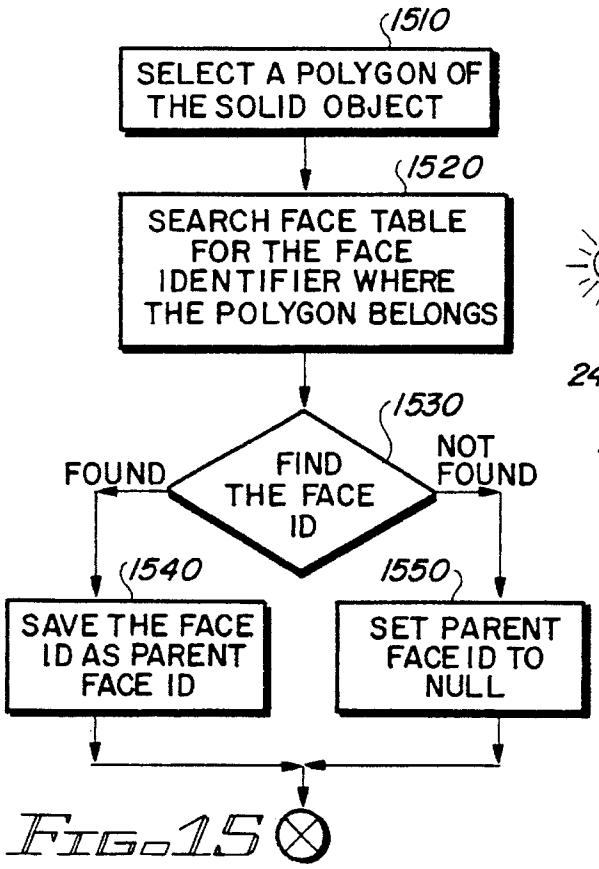


FIG-15

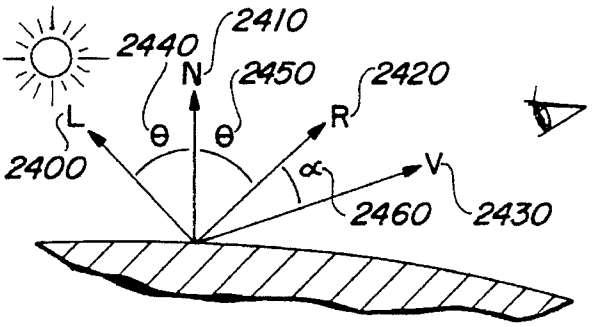


FIG-24

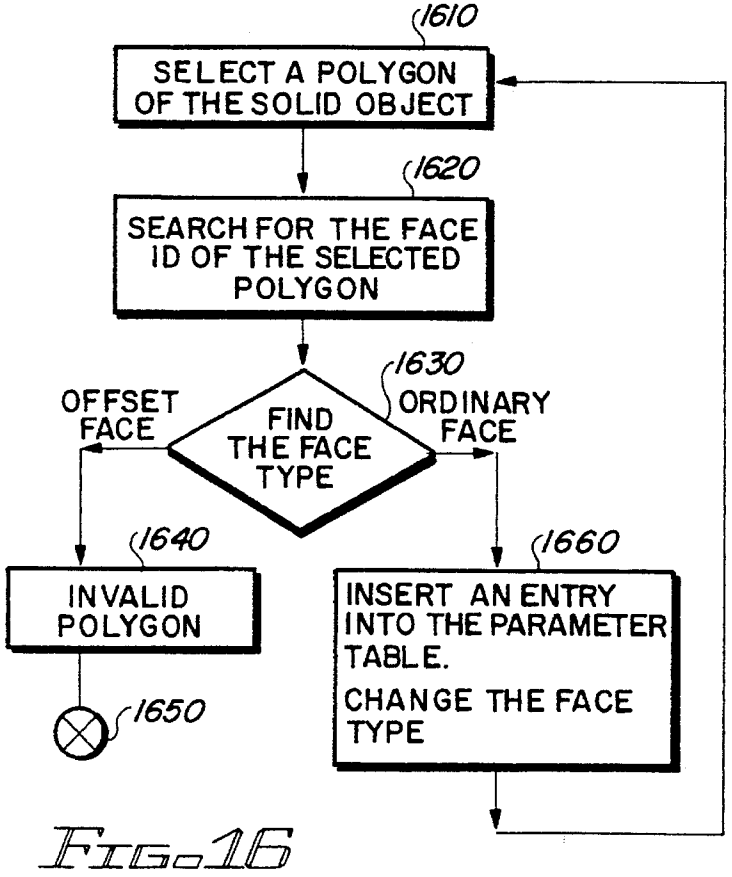


FIG-16

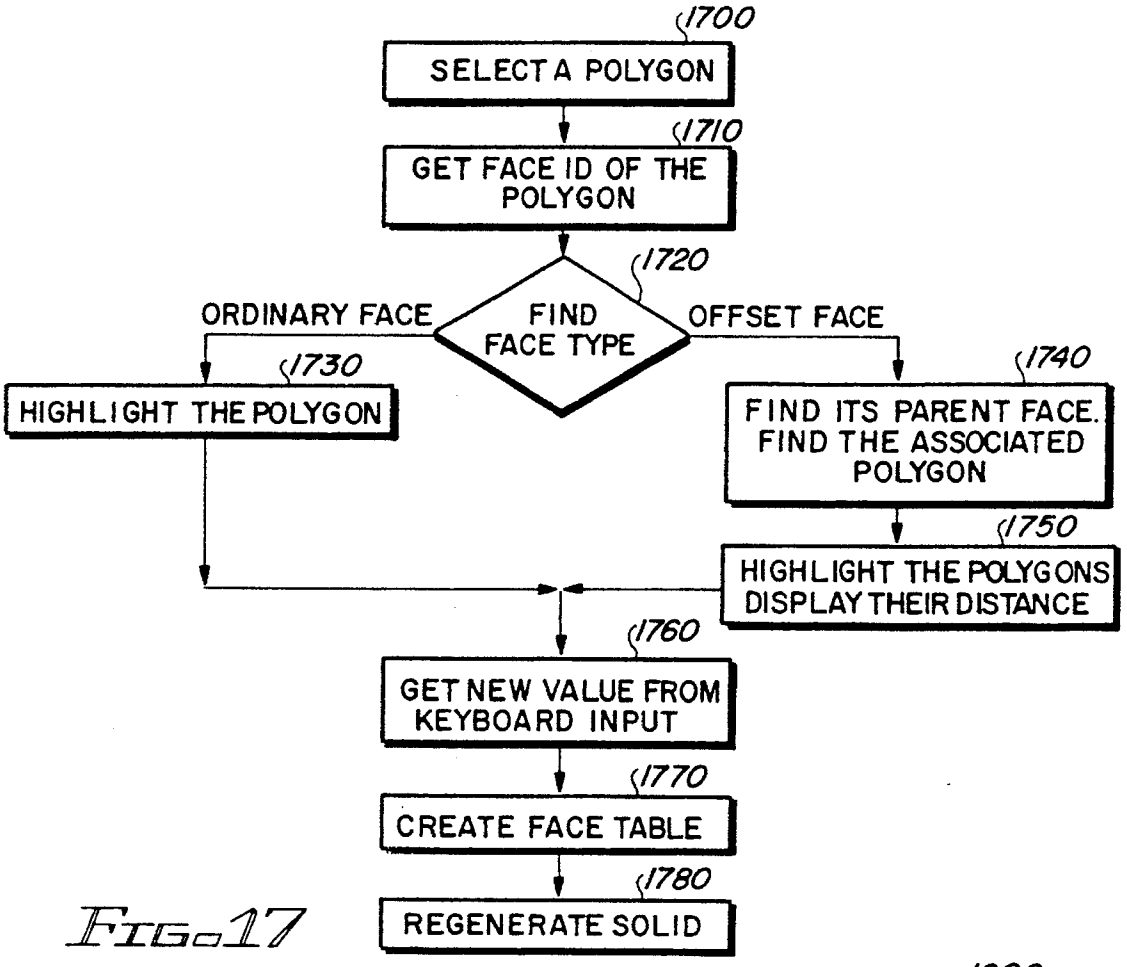


FIG-17

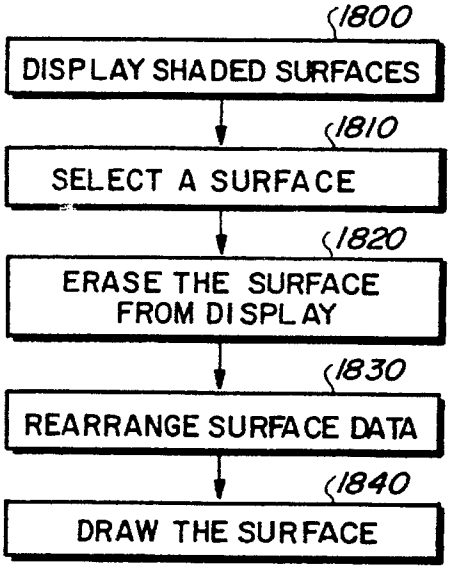


FIG-18

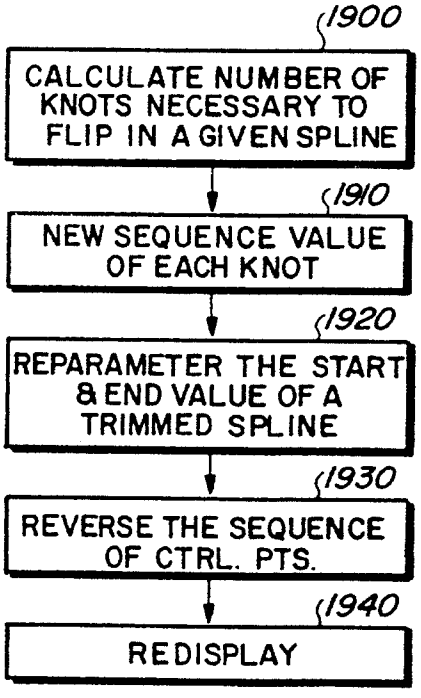


FIG-19

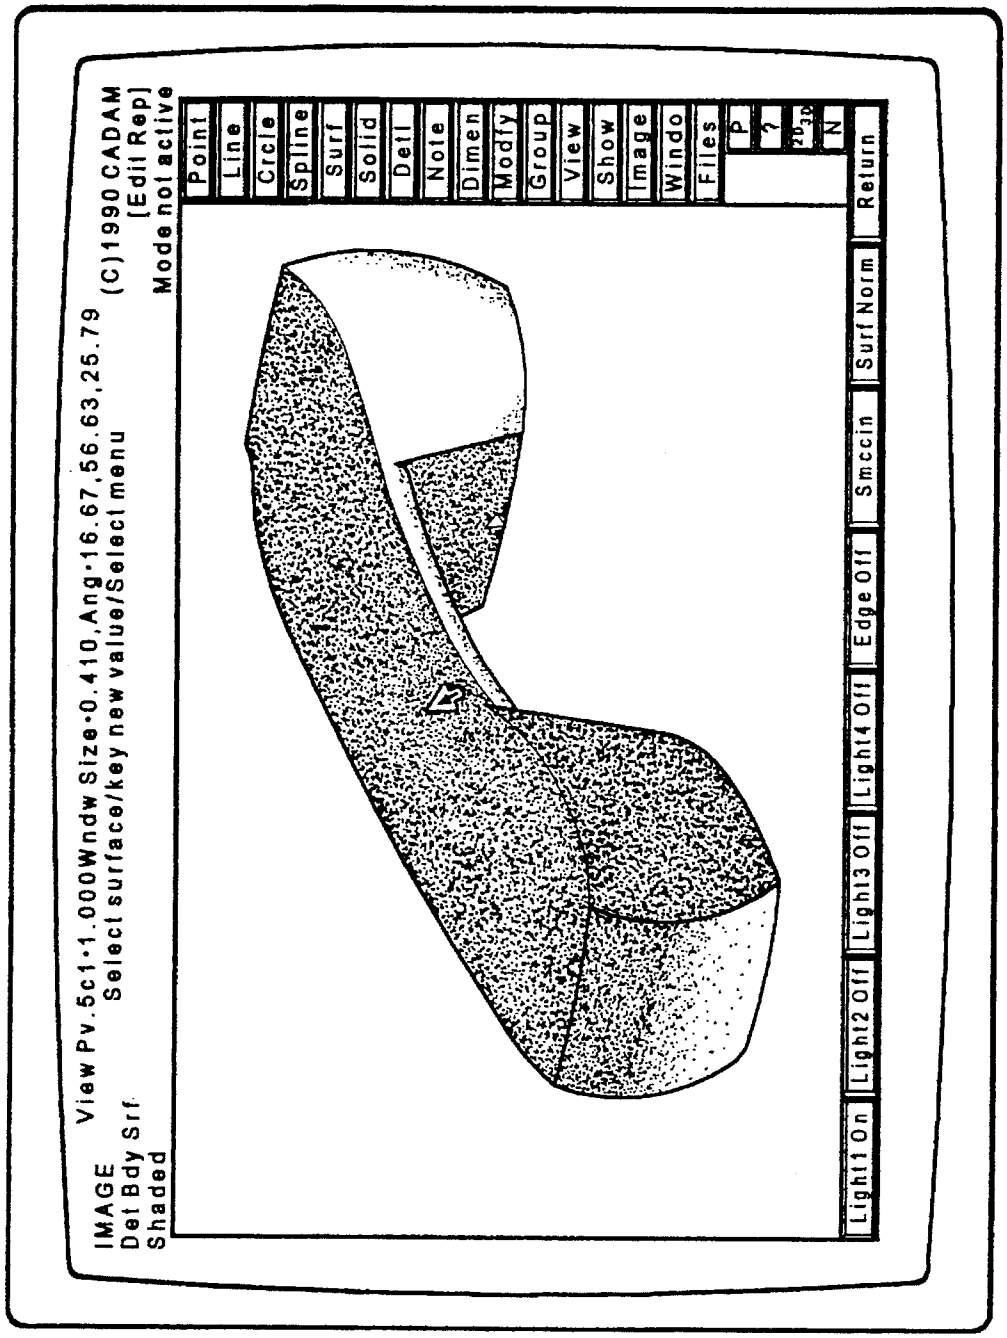

IMAGE View Pv.5c1·1.000Wndw Size·0.410,Ang·16.67,56.63,25.79 (C)1990 CADAM
Det Bdy Srf Select surface/key new value/Select menu [Edit Rep]
Shaded Mode not active
Point
Line
Circle
Spline
Surf
Solid
Delt
Note
Dimen
Modfy
Group
View
Show
Image
Windo
Files
P
?
N
Return
Surf Norm
Smccln
Edge Off
Light4 Off
Light3 Off
Light2 Off
Light1 On

Fig. 20

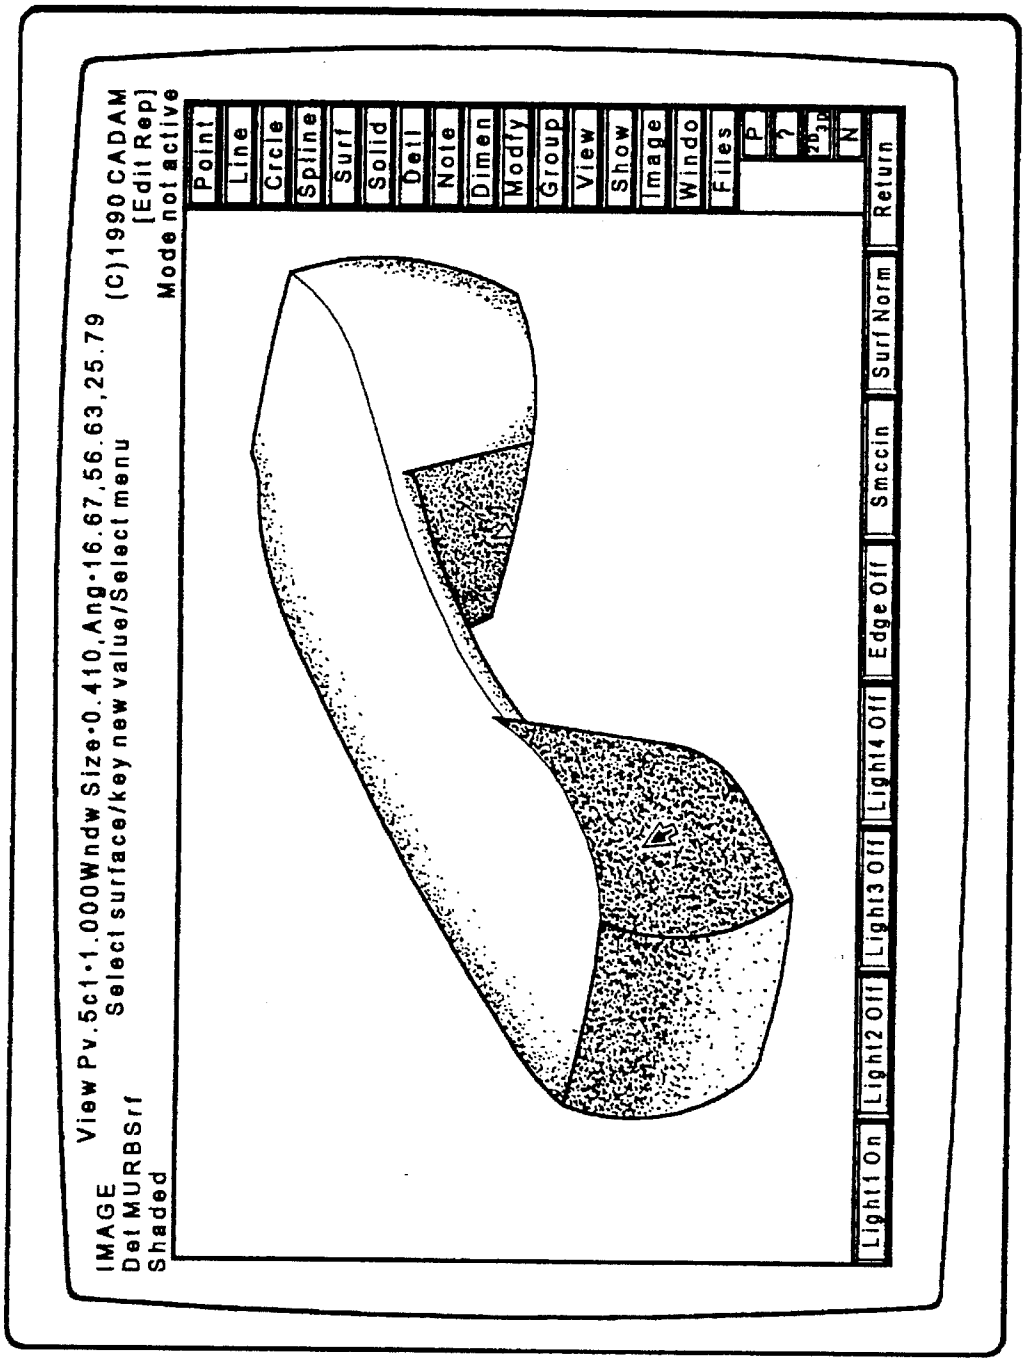

IMAGE
Det MURBSrf
Shaded
View Pv.5c1•1.000Wndw Size•0.410,Ang•16.67,56.63,25.79
Select surface/key new value/Select menu
(C)1990 CADAM
[Edit Rep]
Mode not active
Point
Line
Crcle
Spline
Surf
Solid
Detl
Note
Dimen
Modfy
Group
View
Show
Image
Windo
Files
P
?
N
Return
Surf Norm
Smccln
Edge Off
Light4 Off
Light3 Off
Light2 Off
Light1 On

Fig. 21

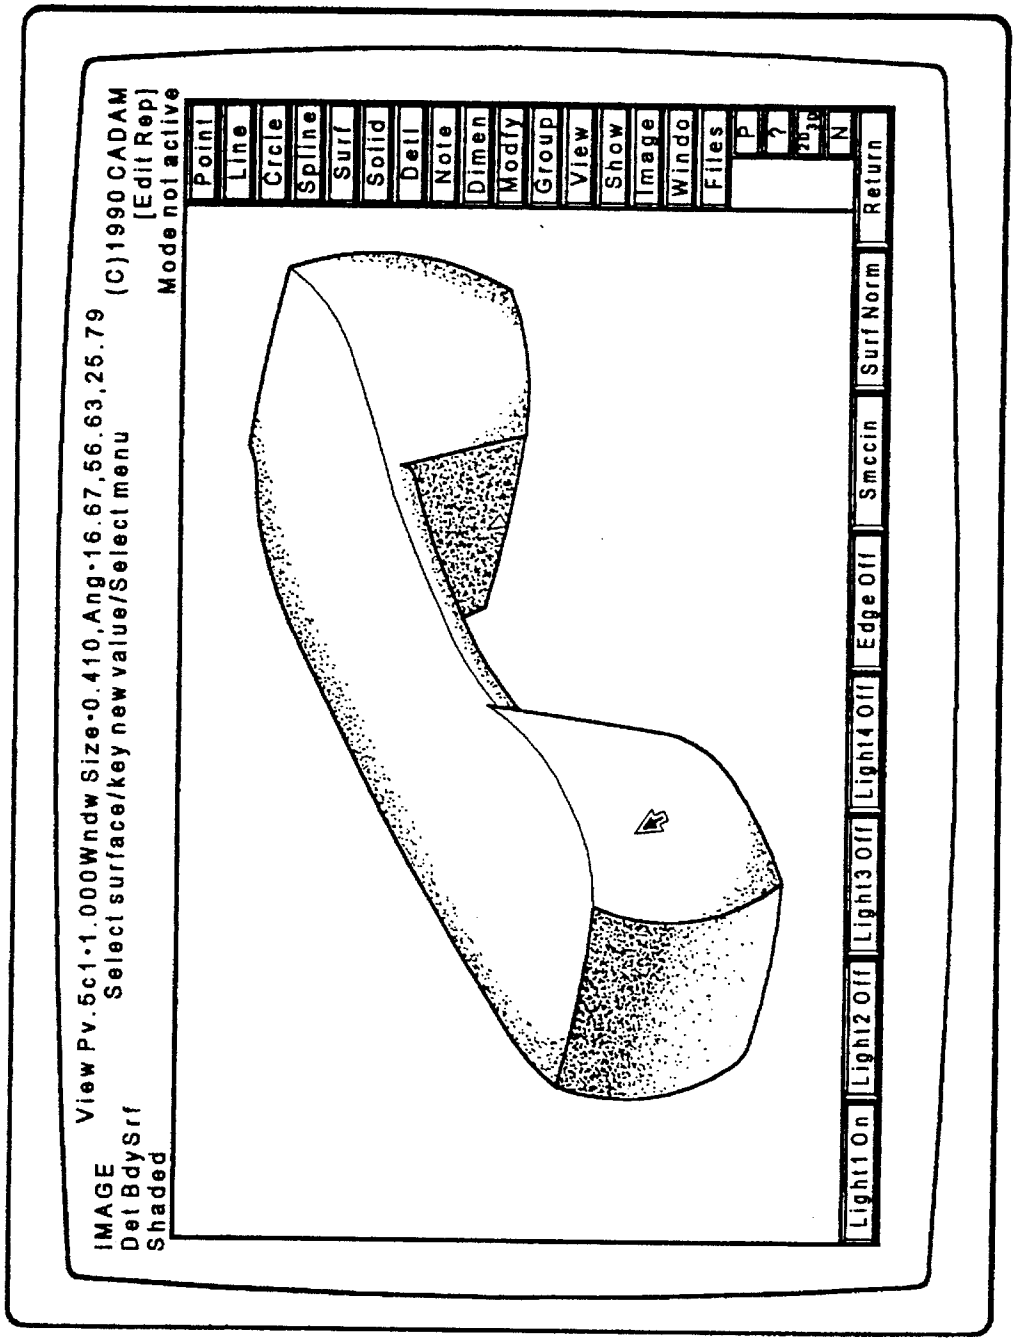

IMAGE
Del BdySrf
Shaded
View Pv.5c1.1.000Wndw Size.0.410,Ang.16.67,56.63,25.79
Select surface/key new value/Select menu
(C)1990 CADAM
[Edit Rep]
Mode not active
Point
Line
Circle
Spline
Surf
Solid
Dell
Note
Dimen
Modify
Group
View
Show
Image
Windo
Files
P
?
N
Return
Light1 On
Light2 Off
Light3 Off
Light4 Off
Edge Off
Smccin
Surf Norm

Fig. 22

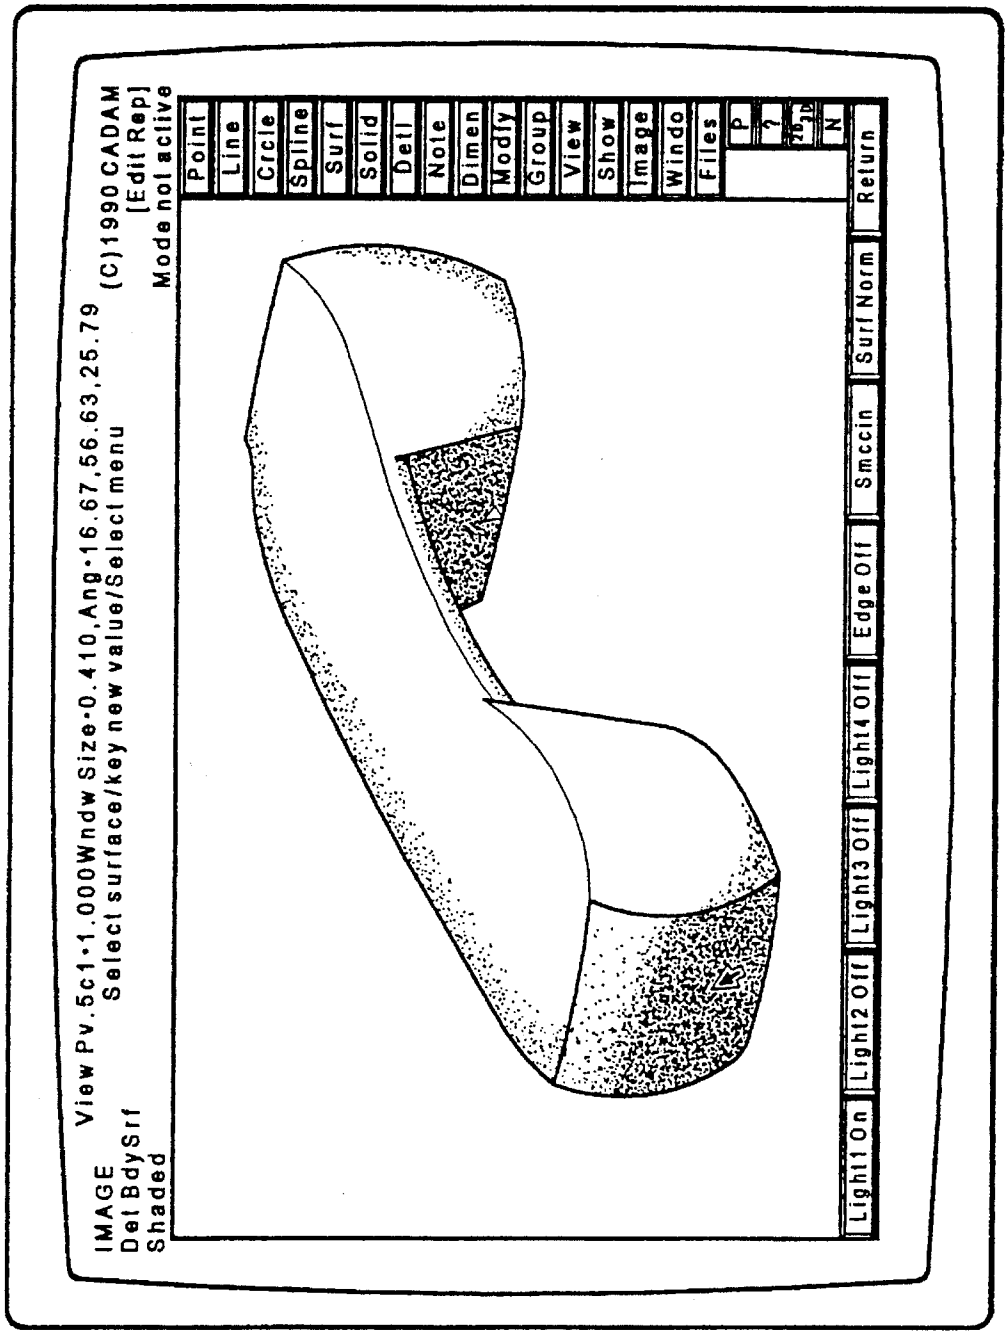

IMAGE
Del BdySrf
Shaded
View Pv.5c1•1.000Wndw Size•0.410,Ang•16.67,56.63,25.79
Select surface/key new value/Select menu
(C)1990 CADAM
[Edit Rep]
Mode not active
Point
Line
Circle
Spline
Surf
Solid
Dell
Note
Dimen
Modify
Group
View
Show
Image
Windo
Files
P
?
N
Return
Surf Norm
Smccin
Edge Off
Light4 Off
Light3 Off
Light2 Off
Light1 On

Fig. 23

METHOD AND APPARATUS FOR CREATING SOLID MODELS FROM TWO-DIMENSIONAL DRAWINGS ON A GRAPHICS DISPLAY

This is a continuation, of application Ser. No. 07/618,138, filed Nov. 26, 1990, now abandoned.

FIELD OF THE INVENTION

This invention generally relates to improvements in computer aided design (CAD) systems and more particularly to an enhanced method and apparatus for generating solid representations on a graphic display.

BACKGROUND OF THE INVENTION

This application is related to the following co-pending applications owned by the same assignee:

METHOD AND APPARATUS FOR GENERATING THREE DIMENSIONAL DRAWING ON A GRAPHICS DISPLAY, 07/618,187;

METHOD AND APPARATUS FOR SHADING SURFACES 0F A THREE DIMENSIONAL DRAWING, 07/617,705;

ENHANCED MULTIDIMENSIONAL DESIGN KEYBOARD, 07/617,830.

In CAD applications, it is important to be able to transform two-dimensional representations of objects into solid representations. The automobile and aircraft industries were two of the first to exploit this function for mechanical assemblies. Examples of general CAD systems are disclosed in U.S. Pat. Nos. 4,962,472; 4,849,913; and 4,912,664. Three basic techniques were developed for transforming two dimensional representations into three dimensional, solid models.

The first basic technique is primitive instancing. In primitive instancing, the modeling system defines a set of primitive, three dimensional solid shapes that are appropriate for the particular application. For example, a primitive object may be a regular pyramid with a user-defined number of faces meeting the apex. Primitive instances are similar to parametized objects, except the objects are solids. A parametized primitive may be thought of as defining a family of parts whose members vary in a few parameters. These family of parts are referred to as group technology.

Primitive instancing is often used for relatively complex objects, such as gears or bolts, that are tedious to define in terms of Boolean combinations of simpler objects. A gear or bolt can be defined in terms of its diameter and number of teeth. In primitive instancing, no provisions are made for combining objects to form a new, higher-level object. Thus, the only way to create a new kind of object is to write the code that defines the new object. This is not a practical approach to object creation in an interactive CAD package.

Sweeping an object along a trajectory path through space defines a new object called a sweep. The simplest kind of a sweep is defined by a two dimensional area swept along a linear path normal to the plane of the area to create a volume. This technique is known as a translational sweep or extrusion. It is one of the most common techniques for representing objects made by extruding metal or plastic through a die with the desired cross-section. In this simple case, each sweep's volume is simply the sweep object's area times the length of the sweep. The problem with this technique is that the user can only specify a single two dimensional representation to use in generating the solid.

The final prior art technique for generating solids is constructive solid geometry. In constructive solid geometry, simple primitives are combined by means of regularized Boolean set operators that are included directly in the representation. An object is stored as a tree with operators at the internal nodes and simple primitives as the leaves. Some nodes represent Boolean operators, whereas others perform translation, rotation and scaling.

To determine physical properties or to display the solid, the properties of the leaves must be combined to obtain the properties of the root. The complexity of this task depends on the representation in which the leaf objects are stored and on whether a full representation of the composite object at the tree's root must actually be produced. This pre-defined approach to defining a solid model is unacceptable in a system whereby a user can dynamically design and modify two dimensional representations and thereafter create three dimensional solid representations.

SUMMARY OF THE INVENTION

It is thus an object of this invention to provide an improved apparatus end method for designing and displaying three dimensional solid representations from a two dimensional drawing. The invention provides two operations to generate three dimensional solid objects from two dimensional representations of the objects. The operations are extrusion and taper. The operation of extrusion prompts the user to select geometries from a two dimensional view as a profile for input to the extrusion operation.

This is accomplished by selecting all necessary two dimensional elements from the view to include in the extrusion. Thereafter, the user is prompted to select a front and back cutting face for the extrusion. The front and back cutting faces are defined in two dimensional views other than the profile view. The system thereafter transforms the selected two dimensional elements into three dimensional geometries, and inputs them into the solid modeler for further generation of a solid object on the display.

The operation of the taper function begins by a user selecting an element from one, two dimensional view as a front cutting face. Then, the user selects geometries in other views that define the first profile on the front cutting face for taper. The profile is defined by selecting all the necessary geometries in the view to form a closed boundary. By performing the same operational sequences, the user can define the back cutting face and second profile by selecting geometries in different views. The system thereafter transforms the front and back cutting faces and the two profiles into three dimensional geometries and inputs them into the solid modeler to generate a solid object.

BRIEF DESCRIPTION OF THE DRAWING

FIG. **1** is a block diagram of a computer in accordance with the present invention;

FIG. **2** is a flow chart of the solid logic in accordance with the present invention;

FIG. **3** is a flow chart of the solid logic for a tapered solid in accordance with the present invention;

FIGS. **4A–4I** are an illustration of the steps used to generate an extruded solid in accordance with the present invention;

FIGS. **5A–5I** are an illustration of the steps used to generate an extruded solid in accordance with the present invention;

FIGS. **6A–6I** are an illustration of the steps used to generate a tapered solid in accordance with the present invention;

FIG. **7** is an illustration of a step used to generate a tapered solid in accordance with the present invention;

FIGS. **8A–8K** are an illustration of a set of steps used to generate a tapered solid in accordance with the present invention;

FIG. **9** is an illustration of a pair of two dimensional drawings in accordance with the present invention;

FIG. **10** is an illustration of a solid model in accordance with the present invention;

FIG. **11** is an illustration of the parameter function menu options in accordance with the present invention;

FIGS. **12A–12C** are an illustration of correlating parametric entities in accordance with the present invention;

FIG. **13** is a flowchart describing the logic of defining relationships between the faces of a solid object in accordance with the subject invention;

FIG. **14** is a flowchart describing the logic of the No Show function in accordance with the subject invention;

FIG. **15** is a flowchart of the logic implementing the defining a parent face in accordance with the subject invention;

FIG. **16** is a flowchart of the logic implementing the defining an offset face in accordance with the subject invention;

FIG. **17** is a flowchart of the logic implementing the Change parameter function in accordance with the subject invention;

FIG. **18** is a flowchart depicting the logic of the shading surface normal in accordance with the subject invention;

FIG. **19** is a flowchart depicting the logic of the rearranging surface data in accordance with the subject invention;

FIG. **20** is an illustration of a reverse normal of a top surface in accordance with the subject invention;

FIG. **21** is an illustration of a select side surface display in accordance with the subject invention;

FIG. **22** is an illustration of a reverse normal of a side surface display in accordance with the subject invention;

FIG. **23** is an illustration of a reverse normal of a front surface in accordance with the subject invention; and

FIG. **24** is an illustration of diffracted light from a display in accordance with the subject invention.

DETAILED DESCRIPTION OF THE INVENTION

With reference to FIG. **1**, the apparatus of the subject invention is a standard microprocessor such as that marketed by IBM under the product name of PS/2. The CPU **10** can be an 80386 or 80486 processor for example. The CPU **10** has Direct Memory Access (DMA) to the RAM **20**, Disk **30** and Diskette **40**. The CPU **10** can also transmit information via the Communication Link **50**.

The CPU **10** also communicates to an attached graphic display to display information in EGA, VGA or other higher resolution modes. A mouse **70** is an optional cursor pointing device that is used to supplement the arrow keys of the keyboard **80** for specifying precise pointings on the graphic display **60**. The keyboard is controlled by a keyboard adapter **82**, including buffer means, in the CPU **10**. Finally, a printer or plotter **89** can be attached to the CPU **10** to generate hardcopy of drawings.

The software used to awake the unique hardware features of this invention resides on the Disk **30** as do the drawings generated by a designer employing the invention. The software is also responsible for translating signals from the mouse/keyboard into appropriate system actions.

FIG. **2** is a flowchart representing the logic in accordance with the invention. To generate a solid from a two dimensional drawing, the drawing is first loaded into the computer memory as shown in function block **200**. The drawing should contain multiple two dimensional views of an object. The user then selects the appropriate menu selection item as depicted in input block **210**. Then, the user selects elements to form a profile for the extrusion operation as depicted in input block **220**. The elements are lines and circles on the two dimensional views from which to generate the solid model. The pointers to the selected elements are stored in the data structure set forth in Appendix **1**.

The geometric elements are selected in a clockwise or counter-clockwise sequence. When all of the necessary elements have been selected, then menu item END is selected to indicate completion. The data structure is used to store this information in a manageable fashion for further processing in accordance with the subject invention.

The user selects front and back cutting faces by selecting lines in the views other than the profile view as depicted in input block **230**. Next, the selected two dimensional elements are converted into three dimensional geometries as set forth in input block **240**. So, for example, a line becomes an unbounded plane, a circle becomes an unbounded cylinder, and a spline becomes a ruled face. The faces are stored in the PFace data structure set forth in Appendix **2**.

A Face Table is a list of faces that form the boundary of a solid. The Face Table contains plane, cylinders and free form surface information. The Face Table serves as an interface between parametric design and the solid modeler. A PFace Table is a particular face table used for parametric design. It contains parameterized faces, a parameter table and a construction list for building a solid from the faces. A construction list contains a description of how each part of the solid is created and what faces are used to form the component.

The next step converts the PFace data structure to a Face data structure for input into the solid modeler. The Face data structure is set forth in Appendix **3**.

Then, the Face data structure is input into the solid modeler to perform the extrusion taper operation as illustrated in function block **260**. The data structure shown in Appendix **4** is used in the performance of this task.

Finally, the solid object is displayed on the graphics display as shown in output block **270**. The listing shown in Appendix **5** is the source code used to implement the various transformations and display of graphic information.

An alternative embodiment of the invention allows a tapered display of a solid object to be created. The logic implementing this function is set forth in FIG. **3**. The initial steps set forth in function block **300** are identical to the solid generation discussed above. A two dimensional drawing is loaded. The user selects the solid taper menu function in input block **310**. Then, the user is prompted to select a plane representing the front cut face as shown in input block **320**. This is done by positioning the cursor on lines other than the profile view. Next, the user is prompted to select elements forming a profile of the front face as shown in input block **330**. The user selects the necessary two dimensional geometries in the profile view to form a profile for taper. Then the end menu is selected to indicate completion of profile processing.

Input block **340** depicts the user selection of the back face as the next step. The user selects lines in views other than the profile view to form a profile for the taper operation as shown in input block **350**. When the selection process is complete, the end menu item is selected. Then, in function block **360**, the two dimensional geometries are converted to three dimensional faces as depicted in function block **370** and a solid representation is generated. This processing includes conversion of the two dimensional geometries to three dimensional geometries and the corresponding conversion of data structures as discussed above. Finally, the solid is displayed as depicted in output block **380**. The data structure shown in Appendix **6** is used to store the solid object for subsequent display.

In FIGS. **4**, **5**, **6**, **7** and **8**, examples of solid generations employing the subject invention are illustrated. In FIG. **4**, a front view and a side view of a two dimensional object are presented at label **400** and **410**. To generate a solid rendition of the two, two dimensional views, the user initially selects the four lines as the profile for extrusion on the front face at label **420**. Next, the back face is selected from the side view as indicated at label **430**, and finally, four lines of the back face are selected to form the profile as shown at label **440**. This information is used to generate a three dimensional solid object as illustrated at label **450**.

FIG. **5** is another example of an extrusion. First, three lines and an arc are selected as a profile for extrusion as depicted at label **500**. Then, two lines from a side view are selected to complete the operation as shown at label **510**. The solid object is then generated as shown at label **520**.

FIG. **6** is another illustration of a solid generation. Again, two, two dimensional drawings are initially loaded add displayed as illustrated at label **600**. Then, the front face of one of the two dimensional drawings is selected as shown at label **610**. The profile for the front face is selected next as depicted at label **620**. Next, a back face is selected as shown at label **630**. Finally, the profile for the back face is selected as illustrated at label **640**, and the three dimensional solid is generated as illustrated at label **650** in FIG. **7**.

FIG. **8** illustrates a circular extrusion. Two views of the object are initially drawn as illustrated at label **800**. Then, a front face is selected as noted at label **810**. Next, the front face profile is selected as illustrated at label **820**. Finally, the back face is selected at label **830**, and the profile of the back face is also selected as illustrated at label **840**. The resultant solid is displayed as shown at label **850**.

A further example involving a more complex geometry is presented in FIG. **9** and **10**. In FIG. **9**, a pair of two dimensional views of an object are presented at **900** and **910** respectively. A solid representation of the object is generated by selecting the front face and the back face. The generated solid is shown in FIG. **10**.

Parametric Entities

In FIG. **11**, the solid function parametric modification menu options are listed and their functions are elaborated upon. At label **1000**, the menu options are displayed as they appear on a CAD display. If a user selects Def parent at label **1100**, then the user is prompted to point to a plane of a solid that will function as the parent plane. The plane must be paired with a parallel offset plane whose distance is a variable that the user would like to change.

Label **1120** lists the Define Offset menu option. This option allows a user to define a plane of the solid parallel to the parent plane as an offset plane. Label **1130** depicts the Change parameter menu option. This item is selected to display the distance value between pairs of parent and offset planes. Label **1140** depicts the Show All menu option. This option is selected to display all planes that are not currently displayed for the solid object. Label **1150** is the No Show option which temporarily suppresses the display of a selected plane of the current solid so that a hidden plane can be selected.

To commence a parametric design a user selects a solid object from the display as described in function block **1300** of FIG. **13**, and shown at label **1200** of FIG. **12**. Optionally, the user can remove some faces from the solid object using the No Show function as shown in function block **1310** of FIG. **13**. Then, the user defines a parent face by selecting a polygon of the solid as shown in function block **1320** and depicted at **1290** of FIG. **12**. Offset faces parallel to the first face are selected next as shown in function block **1330** and depicted at **1270** and **1250** of FIG. **12**. The distances between the offset faces **1252** and the distance between the parent face and the first offset face **1254** are calculated. The distance D1 **1254** is a variable distance that will be adjusted. Whereas, the distance D2 **1252** is a fixed distance that remains constant during this operation.

If the user selects the NoShow function then the logic set forth in FIG. **14** is employed to make the face invisible on the display. The user initially selects a polygon (face) of a solid and converts the pointer to a loop id as shown in function block **1410**. Then, the face is validated by searching the PFace table for the Face that contains the loop. If the face is found, then the selected polygon is a valid face as depicted in decision block **1420**. If not, then control flows to **1410**. If the face is valid, then the system sets the attribute of the selected polygon to visibility off as shown in **1430**.

The logic for defining a parent face is set forth in FIG. **15**. As above, the user begins by selecting a polygon of the solid object as shown in function block **1510**. Then, the system searches the PFace table to identify the Face that contains the loop as depicted in function block **1520**. If the Face is identified in decision block **1530**, then the Face ID as the Parent Face ID as shown in function block **1540**. However, if the Face ID is not found, then the Parent Face ID is set to a null value as shown in function block **1550**.

The logic for defining an offset face is set forth in FIG. **16**. The user initially must select a polygon of the solid object as depicted in function block **1610**. Then, the PFace table is searched for the Face ID of the selected polygon as depicted in function block **1620**. A search is next made to determine the type of the Face and based on the type, control is passed to one of two function blocks **1650** or **1660**. If the Face type is ordinary, then control is passed to function block **1660** where the distance between the Parent Face and the offset face is calculated and an entry to the parameter table is made to reflect the change. Finally, the Face Type is also changed to Offset Face. If the Face Type is already an Offset Face, then an invalid polygon has been selected as shown in function block **1640**, and control is passed to an error routine. An Offset Face can be redefined as a parent face for another offset face to form a nested relation.

FIG. **17** presents the logic implementing the Change Parameter function. Function block **1700** indicates the first step is to select a polygon from the solid displayed on the graphic display. Then, the system searches through the PFace table for the face ID which the selected polygon is associated with as shown in function block **1710**. Subsequently, the face ID is used to determine the face type as depicted in decision block **1720**. If the face type is an ordinary face, then the polygon is highlighted on the display as depicted in function block **1730**, the distance from the origin tot he face is displayed, and control passes to function block **1760**. However, if the face type is an offset face, then the PFace table is searched for the identifier of the parent face and the associated polygon as shown in function block

1740. Then, the distance between the two offset faces is calculated, displayed and the polygons are highlighted as shown in function block 1750.

Function block 1760 depicts the next step, prompting the user to enter a new value for the distance via the keyboard. The new value is used to update the parameter table. If the polygon is a parent offset type, then modify the parameter of the selected face. If it is an ordinary face, then the parameter of the ordinary face is modified. Then, as illustrated in function block 1770, the PFace table is converted into a Face table. Finally, the solid is regenerated by sending the Face table and the construction list to the solid modeler to generate the modified solid as shown in function block 1780.

FIG. 12 shows a first solid 1200 and a second solid 1210 that are modified using the parametric entity function in accordance with the invention to create a finished assembly 1220. The distance D1 1254 in solid 1200 must be correlated with distance D3 1256 to complete the assembly correctly. Thus, the user initially selects D1 1254 as the variable distance from p1 1290 to 01 1270. The distance D2 is defined as a fixed distance, and the variable distance is equated to D3 1256. Thereafter, the system expands D1 1221 to comply with D3 1256 and completes the assembly.

Surface Normal Display

In a normal CAD system, a surface can be created regardless of the facing. However, a surface has two faces, one is facing in, and the other is facing out. Depending on the position or orientation of the surface in a composite object. Surface normal is a reference for indicating the facing of a surface. It is also a vector for calculating the shading value. Since the surface normal is not specified during the creation of the surface, the image of the shaded surface may not appear correct to the viewer.

Examples of surfaces displayed which employ the subject invention are presented in FIGS. 20, 21, 22 and 23. The logic for the processing is set forth in the flowcharts illustrated in FIGS. 18 and 19. FIG. 24 illustrates the variables behind the mathematics used to implement some of the invention's logic. Finally, the detailed source code and data structures used to implement the logic is presented and described in Appendix 7.

Referring to FIG. 18, function block 1800 shows the first step which displays the shaded surfaces without user specified shading. To shade the surface, the system generates polygons to approximate the surface. By shading each polygon according to the normals to the surface on each vertex of the polygon the shaded surface is indicated appropriately.

To shade a polygon, the system prepares a color table for shading and calculates the intensity of each vertex of the polygon. The algorithm for preparing the color table is shown in the "C" listing set forth below. The logic has two steps. Step one: linearly interpolate the color values of red, green and blue (RGB) separately. To generate the three tables, (RGB) with constant incrementation from the specified ambient light value to the full color of the object. For the current display device, the shading color is generated into two-hundred levels.

Step two: the algorithm uses a cosine function on top of the result of step one to extend the range of the shading colors. The final color table will range from the specified ambient light value to shiny, bright color that will give the shaded object a shining spot when the reflection of the light source on the surface is toward the viewer's eye.

To shade a polygon, the illumination value of each vertex must be calculated. Illumination (I) is calculated with the following equation.

$$I=Amb*Ka+Lv*Kd*(L\times N)+Ks*(R\times V)^m$$

Referring to FIG. 24, Amb is the ambient light value. Ka indicates how much of the ambient light is reflected from the object's surface. Lv is the intensity of the light source. L 2400 is the light vector. N 2410 is normal to the surface at the vertex. (L×N) 2440 is the cosine value of the angle between L vector and N vector. Kd indicates how much of the diffused light reflected from the surface. R 2420 is the reflection vector. V 2430 is the vector from the vertex to the eye. (R×V) 2460 is the cosine of the angle between vector R and vector V.

Since the illumination value is a sum of the ambient factor, diffuse factor and specular factor, the result may not fall within the acceptable range. Especially, when there are multiple light sources and the graphic hardware has a limited resolution. Thus, the following modification to the original equation is made to enhance shading.

I=Max(I[1], I[21], I[3], . . . I[n]) I[i]=A+(1−A)*D[i]+(1−A-(1−A)*D[i]* S[i];

where i=1,2 . . n for n light sources.

I[i] is the illumination value for the ith light source.

A=amb*Ka; D[i]=Lv[i]*(L[i]×N);

$S[i]=(R\times V)^m$

When the intensity of each vertex of a polygon is resolved, the intensity is converted to an index to the color table. (See data structure listing shown Appendix 8.)

Then, the user is prompted to select a particular surface to display as shown in function block 1810. The surface is selected by pointing with the cursor and using the pointer's coordinates to select the appropriate surface from the CADAM data base. Next, the selected surface is erased as shown in function block 1820. Then, the surface data is rearranged as set forth in function block 1830.

Four kinds of surface data can be rearranged, ruled surfaces, revolved surfaces, boundary surfaces, boundary surfaces and skin surfaces. The data structure of these surfaces is set forth in Appendix 9.

For ruled surfaces or revolved surfaces, the sequences of the control points are inverted and the knot sequences of its splines are calculated. For boundary surfaces, the sequences of the control points of spline one and two are inverted, and their knot sequences are recalculated. Splines three and four are swapped. For skin surfaces, each profile spline has its corresponding control points inverted and the knot sequences are recalculated. FIG. 19 sets forth the detailed logic presented in function blocks 1830 and 1840.

Finally, as shown in function block 1840, the selected surface is shaded based on the rearranged information.

Boundary Surfaces

As introduced, a boundary surface stores four splines which form a closed boundary of the surface. The surface normal processing logic is set forth in Appendix 10.

Four examples of shaded surfaces are presented in FIGS. 20, 21, 22 and 23. FIG. 20 shows a reverse surface normal of a top surface. FIG. 21 shows a surface normal of a side surface. FIG. 22 shows a reverse normal of a side surface, and FIG. 23 shows a reverse normal of a front surface.

While the invention has been described in terms of a preferred embodiment in a specific system environment, those skilled in the art recognize that the invention can be practiced, with modification, in other and different hardware and software environments within the spirit and scope of the appended claims.

APPENDIX 1:

```
/*
 :.....................................................................
 :
 : PART V - The temporary records for keeping 2D elements
 :
 :.....................................................................
 :
 : option:  1- extrusion
 :          2- taper
 :          3- pyramid
 :          4- rotation
 :
 : operation:
 :
 :          1- add
 :         -1- subtract
 :
 : tip[2]      : a temporary cadam pointer to a point of a pyramid (not used)
 : front, back : record front face and back face pointer (pointer to line)
 : numbdry     : number of boundary segments in the bdry array
 : bdry        : pointer to line and circle
 : bdry1 bdry2 : only case 2 will use both index ( for taper only )
 :               rest of the cases use bdry1
 :
 :.....................................................................
 :
 : IDENTIFICATION:
 :
 : AUTHOR ..... ALLEN CHEN
 : DATE   ..... 10/15/89
 :
 :.....................................................................
*/

struct   bdrytype
```

```
    {
    short    numbdry;
    short    bdry[maxbdry][2];
    };

struct   frametype
    {
    short    option;
    short    operator;
    short    front[2], back[2];
    short    tip[2];
    struct   bdrytype * bdry1;
    struct   bdrytype * bdry2;
    };

struct   film
    {
    short    numframe;
    struct   frametype * frame[maxframe];
    };
```

APPENDIX 2:

```
/*.....................................................
 :
 : PART I - CONSTANT DEFINITIONS FOR FACE TABLE
 :.....................................................
 */
#define  FSIZE    200
#define  MXSIZE   20
#define  maxbdry  100
#define  maxframe 100

#define  VARSIZE    100

/*.................................................
 :
 : PART II - THE FACE TABLE & PARAMETRIC TABLE
 :
 :.................................................
 :
 : PFace
 :
 : FaceType :
 :
 :    1- PlaneFace
 :       subtype funcition
 :       ------- ---------------------------------
 :          0    original plane face
 :          1    define offset plane, define  :          pointer to variable table
 :               which defines the
 :               offset value or formula
 :          2    angled face
 :         11    define chamfer plane
 :
 :
 :    2- Circular Cylinder
 :       subtype funcition
```

```
:       ------- ---------------------------------
:          0    original Cylinder, defines xy and R
:          1    define offset cylinder, define dR
:          2    define location
:         11    define round
:         12    define fillet
:
:    3- ConicFace
:    4- RuledFace
:    5- FreeFormFace
:    x- Arc      define cylinder number, A1, A2
:
:.....................................................
:
: Fcode - mark the usage of the face
:
:    bit 1: solid faces
:        2: construction faces
:        3: symmetric faces (shall be defined by its children)
:        4: datum face (??? unknown yet)
:
:    note : bit map 15,14,13......3,2,1
:
:.....................................................
:
: ModVar - count how many var were changed,
:          indicate the necessity of updating Var
:          table by bringing SmallTalk parser
:          not implemented in current version.
:
.....................................................
:
: struct PlaneSym
:
:    pair : stores the other symmetric face to the base
:    base : the base face
:
```

```
  :.....................................................
  :
  : struct PlaneChm
  :
  :   p1,p2,pw -  pointer to plane faces
  :   vi,v2    -  pointer to variable table
  :
  :.....................................................
  :
  : struct   Parameter
  :
  :   mode - 1: value
  :          2: text
*/
#define ORGPLANE 0
#define OFFPLANE 1
#define SYMPLANE 2
#define CHMPLANE 11

struct PlaneOrg
   {
   double   A, B, C, D;
   };

struct PlaneOff
   {
   short    base;
   short    varid;
   };

struct PlaneSym
   {
   short    base, pair;
   short    varid;
   };

struct PlaneChm
```

```
    {
    short    p1, p2, pw;
    short    v1, v2;
    };

union  plane_ptr
    {
    struct   PlaneOrg   Porg;
    struct   PlaneSym   Psym;
    struct   PlaneOff   Poff;
    struct   PlaneChm   Pchm;
    };

struct PPlane
    {
    short    subtype;
    union    plane_ptr pclass;
    };

struct   PCylinder
    {
    double   R, X, Y, A1, A2, Z1, Z2;
    short    MatrixIndex;
    short    Udisp;
    struct   POINT *Vertics[2][13];
    };

struct   PCone
    {
    double   R1, R2, X, Y, A1, A2, Z1, Z2;
    short    MatrixIndex;
    short    Udisp;
    struct   POINT *Vertics[2][13];
    };

struct   PRuled
    {
```

```
    short    MatrixIndex;
    short    Udisp;
    struct   BSPLINE Bspl;
    };

struct   PFreeForm { int NU, NW; double *ControlPoints[50][50]; };

struct   Parameter
    {
    char     Label[8];
    double   value;
    char     text[72];
    short    mode;
    };

union face_ptr
    {
    struct   PPlane        * PlaneFace;
    struct   PCylinder     * CircularCylinder;
    struct   PCone         * ConicFace;
    struct   PRuled        * RuledFace;
    struct   PFreeForm     * FreeFormFace;
    };

struct  PFace
    {
    short    FaceType;
    short    Fcode;
    union    face_ptr fclass;
    };

struct   Matrix
    {
    double   p1[3], p2[3], p3[3], p4[3];
    };

struct   PFaces
```

```
{
short   NumberFaces;
short   NumberMatrix;
short   NumberVar;
short   ModVar;
struct  PFace       *Face       [FSIZE];
struct  Matrix      *Matrix     [MXSIZE];
struct  Parameter   *Var        [VARSIZE];
};
```

APPENDIX 3:

```
/*.....................................................................
 :
 : PART III - THE FACE TABE FOR INTERFACING WITH SOLID MODULE
 :
 :.....................................................................
 :
 : define face table interface to solid
 :
 : define face tables
 :
 : MatrixIndex stores the index to matrix list
 : SameFace    stores the index to the first equivalent face
 :             shall be maintained every time a object was created
 : Matrix      the array will start from 13 to 39.
 :
 : FaceTable
 :
 :    FaceType :  1- PlaneFace
 :                2- Circular Cylinder
 :                3- ConeFace
 :                4- RuledFace
 :                5- FreeFormFace
 :
 :.....................................................................
 :
 : IDENTIFICATION:
 :
 : AUTHOR ......... FRANK NIU
 : DATE   ......... --/--/89
 :
 :.....................................................
 */

struct   PlaneFace
   {
```

```
   double   A, B, C, D;
   };

struct   CircularCylinder
   {
   double   R, X, Y, A1, A2, Z1, Z2;
   short    MatrixIndex;
   short    Udisp;
   struct   POINT *Vertics[2][13];
   };

struct   ConeFace
   {
   double   R1, R2, X, Y, A1, A2, Z1, Z2;
   short    MatrixIndex;
   short    Udisp;
   struct   POINT *Vertics[2][13];
   };

struct   RuledFace
   {
   short    MatrixIndex;
   short    Udisp;
   struct   BSPLINE Bspl;
   };

struct   FreeFormFace { int NU, NW; double *ControlPoints[50][50]; };

struct   FaceTable
   {
   short    FaceType;
   struct   PlaneFace         *PlaneFace;
   struct   CircularCylinder  *CircularCylinder;
   struct   ConeFace          *ConeFace;
   struct   RuledFace         *RuledFace;
   struct   FreeFormFace      *FreeFormFace;
   };
```

```
struct   Faces
   {
    short    NumberFaces;
    short    NumberMatrix;
    struct   FaceTable   *FaceTable   [FSIZE];
    struct   Matrix      *Matrix      [MXSIZE];
   };
```

APPENDIX 4:

```
/*.....................................................................
 :
 : PART IV - The construction tree
 :
 :.....................................................................
 :
 : component list
 :
 : . operator :       0 disabled component
 :                    1 add component
 :                   -1 substract component
 :
 : . component type : 1 extrusion
 :                    2 taper
 :                    3 pyramid
 :                    4 rotataion
 :
 :.....................................................................
 :
 : IDENTIFICATION:
 :
 : AUTHOR ......... ALLEN CHEN
 : DATE   ......... 10/15/89
 :
 :.....................................................................
 */

struct   OneComponent
   {
   short    option;
   short    operator;
   short    numbdry;
   short    boundary[maxbdry];
   short    front, back;
   };
```

```
struct   CompHd
   {
   short    NumberComponent;
   struct   OneComponent * component[maxframe];
   };
```

APPENDIX 5:

```
/*****************************************************************************
 * Common Header files
 *****************************************************************************
 */
#include <math.h>
#include <malloc.h>
#include "3dgm1.f"
#include "3dut1.f"
#include "3dmi1.f"
#include "units.h"
#include "bspline.h"
#include "param.h"
#include "stb.h"

/*****************************************************************************
 * Header files for C_gm_telsld()
 *****************************************************************************
 */
#include "fkgp3d.h"

/*****************************************************************************
 * Header files for C_gm_trsld3x()
 *****************************************************************************
 */
#include "gt3d.h"

/*****************************************************************************
 * Definitions for C_gm_telsld()
 *****************************************************************************
 */
#define OrgPlane fclass.PlaneFace->pclass.Porg
#define Cylinder fclass.CircularCylinder
#define ConFace  fclass.ConicFace

/*****************************************************************************
 * Definitions for C_gm_trsld3x()
```

```
 ***************************************************************************
 */
#define OrgPlane fclass.PlaneFace->pclass.Porg

/***************************************************************************
 * Function declearations for C_gm_telsld()
 ***************************************************************************
 */
static void  C_gm_1_remake_ABCD   ( short, double[],
                                    double, double, double, double,
                                    double*, double*, double*, double* );
static void  C_gm_1_remake_matrix ( short, double[],
                                    double[][3], double[][3] );
static void  C_gm_2_point_on_plane( double, double, double, double,
                                    double, double, double,
                                    double*, double*, double* );
static void  C_gm_2_rotate_point  ( double[], double[], double[] );
static void  C_gm_2_mirror_point  ( double[], double[], double[] );


/***************************************************************************
 * Function declearations for C_gm_trsld3x()
 ***************************************************************************
 */
short C_trplnorm( short, double [], double[], double, double [], double *);
short C_trmxab ( double[],double[],double[],double[],double[]);
short C_trmxlc ( double[],double[],double[],double[],double[]);


/***************************************************************************
 * [Function Name]
 *    iret = C_gm_telsld ( iopt, tdata, solid_ptr )
 *
 * [Category]
 *    Geometric Calculation ( Translation of element )
 *
 * [Description]
```

```
*    Transform SOLID
*
* [Parameters]
*    (i) short  iopt    -- Processing Option
*                             1 : Translation (Move)
*                             2 : Mirroring
*                             3 : Rotation
*                             4 : Scaling
*
*    (i) double tdata[] -- Data for Translation
*                          iopt=1 => tdata[3]: DX,DY,DZ
*                          iopt=2 => tdata[12]: Data of Mirror Plane
*                          iopt=3 => tdata[7]: X,Y,Z (Point on Axis)
*                                              A,B,C (Vextor of Axis)
*                                              ANG   (Rotation Angle)
*                          iopt=4 => tdata[4]: X,Y,Z (Center of Scale)
*                                              SCL   (Scaling Factor)
*
*    (i) short  solid_ptr[2] -- Pointer of Solid (In)
*
*    (o) short  iret    -- Return Code (0:OK, 1:Error)
*
* [External Variables]
*       struct PFaces  PFaces
*       struct Comphd  CompList
*
* [Calls]
*       Retv_Solid              ( defparam.c )
*       Q_subtype               (     ,,     )
*       Q_Plane_ABCD            (     ,,     )
*       Save_Parameters         (     ,,     )
*       Save_Solid              (     ,,     )
*       del_solid_polygons      ( entersd.c  )
*
* [Restriction]
*
* [Algorithm]
```

```
 *
 *      1. Get face table from elmptr
 *      2. Transform face table
 *      3. Transform working plane
 *      4. Validate the transformed solid
 *      5. Save the transfomed solid
 *
 ****************************************************************************
 *
 *   Created by     ....  Eiji Nakano
 *      Date        ....  2/23/90
 *
 ****************************************************************************
 *
 *   Modified by    ....  Allen Chen
 *      Date        ....  6/25/90
 *      Nature(#1)  ....  Change stb.h and param.h
 *
 *   Modified by    ....  Allen Chen
 *      Date        ....  10/3/90
 *      Nature(#2)  ....  use local variables (PFaces, Solid, Complist)
 *                        copy solid is a special case, done by cpysld() in
 *                        solidmi.c.
 *                        Fix error in scaling face table and working plane.
 *
 ****************************************************************************
 */

short C_gm_telsld( iopt, tdata, solid_ptr )
short  iopt;
short  solid_ptr[];
double tdata[];
{
   char   sname[128];
   char   lbl[8],str[72];
   short  fid,stype;
   short  ftype;
```

```
short  iret;
short  i;
short  ihdata[10];
short  pid,mode;
double value;
double A,B,C,D;
double AA,BB,CC,DD;
double new_matrix[4][3], old_matrix[4][3];

struct PFaces *PFaces;
struct Comphd *CompList;
struct SolidTable *Solid;

PFaces = (struct PFaces *) malloc (sizeof (struct PFaces));
if (PFaces == 0)  return 200;
CompList = (struct Comphd *) malloc (sizeof(struct Comphd));
if (CompList == 0)
   {
   free(PFaces);
   return 200;
   }
Solid = (struct SolidTable *) malloc (sizeof(struct SolidTable));
if (Solid == 0)
   {
   free(PFaces);
   free(CompList);
   return 200;
   }

ihdata[0] = 0;

Retv_Solid( solid_ptr, PFaces, CompList, sname );

for( fid=1; fid<=PFaces->NumberFaces; fid++ )
{
   ftype = PFaces->Face[fid]->FaceType;
/*********/
```

```
/* plane */
/*********/
   if( ftype == 1 )
   {
     /*.....................................................
       : Allen Chen 10/9/90
       : offset faces shall be scaled with scaling value
       :.....................................................
       */.
      Q_subtype( PFaces, fid, &stype );
      if ( stype != 0 )
         {
         if (iopt == 4)
            {
            iret = Q_OffFace(PFaces,fid,&pid,lbl,&value,str,&mode);
            if (iret == 0)
               {
               value *= tdata[3];
               iret = Mod_OffFace((short)1,PFaces,pid,fid,value,str);
               }
            }
         }
      else
         {
         Q_Plane_ABCD( PFaces, fid, &A, &B, &C, &D );

         C_gm_1_remake_ABCD( iopt, tdata, A, B, C, D, &AA, &BB, &CC, &DD );

         PFaces->Face[fid]->OrgPlane.A = AA;
         PFaces->Face[fid]->OrgPlane.B = BB;
         PFaces->Face[fid]->OrgPlane.C = CC;
         PFaces->Face[fid]->OrgPlane.D = DD;
         }
   }
/***********************************/
/* cylinder or conic  and  scaling */
/***********************************/
```

```
   else if( (ftype == 2 || ftype == 3) &&  iopt == 4 )
   {
   /************/
   /* cylinder */
   /************/
       if( ftype == 2 )
       {
          PFaces->Face[fid]->Cylinder->R *= tdata[3];
          PFaces->Face[fid]->Cylinder->X *= tdata[3];
          PFaces->Face[fid]->Cylinder->Y *= tdata[3];
       }
   /*********/
   /* conic */
   /*********/
       else if( ftype == 3 )
       {   PFaces->Face[fid]->ConFace->R1 *= tdata[3];
           PFaces->Face[fid]->ConFace->R2 *= tdata[3];
           PFaces->Face[fid]->ConFace->X  *= tdata[3];
           PFaces->Face[fid]->ConFace->Y  *= tdata[3];
       }
   }
}

for( i=1; i<=PFaces->NumberMatrix; i++ )
{
   C_ut_dpsto( 3, PFaces->Matrix[i]->p1, old_matrix[0] );
   C_ut_dpsto( 3, PFaces->Matrix[i]->p2, old_matrix[1] );
   C_ut_dpsto( 3, PFaces->Matrix[i]->p3, old_matrix[2] );
   C_ut_dpsto( 3, PFaces->Matrix[i]->p4, old_matrix[3] );
   C_gm_1_remake_matrix( iopt, tdata, old_matrix, new_matrix );
   C_ut_dpsto( 3, new_matrix[0], PFaces->Matrix[i]->p1 );
   C_ut_dpsto( 3, new_matrix[1], PFaces->Matrix[i]->p2 );
   C_ut_dpsto( 3, new_matrix[2], PFaces->Matrix[i]->p3 );
   C_ut_dpsto( 3, new_matrix[3], PFaces->Matrix[i]->p4 );
}
/*.....................................................
 : Allen Chen 10/2/90
```

```
    : option 1 is replacing the model block with the new data.
    : See "solidmi.c" for details.
    :.....................................................
    */
   iret = mksolid (PFaces, CompList, Solid);
   if (iret == 0)
      iret = C_mi_sdstore ((short)1, PFaces, CompList, sname, ihdata, solid_ptr );

   C_sd_cpftable(PFaces);
   C_sd_ccompl(CompList);
   FreeSolid (Solid);
   free (Solid);
   free (CompList);
   free (PFaces);
   if (iret != 0) iret = 1;
   return( iret );
}

/*.....................................................................
 : static void C_gm_1_remake_ABCD( iopt, tdata, A. B, C, D, AA, BB, CC, DD )
 :
 :  make new plane data from old plane data
 :
 :  input   short   iopt   ---  1   move
 :                             2   mirror
 :                             3   rotate
 :                             4   scale
 :          double  tdata[] --  Data for Translation
 :                             iopt=1 => tdata[3]: DX,DY,DZ
 :                             iopt=2 => tdata[12]: Data of Mirror Plane
 :                             iopt=3 => tdata[7]: X,Y,Z (Point on Axis)
 :                                                 A,B,C (Vextor of Axis)
 :                                                 ANG   (Rotation Angle)
 :                             iopt=4 => tdata[4]: X,Y,Z (Center of Scale)
 :                                                 SCL   (Scaling Factor)
 :          double  A,B,C,D  -  old plane data
 :
```

```
 :  output  double  *AA,*BB,*CC,*DD -  new plane data
 :.....................................................................
 : Allen Chen 10/8/90
 : make the vector [AA,BB,CC] as unit vector
 :.....................................................................
 */
static void C_gm_1_remake_ABCD( iopt, tdata, A, B, C, D, AA, BB, CC, DD )
short  iopt;
double tdata[];
double A,B,C,D;
double *AA,*BB,*CC,*DD;
{
    double pt1[3],pt2[3],dist[3];
    double d;

/********/
/* move */
/********/
    if( iopt == 1 )
    {   *AA = A;
        *BB = B;
        *CC = C;
        *DD = A*tdata[0] + B*tdata[1] + C*tdata[2] + D;
    }
/**********/
/* mirror */
/**********/
    else if( iopt == 2 )
    {   C_gm_2_point_on_plane( A, B, C, D, 0.0, 0.0, 0.0,
                                                &pt1[0], &pt1[1], &pt1[2] );
        pt2[0] = pt1[0] + A;
        pt2[1] = pt1[1] + B;
        pt2[2] = pt1[2] + C;
        C_gm_2_mirror_point( pt1, tdata, pt1 );
        C_gm_2_mirror_point( pt2, tdata, pt2 );

        *AA = pt2[0] - pt1[0];
```

```
        *BB = pt2[1] - pt1[1];
        *CC = pt2[2] - pt1[2];
        d = sqrt((*AA)*(*AA) + (*BB)*(*BB) + (*CC)*(*CC));
        *AA /= d;
        *BB /= d;
        *CC /= d;
        *DD = *AA*pt1[0] + *BB*pt1[1] + *CC*pt1[2];
    }
/**********/
/* rotate */
/**********/
    else if( iopt == 3 )
    {   C_gm_2_point_on_plane( A, B, C, D, 0.0, 0.0, 0.0,
                                                &pt1[0], &pt1[1], &pt1[2] );
        pt2[0] = pt1[0] + A;
        pt2[1] = pt1[1] + B;
        pt2[2] = pt1[2] + C;
        C_gm_2_rotate_point( pt1, tdata, pt1 );
        C_gm_2_rotate_point( pt2, tdata, pt2 );

        *AA = pt2[0] - pt1[0];
        *BB = pt2[1] - pt1[1];
        *CC = pt2[2] - pt1[2];
        d = sqrt((*AA)*(*AA) + (*BB)*(*BB) + (*CC)*(*CC));
        *AA /= d;
        *BB /= d;
        *CC /= d;
        *DD = *AA*pt1[0] + *BB*pt1[1] + *CC*pt1[2];
    }
/*********/
/* scale */
/*********/
    else if( iopt == 4 )
    {   C_gm_2_point_on_plane( A, B, C, D, tdata[0], tdata[1], tdata[2],
                                                &pt1[0], &pt1[1], &pt1[2] );
        C_ut_dpsub( 3, pt1, tdata, dist );
        C_ut_dpmult( 3, tdata[3], dist, dist );
```

```
        C_ut_dpadd( 3, tdata, dist, pt1 );

        *AA = A / tdata[3];
        *BB = B / tdata[3];
        *CC = C / tdata[3];
        d = sqrt((*AA)*(*AA) + (*BB)*(*BB) + (*CC)*(*CC));
        *AA /= d;
        *BB /= d;
        *CC /= d;
        *DD = *AA*pt1[0] + *BB*pt1[1] + *CC*pt1[2];
    }
}
/*.....................................................................
 : static void C_gm_1_remake_matrix( iopt, tdata, old_matrix, new_matrix )
 :
 :  make new matrix data from old matrix
 :
 :  input   short   iopt    --  1   move
 :                             2   mirror
 :                             3   rotate
 :                             4   scale
 :         double  tdata[] --  Data for Translation
 :                             iopt=1 => tdata[3]: DX,DY,DZ
 :                             iopt=2 => tdata[12]: Data of Mirror Plane
 :                             iopt=3 => tdata[7]: X,Y,Z (Point on Axis)
 :                                                 A,B,C (Vextor of Axis)
 :                                                 ANG   (Rotation Angle)
 :                             iopt=4 => tdata[4]: X,Y,Z (Center of Scale)
 :                                                 SCL   (Scaling Factor)
 :         double  old_matrix[4][3] -- present matrix
 :  output  double  new_matrix[4][3] -- regenerated matrix
 */
static void C_gm_1_remake_matrix( iopt, tdata, old_matrix, new_matrix )
short  iopt;
double tdata[];
double old_matrix[][3];
```

```
double new_matrix[][3];
{
    short   i;
    double  pt1[3],pt2[3];
    double  dist[3];

/********/
/* move */
/********/
    if( iopt == 1 )
    {
      C_ut_dpadd( 3, old_matrix[3], tdata, new_matrix[3] );
      C_ut_dpsto( 3, old_matrix[0], new_matrix[0] );
      C_ut_dpsto( 3, old_matrix[1], new_matrix[1] );
      C_ut_dpsto( 3, old_matrix[2], new_matrix[2] );
    }
/**********/
/* mirror */
/**********/
    else if( iopt == 2 )
    {   pt1[0] = pt1[1] = pt1[2] = 0.0;
        C_gm_2_mirror_point( pt1, tdata, pt1 );

        for( i=0; i<3; i++ )
        {   C_gm_2_mirror_point( old_matrix[i], tdata, pt2 );
            C_ut_dpsub( 3, pt2, pt1, new_matrix[i] );
        }

        C_gm_2_mirror_point( old_matrix[3], tdata, new_matrix[3] );
    }
/**********/
/* rotate */
/**********/
    else if( iopt == 3 )
    {   pt1[0] = pt1[1] = pt1[2] = 0.0;
        C_gm_2_rotate_point( pt1, tdata, pt1 );
```

```
        for( i=0; i<3; i++ )
        {   C_gm_2_rotate_point( old_matrix[i], tdata, pt2 );
            C_ut_dpsub( 3, pt2, pt1, new_matrix[i] );
        }

        C_gm_2_rotate_point( old_matrix[3], tdata, new_matrix[3] );
    }
/*********/
/* scale */
/*********/
    else if( iopt == 4 )
    {
      C_ut_dpsub ( 3, old_matrix[3], tdata, dist );
      C_ut_dpmult( 3, tdata[3], dist, dist );
      C_ut_dpadd ( 3, tdata, dist, new_matrix[3] );

      C_ut_dpsto( 3, old_matrix[0], new_matrix[0] );
      C_ut_dpsto( 3, old_matrix[1], new_matrix[1] );
      C_ut_dpsto( 3, old_matrix[2], new_matrix[2] );
    }
}

/*.....................................................
 : static void C_gm_2_point_on_plane(A,B,C,D, px,py,pz, x,y,z)
 :   .................................................
 :   : by Allen Chen (2/28/90)
 :   :
 :   : find intersecting point of the plane(Ax+By+Cz=D)
 :   : and the 3D line (vector(A,B,C) & point(px,py,pz) ).
 :   :
 :   : Note: the vector of the 3D line has to be the same as
 :   :       the normal vector of the plane.
 :   :.................................................
 :
 :  input   double  A,B,C,D     plane data
 :         double  px,py,pz    3D point
 :
```

```
 :  output  double  *x,*y,*z    intersecting point
 */
static void C_gm_2_point_on_plane(A,B,C,D, px,py,pz, x,y,z)
double A,B,C,D;
double px,py,pz;
double *x,*y,*z;
{
   double tvalue;

   tvalue = ( D  - ( A*px + B*py + C*pz ) ) / ( A*A + B*B + C*C );
   *x = px + tvalue * A;
   *y = py + tvalue * B;
   *z = pz + tvalue * C;
}
/*.....................................................................
 : static void C_gm_2_rotate_point( pt1, tdata, pt2 )
 :
 :  find the point after rotation
 :
 :  input   double      pt1[3]    -- 3D point
 :          double      tdata[7]  -- rotating data: X,Y,Z (Point on Axis)
 :                                                  A,B,C (Vextor of Axis)
 :                                                  ANG   (Rotation Angle)
 :  output  double      pt2[3]    -- rotated point
 */
static void C_gm_2_rotate_point( pt1, tdata, pt2 )
double pt1[];
double tdata[];
double pt2[];
{
    double  ptw[3],ptw2[3];
    double  matrix[4][3];

    C_gm_ptxln3( pt1, tdata, ptw );
    if( C_ut_dpdist( 3, pt1, ptw ) < UNITS.toler )
    {   C_ut_dpsto( 3, pt1, pt2 );
        return;
```

```
    }

    C_ut_dpadd( 3, tdata, &tdata[3], ptw );
    C_gm_crtpln( tdata, ptw, pt1, matrix[0] );

    C_gm_tran3d( 2, matrix[0], ptw, pt1 );

    ptw2[0] = ptw[0];
    ptw2[1] = ptw[1] * cos( tdata[6] );
    ptw2[2] = ptw[1] * sin( tdata[6] );

    C_gm_tran3d( 1, matrix[0], ptw2, pt2 );
}
/*.....................................................................
 : static C_gm_2_mirror_point( pt1, tdata, pt2 )
 :
 :  find the mirroring point
 :
 :  input   double      pt1[3]    -- 3D point
 :         double      tdata[12] -- plane data
 :  output  double      pt2[3]    -- mirroring point
 */
static void C_gm_2_mirror_point( pt1, tdata, pt2 )
double pt1[];
double tdata[];
double pt2[];
{
    double ptw[3],dist[3];

    C_gm_ptxpl3( pt1, tdata, ptw );
    C_ut_dpsub( 3, ptw, pt1, dist );
    C_ut_dpadd( 3, ptw, dist, pt2 );
}


/*************************************************************************
 * [Function Name]
```

```
*    iret = C_gm_trsld3x( iopt, mtrx, ptr )
*
* [Category]
*    Geomatry Calculation
*
* [Description]
*    Convert 3D Ruled Surface
*
* [Parameters]
*    (i) short  iopt   -- Processing Option
*                            1: Local(mtrx) ==> Absolute
*                            2: Absolute ==> Local(mtrx)
*
*    (i) double mtrx[4][3] -  matrix of coordinate convention
*
*   (i/o) short ptr[2] --- pointer to Solid model block
*
*    (o) short  iret    -- Return code (0:OK,1:NG)
*
*
* [External Variables]
*
* [Calls]
*
* [Restriction]
*
* [Algorithm]
*
*************************************************************************
*
*   Created by    ....  Allen Chen
*      Date       ....  10/23/90
*
*************************************************************************
*
*   Modified by   ....
*      Date       ....
```

```
 *      Nature(#1) ....
 *
 ************************************************************************
 */

short  C_gm_trsld3x( iopt, mtrx, ptr )
short  iopt,ptr[];
double mtrx[];
{
   char   sname[128];
   short  fid,stype;
   short  ftype;
   short  iret;
   short  i;
   short  ihdata[10];
   double D;
   double DD;
   double pn[3], pnn[3];

   struct PFaces *PFaces;
   struct Comphd *CompList;
   struct SolidTable *Solid;

   PFaces = (struct PFaces *) malloc (sizeof (struct PFaces));
   if (PFaces == 0)  return 200;
   CompList = (struct Comphd *) malloc (sizeof(struct Comphd));
   if (CompList == 0)
      {
      free(PFaces);
      return 200;
      }
   Solid = (struct SolidTable *) malloc (sizeof(struct SolidTable));
   if (Solid == 0)
      {
      free(PFaces);
      free(CompList);
      return 200;
```

```
   }

Retv_Solid( ptr, PFaces, CompList, sname );
for( fid=1; fid<=PFaces->NumberFaces; fid++ )
   {
   ftype = PFaces->Face[fid]->FaceType;
   if( ftype == 1 )
      {
      /*.....................................................
       : Allen Chen 10/9/90
       : offset faces shall be scaled with scaling value
       :.....................................................
       */
      Q_subtype( PFaces, fid, &stype );
      if ( stype == 0 )
         {
         Q_Plane_ABCD( PFaces, fid, &pn[0], &pn[1], &pn[2], &D );

         iret = C_trplnorm( iopt, mtrx, pn, D, pnn, &DD );

         PFaces->Face[fid]->OrgPlane.A = pnn[0];
         PFaces->Face[fid]->OrgPlane.B = pnn[1];
         PFaces->Face[fid]->OrgPlane.C = pnn[2];
         PFaces->Face[fid]->OrgPlane.D = DD;
         }
      }
   }
if (iopt == 1 )
   for( i=1; i<=PFaces->NumberMatrix; i++ )
      {
      iret = C_trmxab ( mtrx, PFaces->Matrix[i]->p1,
                        PFaces->Matrix[i]->p2, PFaces->Matrix[i]->p3,
                        PFaces->Matrix[i]->p4);
      }
else if (iopt == 2)
   for( i=1; i<=PFaces->NumberMatrix; i++ )
      {
```

```
            iret = C_trmxlc ( mtrx, PFaces->Matrix[i]->p1,
                              PFaces->Matrix[i]->p2, PFaces->Matrix[i]->p3,
                              PFaces->Matrix[i]->p4);
            }

      iret = mksolid (PFaces, CompList, Solid);
      if (iret == 0)
         iret = C_mi_sdstore ((short)1, PFaces, CompList, sname, ihdata, ptr );

      C_sd_cpftable(PFaces);
      C_sd_ccompl(CompList);
      FreeSolid (Solid);
      free (Solid);
      free (PFaces);
      free (CompList);
      if (iret != 0) iret = 1;
      return( iret );
}

short C_trplnorm( iopt, mtrx, n, D, nn, DD)
short iopt;
double mtrx[];
double n[], D;
double nn[], *DD;
{
      double t;
      double p[3], q[3];

      p[0] = D * n[0];
      p[1] = D * n[1];
      p[2] = D * n[2];

      if (iopt == 1)
         {
         C_gm_tran3d( 11, mtrx, n, nn);
         C_gm_tran3d(  1, mtrx, p, q);
         }
```

```
    else if (iopt == 2)
       {
       C_gm_tran3d( 12, mtrx, nn, n);
       C_gm_tran3d(  2, mtrx, q, p);
       }

    t = sqrt(nn[0]*nn[0] + nn[1]*nn[1] + nn[2]*nn[2]);
    if (t < 1.e-6) return 1;
    else if (fabs(t-1.0) > 1.e-6)
       {
       nn[0] /= t;
       nn[1] /= t;
       nn[2] /= t;
       }

    *DD = nn[0]*q[0] + nn[1]*q[1] + nn[2]*q[2];

    return 0;
}

short C_trmxab ( mtrx, p1, p2, p3, p4)
double mtrx[];
double p1[],p2[],p3[],p4[];
{
    double v[3], o[3], tv[3],len;

    C_gm_tran3d( 1, mtrx, p4, o);

    v[0] = p1[0] + p4[0];
    v[1] = p1[1] + p4[1];
    v[2] = p1[2] + p4[2];
    C_gm_tran3d( 1, mtrx, v, tv);
    tv[0] -= o[0];
    tv[1] -= o[1];
    tv[2] -= o[2];
    len = sqrt(tv[0]*tv[0] + tv[1]*tv[1] + tv[2]*tv[2]);
    p1[0] = tv[0]/len;
```

```
    p1[1] = tv[1]/len;
    p1[2] = tv[2]/len;
    v[0] = p2[0] + p4[0];
    v[1] = p2[1] + p4[1];
    v[2] = p2[2] + p4[2];
    C_gm_tran3d( 1, mtrx, v, tv);
    tv[0] -= o[0];
    tv[1] -= o[1];
    tv[2] -= o[2];
    len = sqrt(tv[0]*tv[0] + tv[1]*tv[1] + tv[2]*tv[2]);
    p2[0] = tv[0]/len;
    p2[1] = tv[1]/len;
    p2[2] = tv[2]/len;

    v[0] = p3[0] + p4[0];
    v[1] = p3[1] + p4[1];
    v[2] = p3[2] + p4[2];
    C_gm_tran3d( 1, mtrx, v, tv);
    tv[0] -= o[0];
    tv[1] -= o[1];
    tv[2] -= o[2];
    len = sqrt(tv[0]*tv[0] + tv[1]*tv[1] + tv[2]*tv[2]);
    p3[0] = tv[0]/len;
    p3[1] = tv[1]/len;
    p3[2] = tv[2]/len;

    C_ut_dpsto (  3, o, p4);
    return 0;
}


short C_trmxlc ( mtrx, p1, p2, p3, p4)
double mtrx[];
double p1[],p2[],p3[],p4[];
{
    double v[3], tv[3], o[3],len;
```

```
C_gm_tran3d( 2, mtrx, o, p4);

 v[0] = p1[0] + p4[0];
 v[1] = p1[1] + p4[1];
 v[2] = p1[2] + p4[2];
 C_gm_tran3d( 2, mtrx, tv, v);
 tv[0] -= o[0];
 tv[1] -= o[1];
 tv[2] -= o[2];
 len = sqrt(tv[0]*tv[0] + tv[1]*tv[1] + tv[2]*tv[2]);
 p1[0] = tv[0]/len;
 p1[1] = tv[1]/len;
 p1[2] = tv[2]/len;

 v[0] = p2[0] + p4[0];
 v[1] = p2[1] + p4[1];
 v[2] = p2[2] + p4[2];
 C_gm_tran3d( 2, mtrx, tv, v);
 tv[0] -= o[0];
 tv[1] -= o[1];
 tv[2] -= o[2];
 len = sqrt(tv[0]*tv[0] + tv[1]*tv[1] + tv[2]*tv[2]);
 p2[0] = tv[0]/len;
 p2[1] = tv[1]/len;
 p2[2] = tv[2]/len;

 v[0] = p3[0] + p4[0];
 v[1] = p3[1] + p4[1];
 v[2] = p3[2] + p4[2];
 C_gm_tran3d( 2, mtrx, tv, v);
 tv[0] -= o[0];
 tv[1] -= o[1];
 tv[2] -= o[2];
 len = sqrt(tv[0]*tv[0] + tv[1]*tv[1] + tv[2]*tv[2]);
 p3[0] = tv[0]/len;
 p3[1] = tv[1]/len;
 p3[2] = tv[2]/len;
```

```
C_ut_dpsto ( 3, o, p4);
return 0;
}
```

APPENDIX 6:

```
/*************************************************
 *                                                *
 *   HEADER FILE FOR MICRO CADAM WRITTEN C LANGUAGE *
 *                                                *
 **************************************************
 *                                                *
 *   HEADER FILE NAME: PARAM.H                    *
 *                                                *
 **************************************************
 *                                                *
 *   IDENTIFICATION:                              *
 *                                                *
 *       AUTHOR ......... Frank Niu               *
 *       DATE   ......... 10/15/89                *
 *                                                *
 *       MODIFIED ....... Allen Chen              *
 *       DATE     ....... 4/16/90                 *
 *       NATURE   ....... Add Spline              *
 *                                                *
 *       MODIFIED .......                         *
 *       DATE     .......                         *
 *       NATURE   .......                         *
 *                                                *
 *                                                *
 **************************************************
 *                                                *
 *    NOTE ON USE:                                *
 *                                                *
 **************************************************/

#define  SSIZE 20
#define  LSIZE 400
#define  ESIZE 600
#define  VSIZE 600
#define  BSIZE 50
#define  CHLDSZ 100
```

```
#define  SD_LINE   1
#define  SD_CIRCLE 2
#define  SD_SPLINE 4

#define    F0 0.4142136
#define    F1 0.5857864

struct   LOOP_LIST
   {
    short    EdgeIndex;
    struct   LOOP_LIST    *back, *next;
    struct   LOOP_LIST    *link;
    short    used;
   };

struct   VertexTable
   {
    short    f1, f2, f3;
    double   x, y, z;
   };

struct   LINE
   {
    short    StartVertex;
    short    EndVertex;
   };

struct   CIRCLE
   {
    short    fid;
    short    StartVertex;
    short    EndVertex;
    double   A1, A2;
    struct   POINT *Vertics[13];
   };
```

```
struct   SPLINE
   {
   short    fid;        /* face number */
   short    StartVertex;
   short    EndVertex;
   struct   BSPLINE Bspl;
   };

struct   EdgeTable
   {
   short    LeftLoop;
   short    RightLoop;
   short    EdgeType;
   struct   LINE     *Line;
   struct   CIRCLE   *Circle;
   struct   SPLINE   *Spline;
   };

struct   LoopTable
   {
   short    FaceIndex;
   short    NumberEdges;
   struct   LOOP_LIST   *ListHead;
   struct   LOOP_LIST   *ListPtr;
   short    DividingLoopEdge;
   struct   LoopTable   *Ploop;
   struct   LoopTable   *Cloop;
   };

struct    SolidTable
   {
   char     name[40];
   short    NumberLoops;
   short    NumberEdges;
   short    NumberVertics;
   struct   LoopTable    *LoopTable  [LSIZE];
   struct   EdgeTable    *EdgeTable  [ESIZE];
```

```
   struct   VertexTable  *VertexTable[VSIZE];
   };

/*************************************************************************/
/*                                                                       */
/*                          hole.h                                       */
/*                                                                       */
/*************************************************************************/

struct   POLYNODE
   {
   float    x,y,z;
   short    Show_Edge;
   struct   POLYNODE  *next, *back;
   };

struct   POLYGON_AND_BOX
   {
   struct   POLYNODE *header, *ptr;
   float    Xmin, Xmax, Ymin, Ymax, Zmin, Zmax;
   };

struct   POLYGONS
   {
   struct   POLYGON_AND_BOX  *Parent;
   short    NumberChildren;
   struct   POLYGON_AND_BOX  *Children[CHLDSZ];
   };

struct   INTERSECTION
   {
   struct   POLYNODE    *NodePtr;
   short    PolyIndex;
   };
```

APPENDIX 7:

```
/* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * *
*                                                                       *
*     Function name    :  Build_xxxxxx_Color_Map ()                     *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * **
*                                                                       *
*     Category         :  COLOR MAP MANAGEMENT_____________________     *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * **
*                                                                       *
*     Description      :  Three major routines set up the color map     *
*                         for three shading modes._____________         *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * **
*                                                                       *
*     Input            :  _____ - _______                               *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * **
*                                                                       *
*     Output           :  _____ - _______                               *
*                         _____ - _______                               *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * **
*                                                                       *
*     Input/Output     :  _____ - _______                               *
*                         _____ - _______                               *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * **
*                                                                       *
*     Function returns :  ___________________________________           *
*                         ___________________________________           *
*                                                                       *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * **
*                                                                       *
*     Identification   :                                                *
*                           AUTHOR ..... Chris Chen                     *
```

```
*                       DATE ..............  04/12/90                *
*                                                                     *
*                       MODIFIED BY .......  Allen Chen              *
*                       DATE ..............  04/27/90                *
*                       NATURE (#1).....  modify cal_indices         *
*                                                                     *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * **
*                                                                     *
*     Calls           :  _____  -  ____________________________       *
*                                                                     *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * **
*                                                                     *
*     Called by       :  _____  -  ____________________________       *
*                                                                     *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * **
*                                                                     *
*     Algorithm       :  Color map has been devided into three        *
*                        different sections, CADAM MAP, USERS MAP,    *
*                        and SHADE MAP.  Their sizes are defined      *
*                        in file "shade.h".                           *
*                        CADAM MAP contains the RGB values of 16      *
*                        CADAM colors.                                *
*                                                                     *
*                        USERS MAP stores the RGB values of those     *
*                        colors used by button, window, icon, and     *
*                        text.  Currently, 16 entries are allocated   *
*                        for USERS MAP.                               *
*                                                                     *
*                        SHADE MAP includes 216 entries which are     *
*                        the shading colors for surface display.      *
*                                                                     *
*                        In Dither shading mode, 216 "fixed colors"   *
*                        are reserved for HOOPS standard shading.     *
*                                                                     *
*                        In Constant shading mode, 216 colors are     *
*                        separated into 12 sections for the default   *
*                        color and 11 CADAM object colors.  Each      *
```

section contains 18 shade levels of the standard colors.

In Smooth shading mode, all colors are the different shade level of the selected shading color (first entry of USERS MAP).

Glossary : _____ - _____
_____ - _____

Notes on use : Normally, two colors are reserved for the display of mouse cursor, so the total number of the available color is 254. These colors can be classified into three catagories :

The "regular color" is genererated by the use of Set_Color_By_Value routines. Each color of different RGB value occupy one entry on the hardware color lookup table, and their value can not be changed or delete by any HOOPS routine.

The "fixed color" is used by the HOOPS to generate the dither shading.

The "map color" is stored in the virtual color map of each segment. Its RGB value can be changed by the programmer.

Due to the arrangement of the color map, there is only one shading mode can exist at any time.

```
*                                                                    *
* * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * * */
#include <stdio.h>
#include <math.h>
#include "constd.h"
#include "color.h"
#include "shade.h"
#include "mltwdw.h"

/*--------------------------------------------------------------------*/
/*                                                                    */
/*    RGB color value for 64 EGA emulation colors                     */
/*                                                                    */
/*--------------------------------------------------------------------*/

short color_table[64][3] =
{
   { 0, 0, 0},{ 0, 0,66},{ 0,66, 0},{ 0,66,66},{66, 0, 0},{66, 0,66},{66,66,0},{66,66,66},

   { 0, 0,33},{ 0, 0,99},{ 0,66,33},{ 0,66,99},{66, 0,33},{66, 0,99},{66,66,33},{66,66,99},

   { 0,33, 0},{ 0,33,66},{ 0,99, 0},{ 0,99,66},{66,33, 0},{66,33,66},{66,99, 0},{66,99,66},

   { 0,33,33},{ 0,33,99},{ 0,99,33},{ 0,99,99},{66,33,33},{66,33,99},{66,99,33},{66,99,99},

   {33, 0, 0},{33, 0,66},{33,66, 0},{33,66,66},{99, 0, 0},{99, 0,66},{99,66, 0},{99,66,66},

   {33, 0,33},{33, 0,99},{33,66,33},{33,66,99},{99, 0,33},{99, 0,99},{99,66,33},{99,66,99},

   {33,33, 0},{33,33,66},{33,99, 0},{33,99,66},{99,33, 0},{99,33,66},{99,99, 0},{99,99,66},

   {33,33,33},{33,33,99},{33,99,33},{33,99,99},{99,33,33},{99,33,99},{99,99,33},{99,99,99}
};

RGB   Color_Map[COLOR_MAP_SIZE];
```

```
void  MC_Build_Color_Map ();
void  Show_Color_By_RGB (short index, short *R, short *G, short *B);
void  Show_Color_By_Value (short index, short *value);
void  Set_Color_By_RGB (short index, short R, short G, short B);
void  Set_Color_By_Value (short index, short value);

static void  Build_Normal_Color_Map ();
static void  Build_Dither_Color_Map ();
static void  Build_Constant_Color_Map ();
static void  Build_Gouraud_Color_Map ();
static void  Set_Cadam_Color_Map ();
static void  Set_Users_Color_Map ();


/*-------------------------------------------------------------------------*/
/*                                                                         */
/*    Initialize_Color_Map : Initialize color map.                         */
/*                                                                         */
/*-------------------------------------------------------------------------*/

void Initialize_Color_Map (short level)
{
   switch (level)
   {
      case 0 : COLOR.clmod    =  0;              /* Modal color number */
               COLOR.clcur    =  1;              /* Current color number on side bar */

      case 1 : COLOR.clmct[0] = 63;
               COLOR.clmct[1] = 26;
               COLOR.clmct[2] = 63;
               COLOR.clmct[3] =  0;
               COLOR.clmct[4] =  0;
               COLOR.clmct[5] = 18;
               COLOR.clmct[6] = 27;
               COLOR.clmct[7] = 36;
               COLOR.clmct[8] = 54;
               COLOR.clmct[9] = 37;
```

```
                COLOR.clmct[10]= 26;
                COLOR.clmct[11]= 60;
                COLOR.clmct[12]= 52;
                COLOR.clmct[13]= 25;
                COLOR.clmct[14]=  9;
                COLOR.clmct[15]= 40;

        case 2 : COLOR.cldef[0] = COLOR.clmct[0];    /* DEFAULT COLOR */
                COLOR.cldef[1] = 0;
                COLOR.clbrt[0] = COLOR.clmct[1];    /* BRIGHT  COLOR */
                COLOR.clbrt[1] = 1;
                COLOR.clcsr[0] = COLOR.clmct[2];    /* CURSOR COLOR  */
                COLOR.clcsr[1] = 2;
                COLOR.clblk[0] = COLOR.clmct[3];    /* MESSAGE BACKGROUND */
                COLOR.clblk[1] = 3;
                COLOR.clbgr[0] = COLOR.clmct[4];    /* MODEL BACKGROUND */
                COLOR.clbgr[1] = 4;

                COLOR.clshd    = 57;                /* SHADING COLOR */
    }

    Set_Cadam_Color_Map ();
    Set_Users_Color_Map ();
    MC_Build_Color_Map ();
}

/*-------------------------------------------------------------------------*/
/*                                                                         */
/*    Show_Color_By_RGB : Inquire color RGB value of a color index.        */
/*                                                                         */
/*-------------------------------------------------------------------------*/

void  Show_Color_By_RGB (short index, short *R, short *G, short *B)
{
    *R = color_table[COLOR.clmct[index]][0];
    *G = color_table[COLOR.clmct[index]][1];
```

```
    *B = color_table[COLOR.clmct[index]][2];
}

/*-------------------------------------------------------------------------*/
/*                                                                         */
/*    Show_Color_By_Value : Inquire color value of a color index.          */
/*                                                                         */
/*-------------------------------------------------------------------------*/

void Show_Color_By_Value (short index, short *value)
{
   if (index == 16) *value = COLOR.clshd;
   else             *value = COLOR.clmct[index];
}

/*-------------------------------------------------------------------------*/
/*                                                                         */
/*    Set_Color_By_RGB : Modify color RGB value of a color index.          */
/*                                                                         */
/*-------------------------------------------------------------------------*/

void  Set_Color_By_RGB (short index, short R, short G, short B)
{
   color_table[COLOR.clmct[index]][0] = R;
   color_table[COLOR.clmct[index]][1] = G;
   color_table[COLOR.clmct[index]][2] = B;
}

/*-------------------------------------------------------------------------*/
/*                                                                         */
/*    Set_Color_By_Value : Modify color value of a color index.            */
/*                                                                         */
/*-------------------------------------------------------------------------*/

void Set_Color_By_Value (short index, short value)
{
   if (index == 16) COLOR.clshd = value;
```

```
    else            COLOR.clmct[index] = value;

    Color_Map[CADAM_MAP0+index].R = color_table[value][0] / 99.0;
    Color_Map[CADAM_MAP0+index].G = color_table[value][1] / 99.0;
    Color_Map[CADAM_MAP0+index].B = color_table[value][2] / 99.0;

    HC_QModify_Color_Map_By_Value ("?picture", (int)index, "RGB",
                                   (int)1, &Color_Map[index].R);

    switch (SHADE.mode)
    {
       case -1: break;
       case  0: break;
       case  1: break;
       case  2: if (index > 4) Build_Constant_Color_Map ();
                break;
       case  3: if (index == 16) Build_Gouraud_Color_Map ();
                break;
       default: /* do nothing */;
    }
}

/*------------------------------------------------------------------------*/
/*                                                                        */
/*    MC_Build_Color_Map () : Build color map for any shading condition*/
/*                                                                        */
/*------------------------------------------------------------------------*/
void  MC_Build_Color_Map ()
{
     switch (SHADE.mode)
   {
       case -1:
       case  0: Build_Normal_Color_Map ();
                break;
       case  1: Build_Dither_Color_Map ();
                break;
       case  2: Build_Constant_Color_Map ();
```

```
                break;
        case  3: Build_Gouraud_Color_Map ();
                break;
        default: /* do nothing */;
    }
}

/*-------------------------------------------------------------------------*/
/*                                                                         */
/*    Build_Normal_Color_Map : Set up normal wireframe color map.          */
/*                                                                         */
/*-------------------------------------------------------------------------*/

static void Build_Normal_Color_Map ()
{
    if (COLOR.cldpf <= 16)
    {
        HC_Open_Segment ("?picture");
            HC_UnSet_Color_Map ();
            HC_Set_Driver_Options ("fixed colors = 0");
            HC_Set_Color_Map_By_Value ("RGB", CADAM_MAP_SIZE, Color_Map);
        HC_Close_Segment();
    }
    else
    {
        HC_Open_Segment ("?picture");
            HC_UnSet_Color_Map ();
            HC_Set_Color_Map_By_Value ("RGB", BASIC_MAP_SIZE, Color_Map);
#ifdef NTH
            HC_Set_Driver_Options ("fixed colors = 125");
#else
            HC_Set_Driver_Options ("fixed colors = 216");
#endif
        HC_Close_Segment();
    }
}
```

```
/*-------------------------------------------------------------------*/
/*                                                                   */
/*    Build_Dither_Color_Map : Set up dither shading mode color map. */
/*                                                                   */
/*-------------------------------------------------------------------*/

static void Build_Dither_Color_Map ()
{
   if (COLOR.cldpf <= 16)
   {
      HC_Open_Segment ("?picture");
         HC_UnSet_Color_Map ();
         HC_Set_Color_Map_By_Value ("RGB", COLOR.cldpf-8, Color_Map);
         HC_Set_Driver_Options ("fixed colors = 8");
      HC_Close_Segment();
   }
   else
   {
      HC_Open_Segment ("?picture");
         HC_UnSet_Color_Map ();
         HC_Set_Color_Map_By_Value ("RGB", BASIC_MAP_SIZE, Color_Map);
#ifdef NTH
         HC_Set_Driver_Options ("fixed colors = 125");
#else
         HC_Set_Driver_Options ("fixed colors = 216");
#endif
       HC_Close_Segment();
   }
}


/*-------------------------------------------------------------------*/
/*                                                                   */
/*    Build_Constant_Color_Map : Set up constant shading color map. */
/*                                                                   */
/*-------------------------------------------------------------------*/
```

```
static void Build_Constant_Color_Map ()
{
   short i, j, k, lstart, index;
   float x;

   if (COLOR.cldpf <= 16) return;

   /*.....................................................
     : by A. Chen
     :
     : MAXLEV : The maximum number of gray level.
     :          This value is defined in file "shade.h"
     : LEVEL  : number of gray levels to be used for fine shading
     :.....................................................
   */

   /* Calculate gray level for default & 11 CADAM colors */

   lstart = MAXLEV - LEVEL;
   for (i = 0; i <= 11; i++)
   {
      if (i == 0) index = COLOR.cldef[0];
      else        index = COLOR.clmct[i+4];

      for (j = SHADE_MAP0 + i*LEVEL, k = 0; k < LEVEL; j++, k++)
      {
         x = 0.01 * (lstart + k) / MAXLEV;
         Color_Map[j].R = color_table[index][0] * x;
         Color_Map[j].G = color_table[index][1] * x;
         Color_Map[j].B = color_table[index][2] * x;
      }
   }

   HC_Open_Segment ("?picture");
      HC_UnSet_Color_Map ();
      HC_Set_Driver_Options ("fixed colors = 0");
```

```
      HC_Set_Color_Map_By_Value ("RGB", COLOR_MAP_SIZE, Color_Map);
   HC_Close_Segment();
}


/*--------------------------------------------------------------------*/
/*                                                                    */
/*    Build_Gouraud_Color_Map : Set up Gouraud shading mode color map. */
/*                                                                    */
/*--------------------------------------------------------------------*/

static void Build_Gouraud_Color_Map ()
{
   short i;
   RGB   Camb, M;
   float pai, Rstep, Gstep, Bstep;
   float cosa[GOURAUD_COLOR_SIZE];
   float PI = 3.1415926;
   float range;
   float amb;

   if (COLOR.cldpf <= 16) return;

   /*.............................................
    : Allen Chen, 4/25/90
    : amb : ambient factor will be referenced as a
    : global variable which can be defined by users.
    : The factor makes the range of gouraud color map
    : run between amb and 1.0. It discards the colors
    : under amb and gives more gray leves to visible
    : range.
    : if amb is defined as global variable then the
    : color map will range from amb to somewhere close
    : to 1.0. Thus, the routine calculate_indices()
    : shall be rewritten to produce correct indices.
    : For now, the value of amb is set to 0.0.
    :.............................................
```

```
     */

    amb = 0.0;
    range = (float)((GOURAUD_COLOR_SIZE - 1) * (short)100);
    pai = (float)(PI_D / (double) ((short)GOURAUD_COLOR_SIZE * (short)2));

    for (i= 0; i < GOURAUD_COLOR_SIZE; i++)
       cosa[GOURAUD_COLOR_SIZE-1-i] = pow (cos (i*pai), 5);
    /*.............................................
     : Allen Chen, 4/25/90
     : find ambient color of RGB.
     : RGB step is adjusted by ambient color
     :.............................................
     */
    Camb.R = color_table[COLOR.clshd][0] * amb;
    Camb.G = color_table[COLOR.clshd][1] * amb;
    Camb.B = color_table[COLOR.clshd][2] * amb;

    Rstep = (color_table[COLOR.clshd][0] - Camb.R) / range;
    Gstep = (color_table[COLOR.clshd][1] - Camb.G) / range;
    Bstep = (color_table[COLOR.clshd][2] - Camb.B) / range;

    for (i = 0; i < GOURAUD_COLOR_SIZE; i++)
    {
       M.R = i * Rstep + Camb.R;
       M.G = i * Gstep + Camb.G;
       M.B = i * Bstep + Camb.B;
       Color_Map[SHADE_MAP0 + i].R = M.R + (1-M.R) * cosa[i] * 0.5;
       Color_Map[SHADE_MAP0 + i].G = M.G + (1-M.G) * cosa[i] * 0.5;
       Color_Map[SHADE_MAP0 + i].B = M.B + (1-M.B) * cosa[i] * 0.5;

#ifdef DEBUG
      printf("colormap[%d]=(%lf,%lf,%lf)\n", COLOR_MAP_SIZE-1-i,
         Color_Map[SHADE_MAP0 + i].R,
         Color_Map[SHADE_MAP0 + i].G,
         Color_Map[SHADE_MAP0 + i].B);
#endif
```

```
    }

    HC_Open_Segment ("?picture");
       HC_UnSet_Color_Map ();
       HC_Set_Driver_Options ("fixed colors = 0");
       HC_Set_Color_Map_By_Value ("RGB", COLOR_MAP_SIZE, Color_Map);
    HC_Close_Segment();
}

/*--------------------------------------------------------------------*/
/*                                                                    */
/*    Set_Cadam_Color_Map : Set sixteen CADAM basic color map.        */
/*                                                                    */
/*--------------------------------------------------------------------*/

static void Set_Cadam_Color_Map ()
{
    short i;

    for (i = 0; i < CADAM_MAP_SIZE; i++)
    {
       Color_Map[CADAM_MAP0+i].R = color_table[COLOR.clmct[i]][0] / 99.0;
       Color_Map[CADAM_MAP0+i].G = color_table[COLOR.clmct[i]][1] / 99.0;
       Color_Map[CADAM_MAP0+i].B = color_table[COLOR.clmct[i]][2] / 99.0;
    }
}


/*--------------------------------------------------------------------*/
/*                                                                    */
/*    Set_Users_Color_Map : Set user shading color map.               */
/*                                                                    */
/*--------------------------------------------------------------------*/

static void Set_Users_Color_Map ()
{
    short i;
```

```
        float gray;
        RGB   white, brite;

        Color_Map[USERS_MAP0].R = color_table[COLOR.clshd][0] / 99.0;
        Color_Map[USERS_MAP0].G = color_table[COLOR.clshd][1] / 99.0;
        Color_Map[USERS_MAP0].B = color_table[COLOR.clshd][2] / 99.0;

        /* set 5 gray shades */
        white.R = 0.75;
        white.G = 1.0;
        white.B = 1.0;
        brite.R = color_table[COLOR.clbrt[0]][0] / 99.0;
        brite.G = color_table[COLOR.clbrt[0]][1] / 99.0;
        brite.B = color_table[COLOR.clbrt[0]][2] / 99.0;
        for (i = 1; i <= 5; i++)
        {
           switch (i)
           {
              case 1: gray = 0.125; break;
              case 2: gray = 0.195; break;
              case 3: gray = 0.306; break;
              case 4: gray = 0.479; break;
              case 5: gray = 0.75;
           }
           Color_Map[USERS_MAP0+i].R = white.R * gray;
           Color_Map[USERS_MAP0+i].G = white.G * gray;
           Color_Map[USERS_MAP0+i].B = white.B * gray;
           Color_Map[USERS_MAP0+5+i].R = brite.R * gray;
           Color_Map[USERS_MAP0+5+i].G = brite.G * gray;
           Color_Map[USERS_MAP0+5+i].B = brite.B * gray;
        }
        for (i = USERS_MAP0+11; i < USERS_MAP_SIZE; i++)
        {
           Color_Map[USERS_MAP0+i].R = 1.0;
           Color_Map[USERS_MAP0+i].G = 1.0;
           Color_Map[USERS_MAP0+i].B = 1.0;

     }
}
```

APPENDIX 8:

```
/*****************************************************************************
 *                                                                           *
 *                          Calculate Indices                                *
 *                                                                           *
 *---------------------------------------------------------------------------*
 *                                                                           *
 * The routine returns the index to the color map for the given Normal       *
 * and my_lights[4].                                                         *
 *                                                                           *
 * eye vector: come form window matrix (zvector)                             *
 * light vector: was transformed form world system to window system (active)*
 *                                                                           *
 *                                                                           *
 *                                                                           *
 *---------------------------------------------------------------------------*
 * Author      : Allen Chen                                                  *
 *                                                                           *
 *                                                                           *
 *                                                                           *
 *****************************************************************************
 */

void calculate_indices( Normal, my_lights, index )
   double  Normal[];
   VECTOR  my_lights[4];
   short   *index;

{

   VECTOR eye, refraction, norm;
   float  amb, difus;
   float  t1, t2, coso, cosa, cosr,ta;

   float max_color;
   short light_num;
   float range;
```

```
/*.....................................................................
 :.....................................................................
 */
range   = (float) (GOURAUD_COLOR_SIZE - 1);
amb     = 0.1;
difus   = 0.5;

eye.x = WDW3D.wzvec[0];
eye.y = WDW3D.wzvec[1];
eye.z = WDW3D.wzvec[2];
norm.x = (float) Normal[0];
norm.y = (float) Normal[1];
norm.z = (float) Normal[2];

dot_vectors ( &cosr, eye, norm );
if (cosr <= 1.e-3) cosr = 0.0;

max_color = 0.0;
for ( light_num=0; light_num< 4; light_num++)
{
   if( SHADE.light[light_num] == ON )
      {
      coso = my_lights[light_num].x*norm.x
           + my_lights[light_num].y*norm.y
           + my_lights[light_num].z*norm.z;

      if ((coso <= 0.0 ) || (coso > 1.0)) coso = 0.0;

      refraction.x = -my_lights[light_num].x + 2*coso * norm.x;
      refraction.y = -my_lights[light_num].y + 2*coso * norm.y;
      refraction.z = -my_lights[light_num].z + 2*coso * norm.z;
      t1  = sqrt ( refraction.x * refraction.x +
                   refraction.y * refraction.y +
                   refraction.z * refraction.z);

      refraction.x /= t1;
      refraction.y /= t1;
```

```
    refraction.z /= t1;

    dot_vectors ( &cosa, refraction, eye );

    if ((coso > 0.0 ) && (cosa > 0.0) && (cosr > 0.0))
        {
        ta = cosa * cosa;
        cosa = ta*ta*cosa;
        }
    else
        {
        cosa = 0.0;
        }

    t1 = amb + coso * ( 1.0 - amb ) * difus; /*ambient + diffuse*/
    t2 = t1 + ( 1.0 - t1 ) * cosa;           /*complement factor */
    }
else
    t2 = amb;

if( t2 > max_color ) max_color = t2;
}

*index = (short)SHADE_MAP0 + (short)(max_color * range + (float)0.5);

}
```

APPENDIX 9:

```
/*.....................................................
 : Allen Chen 8/23/90
 :
 : The files include this header
 :.....................................................
 */

#ifndef BSPLINE_H_FILE
        #define BSPLINE_H_FILE

#define MAXSplineKnots 50
#define MAXKnots 56
#define MAXControlPoints 52
#define GLOBAL_TO_LOCAL 1
#define LOCAL_TO_GLOBAL 2


struct BSPLINE
{
   /*.....................................................
    : A. Chen
    :
    : Attributes
    :   Bclosed       0/open        1/closed
    :   Bperiodic     0/nonperiodic 1/periodic
    :   Brational     0/nonrational 1/rational
    :   Bplanar       0/nonplanar   1/planar
    :
    : Data
    :   Order  : order of the B spline
    :   Nknots : the number of knots in the array KnotSequence[]
    :   Ncp    : the number of control points in ControlPoints[]
    :   Start  : starting knot sequece of the curve (relimit data)
    :   End    : ending knot sequence of the curve (relimit data)
    :.....................................................
    */
```

```
    short  Bclosed;
    short  Bperiodic;
    short  Brational;
    short  Bplanar;
    short  Order;
    short  Nknots;
    short  Ncp;
    double Start, End;
    double KnotSequence [MAXKnots];
    struct POINT *ControlPoints [MAXControlPoints];
};

struct SURFACE
{
    short  Udisp, Wdisp;
    short  BUclosed,   BWclosed;
    short  BUperiodic, BWperiodic;
    short  BUrational, BWrational;
    short  Uorder, Worder;
    short  NknotsU, NknotsW;
    double KnotSequenceU[MAXKnots], KnotSequenceW[MAXKnots];
    struct POINT *ControlPoints[MAXControlPoints][MAXControlPoints];
};

struct RULEDSURFACE
{
    short  Udisp, Wdisp;
    struct BSPLINE  B_Spline1,  B_Spline2;
};

struct ROTATIONAL_SURFACE
{
    double A[3], B[3], C[3], Origin[3];
    double A1, A2;
    short  Udisp, Wdisp;
    struct BSPLINE   *B_Spline;
};
```

```
struct EDGE_SURFACE
    {
     short  Udisp, Wdisp;
     struct BSPLINE   B_Spline[4];
     };

#endif
```

APPENDIX 10:

```
short C_sf_rnormbsf(ptr)
short ptr[];
{
   short  ret;
   short  i,j;
   short  w2,w,j2;
   double tx,ty,tz;
   struct SURFACE *SkinSurface;

   SkinSurface = (struct SURFACE *) malloc (sizeof (struct SURFACE));
   if (SkinSurface == 0) return 200;

   ret = ssr_GetSurfaceData( ptr, SkinSurface );
   if( ret == 0 )
      {
      w  = SkinSurface->NknotsW-4;
      w2 = w/2;
      for( i=0; i<SkinSurface->NknotsU-4; i++)
         for( j=0; j<w2; j++ )
            {
            j2 = w-j-1;
            tx = SkinSurface->ControlPoints[i][j]->x;
            ty = SkinSurface->ControlPoints[i][j]->y;
            tz = SkinSurface->ControlPoints[i][j]->z;
            SkinSurface->ControlPoints[i][j]->x = SkinSurface->ControlPoints[i][j2]->x;
            SkinSurface->ControlPoints[i][j]->y = SkinSurface->ControlPoints[i][j2]->y;
            SkinSurface->ControlPoints[i][j]->z = SkinSurface->ControlPoints[i][j2]->z;
            SkinSurface->ControlPoints[i][j2]->x = tx;
            SkinSurface->ControlPoints[i][j2]->y = ty;
            SkinSurface->ControlPoints[i][j2]->z = tz;
            }

      w  = SkinSurface->NknotsW;
      w2 = w/2;
      tz = SkinSurface->KnotSequenceW[w-1];
```

```
        for( j=0; j<w2; j++ )
           {
           j2 = w-j-1;
           tx = SkinSurface->KnotSequenceW[j];
           SkinSurface->KnotSequenceW[j] = tz - SkinSurface->KnotSequenceW[j2];
           SkinSurface->KnotSequenceW[j2] = tz - tx;
           }
        if ((w%2) == 1)
           SkinSurface->KnotSequenceW[w2] = tz - SkinSurface->KnotSequenceW[w2];

        C_mi_sfstobsf((short)SF_REPLC,SkinSurface,ptr);
        free_skincntl(SkinSurface);
        }
     free(SkinSurface);
     return 0;
}
#undef SF_STORE
#undef SF_REPLC


short C_sf_rnormbnd(ptr)
short ptr[];
{
     short  ret;
     struct EDGE_SURFACE *EdgeSurface;

     EdgeSurface = (struct EDGE_SURFACE *) malloc (sizeof(struct EDGE_SURFACE));
     if (EdgeSurface == 0) return 200;

     ret = getbdrysf(ptr, EdgeSurface);

     if (ret == 0)
        {
        bsflip(&EdgeSurface->B_Spline[0]);
        bsflip(&EdgeSurface->B_Spline[1]);
        ret = swap_bspl(&EdgeSurface->B_Spline[2],&EdgeSurface->B_Spl-ine[3]);
        if (ret != 0) return ret;
```

```
      ret =   C_mi_sfstobnd ((short)SF_REPLC, EdgeSurface, ptr );
      freeEdgeSurf(EdgeSurface);
      }
   free(EdgeSurface);

   return ret;
}

#undef SF_STORE
#undef SF_REPLC



short C_sf_rnormrul(ptr)
short ptr[];
{
     struct RULEDSURFACE *RuledSurface;
     short  ret;

   RuledSurface = (struct RULEDSURFACE *) malloc (sizeof(struct RULEDSURFACE));
   if (RuledSurface == 0) return 200;

   ret = getrulsf(ptr, RuledSurface);
   if (ret == 0)
      {
      bsflip(&RuledSurface->B_Spline1);
      bsflip(&RuledSurface->B_Spline2);
      ret = C_mi_sfstorul((short)1, RuledSurface, ptr);

      (void) free_CntlPnts(&RuledSurface->B_Spline1);
      (void) free_CntlPnts(&RuledSurface->B_Spline2);
      }
   free(RuledSurface);
   return ret;
}
```

```
short C_sf_rnormrot(ptr)
short ptr[];
{
    struct ROTATIONAL_SURFACE *rotsrf;
    short  ret;

    rotsrf = (struct ROTATIONAL_SURFACE *) malloc (sizeof(struct ROTATIONAL_SURFACE));
    if (rotsrf == 0) return 200;

    ret = ssr_GetRotational( ptr, rotsrf );
    if( ret == 0 )
      {
        bsflip(rotsrf->B_Spline);
        ret = C_mi_sfstorev((short)SF_REPLC,rotsrf,ptr);
        free_CntlPnts(rotsrf->B_Spline);
      }
    free(rotsrf);

    return ret;
}
```

Having thus described our invention, what we claim as new, and desire to secure by Letters Patent is:

1. Apparatus for performing a set of display operations to transform orthogonal views of a two dimensional drawing into a solid representing the two dimensional drawing into a solid representing the two dimensional drawing views on a graphic display, comprising:

(a) means for storing a plurality of two dimensional drawings representative of various views of an object including face views and corresponding profile views, the face views and the corresponding profile views being orthogonal to one another;

(b) pointing means for selecting a first two dimensional face for the solid from a first two dimensional drawing, selecting a second two dimensional face for the solid from a second two dimensional drawing, selecting a first profile corresponding to the first two dimensional face, the first profile being an orthogonal view of the first two dimensional face, selecting a second profile corresponding to the second two dimensional face, the second profile being an orthogonal view of the second two dimensional face; and

(c) processor means for transforming and displaying the first two dimensional face, the first profile, the second two dimensional face, and the second profile as a solid on the graphic display.

2. Apparatus as recited in claim 1, further comprising date structure means for storing two dimensional drawing information including face views and profile views.

3.Apparatus as recited in claim 1, further comprising data structure means for storing solid information.

4. Apparatus as recited in claim 1, further comprising means for specifying the location where the solid should appear on the graphic display.

5. A method for performing a set of display operations to transform orthogonal views of a two dimensional drawing into a solid representing the two dimensional drawing views on a graphic display, comprising the steps of:

(a) storing a plurality of two dimensional drawings representative of various views of an object including face views and corresponding profile views, the face views and the corresponding profile views being orthogonal to one another;

(b) selecting a first two dimensional face for the solid from a first two dimensional drawing using a pointing means;

(c) selecting a second two dimensional face for the solid from a second two dimensional drawing using the pointing means;

(d) selecting a first profile corresponding to the first two dimensional face using the pointing means, the first profile being an orthogonal view of the first two dimensional face;

(e) selecting a second profile corresponding to the second two dimensional face using the pointing means, the second profile being an orthogonal view of the second two dimensional face; and

(f) transforming and displaying the first two dimensional face, the first profile, the second two dimensional face, and the second profile as a solid on the graphic display.

6. A method as recited in claim 5, further comprising storing two dimensional drawing information including face views and profile views in a data structure.

7. A method as recited in claim 5, further comprising storing solid information in a data structure.

8. A method as recited in claim 5, further comprising specifying the location where the solid should appear on the graphic display.

* * * * *

UNITED STATES PATENT AND TRADEMARK OFFICE

CERTIFICATE OF CORRECTION

PATENT NO. : 5,561,748
DATED : October 1, 1996
INVENTOR(S) : **NIU ET AL.**

It is certified that error appears in the above-indentified patent and that said Letters Patent is hereby corrected as shown below:

Column 2, line 23: replace "end" with --and--.

Column 8, line 19: replace "I[21]" with --I[2]--.

Signed and Sealed this

Fourth Day of March, 1997

Attest:

BRUCE LEHMAN

Attesting Officer

Commissioner of Patents and Trademarks