



- (51) **International Patent Classification:**
E05B 49/00 (2006.01) *G07C 9/00* (2006.01)
- (21) **International Application Number:**
PCT/US2013/036744
- (22) **International Filing Date:**
16 April 2013 (16.04.2013)
- (25) **Filing Language:** English
- (26) **Publication Language:** English
- (71) **Applicant:** OTIS ELEVATOR COMPANY [US/US]; 10 Farm Springs Road, Farmington, Connecticut 06032 (US).
- (72) **Inventors:** STANLEY, Jannah A.; 8 Hale Road, Portland, Connecticut 06480 (US). CHAPMAN, Ashley; 39 Great Plain Drive, Plainville, Connecticut 06062 (US). JOYCE, Matthew; 1 Mulberry Lane, Avon, Connecticut 06001 (US).
- (74) **Agent:** WILINSKI, Mark E.; Cantor Colburn LLP, 20 Church Street, 22nd Floor, Hartford, Connecticut 06103 (US).

(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) **Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

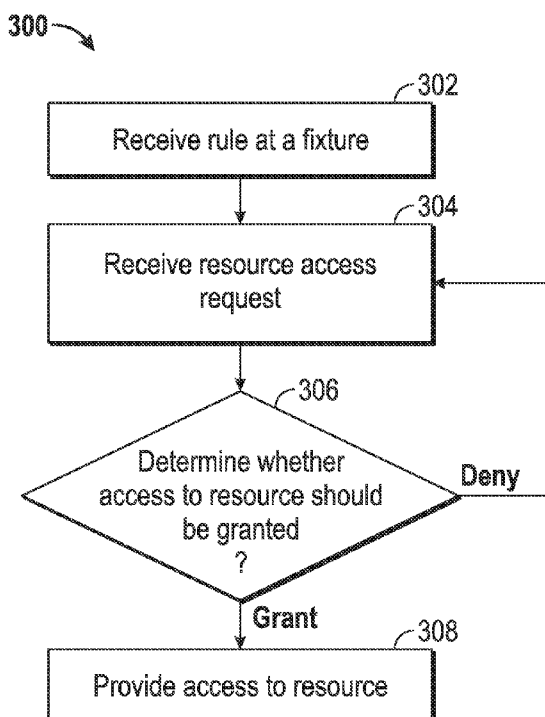
(54) **Title:** CONTROLLING TRAFFIC WITHOUT INTEGRATING WITH A SECURITY VENDOR

FIG. 3

(57) **Abstract:** Embodiments are directed to providing access without determining an identity of a requester. A fixture may receive a rule pertaining to access to a floor of a building. The fixture may receive a request to access the floor of the building. The fixture may grant access to the floor based on a determination that the rule indicates that access to the floor should be granted.

**Declarations under Rule 4.17:**

- *as to applicant's entitlement to apply for and be granted a patent (Rule 4.17(ii))*
- *of inventorship (Rule 4.17(iv))*

Published:

- *with international search report (Art. 21(3))*

CONTROLLING TRAFFIC WITHOUT INTEGRATING WITH A SECURITY VENDOR

BACKGROUND

[0001] Currently, traffic (e.g., foot traffic) in a building, such as an office building, may be regulated on the basis of user credentials. For example, a person may carry a card or the like that can be swiped or presented to an access terminal. In some instances, the card may serve a dual-purpose, such as an employee identification badge. The person may be provided access to a resource (e.g., an elevator car, a floor of the building, entrance to a space (e.g., an office) within the building, etc.) if the person is authorized to access the resource.

[0002] Integration of credentials with a security vendor is often necessary in order to control traffic. When integrating with a security vendor, options may be limited, as an owner or tenant of a building may generally need to adhere to the security platform that is provided by the security vendor. Alternatively, the owner/tenant may have to pay the security vendor an additional fee to design or implement customized security features. As such, providing conditional access with respect to a secured resource can be cumbersome, inflexible, and expensive.

BRIEF SUMMARY

[0003] An embodiment of the disclosure is directed to a method for providing access without determining an identity of a requester, comprising: receiving, by a fixture, a rule pertaining to access to a floor of a building, receiving, by the fixture, a request to access the floor of the building, and granting, by the fixture, access to the floor based on a determination that the rule indicates that access to the floor should be granted.

[0004] An embodiment of the disclosure is directed to an apparatus comprising: at least one processor, and memory having instructions stored thereon that, when executed by the at least one processor, cause the apparatus to: receive a rule pertaining to access to a floor of a building, receive a request to access the floor of the building, and grant access to the floor based on a determination that the rule indicates that access to the floor should be granted without determining an identity of a requester.

[0005] An embodiment of the disclosure is directed to a system comprising: a fixture configured to receive a rule pertaining to access to a resource of a building and receive a request to access the resource, the fixture is configured to determine when access to the resource should be granted without determining an identity of a requester, and a conveyance

device configured to provide access to the resource when the fixture determines that the request to access the resource should be granted.

[0006] Additional embodiments are described below.

BRIEF DESCRIPTION OF THE DRAWINGS

[0007] The present disclosure is illustrated by way of example and not limited in the accompanying figures in which like reference numerals indicate similar elements.

[0008] FIG. 1 is a schematic block diagram illustrating an exemplary computing system in accordance with one or more aspects of this disclosure;

[0009] FIG. 2 illustrates an exemplary block diagram of a building in accordance with one or more embodiments; and

[0010] FIG. 3 illustrates a flow chart of an exemplary method in accordance with one or more embodiments of the disclosure.

DETAILED DESCRIPTION

[0011] It is noted that various connections are set forth between elements in the following description and in the drawings (the contents of which are included in this disclosure by way of reference). It is noted that these connections in general and, unless specified otherwise, may be direct or indirect and that this specification is not intended to be limiting in this respect. In this respect, a coupling between entities may refer to either a direct or an indirect connection.

[0012] Exemplary embodiments of apparatuses, systems, and methods are described for providing conditional access to a secure resource. In some embodiments, access to a resource may be determined based on the use and/or location of one or more fixtures. In some embodiments, one or more rules may be used to determine whether to grant access to a resource. The rules may be established by, e.g., a building owner or tenant. In some embodiments, the rules may be a function of one or more parameters or conditions, such as a day of week or time of day. In some embodiments, the rules may be input directly to the fixture or may be implemented using one or more other devices. For example, in some embodiments, the rules may be input to a computer remotely located from a fixture.

[0013] Referring to FIG. 1, an exemplary computing system 100 is shown. The system 100 is shown as including a memory 102. The memory 102 may store executable instructions. The executable instructions may be stored or organized in any manner and at any level of abstraction, such as in connection with one or more processes, routines,

procedures, methods, etc. As an example, at least a portion of the instructions are shown in FIG. 1 as being associated with a first program 104a and a second program 104b.

[0014] The instructions stored in the memory 102 may be executed by one or more processors, such as a processor 106. The processor 106 may be coupled to one or more input/output (I/O) devices 108. In some embodiments, the I/O device(s) 108 may include one or more of a keyboard or keypad, a touchscreen or touch panel, a display screen, a microphone, a speaker, a mouse, a button, a remote control, a joystick, a printer, a telephone or mobile device (e.g., a smartphone), etc. The I/O device(s) 108 may be configured to provide an interface to allow a user to interact with the system 100.

[0015] The system 100 is illustrative. In some embodiments, one or more of the entities may be optional. In some embodiments, additional entities not shown may be included. For example, in some embodiments the system 100 may be associated with one or more networks, such as one or more computer or telephone networks. In some embodiments, the entities may be arranged or organized in a manner different from what is shown in FIG. 1.

[0016] Turning now to FIG. 2, an exemplary block diagram of a building 200 in accordance with one or more embodiments is shown. The building 200 is shown as including four floors, denoted as floors 202a through 202d. In some embodiments, a building may include more or less than four floors.

[0017] The building 200 is shown as including one or more fixtures; specifically, fixtures 204a, 204b, 204c-1, 204c-2, and 204d. The fixtures 204a, 204b, 204c-1, 204c-2, and 204d may be located on the floors shown in FIG. 2. Thus, the fixture 204a may be located on the floor 202a, the fixture 204b may be located on the floor 202b, the fixtures 204c-1 and 204c-2 may be located on the floor 202c, and the fixture 204d may be located on the floor 202d.

[0018] In some embodiments, one or more of the fixtures 204a, 204b, 204c-1, 204c-2, and 204d may correspond to, or include, one or more I/O devices, such as the I/O device(s) 108 of FIG. 1. In this respect, a fixture may provide an interface for a user to interact with. For example, the fixtures 204a, 204b, 204c-1, 204c-2, and 204d may be used to obtain access to a secured resource.

[0019] For purposes of ease of explanation and illustration, it may be assumed that the secured resource corresponds to conditional access being provided to the floor 202d. The floors 202c and 202d may be leased by a first tenant, and the floor 202b may be leased by a second tenant. The floor 202a may correspond to a “public floor” of the building 200. As used herein, a public floor corresponds to a floor that is not owned or controlled by any

particular tenant. A lobby floor is one example of a floor that could be considered public. Other types of public floors or spaces may include a parking garage, a cafeteria, etc.

[0020] An elevator system may be used to travel between the floors 202a through 202d of the building 200. For example, an elevator car 206 may traverse a hoistway 208 in order to convey passengers or materials to one or more of the floors 202a through 202d. The fixtures 204a, 204b, 204c-1, and 204d may be located just outside of the hoistway 208. The fixture 204c-2 may be located behind a security desk 210 located on the floor 202c.

[0021] When a user enters the building 200 via the floor 202a (e.g., a lobby floor), the user may approach the hoistway 208 in order to call or command the elevator car 206 to the floor 202a. The user may be a visitor of the building 200 (e.g., the user may be a prospective or candidate employee of the first tenant and may come to the building 200 for purposes of a job interview with the first tenant) and may call the elevator car 206 to the floor 202a in order to go to the floor 202d where the human resources (HR) department 212 of the first tenant may be located.

[0022] In some instances the user might not be given direct access to the floor 202d from the floor 202a via the elevator car 206. For example, if the user enters a request on the fixture 204a to go to the floor 202d, the request may be declined, or the user may be instructed that the user can only, or will instead, be taken to the floor 202c from the floor 202a.

[0023] Assuming that the user travels in the elevator car 206 from the floor 202a to the floor 202c, the user may get out of the elevator car 206 at the floor 202c. The user may then enter the request to go to the floor 202d at the fixture 204c-1. Assuming that the first tenant has provided a security policy or rule that would allow for such a request to be accepted, the user may re-enter the elevator car 206 (or enter another elevator car if more than one elevator car or hoistway is available) and travel from the floor 202c to the floor 202d. The first tenant may locate one or more recording devices (e.g., a camera) just outside the hoistway 208 on the floor 202c in order to obtain a recording of traffic with respect to the first tenant. For example, the recording device may record or capture the presence and appearance of the user.

[0024] In some embodiments, a security policy or rule established by, e.g., the first tenant may be more rigid than the scenario described above. For example, when the user gets out of the elevator car 206 at floor 202c, the user may need to approach the security desk 210 and explain to a security officer or security personnel located behind the security desk 210 the purpose of the user's visit to the building 200 or the purpose of the user's visit with

respect to the first tenant (e.g., the user having a job interview with the first tenant). If the security officer/personnel is satisfied with the user's response (e.g., the security officer/personnel confirms that the user's explanation for the visit is proper), the security officer/personnel may grant the user access to the floor 202d by entering a command on the fixture 204c-2. The granting of the access to the floor 202d by the security officer/personnel may be conditioned on the security officer/personnel presenting a key or credential to the fixture 204c-2. Once authorized by the security officer/personnel, the user may re-enter the elevator car 206 (or enter another elevator car if more than one elevator car or hoistway is available) and travel from the floor 202c to the floor 202d.

[0025] In either scenario described above, the user obtained access to the floor 202d from the floor 202a by way of the floor 202c (e.g., by virtue of a command/request having been entered on the fixture 204c-1 or the fixture 204c-2). In this manner, access to the floor 202d from the floor 202a may be conditioned on a user first going through floor 202c. Relative to conventional techniques where access to a secure resource may be obtained through use of credentials specifically tied to a user, aspects of the disclosure may tie access rights or capabilities to the resource through a fixture.

[0026] Different security rules or policies may be applied with respect to a resource. For example, if the user completes a job interview in the HR department 212 on the floor 202d, the user might be given unrestricted, direct access from the floor 202d to the floor 202a, such that the user may exit the building 200. In other words, the user might not have to travel back to the floor 202c in order to leave the building 200. Various criteria may be used to establish one or more rules regarding access to a secure resource. For example, a security policy may consider factors such as a day of week, a time of day, a direction of travel, an identification of an originating floor, an identification of a destination floor, etc.

[0027] Rules governing access rights to a secure resource may be established in one or more ways. For example, a default rule may initially be provided. The owner of a building or a tenant may establish one or more rules, potentially over-writing a default rule in the process.

[0028] A rule may be entered or modified on one or more machines or devices. For example, a rule may be entered or modified on a fixture (e.g., the fixture 204c-2). In some embodiments, a rule may be entered or modified on a computing device (e.g., a mobile device), and the rule may be communicated from the computing device to the fixture via one or more networks. A key or credential may need to be presented to the computing device or the fixture to allow for entry or modification of a rule.

[0029] FIG. 3 illustrates a method 300 that may be used in connection with one or more entities, devices or systems, such as those described herein. For example, the method 300 may be used by a fixture to provide conditional access to a secure resource.

[0030] In block 302, one or more rules may be received by a fixture. For example, a rule may be input at the fixture. A rule may be received by the fixture, potentially over one or more networks. Receipt of a rule by the fixture in block 302 may pertain to an initial rule or a modification of an existing rule.

[0031] In block 304, an access request may be received at the fixture. The access request may pertain to a resource, such as floor of a building.

[0032] In block 306, the fixture (or another device or entity) may determine whether the request for access to the resource of block 304 should be granted. The determination may be based one or more of the rules of block 302.

[0033] If, based on the rule(s) of block 302, it is determined in block 306 that access should not be granted (e.g., the “deny” path is taken out of block 306), then flow may proceed from block 306 to block 304 to receive another access request. As part of the flow from block 306 to block 304, an indication may be provided that the access request was denied. In some embodiments, the indication may also specify a reason why the access request was denied. Specification of a reason may assist a user in determining whether the user improperly entered an access request in block 304.

[0034] If, based on the rule(s) of block 302, it is determined in block 306 that access should be granted (e.g., the “grant” path is taken out of block 306), then flow may proceed from block 306 to block 308 in order to provide access to the resource. The providing of the access to the resource may be unrestricted, such that the user may have immediate or direct access to the resource. Alternatively, the user may merely be provided indirect access to the resource. For example, if the (ultimate) resource pertains to a floor of a building, as part of block 308 the user may have to visit another floor of the building to actually obtain access to a floor of interest.

[0035] The method 300 is illustrative. In some embodiments, one or more of the blocks or operations (or portions thereof) may be optional. In some embodiments, additional operations not shown may be included. In some embodiments, the operations may execute in an order or sequence different from what is shown.

[0036] While some of the examples described herein related to elevator systems, aspects of this disclosure may be applied in connection with other types of conveyance devices, such as a dumbwaiter, an escalator, a moving sidewalk, a wheelchair lift, etc.

[0037] Embodiments of the disclosure may be used to control or monitor traffic flow in a building. Passengers of an elevator may be limited to destinations within landings occupied by a specific tenant. If the tenant has a security desk on one of its landings, only that landing might be accessible from a public floor (e.g., a lobby), thereby allowing the tenant to verify that the passenger is allowed to access the tenant's (other) floors.

[0038] Embodiments of the disclosure may be tied to one or more particular machines. For example, access rights with respect to a resource may be tied to a fixture. Such a relationship lies in stark contrast to traditional approaches of tying access rights to credentials associated with an identified user.

[0039] As described herein, in some embodiments various functions or acts may take place at a given location and/or in connection with the operation of one or more apparatuses, systems, or devices. For example, in some embodiments, a portion of a given function or act may be performed at a first device or location, and the remainder of the function or act may be performed at one or more additional devices or locations.

[0040] Embodiments may be implemented using one or more technologies. In some embodiments, an apparatus or system may include one or more processors, and memory storing instructions that, when executed by the one or more processors, cause the apparatus or system to perform one or more methodological acts as described herein. Various mechanical components known to those of skill in the art may be used in some embodiments.

[0041] Embodiments may be implemented as one or more apparatuses, systems, and/or methods. In some embodiments, instructions may be stored on one or more computer program products or computer-readable media, such as a transitory and/or non-transitory computer-readable medium. The instructions, when executed, may cause an entity (e.g., an apparatus or system) to perform one or more methodological acts as described herein.

[0042] Aspects of the disclosure have been described in terms of illustrative embodiments thereof. Numerous other embodiments, modifications and variations within the scope and spirit of the appended claims will occur to persons of ordinary skill in the art from a review of this disclosure. For example, one of ordinary skill in the art will appreciate that the steps described in conjunction with the illustrative figures may be performed in other than the recited order, and that one or more steps illustrated may be optional.

What is claimed is:

1. A method for providing access without determining an identity of a requester, comprising:
 - receiving, by a fixture, a rule pertaining to access to a floor of a building;
 - receiving, by the fixture, a request to access the floor of the building; and
 - granting, by the fixture, access to the floor based on a determination that the rule indicates that access to the floor should be granted.
2. The method of claim 1, wherein the receiving of the rule by the fixture comprises at least one of: receiving the rule as an initial rule and receiving the rule as a modification to an existing rule.
3. The method of claim 1, wherein the rule is based on at least one of: a day of week, a time of day, a direction of travel for an elevator, an identification of an originating floor, and an identification of a destination floor.
4. The method of claim 1, wherein the granting of access to the floor by the fixture comprises a requirement that a user go to a second floor prior to going to the floor.
5. The method of claim 4, further comprising:
 - receiving, by a second fixture located on the second floor, a request to access the floor; and
 - granting, by the second fixture, access to the floor based on the request to access the floor received by the second fixture.
6. The method of claim 5, wherein the second fixture is associated with a security desk.
7. The method of claim 5, wherein the grant of access to the floor by the second fixture is based on authentication of a credential that is presented to the second fixture.
8. An apparatus comprising:
 - at least one processor; and
 - memory having instructions stored thereon that, when executed by the at least one processor, cause the apparatus to:
 - receive a rule pertaining to access to a floor of a building,
 - receive a request to access the floor of the building, and
 - grant access to the floor based on a determination that the rule indicates that access to the floor should be granted without determining an identity of a requester.

9. The apparatus of claim 8, wherein the rule comprises at least one of: an initial rule and a modification to an existing rule.

10. The apparatus of claim 8, wherein the rule is based on at least one of: a day of week, a time of day, a direction of travel for an elevator, an identification of an originating floor, and an identification of a destination floor.

11. The apparatus of claim 8, wherein the rule specifies that a user must go to a second floor via an elevator prior to going to the floor.

12. A system comprising:

a fixture configured to receive a rule pertaining to access to a resource of a building and receive a request to access the resource;

the fixture is configured to determine when access to the resource should be granted without determining an identity of a requester; and

a conveyance device configured to provide access to the resource when the fixture determines that the request to access the resource should be granted.

13. The system of claim 12, wherein the conveyance device comprises at least one of: an elevator, a dumbwaiter, an escalator, a moving sidewalk, and a wheelchair lift.

14. The system of claim 12, wherein the rule indicates that a user must access a second resource prior to accessing the resource, and wherein the fixture is configured to provide an indication that the user must access the second resource.

15. The system of claim 14, further comprising:

a second fixture associated with the second resource,

wherein the second fixture is configured to receive a request to access the resource and grant access to the resource based on the request to access the resource received by the second fixture.

16. The system of claim 14, wherein the resource comprises a floor of the building, and wherein the second resource comprises a second floor of the building.

17. The system of claim 14, wherein the floor and the second floor are affiliated with at least one of: an owner of the building and a tenant of the building.

18. The system of claim 12, wherein the fixture is configured to provide an indication that access to the resource is denied when the fixture determines that the request to access the resource should be denied.

19. The system of claim 18, wherein the indication specifies a reason why access to the resource is denied.

1/3

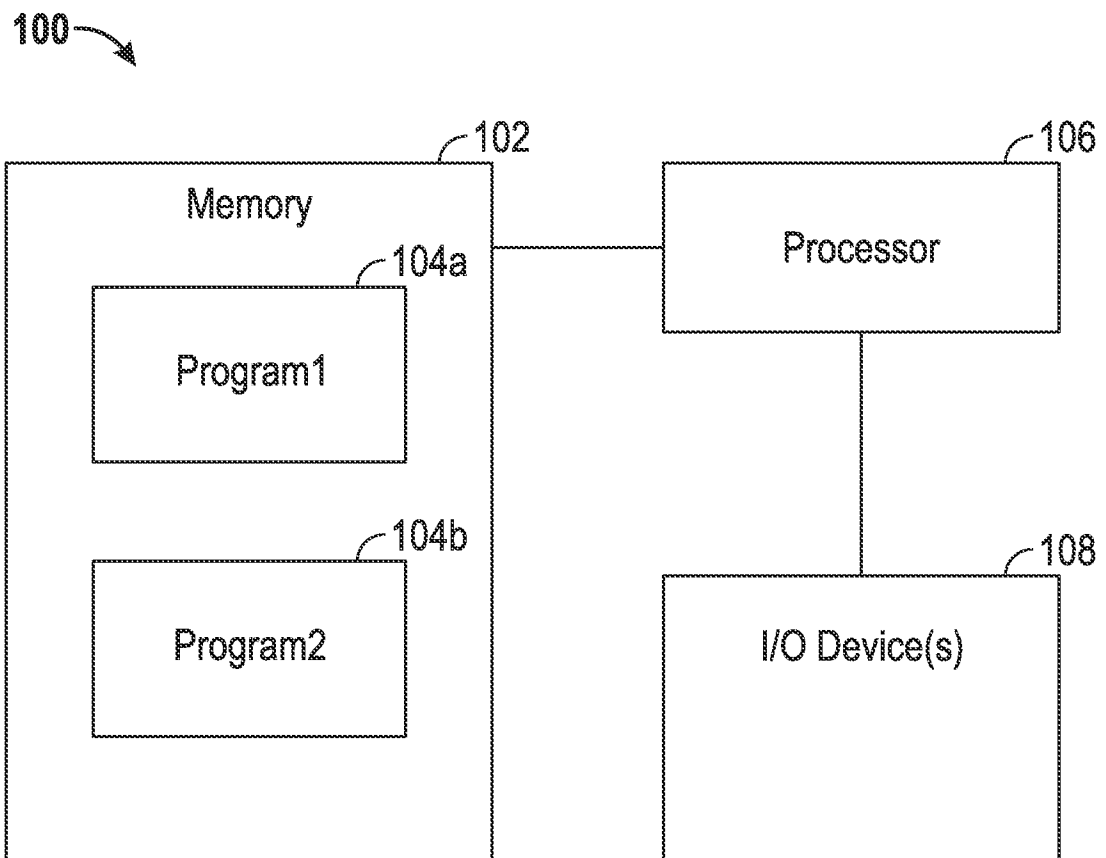


FIG. 1

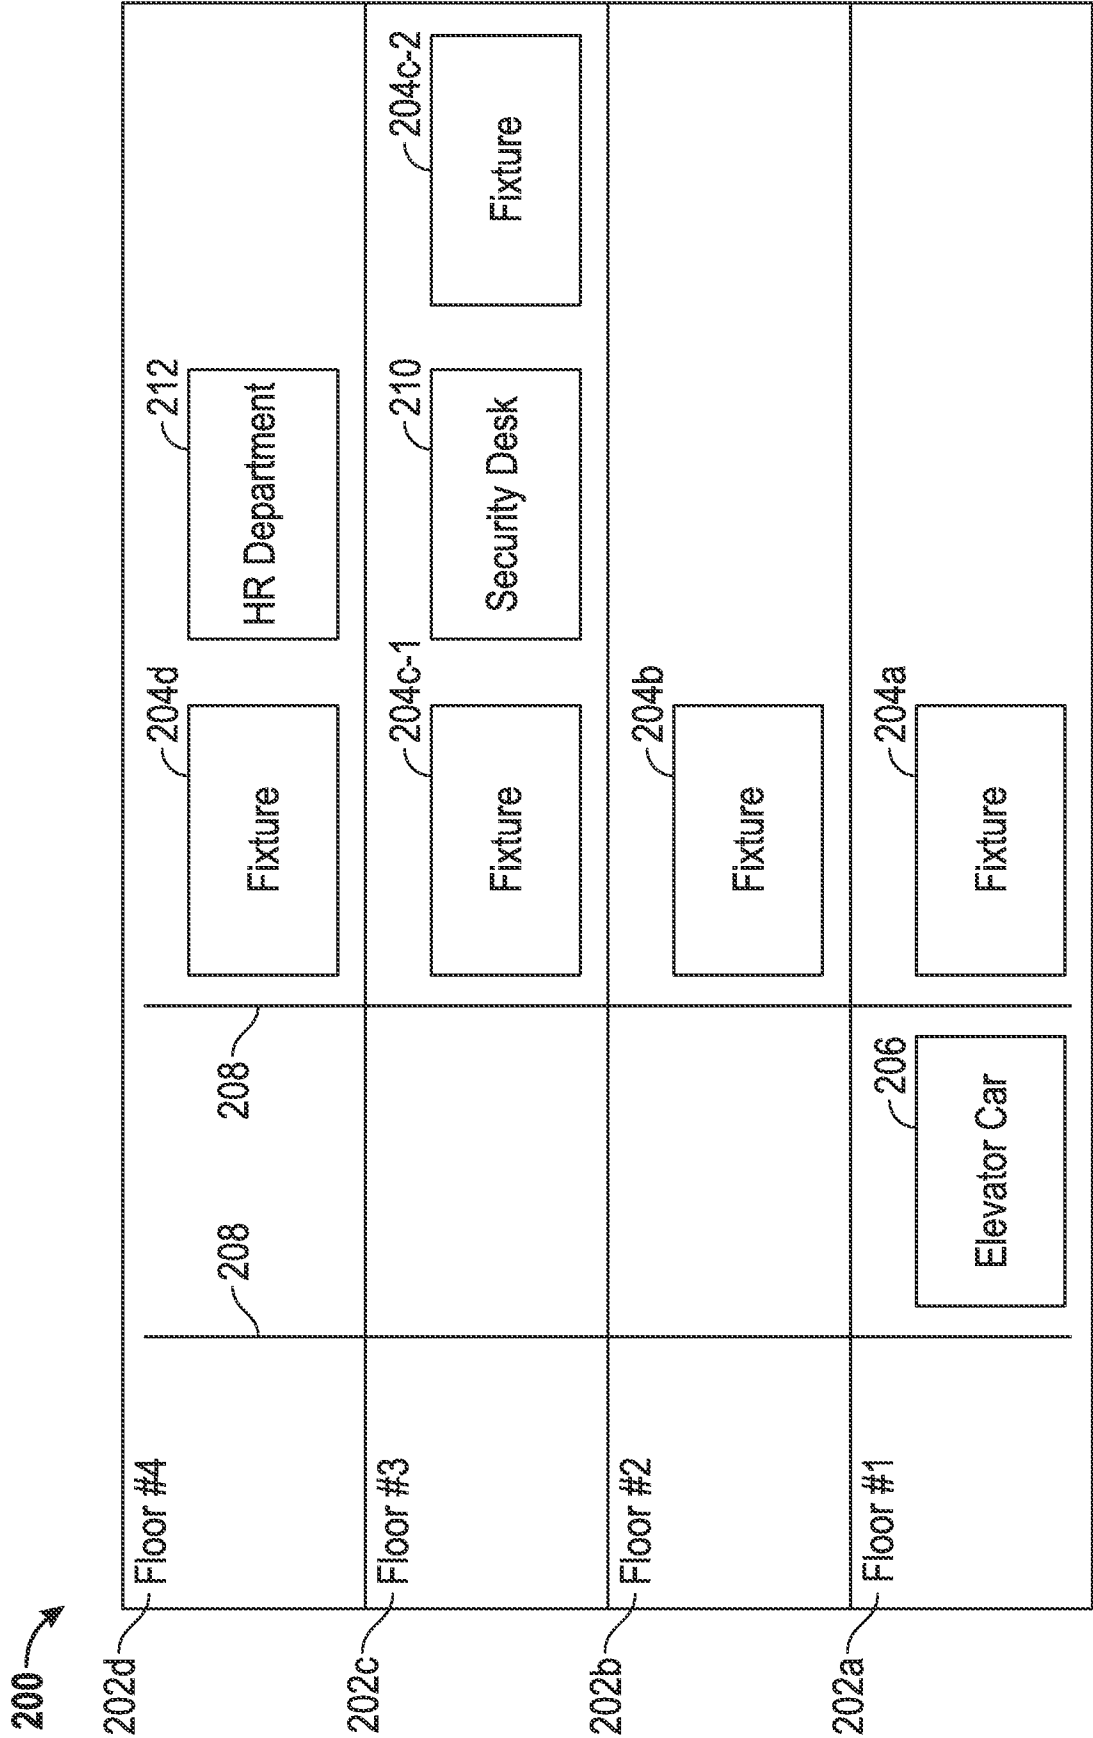


FIG. 2

3/3

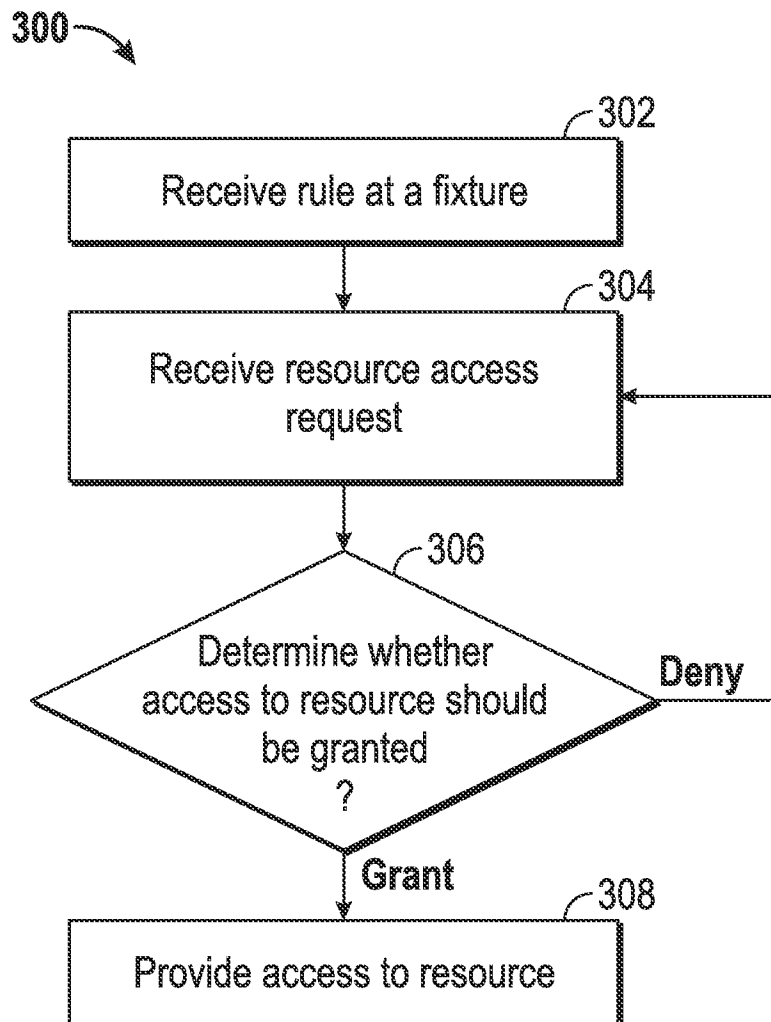


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No.
PCT/US2013/036744**A. CLASSIFICATION OF SUBJECT MATTER****E05B 49/00(2006.01)i, G07C 9/00(2006.01)i**

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

E05B 49/00; B66B 1/34; B66B 1/28; B66B 1/20; B66B 5/00; H04Q 9/00; G08B 29/00; G06F 7/04; G07C 9/00

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Korean utility models and applications for utility models

Japanese utility models and applications for utility models

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

eKOMPASS(KIPO internal) & Keywords:conveyance, access, rule, fixture, identity, request

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2005-0099288 A1 (CHARLES F. SPITZ et al.) 12 May 2005 See abstract, paragraphs [0035]-[0051],[0060]-[0089] and figures 1-12.	1-19
Y	US 2012-0305340 A1 (MING-YUAN WU) 06 December 2012 See abstract, paragraphs [0002]-[0018],[0056],[0124], claim 1 and figures 1A-7B.	1-19
A	KR 10-2008-0010351 A (INVENTIO AG) 30 January 2008 See abstract, paragraphs [0016]-[0028],[0038] and figures 1,2.	1-19
A	US 7093693 B1 (ROBERT F. GAZDZINSKI) 22 August 2006 See abstract, column 3, line 30-column 6, line 24 and figures 1-13.	1-19
A	US 2003-0098776 A1 (PAUL FRIEDLI) 29 May 2003 See abstract, paragraphs [0012]-[0031] and figure 1.	1-19



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

22 January 2014 (22.01.2014)

Date of mailing of the international search report

22 January 2014 (22.01.2014)

Name and mailing address of the ISA/KR

Korean Intellectual Property Office
189 Cheongsa-ro, Seo-gu, Daejeon Metropolitan City,
302-701, Republic of Korea

Facsimile No. +82-42-472-7140

Authorized officer

KIM, Tae Hoon

Telephone No. +82-42-481-8407



INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/036744

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005-0099288 A1	12/05/2005	CA 2453859 A1 CA 2453859 C EP 1443609 A2 EP 1443609 A3 EP 1443609 B1 JP 2004-235156 A JP 4005570 B2 US 2004-0152364 A1 US 2006-0283938 A1 US 6969283 B2 US 7145457 B2	31/07/2004 18/03/2008 04/08/2004 07/06/2006 01/08/2007 19/08/2004 07/11/2007 05/08/2004 21/12/2006 29/11/2005 05/12/2006
US 2012-0305340 A1	06/12/2012	None	
KR 10-2008-0010351 A	30/01/2008	AU 2007-203453 A1 CA 2594876 A1 EP 1882666 A1 EP 1882666 B1 JP 2008-030954 A JP 5099821 B2 TW 200823143 A US 2008-0047783 A1 US 8602171 B2	14/02/2008 26/01/2008 30/01/2008 09/10/2013 14/02/2008 19/12/2012 01/06/2008 28/02/2008 10/12/2013
US 7093693 B1	22/08/2006	US 2010-0217657 A1 US 2010-0217669 A1 US 6615175 B1 US 6988071 B1 US 7711565 B1 US 8065156 B2 US 8117037 B2	26/08/2010 26/08/2010 02/09/2003 17/01/2006 04/05/2010 22/11/2011 14/02/2012
US 2003-0098776 A1	29/05/2003	AR 037422 A1 AT 384022 T AU 2002-302162 B2 BR 0204769 A BR 0204769 B1 CA 2412196 A1 CA 2412196 C CN 1206149 C0 CN 1421375 A0 DE 50211545 D1 DK 1314676 T3 EP 1314676 A1 EP 1314676 B1 ES 2300413 T3 JP 2003-192247 A MX PA02010995 A MY 134525 A	10/11/2004 15/02/2008 03/05/2007 16/09/2003 26/06/2012 26/05/2003 20/09/2011 15/06/2005 04/06/2003 06/03/2008 07/07/2008 28/05/2003 16/01/2008 16/06/2008 09/07/2003 15/10/2004 31/12/2007

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/US2013/036744Patent document
cited in search reportPublication
datePatent family
member(s)Publication
date

NO 20025680 A	27/05/2003
NO 20025680 D0	26/11/2002
NO 323798 B1	09/07/2007
PT 1314676 E	23/04/2008
SG 124246 A1	30/08/2006
US 7936249 B2	03/05/2011
ZA 200208975 A	23/05/2003