



(12) **United States Patent**
Sheridan

(10) **Patent No.:** **US 11,187,160 B2**
(45) **Date of Patent:** ***Nov. 30, 2021**

(54) **GEARED TURBOFAN WITH
NON-EPICYCLIC GEAR REDUCTION
SYSTEM**

(58) **Field of Classification Search**
CPC F02C 7/36; F02C 3/107; F16H 1/20; F16H
57/0423; F16H 57/0457; F16H 57/0495;
F02K 3/06
See application file for complete search history.

(71) Applicant: **Raytheon Technologies Corporation**,
Farmington, CT (US)

(72) Inventor: **William G. Sheridan**, Southington, CT
(US)

(73) Assignee: **Raytheon Technologies Corporation**,
Farmington, CT (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 0 days.

This patent is subject to a terminal dis-
claimer.

(21) Appl. No.: **16/878,114**

(22) Filed: **May 19, 2020**

(65) **Prior Publication Data**
US 2020/0386167 A1 Dec. 10, 2020

Related U.S. Application Data

(63) Continuation of application No. 15/396,870, filed on
Jan. 3, 2017, now Pat. No. 10,669,948.

(51) **Int. Cl.**
F02C 7/36 (2006.01)
F02K 3/06 (2006.01)

(Continued)

(52) **U.S. Cl.**
CPC **F02C 7/36** (2013.01); **F02C 3/107**
(2013.01); **F02K 3/06** (2013.01); **F16H 1/20**
(2013.01); **F16H 57/0423** (2013.01); **F16H**
57/0457 (2013.01); **F16H 57/0495** (2013.01);
F05D 2220/323 (2013.01); **F05D 2240/62**
(2013.01);

(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,258,792 A 4/1941 New
2,501,633 A * 3/1950 Price F02K 3/04
60/262

(Continued)

FOREIGN PATENT DOCUMENTS

EP 0791383 8/1997
EP 1142850 10/2001

(Continued)

OTHER PUBLICATIONS

Honeywell LF507. Jane's Aero-engines, Aero-engines-Turbofan.
Feb. 9, 2012.


(Continued)

Primary Examiner — Woody A Lee, Jr.
Assistant Examiner — Brian Christopher Delruie
(74) *Attorney, Agent, or Firm* — Carlson, Gaskey & Olds,
P.C.

(57) **ABSTRACT**

A gas turbine engine comprises a fan drive turbine driving
a shaft. The shaft engages a gear reduction. The gear
reduction drives a fan rotor at a speed that is less than the
speed of the fan drive turbine. The gear reduction is a
non-epicyclic gear reduction.

30 Claims, 3 Drawing Sheets

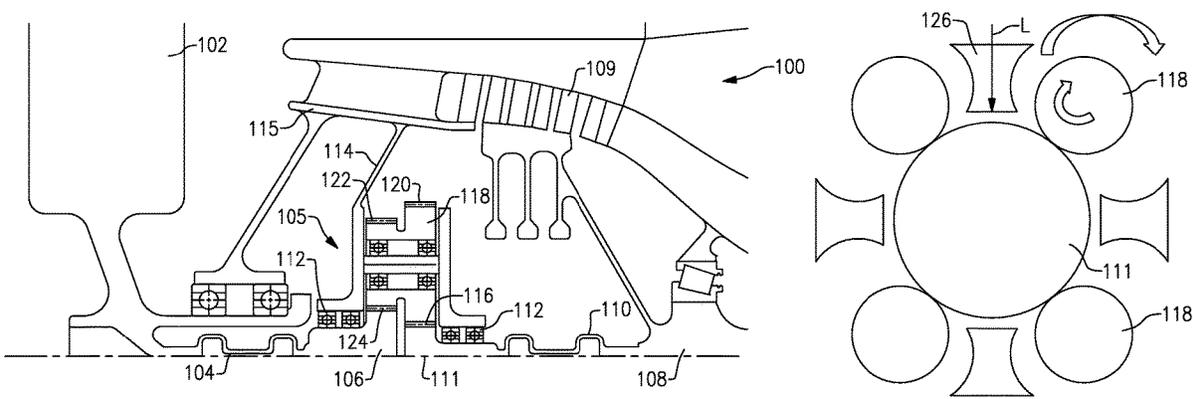

(51)	Int. Cl.		7,824,305 B2 *	11/2010	Duong	F16D 3/72
	F02C 3/107	(2006.01)				475/347
	F16H 1/20	(2006.01)	7,828,682 B2	11/2010	Smook	
	F16H 57/04	(2010.01)	7,926,260 B2	4/2011	Sheridan et al.	
(52)	U.S. Cl.		7,997,868 B1	8/2011	Liang et al.	
	CPC	<i>F05D 2260/4031</i> (2013.01); <i>F05D 2260/4031I</i> (2013.01); <i>F05D 2260/98</i> (2013.01)	8,205,432 B2	6/2012	Sheridan	
			8,572,943 B1	11/2013	Sheridan	F02C 7/06
			8,756,908 B2 *	6/2014	Sheridan	60/39.08
			9,194,255 B2	11/2015	Sheridan et al.	
			9,346,541 B2	5/2016	Honorat	

(56) **References Cited**

U.S. PATENT DOCUMENTS

2,936,655 A	5/1960	Peterson et al.				
3,021,731 A	2/1962	Stoeckicht				
3,194,487 A	7/1965	Tyler et al.				
3,287,906 A	11/1966	McCormick				
3,352,178 A	11/1967	Lindgren et al.				
3,412,560 A	11/1968	Gaubatz				
3,664,612 A	5/1972	Skidmore et al.				
3,747,343 A	7/1973	Rosen				
3,754,484 A	8/1973	Roberts				
3,765,623 A	10/1973	Donelson et al.				
3,820,719 A	6/1974	Clark				
3,843,277 A	10/1974	Ehrich				
3,892,358 A	7/1975	Gisslen				
3,932,058 A	1/1976	Harner et al.				
3,935,558 A	1/1976	Miller et al.				
3,988,889 A	11/1976	Chamay et al.				
4,130,872 A	12/1978	Harloff				
4,220,171 A	9/1980	Ruehr				
4,240,250 A	12/1980	Harris				
4,251,987 A *	2/1981	Adamson	F02K 3/04			60/805

2005/0011307 A1	1/2005	Gmirya				
2005/0178892 A1	8/2005	Box et al.				
2006/0228206 A1	10/2006	Decker et al.				
2007/0240399 A1	10/2007	Orlando et al.				
2008/0003096 A1	1/2008	Kohli et al.				
2008/0116009 A1	5/2008	Sheridan et al.				
2008/0317588 A1	12/2008	Grabowski et al.				
2009/0056343 A1	3/2009	Suciu et al.				
2009/0111639 A1	4/2009	Klingels				
2009/0304518 A1	12/2009	Kodama et al.				
2009/0314881 A1	12/2009	Suciu et al.				
2010/0061839 A1	3/2010	Bartolomeo et al.				
2010/0105516 A1	4/2010	Sheridan et al.				
2010/0148396 A1	6/2010	Xie et al.				
2010/0212281 A1	8/2010	Sheridan				
2010/0218483 A1	9/2010	Smith				
2010/0331139 A1	12/2010	McCune				
2011/0159797 A1	6/2011	Beltman et al.				
2011/0293423 A1	12/2011	Bunker et al.				
2012/0124964 A1	5/2012	Hasel et al.				
2012/0171018 A1 *	7/2012	Hasel	F02C 7/00			415/122.1
2013/0318999 A1 *	12/2013	Lucas	F02C 3/067			60/792
2016/0186604 A1	6/2016	Ertas				

FOREIGN PATENT DOCUMENTS

EP	2226487 A2	9/2010	
EP	1706620 B1	8/2011	
EP	2339146 B1	8/2012	
EP	2963249 A1	1/2016	
EP	2975239 A1	1/2016	
EP	3054139 A1	8/2016	
EP	2226487 B1 *	12/2018 F02C 3/10
EP	3045772 B1	12/2019	
EP	2362064 B1	7/2020	
GB	190417234	8/1905	
GB	191268	1/1923	
GB	612709	11/1948	
GB	1516041	6/1978	
GB	2041090	9/1980	
GB	2426792	12/2006	
WO	95/27860 A1	10/1995	
WO	00/17540 A2	3/2000	
WO	2007038674	4/2007	
WO	2013/034862 A1	3/2013	
WO	2013/147968 A1	10/2013	
WO	2014/085636 A1	6/2014	

OTHER PUBLICATIONS

Honeywell TFE731. Jane's Aero-engines, Aero-engines-Turbofan. Jul. 18, 2012.

NASA Conference Publication. Quiet, powered-lift propulsion. Cleveland, Ohio. Nov. 14-15, 1978. pp. 1-420.

"Civil Turbojet/Turbofan Specifications", Jet Engine Specification Database (Apr. 3, 2005).

Kandebo, S.W. (1993). Geared-turbofan engine design targets cost, complexity. Aviation Week & Space Technology, 148(8). Start p. 32.

Hendricks, E.S. and Tong, M.T. (2012). Performance and weight estimates for an advanced open rotor engine. NASA/TM-2012-217710. pp 1-13.

Guynn, M. D., Berton, J.J., Fisher, K. L., Haller, W.J., Tong, M. T., and Thurman, D.R. (2011). Refined exploration of turbofan design

4,284,174 A	8/1981	Salvana et al.	
4,289,360 A	9/1981	Zirin	
4,478,551 A	10/1984	Honeycutt, Jr. et al.	
4,590,820 A	5/1986	Hambric	
4,649,114 A	3/1987	Miltenburger et al.	
4,696,156 A	9/1987	Burr et al.	
4,722,357 A	2/1988	Wynosky	
4,825,645 A	5/1989	Bell, III	
4,979,362 A	12/1990	Vershure, Jr.	
5,058,617 A	10/1991	Stockman et al.	
5,102,379 A	4/1992	Pagluica et al.	
5,141,400 A	8/1992	Murphy et al.	
5,317,877 A	6/1994	Stuart	
5,361,580 A	11/1994	Ciokajlo et al.	
5,433,674 A	7/1995	Sheridan et al.	
5,447,411 A	9/1995	Curley et al.	
5,466,198 A	11/1995	McKibbin et al.	
5,524,847 A	6/1996	Brodell et al.	
5,634,767 A	6/1997	Dawson	
5,677,060 A	10/1997	Terentieva et al.	
5,778,659 A	7/1998	Duesler et al.	
5,857,836 A	1/1999	Stickler et al.	
5,915,917 A	6/1999	Eveker et al.	
5,975,841 A	11/1999	Lindemuth et al.	
5,985,470 A	11/1999	Spitsberg et al.	
6,223,616 B1	5/2001	Sheridan	
6,315,815 B1	11/2001	Spadaccini et al.	
6,318,070 B1	11/2001	Rey et al.	
6,387,456 B1	5/2002	Eaton, Jr. et al.	
6,517,341 B1	2/2003	Brun et al.	
6,607,165 B1	8/2003	Manteiga et al.	
6,709,492 B1	3/2004	Spadaccini et al.	
6,814,541 B2	11/2004	Evans et al.	
6,883,303 B1	4/2005	Seda	
7,021,042 B2	4/2006	Law	
7,219,490 B2	1/2007	Dev	
7,328,580 B2	2/2008	Lee et al.	
7,374,403 B2	5/2008	Decker et al.	
7,591,754 B2	9/2009	Duong et al.	
7,632,064 B2	12/2009	Somanath	
7,662,059 B2	2/2010	McCune	
7,704,178 B2	4/2010	Sheridan et al.	
7,806,651 B2	10/2010	Kennepohl et al.	

(56)

References Cited

OTHER PUBLICATIONS

- options for an advanced single-aisle transport. NASA/TM-2011-216883. pp. 1-27.
- Zalud, T. (1998). Gears put a new spin on turbofan performance. *Machine Design*, 70(20), p. 104.
- Kurzke, J. (2008). Preliminary Design, Aero-engine design: From state of the art turbofans towards innovative architectures, pp. 1-72.
- Zamboni, G. and Xu, L. (2009). Fan root aerodynamics for large bypass gas turbine engines: Influence on the engine performance and 3D design. Proceedings of ASME Turbo Expo 2009: Power for Land, Sea and Air. Jun. 8-12, 2009, Orlando, Florida, USA. pp. 1-12.
- Han, J., Dutta, S., and Ekkad, S.V. (2000). Gas turbine heat transfer and cooling technology. New York, NY: Taylor & Francis, pp. 1-25, 129-157, and 160-249.
- Mattingly, J.D. (1996). Elements of gas turbine propulsion. New York, New York: McGraw-Hill, Inc. pp. 1-18, 60-62, 85-87, 95-104, 121-123, 223-234, 242-245, 278-280, 303-309, 323-326, 462-479, 517-520, 563-565, 673-675, 682-685, 697-699, 703-705, 802-805, 862-864, and 923-925.
- Declaration of Reza Abhari, Ph.D. In re U.S. Pat. No. 8,844,265. Executed Jun. 28, 2016. pp. 1-91.
- Declaration of John Eaton, Ph.D. In re U.S. Pat. No. 8,869,568. Executed Mar. 28, 2016. pp. 1-87.
- Declaration of Reza Abhari. In re U.S. Pat. No. 8,695,920. Executed Nov. 30. pp. 1-67.
- Declaration of Reza Abhari. In re U.S. Pat. No. 8,448,895. Executed Nov. 28. pp. 1-81.
- Declaration of Reza Abhari. In re U.S. Pat. No. 8,695,920, claims 1-4, 7-14, 17 and 19. Executed Nov. 29. pp. 1-102.
- Declaration of Dr. Magdy Attia. In re U.S. Pat. No. 8,313,280. Executed Oct. 21, 2016. pp. 1-88.
- Lord, W.K., Macmartin, D.G., and Tillman, T.G. (2000). Flow control opportunities in gas turbine engines. American Institute of Aeronautics and Astronautics, pp. 1-15.
- Daly, M. Ed. (2010). Jane's Aero-Engine. Issue Twenty-seven. Mar. 2010. p. 633-636.
- Roux, E. (2007). Turbofan and turbojet engines database handbook. Editions Elodie Roux. Blagnac: France, pp. 1-595.
- Wilfert, G. (2008). Geared fan. Aero-Engine Design: From State of the Art Turbofans Towards Innovative Architectures, von Karman Institute for Fluid Dynamics, Belgium, Mar. 3-7, 2008. pp. 1-26.
- Declaration of Dr. Magdy Attia. In re U.S. Pat. No. 8,517,668. Executed Dec. 8, 2016. pp. 1-81.
- Cramoisi, G. Ed. (2012). Death in the Potomac: The crash of Air Florida Flight 90. Air Crash Investigations. Accident Report NTSB/AAR-82-8. p. 45-47.
- Norton, M. and Karczub, D. (2003). Fundamentals of noise and vibration analysis for engineers. Press Syndicate of the University of Cambridge. New York: New York, p. 524.
- U.S. Department of Transportation: Federal Aviation Administration Advisory Circular. Runway overrun prevention. Dated: Nov. 6, 2007. p. 1-8 and Appendix 1 p. 1-15, Appendix 2 p. 1-6, Appendix 3 p. 1-3, and Appendix 4 p. 1-5.
- U.S. Department of Transportation: Federal Aviation Administration Advisory Circular. Standard operating procedures for flight deck crewmembers. Dated: Feb. 27, 2003. . . . p. 1-6 and Appendices.
- Vasudevan, A.K. and Pe Irovic, J.J. (1992). A comparative overview of molybdenum disilicide composites. *Materials Science and Engineering*, A155, 1992. pp. 1-17.
- Clarke, D.R. and Levi, C.G. (2003). Materials design for the next generation thermal barrier coatings. *Annual. Rev. Mater. Res.* vol. 33. 2003. pp. 383-417.
- Bornstein, N. (1993). Oxidation of advanced intermetallic compounds. *Journal de Physique IV*, 1993, 03 (C9), pp. C9-367-C9-373.
- Krenkel, W., Naslain, R., and Schneider, H. Eds. (2001). High temperature ceramic matrix composites pp. 224-229. Weinheim, DE: Wiley-VCH Verlag GmbH.
- Gibala, R., Ghosh, A.K., Van Aken, D.C., Srolovitz, D.J., Basu, A., Chang, H., . . . Yang, W. (1992). Mechanical behavior and interface design of MoSi₂-based alloys and composites. *Materials Science and Engineering*, A155, 1992. pp. 147-158.
- Shah, D.M. (1992). MoSi₂ and other silicides as high temperature structural materials. *Superalloys 1992. The Minerals, Metals, & Materials Society*, pp. 409-422.
- Zhao, J.C. and Westbrook, J.H. (2003). Ultrahigh-temperature materials for jet engines. *MRS Bulletin*. vol. 28 (9). Sep. 2003. pp. 622-630.
- Tsirlin, M., Pronin, Y.E., Florina, E.K., Mukhametov, S. Kh., Khatsernov, M.A., Yun, H.M., . . . Kroke, E. (2001). Experimental investigation of multifunctional interphase coatings on SiC fibers for non-oxide high temperature resistant CMCs. *High Temperature Ceramic Matrix Composites. 4th Int'l Conf. on High Temp. Ceramic Matrix Composites*. Oct. 1-3, 2001. pp. 149-156.
- Jacobson, N.S. (1993). Corrosion of silicon-based ceramics in combustion environments. *J. Am. Ceram. Soc.* 76 (1). pp. 3-28.
- Jorgensen, P.J., Wadsworth, M.E., and Cutler, I.B. (1961). Effects of water vapor on oxidation of silicon carbide. *J. Am. Ceram. Soc.* 44(6). pp. 248-261.
- Xu, Y., Cheng, L., Zhang, L., Ying, H., and Zhou, W. (1999). Oxidation behavior and mechanical properties of C/SiC composites with Si-MoSi₂ oxidation protection coating. *J. of Mat. Sci.* vol. 34. 1999. pp. 6009-6014.
- Sundaram, S.K., Hsu, J-Y., Speyer, R.F. (1995). Molten glass corrosion resistance of immersed combustion-heating tube materials in e-glass. *J. Am. Ceram. Soc.* 78(7). pp. 1940-46.
- Jeng, Y.-L., Lavernia, E.J. (1994). Processing of molybdenum disilicide. *J. of Mat. Sci.* vol. 29. 1994. pp. 2557-2571.
- Suzuki, Y., Morgan, P.E.D., and Niihara, K. (1998). Improvement in mechanical properties of powder-processed MoSi₂ by the addition of Sc₂O₃ and Y₂O₃. *J. Am. Ceram. Soc.* 81(12). pp. 3141-49.
- Webster, J.D., Westwood, M.E., Hayes, F.H., Day, R.J., Taylor, R., Duran, A., . . . Vogel, W.D. (1998). Oxidation protection coatings for C/SiC based on yttrium silicate. *Journal of European Ceramic Society* vol. 18. 1998. pp. 2345-2350.
- Petrovic, J.J., Castro, R.G., Vaidya, R.U., Peters, M.I., Mendoza, D., Hoover, R.C., and Gallegos, D.E. (2001). Molybdenum disilicide materials for glass melting sensor sheaths. *Ceramic Engineering and Science Proceedings* vol. 22(3). 2001. pp. 59-64.
- Kahn, H., Tayebi, N., Ballarini, R., Mullen, R.L., Heuer, A.H. (2000). Fracture toughness of polysilicon MEMS devices. *Sensors and Actuators* vol. 82. 2000. pp. 274-280.
- Muhlstein, C.L., Stach, E.A., and Ritchie, R.O. (2002). A reaction-layer mechanism for the delayed failure of micron-scale polycrystalline silicon structural films subjected to high-cycle fatigue loading. *Acta Materialia* vol. 50. 2002. pp. 3579-3595.
- Sundaram, S.K., Hsu, J-Y., Speyer, R.F. (1994). Molten glass corrosion resistance of immersed combustion-heating tube materials in soda-lime-silicate glass. *J. Am. Ceram. Soc.* 77(6). pp. 1613-23.
- Leckie, F.A. and Dal Bello, D.J. (2009). Strength and stiffness of engineering systems. *Mechanical Engineering Series*. Springer. pp. 1-3.
- El-Sayad, A.F. (2008). Aircraft propulsion and gas turbine engines. Boca Raton, FL: CRC Press. pp. 215-219 and 855-60.
- Bunker, R.S. (2005). A review of shaped hole turbine film-cooling technology. *Journal of Heat Transfer* vol. 127. Apr. 2005. pp. 441-453.
- European Search Report for EP Application No. 20209626.9 dated Mar. 10, 2021.
- European Search Report for EP Application No. 18150209.7 dated May 11, 2018.
- Anderson, R.D. (1985). Advanced Propfan Engine Technology (APET) definition study, single and counter-rotation gearbox/pitch change mechanism design. NASA CR-168115. Jul. 1, 1985. pp. 1-289.
- Newton, F.C., Liebeck, R.H., Mitchell, G.H., Mooiweer, M.A., Platte, M.M., Toogood, T.L., and Wright, R.A. (1986). Multiple Application Propfan Study (MAPS): Advanced tactical transport. NASA CR-175003. Mar. 1, 1986. pp. 1-101.
- Gliebe, P.R., Ho, P.Y., and Mani, R. (1995). UHB engine fan and broadband noise reduction study. NASA CR-198357. Jun. 1995. pp. 1-48.

(56)

References Cited

OTHER PUBLICATIONS

- Holcombe, V. (2003). Aero-Propulsion Technology (APT) task V low noise ADP engine definition study. NASA CR-2003-212521. Oct. 1, 2003. pp. 1-73.
- Sutliff, D. (2005). Rotating rake turbofan duct mode measurement system. NASA TM-2005-213828. Oct. 1, 2005. pp. 1-34.
- Adamson, A.P. (1975). Quiet Clean Short-Haul Experimental Engine (QCSEE) design rationale. Society of Automotive Engineers. Air Transportation Meeting, Hartford, CT. May 6-8, 1975. pp. 1-9. NASA Conference Publication. (1978). CTOL transport technology. NASA-CP-2036-PT-1. Jun. 1, 1978. pp. 1-531.
- Kandebo, S.W. (1998). Geared-Turbofan engine design targets cost, complexity. *Aviation Week & Space Technology*, 148(8). p. 34-5.
- Davis, D.G.M. (1973). Variable-pitch fans: Progress in Britain. *Flight International*. Apr. 19, 1973. pp. 615-7.
- Levintan, R.M. (1975). Q-Fan demonstrator engine. *Journal of Aircraft*. Vol 12(8). Aug. 1975. pp. 658-63.
- Technical Report. (1975). Quiet Clean Short-haul Experimental Engine (QCSEE) UTW fan preliminary design. NASA-CR-134842. Feb. 1, 1975. pp 1-98.
- Aerospace Information Report. (2008). Advanced ducted propulsor in-flight thrust determination. SAE International AIR5450. Aug. 2008. p. 1-392.
- Daggett, D.L., Brown, S.T., and Kawai, R.T. (2003). Ultra-efficient engine diameter study. NASA/CR-2003-212309. May 2003. pp. 1-52.
- Haldenbrand, R. and Norgren, W.M. (1979). Airesearch QCGAT program [quiet clean general aviation turbofan engines]. NASA-CR-159758. pp. 1-199.
- Winn, A. (Ed). (1990). Wide Chord Fan Club. *Flight International*, 4217(137). May 23-29, 1990. pp. 34-38.
- Parker, R.G. and Lin, J. (2001). Modeling, modal properties, and mesh stiffness variation instabilities of planetary gears. Prepared for NASA. NASA/CR-2001-210939. May 2001. pp. 1-111.
- Mancuso, J.R. and Corcoran, J.P. (2003). What are the differences in high performance flexible couplings for turbomachinery? Proceedings of the Thirty-Second Turbomachinery Symposium. 2003. pp. 189-207.
- Dudley, D.W., Ed. (1954). Handbook of practical gear design. Lancaster, PA: Technomic Publishing Company, Inc. pp. 3.96-102 and 8.12-18.
- Dudley, D.W., Ed. (1962). Gear handbook. New York, NY: McGraw-Hill. pp. 3.14-18 and 12.7-12.21.
- Dudley, D.W., Ed. (1994). Practical gear design. New York, NY: McGraw-Hill. pp. 119-124.
- Product Brochure. Garrett TFE731. Allied Signal. Copyright 1987. pp. 1-24.
- Honeywell Learjet 31 and 35/36 TFE731-2 to 2C Engine Upgrade Program. Sep. 2005. pp. 1-4.
- Honeywell Sabreliner 65 TFE731-3 to-3D Engine Upgrade Program. Oct. 2005. pp. 1-4.
- U.S. Department of Transportation: Federal Aviation Administration Type Certificate Data Sheet No. E6WE. Dated May 9, 2000. p. 1-9.
- Kurzke, J. (2012). GasTurb 12: Design and off-design performance of gas turbines. Retrieved from: <https://www.scribd.com/document/153900429/GasTurb-12>.
- Ahmad, F. and Mizramoghadam, A.V. (1999). Single v. two stage high pressure turbine design of modern aero engines. ASME. Presented at the International Gas Turbine & Aeroengine Congress & Exhibition. Indianapolis, Indiana. Jun. 7-10, 1999. pp. 1-9.
- Riegler, C., and Bichlmaier, C. (2007). The geared turbofan technology—Opportunities, challenges and readiness status. Proceedings CEAS. Sep. 10-13, 2007. Berlin, Germany. pp. 1-12.
- About GasTurb. Retrieved Jun. 26, 2018 from: <http://gasturb.de/about-gasturb.html>.
- Kurzke, J. (2001). GasTurb 9: A program to calculate design and off-design performance of gas turbines. Retrieved from: <https://www.scribd.com/document/92384867/GasTurb9Manual>.
- Tummers, B. (2006). DataThief III. Retrieved from: <https://datathief.org/DatathiefManual.pdf> pp. 1-52.
- Manual. Student's Guide to Learning SolidWorks Software. Dassault Systemes—SolidWorks Corporation, pp. 1-156.
- Macisaac, B. and Langston, R. (2011). Gas turbine propulsion systems. Chichester, West Sussex: John Wiley & Sons, Ltd. pp. 260-5.
- Datasheet. CFM56-5B For the Airbus A320ceo family and CFM56-7B for the Boeing 737 family. <https://www.cfmaeroengines.com/>.
- Turner, M. G., Norris, A., and Veres, J.P. (2004). High-fidelity three-dimensional simulation of the GE90. NASA/TM-2004-212981. pp. 1-18.
- Defeo, A. and Kulina, M. (1977). Quiet clean short-haul experimental engine (QCSEE) main reduction gears detailed design final report. Prepared for NASA. NASA-CR-134872. Jul. 1977. pp. 1-221.
- Amezqueta, M., Iriarte, X., Ros, J., and Pintor, J. (2009). Dynamic model of a helical gear pair with backlash and angle-varying mesh stiffness. *Multibody Dynamics 2009, ECCOMAS Thematic Conference*. 2009. pp. 1-36.
- Singh, A. (2005). Application of a system level model to study the planetary load sharing behavior. *Journal of Mechanical Design*. vol. 127. May 2005. pp. 469-76.
- Smith-Boyd, L. and Pike, J. (1986). Expansion of epicyclic gear dynamic analysis program. Prepared for NASA. NASA-CR-179563. Aug. 1986. pp. 1-98.
- Wikipedia. Torsion spring. Retrieved Jun. 29, 2018 from: https://en.wikipedia.org/wiki/Torsion_spring.
- AGMA Standard (2006). Design manual for enclosed epicyclic gear drives. Alexandria, VA: American Gear Manufacturers Association, pp. 1-104.
- AGMA Standard (1997). Design and selection of components for enclosed gear drives. Alexandria, VA: American Gear Manufacturers Association, pp. 1-48.
- Daly, M. Ed. (2007). *Jane's Aero-Engine*. Issue Twenty-three. Mar. 2008. p. 707-12.
- AGMA Standard (1999). Flexible couplings—Mass elastic properties and other characteristics. Alexandria, VA: American Gear Manufacturers Association. pp. 1-46.
- Wikipedia. Stiffness. Retrieved Jun. 28, 2018 from: <https://en.wikipedia.org/wiki/Stiffness>.
- Damerou, J. (2014) What is the mesh stiffness of gears? Screen shot of query submitted by Vahid Dabbagh, answered by Dr. Jochan Damerou, Research General Manager at Bosch Corp., Japan. Retrieved from: https://www.researchgate.net/post/What_is_the_mesh_slirtness_of_gears.
- Hill, P.G., Peterson, C.R. (1965). Mechanics and thermodynamics of propulsion. Addison-Wesley Publishing Company, Inc. pp. 307-8.
- Hill, P.G., Peterson, C.R. (1992). Mechanics and thermodynamics of propulsion, 2nd Edition. Addison-Wesley Publishing Company, Inc. pp. 400-6.
- Kasuba, R. and August, R. (1984). Gear mesh stiffness and load sharing in planetary gearing. American Society of Mechanical Engineers, Design Engineering Technical Conference, Cambridge, MA. Oct. 7-10, 1984. pp. 1-6.
- Ciepluch, C. (1977). Quiet clean short-haul experimental engine (QCSEE) under-the-wing (UTW) final design report. Prepared for NASA. NASA-CP-134847. Retrieved from: <https://ntrs.nasa.gov/archive/nasa/casi.ntrs.nasa.gov/19800075257.pdf>.
- Gray, D.E. and Gardner, W.B. (1983). Energy efficient engine program technology benefit/cost study—vol. 2. NASA CR-174766. Oct. 1983. pp. 1-118.
- Groweneweg, J.F. (1994). Fan noise research at NASA. NASA-TM-106512. Prepared for the 1994 National Conference on Noise Control Engineering. Fort Lauderdale, FL. May 1-4, 1994. pp. 1-10.
- Groweneweg, J.F. (1994). Fan noise research at NASA. Noise-CON 94. Fort Lauderdale, FL. May 1-4, 1994. pp. 1-10.
- Heidelberg, L.J., and Hall, D.G. (1992). Acoustic mode measurements in the inlet of a model turbofan using a continuously rotating rake. NASA-TM-105989. Prepared for the 31st Aerospace Sciences Meeting. Reno, NV. Jan. 11-14, 1993. pp. 1-30.

(56)

References Cited

OTHER PUBLICATIONS

- Heidelberg, L.J., and Hall, D.G. (1992). Acoustic mode measurements in the inlet of a model turbofan using a continuously rotating rake. AIAA-93-0598. 31st Aerospace Sciences Meeting, Reno, NV. Jan. 11-14, 1993. pp. 1-30.
- Howe, D.C., and Wynosky, T.A. (1985). Energy efficient engine program advanced turbofan nacelle definition study NASA-CR-174942. May 1985. pp. 1-60.
- Howe, D.C., and Wynosky, T.A. (1985). Energy efficient engine program advanced turbofan nacelle definition study NASA-CR-174942. May 1985. University of Washington dated Dec. 13, 1990. pp. 1-14.
- Wie, Y.S., Collier, F.S., Wagner, R.D., Viken, J.K., and Pfenninger, W. (1992). Design of a hybrid laminar flow control engine nacelle. AIAA-92-0400. 30th Aerospace Sciences Meeting & Exhibit. Jan. 6-9, 1992. pp. 1-14.
- Mattingly, J.D. (1996). Elements of gas turbine propulsion. New York, New York: McGraw-Hill, Inc. pp. 1-18, 60-62, 223-234, 462-479, 517-520, 757-767, and 862-864.
- Johnston, R.P., Hirschkrone, R. Koch, C.C., Neitzel, R.E., and Vinson, P.W. (1978). Energy efficient engine: Preliminary design and integration study-final report. NASA CR-135444. Sep. 1978. pp. 1-401.
- Johnston, R.P. and Hemsworth, M.C. (1978). Energy efficient engine preliminary design and integration studies. Jun. 1, 1978. pp. 1-28.
- Awker, R.W. (1986). Evaluation of propfan propulsion applied to general aviation. NASA CR-175020. Mar. 1, 1986. pp. 1-140.
- Howe, D.C. and Wynosky, T.A. (1985). Energy efficient engine program advanced turbofan nacelle definition study. NASA CR-174942. May 1, 1985. pp. 174.
- Singh, B. (1986). Small engine component technology (SECT) study. NASA CR-175079. Mar. 1, 1986. pp. 1-102.
- Liebeck, R.H., Andrastek, D.A., Chau, J., Girvin, R., Lyon, R., Rawdon, B.K., Scott, P.W. et al. (1995). Advanced subsonic airplane design & economics studies. NASA CR-195443. Apr. 1995. pp. 1-187.
- Davies, D. and Miller, D.C. (1971). A variable pitch fan for an ultra quiet demonstrator engine. 1976 Spring Convention: Seeds for Success in Civil Aircraft Design in the Next Two Decades. pp. 1-18.
- Middleton, P. (1971). 614: VFW's jet feederliner. Flight International, Nov. 4, 1971. p. 725, 729-732.
- Schaefer, J.W., Sagerser, D.R., and Stakolich, E.G. (1977). Dynamics of high-bypass-engine thrust reversal using a variable-pitch fan. Technical Report prepared for NASA. NASA-TM-X-3524. May 1, 1977. pp. 1-33.
- Savelle, S.A. and Garrard, G.D. (1996). Application of transient and dynamic simulations to the U.S. Army T55-L-712 helicopter engine. The American Society of Mechanical Engineers. Presented Jun. 10-13, 1996. pp. 1-8.
- Drago, R.J. and Margasahayam, R.N. (1987). Stress analysis of planet gears with integral bearings; 3D finite-element model development and test validation. 1987 MSC NASTRAN World Users Conference. Los Angeles, CA. Mar. 1987. pp. 1-14.
- Baker, R.W. (2000). Membrane technology and applications. New York, NY: McGraw-Hill. pp. 87-153.
- Cheryan, M. (1998). Ultrafiltration and microfiltration handbook. Lancaster, PA: Tecnic Publishing Company, Inc. pp. 171-236.
- Seader, J.D. and Henley, E.J. (1998). Separation process principles. New York, NY: John Wiley & Sons, Inc. pp. 722-6 and 764-71.
- Spadaccini, L.J., and Huang, H. (2002). On-line fuel deoxygenation for coke suppression. ASME, Jun. 2002. pp. 1-7.
- Darrah, S. (1987). Jet fuel deoxygenation. Interim Report for Period Mar. 1987-Jul. 1988. pp. 1-22.
- Bucknell, R.L. (1973). Influence of fuels and lubricants on turbine engine design and performance, fuel and lubricant analyses. Final Technical Report, Mar. 1971-Mar. 1973. pp. 1-252.
- Hazlett, R.N. (1991). Thermal oxidation stability of aviation turbine fuels. Philadelphia, PA: ASTM. pp. 1-163.
- Taylor, W.F. (1974). Deposit formation from deoxygenated hydrocarbons. I. General features. Ind. Eng. Chem., Prod. Res. Develop., vol. 13(2). 1974. pp. 133-38.
- Taylor, W.F. (1974). Deposit formation from deoxygenated hydrocarbons. II. Effect of trace sulfur compounds. Ind. Eng. Chem., Prod. Res. Dev., vol. 15(1). 1974. pp. 64-8.
- Taylor, W.F. and Frankenfeld, J.W. (1978). Deposit formation from deoxygenated hydrocarbons. 3. Effects of trace nitrogen and oxygen compounds. Ind. Eng. Chem., Prod. Res. Dev., vol. 17(1). 1978. pp. 86-90.
- Frankenfeld, J.W. and Taylor, W.F. (1980). Deposit formation from deoxygenated hydrocarbons. 4. Studies in pure compound systems. Ind. Eng. Chem., Prod. Res. Dev., vol. 19(1). 1978. pp. 65-70.
- Hemighaus, G., Boval, T., Bacha, J., Barnes, F., Franklin, M., Gibbs, L., . . . Morris, J. (2007). Aviation fuels: Technical review. Chevron Products Company. pp. 1-94. Retrieved from: https://www.cgabusinessdesk.com/document/aviation_tech_review.pdf.
- Spadaccini, L.J., Sobel, D.R., and Huang, H. (2001). Deposit formation and mitigation in aircraft fuels. Journal of Eng. For Gas Turbine and Power, vol. 123. Oct. 2001. pp. 741-746.
- Edwards, T. and Zabarnick, S. (1993). Supercritical fuel deposition mechanisms. Ind. Eng. Chem. Res. vol. 32. 1993. pp. 3117-22.
- Huang, H., Sobel, D.R., and Spadaccini, L.J. (2002). Endothermic heat-sink of hydrocarbon fuels for scramjet cooling. AIAA/ASME/SAE/ASEE, Jul. 2002. pp. 1-7.
- Bessarabov, D.G., Jacobs, E.P., Sanderson, R.D., and Beckman, I.N. (1996). Use of nonporous polymeric flat-sheet gas-separation membranes in a membrane-liquid contactor: experimental studies. Journal of Membrane Sciences, vol. 113. 1996. pp. 275-84.
- Matsumoto, T., Toshiro, U., Kishida, A., Tsutomu, F., Maruyama, I., and Akashi, M. (1996). Novel functional polymers: Poly (dimethylsiloxane)-polyamide multiblock copolymer. VII. Oxygen permeability of aramid-silicone membranes in a gas-membrane-liquid system. Journal of Applied Polymer Science, vol. 64(6). May 9, 1997. pp. 1153-1159.
- Technical Data. Teflon. WS Hampshire Inc. Retrieved from: http://catalog.wshampshire.com/Asset/psg_teflon_ptfe.pdf.
- Anderson, N.E., Loewenthal, S.H., and Black, J.D. (1984). An analytical method to predict efficiency of aircraft gearboxes. NASA Technical Memorandum prepared for the Twentieth Joint Propulsion Conference. Cincinnati, OH. Jun. 11-13, 1984. pp. 1-25.
- Edkins, D.P., Hirschkrone, R., and Lee, R. (1972). TF34 turbofan quiet engine study. Final Report prepared for NASA. NASA-CR-120914. Jan. 1, 1972. pp. 1-99.
- Waters, M.H. and Schairer, E.T. (1977). Analysis of turbofan propulsion system weight and dimensions. NASA Technical Memorandum. Jan. 1977. pp. 1-65.
- Meyer, A.G. (1988). Transmission development of TEXTRON Lycoming's geared fan engine. Technical Paper. Oct. 1988. pp. 1-12.
- Dudley, D.W., Ed. (1962). Gear handbook. New York, NY: McGraw-Hill. pp. 14-17 (TOC, Preface, and Index).
- Hughes, C. (2002). Aerodynamic performance of scale-model turbofan outlet guide vanes designed for low noise. Prepared for the 40th Aerospace Sciences Meeting and Exhibit. Reno, NV. NASA/TM-2001-211352. Jan. 14-17, 2002. pp. 1-38.
- Kaplan, B., Nicke, E., Voss, C. (2006). Design of a highly efficient low-noise fan for ultra-high bypass engines. Proceedings of GT2006 for ASME Turbo Expo 2006: Power for Land, Sea and Air. Barcelona, SP. May 8-11, 2006. pp. 1-10.
- Gates, D. Bombardier flies at higher market. Seattle Times. Jul. 13, 2008. pp. C6.
- Decker, S. and Clough, R. (2016). GE wins shot at voiding pratt patent in jet-engine clash. Bloomberg Technology. Retrieved from: <https://www.bloomberg.com/news/articles/2016-06-30/ge-wins-shot-to-invalidate-pratt-airplane-engine-patent-in-u-s>.
- Trembley, Jr., H.F. (1977). Determination of effects of ambient conditions on aircraft engine emissions. ALF 502 combustor rig testing and engine verification test. Prepared for Environmental Protection Agency. Sep. 1977. pp. 1-256.
- Lewicki, D.G., Black, J.D., Savage, M., and Coy, J.J. (1985). Fatigue life analysis of a turboprop reduction gearbox. NASA

(56)

References Cited

OTHER PUBLICATIONS

- Technical Memorandum. Prepared for the Design Technical Conference (ASME). Sep. 11-13, 1985. pp. 1-26.
- McCune, M.E. (1993). Initial test results of 40,000 horsepower fan drive gear system for advanced ducted propulsion systems. AIAA 29th Joint Conference and Exhibit. Jun. 28-30, 1993. pp. 1-10.
- Wright, G.H. and Russell, J.G. (1990). The M.45SD-02 variable pitch geared fan engine demonstrator test and evaluation experience. *Aeronautical Journal.*, vol. 84(836). Sep. 1980. pp. 268-277.
- Drago, R.J. (1974). Heavy-lift helicopter brings up drive ideas. *Power Transmission Design.* Mar. 1987. pp. 1-15.
- Krantz, T.L. (1990). Experimental and analytical evaluation of efficiency of helicopter planetary stage. NASA Technical Paper. Nov. 1990. pp. 1-19.
- Heingartner, P., MBA, D., Brown, D. (2003). Determining power losses in the helical gear mesh; Case Study. ASME 2003 Design Engineering Technical Conferences. Chicago, IL. Sep. 2-6, 2003. pp. 1-7.
- Thulin, R.D., Howe, D.C., and Singer, I.D. (1982). Energy efficient engine: High pressure turbine detailed design report. Prepared for NASA. NASA CR-165608. Received Aug. 9, 1984. pp. 1-178.
- Reshotko, M., Karchmer, A., Penko, P.F. (1977). Core noise measurements on a YF-102 turbofan engine. NASA TM X-73587. Prepared for Aerospace Sciences Meeting sponsored by the American Institute of Aeronautics and Astronautics. Jan. 24-26, 2977.
- Gray, D.E. (1978). Energy efficient engine preliminary design and integration studies. Prepared for NASA. NASA CR-135396 Nov. 1978. pp. 1-366.
- Reynolds, C.N. (1985). Advanced prop-fan engine technology (APET) single-and counter-rotation gearbox/pitch change mechanism. Prepared for NASA. NASA CR-168114 (vol. 1). Jul. 1985. pp. 1-295.
- McCardle, J.G. and Moore, A.S. (1979). Static test-stand performance of the YF-102 turbofan engine with several exhaust configurations for the Quiet Short-Haul Research Aircraft (QSRA). Prepared for NASA. NASA-IP-1556. Nov. 1979. pp. 1-68.
- Mattingly, J.D. (1996). Elements of gas turbine propulsion. New York, New York: McGraw-Hill, Inc. pp. 1-18, 60-62, 85-87, 95-104, 121-123, 223-234, 242-245, 278-285, 303-309, 323-326, 462-479, 517-520, 563-565, 630-632, 668-670, 673-675, 682-685, 697-705, 726-727, 731-732, 802-805, 828-830 and appendices.
- Falchetti, F., Quiniou, H., and Verdier, L. (1994). Aerodynamic design and 3D Navier-Stokes analysis of a high specific flow fan. ASME. Presented at the International Gas Turbine and Aeroengine Congress and Exposition. The Hague, Netherlands. Jun. 13-16, 1994. pp. 1-10.
- Datasheet. CF6-80C2 high-bypass turbofan engines. Retrieved from <https://geaviation.com/sites/default/files/datasheet-CF6-80C2.pdf>.
- Salemme, C.T. and Murphy, G.C. (1979). Metal spar/superhybrid shell composite fan blades. Prepared for NASA. NASA-CR-159594. Aug. 1979. pp. 1-127.
- "Press release. The GE90 engine. Retrieved from: <https://www.geaviation.com/commercial/engines/ge90-engine>; <https://www.geaviation.com/press-release/ge90-engine-family/ge90-115b-fan-completing-blade-testing-schedule-first-engine-test>; and <https://www.geaviation.com/press-release/ge90-engine-family/ge90-composite-fan-blade-revolution-turns-20-years-old>".
- Datasheet. Genx™ high bypass turbofan engines. Retrieved from: <https://www.geaviation.com/sites/default/files/datasheet-genx.pdf>.
- McMillian, A. (2008) Material development for fan blade containment casing. Abstract. p. 1. Conference on Engineering and Physics: Synergy for Success 2006. Journal of Physics: Conference Series vol. 105. London, UK. Oct. 5, 2006.
- Kurzke, J. (2009). Fundamental differences between conventional and geared turbofans. Proceedings of ASME Turbo Expo: Power for Land, Sea, and Air. 2009, Orlando, Florida, pp. 145-153.
- Agarwal, B.D. and Broutman, L.J. (1990). Analysis and performance of fiber composites, 2nd Edition. John Wiley & Sons, Inc. New York: New York. pp. 1-30, 50-1, 56-8, 60-1, 64-71, 87-9, 324-9, 436-7.
- Carney, K., Pereira, M. Revilock, and Matheny, P. (2003) Jet engine fan blade containment using two alternate geometries. 4th European LS-DYNA Users Conference, pp. 1-10.
- Brines, G.L. (1990). The turbofan of tomorrow. *Mechanical Engineering: The Journal of the American Society of Mechanical Engineers*, 108(8), 65-67.
- Faghri, A. (1995). Heat pipe and science technology. Washington, D.C.: Taylor & Francis, pp. 1-60.
- Hess, C. (1998). Pratt & Whitney develops geared turbofan. *Flug Revue* 43(7). Oct. 1998.
- Grady, J.E., Weir, D.S., Lamoureux, M.C., and Martinez, M.M. (2007). Engine noise research in NASA's quiet aircraft technology project. Papers from the International Symposium on Air Breathing Engines (ISABE). 2007.
- Griffiths, B. (2005). Composite fan blade containment case. Modem Machine Shop. Retrieved from: <http://www.mmsonline.com/articles/composite-fan-blade-containment-case> pp. 1-4.
- Hall, C.A. and Crichton, D. (2007). Engine design studies for a silent aircraft. *Journal of Turbomachinery*, 129, 479-487.
- Haque, A. and Shamsuzzoha, M., Hussain, F., and Dean, D. (2003). S20-glass/epoxy polymer nanocomposites: Manufacturing, structures, thermal and mechanical properties. *Journal of Composite Materials*, 37 (20), 1821-1837.
- Brennan, P.J. and Kroliczek, E.J. (1979). Heat pipe design handbook. Prepared for National Aeronautics and Space Administration by B & K Engineering, Inc. Jun. 1979 pp. 1-348.
- Horikoshi, S. and Serpone, N. (2013). Introduction to nanoparticles. *Microwaves in nanoparticle synthesis*. Wiley-VCH Verlag GmbH & Co. KGaA. pp. 1-24.
- Kerrebrock, J.L. (1977). Aircraft engines and gas turbines. Cambridge, MA: The MIT Press, p. 11.
- Xie, M. (2008). Intelligent engine systems: Smart case system. NASA/CR-2008-215233. pp. 1-31.
- Knip, Jr., G. (1987). Analysis of an advanced technology subsonic turbofan incorporating revolutionary materials. NASA Technical Memorandum. May 1987. pp 1-23.
- Willis, W.S. (1979). Quiet clean short-haul experimental engine (QCSEE) final report. NASA/CR-159473 pp. 1-289.
- Kojima, Y., Usuki, A., Kawasumi, M., Okada, A., Fukushima, Y., Kurauchi, T., and Kamigaito, O. (1992). Mechanical properties of nylon 6-clay hybrid. *Journal of Materials Research*, 8(5), 1185-1189.
- Kollar, L.P. and Springer, G.S. (2003). Mechanics of composite structures. Cambridge, UK: Cambridge University Press, p. 465.
- Ramsden, J.M. (Ed). (1978). The new European airliner. *Flight International*, 113(3590). Jan. 7, 1978. pp. 39-43.
- Langston, L. and Faghri, A. Heat pipe turbine vane cooling. Prepared for Advanced Turbine Systems Annual Program Review. Morgantown, West Virginia. Oct. 17-19, 1995. pp. 3-9.
- Oates, G.C. (Ed). (1989). Aircraft propulsion systems and technology and design. Washington, DC.: American Institute of Aeronautics, Inc. pp. 341 344.
- Lau, K., Gu, C., and Hui, D. (2005). A critical review on nanotube and nanotube/nanoclay related polymer composite materials. *Composites: Part B* 37(2006) 425-436.
- Shorter Oxford English dictionary, 6th Edition. (2007). Vol. 2, N-Z. p. 1888.
- Lynwander, P. (1983). Gear drive systems: Design and application. New York, New York: Marcel Dekker, Inc. pp. 145, 355-358.
- Sweetman, B. and Sutton, O. (1998). Pratt & Whitney's surprise leap. *Interavia Business & Technology*, 53.621, p. 25.
- Mattingly, J.D. (1996). Elements of gas turbine propulsion. New York, New York: McGraw-Hill, Inc. pp. 8-15.
- Pyrograf-III Carbon Nanofiber. Product guide. Retrieved Dec. 1, 2015 from: http://pyrografproducts.com/Merchant5/merchant.mvc?Screen=cp_nanofiber.
- Nanacor Technical Data for Epoxy Nanocomposites using Nanomer 1.30E Nanoclay. Nnacor, Inc. Oct. 2004.
- Ratna, D. (2009). Handbook of thermoset resins. Shawbury, UK: iSmithers. pp. 187-216.
- Wendus, B.E., Stark, D.F., Holler, R.P., and Funkhouser, M.E. (2003). Follow-on technology requirement study for advanced subsonic transport. NASA/CR-2003-212467. pp. 1-37.

(56)

References Cited

OTHER PUBLICATIONS

Silverstein, C.C., Gottschlich, J.M., and Meininger, M. The feasibility of heat pipe turbine vane cooling. Presented at the International Gas Turbine and Aeroengine Congress and Exposition, The Hague, Netherlands. Jun. 13-16, 1994. pp. 1-7.

Merriam-Webster's collegiate dictionary, 11th Ed. (2009). p. 824.

Merriam-Webster's collegiate dictionary, 10th Ed. (2001). p. 1125-1126.

Whitaker, R. (1982). ALF 502: plugging the turbofan gap. *Flight International*, p. 237-241, Jan. 30, 1982.

Hughes, C. (2010). Geared turbofan technology. NASA Environmentally Responsible Aviation Project. Green Aviation Summit. NASA Ames Research Center. Sep. 8-9, 2010. pp. 1-8.

Gliebe, P.R. and Janardan, B.A. (2003). Ultra-high bypass engine aeroacoustic study. NASA/CR-2003-21252. GE Aircraft Engines, Cincinnati, Ohio. Oct. 2003. pp. 1-103.

Moxon, J. How to save fuel in tomorrow's engines. *Flight International*. Jul. 30, 1983. 3873(124). pp. 272-273.

File History for U.S. Appl. No. 12/131,876.

Cusick, M. (1981). Avco Lycoming's ALF 502 high bypass fan engine. Society of Automotive Engineers, inc. Business Aircraft Meeting & Exposition. Wichita, Kansas. Apr. 7-10, 1981. pp. 1-9.

Fledderjohn, K.R. (1983). The TFE731-5: Evolution of a decade of business jet service. SAE Technical Paper Series. Business Aircraft Meeting & Exposition. Wichita, Kansas. Apr. 12-15, 1983. pp. 1-12.

Dickey, T.A. and Dobak, E.R. (1972). The evolution and development status of ALF 502 turbofan engine. National Aerospace

Engineering and Manufacturing Meeting. San Diego, California. Oct. 2-5, 1972. pp. 1-12.

Gunston, B. (Ed.) (2000). *Jane's aero-engines*, Issue seven. Coulsdon, Surrey, UK: Jane's Information Group Limited. pp. 510-512.

Ivchenko-Progress D-436. *Jane's Aero-engines*, Aero-engines-Turbofan. Feb. 8, 2012.

Ivchenko-Progress AI-727M. *Jane's Aero-engines*, Aero-engines-Turbofan. Nov. 27, 2011.

Ivchenko-Progress D-727. *Jane's Aero-engines*, Aero-engines-Turbofan. Feb. 7, 2007.

Turbomeca Aubisque. *Jane's Aero-engines*, Aero-engines-Turbofan. Nov. 2, 2009.

Aviadvigatel D-110. *Jane's Aero-engines*, Aero-engines-Turbofan. Jun. 1, 2010.

Rolls-Royce M45H. *Jane's Aero-engines*, Aero-engines-Turbofan. Feb. 24, 2010.

Honeywell LF502. *Jane's Aero-engines*, Aero-engines-Turbofan. Feb. 9, 2012.

Notice of Opposition of European Patent No. 3343010 dated Aug. 24, 2021 by Safran Aircraft Engines.

Turbomeca (1970). Astafan IV Brochure. Turbomeca. 64. Bordes, France.

Dent, E., Hirsch, R.A., Peterson, V.W. (1970). Final report for design of aircraft turbine fan drive gear transmission system. NASA Contractor Report NASA CR-72735. Mar. 1970. pp. 1-81.

Notice of Opposition of European Patent No. 3343010 dated Aug. 24, 2021 by Safran Aircraft Engines, [with English translation].

* cited by examiner

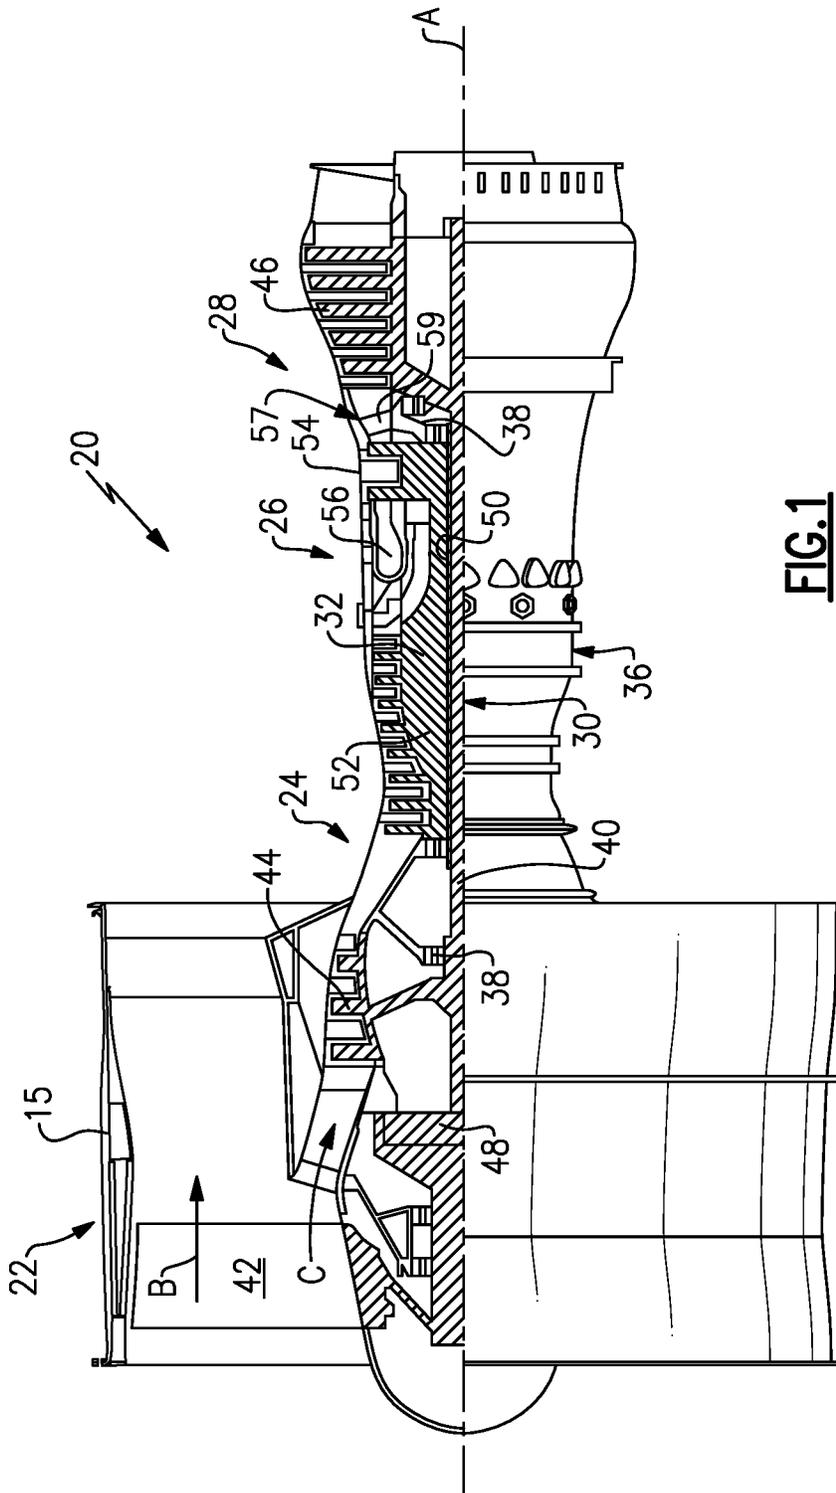


FIG. 1

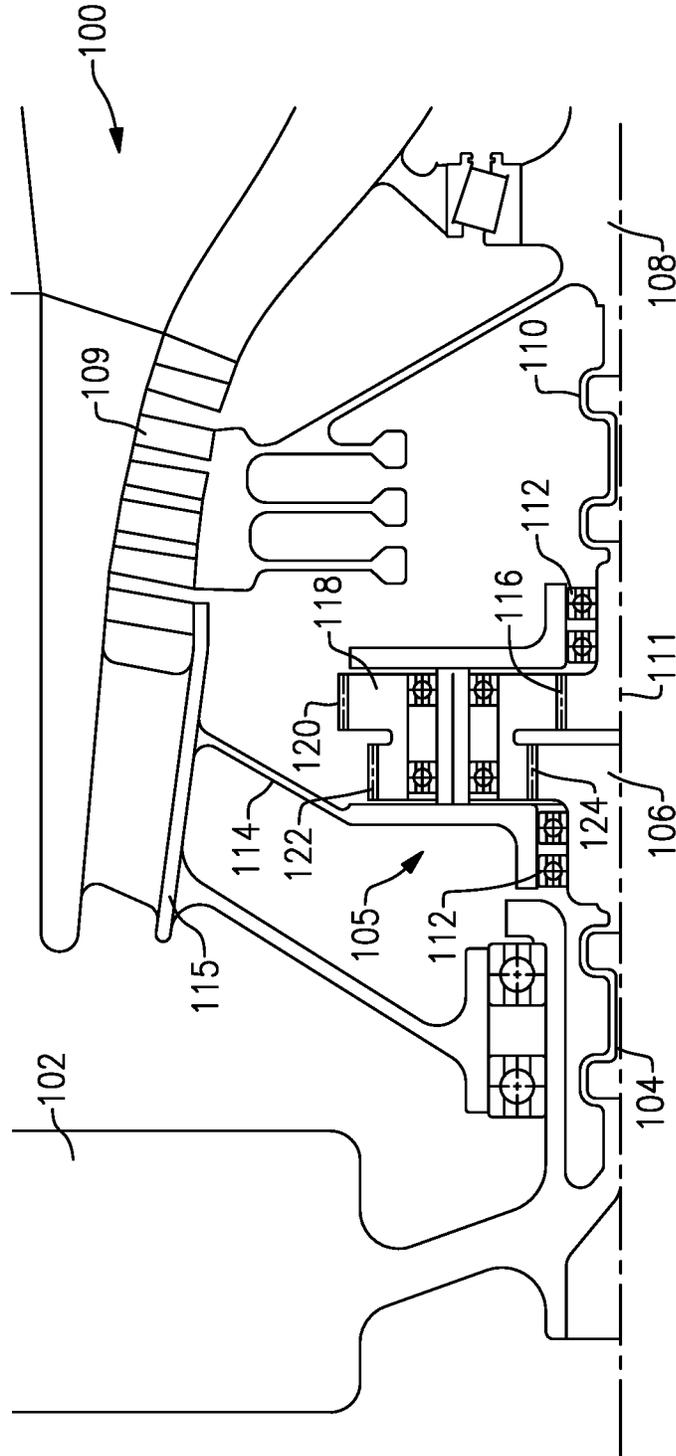


FIG. 2

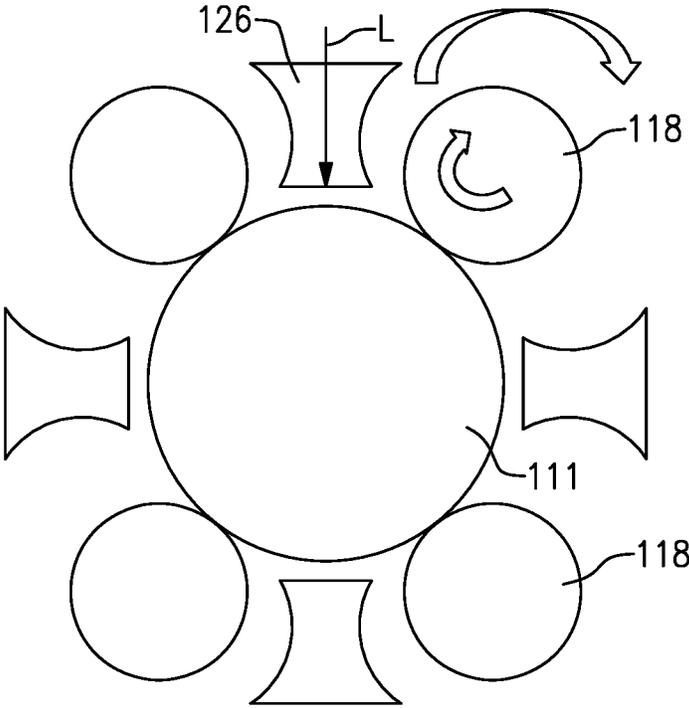


FIG.3

1

GEARED TURBOFAN WITH NON-EPICYCLIC GEAR REDUCTION SYSTEM

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of U.S. patent application Ser. No. 15/396,870 filed on Jan. 3, 2017.

BACKGROUND OF THE INVENTION

This application relates to a geared gas turbine engine wherein a fan rotor is driven through a non-epicyclic gear reduction.

Gas turbine engines are known and typically include a fan delivering air into a bypass duct as propulsion air and further into an engine core including a compressor. The air is compressed and delivered into a combustor where it is mixed with fuel and ignited. Products of this combustion pass downstream over turbine rotors, driving them to rotate.

Historically, a fan drive turbine has driven the fan as a spool and at a single speed. More recently, a gear reduction has been placed between the fan and the fan drive turbine. This allows the fan to rotate at slower speeds, which has beneficial characteristics.

To date, the gear reduction utilized in geared gas turbine engines has been an epicyclic gear system.

SUMMARY OF THE INVENTION

In a featured embodiment, a gas turbine engine comprises a fan drive turbine driving a shaft, the shaft engaging a gear reduction, the gear reduction driving a fan rotor at a speed that is less than the speed of the fan drive turbine, and the gear reduction being a non-epicyclic gear reduction.

In another embodiment according to the previous embodiment, the fan drive turbine drives an input gear of the gear reduction through a flexible input shaft.

In another embodiment according to any of the previous embodiments, an output gear of the gear reduction drives the fan rotor through a flexible output shaft.

In another embodiment according to any of the previous embodiments, the gear reduction is rigidly mounted to a housing in the gas turbine engine.

In another embodiment according to any of the previous embodiments, the input gear drives an intermediate gear to, in turn, drive the output gear.

In another embodiment according to any of the previous embodiments, the intermediate gear has a first set of gear teeth engaging gear teeth on the input gear and a second set of gear teeth engaging gear teeth on the output gear.

In another embodiment according to any of the previous embodiments, there are a plurality of circumferentially spaced intermediate gears.

In another embodiment according to any of the previous embodiments, there are a plurality of oil baffles circumferentially spaced between the circumferentially spaced intermediate gears and for delivering a lubricant to the input gear.

In another embodiment according to any of the previous embodiments, the second set of gear teeth on the intermediate gears are positioned radially outwardly of the gear teeth on the output gear.

In another embodiment according to any of the previous embodiments, the input gear drives an intermediate gear to, in turn, drive an output gear.

2

In another embodiment according to any of the previous embodiments, the intermediate gear has a first set of gear teeth engaging gear teeth on the input gear and a second set of gear teeth engaging gear teeth on the output gear.

5 In another embodiment according to any of the previous embodiments, there are a plurality of circumferentially spaced intermediate gears.

10 In another embodiment according to any of the previous embodiments, there are a plurality of oil baffles circumferentially spaced between the circumferentially spaced intermediate gears and for delivering a lubricant to the input gear.

15 In another embodiment according to any of the previous embodiments, the second set of gear teeth on the intermediate gears are positioned radially outwardly of the gear teeth on the output gear.

In another embodiment according to any of the previous embodiments, an output gear of the gear reduction drives the fan rotor through a flexible output shaft.

20 In another embodiment according to any of the previous embodiments, the gear reduction is rigidly mounted to a housing in the gas turbine engine.

25 In another embodiment according to any of the previous embodiments, the fan drive turbine drives an input gear, the input gear driving an intermediate gear, the intermediate gear driving an output gear to drive the fan rotor.

In another embodiment according to any of the previous embodiments, the intermediate gear has a first set of gear teeth engaging gear teeth on the input gear and a second set of gear teeth engaging gear teeth on the output gear.

30 In another embodiment according to any of the previous embodiments, there are a plurality of circumferentially spaced intermediate gears.

In another embodiment according to any of the previous embodiments, the non-epicyclic gear reduction does not include a ring gear.

These and other features may be best understood from the following drawings and specification.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 schematically shows a gas turbine engine.

FIG. 2 is a detail of a gear reduction and fan drive system.

FIG. 3 shows a further detail of the gear reduction.

DETAILED DESCRIPTION

FIG. 1 schematically illustrates a gas turbine engine 20. The gas turbine engine 20 is disclosed herein as a two-spool turbofan that generally incorporates a fan section 22, a compressor section 24, a combustor section 26 and a turbine section 28. Alternative engines might include an augmentor section (not shown) among other systems or features. The fan section 22 drives air along a bypass flow path B in a bypass duct defined within a nacelle 15, while the compressor section 24 drives air along a core flow path C for compression and communication into the combustor section 26 then expansion through the turbine section 28. Although depicted as a two-spool turbofan gas turbine engine in the disclosed non-limiting embodiment, it should be understood that the concepts described herein are not limited to use with two-spool turbofans as the teachings may be applied to other types of turbine engines including three-spool architectures.

The exemplary engine 20 generally includes a low speed spool 30 and a high speed spool 32 mounted for rotation about an engine central longitudinal axis A relative to an engine static structure 36 via several bearing systems 38. It should be understood that various bearing systems 38 at

various locations may alternatively or additionally be provided, and the location of bearing systems 38 may be varied as appropriate to the application.

The low speed spool 30 generally includes an inner shaft 40 that interconnects a fan 42, a first (or low) pressure compressor 44 and a first (or low) pressure turbine 46. The inner shaft 40 is connected to the fan 42 through a speed change mechanism, which in exemplary gas turbine engine 20 is illustrated as a geared architecture 48 to drive the fan 42 at a lower speed than the low speed spool 30. The high speed spool 32 includes an outer shaft 50 that interconnects a second (or high) pressure compressor 52 and a second (or high) pressure turbine 54. A combustor 56 is arranged in exemplary gas turbine 20 between the high pressure compressor 52 and the high pressure turbine 54. A mid-turbine frame 57 of the engine static structure 36 is arranged generally between the high pressure turbine 54 and the low pressure turbine 46. The mid-turbine frame 57 further supports bearing systems 38 in the turbine section 28. The inner shaft 40 and the outer shaft 50 are concentric and rotate via bearing systems 38 about the engine central longitudinal axis A which is collinear with their longitudinal axes.

The core airflow is compressed by the low pressure compressor 44 then the high pressure compressor 52, mixed and burned with fuel in the combustor 56, then expanded over the high pressure turbine 54 and low pressure turbine 46. The mid-turbine frame 57 includes airfoils 59 which are in the core airflow path C. The turbines 46, 54 rotationally drive the respective low speed spool 30 and high speed spool 32 in response to the expansion. It will be appreciated that each of the positions of the fan section 22, compressor section 24, combustor section 26, turbine section 28, and fan drive gear system 48 may be varied. For example, gear system 48 may be located aft of combustor section 26 or even aft of turbine section 28, and fan section 22 may be positioned forward or aft of the location of gear system 48.

The engine 20 in one example is a high-bypass geared aircraft engine. In a further example, the engine 20 bypass ratio is greater than about six (6), with an example embodiment being greater than about ten (10). In one disclosed embodiment, the engine 20 bypass ratio is greater than about ten (10:1), the fan diameter is significantly larger than that of the low pressure compressor 44, and the low pressure turbine 46 has a pressure ratio that is greater than about five 5:1. Low pressure turbine 46 pressure ratio is pressure measured prior to inlet of low pressure turbine 46 as related to the pressure at the outlet of the low pressure turbine 46 prior to an exhaust nozzle. It should be understood, however, that the above parameters are only exemplary of one embodiment of a geared architecture engine and that the present invention is applicable to other gas turbine engines including direct drive turbofans.

A significant amount of thrust is provided by the bypass flow B due to the high bypass ratio. The fan section 22 of the engine 20 is designed for a particular flight condition—typically cruise at about 0.8 Mach and about 35,000 feet (10, 668 meters). The flight condition of 0.8 Mach and 35,000 ft (10, 668 meters), with the engine at its best fuel consumption—also known as “bucket cruise Thrust Specific Fuel Consumption (“TSFC”)”—is the industry standard parameter of lbf of fuel being burned divided by lbf of thrust the engine produces at that minimum point. “Low fan pressure ratio” is the pressure ratio across the fan blade alone, without a Fan Exit Guide Vane (“FEGV”) system. The low fan pressure ratio as disclosed herein according to one non-limiting embodiment is less than about 1.45. “Low corrected fan tip speed” is the actual fan tip speed in ft/sec divided by

an industry standard temperature correction of $[(T_{\text{am}} / R) / (518.7 / R)]^{0.5}$. The “Low corrected fan tip speed” as disclosed herein according to one non-limiting embodiment is less than about 1150 ft/second (350.5 meters/second).

FIG. 2 shows an engine 100 having a fan rotor 102 driven by a flexible output shaft 104. An output gear 106 drives the flex shaft 104 to, in turn, drive the fan 102. A gear reduction 105 drives the output gear 106 at a slower speed than the input speed from a fan drive turbine drive shaft 108. The drive shaft 108 drives an input gear 111 through a flexible shaft 110. Bearings 112 mount the gears 106 and 111 within a rigid mount 114 to a housing 115. With an epicyclic gear system, the mount to the housing has typically been flexible. The gear reduction 105 allows the use of a rigid mount 114.

The input gear 111 has gear teeth 116 engaging gear teeth 120 on a plurality of intermediate gears 118. Gear teeth 122 on the intermediate gears 118 are spaced from gear teeth 120 and engage gear teeth 124 on the output gear 106 to drive the output gear 106.

Notably, the gear teeth 122 engage gear teeth 124 radially inward of the gear teeth 122.

Thus, the fan drive turbine and its shaft 108 can rotate at a higher speed than the fan rotor 102.

A low pressure compressor 109 is shown rotating at the same speed as shaft 108 and faster than the fan 102 due to the gear reduction 105.

FIG. 3 shows further details wherein oil baffles 126 are circumferentially spaced with the intermediate gears 118 to deliver oil as needed by the gear reduction as shown at L. The use of the oil baffles 118 provides a high mechanical gear efficiency.

In one sense, the gas turbine engine 100 as disclosed includes a gear reduction 105 for driving a fan rotor 102 at a slower speed than a fan drive turbine, wherein the gear reduction is non-epicyclic. The term “non-epicyclic” could be taken to mean a gear reduction which does not include a ring gear.

A “non-epicyclic” gear reduction could also be defined as having at least two or more gears 111/118 as an example, which mesh through a set of gear teeth 120, which rotate about bearings 112 that are mounted in a housing 115 which is fixed in space such that none of the gears 111/118 can orbit about each other. In addition, none of the gears 111/118 in the non-epicyclic gear train are of an annular ring configuration with internal teeth, whereas an annular ring gear can circumscribe any of the two or more gears in the gear train while simultaneously meshing with the gear or gears it circumscribes. The embodiment of the invention described herein is a non-epicyclic configuration.

Although an embodiment of this invention has been disclosed, a worker of ordinary skill in this art would recognize that certain modifications would come within the scope of this invention. For that reason, the following claims should be studied to determine the true scope and content of this invention.

The invention claimed is:

1. A gas turbine engine comprising:

a fan drive turbine driving a shaft, said shaft engaging a gear reduction, said gear reduction driving a fan rotor at a speed that is less than the speed of the fan drive turbine;

wherein the fan rotor comprises a fan shaft, and the fan shaft is coaxial with the fan drive turbine shaft;

said gear reduction being a non-epicyclic gear reduction, and not including a ring gear;

said fan rotor delivering air into a bypass duct defined inwardly of a housing as bypass, and delivering air into

5

a compressor section, a bypass ratio of the volume of air delivered into the bypass duct compared to the volume of air delivered into the compressor section is greater than 10; and

a pressure ratio across said fan drive turbine being greater than 5 to 1, with the pressure ratio defined by a pressure measured prior to an inlet to said fan drive turbine related to a pressure at an outlet of said fan drive turbine prior to any exhaust nozzle.

2. The gas turbine engine as set forth in claim 1, wherein said shaft drives an input gear of said gear reduction through a flexible input shaft.

3. The gas turbine engine as set forth in claim 2, wherein an output gear of said gear reduction drives the fan rotor through a flexible output shaft.

4. The gas turbine engine as set forth in claim 3, wherein said gear reduction is rigidly mounted to a housing in said gas turbine engine.

5. The gas turbine engine as set forth in claim 4, wherein said input gear drives a plurality of circumferentially spaced intermediate gears to, in turn, drive said output gear.

6. The gas turbine engine as set forth in claim 5, wherein said intermediate gears have a first set of gear teeth engaging gear teeth on said input gear and a second set of gear teeth engaging gear teeth on said output gear.

7. The gas turbine engine as set forth in claim 6, wherein there are a plurality of oil baffles circumferentially spaced between said intermediate gears and for delivering a lubricant to said input gear.

8. The gas turbine engine as set forth in claim 7, wherein said second set of gear teeth on said intermediate gears are positioned radially outwardly of said gear teeth on said output gear.

9. The gas turbine engine as set forth in claim 2, wherein said input gear drives a plurality of circumferentially spaced intermediate gears to, in turn, drive said output gear.

10. The gas turbine engine as set forth in claim 9, wherein said intermediate gears have a first set of gear teeth engaging gear teeth on said input gear and a second set of gear teeth engaging gear teeth on said output gear.

11. The gas turbine engine as set forth in claim 10, wherein there are a plurality of oil baffles circumferentially spaced between said circumferentially spaced intermediate gears and for delivering a lubricant to said input gear.

12. The gas turbine engine as set forth in claim 11, wherein an output gear of said gear reduction drives the fan rotor through a flexible output shaft.

13. The gas turbine engine as set forth in claim 1, wherein said gear reduction is rigidly mounted to a housing in said gas turbine engine.

14. A gas turbine engine comprising:

a fan drive turbine driving a shaft, said shaft engaging a gear reduction, said gear reduction driving a fan rotor at a speed that is less than the speed of the fan drive turbine;

wherein the fan rotor comprises a fan shaft, and the fan shaft is coaxial with the fan drive turbine shaft; and said gear reduction being a non-epicyclic gear reduction, and not including a ring gear;

wherein said shaft drives an input gear of said gear reduction through a flexible input shaft;

wherein an output gear of said gear reduction drives the fan rotor through a flexible output shaft.

15. The gas turbine engine as set forth in claim 14, wherein said gear reduction is rigidly mounted to a housing in said gas turbine engine.

6

16. The gas turbine engine as set forth in claim 15, wherein said input gear drives a plurality of circumferentially spaced intermediate gears to, in turn, drive said output gear.

17. The gas turbine engine as set forth in claim 16, wherein said intermediate gears have a first set of gear teeth engaging gear teeth on said input gear and a second set of gear teeth engaging gear teeth on said output gear.

18. The gas turbine engine as set forth in claim 14, wherein there are a plurality of oil baffles circumferentially spaced between said intermediate gears and for delivering a lubricant to said input gear.

19. The gas turbine engine as set forth in claim 18, wherein said intermediate gears have a first set of gear teeth engaging gear teeth on said input gear and a second set of gear teeth engaging gear teeth on said output gear.

20. The gas turbine engine as set forth in claim 14, wherein said fan rotor delivering air into a bypass duct defined inwardly of a housing as bypass, and delivering air into a compressor section, a bypass ratio of the volume of air delivered into the bypass duct compared to the volume of air delivered into the compressor section is greater than 10.

21. The gas turbine engine as set forth in claim 14, wherein a pressure ratio across said fan drive turbine being greater than 5 to 1, with the pressure ratio defined by a pressure measured prior to an inlet to said fan drive turbine related to a pressure at an outlet of said fan drive turbine prior to any exhaust nozzle.

22. A gas turbine engine comprising:

a fan drive turbine driving a shaft, said shaft engaging a gear reduction, said gear reduction having an output gear driving a fan rotor at a speed that is less than the speed of the fan drive turbine, said shaft driving an input gear;

said gear reduction being a non-epicyclic gear reduction, and not including a ring gear;

wherein said input gear drives a plurality of circumferentially spaced intermediate gears to, in turn, drive said output gear; and

wherein there are a plurality of oil baffles circumferentially spaced between said intermediate gears and for delivering a lubricant to said input gear.

23. The gas turbine engine as set forth in claim 22, wherein said fan rotor delivering air into a bypass duct defined inwardly of a housing as bypass, and delivering air into a compressor section, a bypass ratio of the volume of air delivered into the bypass duct compared to the volume of air delivered into the compressor section is greater than 10.

24. The gas turbine engine as set forth in claim 23, wherein a pressure ratio across said fan drive turbine being greater than 5 to 1, with the pressure ratio defined by a pressure measured prior to an inlet to said fan drive turbine related to a pressure at an outlet of said fan drive turbine prior to any exhaust nozzle.

25. The gas turbine engine as set forth in claim 22, wherein said shaft driving a flexible input shaft for driving said input gear.

26. The gas turbine engine as set forth in claim 25, wherein an output gear of said gear reduction drives the fan rotor through a flexible output shaft.

27. The gas turbine engine as set forth in claim 26, wherein said gear reduction is rigidly mounted to a housing in said gas turbine engine.

28. The gas turbine engine as set forth in claim 27, wherein said intermediate gears have a first set of gear teeth engaging gear teeth on said input gear and a second set of gear teeth engaging gear teeth on said output gear.

29. The gas turbine engine as set forth in claim 22, wherein an output gear of said gear reduction drives the fan rotor through a flexible output shaft.

30. The gas turbine engine as set forth in claim 22, wherein said intermediate gears have a first set of gear teeth engaging gear teeth on said input gear and a second set of gear teeth engaging gear teeth on said output gear.

* * * * *