



(51) International Patent Classification:
G06F 9/44 (2006.01)

(21) International Application Number:
PCT/US2016/017160

(22) International Filing Date:
9 February 2016 (09.02.2016)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
62/113,627 9 February 2015 (09.02.2015) US
62/113,623 9 February 2015 (09.02.2015) US
62/277,769 12 January 2016 (12.01.2016) US
62/280,965 20 January 2016 (20.01.2016) US

(71) Applicant: **PHASE CHANGE SOFTWARE LLC**
[US/US]; 651 Corporate Circle, Suite # 209, Golden, Col-
orado 80401 (US).

(72) Inventors: **BUCUVALAS, Steven**; 651 Corporate Circle,
Suite # 209, Golden, Colorado 80401 (US). **SELKER,**
Kevin; 2336 Goss St., Boulder, Colorado 80302 (US).

(74) Agent: **VICK, Jason H.**; Sheridan Ross, PC, 1560 Broad-
way, Suite 1200, Denver, Colorado 80202 (US).

(81) Designated States (*unless otherwise indicated, for every
kind of national protection available*): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG,
MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM,
PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC,
SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every
kind of regional protection available*): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ,
TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU,
TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE,
DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU,
LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK,
SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ,
GW, KM, ML, MR, NE, SN, TD, TG).

Published:

- *with international search report (Art. 21(3))*
- *before the expiration of the time limit for amending the
claims and to be republished in the event of receipt of
amendments (Rule 48.2(h))*

(54) Title: MACHINE-BASED INSTRUCTION EDITING

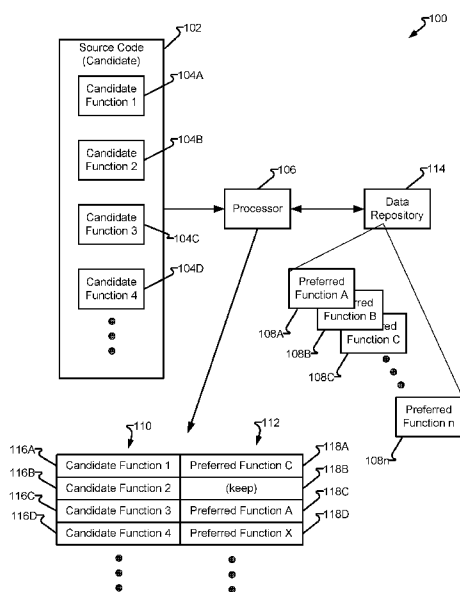


FIG. 1

(57) Abstract: Computer software development has produced many ad-
vances within computer science and in most aspects of modern society. Even
with modern quality control, bug finding, and other code checking applica-
tions, computer software is often less than ideal. A developer may write code
that is functionally accurate but lacks security, documentation, speed, stor-
age, reusability, or other element that may make a segment of software code
less than ideal. Identifying equivalent code and, when found, replacing it
with a vetted equivalent promotes the deployment of software that is more
robust, secure, usable and reusable, and/or satisfies performance or other ob-
jectives.

MACHINE-BASED INSTRUCTION EDITING

CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] The present application claims the benefit of U.S. Provisional Patent Application No. 62/113,623, filed February 9, 2015, entitled "Introduction: Jumping the Tar Pit"; U.S. Provisional Patent Application No. 62/113,627, filed February 9, 2015, entitled, "Software Engineering, Software-As-Data: At Ground Zero"; U.S. Provisional Patent Application No. 62/277,769, filed January 12, 2016, entitled "The Phase Change Thesis"; and U.S. Provisional Patent Application No. 62/280,965, filed January 20, 2016, entitled "Software as Data, Software as Database, Software as Programming AI, Software as Modeling AI," each of which is incorporated herein by reference in their entirety.

FIELD OF THE DISCLOSURE

[0002] The present disclosure is generally directed toward machine-based pattern recognition and selective editing.

BACKGROUND

[0003] Programmable machines continue to progress as software and software writing tools advance. However, programmers may still write software that has already been written due to the time requirements associated with finding and reviewing existing software, personal preference, lack of knowledge of the presence of existing software, or other reasons. As a result, software often includes code portions that may be less than ideal, even if functionally equivalent. Previous solutions include "Software Equivalence Checking," U.S. Patent Publication 2011/0138362, incorporated herein by reference.

[0004] Compilers and interpreters convert human-readable source code into machine-readable code (e.g., object code, executable code, etc.) for execution. Compilers can negate the effects of many coding issues, but not all and not always completely. For example, a piece of software code comprising the traversal of each element of array may have different performance characteristics if the coder traverses the array by row elements and then incrementing the column, or by column elements and then incrementing the row. Object code, such as an assembler, may store values differently and require more processing steps using one technique versus another, even though the end result is the same. Similarly, the

choice of a particular sorting methodology may have a significant impact on performance based on the data being sorted. For example, a bubble sort is efficient when sorting a relatively small number of elements or a large number of elements that have only a few elements that are not in sort-order. However, bubble sort is likely to be a poor choice for most other applications.

[0005] Even if two sets of software each produce the same result, not all software has the same effect, such as within an application or within a software management system. Software may have inefficiencies or other undesirable issues. As a result, computers or other machines executing software may operate in a less than ideal capacity.

SUMMARY

[0006] Certain embodiments disclosed may utilize SMT solvers and may be more readily understood with the benefit of "Decision Procedures, An Algorithmic Point of View," Kroening and Strichman, 2008, ISBN: 978-3-540-74104-6, which is incorporated herein by reference in its entirety and for all that it teaches.

[0007] Software or "code" refers to instructions written by a human for use by a machine, such as a microprocessor (or, more commonly, "processor"), once the code is put into a machine-readable form. Software has many attributes beyond the functionality for which it was written or the result it produces. For example, software requires space, requires machine cycles, is read by humans who may or may not have written the software, may have security vulnerabilities, may require updating, may require porting to a different platform, and/or other aspects. Often an ideal or preferred function, which has previously been reviewed, vetted, and identified as preferred, is available. As a general introduction and in one embodiment, a machine-based instruction is provided to automatically identify a candidate function source code, determine whether the candidate function is functionally equivalent (e.g., produces the same result) to a preferred function source code that was previously vetted and identified as an authorized source code and, if equivalent, transform the candidate source code into a preferred source code by substituting the preferred function for the candidate function and saving or otherwise making the transformed source code available for future access and/or processing.

[0008] A "function" as used herein, includes software functions, subroutines, procedures, (machine executable) methods, predicate, sequences of instructions or rules within a larger computer program, a relation that associates an input to a single output according to a rule. The single output may comprise a primitive data type or a more complex data type such as a composite or abstract data type.

[0009] In one embodiment, two portions of source code are considered: a candidate function and a preferred function. As will be discussed in more detail herein, the determination is made that the candidate function and the preferred function produce identical results. For example, over all inputs provided, the output from the candidate function and the preferred function is equivalent. In another embodiment, a logic equation is determined for the candidate function and the preferred function and then provided to an automated theorem prover, such as a Satisfiability Modulo Theories ("SMT") solver, operable to determine equivalence of the functions over a finite set of inputs. However, differences may still exist. The candidate function may have been vetted for one or more factors, such as storage efficiency, execution performance, readability, maintainability, security, and/or other functionally agnostic differences. In one embodiment, the difference comprises the programming language. In another embodiment, the difference comprises compactness of code. For example, " $C=2A+2B$ " may be preferred over " $C=A+A+B+B$ " and " $C=2*(A+B)$ " may be preferred over " $C=2A+2B$." In another embodiment, the difference comprises readability. For example, " $\text{RectanglePerimeter}=2(\text{sideA} + \text{sideB})$ " may be preferred over " $X=2A+2B$." In another embodiment, the difference may comprise resource efficiency. For example, it may be more efficient to access the entirety of a record from a remote database and hold the record in memory, even if not all fields within the record will be needed, versus accessing the remote database repeatedly to retrieve only the needed fields. The foregoing provides an introduction to functionally agnostic differences that may exist between a candidate function and a preferred function and is not meant to be an exhaustive list.

[0010] In another embodiment, the candidate function is different from the preferred function; however, the difference is confined to members (e.g., inputs and/or outputs) within the same equivalence class. For example, one equivalence class may be the binary value pairs (e.g., $\{(1,0), (\text{TRUE}, \text{FALSE}), (\text{ON}, \text{OFF})\}$) or numeric equivalents (e.g., $\{".1", "0.1", "0.1000"\}$).

[0011] If the candidate function and the preferred function, given the same input(s), produce different outputs, but the different outputs are each within the same equivalence class, then the preferred function and the candidate function may be determined to be functionally equivalent. For example, if the same inputs are provided to the preferred and candidate functions and the preferred function outputs "TRUE" and the candidate function produces "1" (of a binary data type) then functional equivalence may be provided, even with non-identical outputs. Alternatively, if given the same input, the preferred function produces "ON" and the candidate function produces "0," then equivalence has been disproven.

[0012] With respect to certain embodiments disclosed herein, the problems created by prior art computer systems and software development may be mitigated. Computer programming industry has been able to ignore many issues related to finite processing, bandwidth, and storage capabilities. Hardware has become ever cheaper and smaller. The investment required to make adequate software code, code that performs the function for which it was developed, into efficient code is often solved with hardware. Improving the software, beyond its functionality, has been largely abandoned in favor of developing adequate functionality and, once done, moving on to other tasks – a tradeoff readily accepted by prior art development practices.

[0013] In the early days of programming, succinct programming was an artifact of the language. Languages like Assembly left little opportunity to do more than what was essential to the processor to provide the required functionality. Today, there are many functional and object-oriented languages that allow ample opportunity for programmers to embellish their programming and documentation. However, if the program performs its functional task, it is rare that anything more is provided.

[0014] Providing software that merely performs a required function is no longer enough. Certain computer implementations remain highly sensitive to code storage requirements, processing time, and power requirements. While desktop and other fixed-location computer systems often solve any processing or storage constraint with additional hardware, mobile computing remains particularly sensitive to storage, processing, and power requirements. Even a very modest improvement in any one of storage, processing, and power may represent an epic breakthrough, whereby a previously impractical device is now a viable product. Additionally, factors such as reusability are always touted, but as a practical matter are rarely

deployed and when they are, require a significant investment by a human programmer to ensure functional equivalence. However, with benefit of the disclosure provided herein, the computing sciences may benefit from machine-provided editing of software to provide more robust, secure, and reusable code.

[0015] As a further benefit of the embodiments disclosed herein, testing and verification can be reduced or even eliminated as functional equivalence is guaranteed. A significant portion of any software development project utilizing the prior art involves confirmation that the functional objectives are satisfied by the program. However, with benefit of the disclosure herein, once a function is approved, any functionally equivalent subsequent code encountered may be replaced with the approved code and functional equivalence is guaranteed without the need to perform subsequent testing on the approved code.

[0016] The phrases "at least one," "one or more," and "and/or" are open-ended expressions that are both conjunctive and disjunctive in operation. For example, each of the expressions "at least one of A, B and C," "at least one of A, B, or C," "one or more of A, B, and C," "one or more of A, B, or C," and "A, B, and/or C" means A alone, B alone, C alone, A and B together, A and C together, B and C together, or A, B and C together.

[0017] The term "a" or "an" entity refers to one or more of that entity. As such, the terms "a" (or "an"), "one or more," and "at least one" can be used interchangeably herein. It is also to be noted that the terms "comprising," "including," and "having" can be used interchangeably.

[0018] The term "automatic" and variations thereof, as used herein, refers to any process or operation done without material human input when the process or operation is performed. However, a process or operation can be automatic, even though performance of the process or operation uses material or immaterial human input, if the input is received before performance of the process or operation. Human input is deemed to be material if such input influences how the process or operation will be performed. Human input that consents to the performance of the process or operation is not deemed to be "material."

[0019] The term "computer-readable medium," as used herein, refers to any tangible storage that participates in providing instructions to a processor for execution. Such a medium may take many forms, including, but not limited to, non-volatile media, volatile media, and transmission media. Non-volatile media includes, for example, NVRAM, or magnetic or optical disks. Volatile media includes dynamic memory, such as main memory. Common

forms of computer-readable media include, for example, a floppy disk, a flexible disk, hard disk, magnetic tape, or any other magnetic medium, magneto-optical medium, a CD-ROM, any other optical medium, punch cards, paper tape, any other physical medium with patterns of holes, a RAM, a PROM, an EPROM, a FLASH-EPROM, a solid-state medium like a memory card, any other memory chip or cartridge, or any other medium from which a computer can read. When the computer-readable media is configured as a database, it is to be understood that the database may be any type of database, such as relational, hierarchical, object-oriented, and/or the like. Accordingly, the disclosure is considered to include a tangible storage medium and prior art-recognized equivalents and successor media, in which the software implementations of the present disclosure are stored.

[0020] While machine-executable instructions may be stored and executed locally to a particular machine (e.g., personal computer, mobile computing device, laptop, etc.), it should be appreciated that the storage of data and/or instructions and/or the execution of at least a portion of the instructions may be provided via connectivity to a remote data storage and/or processing device or collection of devices, commonly known as "the cloud," but may include a public, private, dedicated, shared and/or other service bureau, computing service, and/or "server farm."

[0021] The terms "determine," "calculate," and "compute," and variations thereof, as used herein, are used interchangeably and include any type of methodology, process, mathematical operation, or technique.

[0022] The term "module," as used herein, refers to any known or later-developed hardware, software, firmware, artificial intelligence, fuzzy logic, or combination of hardware and software that is capable of performing the functionality associated with that element. Also, while the disclosure is described in terms of exemplary embodiments, it should be appreciated that other aspects of the disclosure can be separately claimed.

[0023] The term "human-readable" as applied to source code, code, software, or equivalents, as used herein, refers to computer instructions utilizing a human-readable format that, without interpreting or compiling, is unable to be read by a machine for the purposes of execution of the instructions. Source code may comprise symbolic representations, such as named variables, functions (e.g., float payment (int principle, float interest)) which may comprise spoken language representations (e.g., "if," "return," "get," "fetch," etc.) and spoken language

character representations (e.g., "=", ".", "(", ")"), etc.), which may be known as "reserved words." The programming language utilized to embody the human-readable source code may have specific rules as to what is and is not a reserved word or equivalent symbol. Generally, source code is the human output of a developed programming instruction and commonly known by the source code language (e.g., Python, C, C++, FORTRAN, BASIC, etc.).

[0024] The term "machine-readable" as applied to machine code, code, software, or equivalents, as used herein, refers to human-readable code that has been processed via a compiler or interpreter to comprise a machine-readable and executable form of the human-readable source code. In one embodiment, machine-readable code is Assembler. In another embodiment, machine-readable code is machine code (e.g., binary). The machine-readable code may utilize standardized identifier naming translation of symbolic representations of human-readable source code (e.g., "principle" and "interest" become "\$01" and "\$02", "sales" and "tax" become "\$03" and "\$04", etc.) such as to completely or partially remove differences between similar functionality provided by different source code languages and may also become more hardware platform (e.g., Intel x86, Motorola 8000x, CISC, RISC, etc.) specific to accommodate the instruction set for processors or processor families. Machine-readable code may not require further processing to be readable by a machine, such as a microprocessor, but may require additional processing (e.g., linking) to be executable by the machine. While a skilled programmer may be able to "read" machine-code, such a form of the software omits language-based symbols, such machine-code is considered to be outside of the realm of human-readable.

[0025] The term "data repository," as used herein, is any one or more of a device, media, component, portion of a component, collection of components, and/or other structure capable of storing data accessible to a processor. Examples of data repositories contemplated herein include, but are not limited to, processor registers, on-chip storage, on-board storage, hard drives, solid state devices, fix media devices, removable media devices, logically attached storage, networked storage, distributed local and/or remote storage (e.g., server farms, "cloud" storage, etc.), media (e.g., solid state, optical, magnetic, etc.), and/or combinations thereof. The data repository is accessible to at least one processor but may be logically and/or physically detached from the processor during times when no processor has a present need for access. The data repository may be directly accessible or via one or more intervening components, including but not limited to, a cache and/or buffer. In certain embodiments, the

data repository may be organized into a database, file, record, or other logical storage structure and/or portion or collection thereof.

BRIEF DESCRIPTION OF THE DRAWINGS

[0026] The present disclosure is described in conjunction with the appended figures:

[0027] Fig. 1 depicts a first system in accordance with embodiments of the present disclosure;

[0028] Fig. 2 depicts a second system in accordance with embodiments of the present disclosure;

[0029] Fig. 3 depicts a third system in accordance with embodiments of the present disclosure;

[0030] Fig. 4 depicts a fourth system in accordance with embodiments of the present disclosure;

[0031] Fig. 5 depicts a process in accordance with embodiments of the present disclosure;

[0032] Fig. 6 depicts a fifth system in accordance with embodiments of the present disclosure; and

[0033] Figs. 7-73 depict a solution in accordance with embodiments of the present disclosure.

DETAILED DESCRIPTION

[0034] The ensuing description provides embodiments only and is not intended to limit the scope, applicability, or configuration of the claims. Rather, the ensuing description will provide those skilled in the art with an enabling description for implementing the embodiments. It will be understood that various changes may be made in the function and arrangement of elements without departing from the spirit and scope of the appended claims.

[0035] Any reference in the description comprising an element number, without a subelement identifier when a subelement identifier exists in the figures, when used in the plural, is intended to reference any two or more elements with a like element number. When such a reference is made in the singular form, it is intended to reference one of the elements with the like element number without limitation to a specific one of the elements. Any explicit usage

herein to the contrary or providing further qualification or identification shall take precedence.

[0036] The exemplary systems and methods of this disclosure will also be described in relation to analysis software, modules, and associated analysis hardware. However, to avoid unnecessarily obscuring the present disclosure, the following description omits well-known structures, components, and devices that may be shown in block diagram form and are well known or are otherwise summarized.

[0037] For purposes of explanation, numerous details are set forth in order to provide a thorough understanding of the present disclosure. It should be appreciated, however, that the present disclosure may be practiced in a variety of ways beyond the specific details set forth herein.

[0038] Fig. 1 depicts system 100 in accordance with embodiments of the present disclosure. System 100 comprises processor 106 accessing source code 102 having therein candidate functions 104A-104D. In one embodiment, at least one of candidate functions 104 comprises a function receiving at least one input to produce at least one output. In another embodiment, at least one of the input and the output may be a function parameter, input from a human input device, memory address, register, port, or other data source. In another embodiment, the output may be a function output, written to an address, presented on an output device, written to a memory address or register, output on a port, and/or any other input and/or output means known in the electronic computing arts.

[0039] In one embodiment, source code 102 may comprise candidate functions 104 as written by a programmer, such as by using an integrated development environment or other software authoring tool. Source code 102 is illustrated with a plurality of functions 104 in one embodiment. In another embodiment, source code 102 may comprise a single function 104, such as 104A.

[0040] Processor 106 accesses a source code 102 and functions 104 and compares ones of candidate function 104 to ones of preferred functions 108A-108n maintained in data repository 114. Processor 106 may then identify ones of candidate functions 104 to be replaced by ones of preferred functions 108 and processor 106 may then create records, such as those comprising function identifiers 110 associated with indicia 112 to provide an association between ones of candidate function identifiers 116A-116D and ones of

replacement indicia 118A-118-D. For example, function identifier 116A ("Candidate Function 1") identifying a particular function, Candidate Function 1 (104A), is associated with function indicia 118A indicating replacement by preferred function 108C (identified as "Preferred Function C"). In another embodiment, replacement indicia 118B associated with function identifier 116B may indicate associated function Candidate Function 2 (104B) is to be maintained. For example, Candidate Function 2 (104B) may not have a counterpart or an identifiable counterpart within data repository 114 or otherwise not functionally equivalent to any one of preferred functions 108. In another embodiment, a recommendation or teaching may be implemented in addition or alternatively to performing the replacement. For example, a message may be presented to a programmer to indicate a function wrote by the programmer (e.g., "Candidate Function 1") may be improved, and optionally present the improvement criterion, to be more like another function (e.g., "Preferred Function C").

[0041] Indicia 112 is illustrated as comprising human-readable English data entries as one embodiment selected, in part, for descriptive clarity. Other embodiments contemplated herein include a data value, such as an entry in a data element (e.g., binary, enumerated data type, data structure, etc.) and/or presence of a data element (e.g., flag/no flag, record/no record, object/no object, etc.) maintained in a volatile memory, non-volatile memory, media, data repository 114, other data repository, media, and/or other data storing component, collection of components, or portions thereof and may be implemented in the embodiments disclosed herein without departing from the scope of the disclosure.

[0042] Fig. 2 depicts system 200 in accordance with embodiments of the present disclosure. In one embodiment, Fig. 2 illustrates system 200 transforming source code 102 (see Fig. 1) to preferred source code 202 via utilization of function indicia 112. Processor 106 accesses function indicia 112 comprising entries 118 and associated with respective function identifiers 110 comprising entries 116. Processor 106 then accesses source code 102 to produce preferred source code 202, a functionally equivalent source code to source code 102 albeit with substitutions provided wherein at least one candidate function 104 is replaced with a functionally equivalent preferred function 108. Processor 106 accesses preferred functions 108 indicated in function indicia 112 from data repository 114 and provides automatic substitution to produce preferred source code 202.

[0043] In one embodiment, Candidate Function 1 (104A) is replaced by Preferred Function C (108C), Candidate Function 2 (104B) is maintained, Candidate Function 3 (104C) is replaced by Preferred Function A (108A), and Candidate Function 4 (104D) is replaced by Preferred Function X (108X). Preferred source code 202 may then be saved and identified as preferred source code and further provided for additional development, compiling or interpreting, linking, execution, and/or saving to be accessible at a future time.

[0044] Fig. 3 depicts system 300 in accordance with embodiments of the present disclosure. In one embodiment, system 300 illustrates source code 102 transforming into preferred source code 202 wherein the indicia of functional equivalence is maintained solely by processor 106 allowing for processor 106 to directly output preferred source code 202. For example, processor 106 may access source code 102 and determine Candidate Functions 1 (104A), 3 (104C), 4 (104D) are to be replaced by Preferred Functions 108 (see Fig. 1) maintained by data repository 114. As a result, processor 106 may directly output preferred source code 202 comprising Preferred Function C (108C), maintaining Candidate Function 2 (104B), Preferred Function A (108A), and Preferred Function X (108X).

[0045] Fig. 4 depicts system 400 in accordance with embodiments of the present disclosure. In one embodiment, the determination of whether two functions are equivalent, for example Candidate Function 1 (104A) is functionally equivalent to Preferred Function C (108C), is via the application of a logic. The logic is variously embodied. In one embodiment, the logic comprises a first-order logic, in another embodiment, the logic equation comprises a second-order logic. In one embodiment, a single candidate function 402 is considered to determine equivalence to a single preferred function 404. In other embodiments, candidate function 402 may comprise a plurality of functions, such as a plurality of candidate functions 104 and/or preferred function 404 may comprise a plurality of functions, such as a plurality of preferred functions 108. While a logic equation may demonstrate equivalence with identical values, for example, "A or B" is identical, and therefore equivalent to "A or B." However, non-identical but functionally equivalent representations may also indicate equivalence, for example, "A or B" is non-identical, but functionally equivalent to "B or A." Additionally, symbolic representations may be utilized to represent at least a portion of an equation, for example, "A or B" is non-identical, but functionally equivalent to "A or (X and Y nor Z)," when "B" represents "X and Y nor Z."

[0046] In another embodiment, functional equivalence is determined by non-equivalence with all but one member of an enumerated set, for which candidate function 402 is a known member. For example, candidate function 402 may be known to perform a basic mathematical function, one of addition, subtraction, multiplication, and division. Preferred function 404 may be determined to be functional equivalent to candidate function 402 when, preferred function 404 is a member of the set of four basic mathematical functions and non-equivalence is determined for three other functions, thereby leaving preferred function 404 as the only function for which non-equivalence is determined and, therefore, functionally equivalent.

[0047] Candidate function 402 has an input/output signature parsed via parse function I/O 406. Similarly, preferred function 404 has an input/output signature parsed via parse function I/O 408. Table 1 provides one example of candidate function 402:

```
int sum_mod (int x, int y) {
    if (y == 0) {
        throw domain_error ("Modulus cannot be 0.");
    }
    if (y<0) {
        int pos_y = -y;
        return sum_mod(x, pos_y);
    }
    if (x<0) {
        while (x<0) {
            x += y;
        }
        return x;
    }
    while (x>=0) {
        x -= y;
    }
    return (x+y)
}
```

TABLE 1

[0048] Table 2 provides one example function of preferred function 404:

```
int div_mod (int x, int y) {
    if (y==0) {
        throw domain_error ("Modulus cannot be 0.");
    }
    int div = x/y;
    int rem = x - (div*y);
    return rem;
}
```

TABLE 2

[0049] In one embodiment, preferred function 404 has been vetted and identified as preferred, such as due to conciseness of the human-readable code therein. Conciseness may be provided by an abstract syntactic structure, such as an Abstract Syntax Tree (AST). For example, few nodes, fewer leaf nodes, depth of nodes, width of nodes, may provide a conciseness metric. Functional equivalence service 410 then determines whether the equivalence is true. In one embodiment, functional equivalence service derives first-order logic 412 for parsed candidate function 402 and first-order logic 414 for parsed preferred function 404 to derive a first-order logic, which, in one embodiment, comprises SMT query 416.

[0050] Table 3 illustrates one example of a function decomposed into logic, inputs, and outputs.

f1-sum_mod:
[...f1 Logic ...]

Inputs:
[f1(x), f1(y)]

Outputs:
[f1(retVal)]

TABLE 3

[0051] Table 4 illustrates another example of a function decomposed into logic, inputs, and outputs.

f2-div_mod:
[...f2 Logic ...]

Inputs:
[f2(x), f2(y)]

Outputs:
[f2(retVal)]

TABLE 4

[0052] Table 5 illustrates one example of an SMT query.

$$(f1 \text{ Logic}) \wedge (f2 \text{ Logic}) \wedge (f1(x)=f2(x)) \wedge (f1(y)=f2(y)) \wedge \neg (f1(\text{retVal})=f2(\text{retVal}))$$

TABLE 5

[0053] In another embodiment, SMT query 416 is provided to SMT solver 420 to produce an output indicating satisfied ("SAT") non-equivalence result or NO result 422 or unsatisfiable ("UNSAT") equivalence result or YES result 424.

[0054] Fig. 5 depicts process 500 in accordance with embodiments of the present disclosure. In one embodiment, process 500 is executed, such as by processor 106. Process 500 may begin with one or both of steps 502, 504, wherein step 502 accesses a candidate function, such as from a candidate source code 102, which may comprise a plurality of functions 104. Step 504 accesses a preferred function, such as comprising one or more preferred functions 108 within preferred source code 202.

[0055] Next, step 506 determines if the functions are functionally equivalent (e.g., produce the same results when given the same inputs) and, if yes, process 500 continues to optional step 508 to provide indicia of the replacement or, if step 508 is not implemented, to provide the indicia externally to process 500. Otherwise processing continues to step 510. Step 510 replaces candidate function 502 with preferred function 504. If step 506 is determined in the

negative, then no substitution is required and process 500 may end. Optionally, following step 510 the source code comprising the, now replaced, preferred function 504 may be saved to a media or otherwise maintained for additional or future processing and/or reference.

[0056] As provided herein, preferred source code, such as comprising one or more preferred functions 108, may be provided by automatically replacing a functionally equivalent, but not preferred, candidate source code, such as comprising one or more candidate functions 104. The preferred source code may be determined to be preferred based upon a prior vetting wherein the preferred source code becomes authorized for use. The preferred source code may be determined to be preferred due to storage requirements of the human-readable form and/or machine-readable form, performance metric, security, presences of internal documentation, presences of a particular volume of internal documentation, use of verbose variable names, conciseness of instructions, error handling, and/or other attribute. In another embodiment, the source code is preferred due to a prior vetting. In a further embodiment, the candidate source code has not been subject to a prior vetting. In a still further embodiment, the preferred source code has been vetted by a higher authority as compared to the candidate source code, which may have been vetted by a lower authority, such as the developer of the candidate source code. In yet another embodiment, the determination of a preferred source code may be determined in accord with a criterion, for example, any one or more of fewer lines of code, fewer procedural calls, more comments, longer variable names, etc.

[0057] Fig. 6 depicts system 600 in accordance with embodiments of the present disclosure. System 600 depicts processor 106 accessing candidate source code 102 comprising candidate function 602. In one embodiment, processor 106 determines that candidate function 602 is functionally equivalent to at least one preferred function 606A-606n maintained in data repository 114.

[0058] In one embodiment, processor 106 transforms candidate source code into one of preferred source codes 604A-606E. In another embodiment, processor 106 transforms candidate source code into two or more of preferred source codes 604A-604E. Processor 106 transforms source code 102 into one or more of preferred source codes 604A-604E to output source code, such as a source code file, satisfying at least one preferred aspect. The preferred source code may result in a more optimal operation of a machine or component of a machine, such as by performing fewer operations, faster operations, less storage requirements,

performing an operation with fewer resource demands, utilizing less expensive (e.g., power, response, etc.) resource, performing more secure operations, etc. The preferred aspect is variously embodied and includes, but is not limited to, security, CPU efficiency, bandwidth efficiency, storage requirement, conciseness of code, database accesses, or a combination of two or more.

[0059] In one embodiment, processor 106 determines that candidate function 602 is functionally equivalent to the preferred function 606A, which has been identified as being preferred in terms of CPU usage (e.g., clock cycles, operations, etc.) Accordingly, processor 106 transforms source code 102 into preferred source code 604A, comprising preferred function 606A in place of candidate function 602. As a result source code 102 is transformed into source code 604A.

[0060] In another embodiment, processor 106 determines that candidate function 602 is functionally equivalent to the preferred function 606B, which has been identified as being preferred in terms of security. For example, function 606B may utilize a previously approved communication encryption protocol, approved communication port, approved error-handling routine, etc.

[0061] In another embodiment, processor 106 determines that candidate function 602 is functionally equivalent to the preferred function 606C, which has been identified as being preferred in terms of conciseness of code. For example, function 606C may utilize human-readable source code that has been determined to be more concise, such as to promote readability and optionally machine efficiency. For example, it may be preferred to utilize source code that uses fewer operators, such as "X++" over "X = X+1."

[0062] In another embodiment, processor 106 determines that candidate function 602 is functionally equivalent to the preferred function 606D, which has been identified as being preferred in terms of storage. Even with modern data storage technology, data storage may still be an issue, particularly with embedded systems and mobile technology where chip and board "footprint" are more critical. For example, function 606D may utilize source code that requires less storage space, such as "i=r*b" may be preferred over the more verbose "interest= rate * balance."

[0063] In another embodiment, processor 106 determines that candidate function 602 is functionally equivalent to the preferred function 606E, which has been identified as being

preferred in terms of both security and bandwidth. For example, preferred function 606E may utilize fewer network-dependent operations and a preferred port and/or security protocol.

[0064] Figs. 7-74 depict a solution in accordance with embodiments of the present disclosure.

[0065] Exemplary aspects can be directed to any one or more of the following:

A method, comprising: retrieving, by a processor from a data repository, a candidate source code, having a candidate function, and comprising a first human-readable machine instruction; accessing, by the processor from a data repository, a preferred function comprising a second human-readable machine instruction and has been previously identified as an authorized source code; automatically determining, by the processor, equivalence between the candidate function and the preferred function; upon equivalence being determined, automatically providing, by the processor, indicia of equivalence associated with the candidate function and the preferred function; upon the indicia being provided, automatically transforming, by the processor, the candidate source code comprising replacing the candidate function with the preferred function; and outputting the transformed candidate source code.

Any one or more of the above aspects wherein the step of providing the indicia comprises the steps of transforming and outputting.

Any one or more of the above aspects wherein the preferred function comprises human-readable elements not associated with the second human-readable machine instruction.

Any one or more of the above aspects wherein the step of determining equivalence fails upon determining that a number of input/output parameters differ between the candidate function and the preferred function.

Any one or more of the above aspects wherein the step of determining equivalence fails upon:

determining at least one input/output parameters differs between the candidate function and the preferred function; and wherein the difference comprises a difference of equivalence classes.

Any one or more of the above aspects further comprising,

providing a first machine-readable translation of the candidate function;

providing a second machine-readable translation of the preferred function;

executing both the first machine-readable translation and the second machine-readable translation with ones of a finite set of inputs; and

determining equivalence upon the step of executing both the first machine-readable translation and the second machine-readable translation each outputting equivalent values from each of the first machine-readable translation and the second machine-readable translation of the candidate function.

Any one or more of the above aspects wherein the step of determining equivalence further comprises:

deriving a logic equation for the candidate function;

accessing a logic equation for the preferred function; and

wherein equivalence is failed to be determined upon the logic equation for the candidate function being determined to be different from the logic equation for the preferred function.

Wherein the determination of whether the logic equation of the candidate function is determined to be equivalent to the logic equation of the preferred function further comprises:

providing the logic equation for the candidate function and the logic equation for the preferred function to an automated theorem prover; and

receiving indicia from the automated theorem prover indicating equivalence.

Any one or more of the above aspects wherein the preferred function comprises a set of instructions, that when converted to machine code, cause a machine to perform the preferred function in a previously identified optimal manner.

Any one or more of the above aspects wherein the previously identified optimal manner comprises an identified manner compliant with at least one security objective.

Any one or more of the above aspects wherein the machine comprises a processor and the previously identified optimal manner comprises an identified number of processor operations.

Any one or more of the above aspects wherein the machine comprises a memory and the previously identified optimal manner comprises an identified size of the memory required to store the machine code.

Any one or more of the above aspects wherein the preferred function comprises a set of instructions previously identified as a concise source code.

Any one or more of the above aspects wherein the step of determining equivalence further comprises:
generating, from the candidate function, a set of equivalence classes for the candidate function, the equivalence classes comprising a set of equivalent functions, each element of the set having a function-to-source mapping.

Any one or more of the above aspects wherein the preferred function comprises a most-concise member selected in accordance with an abstract syntax tree (AST) determination of equivalence between the candidate function and the preferred function.

A system comprising:

- a data repository;

- a processor; and

- wherein the processor:

- retrieve a candidate source code from the data repository, having a candidate function, and comprising a first human-readable machine instruction;

- accesses from a data repository a preferred function, wherein the preferred function comprises second human-readable machine instructions and has been previously identified as an authorized source code;

- automatically determines, equivalence between the candidate function and the preferred function;

- upon determining equivalence, automatically provides indicia of equivalence associated with the candidate function and the preferred function;

- upon the indicia being provided, automatically transforms the candidate source code comprising replacing the candidate function with the preferred function; and

- outputs the transformed candidate source code.

Any one or more of the above aspects wherein the processor provides the indicia comprising replacing the candidate function with the preferred function in the candidate source code and saving the result as a preferred source code.

Any one or more of the above aspects wherein the processor fails to determine equivalence upon at least one of (a) determining that a number of input/output parameters differ between the candidate function and the preferred function and (b) determining at least one input/output parameter differs between the candidate function and the preferred function and wherein the difference comprises a difference of equivalence classes.

A system for automatically editing an instruction, comprising:

means for retrieving a candidate source code from a data repository, having a function, and comprising a first human-readable machine instruction;

means for accessing a preferred function from a data repository comprising a second human-readable machine instruction, wherein the second human-readable machine instructions and has been previously identified as an authorized source code;

means for automatically determining equivalence between the candidate function and the preferred function;

means for, upon equivalence being determined, automatically providing, by the processor, indicia of equivalence associated with the candidate function and the preferred function;

means for, upon the indicia being provided, automatically transforming, by the processor, the candidate source code comprising replacing the candidate function with the preferred function; and

means for, outputting the transformed candidate source code.

Any one or more of the above aspects wherein the system for providing the indicia comprises the means for transforming and outputting.

A method, comprising: retrieving, by a processor from a data repository, a candidate code, having a candidate function, and comprising a first human-readable machine instruction; accessing, by the processor from a data repository, a preferred function comprising a second human-readable machine instruction and has been previously identified as an authorized code; automatically determining, by the processor, equivalence between the candidate function and the preferred function; upon equivalence being determined, automatically providing, by the processor, indicia of equivalence associated with the candidate function and the preferred function; upon the indicia being provided, automatically transforming, by the processor, the candidate code comprising replacing the candidate function with the preferred function; and outputting the transformed candidate code.

Any one or more of the above aspects wherein the preferred function comprises a set of instructions, that when converted to machine code, cause a machine to perform the preferred function in a previously identified optimal manner.

Any one or more of the above aspects wherein the machine comprises a memory and the previously identified optimal manner comprises an identified size of the memory required to store the machine code.

Any one or more of the above aspects wherein the preferred function comprises a set of instructions previously identified as a concise code.

Any one or more of the above aspects wherein the preferred function comprises a most-concise member selected in accordance with an abstract syntax tree (AST) determination of equivalence between the candidate function and the preferred function.

A system comprising:

- a data repository;

- a processor; and

- wherein the processor:

- retrieve a candidate code from the data repository, having a candidate function, and comprising a first human-readable machine instruction;

- accesses from a data repository a preferred function, wherein the preferred function comprises second human-readable machine instructions and has been previously identified as an authorized code;

- automatically determines, equivalence between the candidate function and the preferred function;

- upon determining equivalence, automatically provides indicia of equivalence associated with the candidate function and the preferred function;

- upon the indicia being provided, automatically transforms the candidate code comprising replacing the candidate function with the preferred function; and

- outputs the transformed candidate code.

Any one or more of the above aspects wherein the processor provides the indicia comprising replacing the candidate function with the preferred function in the candidate code and saving the result as a preferred code.

A system for automatically editing an instruction, comprising:

- means for retrieving a candidate code from a data repository, having a function, and comprising a first human-readable machine instruction;

means for accessing a preferred function from a data repository comprising a second human-readable machine instruction, wherein the second human-readable machine instructions and has been previously identified as an authorized code;

means for automatically determining equivalence between the candidate function and the preferred function;

means for, upon equivalence being determined, automatically providing, by the processor, indicia of equivalence associated with the candidate function and the preferred function;

means for, upon the indicia being provided, automatically transforming, by the processor, the candidate code comprising replacing the candidate function with the preferred function; and

means for, outputting the transformed candidate code.

Any one or more of the above aspects, further comprising one or more of a candidate source code, a non-source code, a machine code, or circuitry implemented instruction being compared to a similar or different candidate source code, a non-source code, or a circuitry implemented instruction.

Any one or more of the above aspects, further comprising a processor or a number of processors accessing a candidate function and determining a functional equivalence to a preferred function and, if so determined, identifying, substituting, indicating a substitution should be made in the future, or indicating a non-preferred function in a program or system utilizing the candidate function and/or preferred function.

Any one or more of the above aspects, further comprising utilization of one or more symbols to represent an element, operation, portion, or entirety of a logic equation which may be process instance unique, system unique, globally unique, and may further be temporarily or indefinitely unique.

Any one or more of the above aspects, further comprising equivalence determined with an abstract syntactic structure, an Abstract Syntax Tree (AST), logic equation, first-order logic, second-order logic, etc.

Any one or more of the above aspects, further comprising, at least one of the preferred function and the candidate function comprises a subroutine; method; procedure; predicate; sequence of instructions or rules within a larger computer program; or a relation associated with an input to a single output according to the rule.

[0066] In addition to the forgoing, other embodiments are also contemplated by the embodiments disclosed herein. For example, a function may be a preferred function based upon comments (e.g., internal documentation). In another embodiment, a function may be preferred based upon being vetted and approved, and therefore a known function, versus an unvetted and/or unapproved, and therefore an unknown function.

[0067] In the foregoing description, for the purposes of illustration, methods were described in a particular order. It should be appreciated that in alternate embodiments, the methods may be performed in a different order than that described. It should also be appreciated that the methods described above may be performed by hardware components or may be embodied in sequences of machine-executable instructions, which may be used to cause a machine, such as a general-purpose or special-purpose processor (GPU or CPU), or logic circuits programmed with the instructions to perform the methods (FPGA). These machine-executable instructions may be stored on one or more machine-readable mediums, such as CD-ROMs or other type of optical disks, floppy diskettes, ROMs, RAMs, EPROMs, EEPROMs, magnetic or optical cards, flash memory, or other types of machine-readable mediums suitable for storing electronic instructions. Alternatively, the methods may be performed by a combination of hardware and software.

[0068] Specific details were given in the description to provide a thorough understanding of the embodiments. However, it will be understood by one of ordinary skill in the art that the embodiments may be practiced without these specific details. For example, circuits may be shown in block diagrams in order not to obscure the embodiments in unnecessary detail. In other instances, well-known circuits, processes, algorithms, structures, and techniques may be shown without unnecessary detail in order to avoid obscuring the embodiments.

[0069] Also, it is noted that the embodiments were described as a process, which is depicted as a flowchart, a flow diagram, a data flow diagram, a structure diagram, or a block diagram. Although a flowchart may describe the operations as a sequential process, many of the operations can be performed in parallel or concurrently. In addition, the order of the operations may be re-arranged. A process is terminated when its operations are completed, but could have additional steps not included in the figure. A process may correspond to a method, a function, a procedure, a subroutine, a subprogram, etc. When a process

corresponds to a function, its termination corresponds to a return of the function to the calling function or the main function.

[0070] Additionally, the systems, methods and protocols can be implemented to improve one or more of a special purpose computer, a programmed microprocessor or microcontroller and peripheral integrated circuit element(s), an ASIC or other integrated circuit, a digital signal processor, a hard-wired electronic or logic circuit such as discrete element circuit, a programmable logic device such as PLD, PLA, FPGA, PAL, a modem, a transmitter/receiver, any comparable means, or the like. In general, any device capable of implementing a state machine that is in turn capable of implementing the methodology illustrated herein can benefit from the various communication methods, protocols and techniques according to the disclosure provided herein.

[0071] Examples of the processors as described herein may include, but are not limited to, at least one of Qualcomm® Snapdragon® 800 and 801, Qualcomm® Snapdragon® 610 and 615 with 4G LTE Integration and 64-bit computing, Apple® A7 processor with 64-bit architecture, Apple® M7 motion coprocessors, Samsung® Exynos® series, the Intel® Core™ family of processors, the Intel® Xeon® family of processors, the Intel® Atom™ family of processors, the Intel Itanium® family of processors, Intel® Core® i5-4670K and i7-4770K 22nm Haswell, Intel® Core® i5-3570K 22nm Ivy Bridge, the AMD® FX™ family of processors, AMD® FX-4300, FX-6300, and FX-8350 32nm Vishera, AMD® Kaveri processors, Texas Instruments® Jacinto C6000™ automotive infotainment processors, Texas Instruments® OMAP™ automotive-grade mobile processors, ARM® Cortex™-M processors, ARM® Cortex-A and ARM926EJ-S™ processors, Broadcom® AirForce BCM4704/BCM4703 wireless networking processors, the AR7100 Wireless Network Processing Unit, other industry-equivalent processors, and may perform computational functions using any known or future-developed standard, instruction set, libraries, and/or architecture.

[0072] Furthermore, the disclosed methods may be readily implemented in software using objects of a object-oriented software language that provide portable source code that can be used on a variety of computer or workstation platforms. Alternatively, the disclosed system may be implemented partially or fully in hardware using standard logic circuits or VLSI design. Whether software or hardware is used to implement the systems in accordance with

the embodiments is dependent on the speed and/or efficiency requirements of the system, the particular function, and the particular software or hardware systems or microprocessor or microcomputer systems being utilized. The communication systems, methods, and protocols illustrated herein can be readily implemented in hardware and/or software using any known or later developed systems or structures, devices and/or software by those of ordinary skill in the applicable art from the functional description provided herein and with a general basic knowledge of the computer and telecommunications arts.

[0073] Moreover, the disclosed methods may be readily implemented in software and/or firmware that can be stored on a storage medium to improve the performance of: a programmed general-purpose computer with the cooperation of a controller and memory, a special purpose computer, a microprocessor, or the like. In these instances, the systems and methods can be implemented as program embedded on personal computer such as an applet, JAVA.RTM. or CGI script, as a resource residing on a server or computer workstation, as a routine embedded in a dedicated communication system or system component, or the like. The system can also be implemented by physically incorporating the system and/or method into a software and/or hardware system, such as the hardware and software systems of a communications transceiver.

[0074] Various embodiments may also or alternatively be implemented fully or partially in software and/or firmware. This software and/or firmware may take the form of instructions contained in or on a non-transitory computer-readable storage medium. Those instructions may then be read and executed by one or more processors to enable performance of the operations described herein. The instructions may be in any suitable form, such as but not limited to source code, compiled code, interpreted code, executable code, static code, dynamic code, and the like. Such a computer-readable medium may include any tangible non-transitory medium for storing information in a form readable by one or more computers, such as but not limited to read only memory (ROM); random access memory (RAM); magnetic disk storage media; optical storage media; a flash memory, etc.

[0075] Provided herein are exemplary systems and methods for spatial reuse in a communications environment. While the embodiments have been described in conjunction with a number of embodiments, it is evident that many alternatives, modifications, and variations would be or are apparent to those of ordinary skill in the applicable arts.

Accordingly, this disclosure is intended to embrace all such alternatives, modifications, equivalents and variations that are within the spirit and scope of this disclosure.

What Is Claimed Is:

1. A method, comprising:
 - retrieving, by a processor from a data repository, a candidate source code, having a candidate function, and comprising a first human-readable machine instruction;
 - accessing, by the processor from the data repository, a preferred function comprising a second human-readable machine instruction and has been previously identified as an authorized source code;
 - automatically determining, by the processor, equivalence between the candidate function and the preferred function;
 - upon equivalence being determined, automatically providing, by the processor, indicia of equivalence associated with the candidate function and the preferred function;
 - upon the indicia being provided, automatically transforming, by the processor, the candidate source code comprising replacing the candidate function with the preferred function; and
 - outputting the transformed candidate source code.
2. The method of claim 1, wherein the step of providing the indicia comprises the steps of transforming and outputting.
3. The method of claim 1, wherein the preferred function comprises human-readable elements not associated with the second human-readable machine instruction.
4. The method of claim 1, wherein the step of determining equivalence fails upon determining that a number of input/output parameters differ between the candidate function and the preferred function.
5. The method of claim 1, wherein the step of determining equivalence fails upon:
 - determining at least one input/output parameters differs between the candidate function and the preferred function; and
 - wherein the difference comprises a difference of equivalence classes.

6. The method of claim 1,
providing a first machine-readable translation of the candidate function;
providing a second machine-readable translation of the preferred function;
executing both the first machine-readable translation and the second machine-readable translation with ones of a finite set of inputs; and
determining equivalence upon the step of executing both the first machine-readable translation and the second machine-readable translation each outputting equivalent values from each of the first machine-readable translation and the second machine-readable translation of the candidate function.
7. The method of claim 1, wherein the step of determining equivalence further comprises:
deriving a logic equation for the candidate function;
accessing a logic equation for the preferred function; and
wherein equivalence is failed to be determined upon the logic equation for the candidate function being determined to be different from the logic equation for the preferred function.
8. The method of claim 7, wherein the determination of whether the logic equation of the candidate function is determined to be equivalent to the logic equation of the preferred function further comprises:
providing the logic equation for the candidate function and the logic equation for the preferred function to an automated theorem prover; and
receiving indicia from the automated theorem prover indicating equivalence.
9. The method of claim 1, wherein the preferred function comprises a set of instructions, that when converted to machine code, cause a machine to perform the preferred function in a previously identified optimal manner.
10. The method of claim 9, wherein the previously identified optimal manner comprises an identified manner compliant with at least one security objective.

11. The method of claim 9, wherein the machine comprises a processor and the previously identified optimal manner comprises an identified number of processor operations.

12. The method of claim 9, wherein the machine comprises a memory and the previously identified optimal manner comprises an identified size of the memory required to store the machine code.

13. The method of claim 1, wherein the preferred function comprises a set of instructions previously identified as a concise source code.

14. The method of claim 1, wherein the step of determining equivalence further comprises:

generating, from the candidate function, a set of equivalence classes for the candidate function, the equivalence classes comprising a set of equivalent functions, each element of the set having a function-to-source mapping.

15. The method of claim 1,
wherein the preferred function comprises a most-concise member selected in accordance with an abstract syntactic structure determination of equivalence between the candidate function and the preferred function.

16. The method of claim 1, wherein the abstract syntactic structure comprises an abstract syntax tree (AST).

17. The method of claim 1, wherein:
one of the candidate function and the preferred function is represented with a first symbol; and
automatically determining, by the processor, equivalence between the candidate function and the preferred function, further comprises, determining equivalence between the other of the candidate function and the preferred function with the first symbol.

18. The method of claim 17, wherein:
the other of the candidate function and the preferred function is represented with a second symbol; and
automatically determining, by the processor, equivalence between the candidate function and the preferred function, further comprises, determining equivalence between the first symbol and the second symbol.
19. The method of claim 1, wherein at least one of the preferred function and the candidate function comprises a subroutine.
20. The method of claim 1, wherein at least one of the preferred function and the candidate function comprises a method.
21. The method of claim 1, wherein at least one of the preferred function and the candidate function comprises a procedure.
22. The method of claim 1, wherein at least one of the preferred function and the candidate function comprises a predicate.
23. The method of claim 1, wherein at least one of the preferred function and the candidate function comprises a sequence of instructions or rules within a larger computer program.
24. The method of claim 1, wherein at least one of the preferred function and the candidate function comprises a relation associated with an input to a single output according to the rule.
25. A system comprising:
a data repository;
a processor; and
wherein the processor:

retrieves, from the data repository, a candidate source code having a candidate function, and comprising a first human-readable machine instruction;

accesses, from the data repository a preferred function, wherein the preferred function comprises second human-readable machine instructions and has been previously identified as an authorized source code;

automatically determines, equivalence between the candidate function and the preferred function;

upon determining equivalence, automatically provides indicia of equivalence associated with the candidate function and the preferred function;

upon the indicia being provided, automatically transforms the candidate source code comprising replacing the candidate function with the preferred function; and

outputs the transformed candidate source code.

26. The system of claim 25, wherein the processor provides the indicia comprising replacing the candidate function with the preferred function in the candidate source code and saving the result as a preferred source code.

27. The system of claim 25, wherein the processor fails to determine equivalence upon at least one of (a) determining that a number of input/output parameters differ between the candidate function and the preferred function and (b) determining at least one input/output parameter differs between the candidate function and the preferred function and wherein the difference comprises a difference of equivalence classes.

28. The system of claim 25, wherein, the processor determines equivalence between the candidate function and the preferred function comprising, determining equivalence between a first symbol representing one of the candidate function and the preferred function with the other of the candidate function and the preferred function.

29. The system of claim 28, wherein, the processor determines equivalence between the candidate function and the preferred function comprising, determining equivalence between a first symbol representing one of the candidate function and the

preferred function with a second symbol representing the other of the candidate function and the preferred function.

30. The system of claim 25, wherein at least one of the preferred function and the candidate function comprises a subroutine.

31. The system of claim 25, wherein at least one of the preferred function and the candidate function comprises a method.

32. The system of claim 25, wherein at least one of the preferred function and the candidate function comprises a procedure.

33. The system of claim 25, wherein at least one of the preferred function and the candidate function comprises a predicate.

34. The system of claim 25, wherein at least one of the preferred function and the candidate function comprises a sequence of instructions or rules within a larger computer program.

35. The system of claim 25, wherein at least one of the preferred function and the candidate function comprises a relation associated with an input to a single output according to the rule.

36. A system for automatically editing an instruction, comprising:
means for retrieving a candidate source code from a data repository, having a function, and comprising a first human-readable machine instruction;
means for accessing a preferred function from the data repository comprising a second human-readable machine instruction, wherein the second human-readable machine instructions and has been previously identified as an authorized source code;
means for automatically determining equivalence between the candidate function and the preferred function;

means for, upon equivalence being determined, automatically providing, by the processor, indicia of equivalence associated with the candidate function and the preferred function;

means for, upon the indicia being provided, automatically transforming, by the processor, the candidate source code comprising replacing the candidate function with the preferred function; and

means for outputting the transformed candidate source code.

37. The system of claim 36, wherein the means for providing the indicia comprises the means for transforming and outputting.

38. The system of claim 36, wherein, the means for automatically determining equivalence between the candidate function and the preferred function, further comprises, means to determine equivalence between one of the candidate function and the preferred function with the first symbol representing the other of the candidate function and the preferred function.

39. The system of claim 38, wherein, the means for automatically determining equivalence between the candidate function and the preferred function, further comprises, means to determine equivalence between a second symbol representing the one of the candidate function and the preferred function with the first symbol.

40. The system of claim 36, wherein at least one of the preferred function and the candidate function comprises a subroutine.

41. The system of claim 36, wherein at least one of the preferred function and the candidate function comprises a method.

42. The system of claim 36, wherein at least one of the preferred function and the candidate function comprises a procedure.

43. The system of claim 36, wherein at least one of the preferred function and the candidate function comprises a predicate.

44. The system of claim 36, wherein at least one of the preferred function and the candidate function comprises a sequence of instructions or rules within a larger computer program.

45. The system of claim 36, wherein at least one of the preferred function and the candidate function comprises a relation associated with an input to a single output according to the rule.

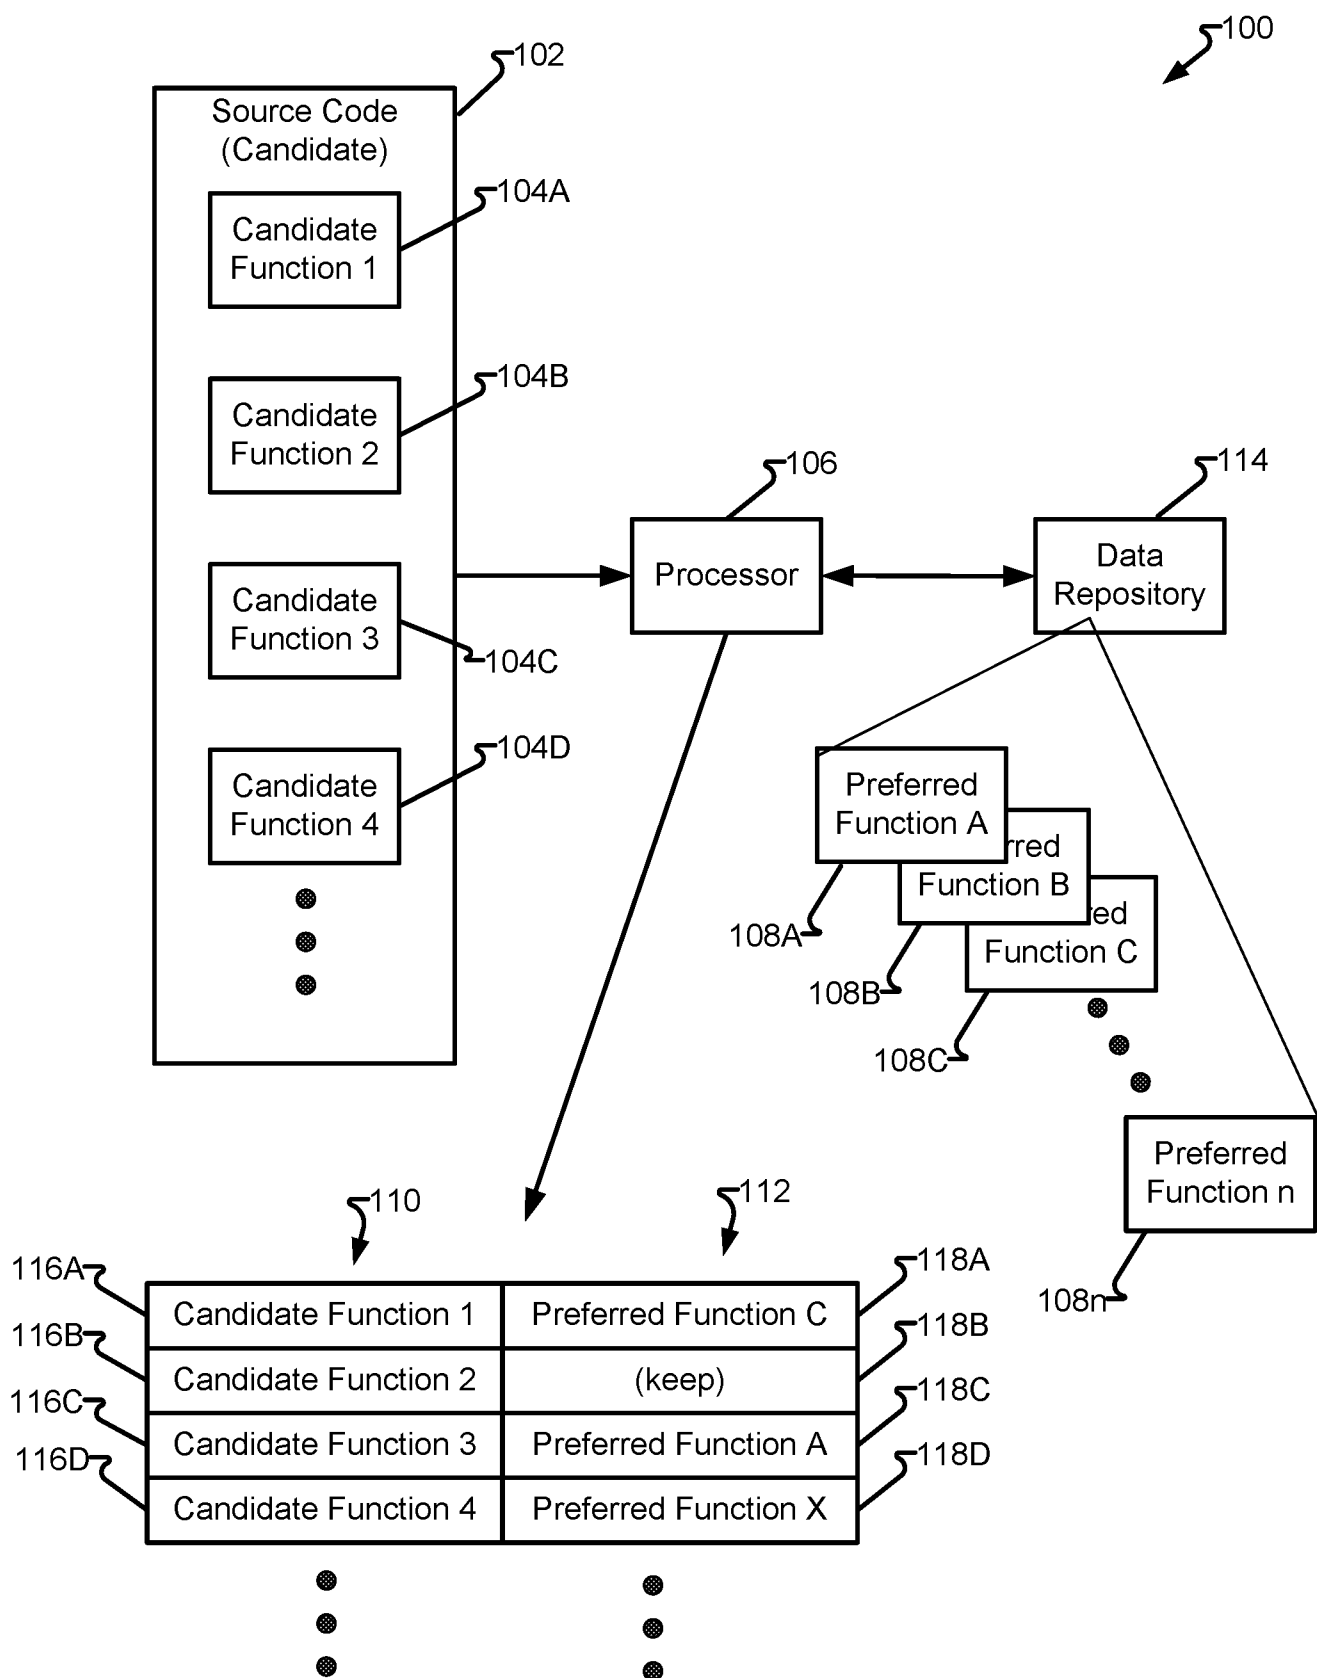


FIG. 1

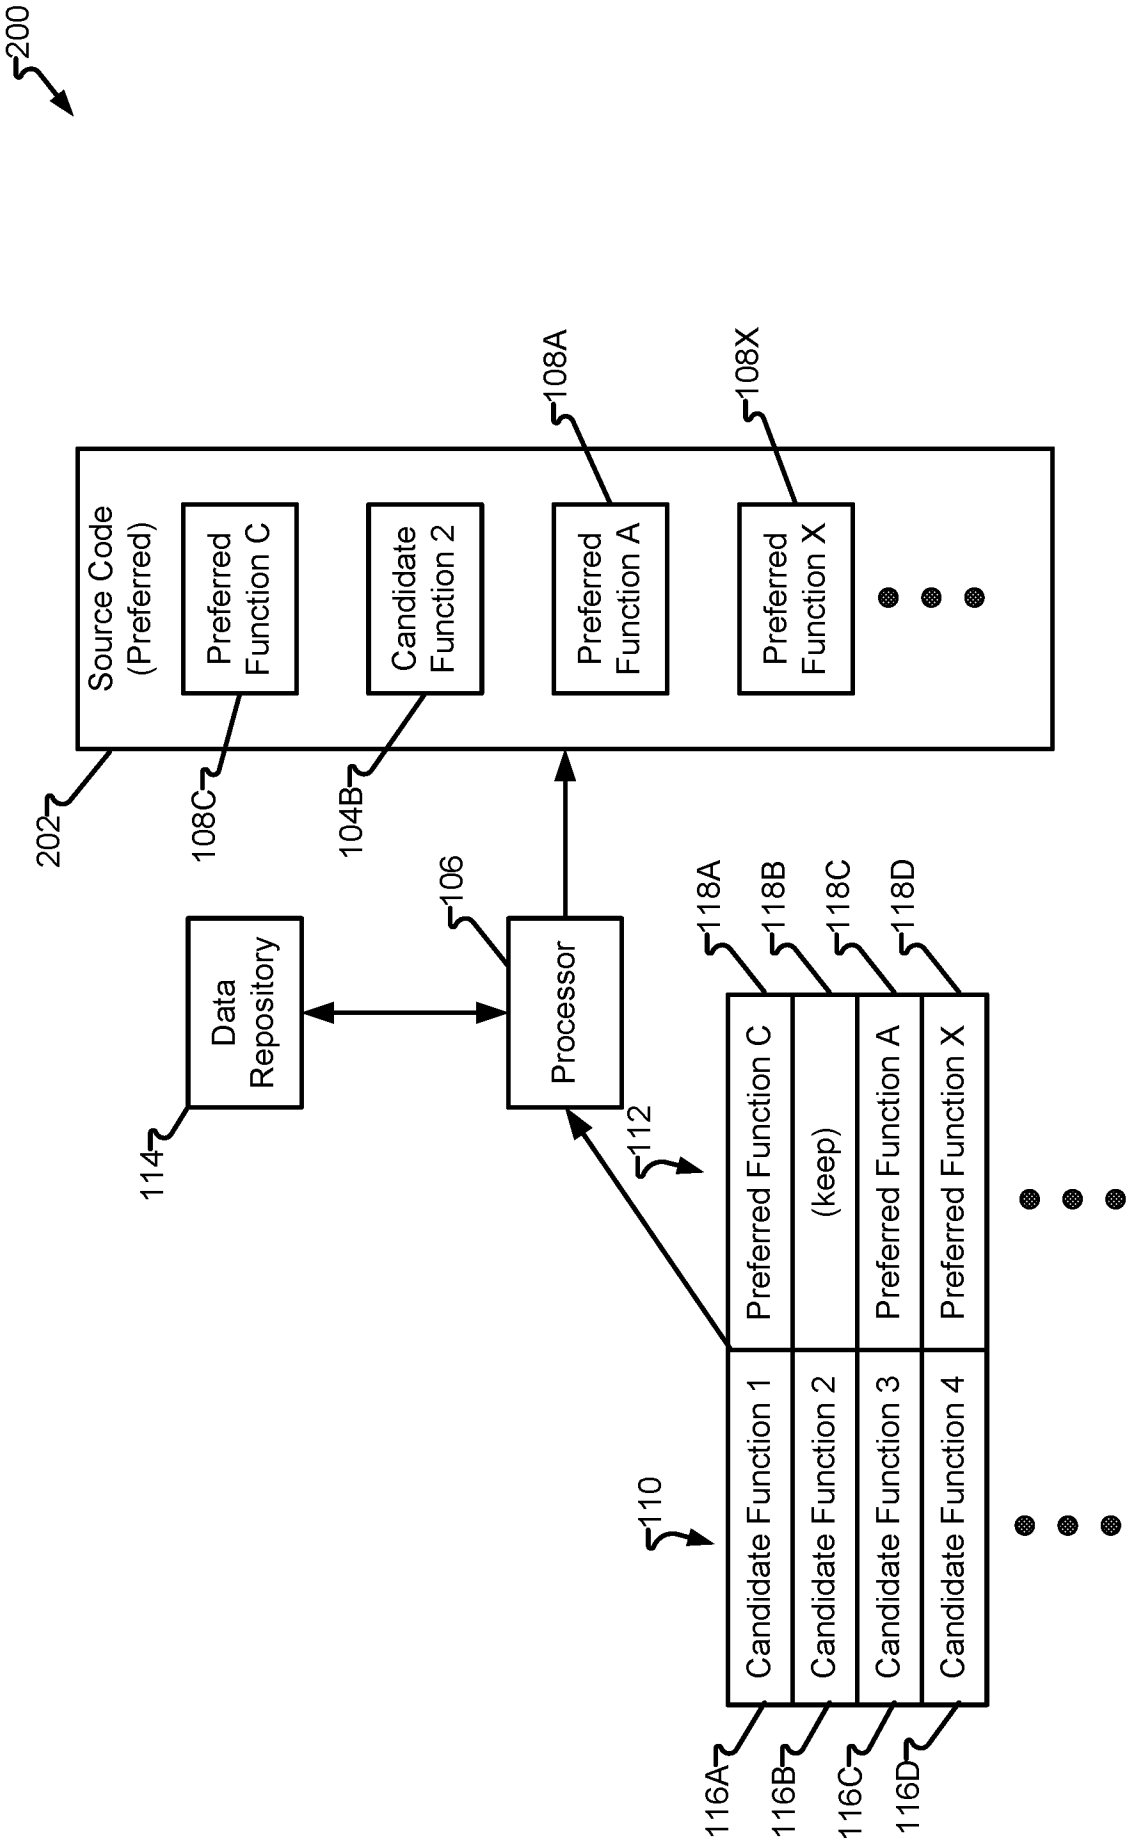
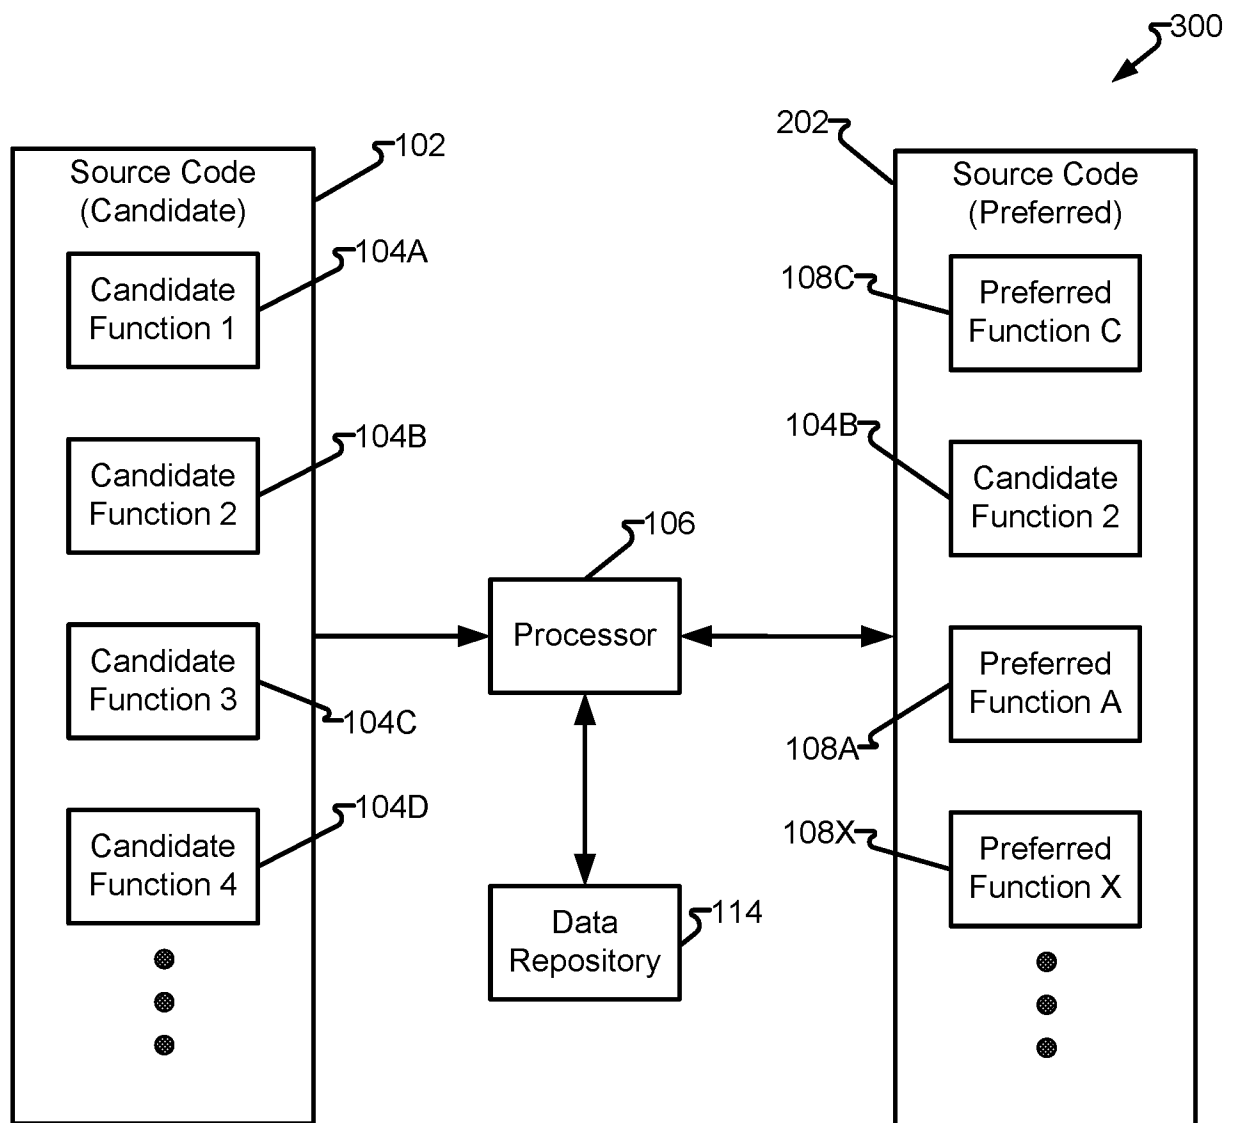


FIG. 2

**FIG. 3**

400 ↗

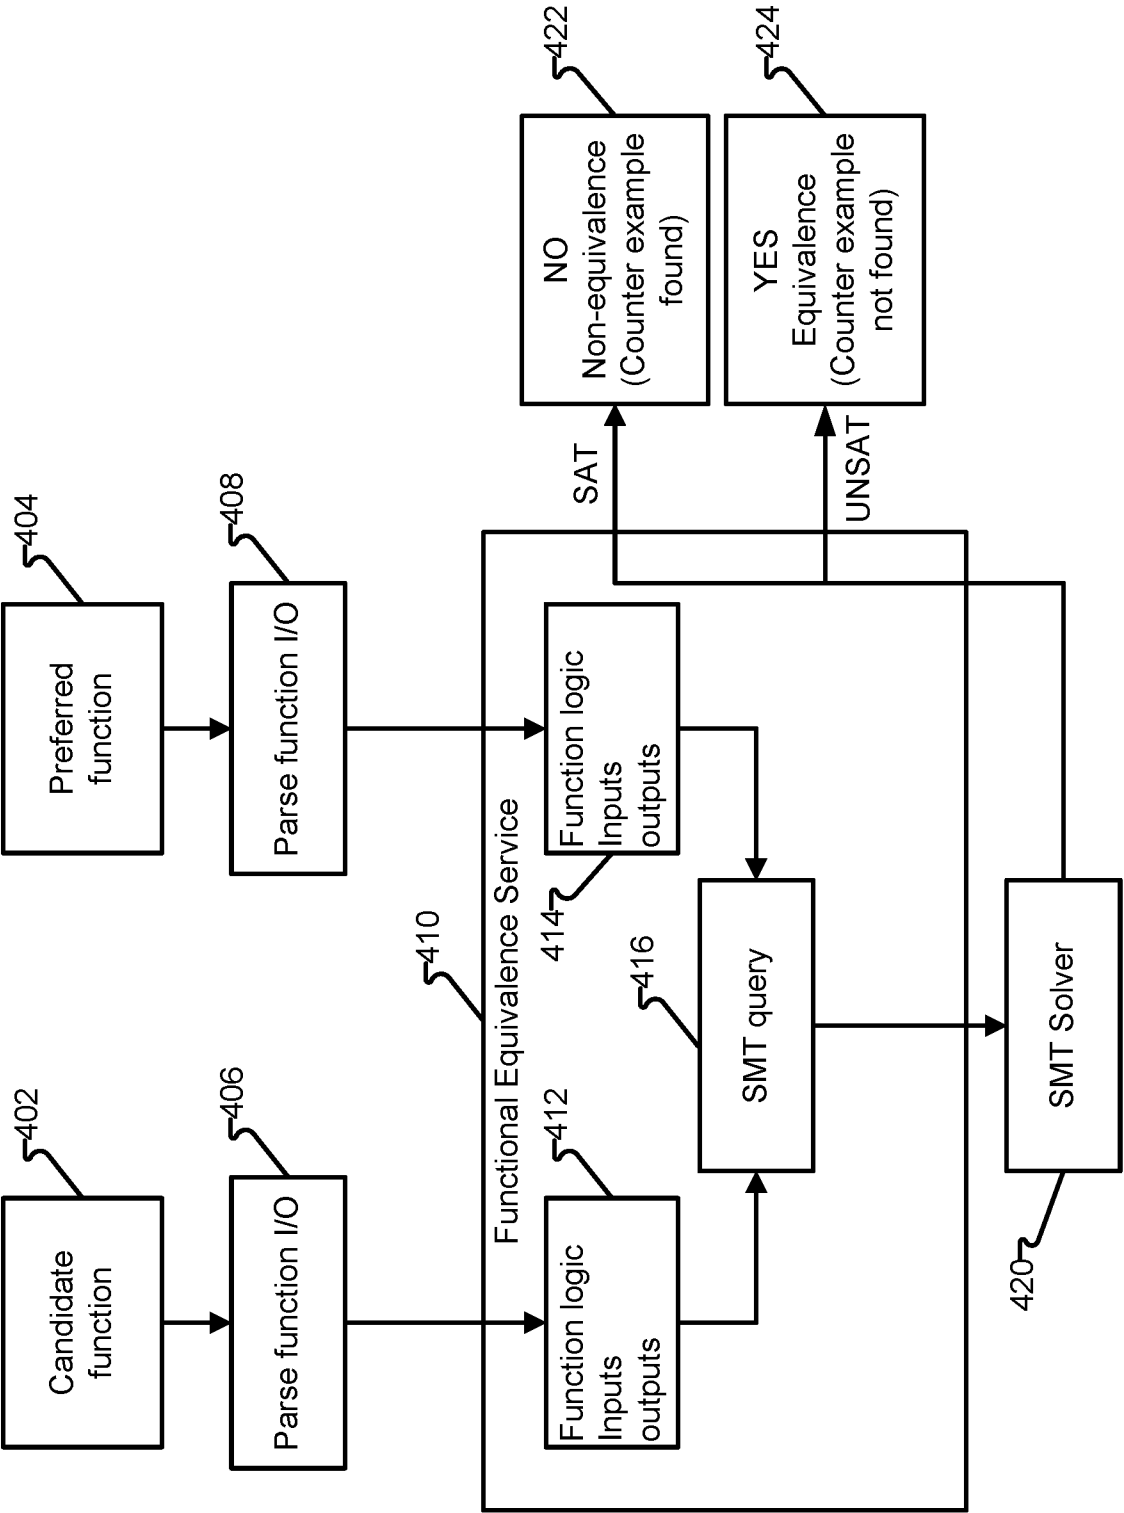
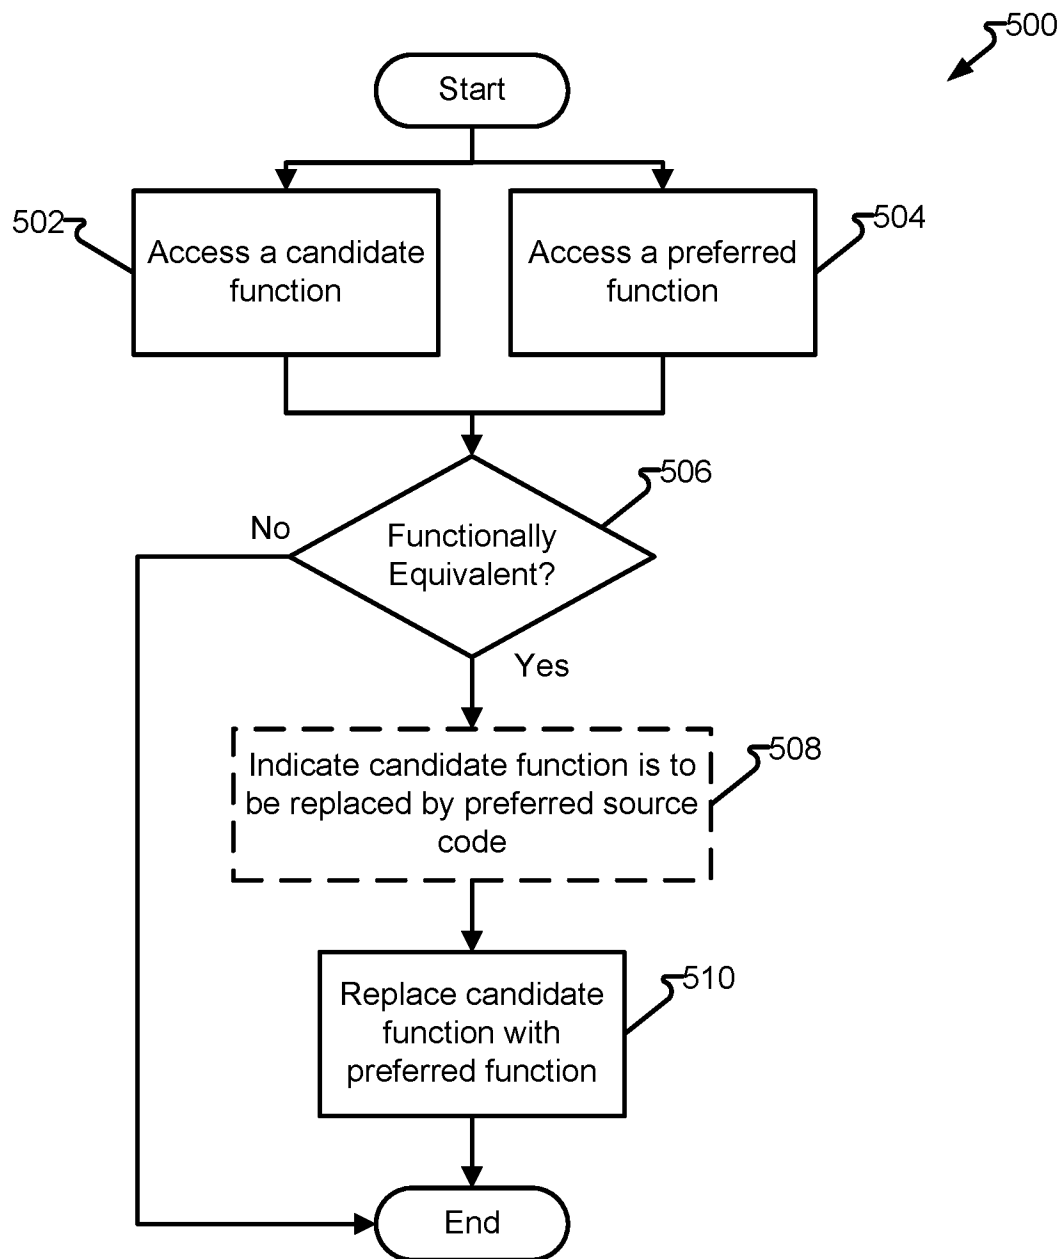


FIG. 4

**FIG. 5**

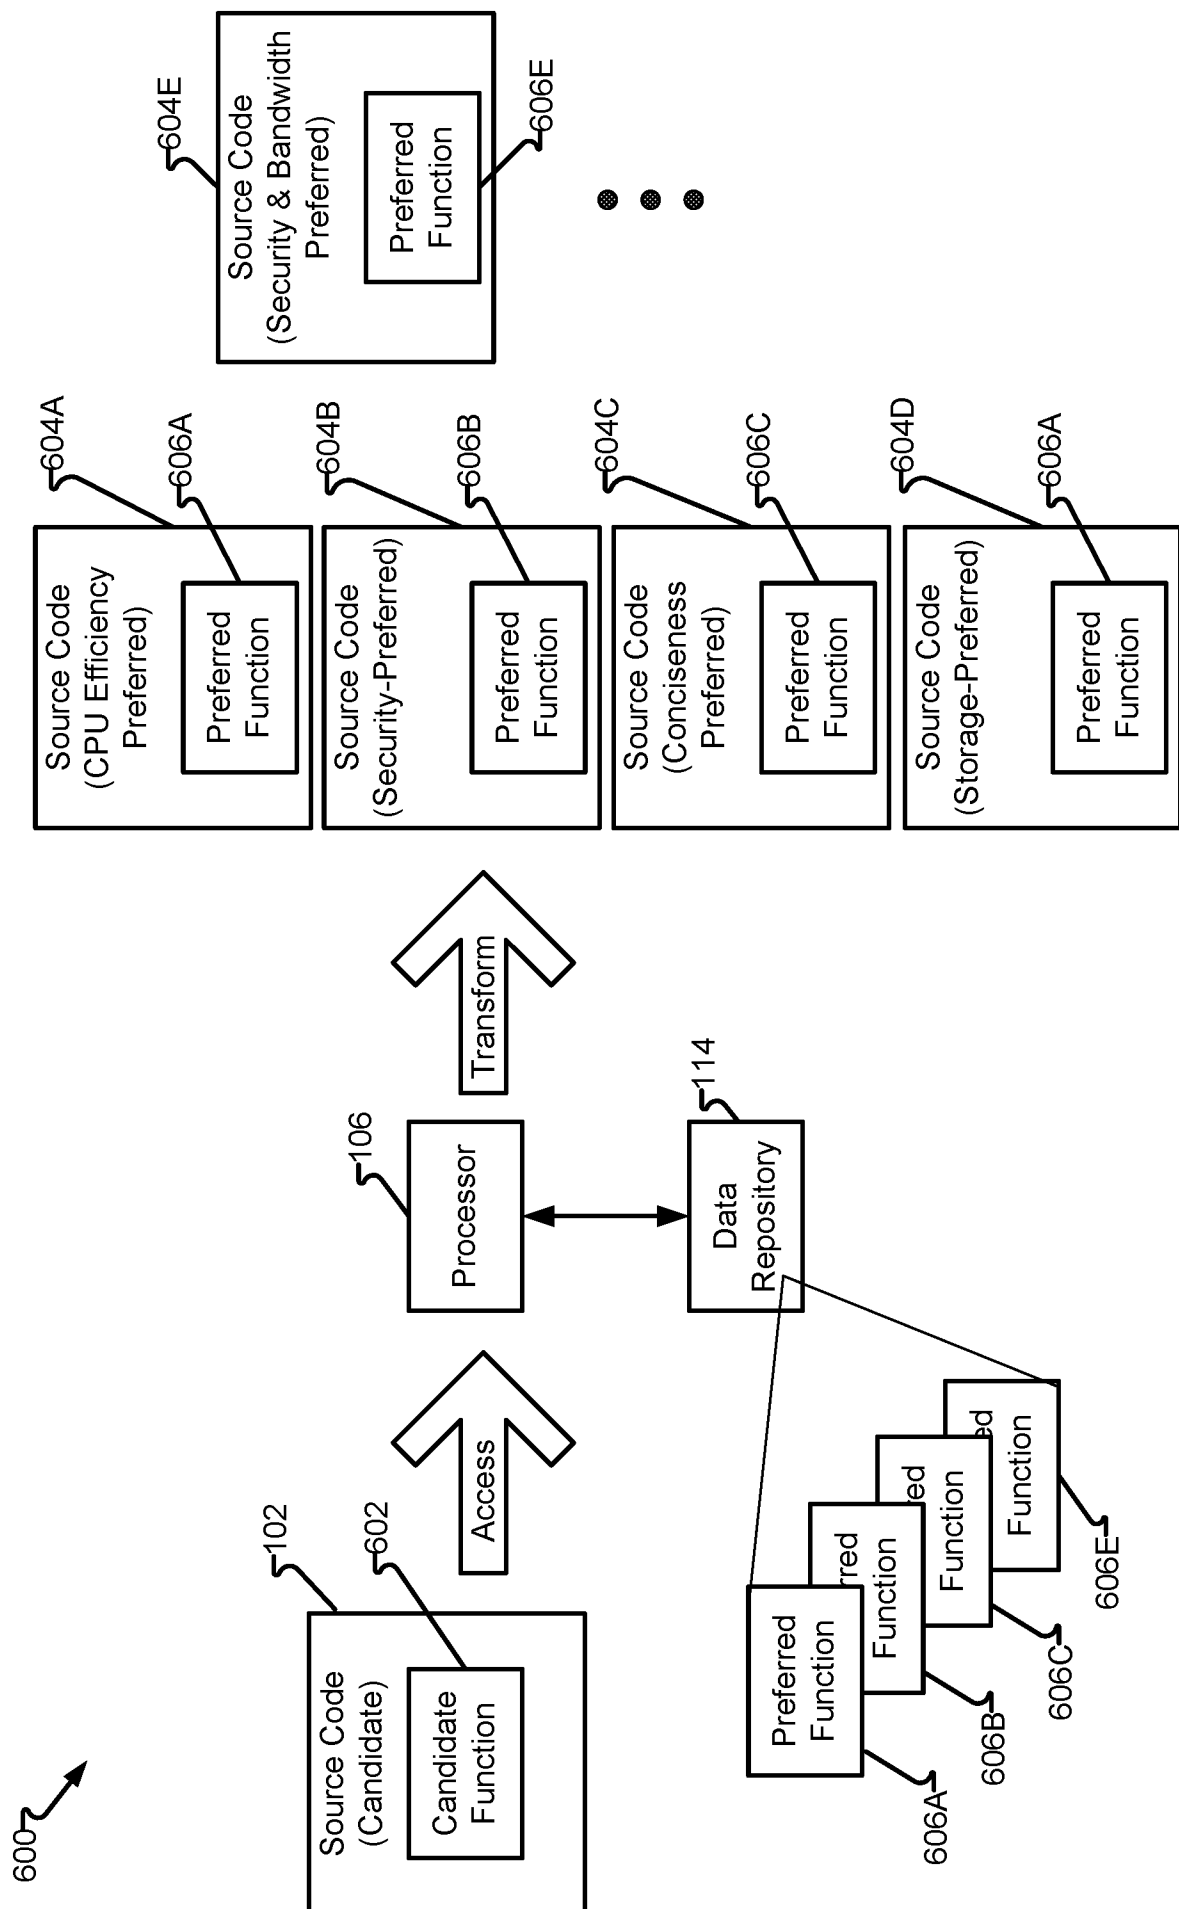


FIG. 6

Practical and Ugly Problems

CEO's Acquisition Problem:

I want to buy companies to absorb market share and,
reduce costs with increase operational efficiency

Ugly Truths:

Comparing large applications and doing a functional analysis of best processing is never done
Integrating existing capabilities is never done
The "operational" efficiencies are almost never achieved

Example: Bank of America and Mortgage

In the new *PHASE*, how do you compare/merge two mortgage systems?

Normalize both systems into "databases"

Subtract one from the other;

Use "queries" and "views" to zoom in and out on differences

Select best-of-breed capabilities **without reading code** for the new integrated capability

Do only **limited testing** to verify the result

Intuition: “I don’t believe it”

In the new *PHASE*, how do you compare/merge two mortgage systems?

Normalize both systems into “databases”

Subtract one from the other;

Use “**queries**” and “**views**” to zoom in and out on differences

Select best-of-breed capabilities **without reading code** for the new integrated capability
Do only **limited testing** to verify the result

What seems *intuitively* wrong with this? **Much.**

Differing programming languages
Differing architectures
Opaque spaghetti source code
Project Cost
Quality
Project Duration
...

FIG. 8

Phase and Essence Goals

FIG. 9

	Old Phase	New Phase
Professional Labor	Labor Intensive Slow	Automation Leverages 100X Multiplier
Quality	Labor intensive Haphazard Slow	Automatically Verified Often Unnecessary 100x Faster
Programming Specification	Chaotically Idiosyncratic	Normalized to Coherent
Programming Media	Programming Language Important	Programming Languages Peripheral
Comprehending System "Knowledge"	Opaque Painful Learning Curve	Transparent Easy Learning Curve
Application Architecture	Chaotically Idiosyncratic	Normalized to Coherent
Leveraging Application "Knowledge" for Productivity	Human Engineers Experience	Application System becomes Active Agent

The Analogy, The Stack, The Journey

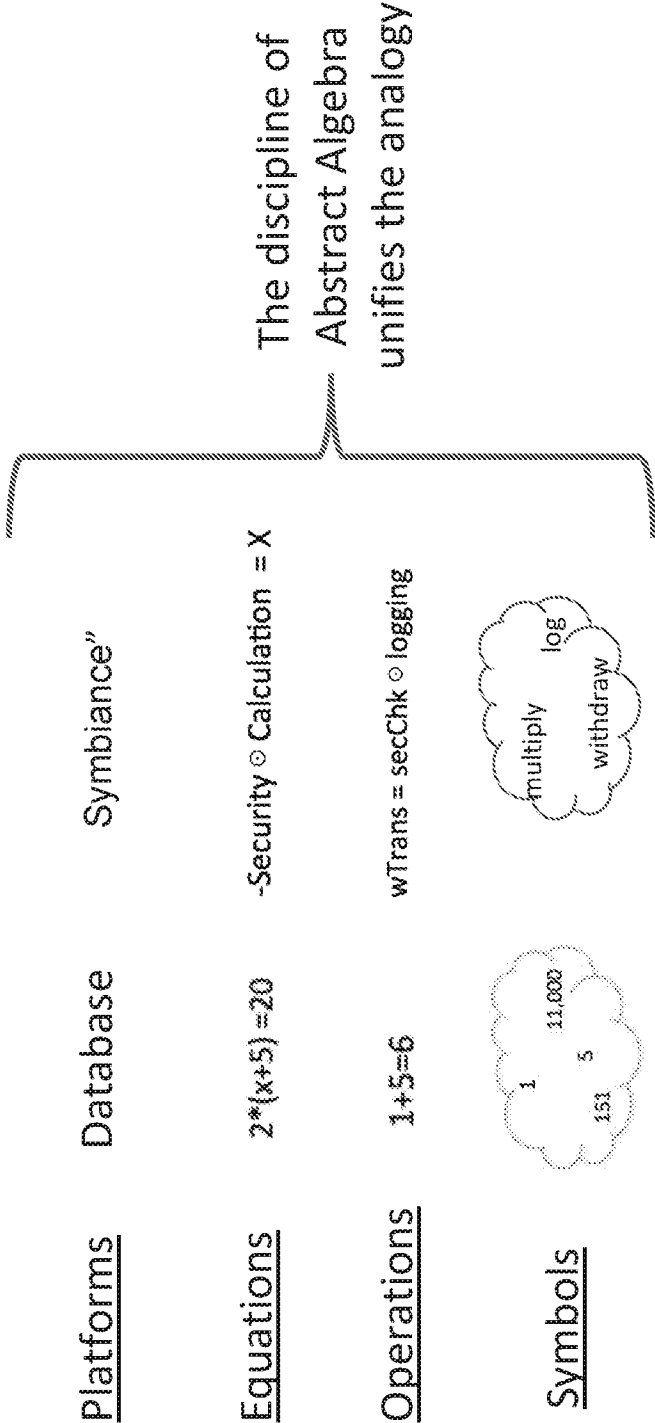


FIG. 10

AI and the Symbolic Species

- Understanding, either in human or AI starts with an elemental unit, a symbol
- In AI, this extends to the “Physical Symbol Hypothesis,” adoption of which is controversial
- It is the first of the fundamental “gates” one must go through to be successful

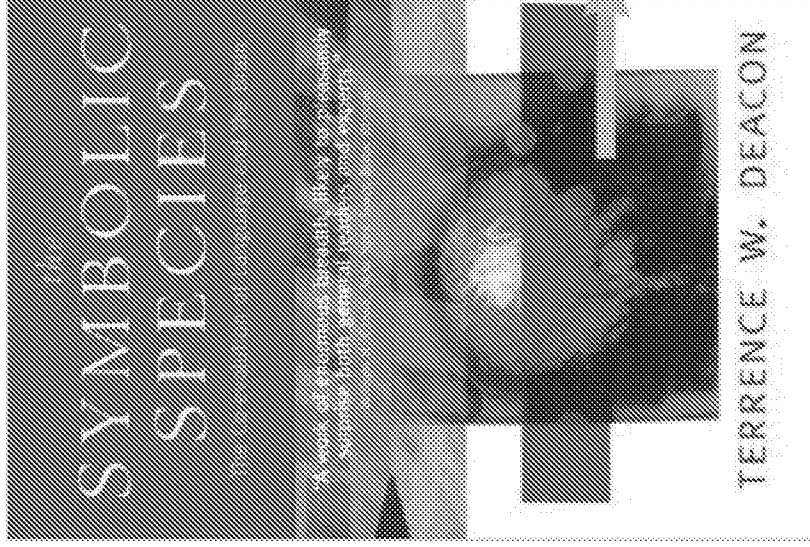


FIG. 11

FIG. 12 Formally: What's the Symbol Mean?

Although this sounds like a dinnertime conversation among philosophy majors, it is the starting point

- A symbol corresponds to a function and its meaning is the function's definition, ultimately expressed in a programming language.
- A specific function corresponds to a specific number (e.g. "1") and the meaning of both is defined in set theory
- This will become clearer and deeper as we proceed

FIG. 13 Functional Equivalence (Gate)

- The journey starts with equality
- The core problem is variability in specification:
 - Programming language
 - Many specifications to one behavioral definition
- This variability is a huge source of the chaos

```

int function1(w,x,y,z)
{
    int result = 0;
    function11(function28b(w,x),
               multiply(y,z));
    return(result);
}

int function11a(int x, int y)
{
    int result=0;
    int fifteen=15;
    int l1bound=0;
    int l2bound=0;
    int inc2=+x+x+x+x+x+x+x+x
    +x+x+x+x+N*N+N+N+N;
    l1bound = y&fifteen;
    for (i=0, i<l1bound, i++)
        result=result+x;
    l2bound = y>>4;
    for (j=0, j<l2bound, j++)
        result=result+inc2;
    return(result);
}

int function28b(int x, int y)
{
    int result = 0;
    while (y>0)
    {
        result = result + x;
        y--;
    }
    return(result);
}

int multiply(int x, int y)
{
    if(y = 0)
        return(0);
    else
        return(x+multiply(x, y-1));
}

```


Create Equivalence Class

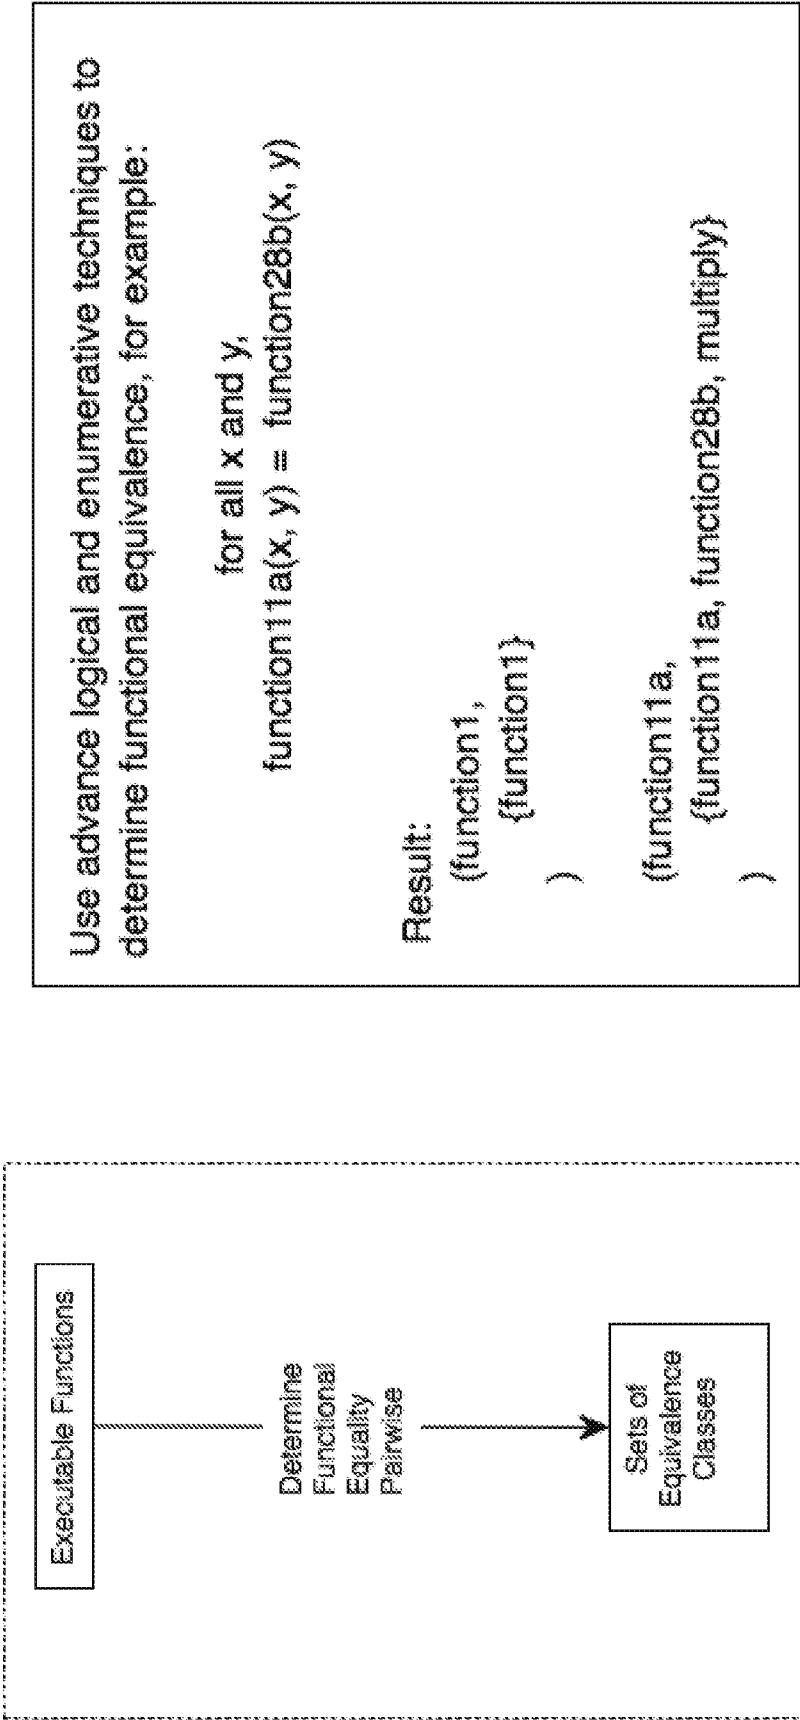


FIG. 14

Most Concise Analysis

```
int function1(w,x,y,z)
{
    int result = 0;
    function11(function28b(w,x),
        multiply(y,z));
    return(result);
}

int function11a(int x, int y)
{
    int result=0;
    int fifteen=15;
    int l1bound=0;
    int l2bound=0;
    int inc2=+x+x+x+x+x+x+x+x
        +x+x+x+x+x+x+x+x;
    l1bound = y&fifteen;
    for (i=0, i<l1bound, i++)
        result=result+x;
    l2bound = y>>4;
    for (i=0, i<l2bound, i++)
        result=result+inc2;
    return(result);
}

int function28b(int x, int y)
{
    int result = 0;
    while (y>0)
    {
        result = result + x;
        y--;
    }
    return(result);
}

int multiply(int x, int y)
{
    if(y = 0)
        return(0);
    else
        return(x*multiply(x,y-1));
}
```

Result:
(function1,
function1
)
(function11a,
multiply
)

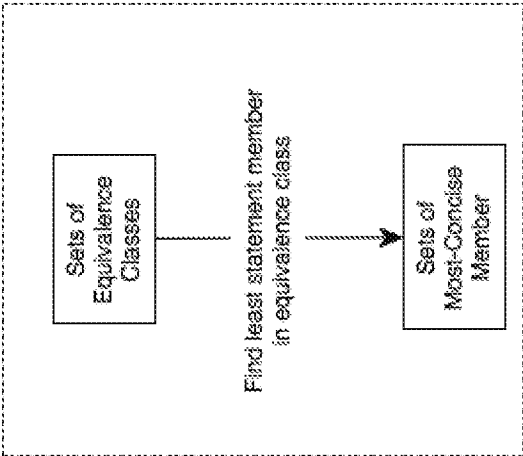


FIG. 15

Consolidate and Update Source




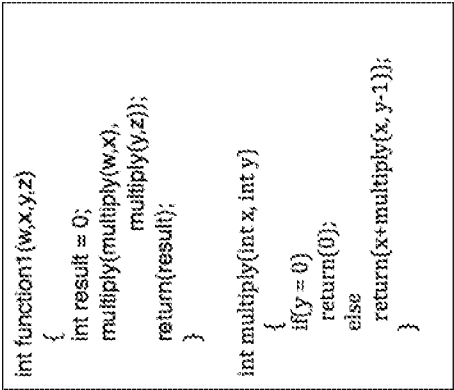


FIG. 16

Symbols and Source

FIG. 17

The symbol “multiply” now represents all different implementations

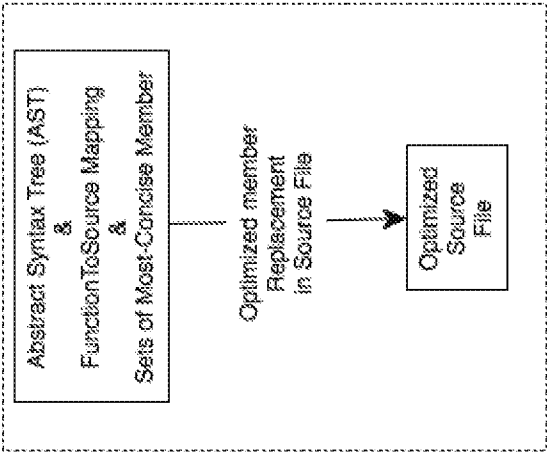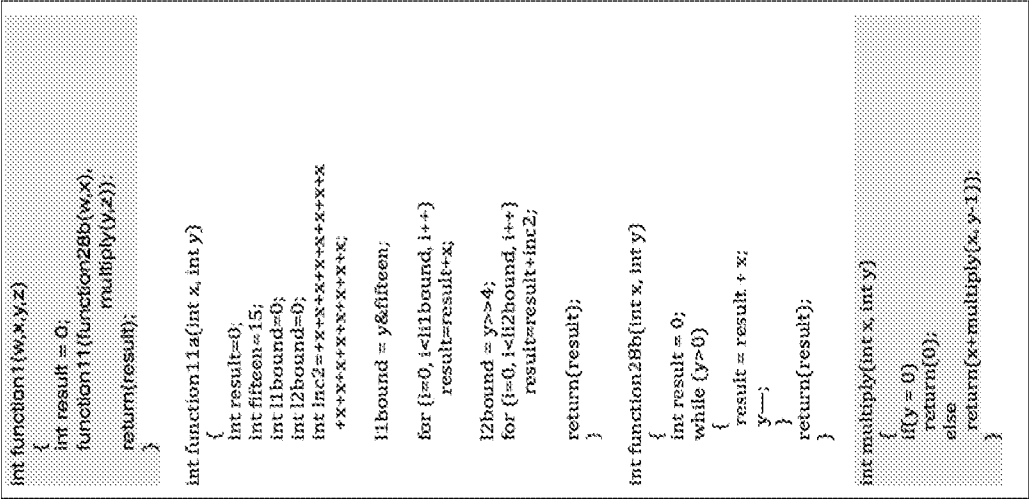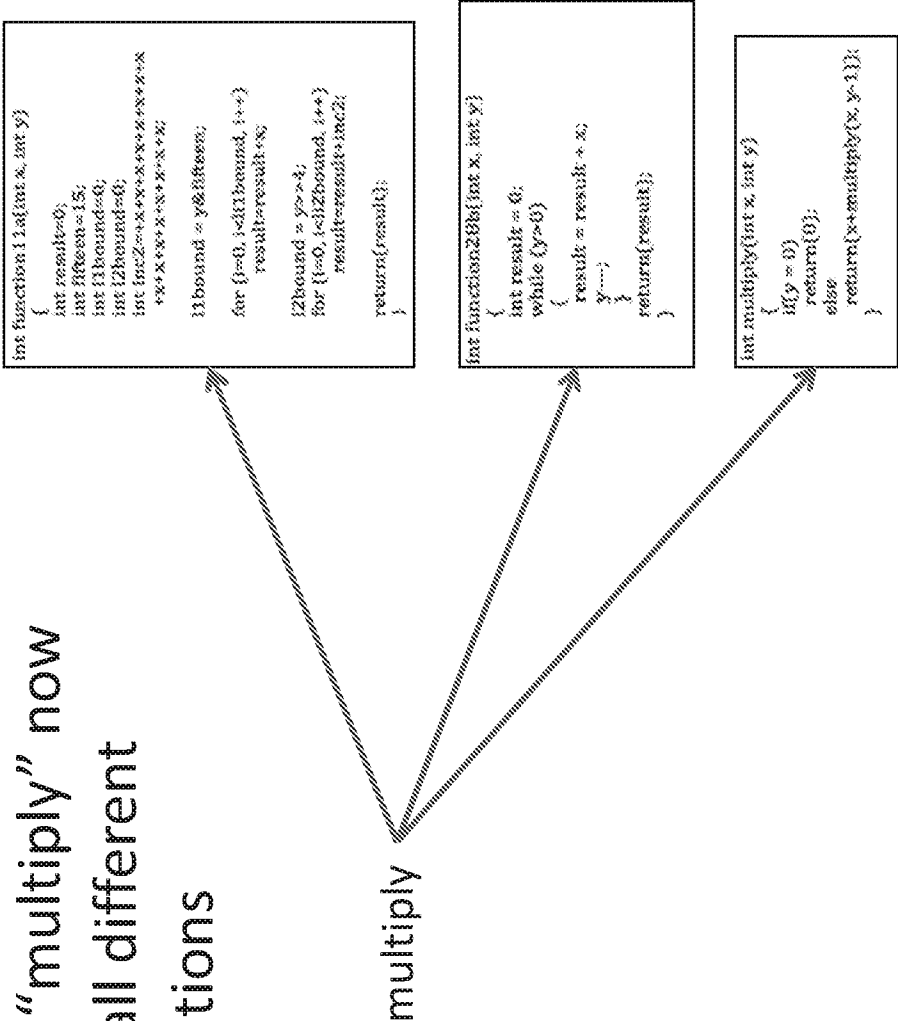

The function is represented as a symbol;
It means the behavior of each source specification in the equivalence class


FIG. 18

Implications

- Problem class: Simplification
 - Code cloning, legacy bloat, “subroutine” creation
- Productivity
 - No human needs to read source code; this is a machine algorithm on functions.
 - Human reading v. invoking algorithm classes: $> > 100x$
- Quality
 - This is a perfect process, no errors. In math-speak: complete and correct (though potentially intractable*)

Productivity Gain*

Any task involving Reading, Comprehension, Solving

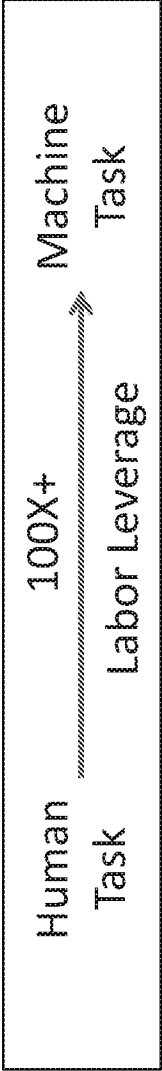

	Labor Leverage
Mortgage Underwriting	300x (30,000%)
Functional Equivalence	600x (60,000%)

FIG. 19

*Experiments

Phase, Essence, Intuition

- Only humans can interpret code, but here no reading required
- Programmer and multiple “specifications” are collapsed to the best specification
- In many cases, testing and verification is not necessary even when doing major changes

FIG. 20


Phase and Essence Goals

FIG. 21

	Old Phase	New Phase
Professional Labor	Labor Intensive Slow	Automation Leverages 100X Multiplier
Quality	Labor intensive Haphazard Slow	Automatically Verified Often Unnecessary 100x Faster
Programming Specification	Chaotically Idiosyncratic	Normalized to Coherent
Programming Media	Programming Language Important	Programming Languages Peripheral
Comprehending System "Knowledge"	Opaque Painful Learning Curve	Transparent Easy Learning Curve
Application Architecture	Chaotically Idiosyncratic	Normalized to Coherent
Leveraging Application "Knowledge" for Productivity	Human Engineers Experience	Application System becomes Active Agent

Gate Gates and Derivatives

FIG. 22

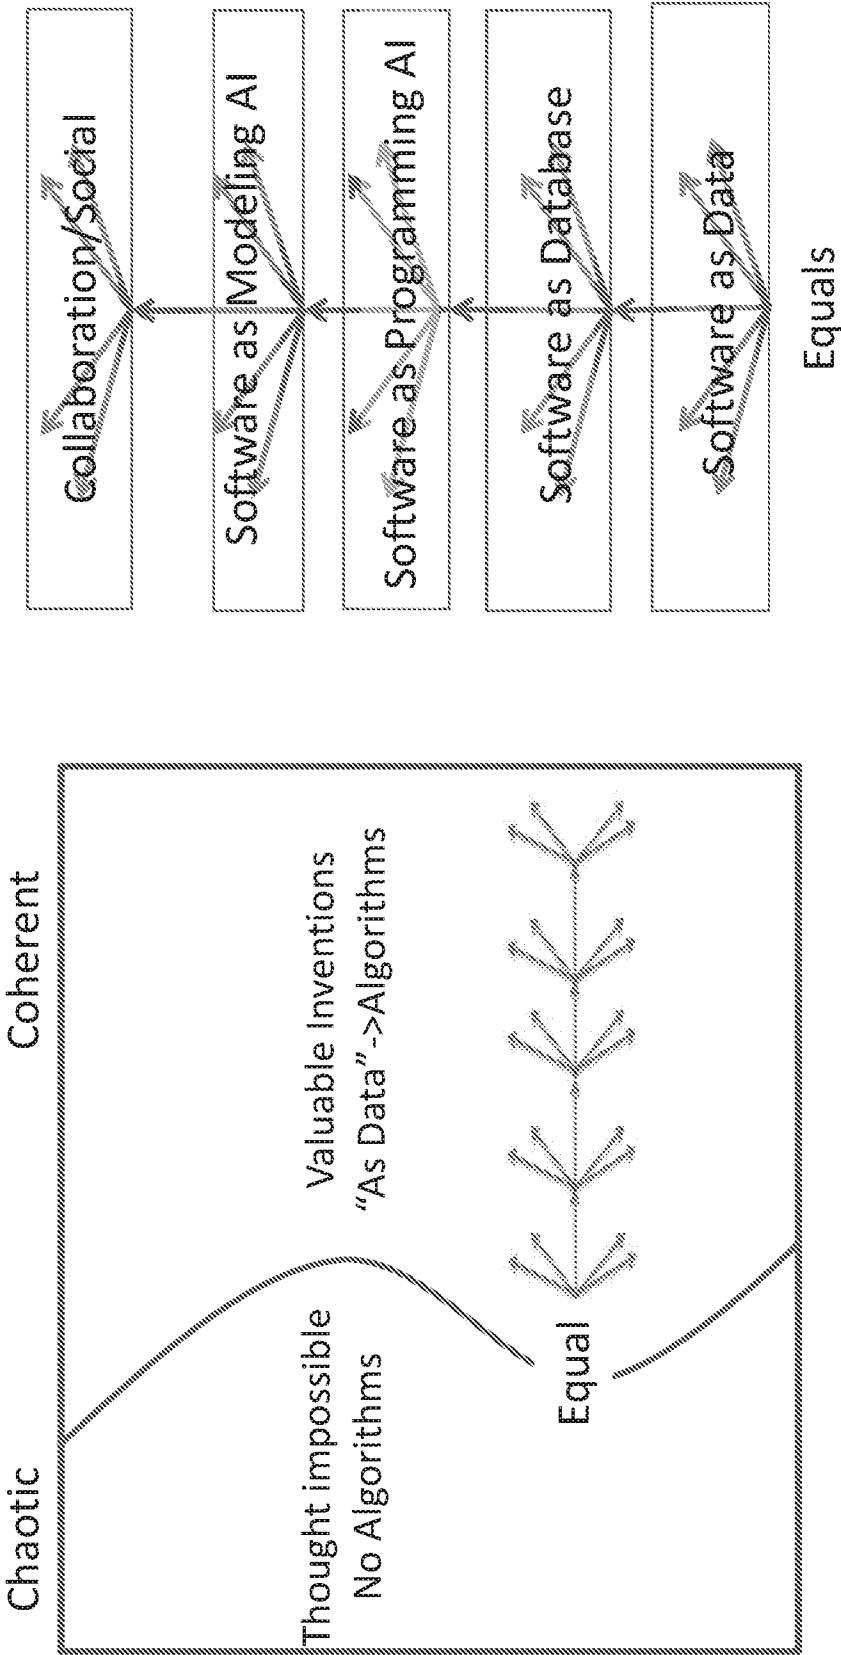


There are hundreds, maybe thousands, of valuable inventions

FIG. 23

Control the Gates.....

and thereby control derivatives

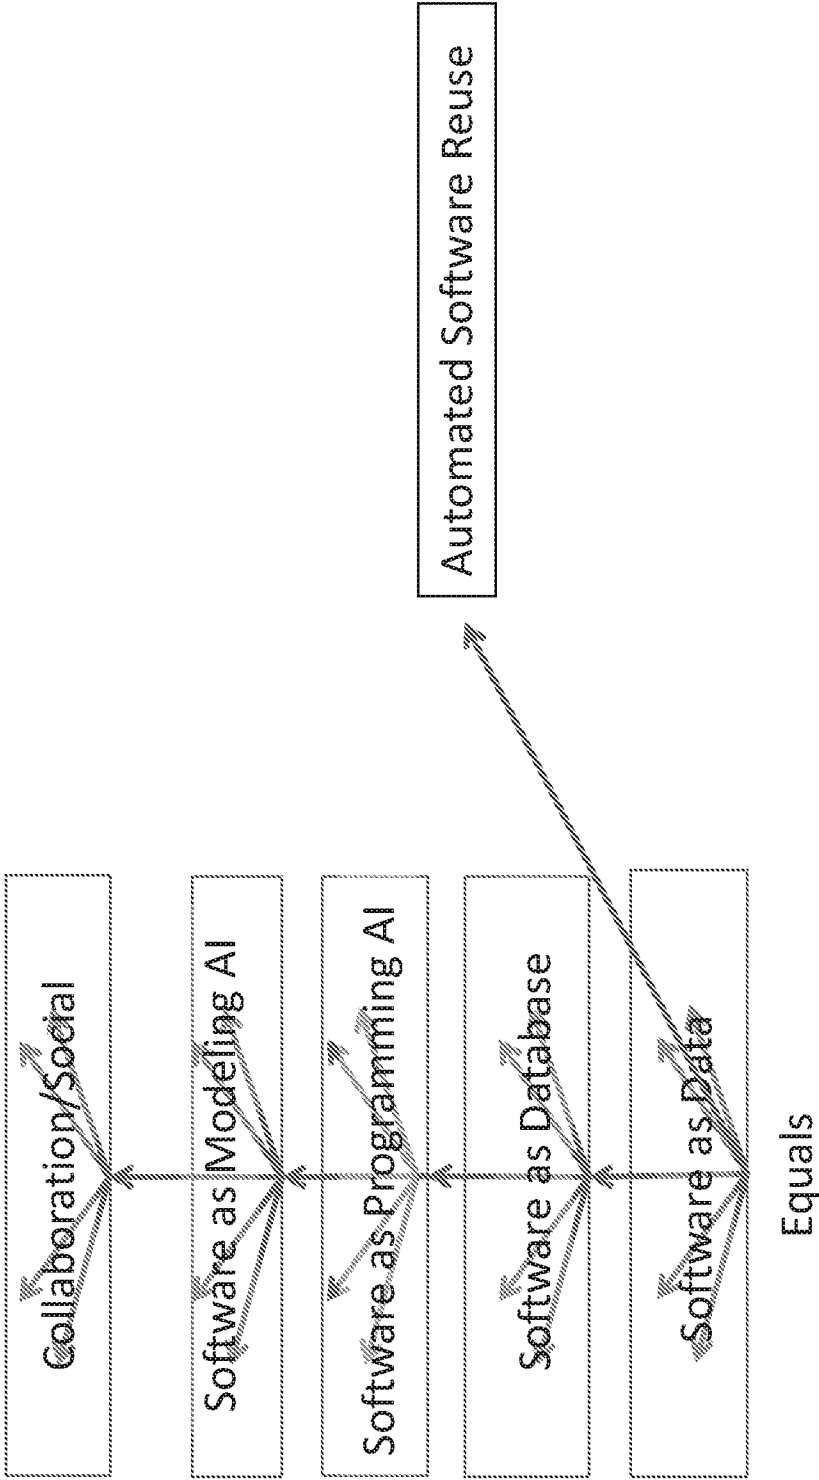

But among the derivative are very very valuable solutions to unsolved problems

Equivalence++ (Derivative)

Why Multiply? Doesn't the 'C' programming language do that?

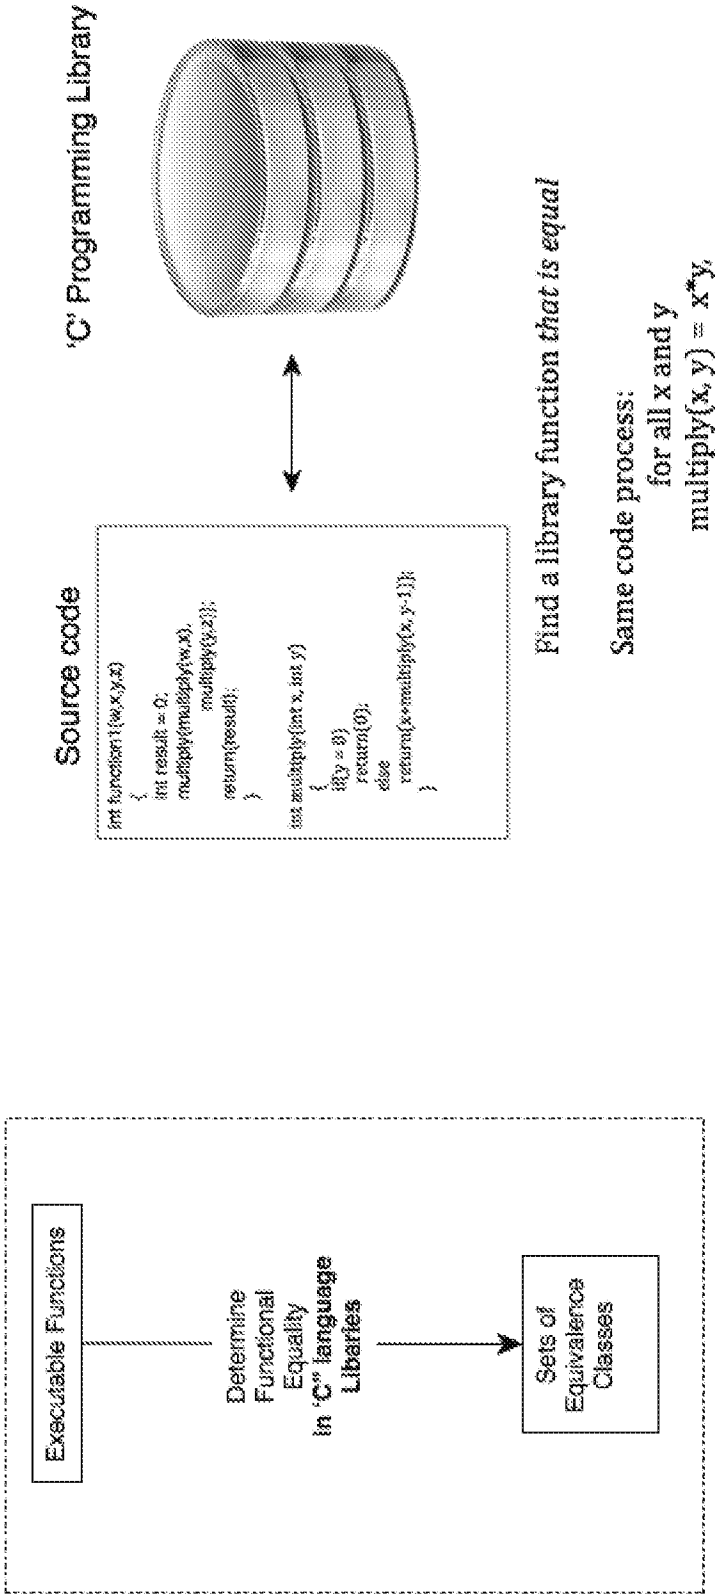


FIG. 24

Consolidate and Update Source

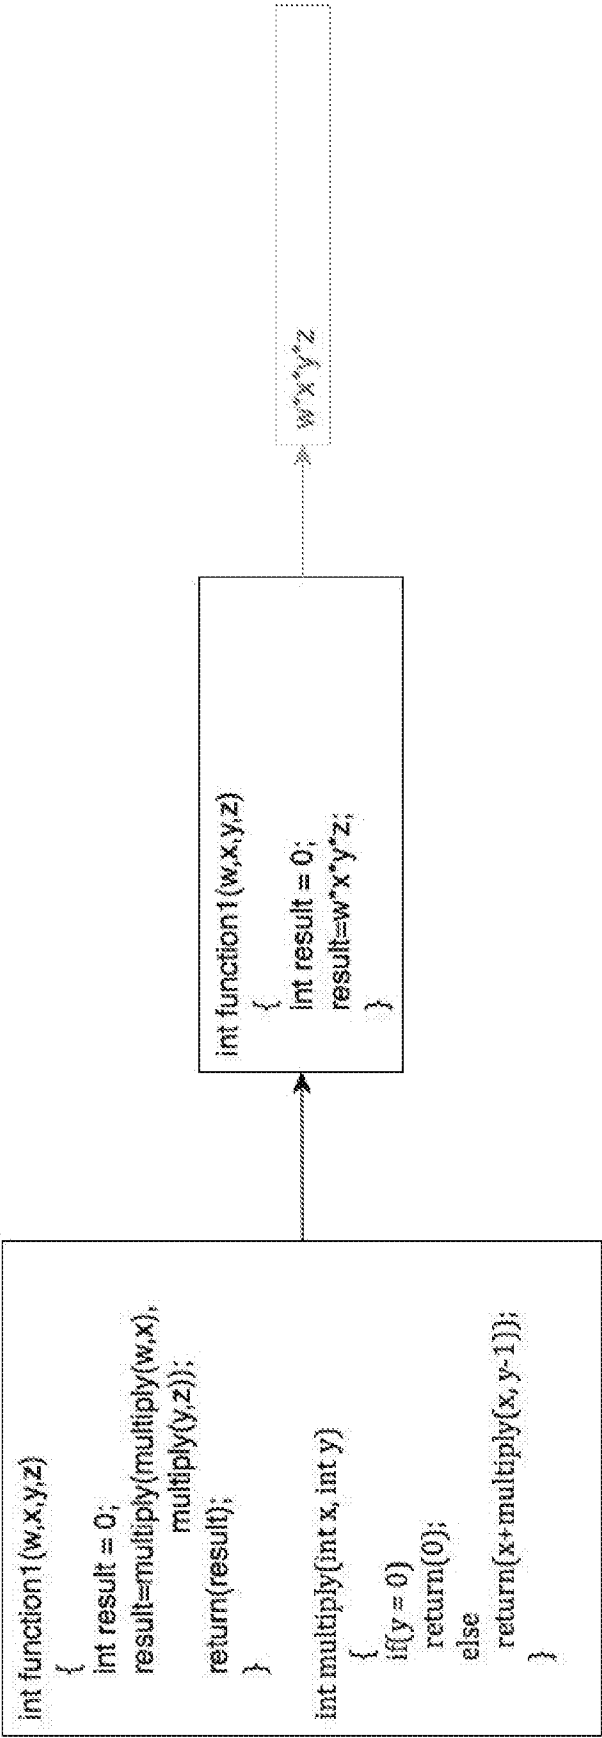


FIG. 25

FIG. 26

Implications

- Problem Class: Reuse
 - Component assembly, application libraries, etc
 - Envision programmer “spell checker” for reuse built into IDE
- Productivity:
 - Same as functional equivalence, >>100x
- Quality
 - Complete and correct
- Implications continue.....
 - Example: the Kernel of Social Computing: using each other's code without talking, meeting or written documentation

FIG. 27

Really a “Phase Change?”

stackoverflow July 2015

Is finding the equivalence of two functions undecidable?

Is it impossible to know if two functions are equivalent? For example, a compiler writer wants to determine if two functions that the developer has written perform the same operation, what methods can he use to figure that one out? Or can what can we do to find out that two TMs are identical? Is there a way to normalize the machines?

- ▲ Given an arbitrary function, f , we define a function f' which returns 1 on input n if f halts on input n . Now, for some number x we define a function g which, on input n , returns 1 if $n = x$, and otherwise calls $f'(n)$.
- 28 If functional equivalence were decidable, then deciding whether g is identical to f' decides whether f halts on input x . That would solve the Halting problem. Related to this discussion is Rice's theorem.
- ✓

Conclusion: functional equivalence is undecidable

- Aren't people already doing this? No.
 - Social media proof from the compiler community
 - 1000's of vicious participants
- This folks are practical; they know the math; they have enormous economic incentive to innovate.. And yet they don't see it

Paraphrase: we can't do reuse because functional equivalence is undecidable

This is an Applied v. Pure category mistake

Functions and Definitions

- There are multiple senses of the word function in computer science
 - The historically mathematical sense of a function
 - The programming language sense, as in a functional language
 - The pragmatic sense, as in: what is the *function* of that tool?

We define functions in terms of the historical mathematical sense, as developed in early 20th century computation theory

This definition gives us language independence

FIG. 28

- A programming language function, as in 'C' examples, is syntactic structure
- Using compiler and program analysis techniques, we extract the mathematical functions implicit in the source code
- This makes the "functional symbols" language independent

```

struct Act {
    int Act;
    int cBl;
};

struct Log {
    int fAct;
    char tranId;
    int tranAmt;
    time_t stamp;
};

void
wTran(pw,acct,amt)
{
    bool scTk;
    int fRate=0.10;
    char withId='w';
    int fee=10;
    time_t timeStamp;
    Log logRec;
    Act acctRec;

    scTk= secChk(pw,acct);
    timeStamp=time(NULL);

    acctHnd=getHndI("chkAcct");
    lgHnd=getHndI("chkLog");

    readDirect(acctHnd,acctRec);
    acctRec.cBl=acctRec.cBl-amt;
    logRec.fAct=acct;
    logRec.tranId=withId;
    logRec.tranAmt;
    memcpy (logRec, timeStamp, sizeof (time_t));

    if(secTk)
    {
        writeSeq(lgHnd,logRec);
    };

    fee=rRate*amt;
    acctRec.cBl=acctRec.cBl-fee;
    if(secTk)
    {
        writeDirect(acctHnd,acctRec);
    };

    return(NULL);
}
    
```

FIG. 29

Function: Formal Dependency Analysis

```
void
wTrans(pw,acct,amt)
{
    int transed=1;
    char wdate[10];
    int fee=10;
    time_t timeStamp;
    long logFile;
    Act acctRec;

    secTk=secChk(pw,acct);
    timeStamp=time(&t);
    acctInd=getHandl("chkAcct");
    logFile=logFileTransLog;
    readDirect(acctInd,acctRec);
    acctRec.cBl=acctRec.cBl+amt;
    logFile=logFileSec;
    logFileTransed++;
    logFileTransed++;
    moneygy(logFile, acctRec, timeStamp, acctInd);
    if(secTk)
    {
        writeSecLogInd(logFile);
    }
}

floatRate*amt
acctRec.cBl=acctRec.cBl+fee;
if(secTk)
{
    writeDirect(acctInd,acctRec);
}
return(amt);
}
```

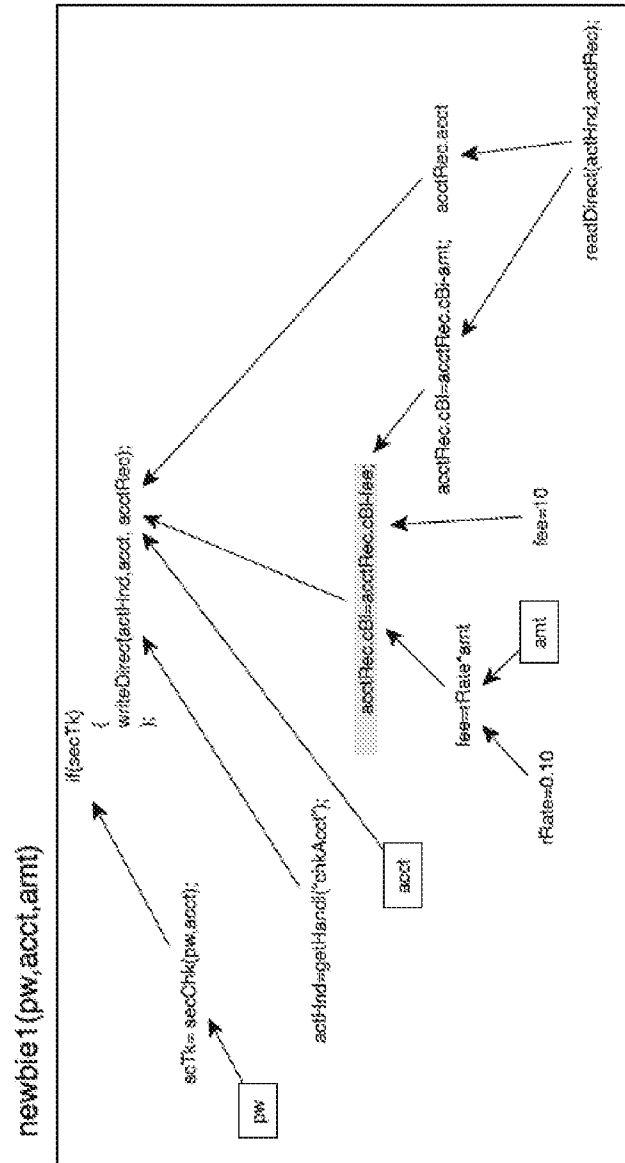


FIG. 30

For all functions

```
void
wTran(pw,acct,amt)
{
    int i;
    char *wtr="w";
    int len=10;
    time_t timeStamp;
    Log logRec;
    Act acctRec;

    secTk= secChk(pw,acct);
    timeStamp=time(NULL);
    logInd=getHandl("chkLog");
    readDir(logInd,acctRec);
    acctRec.chk=acctRec.chk+amt;
    logRec.fAct=acct;
    logRec.transId=withId;
    memcpy (logRec, timeStamp, sizeof (time_t));

    if(secTk)
    {
        writeSeq(logInd,logRec);
    }

    logRec.fAct=acct;
    logRec.transId=withId;
    logRec.transAmt;

    if(secTk)
    {
        writeDir(logInd,acctRec);
    }

    return(NULL);
}
```

newbie2(pw,acct,amt)

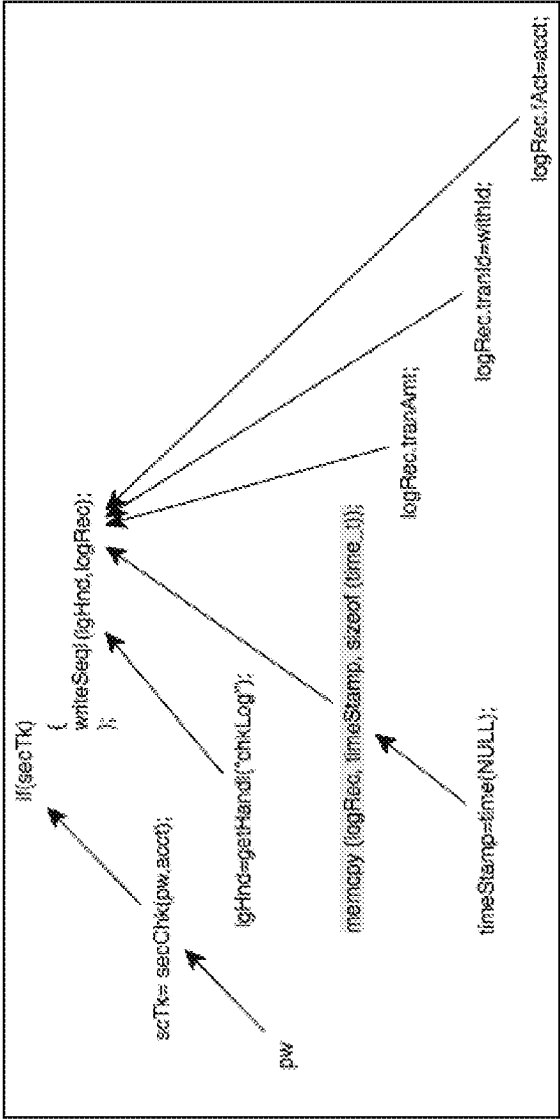


FIG. 31

Refactor to Function in 'C'

```
struct Act {
    int Act;
    int cBl;
};

struct Log {
    int Act;
    char tranId;
    int tranAmt;
    time_t stamp;
};

void
wTran(pw,acct,amt)
{
    bool scTk;
    int fRate=0.10;
    char withId='W';
    int fee=10;
    time_t timeStamp;
    Log logRec;
    Act acctRec;

    scTk= secChk(pw,acct);
    timeStamp=time(NULL);


    actInd=getHandl("chkAcct");
    lgtInd=getHandl("chkLog");

    readDirect(actInd,acctRec);
    acctRec.cBl=acctRec.cBl-amt;
    logRec.fAct=acct;
    logRec.tranId=withId;
    logRec.tranAmt;
    memcpy (logRec, timeStamp, sizeof (time_t));

    if(scTk)
    {
        writeSeq(lgtInd,logRec);
    };

    fee=fRate*amt
    acctRec.cBl=acctRec.cBl-fee;
    if(scTk)
    {
        writeDirect(actInd,acctRec);
    };
    return(NULL);
}
```

```
void
wTran(pw,acct,amt)
{
    bool scTk;
    scTk= secChk(pw,acct);
    newId= (act, amt, acct);
    newId= (acct, amt, acct);
    return(NULL);
}
```

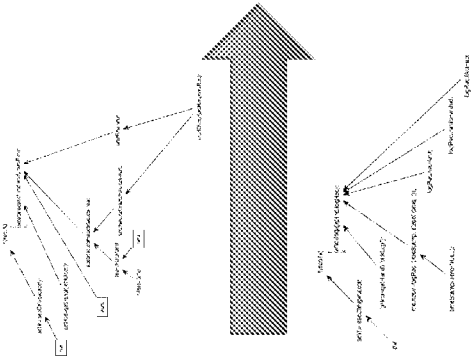

```
void
newId(act, amt, scTk)
{
    int fRate=0.10;
    char withId='W';
    int fee;
    Act acctRec;

    actInd=getHandl("chkAcct");
    readDirect(actInd,acctRec);
    acctRec.cBl=acctRec.cBl-amt;
    fee=fRate*amt;
    acctRec.cBl=acctRec.cBl-fee;
    if(scTk)
    {
        writeDirect(actInd,acctRec);
    };
    return(NULL);
}
```

```
void
newId(act, amt, scTk)
{
    time_t timeStamp;
    Log logRec;
    timeStamp=time(NULL);

    lgtInd=getHandl("chkLog");
    logRec.fAct=act;
    logRec.tranId=withId;
    logRec.tranAmt;
    memcpy (logRec, timeStamp, sizeof (time_t));


    if(scTk)
    {
        writeSeq(lgtInd,logRec);
    };
    return(NULL);
}
```

FIG. 32

FIG. 33

Additive Representation, not Changing

- We're not changing source, we're annotating it with layers of representation*
- The layers are linked together, so that they enable viewing source from different perspectives

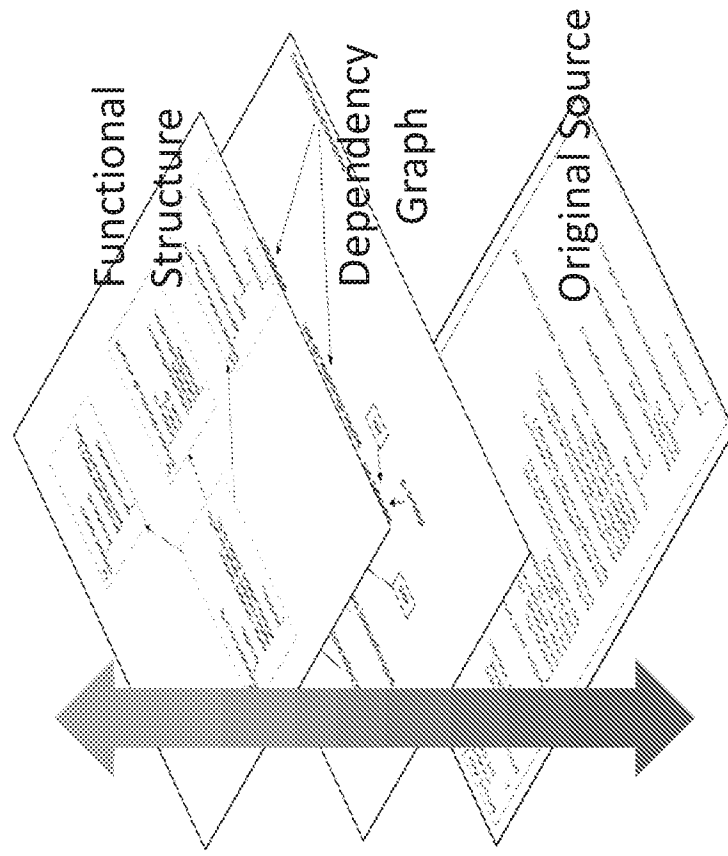

*Derivative: we could be converting

Implications

- Problem Classes: Dependency, Separation of Concerns, Comprehension, Separation of Concerns
 - Language independence !!!
 - Dependency is at the root of many engineering and evolution tasks, and they don't scale well for individual cognition, but do in the machine.
 - Logging should be a separate concern architecturally speaking
 - Cohesion of integral functions are easier to understand and maintain
- Productivity and quality:
 - The same

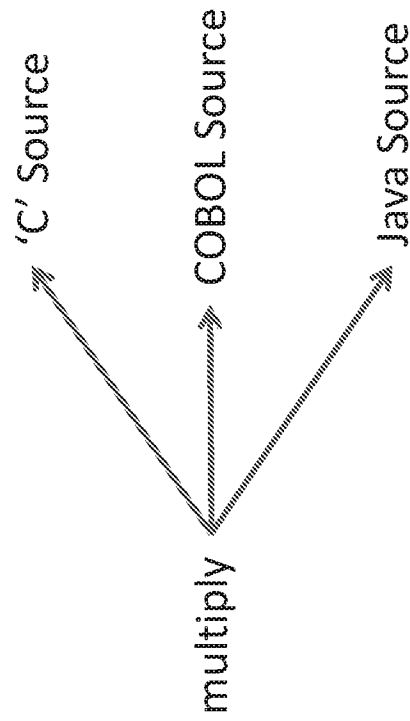


FIG. 34

Phase, Essence, Intuition

- We started with ironing out the chaos from different specification of the same solution
- Now we're saying the chaos of programming languages can be ignored and reduced to one universal representation

FIG. 35

The Next Level: Operations

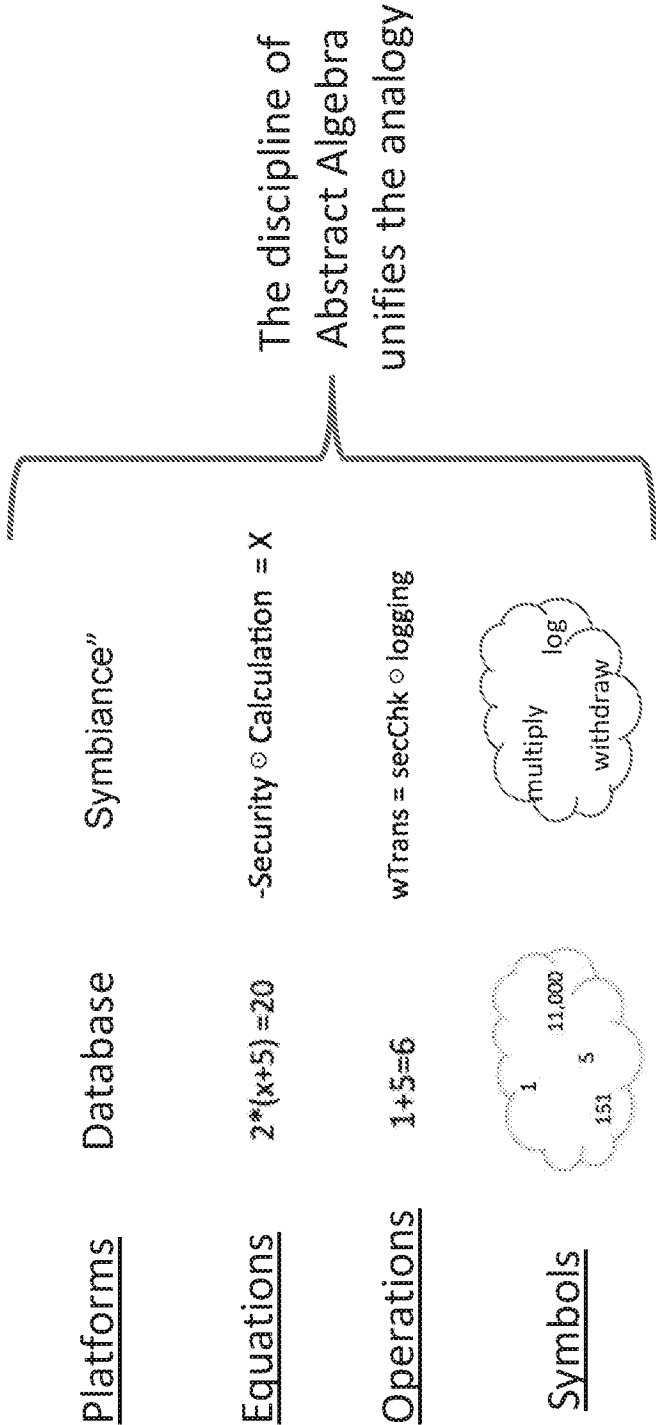


FIG. 36

FIG. 37 Operations, Abstraction and Source Code

- Our formal algebra, SEAL, provides a natural, intuitive and comprehensive solution to both abstraction and operating on software without touching the programming languages
- It allows one to think of code as a symbol, and manipulate it as such, like a universal CASE tool, layered on any language
- Consider refactoring the 'C' withdrawal function

```

struct Act {
    int Act;
    int cBi;
};

struct Log {
    int fAct;
    char tranId;
    int tranAmt;
    time_t stamp;
};

void
wTran(pw,acct,amt)
{
    bool scTk;
    int fRate=0.10;
    char withId='w';
    int fee=10;
    time_t timeStamp;
    Log logRec;
    Act acctRec;

    scTk= secChk(pw,acct);
    timeStamp=time(NULL);

    actHnd=getHndf("chkAcct");
    lgHnd=getHndf("chkLog");

    readDirect(actHnd,acctRec);
    acctRec.cBi=acctRec.cBi-amt;
    logRec.fAct=acct;
    logRec.tranId=withId;
    logRec.tranAmt;
    memcpy (logRec, timeStamp, sizeof (time_t));

    if(secTk)
    {
        writeSeq(lgHnd,logRec);
    };

    fee=fRate*amt
    acctRec.cBi=acctRec.cBi-fee;
    if(secTk)
    {
        writeDirect(actHnd,acctRec);
    };

    return(NULL);
}

```


Dependency of Functions

Independence/Dependence
of function is exposed by
defining the elemental
functions


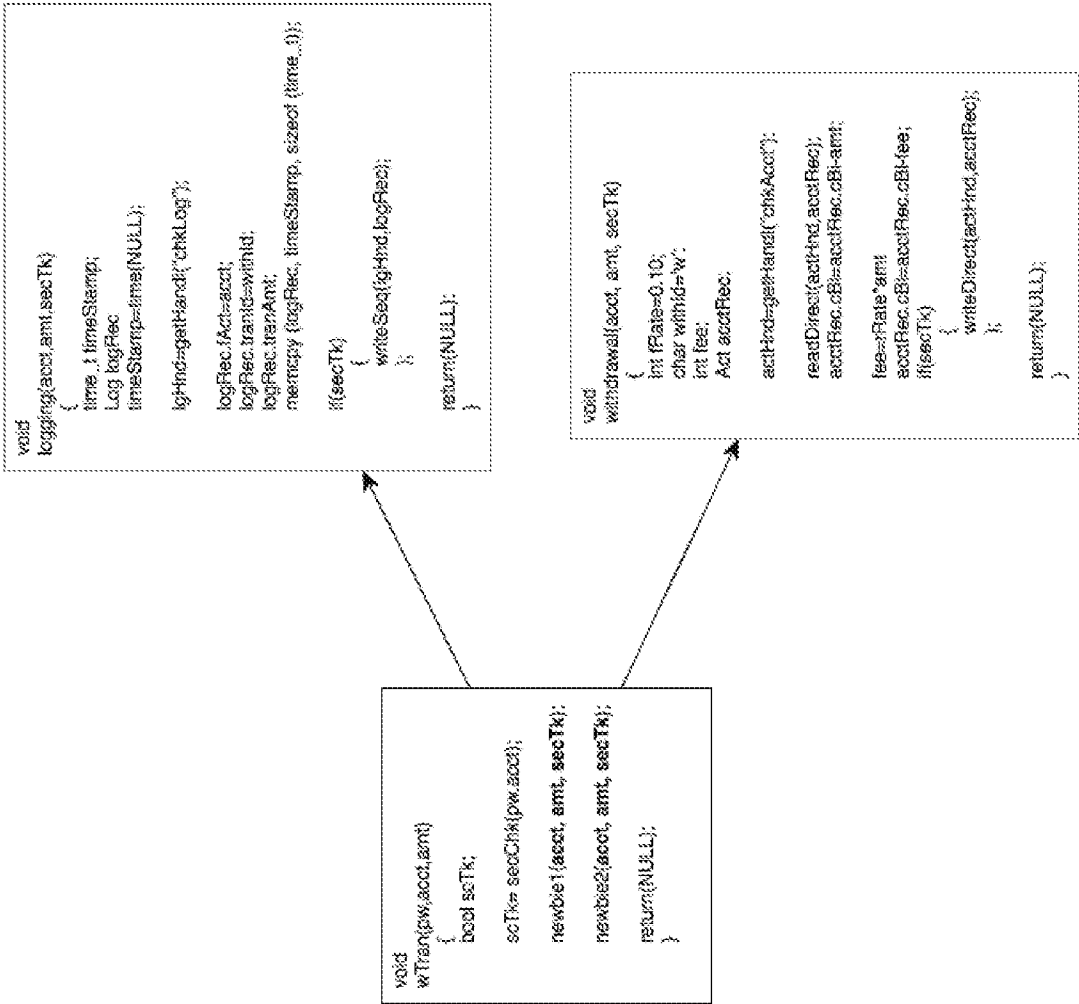


FIG. 38

Algebraic Operations Correspond to
Dependency (Gate)

FIG. 39

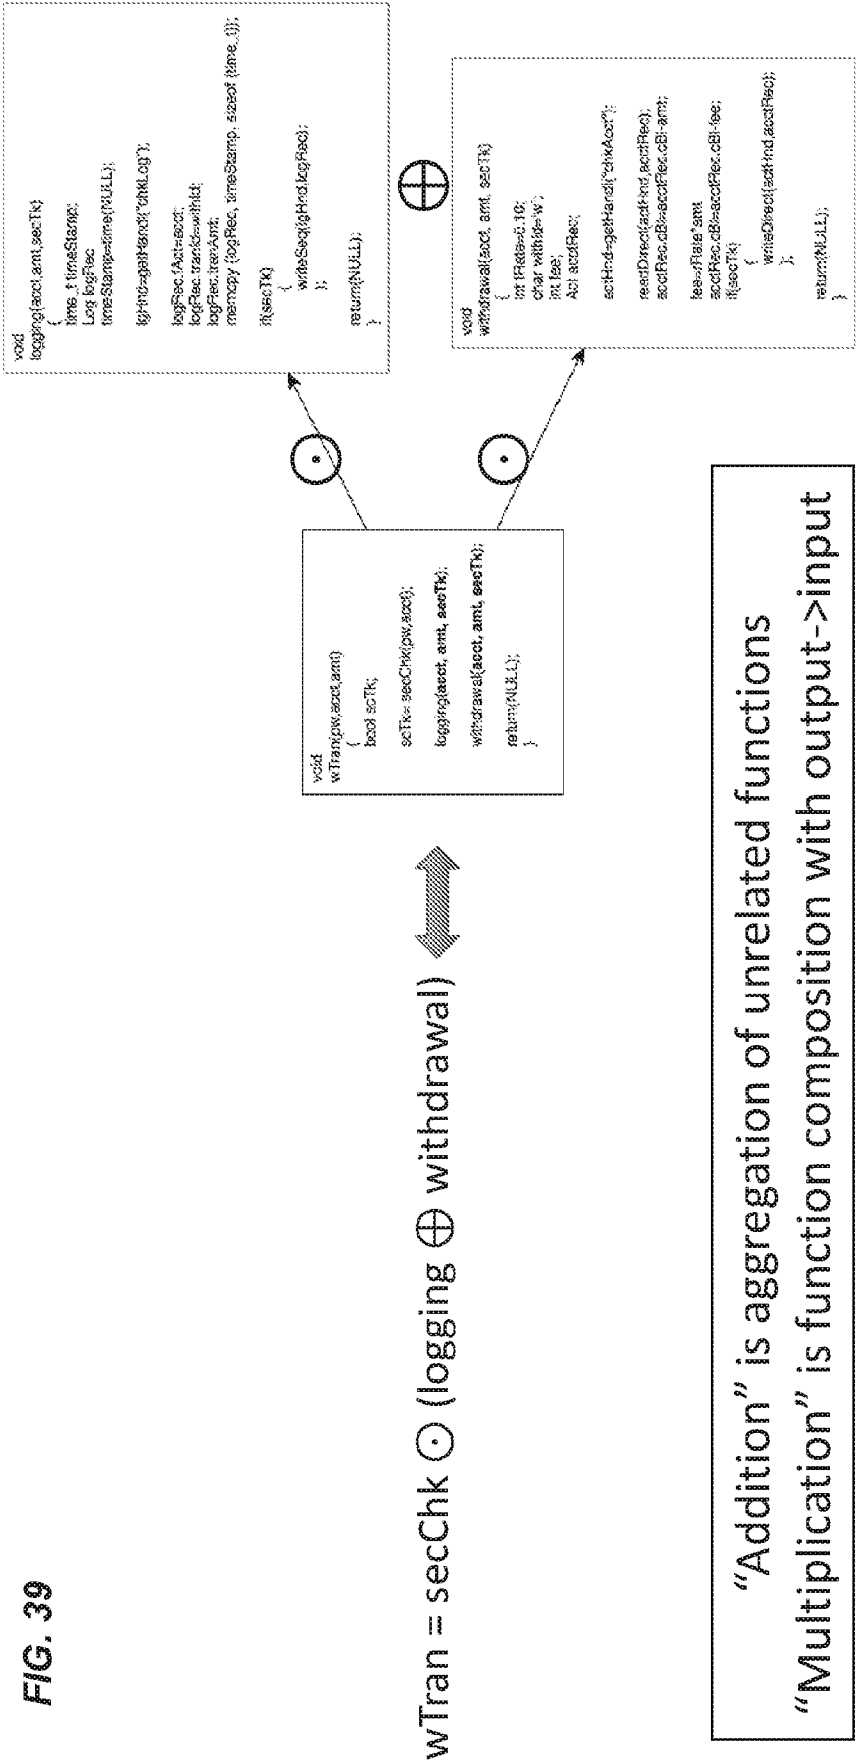

Changing Source is Solving Equations*

Delete the old logging? Make equality subtract from both sides. Simplify

$$(\text{secChk} \odot \text{logging}) \oplus (\text{secChk} \odot \text{withdrawal}) - (\text{secChk} \odot \text{logging})$$

Source mapping allows us to *parallel* the algebraic in the source

$$\text{wTrans} = \text{secChk} \odot \text{logging}$$

```
void  
wTrans(pw,acct,amt)  
{  
    bool secTk;  
    secTk= secChk(pw,acct);  
    withdraw(acct, amt, secTk);  
    return(NULL);  
}
```

```
void  
withdraw(acct, amt, secTk)  
{  
    int PRate=0.10;  
    char width= 'w';  
    int fee;  
    A21 acctRec;  
    acctInd= getHandl("chk&acct");  
    readDirect(acctInd,acctRec);  
    acctRec.cBI=acctRec.cBI- amt;  
    fee=Rate*amt;  
    acctRec.cBI=acctRec.cBI- fee;  
    if(secTk)  
    {  
        writeDirect(acctInd,acctRec);  
    }  
    return(NULL);  
}
```

FIG. 41

We’re now operating at an abstract level that’s easier for both humans and AI’s, totally algorithmic and less complex

FIG. 43

Implications

- Problem Class: Software Abstraction and Manipulation
 - Replaces specialized high level languages, design languages, etc.
 - It is both more comprehensible and operational (unlike UML etc.) because you can change software with it
 - This the CASE di tutti CASE, the boss of all bosses
 - This provides the basis for a lingua franca of software, any programming language, any application. Enabling active communication between agents and humans.
- Productivity and Quality:
 - The same

FIG. 44 Phase, Essence, Intuition

- A single theoretical framework inherits hundreds of years of applicable results, e.g. solving equations for unknowns
- Reducing solving engineering problems to solving simple equations !!
- Making these changes that have to be right, correct, error-free
- Universality: One abstraction for all languages, reducing the chaos of how to model to a single symbolic formulation

FIG. 45

Phase and Essence Goals

	Old Phase	New Phase
Professional Labor	Labor Intensive Slow	Automation Leverages 100X Multiplier
Quality	Labor intensive Haphazard Slow	Automatically Verified Often Unnecessary 100x Faster
Programming Specification	Chaotically Idiosyncratic	Normalized to Coherent
Programming Media	Programming Language Important	Programming Languages Peripheral
Comprehending System "Knowledge"	Opaque Painful Learning Curve	Transparent Easy Learning Curve
Application Architecture	Chaotically Idiosyncratic	Normalized to Coherent
Leveraging Application "Knowledge" for Productivity	Human Engineers Experience	Application System becomes Active Agent

The Last Two Levels, Combined


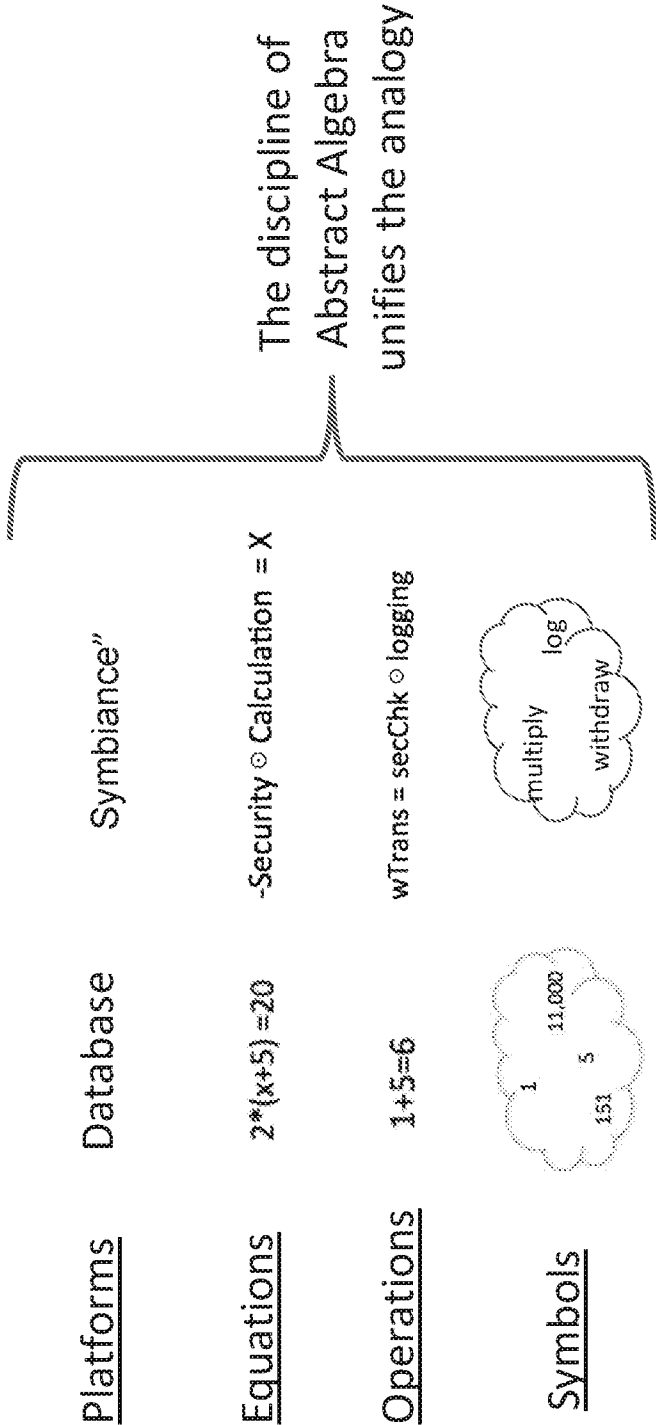


FIG. 46

Database and Symbolic Mapping

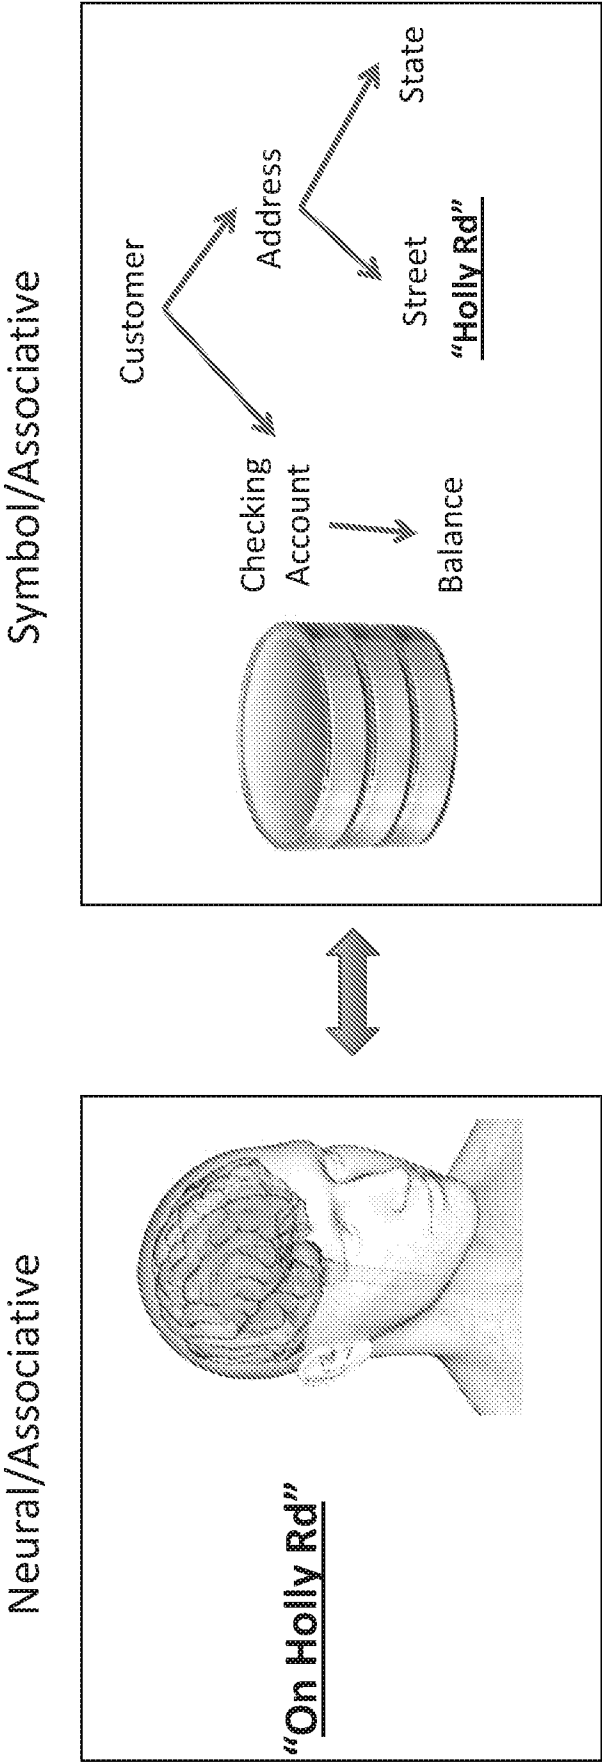

Query: Where does John Smith live?

FIG. 47

FIG. 48

Map DB of Capabilities

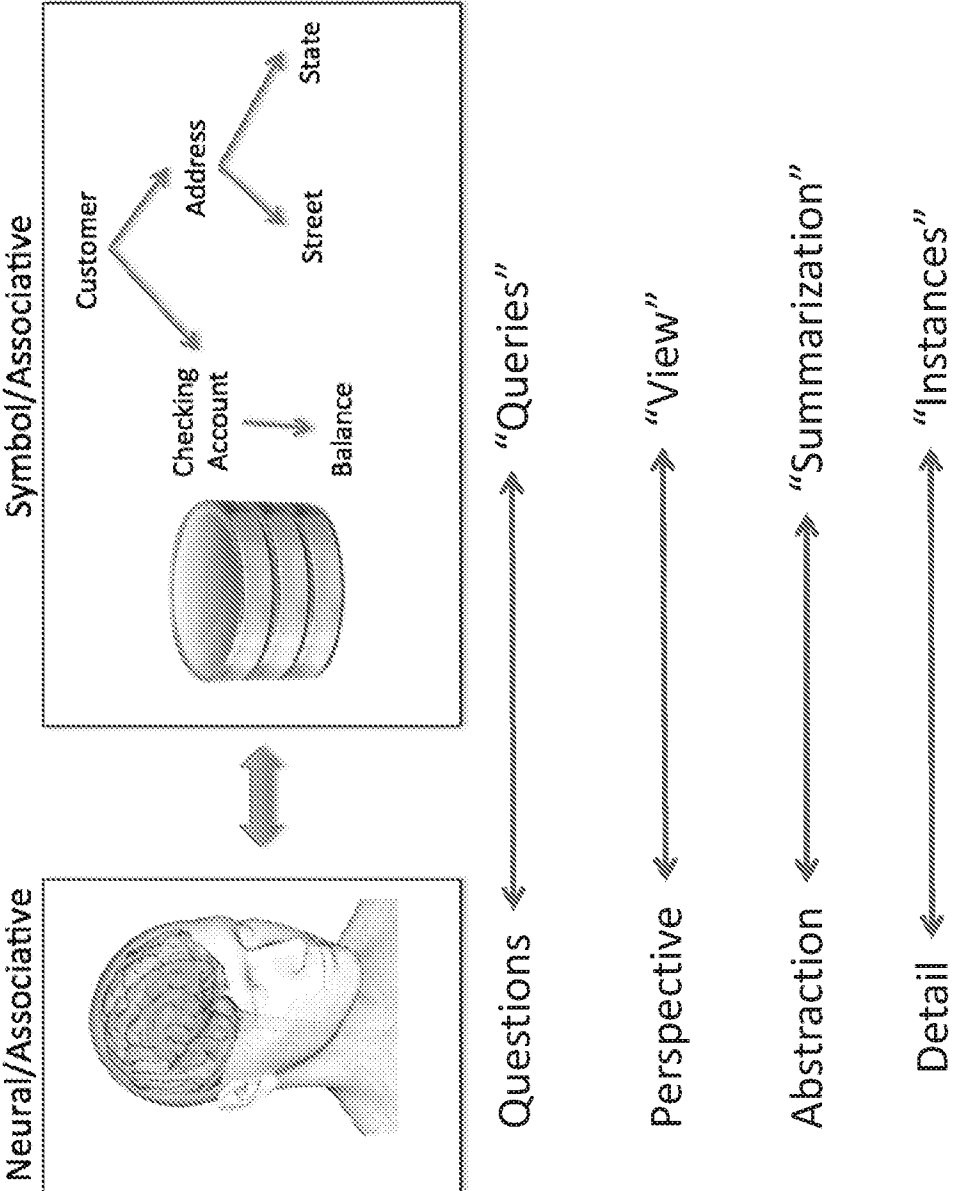


FIG. 49 Software Application Analog?


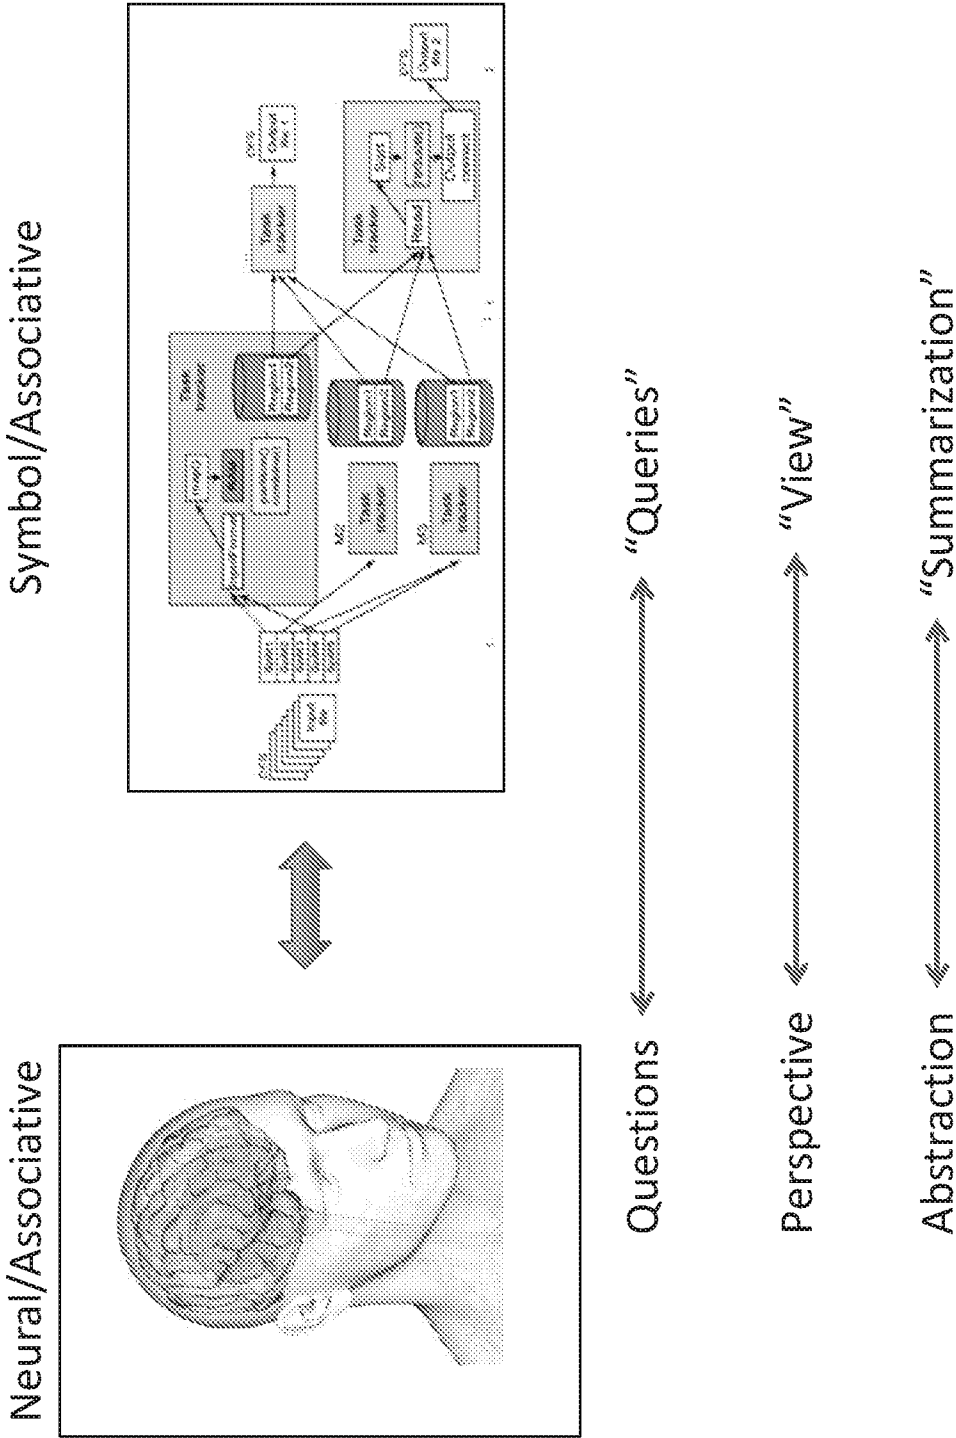


FIG. 50

AI and the Simulating Species

- Social and hunting simulation synergized
- Able to imagine and play with hypothetical sequences of events and outcomes, “Counterfactual Reasoning”
- We plan and model using
 - Simulation
 - Events
 - Changing world states

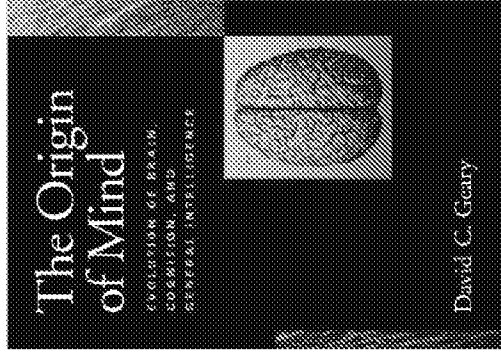

Some times mental simulations don't work out as expected



FIG. 51

Simulation & Businessman's Mind

There are 80 million dogs in the
US who are underserved in
Financial Services


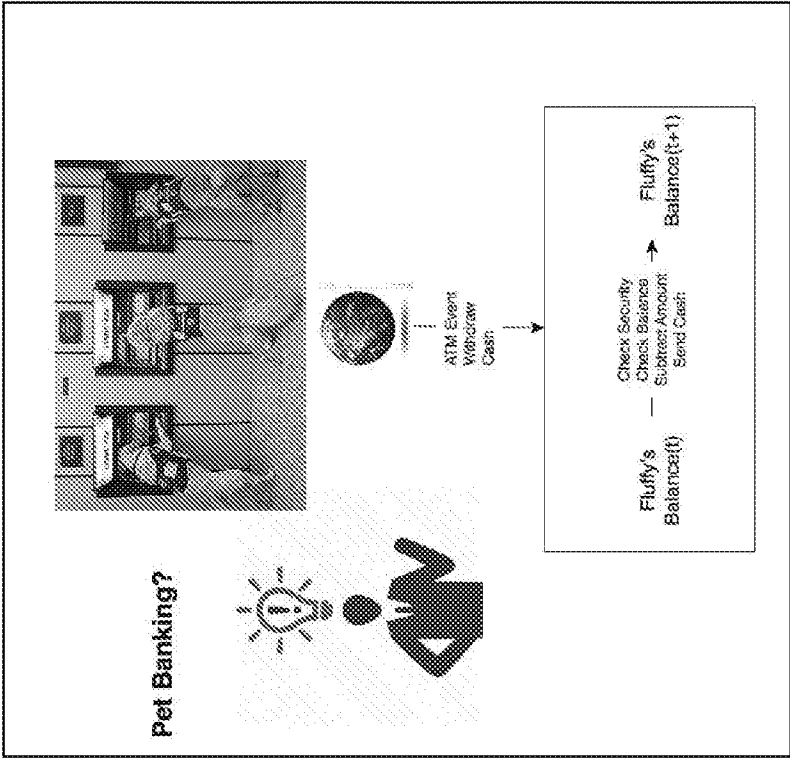


FIG. 52

Simulation to Software Model

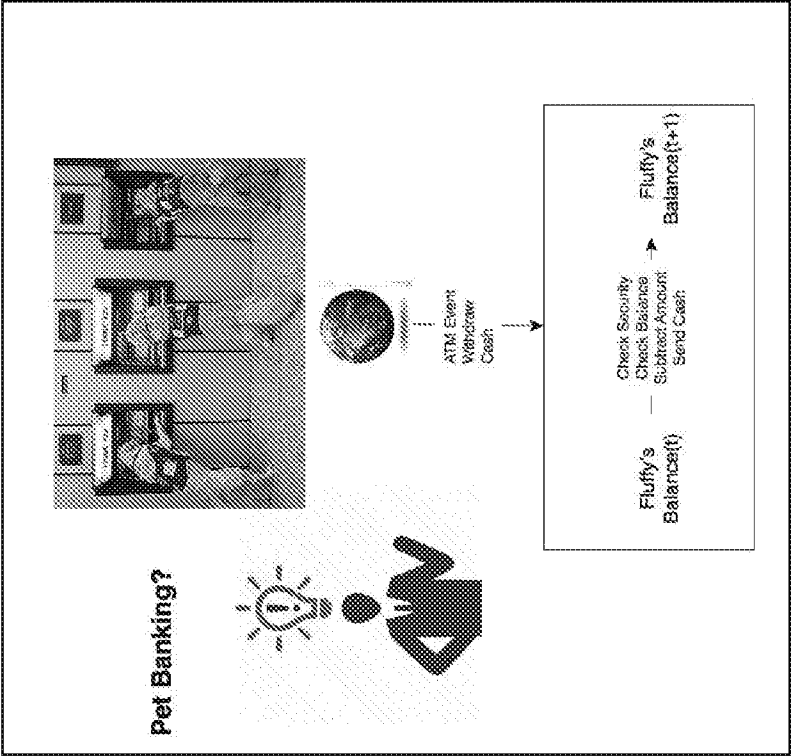

Build Software

```
struct Act {
    int Act;
    int cBl;
};

struct Log {
    int fact;
    char transId;
    int tranAmt;
    time_t stamp;
};


void
wTrans(pw, acct, amt)
{
    bool secTk;
    int fRate=0.10;
    char withId='w';
    int fee=10;
    time_t timeStamp;
    Log logRec;
    Act acctRec;

    secTk= secChk(pw, acct);
    timeStamp=time(NULL);
    acctHnd=getHnd("chkAcct");
    lgHnd=getHnd("chkLog");
    readDirect(acctHnd, acctRec);
    acctRec.cBl=acctRec.cBl-amt;
    logRec.fAct=acct;
    logRec.transId=withId;
    logRec.tranAmt;
    memcpy (logRec, timeStamp, sizeof (time_t));
    if(secTk)
    {
        writeSeq(lgHnd, logRec);
    };
    fee=fRate*amt
    acctRec.cBl=acctRec.cBl-fee;
    if(secTk)
    {
        writeDirect(acctHnd, acctRec);
    };
    return(NULL);
}
```

FIG. 53

Application Function Detail

FIG. 55

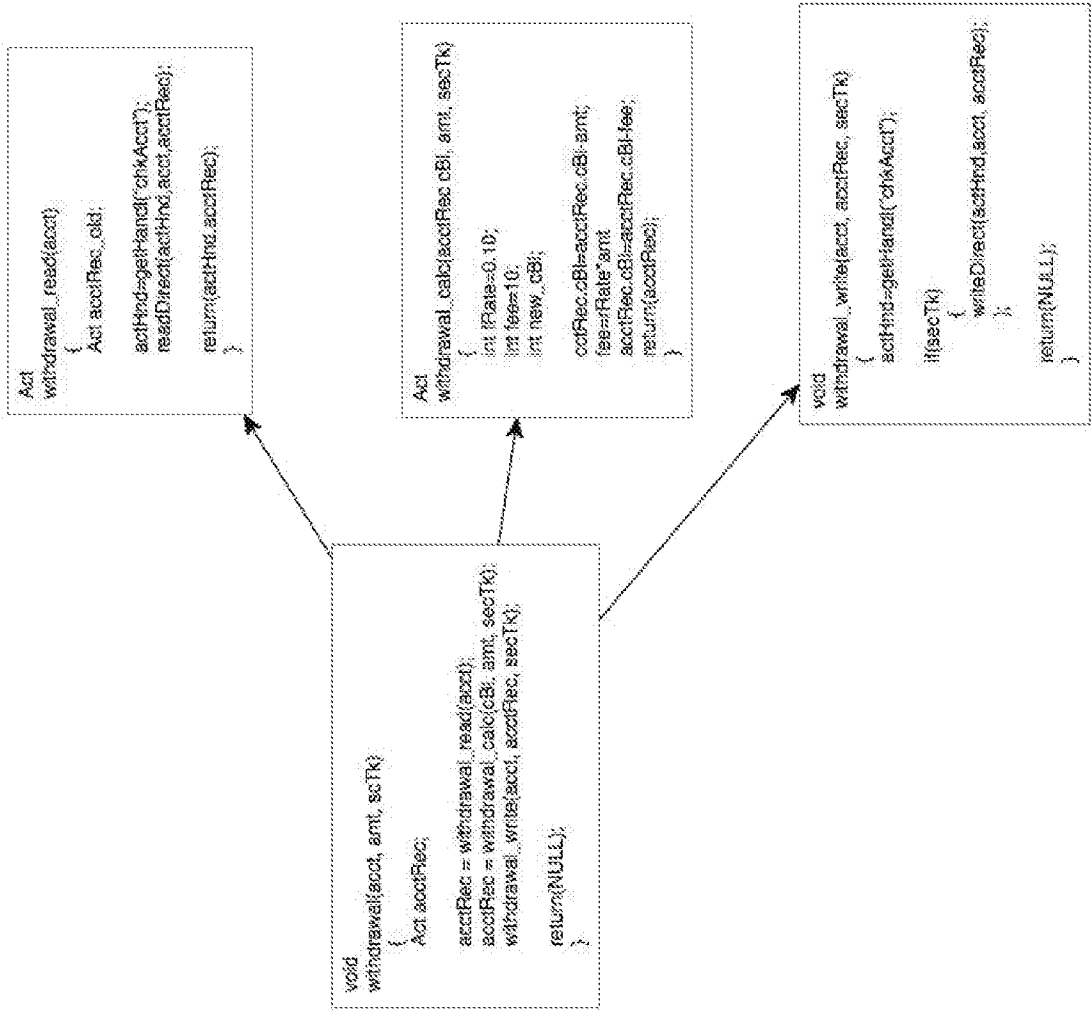

Algebraically:

withdrawal =

withdrawal_read

⊙ withdrawal_calc

⊙ withdrawal_write

Application Functions Normalize

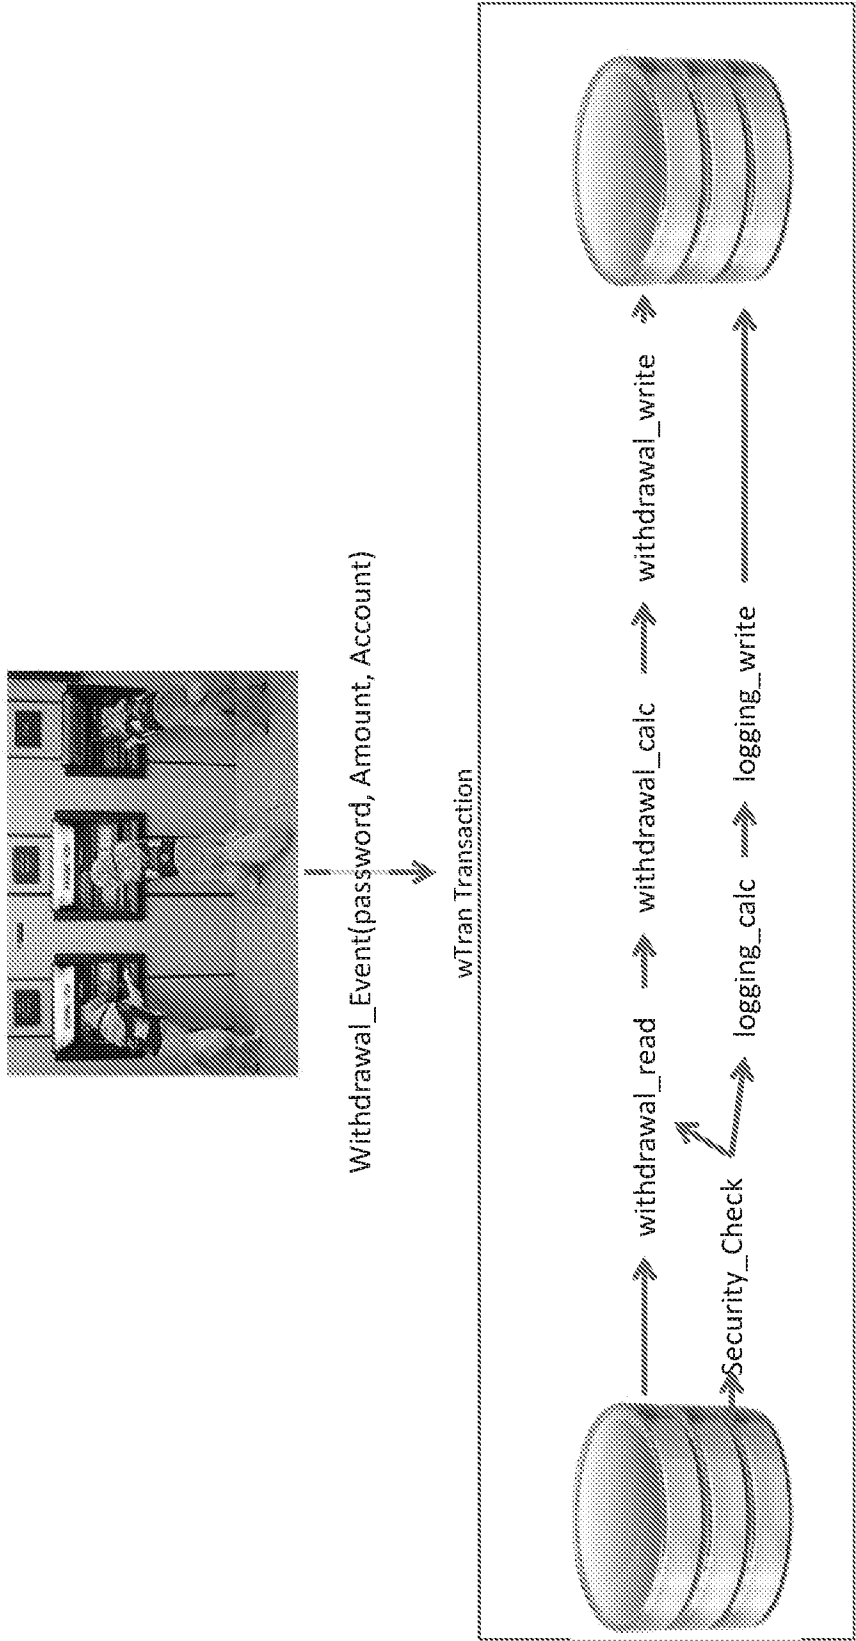


FIG. 56

Meaningful Names?

FIG. 57


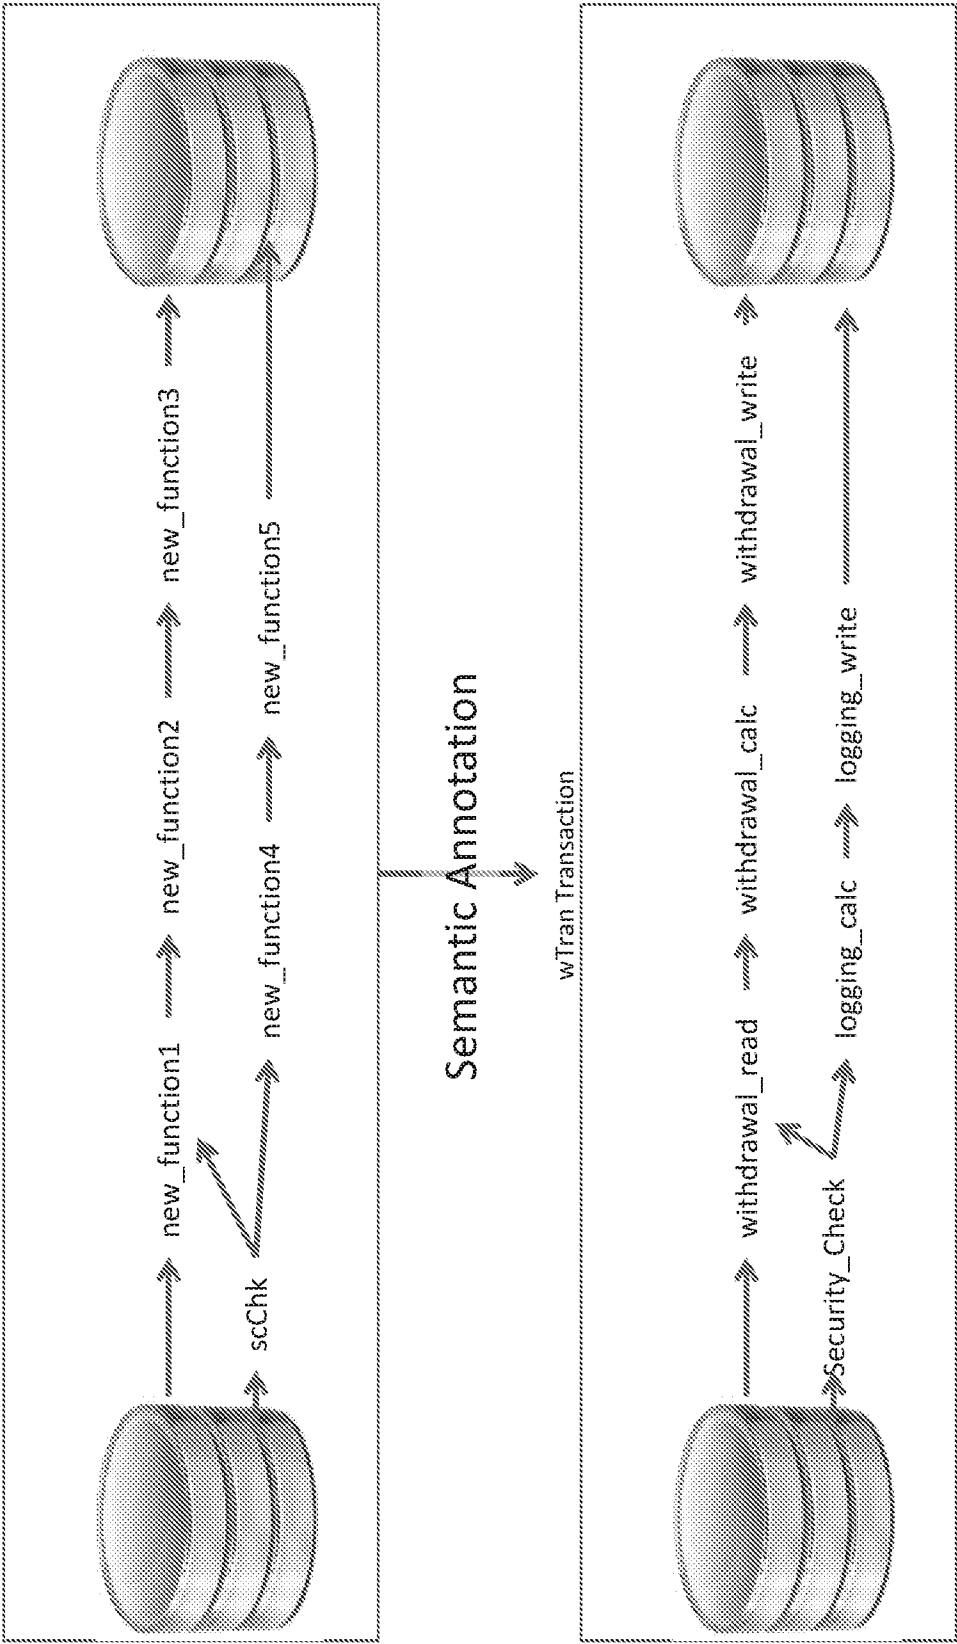


FIG. 58

Semantic Annotation (Gate)

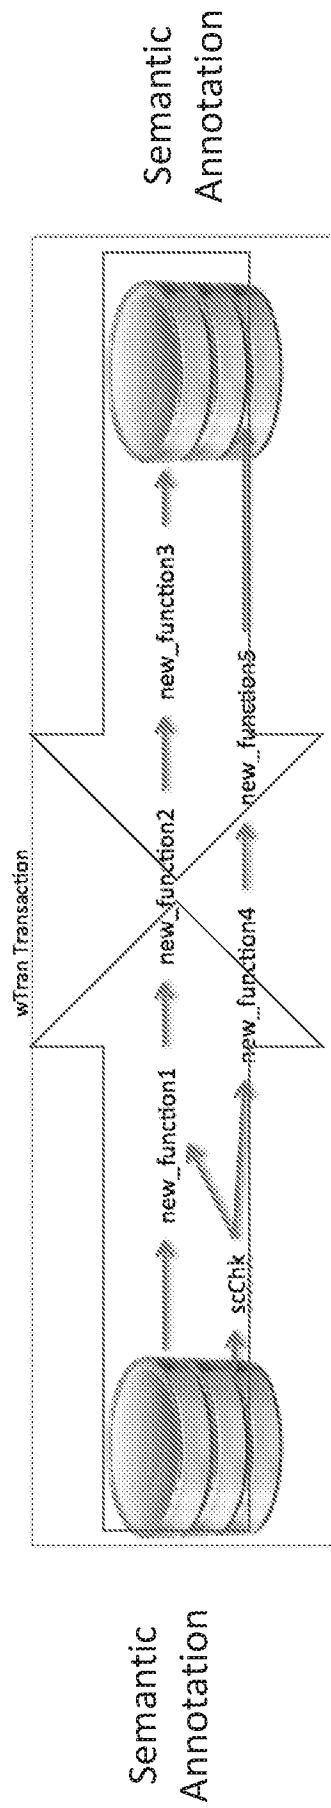

- Using the industry's 40 year investment in information modeling, data science, and ontology:
- We flow the semantic type annotation through the representational structures
- This yields meaningful names, without manual labor (beyond set-up)
- And rides upon the "dependency" analysis introduced in the previous presentation

Semantic Annotation Code Level
(Derivative)



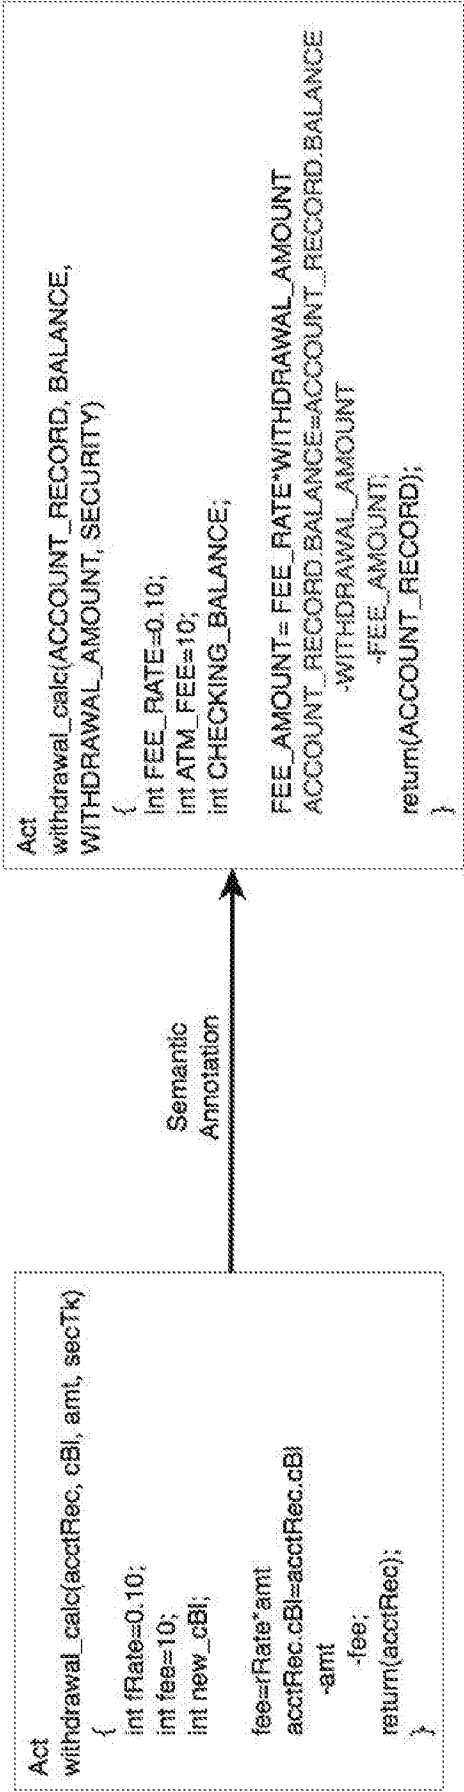


FIG. 59


Included: Simplification with Equivalence

FIG. 60

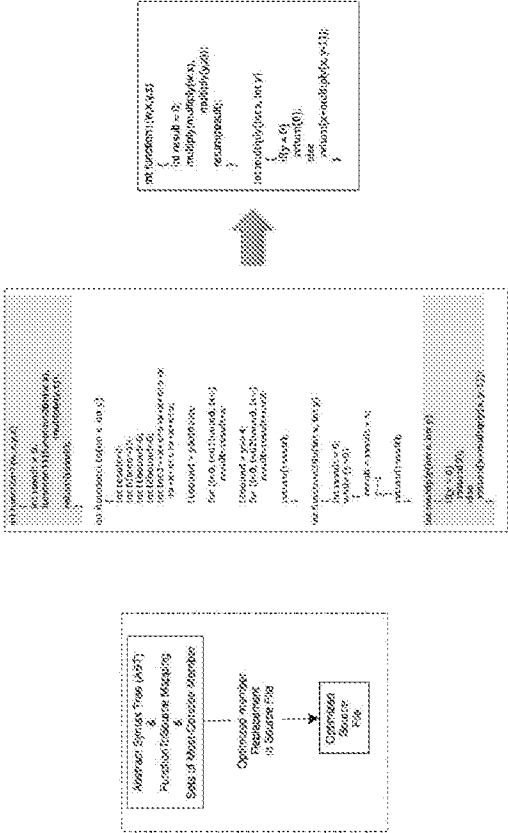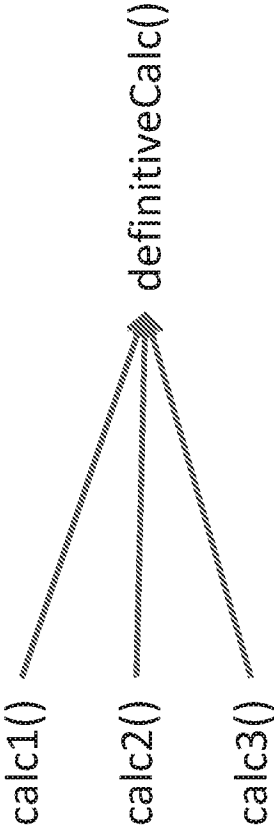

Semantic Basis: NL and Self-Documentation

FIG. 61

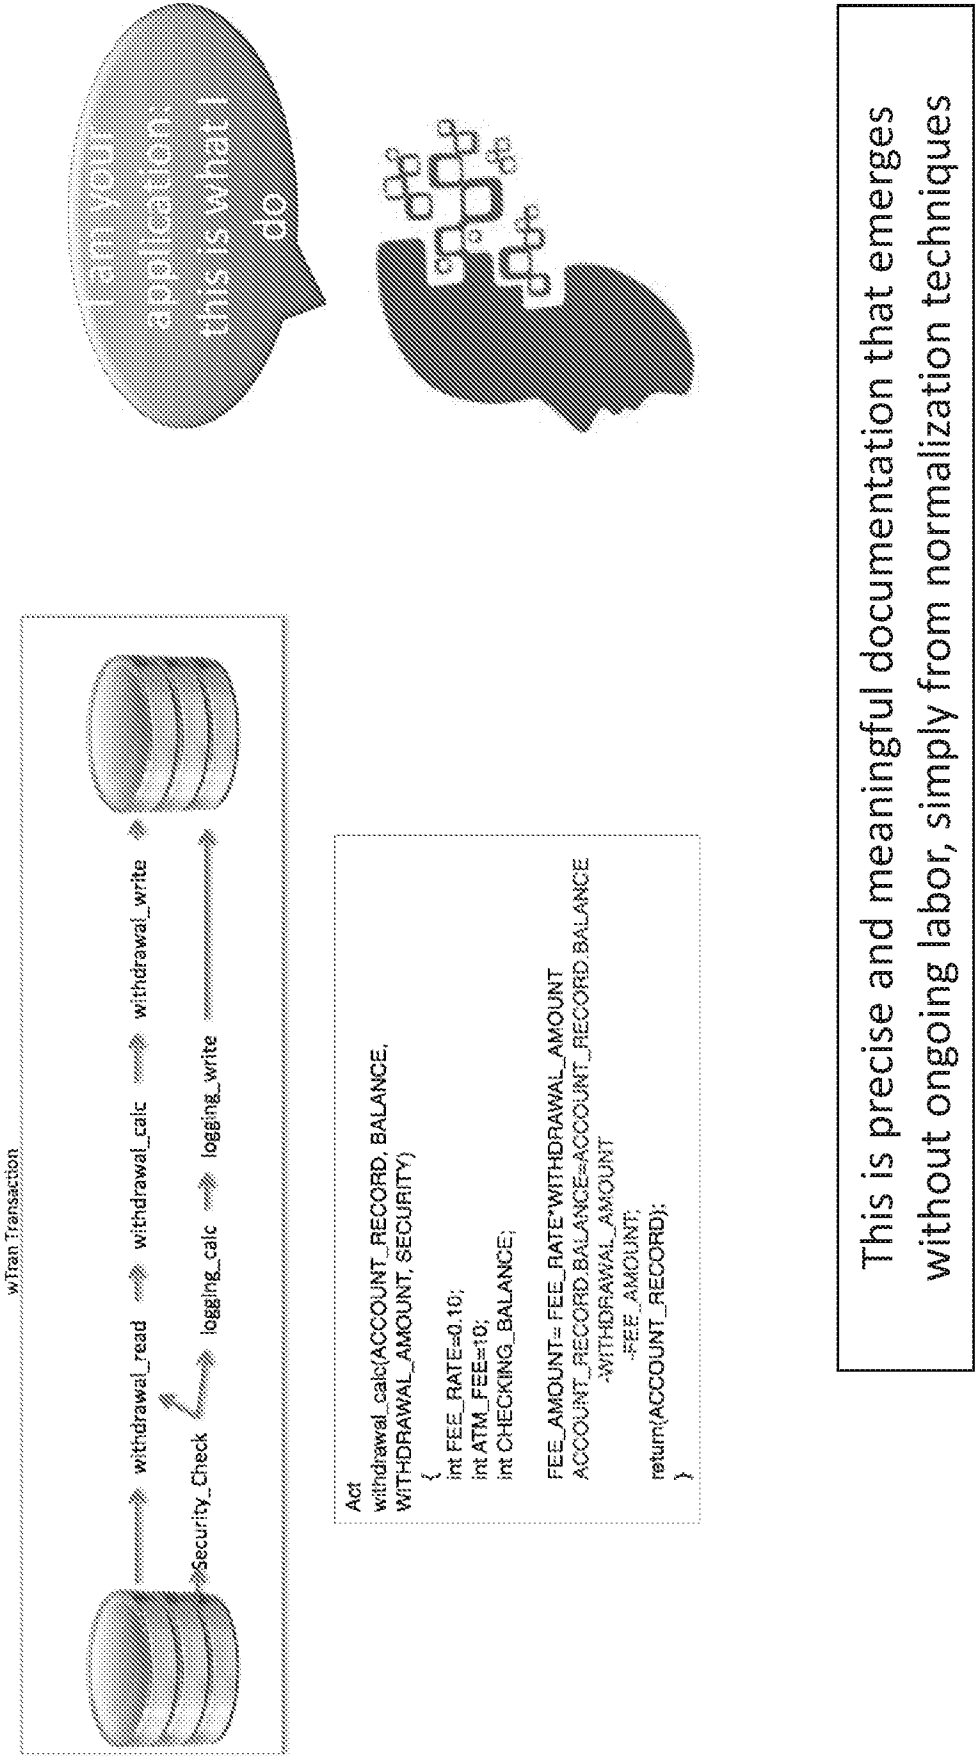

Map Cognition to Computational Model (Gate)

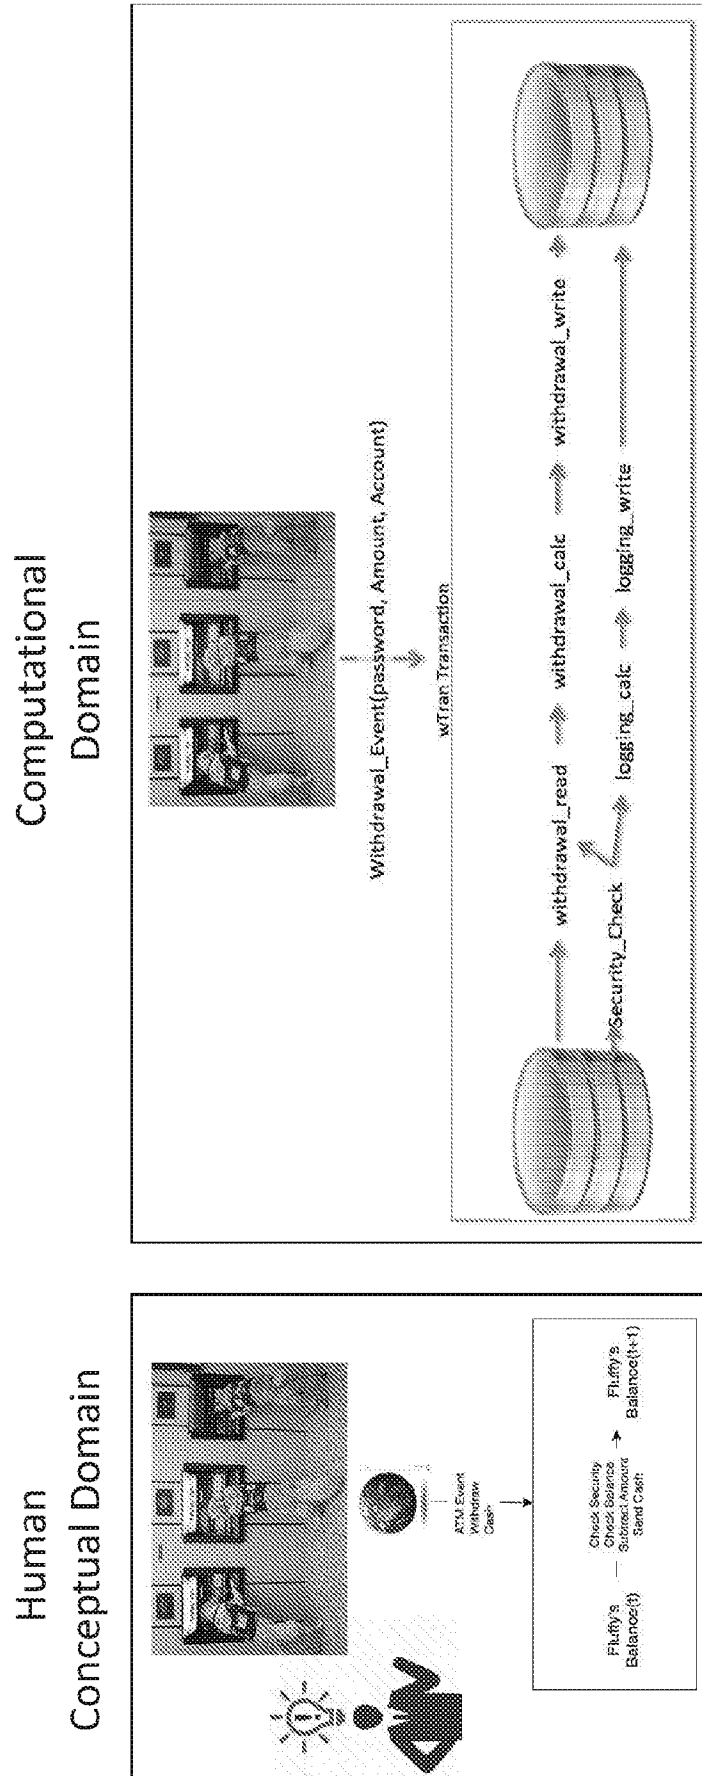


FIG. 62

Map Human Understanding to Code Structure


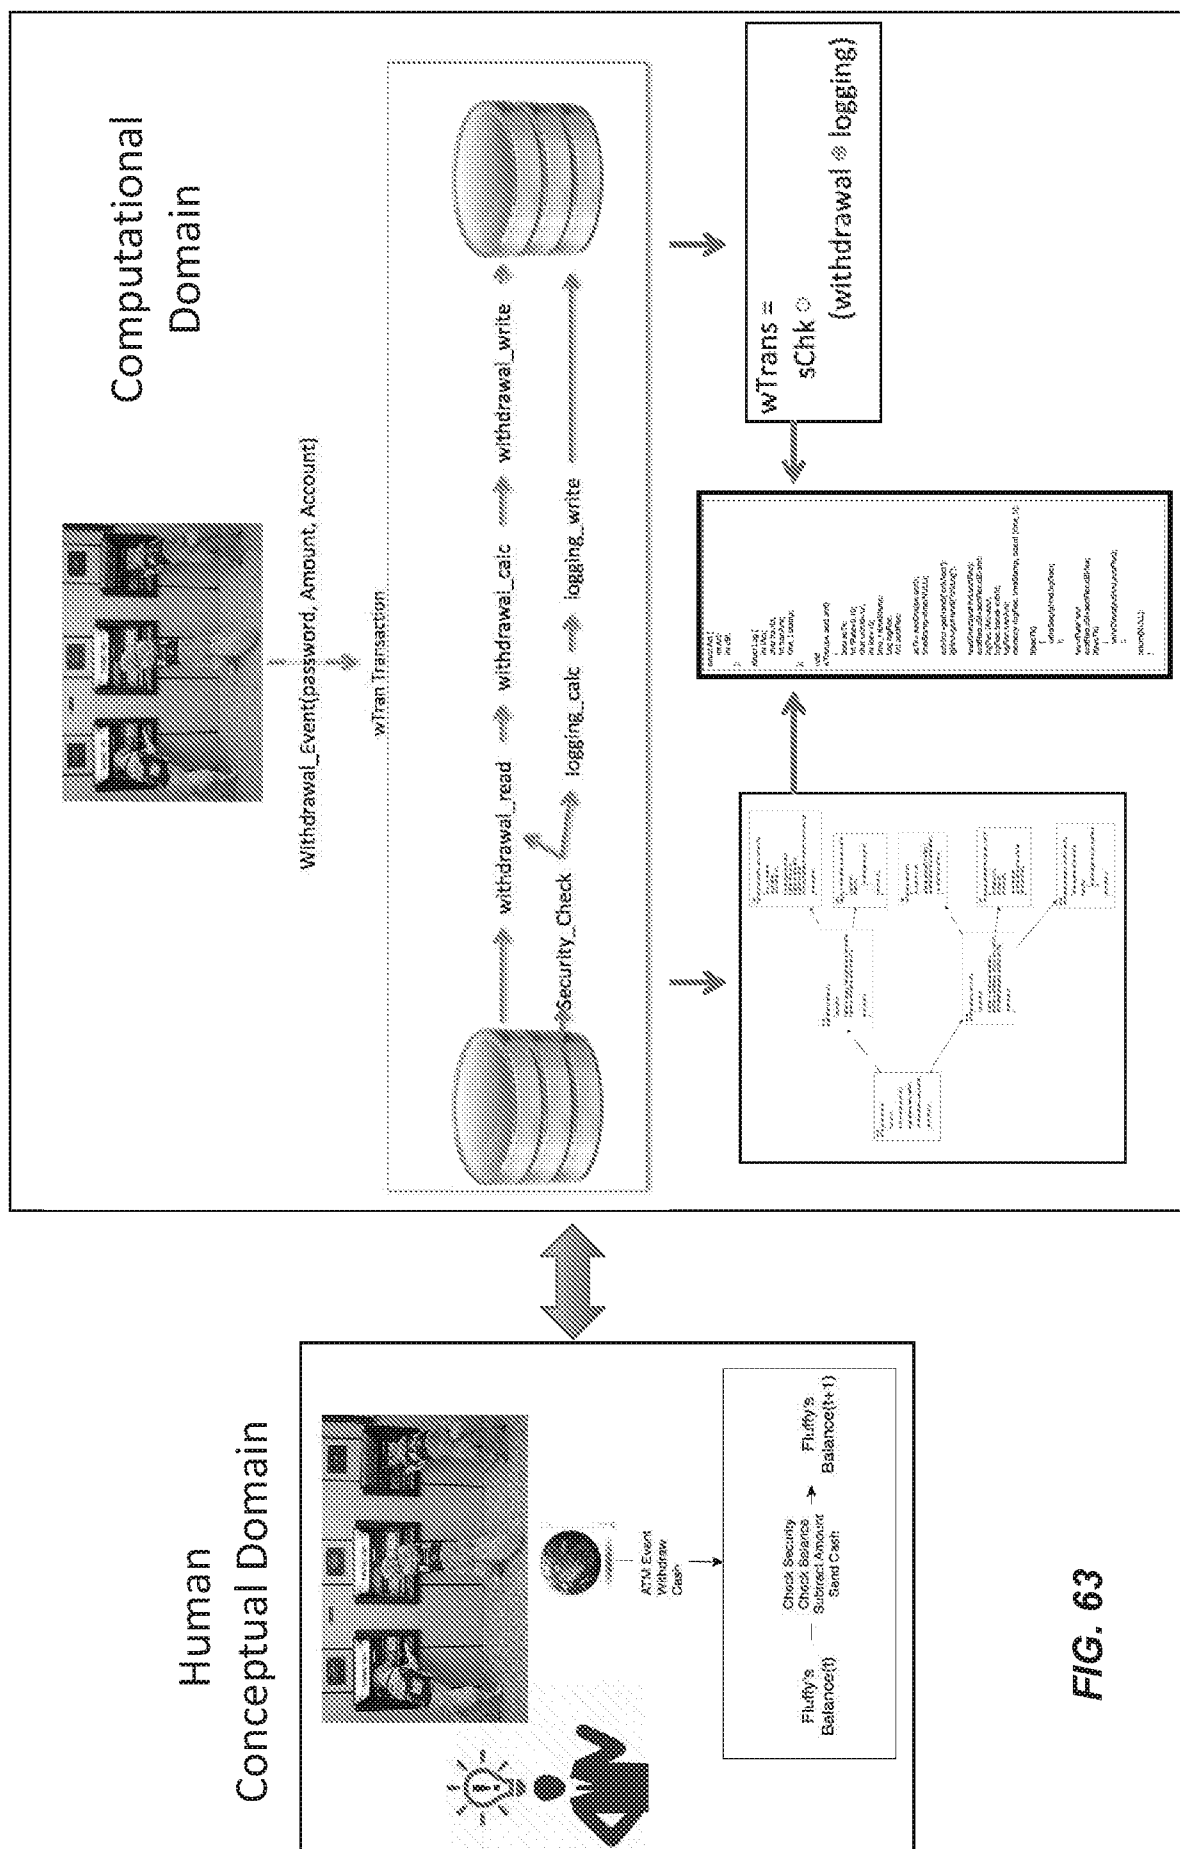


FIG. 63

Linked Representation Enables Views and Queries

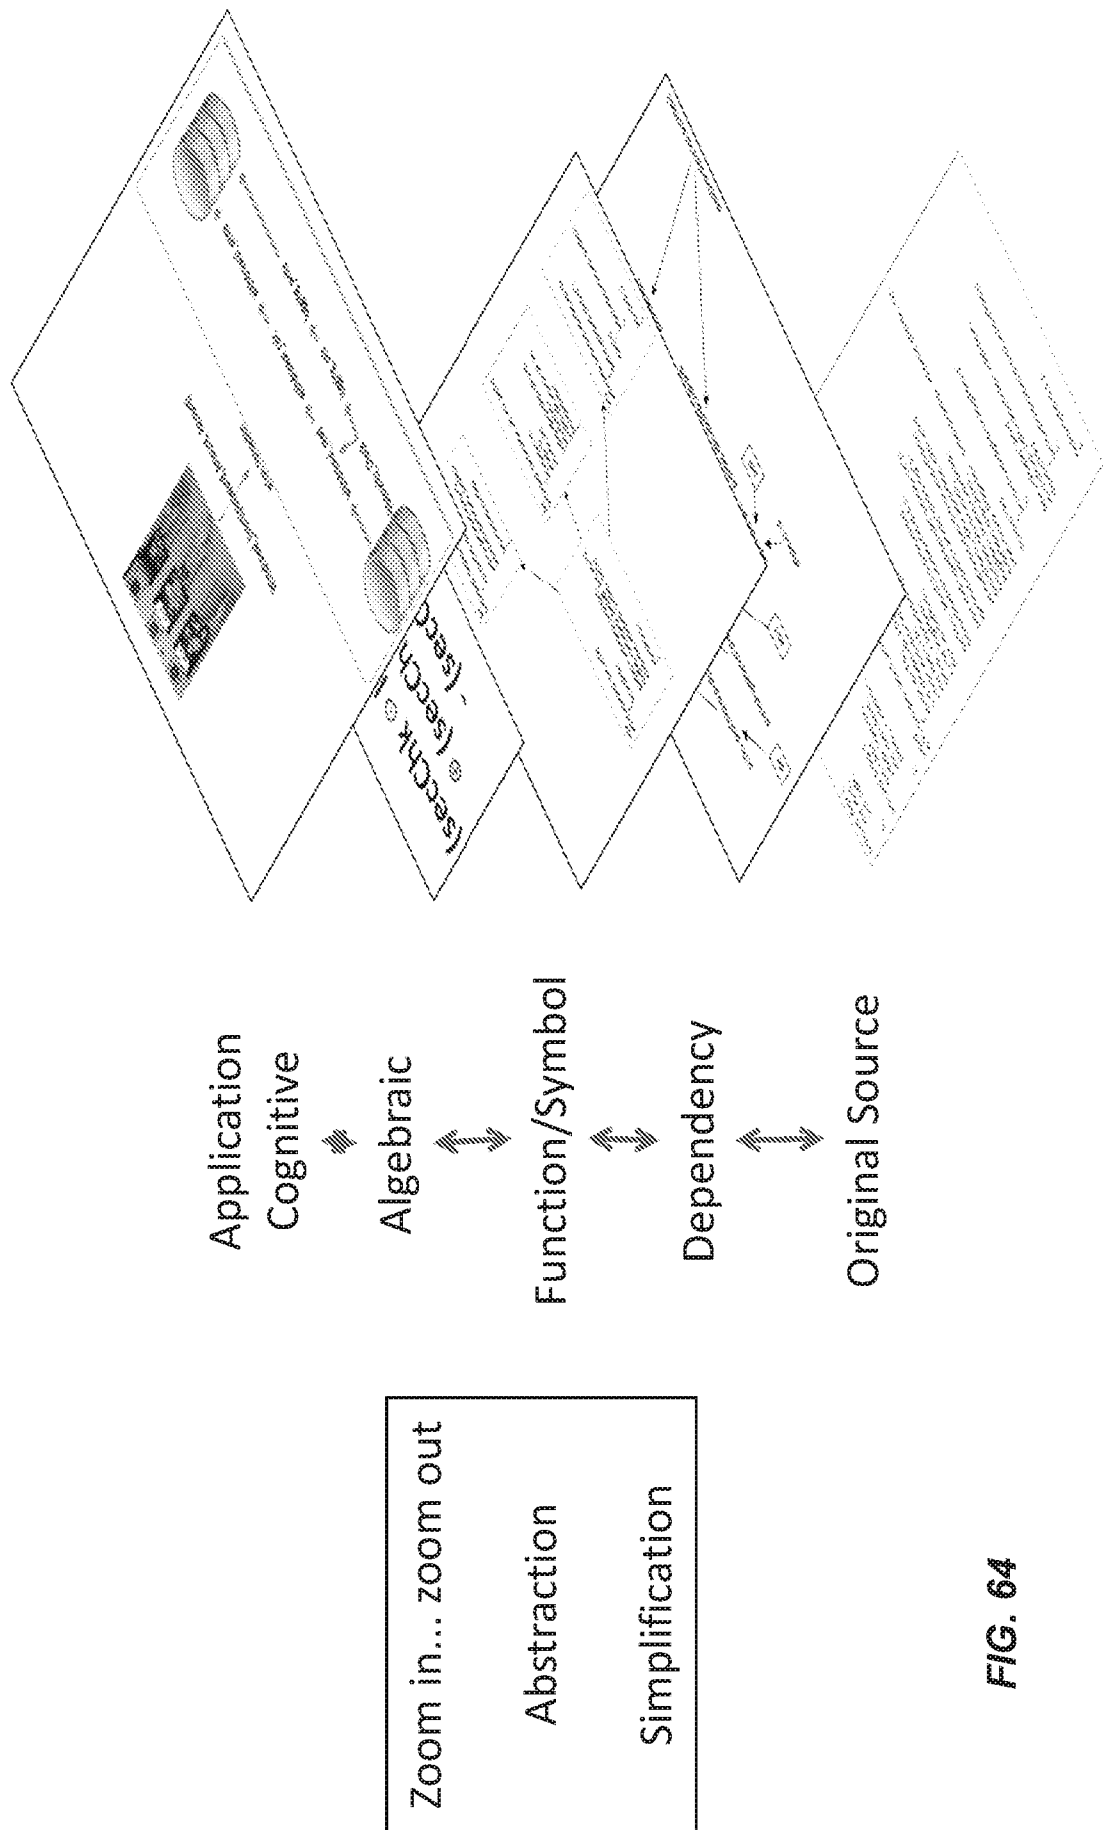

“Views” of the Original Source Code
(Derivative)


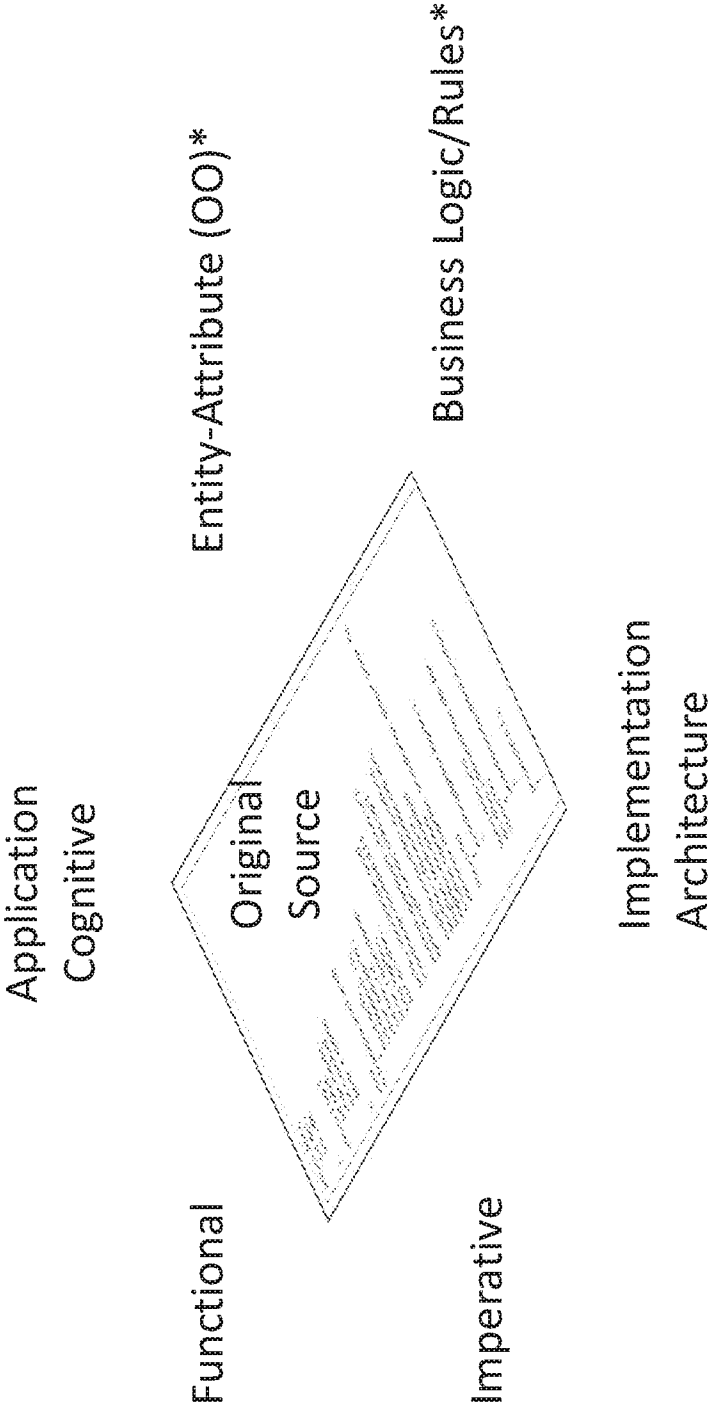


FIG. 65

Application Query (Derivative)

Queries Expressed in Algebra

Withdrawals ?
-Security $\odot$ Financial_Calculation ?
(-Security $\oplus$ Read(Account))
 $\odot$ Financial_Calculation ?



Results Projected in Views


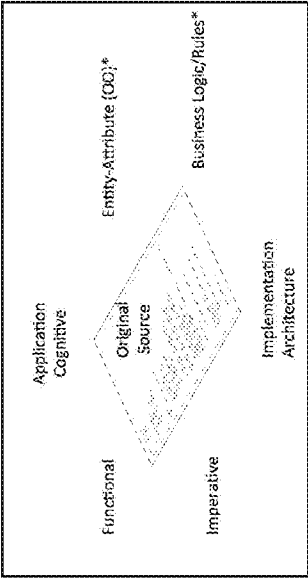



FIG. 66

*Natural Language as Well**

FIG. 67 Basic Implications: DB Analogy Complete

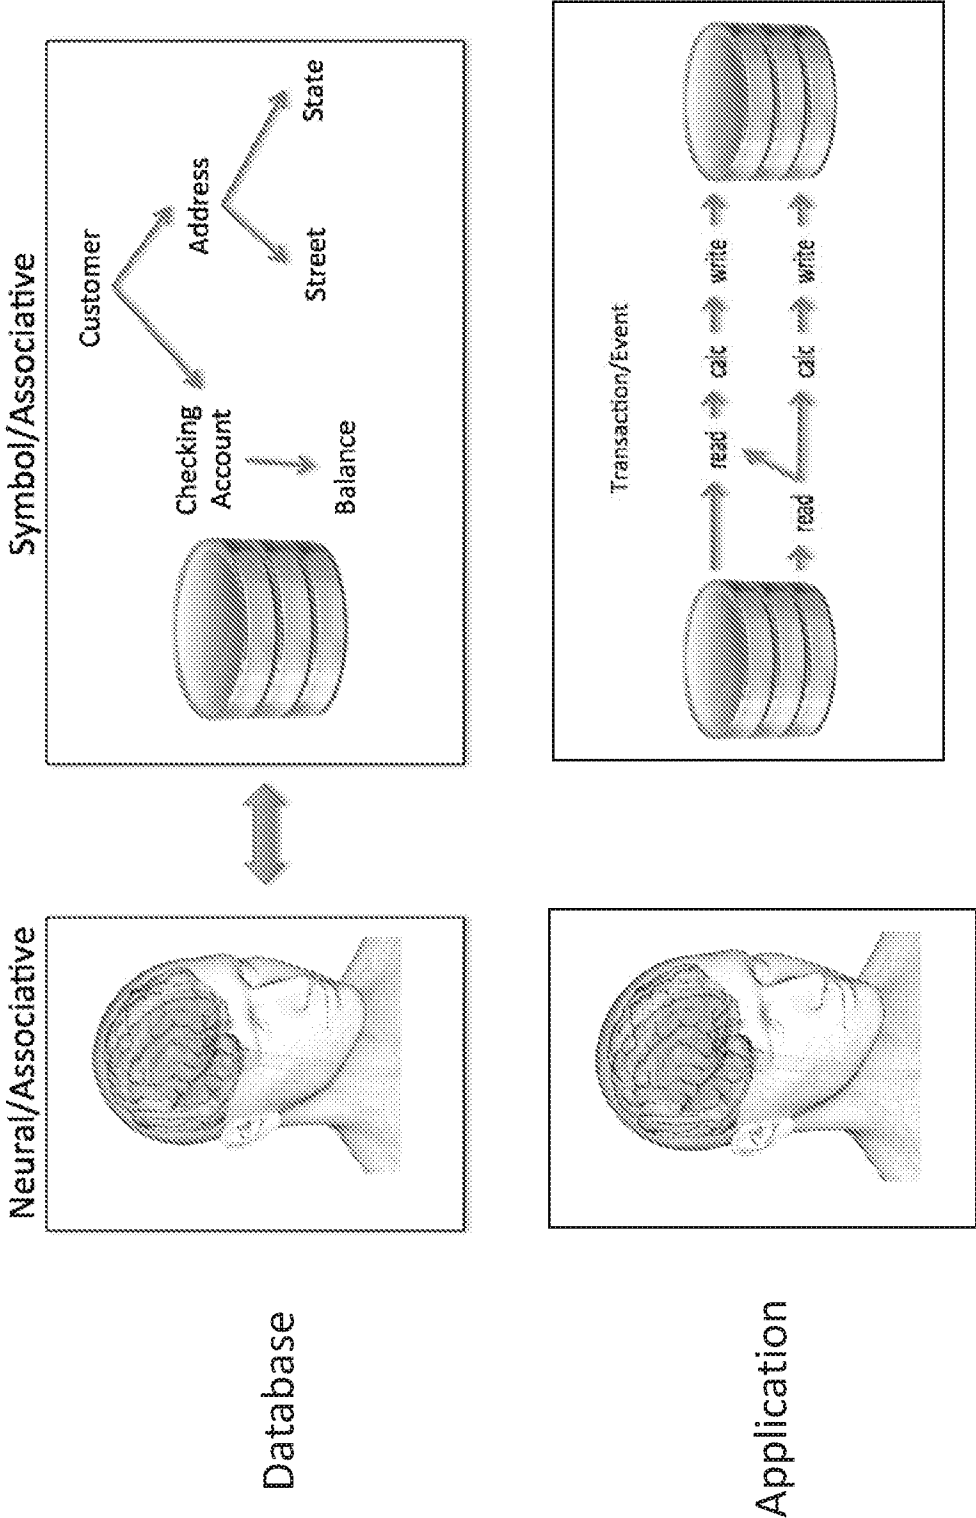


Human-like Self-Organization*

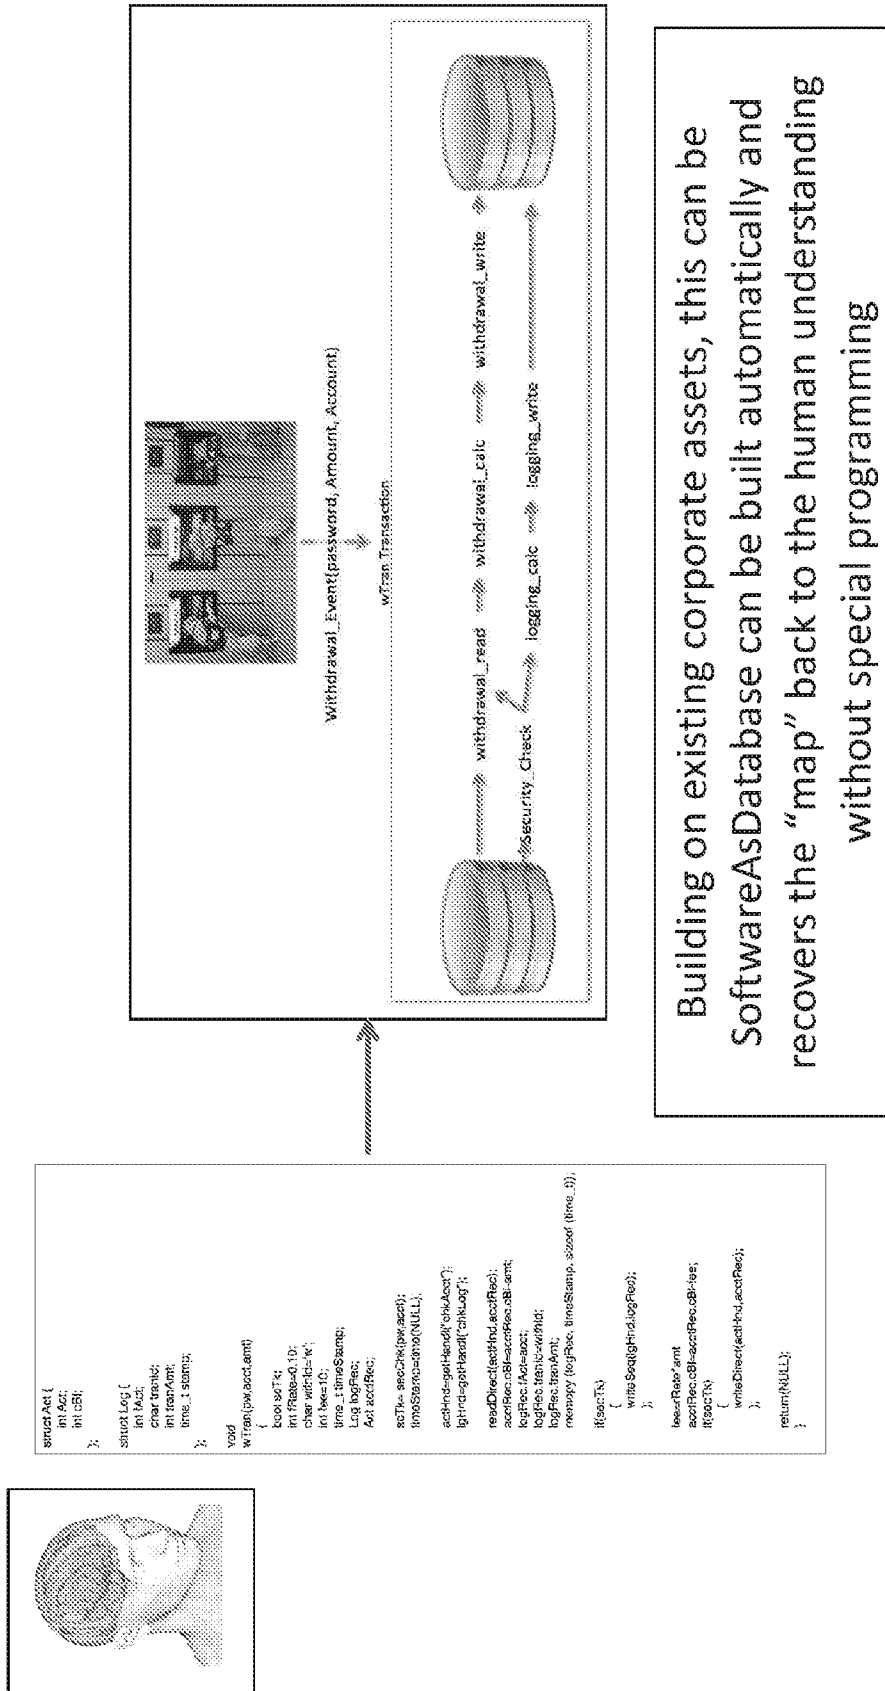


Meaningful Self-Organization (Gate)

Implies self-documentation

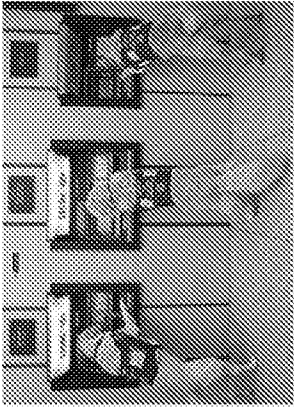

Withdrawal_Event(password, Amount, Account)

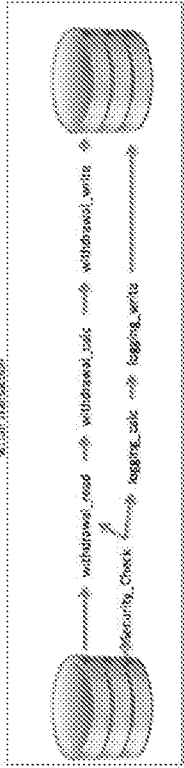

```
Act
Withdrawal_Calc(Account_Record, Balance,
Withdrawal_Amount, Security)
{
  int Fee_Payable;
  int ATM_Fee;
  int Checking_Balance;
  Fee_Amount = Fee_Payable * Withdrawal_Amount;
  Account_Record.Balance = Account_Record.Balance
    - Withdrawal_Amount;
  return(Amount, Record);
}
```

The user creates event and the system does state transition of the model

This maps to:

<subject> <transitive-verb> <object>

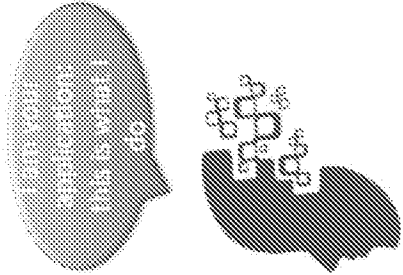


FIG. 69

FIG. 70

Phase and Essence

	Old Phase	New Phase
Professional Labor	Labor Intensive Slow	Automation Leverages 100X Multiplier
Quality	Labor intensive Haphazard Slow	Automatically Verified Often Unnecessary 100x Faster
Programming Specification	Chaotically Idiosyncratic	Normalized to Coherent
Programming Media	Programming Language Important	Programming Languages Peripheral
Comprehending System "Knowledge"	Opaque Painful Learning Curve	Transparent Easy Learning Curve
<u>Application Architecture</u>	<u>Chaotically Idiosyncratic</u>	<u>Normalized to Coherent</u>
<u>Leveraging Application</u> <u>"Knowledge" for</u> <u>Productivity</u>	<u>Human Engineers</u> <u>Experience</u>	<u>Application System</u> <u>becomes</u> <u>Active Agent</u>

Practical and Ugly Problems

CEO's Acquisition Problem:

I want to buy companies to absorb market share and increase operational efficiency

Ugly Truths:

Comparing large applications and doing a functional analysis of best processing is never done
Integrating existing capabilities is never done
The "operational" efficiencies are never achieved

Example: Bank of America and Mortgage

In the new *PHASE*, how do you compare/merge two mortgage systems?

Normalize both systems into "databases"

Subtract one from the other;

Use "queries" and "views" to zoom in and out on differences

Select best-of-breed capabilities **without reading code** for the new integrated capability

Do only **limited testing** to verify the result

Foundations and the Stack


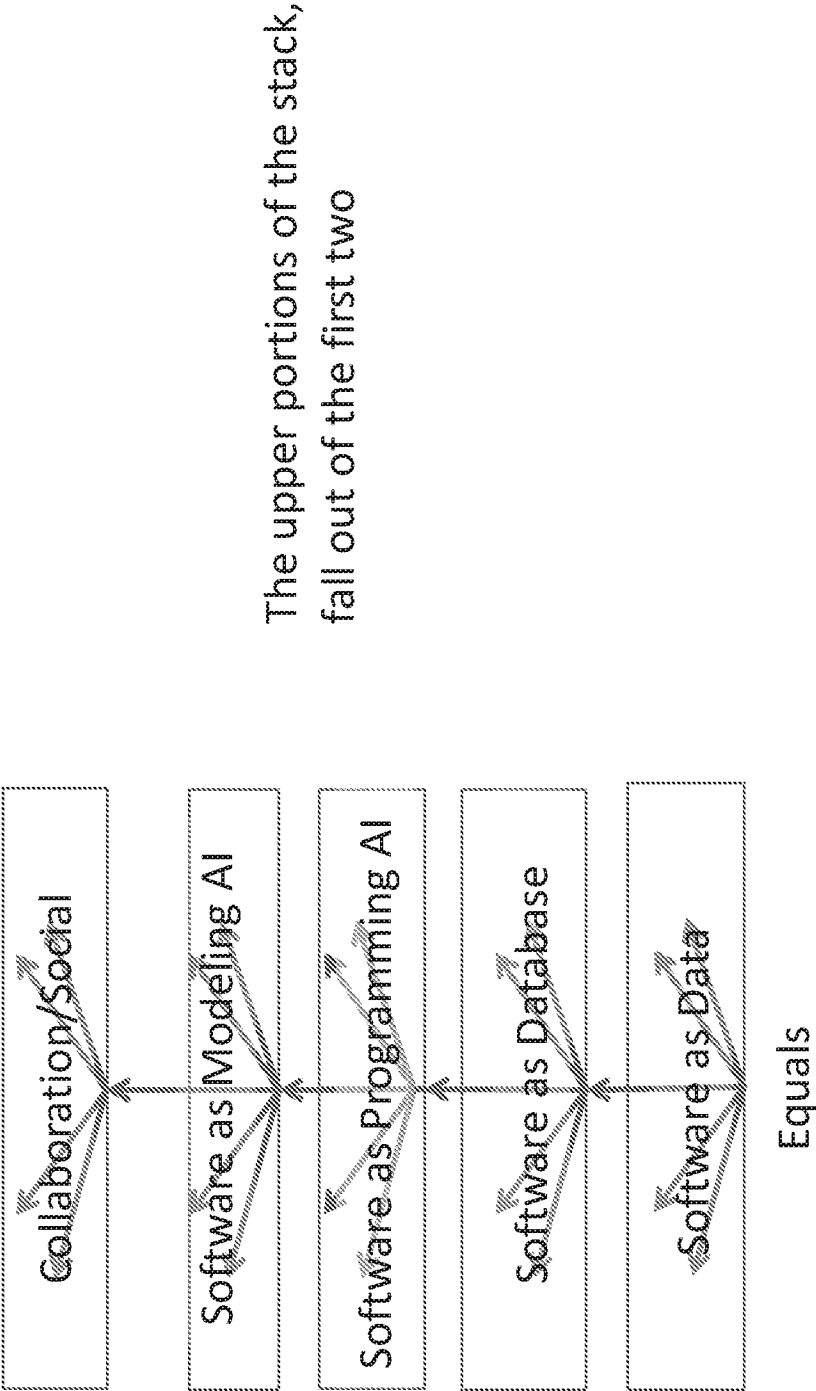


FIG. 72

Phase, Essence, Intuition: Not in Kansas, Toto

FIG. 73

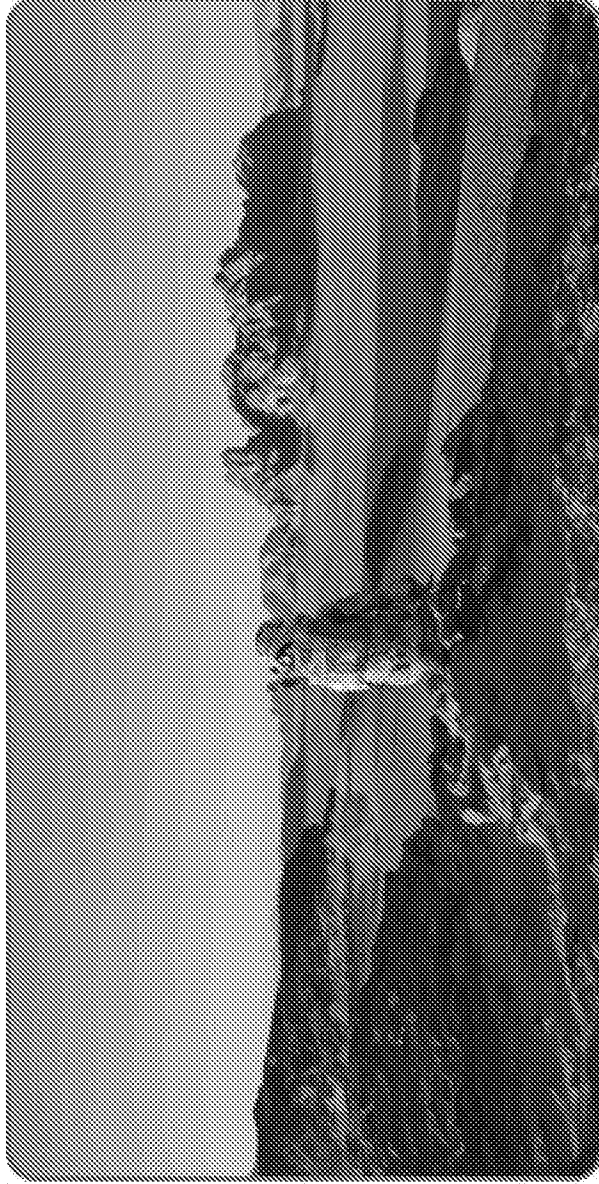

!

We have the math and science techniques to do all this, and:
-are in the process of controlling the intellectual property
-while learning/demonstrating the pragmatics of implementation

INTERNATIONAL SEARCH REPORT

International application No

PCT/US2016/017160

A. CLASSIFICATION OF SUBJECT MATTER

INV. G06F9/44

ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2011/225572 A1 (STOICESCU MIHAI EMANUEL [CA] ET AL) 15 September 2011 (2011-09-15) paragraph [0011] paragraph [0014] -----	1-45



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

27 May 2016

Date of mailing of the international search report

03/06/2016

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Ebert, Werner

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2016/017160

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2011225572 A1	15-09-2011	US 2011225572 A1	15-09-2011
		WO 2010070384 A1	24-06-2010
