



US009053568B2

(12) **United States Patent**  
**Webb et al.**

(10) **Patent No.:** **US 9,053,568 B2**  
(45) **Date of Patent:** **Jun. 9, 2015**

(54) **APPLYING A REALISTIC ARTISTIC TEXTURE TO IMAGES**

(71) Applicant: **Apple Inc.**, Cupertino, CA (US)

(72) Inventors: **Russell Y Webb**, Cupertino, CA (US);  
**Alexis Gatt**, Santa Clara, CA (US);  
**Johnnie Manzari**, San Francisco, CA (US);  
**Randy Ubillos**, Los Altos, CA (US)

(73) Assignee: **Apple Inc.**, Cupertino, CA (US)

(\* ) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 264 days.

(21) Appl. No.: **13/834,064**

(22) Filed: **Mar. 15, 2013**

(65) **Prior Publication Data**

US 2014/0071148 A1 Mar. 13, 2014

**Related U.S. Application Data**

(60) Provisional application No. 61/699,947, filed on Sep. 12, 2012.

(51) **Int. Cl.**

- G09G 5/00** (2006.01)
- G09G 5/02** (2006.01)
- G09G 5/10** (2006.01)
- G03F 3/08** (2006.01)
- H04N 1/46** (2006.01)
- G06K 9/00** (2006.01)
- G06K 9/40** (2006.01)
- G06K 9/36** (2006.01)

(Continued)

(52) **U.S. Cl.**

CPC ..... **G06T 11/001** (2013.01); **H04N 1/6058** (2013.01); **G09G 5/02** (2013.01)

(58) **Field of Classification Search**

USPC ..... 345/418-419, 589, 593-594, 606, 610, 345/618-619, 629-630, 501-502, 520, 345/690; 358/518, 525, 537-540, 448, 358/452-453; 382/162, 166-167, 254, 274, 382/276, 282, 284, 285, 303-303, 307, 382/260; 715/700, 764-765, 860

See application file for complete search history.

(56) **References Cited**

**U.S. PATENT DOCUMENTS**

6,996,287 B1 \* 2/2006 Weiss ..... 382/260  
8,249,365 B1 \* 8/2012 Winnemoeller et al. .... 382/219

(Continued)

**OTHER PUBLICATIONS**

“Deke’s Techniques 016: Turning a Photo into an Ink Drawing,” video and description originally posted at <http://www.deke.com/content/deke-s-techniques-016-turning-a-photo-ink-drawing>, retrieved via web.archive.org on May 28, 2013.

(Continued)


*Primary Examiner* — Wesner Sajous

(74) *Attorney, Agent, or Firm* — Wong, Cabello, Lutsch, Rutherford & Brucculeri, LLP

(57) **ABSTRACT**

Techniques are disclosed to provide user control over the manipulation of a digital image. The disclosed techniques enable a user to apply various textures that mimic traditional artistic media to a selected image. User selection of a texture level results in the blending of texturized versions of the selected image in accordance with the selected texture level. User selection of a color level results in the adjustment of color properties of the selected image that are included in the output image. Control of the image selection, texture type selection, texture level selection, and color level selection may be provided through an intuitive graphical user interface.

**24 Claims, 6 Drawing Sheets**

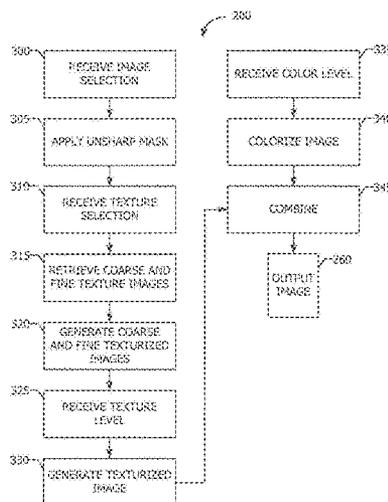

- (51) **Int. Cl.**  
*G06F 3/01* (2006.01)  
*G06F 3/048* (2013.01)  
*G06T 11/00* (2006.01)  
*H04N 1/60* (2006.01)

(56) **References Cited**  
 U.S. PATENT DOCUMENTS

2004/0012602	A1 *	1/2004	Mech .....	345/581
2004/0212625	A1 *	10/2004	Sekine et al. ....	345/582
2012/0133779	A1 *	5/2012	Ma et al. ....	348/175
2012/0212753	A1 *	8/2012	Qiao et al. ....	358/1.9

OTHER PUBLICATIONS

“Photoshop—Convert Photo to Pencil Sketch,” video available at <http://www.youtube.com/watch?v=fAugO9Gii0>, retrieved on Jun. 14, 2013.

“Turn any Photo Into a Pencil Sketch,” Dave Johnson, PCWorld, retrieved from [http://www.pcworld.com/article/239837/turn\\_any\\_photo\\_into\\_a\\_pencil\\_sketch.html](http://www.pcworld.com/article/239837/turn_any_photo_into_a_pencil_sketch.html) on May 28, 2013.

“Turn Your Photos into Charcoal Drawings,” originally post at <http://www.befunky.com/explore/2010/06/turning-your-photos-into-charcoal-drawings/>, retrieved via [web.archive.org](http://web.archive.org) on May 28, 2013.

\* cited by examiner

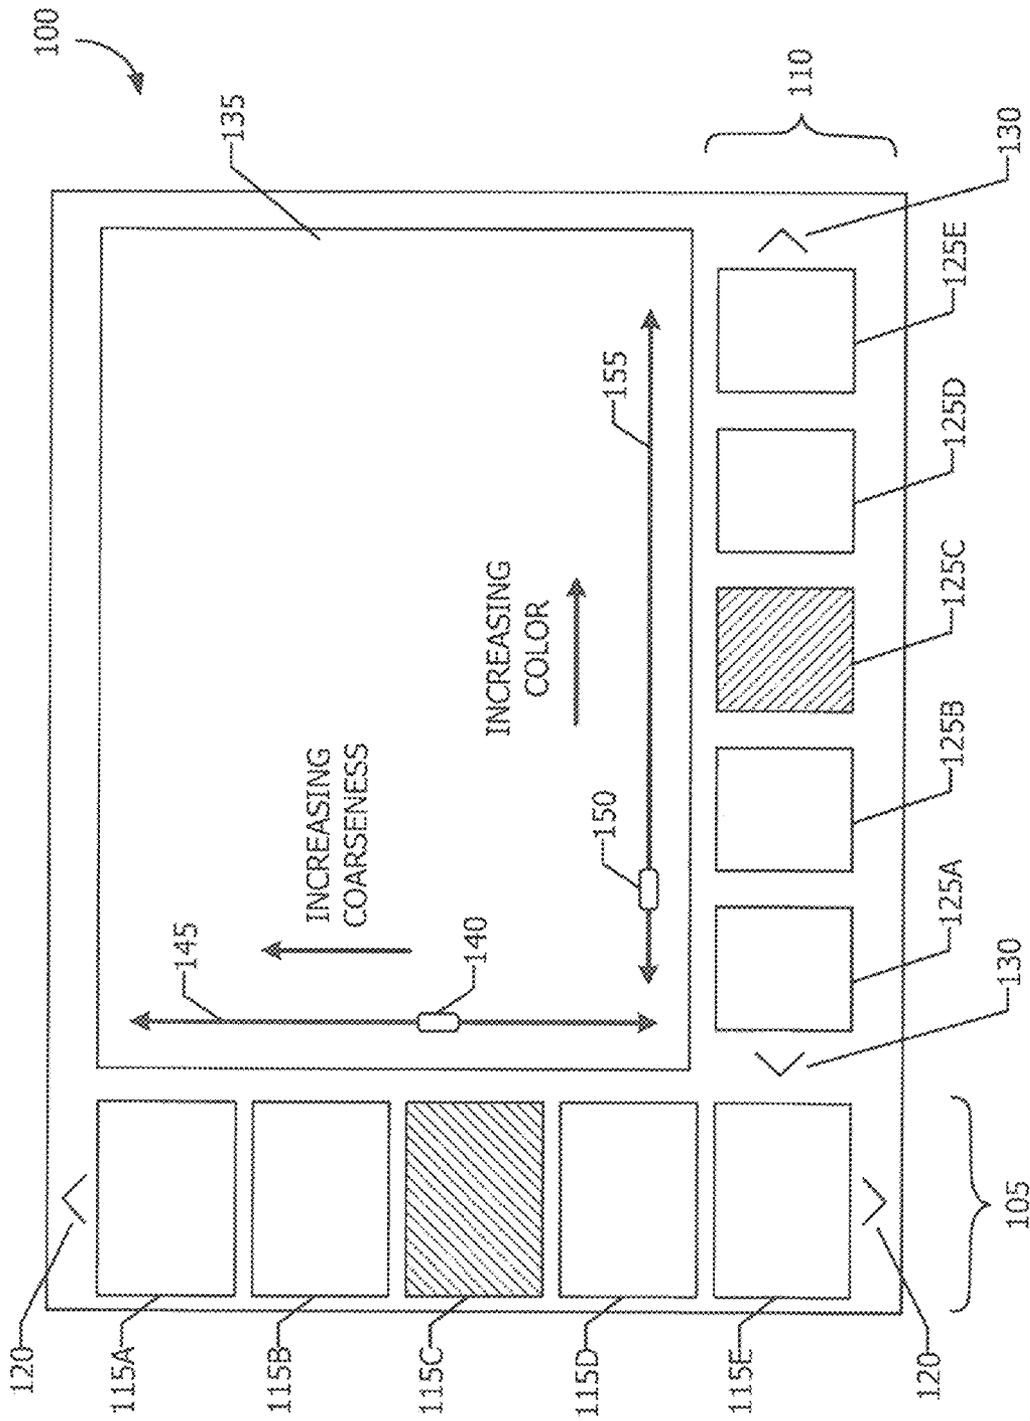


FIG. 1

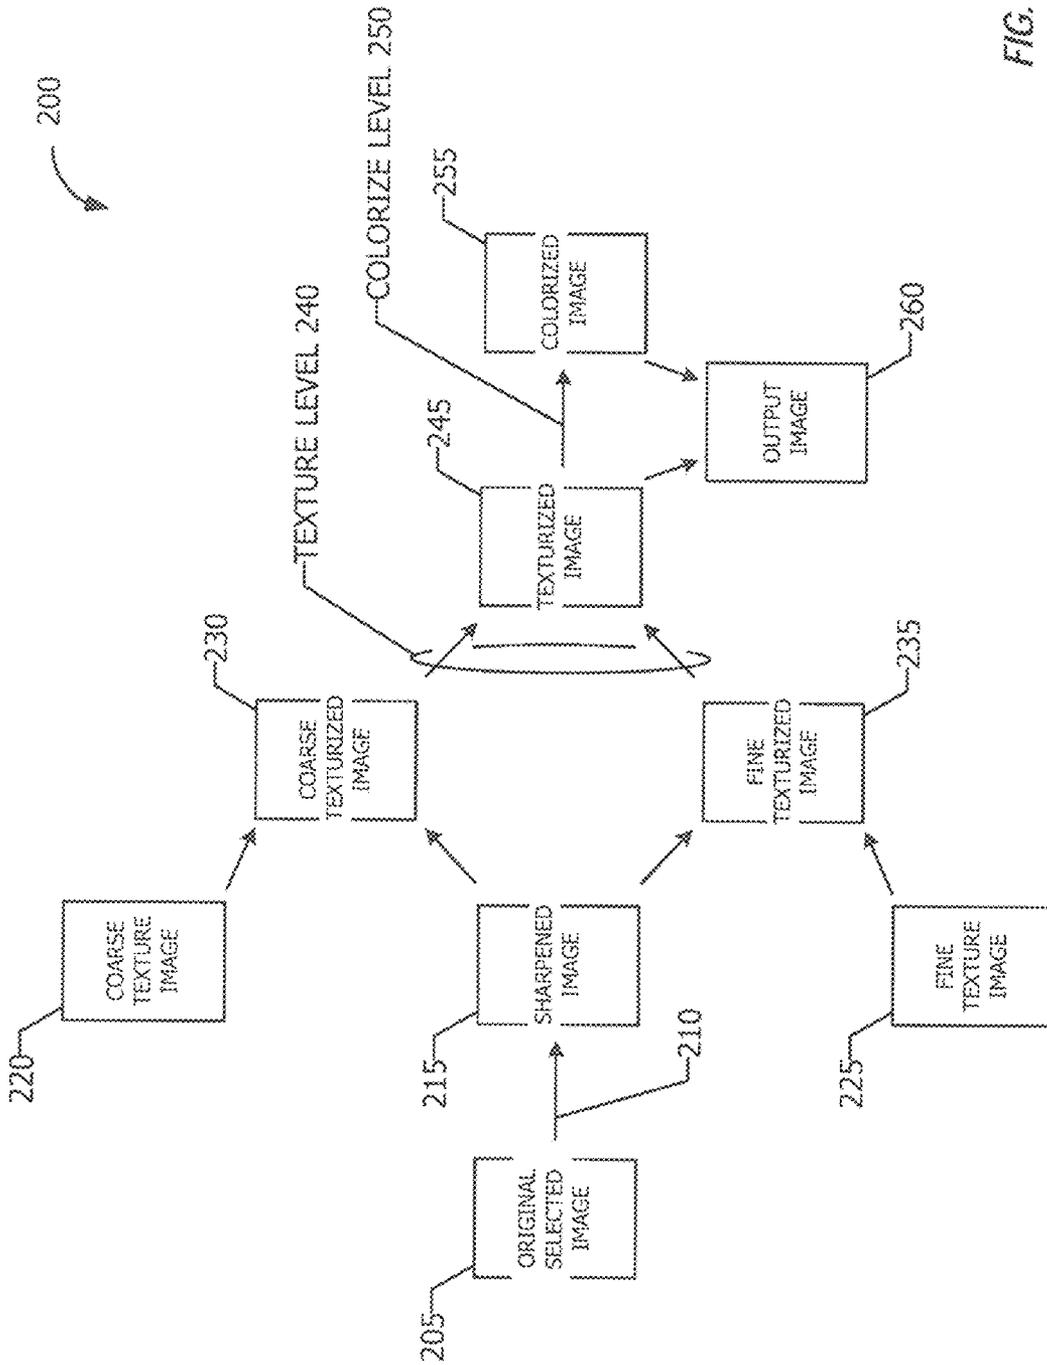


FIG. 2

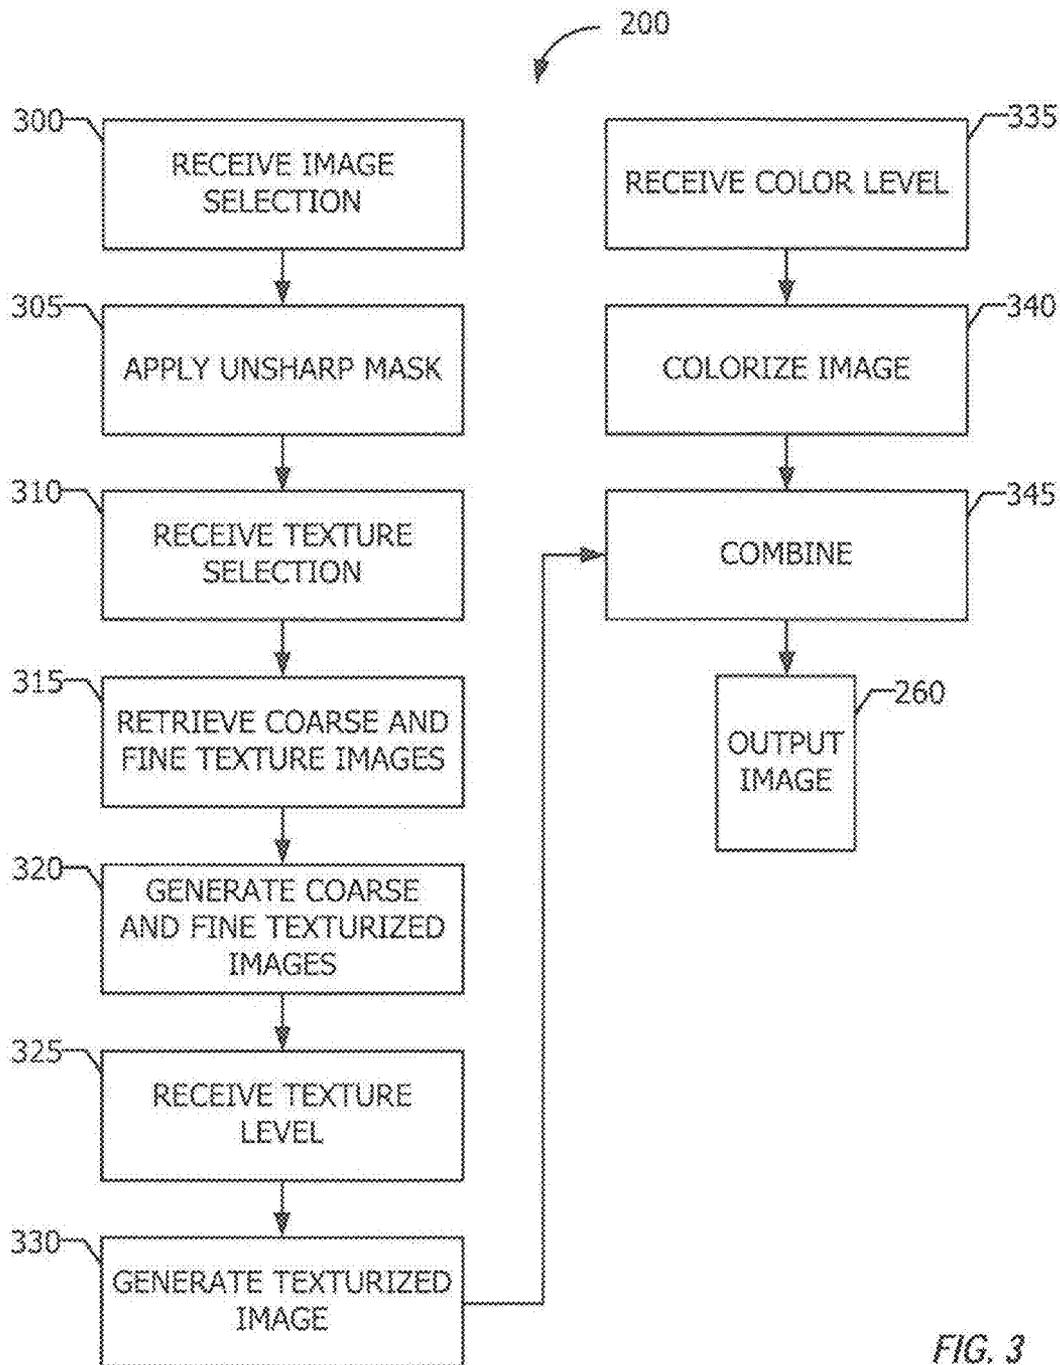


FIG. 3



FIG. 4A

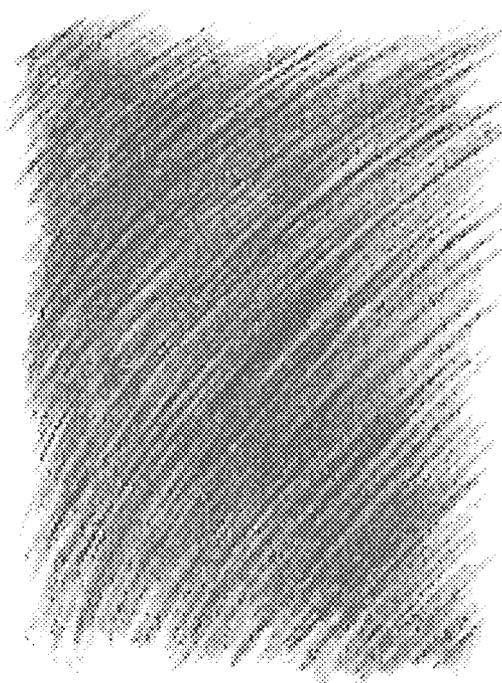
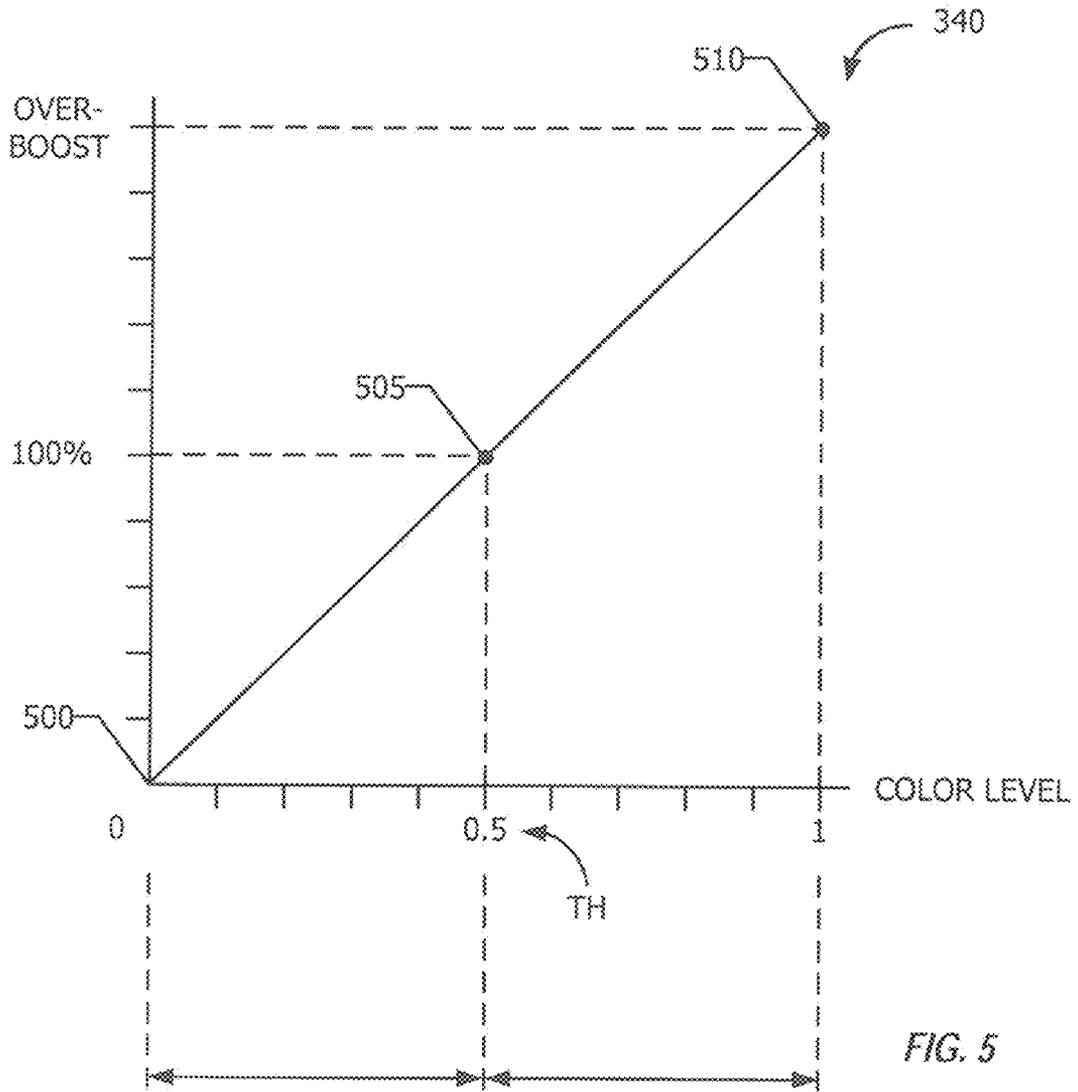


FIG. 4B



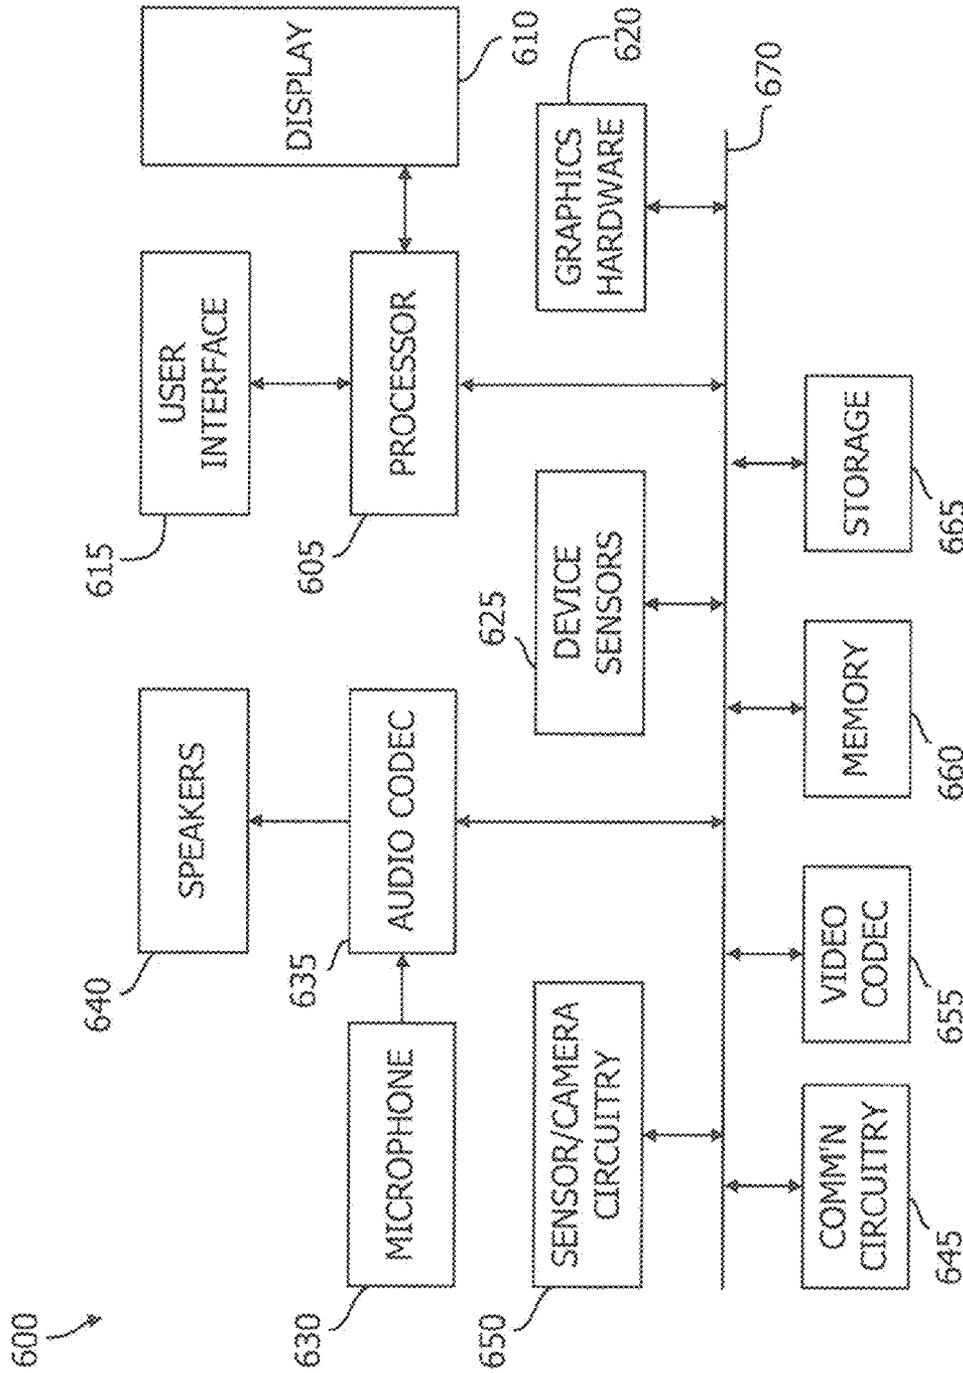


FIG. 6

## APPLYING A REALISTIC ARTISTIC TEXTURE TO IMAGES

### BACKGROUND

This disclosure relates generally to the creation of artistic images having various textures that mimic traditional artistic media. More particularly, the disclosure relates to facilitating user control over the generation of such images.

The increased availability of devices capable of obtaining high quality digital photographs and the corresponding increase in the popularity of digital photography have led to an increased interest in digital image editing among amateur and professional photographers alike. Existing digital photographic editing techniques enable users to apply artistic touches to images. However, these techniques are often limited to the application of predefined elements to a user's photographs. Such existing techniques limit a user's control over the editing experience. It would therefore be desirable to enable a user to experiment with different artistic elements in a manner that allows the user to retain control over the image editing experience.

### SUMMARY

In one embodiment, a method to generate an artistic image having a texture that mimics a traditional artistic medium is disclosed. An input image to which a selected texture is to be applied may first be obtained such as, for example, by a user selection of the image. First and second texturized images may be generated from the input image and a selected texture type. A combined texturized image may thereafter be generated from the first and second texturized images and a selected texture level. A colorized image may be generated based, at least in part, on the combined texturized image and a selected color level, and an output image may be generated from the combined texturized image and the colorized image. The method may be embodied in program code and stored on a non-transitory storage medium. The stored program code may be executed by one or more processors.

In another embodiment, a method to facilitate creation of an artistic image having a texture that mimics a traditional artistic medium is disclosed. A graphical user interface that facilitates the creation of an artistic image may be displayed. The graphical user interface may include one or more selectable image objects representative of one or more images, one or more selectable texture objects representative of one or more texture types, a texture level selector and a color level selector. A selection of one of the selectable image objects and one of the selectable texture objects representative of a selected image and a selected texture type, respectively, may be received. A first texturized image and a second texturized image may be generated using the selected image and the selected texture type. A combined texturized image may then be generated from the first texturized image and the second texturized image in accordance with a texture level received via the texture level selector. A colorized output image may be generated from the combined texturized image, the selected image, and a color level received via the color level selector. The method may be embodied in program code and stored on a non-transitory storage medium. The stored program code may be executed by one or more processors.

### BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates an example user interface that may be utilized to apply an artistic texture to images in accordance with one embodiment.

FIG. 2 is a block diagram that illustrates the application of an artistic texture to an image in accordance with one embodiment.

FIG. 3 is a flow chart that illustrates the operation of FIG. 2.

FIGS. 4A and 4B illustrate a coarse texture image and a fine texture image, respectively, for a particular texture type in accordance with one embodiment.

FIG. 5 is a graph that illustrates a portion of a colorization operation in accordance with one embodiment.

FIG. 6 is a block diagram of an illustrative electronic device in accordance with one embodiment.

### DETAILED DESCRIPTION

This disclosure pertains to systems, methods, and computer readable media for applying an artistic texture to an image. In general, techniques are disclosed for generating a texturized image by applying a selected texture to an image in accordance with the user's selection of a texture level. The disclosed techniques further enable a user to control the amount of color from the original image to be applied to the resulting texturized image via a selection of a color level.

In the following description, for purposes of explanation, numerous specific details are set forth in order to provide a thorough understanding of the inventive concept. As part of this description, some of this disclosure's drawings represent structures and devices in block diagram form in order to avoid obscuring the invention. In the interest of clarity, not all features of an actual implementation are described in this specification. Moreover, the language used in this disclosure has been principally selected for readability and instructional purposes, and may not have been selected to delineate or circumscribe the inventive subject matter, resort to the claims being necessary to determine such inventive subject matter. Reference in this disclosure to "one embodiment" or to "an embodiment" means that a particular feature, structure, or characteristic described in connection with the embodiment is included in at least one embodiment of the invention, and multiple references to "one embodiment" or "an embodiment" should not be understood as necessarily all referring to the same embodiment.

It will be appreciated that in the development of any actual implementation (as in any development project), numerous decisions must be made to achieve the developers' specific goals (e.g., compliance with system- and business-related constraints), and that these goals will vary from one implementation to another. It will also be appreciated that such development efforts might be complex and time-consuming, but would nevertheless be a routine undertaking for those of ordinary skill in the art of image processing having the benefit of this disclosure.

Referring to FIG. 1, example user interface **100** demonstrates a user's control over the application of an artistic texture to a selected image and the feedback provided to the user. It will be understood that user interface **100** represents a single example interface that could be implemented to enable a user to realize the disclosed functionality and is not intended to be limiting in any manner. Numerous additional interface designs may also enable a user to realize the disclosed image manipulation functionality. In the illustrated embodiment, user interface **100** includes an image selector portion **105** along a left edge of user interface **100** and a texture selector portion **110** along a bottom edge of user interface **100**. Multiple thumbnails **115** are displayed within image selector portion **105**. In one embodiment, the images available for editing (represented by thumbnails **115**) may be imported

into an application that provides user interface **100**. In another embodiment, all of the images stored in a particular directory location may be available for editing (and therefore displayed as thumbnails **115** in image selector portion **105**).

In the illustrated embodiment, the user may scroll through multiple images by selecting arrows **120**. In another embodiment, user interface **100** may be displayed on a touch screen device and the user may scroll through thumbnails **115** in image selector portion **105** using a touch gesture (e.g., a swipe gesture). When the thumbnail of a desired image is displayed in image selector portion **105**, the image may be selected for editing by selecting the thumbnail (e.g., via a selector device or by touching the thumbnail). In the illustrated embodiment, the image associated with thumbnail **115C** is selected for editing.

Multiple texture swatches **125** are displayed within texture selector portion **110**. Swatches **125** may correspond to textures that represent traditional artistic media such as pencil, charcoal, ink, water color, crayon, pastel, etc. Selection of a particular image-texture combination may result in the generation of an image that mimics the creation of the selected image using the artistic medium represented by the selected texture (e.g., a charcoal drawing of the selected image). In one embodiment, texture swatches **125** may display an image representative of the texture if no image has been selected and may display a preview of the selected image with the texture applied if an image has been selected. In the same manner that a user can navigate through images in image selector portion **105**, the user may also be able to navigate through various texture swatches in texture selector portion **110** using either arrows **130** or touch gestures. When a swatch corresponding to a desired texture is displayed within texture selector portion **110**, the desired texture may be selected by choosing the swatch (e.g., via a selector device or by touching the thumbnail). In the illustrated embodiment, the texture corresponding to swatch **125C** is selected.

The selected image may be displayed within image preview window **135**. In one embodiment, if no texture has been selected, the selected image may be displayed in its original form in preview window **135** (i.e., with no texture effect). If an image and a texture have been selected, the image may be displayed with the selected texture effect applied in preview window **135**. In such an embodiment, the initial image displayed in preview window **135** may include a texture effect having a default coarseness and default color.

Within preview window **135**, a user may set a texture level to be applied to the generated image by adjusting the position of slider **140** along slider bar **145** (or a functionally equivalent control) and may set a color level to be applied to the generated image by adjusting the position of slider **150** along slider bar **155** (or a functionally equivalent control). In one embodiment, the sliders and slider bars may only be displayed when the user is actively editing a selected image. For example, the sliders may only be displayed when a selector device (e.g., a mouse pointer) hovers over preview window **135** or when the user touches the preview window on a touch display device. Although the illustrated embodiment depicts separate color and texture sliders (**145** and **155**), in an alternate embodiment, preview window **135** may represent a two-dimensional texture-color continuum such that a selection of any point within preview window **135** represents a unique texture-color combination. In such an embodiment, an indicator within preview window **135** may represent the current texture-color location and the user may be able to move the indicator to any location within preview window **135** to alter the texture and color levels. While such an embodiment may allow a user to simultaneously adjust a color level and a texture level to be applied

to the generated image, in an alternate embodiment, the user experience may be improved if only one of color level or texture level is adjusted at any particular time. For example, in response to the detection of an indicator adjustment in a vertical direction (e.g., contact with the preview window portion of a touch sensitive interface along the texture adjustment direction), arrows may be displayed to indicate that the texture level can be adjusted by moving the indicator either up or down but not left or right (i.e., no color level adjustment). Likewise, detection of an indicator adjustment in a horizontal direction may result in the display of arrows to indicate that the color level can be adjusted by moving the indicator either left or right but not up or down (i.e., no texture level adjustment). The application of a selected texture to a selected image and the utilization of the user-selected texture and color levels will be described in greater detail below.

Referring to FIGS. **2** and **3**, image operation **200** may begin with receipt of selected image **205** (block **300**). In one embodiment, image **205** may be selected in the manner illustrated in FIG. **1**. That is, a user may select image **205** for editing from within an application that provides an interface such as interface **100**. After image **205** has been selected, unsharp mask **210** may be applied to generate sharpened image **215** (block **305**). As is known by those of ordinary skill in the art, an unsharp mask may be used to sharpen an image and enhance image details, specifically edge details. In one embodiment, the properties of unsharp mask **210** (i.e., radius and strength) may be predefined. In such an embodiment, the predefined properties may be dependent on image size. For example, the radius value utilized to generate unsharp mask **210** may account for the differences between a 12 megapixel image and a 36 megapixel image such that the same resulting effect is obtained. In another embodiment, the user may be able to specify the properties of unsharp mask **210**. For example, user interface **100** may include functionality that allows the user to specify radius and strength values for unsharp mask **210**. In one embodiment, the image may be displayed within a preview window (such as preview window **135**). The displayed image may be either original image **205** or sharpened image **215**.

After application of unsharp mask **210**, a selected texture may be received (block **310**). As described briefly above, the texture may be selected from multiple textures that represent different artistic media such as, for example, swatch **125C** from texture selector portion **110**. Application of a selected texture to a selected image may create the appearance that the selected image was created using the artistic medium associated with the selected texture. For example, application of a charcoal texture to a selected image may generate an image resembling a charcoal drawing of the original image.

Coarse **220** and fine **225** texture images corresponding to the texture selected in accordance with block **310** may be retrieved (block **315**). In one embodiment, coarse texture image **220** is a lighter version and fine texture image **225** is a darker version of the same texture image. In one embodiment, coarse and fine texture images for each of the available texture types may be predefined. In another embodiment, a single image for each texture type may be predefined and the coarse and fine texture images created based on a manipulation of the predefined image. In such an embodiment, coarse **220** and fine **225** texture images may be created by applying offsets, exponents, and/or thresholding operations to the predefined image for the selected texture type. Therefore, retrieving

coarse **220** and fine **225** texture images in accordance with block **315** may involve retrieving predefined images for the selected texture or retrieving a single image for the selected texture and generating the coarse and fine images therefrom. Examples of a coarse texture image and a fine texture image for a charcoal drawing texture are depicted in FIGS. **4A** and **4B** respectively.

In one embodiment, coarse texture image **220** and fine texture image **225** for a texture selected in accordance with block **310** are grayscale images. It will be understood that a grayscale image may be represented as a color image having equal values for various color components (i.e., r=g=b). In another embodiment, coarse texture image **220** and fine texture image **225** are colored images. In such an embodiment, the colored texture images may highlight colors in the original image to which the texture is applied or may simulate a colored artistic medium. For example, a green texture may highlight foliage and a blue texture may highlight water in an image to which they are applied. As part of operations in accordance with block **315**, texture images **220** and **225** may be scaled to the same aspect ratio as selected image **205** (e.g., image **115C**) such that they may be combined with selected image **205** as described below.

Sharpened image **215** may be combined with each of the retrieved coarse and fine texture images **220** and **225** to generate coarse texturized image **230** and fine texturized image **235** (block **320**). Coarse and fine texturized images **230** and **235** represent the application of a minimum texture effect and a maximum texture effect to sharpened image **215**. In one embodiment, generation of coarse texturized image **230** and fine texturized image **235** may be achieved using the following sample instructions or program code as applied to the Apple® Core Image framework:

---

```
kernel vec4 coreImageKernel(sampler image, sampler pencilIm, float
amt){
    vec4 im = sample(image, samplerCoord(image));
    float grey = min(dot(vec3(1.0/3.0), im.rgb), 1.0);
    vec4 pencil = sample(pencilIm, samplerCoord(pencilIm));
    float p = min(dot(vec3(1.0/3.0), pencil.rgb), 1.0);
    vec4 blend1 = vec4(pencil.rgb + 1.5*sign(grey)*pow(abs(grey), amt),
1.0);
    vec4 blend2 = vec4(mix(vec3(grey), pencil.rgb, pow(p, 2.0*amt)),
1.0);
    vec4 greyResult = mix(blend1, blend2, 0.5);
    return vec4(greyResult.rgb, 1.0);
}
```

---

where “image” represents sharpened image **215**, “pencilIm” represents either coarse **220** or fine **225** texture image for a selected texture, and “amt” represents a variable (having a typical value in the 0.5 to 1.5 range) used to darken the resulting image (Apple is a registered trademark of Apple Inc.).

Algebraic simplification of the operations leading to the blend1, blend2, and greyResult values yields the following simplified equations that are equivalent for grayscale results:

---

```
float S = amt;
float G = max(0.0, grey);
float T = p;
float result = 0.5*(T - pow(T, 2.0*S)*G + pow(T, 1.0 + 2.0*S) +
G + (1.5 + 0.0*S)*pow(G, S));
```

---

For typical values of “amt”, the above expression for “result” can be further simplified as follows:

---

```
float result = 0.5*(T - T*G + pow(T, 4.0) + G + 1.5*pow(G, S));
or
float result = 0.5*(abs(T - pow(T, 4.0*S)*G) + pow(T, 4.0) + G +
1.5*pow(G, S));
```

---

Returning to FIGS. **2** and **3**, texture level **240** may be received as a user input to specify the strength of the texturizing effect applied to coarse **230** and fine **235** texturized images (block **325**). Texture level **240** may be received as an input through, for example, texture level slider **140/145** in user interface **100** illustrated in FIG. **1**. In one embodiment, texturized image **245** may be a weighted combination (i.e., weighted by the texture level) of coarse texturized image **230** and fine texturized image **235** (block **330**). In one embodiment, coarse and fine texturized images may be combined in accordance with the following sample instructions or program code:

```
image=TL*coarse+(1.0-TL)*fine,
```

where “TL” represents normalized texture level **240** as provided through user interface **100** via, for example, slider control **140/145** (i.e., where 1.0 is the maximum coarseness and 0.0 is the minimum coarseness), “image” represents a pixel value of texturized image **245**, “coarse” represents a corresponding pixel value from coarse texturized image **230**, and “fine” represents a corresponding pixel value from fine texturized image **235**. Although texturized image **245** has been described as being generated based on a simple weighted combination of the coarse and fine texturized images, texture level **240** may be utilized to combine coarse and fine texturized images in other manners as well. For example, rather than a simple linear weighted combination, the texture level may be utilized to determine the respective weighting to be assigned to the coarse and fine texturized images according to a predefined non-linear function. Although texturized image **245** has been described as being generated from the combination of two texturized images (i.e., coarse texturized image **230** and fine texturized image **235**), texturized image **245** could also be generated from the combination of a larger number of texturized images. For example, an input image could be combined with three or more texture images to generate three or more texturized images that are each weighted according to a selected texture level and are combined into a combined texturized image. In one embodiment, texturized image **245** will be a grayscale image having the desired level of the selected texture applied to the selected image.

Continuing, colorize level **250** may be received (block **335**) as a user input to specify the strength or level of colorization to apply to texturized image **245** (block **340**). Colorize level **250** may be received, for example, through slider **150/155** in user interface **100** illustrated in FIG. **1**. A colorization operation in accordance with one embodiment of block **340** may work as depicted in FIG. **5**. In the illustrated embodiment, the specified color level (e.g., **250**) is depicted along the horizontal axis, the resulting colorized image color is illustrated along the vertical axis, and a normalized threshold color level of 0.5 has been defined. Point **500** corresponds to a color level of 0 and represents a grayscale version of texturized image **245**. That is, no color from original image **205** is added to texturized image **245** when colorize level **250** is equal to 0. As colorize level **250** is increased between point **500** and point **505**, color is gradually added to texturized image **245** (e.g., via blending into non-white pixels of texturized image **245**) until, at point **505** (corresponding to the threshold color level value, “TH”), 100% of the color from original image **205** is included in colorized image **255**. As colorize level **250** is

further increased from point **505** to point **510**, the color level in colorized image **255** varies from the color in original image **205** (at point **505**) to the color in a vibrance-filtered version of original image **205**, fully effected at point **510**. In the illustrated embodiment, color values in colorized image **255** can be determined in accordance with the following blend operations, expressed as instructions or program code applicable to an environment making use of Apple's Core Image framework:

---

```

mix(orig, gray, (TH - colorAmt)/TH); for 0 ≤ colorAmt ≤ TH
and
mix(orig, vibrance, (colorAmt - TH)/(1 - TH)); for TH <
colorAmt ≤ 1

```

---

where "orig" represents original image **205**, "gray" represents a grayscale version of original image **205**, "vibrance" represents a vibrance-filtered version of original image **205**, "colorAmt" represents the color level, "TH" represents the threshold color level (e.g., 0.5 in FIG. 5), and mix( ) represents a generic mixing, combining or blending function. In accordance with the above program code, the color quality of colorized image **255** may be controlled based on a user's selection of the color level (e.g., colorize level **250**) between a grayscale version of original image **205** and a full vibrance-filtered version of original image **205**. In general, vibrance filters adjust an image's saturation so that clipping is minimized as colors approach full saturation, changing the saturation of all lower-saturated colors with less effect on the higher saturated colors. Therefore, a vibrance filter increases the vibrance of an image by applying a controlled color enhancement that balances saturation levels throughout an image. It has been found that the use of vibrance filters as described herein substantially prevents skin tones from becoming oversaturated.

Once colorized image **255** is generated, textured image **245** and colorized image **255** may be combined to generate output image **260** (block **345**). Combine operations in accordance with block **345** may utilize substantially any functional combination that meets the designer's goals. One well-known combination function is a weighted blend operation.

Referring to FIG. 6, a simplified functional block diagram of illustrative electronic device **600** is shown according to one embodiment. Electronic device **600** may include processor **605**, display **610**, user interface **615**, graphics hardware **620**, device sensors **625** (e.g., proximity sensor/ambient light sensor, accelerometer and/or gyroscope), microphone **630**, audio codec(s) **635**, speaker(s) **640**, communications circuitry **645**, digital image capture unit **650**, video codec(s) **655**, memory **660**, storage **665**, and communications bus **670**. Electronic device **600** may be, for example, a portable device such as a personal digital assistant (PDA), personal music player, mobile telephone, notebook, laptop or tablet computer. Electronic device **600** may also be a non-portable device such as, for example, a desktop or server computer. More particularly, the disclosed operations may be implemented on a device having some or all of the components of device **600**.

Processor **605** may execute instructions necessary to carry out or control the operation of many functions performed by device **600**. Processor **605** may, for instance, drive display **610** and receive user input from user interface **615**. User interface **615** can take a variety of forms, such as a button, keypad, dial, a click wheel, mouse, keyboard, display screen and/or a touch screen. Processor **605** may also, for example, be a system-on-chip such as those found in mobile devices and include a dedicated graphics processing unit (GPU). Pro-

cessor **605** may be based on reduced instruction-set computer (RISC) or complex instruction-set computer (CISC) architectures or any other suitable architecture and may include one or more processing cores. Graphics hardware **620** may be special purpose computational hardware for processing graphics and/or assisting processor **605** to process graphics information. In one embodiment, graphics hardware **620** may include a programmable graphics processing unit (GPU).

Sensor and camera circuitry **650** may capture still and video images that may be processed, at least in part, by video codec(s) **655** and/or processor **605** and/or graphics hardware **620**, and/or a dedicated image processing unit incorporated within circuitry **650**. Images so captured may be stored in memory **660** and/or storage **665**. Memory **660** may include one or more different types of media used by processor **605** and graphics hardware **620** to perform device functions. For example, memory **660** may include memory cache, read-only memory (ROM), and/or random access memory (RAM). Storage **665** may store media (e.g., audio, image and video files), computer program instructions or software, preference information, device profile information, and any other suitable data. Storage **665** may include one or more non-transitory storage mediums including, for example, magnetic disks (fixed, floppy, and removable) and tape, optical media such as CD-ROMs and digital video disks (DVDs), and semiconductor memory devices such as Electrically Programmable Read-Only Memory (EPROM), and Electrically Erasable Programmable Read-Only Memory (EEPROM). Memory **660** and storage **665** may be used to tangibly retain computer program instructions or code organized into one or more modules and written in any desired computer programming language. When executed by, for example, processor **605** such computer program code may implement one or more of the methods (such as operation **200**) described herein.

It is to be understood that the above description is intended to be illustrative, and not restrictive. The material has been presented to enable any person skilled in the art to make and use the inventive concepts described herein, and is provided in the context of particular embodiments, variations of which will be readily apparent to those skilled in the art (e.g., some of the disclosed embodiments may be used in combination with each other). Many other embodiments will be apparent to those of skill in the art upon reviewing the above description. The scope of the invention therefore should be determined with reference to the appended claims, along with the full scope of equivalents to which such claims are entitled. In the appended claims, the terms "including" and "in which" are used as the plain-English equivalents of the respective terms "comprising" and "wherein."

The invention claimed is:

**1.** A non-transitory program storage device, readable by a processor and comprising instructions stored thereon to cause one or more processors to:

- obtain an input image;
- generate first and second texturized images based, at least in part, on the input image and a selected texture type;
- generate a combined texturized image based, at least in part, on the first and second texturized images and a selected texture level;
- generate a colorized image based, at least in part, on the combined texturized image and a selected color level; and
- generate an output image based, at least in part, on the combined texturized image and the colorized image.

2. The non-transitory program storage device of claim 1, wherein the instructions to cause the one or more processors to obtain an input image comprise instructions to cause the one or more processors to:

- receive a selection of a first image; and
- apply an unsharp mask to the first image to generate the input image.

3. The non-transitory program storage device of claim 1, wherein the instructions to cause the one or more processors to generate first and second texturized images comprise instructions to cause the one or more processors to:

- obtain a first texture image and a second texture image corresponding to a selected texture type;
- combine the input image with the first texture image to generate the first texturized image; and
- combine the input image with the second texture image to generate the second texturized image.

4. The non-transitory program storage device of claim 3, wherein the first texture image comprises a coarse version of the selected texture type and the second texture image comprises a fine version of the selected texture type.

5. The non-transitory program storage device of claim 1, wherein the instructions to cause the one or more processors to generate first and second texturized images based, at least in part, on the input image and a selected texture type comprise instructions to cause the one or more processors to obtain the selected texture type through a graphical user interface.

6. The non-transitory program storage device of claim 1, wherein the instructions to cause the one or more processors to generate a combined texturized image comprise instructions to cause the one or more processors to blend the first texturized image with the second texturized image based, at least in part, on the selected texture level.

7. The non-transitory program storage device of claim 1, wherein the instructions to cause the one or more processors to generate a combined texturized image comprise instructions to cause the one or more processors to obtain the selected texture level through a graphical user interface.

8. The non-transitory program storage device of claim 7, wherein the instructions to cause the one or more processors to generate a colorized image comprise instructions to cause the one or more processors to obtain the selected color level through the graphical user interface.

9. The non-transitory program storage device of claim 1, wherein the instructions to cause the one or more processors to generate a colorized image comprise instructions to cause the one or more processors to:

- apply a first colorize regime for a first range of selected color level; and
- apply a second colorize regime for a second range of selected color level.

10. The non-transitory program storage device of claim 9, wherein the instructions to cause the one or more processors to apply a first colorize regime for a first range of selected color level comprise instructions to cause the one or more processors to blend between a gray version of the input image and the input image.

11. The non-transitory program storage device of claim 10, wherein the instructions to cause the one or more processors to blend between a gray version of the input image and the input image comprise instructions to cause the one or more processors to linearly interpolate a color between the gray version of the input image and the input image based, at least in part, on the value of the selected color level.

12. The non-transitory program storage device of claim 9, wherein the instructions to cause the one or more processors

to apply a second colorize regime for a second range of selected color level comprise instructions to cause the one or more processors to blend between the input image and a vibrance-filtered version of the input image.

13. The non-transitory program storage device of claim 12, wherein the instructions to cause the one or more processors to blend between the input image and a vibrance-filtered version of the input image comprise instructions to cause the one or more processors to linearly interpolate a color between the input image and a vibrance-filtered version of the input image based, at least in part, on the value of the selected color level.

14. The non-transitory program storage device of claim 8, wherein the instructions to cause the one or more processors to obtain the selected texture level through a graphical user interface comprise instructions to cause the one or more processors to:

- determine that a touch-sensitive user interface component has been contacted along a first direction; and
- display arrows on the touch-sensitive user interface component coincident with the first direction in response to having determined that the touch-sensitive user interface component has been contacted along a first direction, wherein the arrows indicate along which directions the touch-sensitive user interface component may be manipulated to effect a change in the selected texture level.

15. The non-transitory program storage device of claim 14, wherein the instructions to cause the one or more processors to obtain the selected color level through a graphical user interface comprise instructions to cause the one or more processors to:

- determine that the touch-sensitive user interface component has been contacted along a second direction; and
- display arrows on the touch-sensitive user interface component coincident with the second direction in response to having determined that the touch-sensitive user interface component has been contacted along a second direction, wherein the arrows indicate along which directions the touch-sensitive user interface component may be manipulated to effect a change in the selected color level.

16. A method, comprising:

- obtaining, by one or more processors, an input image;
- generating, by the one or more processors, first and second texturized images based, at least in part, on the input image and a selected texture type;
- generating, by the one or more processors, a combined texturized image based, at least in part, on the first and second texturized images and a selected texture level;
- generating, by the one or more processors, a colorized image based, at least in part, on the combined texturized image and a selected color level; and
- generating, by the one or more processors, an output image based, at least in part, on the combined texturized image and the colorized image.

17. The method of claim 16, wherein the act of generating first and second texturized images comprises:

- obtaining a first texture image and a second texture image corresponding to a selected texture type;
- combining the input image with the first texture image to generate the first texturized image; and
- combining the input image with the second texture image to generate the second texturized image.

18. The method of claim 16, wherein the act of generating a combined texturized image comprises generating a

11

weighted combination of the first texturized image with the second texturized image based, at least in part, on the selected texture level.

19. A non-transitory program storage device, readable by a processor and comprising instructions stored thereon to cause one or more processors to:

- display a graphical user interface comprising:
  - one or more selectable image objects representative of one or more images;
  - one or more selectable texture objects representative of one or more texture types;
  - a texture level selector; and
  - a color level selector;
- receive a selection of one of the selectable image objects, the selected image object corresponding to a selected image;
- receive a selection of one of the selectable texture objects, the selected texture object corresponding to a selected texture type;
- generate a first texturized image and a second texturized image based, at least in part, on the selected image and the selected texture type;
- generate a combined texturized image based, at least in part, on the first texturized image, the second texturized image, and a texture level received via the texture level selector; and
- generate a colorized output image based, at least in part, on the combined texturized image, the selected image, and a color level received via the color level selector.

20. The non-transitory program storage device of claim 19, wherein the instructions to cause the one or more processors to display a graphical user interface further comprise instruc-

12

tions to cause the one or more processors to display a graphical user interface comprising an image preview frame.

21. The non-transitory program storage device of claim 20, wherein the image preview frame represents a two-dimensional texture-color continuum such that a selection of any point within the image preview frame represents a first input to the texture level selector and a second input to the color level selector.

22. The non-transitory program storage device of claim 20, further comprising instructions to cause the one or more processors to display the colorized output image within the image preview frame.

23. The non-transitory program storage device of claim 19, wherein the one or more selectable texture objects comprise one or more selectable objects representative of at least one of a pencil texture type, a charcoal texture type, an ink texture type, a water color texture type, a crayon texture type, and a pastel texture type.

24. The non-transitory program storage device of claim 19, wherein the instructions to cause the one or more processors to generate a first texturized image and a second texturized image comprise instructions to:

- retrieve a predefined coarse texture image corresponding to the selected texture type;
- retrieve a predefined fine texture image corresponding to the selected texture type;
- combine the coarse texture image with the selected image to generate the first texturized image; and
- combine the fine texture image with the selected image to generate the second texturized image.

\* \* \* \* \*