



(86) Date de dépôt PCT/PCT Filing Date: 1998/12/01	(51) Cl.Int. ⁷ /Int.Cl. ⁷ B01J 13/12
(87) Date publication PCT/PCT Publication Date: 2000/06/08	(72) Inventeurs/Inventors:
(45) Date de délivrance/Issue Date: 2004/02/24	MATHIOWITZ, EDITH, US;
(85) Entrée phase nationale/National Entry: 2001/05/29	JACOB, JULES S., US;
(86) N° demande PCT/PCT Application No.: US 1998/025435	CHICKERING, DONALD E., III, US;
(87) N° publication PCT/PCT Publication No.: 2000/032307	PEKAREK, KATHLEEN, US
	(73) Propriétaire/Owner:
	BROWN UNIVERSITY RESEARCH FOUNDATION, US
	(74) Agent: BERESKIN & PARR

(54) Titre : PREPARATION DE MICROCAPSULES POLYMERES A PAROIS MULTIPLES A PARTIR DE POLYMERES HYDROPHILES

(54) Title: PREPARATION OF MULTIWALL POLYMERIC MICROCAPSULES FROM HYDROPHILIC POLYMERS

(57) **Abrégé/Abstract:**

Two or more hydrophilic, water soluble polymers that are not soluble in each other at a particular concentration and temperature, but which have a positive spreading coefficient in solution, are used to form multi-layered polymeric microspheres. The multi-layer microspheres produced by the method are distinguished by extremely uniform dimensioned polymer layers and actual incorporation of a substance to be delivered into the polymer layers. In the preferred embodiment of the method, two polymers are dissolved in an aqueous solvent, the substance to be incorporated is dispersed or dissolved in the polymer solution, the mixture is suspended in an organic solvent or polymer/water mixture and stirred, and the solvent is slowly evaporated, creating microspheres with an inner core formed by one polymer and an outer layer formed by the second polymer.



**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁷ : B01J 13/12	A1	(11) International Publication Number: WO 00/32307 (43) International Publication Date: 8 June 2000 (08.06.00)
(21) International Application Number: PCT/US98/25435 (22) International Filing Date: 1 December 1998 (01.12.98) (71) Applicant: BROWN UNIVERSITY RESEARCH FOUNDATION [US/US]; Post Office 1949, Providence, RI 02912 (US). (72) Inventors: MATHIOWITZ, Edith; 184 Rawson Road, Brookline, MA 02146 (US). JACOB, Jules, S.; 95 Lake Ridge Drive, Taunton, MA 02780 (US). CHICKERING, Donald, E., III; 3 Holly Way, Framingham, MA 01701 (US). PEKAREK, Kathleen; 3201 Highbrook Drive, Midland, MI 48642 (US). (74) Agents: PABST, Patrea, L. et al.; Arnall Golden & Gregory, LLP, 2800 One Atlantic Center, 1201 West Peachtree Street, Atlanta, GA 30309-3450 (US).		(81) Designated States: CA, JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE). Published <i>With international search report.</i>
(54) Title: PREPARATION OF MULTIWALL POLYMERIC MICROCAPSULES FROM HYDROPHILIC POLYMERS (57) Abstract Two or more hydrophilic, water soluble polymers that are not soluble in each other at a particular concentration and temperature, but which have a positive spreading coefficient in solution, are used to form multi-layered polymeric microspheres. The multi-layer microspheres produced by the method are distinguished by extremely uniform dimensioned polymer layers and actual incorporation of a substance to be delivered into the polymer layers. In the preferred embodiment of the method, two polymers are dissolved in an aqueous solvent, the substance to be incorporated is dispersed or dissolved in the polymer solution, the mixture is suspended in an organic solvent or polymer/water mixture and stirred, and the solvent is slowly evaporated, creating microspheres with an inner core formed by one polymer and an outer layer formed by the second polymer.		

Yet another method used to form microcapsules is phase separation. Essentially, a polymer is forced to precipitate around a core by addition of non-solvent or by addition of a second polymer which is incompatible with the first polymer.

A polymer coating can be added to spherical particles using a fluidized bed method. In this method, microspheres of one polymer or particles of the substance to be encapsulated are suspended in a vertical column by air flow. The polymer used for coating is dissolved in an appropriate solvent and sprayed down over the suspended particles. A uniform polymer coating may be obtained for particles larger than 50 μ m. This method, however, is not appropriate for water-soluble polymers due to the time required for water evaporation.

U.S. Patent No. 4,861,627 to Mathiowitz, describes a method for making polymeric microspheres with a polymeric core made of a first polymer, a uniform coating layer made of a second polymer, and a substance incorporated in at least one of the polymers. The first and second polymer are immiscible in each other, and separate into distinct phases when dissolved in appropriate solvents or when melted together. The interfacial tension of the polymers causes one polymer to engulf the other polymer, resulting in microspheres with a core of one polymer, and a uniform coating of the second polymer. The microspheres are made from polymers that are soluble in a volatile organic solvent.

While all of these methods are useful in making microspheres or microcapsules for controlled delivery, they have certain disadvantages. The coating method described in U.S. Patent No. 4,861,627 provides microspheres with uniform layers, but is not applicable to hydrophilic polymers that are not soluble in volatile organic solvents. Other coating methods, which are applicable to hydrophilic polymers, do not always yield uniform polymer layers. The best one can do at present is to dip microspheres formed of one polymer into a bath of a second polymer (pan coating). However, the coatings tend to be non-uniform both with respect to coverage and to thickness. This can be fatal to a system for controlled delivery, as in controlled drug delivery systems requiring linear release of the drug as the polymer degrades *in vivo*. Further, many of these methods require multiple steps, with increasing quality control problems at each stage. The final yield is frequently low.

It is therefore an object of the present invention to provide a one step method for manufacturing delivery systems consisting of two or more hydrophilic polymers in microcapsule form.

It is another object of the present invention to provide a method for making polymeric delivery devices where substances, in particle form if solids, or live cells, can be incorporated directly into polymers and which can be conducted at relatively low temperatures to avoid damaging any thermolabile substances to be incorporated.

Summary of the Invention

A single step method for preparing multilayer polymeric drug, protein, or cell delivery devices from two or more hydrophilic polymers is disclosed. Any two or more different biodegradable, or non-degradable, water soluble polymers which are not soluble in each other at a particular concentration as dictated by their phase diagrams may be used. The multilayer microcapsules produced by the method have uniformly dimensioned layers of polymer and can incorporate a range of substances including biologically active agents such as drugs or cells, or diagnostic agents such as dyes.

In the preferred embodiment, two hydrophilic polymers are dissolved in an aqueous solution, a substance to be incorporated is dispersed or dissolved in the polymer solution, the mixture is suspended in a continuous phase, and the solvent is slowly evaporated, creating microspheres with an inner core formed by one polymer and an outer layer of the second polymer. The continuous phase can be either an organic oil, a volatile organic solvent, or an aqueous solution containing a third polymer that is not soluble with the first mixture of polymers and which will cause phase separation of the first two polymers as the mixture is stirred.

In another embodiment, two or more hydrophilic polymers are dissolved in mixtures of organic and aqueous solutions and then mixed together. By selecting the appropriate solvents and polymers, the two solutions will not be soluble in each other and will result in a suspension or emulsion. This insoluble mixture can then be suspended in yet another continuous phase, in which neither polymer is soluble, and the solvents are removed by evaporation.

In another embodiment, two hydrophilic polymers that gel upon a change in temperature are separately dissolved to form two polymer solutions. These solutions are mixed and phase separated so that one layer engulfs the other, then the temperature is altered to gel one of the polymers. Optionally, the temperature can be altered to gel the second polymer. In some embodiments, there is no need to dry the resulting microspheres, particularly when cells are encapsulated.

In another embodiment, polymers are selected that can be ionically or covalently cross-linked, or cross-linked by heating. Two polymer solutions are mixed and phase separated so that one polymer engulfs the other, then one or both of the polymers are cross-

linked by adding a cross linking agent, for example, ions to effect ionic crosslinking, glutaraldehyde to effect chemical crosslinking with functional groups such as amine groups, or free-radical initiation effected by azo-bisisobutyronitrile (AIBN) or t-butyl peroxide, by photoinitiators active in the ultraviolet (UV) region, such as benzoin ethyl ether, or
5 photoinitiators active in visible light to crosslink free-radical polymerizable groups, such as carbon-carbon double bonds.

In a further embodiment, solvents in polymer solutions are evaporated rapidly to produce multiple spheres of a first hydrophilic polymer within a layer of a second hydrophilic polymer. The rate of evaporation can be varied to form a core of the first polymer and a
10 coating of the second polymer, or multiple spheres of a first polymer within a layer of the second polymer.

Important parameters for producing multi-layered microcapsules of the desired composition are: the selection of the hydrophilic polymers, including the purity and the molecular weights of the polymers, the solvent, the solubility and concentration of the
15 polymers in the solvent, the selection and composition of the non-solvent, including adding an emulsifier to the non-solvent, the processing temperature, the rate of solvent evaporation, the rate of mixing, the physical and chemical properties of the substance to be incorporated, and ionic composition of the solvent (i.e., salt concentration). The optimum conditions can be determined empirically by one skilled in the art by measuring the surface tension or
20 interfacial tension of the polymers under the processing conditions.

Examples demonstrate the production of multilayered microcapsules composed of polyethylene glycol and dextran, and gelatin and agarose.

Brief Description of the Drawings

25 Figure 1 is a schematic illustration of microspheres in which one polymer completely engulfs another polymer (lower left), one polymer partially engulfs another polymer (lower center), and neither polymer phase engulfs the other (lower right).

Figure 2 is a light micrograph of a microsphere containing an inner core of polyethylene glycol and an outer core of dextran.

30 Figure 3 is a light micrograph of several microspheres containing an inner core of polyethylene glycol and an outer core of dextran.

Figure 4 is a scanning electron micrograph of a microsphere containing an outer core

of gelatin and an inner core of agarose.

Detailed Description of the Invention

Microcapsules including a core of a first hydrophilic polymer and a coating of a
5 second hydrophilic polymer and methods of forming the microcapsules are disclosed. In one embodiment, a substantially uniform coating of the second polymer may be obtained.

The method of the present invention is described in detail as follows.

I. COMPONENTS

Polymer Selection

10 Polymers are selected on the basis of their physical and chemical properties, especially their degradation characteristics *in vivo* when used in biomedical applications. Polymers that are approved by the FDA as food ingredients are preferred for food applications and those which are approved for medical applications are preferred for medical applications. Factors which must be taken into consideration in the selection of the polymers
15 include the purity of the polymers, their molecular weight, and their solubility in aqueous and aqueous/organic solutions. Further, the polymers must be immiscible in each other.

The polymers used in the method are preferably hydrophilic polymers. As defined herein, hydrophilic polymers are those which are soluble in water or mixtures of water and some polar organic solvents, such as low molecular weight alcohols, acetone,
20 dimethylformamide, dimethyl sulfoxide, dioxane, acetonitrile and tetrahydrofuran. The polar organic solvent is preferably present at a concentration of about 0 to 50% by volume.

As used herein, "water-soluble" means that the entire polymer must be completely soluble in aqueous or aqueous/organic solutions, such as buffered saline or buffered saline with small amounts of added organic solvents as cosolvents.

25 Examples of water-soluble polymers include polyamines having amine groups on either the polymer backbone or the polymer side chains, such as poly-L-lysine and other positively charged polyamino acids of natural or synthetic amino acids or mixtures of amino acids, including poly(D-lysine), poly(ornithine), poly(arginine), and poly(histidine), and nonpeptide polyamines such as poly(aminostyrene), poly(aminoacrylate), poly(N-methyl
30 aminoacrylate), poly(N-ethylaminoacrylate), poly(N,N-dimethyl aminoacrylate), poly(N,N-diethylaminoacrylate), poly(aminomethacrylate), poly(N-methyl amino-methacrylate), poly(N-ethyl aminomethacrylate), poly(N,N-dimethyl aminomethacrylate), poly(N,N-diethyl

aminomethacrylate), poly(ethyleneimine), polymers of quaternary amines, such as poly(N,N,N-trimethylaminoacrylate chloride), poly(methyacrylaminoethyltrimethyl ammonium chloride), poly(ethyloxazoline), poly(N-vinyl pyrrolidone), and neutral poly(amino acids) such as poly(serine), poly(threonine), and poly(glutamine).

5 Other suitable polymers include naturally occurring proteins, such as gelatin, bovine serum albumin, and ovalbumin, as well as complex sugars, such as hyaluronic acid, starches and agarose. The polymer can be any biocompatible water-soluble polyelectrolyte polymer. In one embodiment, a polycationic polymer, for example, any polymer having protonated heterocycles attached as pendant groups, can be utilized.

10 Hydrophilic polymers also include poly(oxyalkylene oxides) such as poly(ethylene oxide), poly(vinyl alcohol), natural or synthetic polysaccharides and polysaccharide derivatives such as alginate, chitosan, dextran, water soluble cellulose derivatives such as hydroxy ethyl cellulose and carboxymethylcellulose, poly(hydroxyethyl acrylate), poly(hydroxy ethylmethacrylate), and polyacrylamides such as isopropylacrylamide. As used
15 herein "derivatives" include polymers having substitutions, additions of chemical groups, for example, alkyl, alkylene, hydroxylations, oxidations and other modifications routinely made by those skilled in the art.

Two-phase aqueous systems have been widely used to purify complex mixtures of bioactive agents. A list of polymers commonly used in aqueous two phase systems, as
20 reported in Albertsson and Tjerneld, Volume 228, *Methods in Enzymology* (Academic Press, New York), 1994, page 4, is shown in Table 1. Hydrophilic polymers which may be used to form microspheres include those listed in Table 1.

TABLE 1

Aqueous Two Phase Systems		Refs.
Polymer-polymer		
5	Nonionic	
	Dextran-poly(ethylene glycol) (PEG)	<i>a</i>
	Dextran-poly(ethylene glycol propylene glycol) copolymer (Ucon)	<i>b</i>
	Dextran-poly(vinyl alcohol) (PVA)	<i>a</i>
10	Dextran-ethylhydroxyethyl cellulose	<i>c</i>
	Dextran-benzoyldextran	<i>d</i>
	Dextran-hydroxypropyl dextran	<i>a</i>
	Dextran-Ficoll	<i>a</i>
	Dextran-polyvinylpyrrolidone (PVP)	<i>a</i>
15	Benzoyldextran-PEG	<i>d</i>
	Hydroxypropyl starch-PEG	<i>e</i>
	PVA-PEG	<i>c,f</i>
	Maltodextrin-PEG	<i>g</i>
	Pullulan-PEG	<i>h</i>
20	Poly(vinyl methyl ether)-PEG	<i>i</i>
	Ionic	
	Dextran sulfate-PEG	<i>a</i>
	Carboxymethyl dextran-PEG	<i>a</i>
	Dextran sulfate-poly(styrene sulfonate)	<i>j</i>
25	Dextran sulfate-DEAE-dextran	<i>a</i>
	PVA-acrylic copolymers	<i>k</i>
	Poly(acrylic acid)-PEG	<i>l</i>
	Poly(acrylamide)-PVP	<i>l</i>
	Salt-polymer	
30	Potassium phosphate-PEG	<i>a</i>
	Ammonium sulfate-PEG	<i>a</i>
	Potassium citrate-PEG	<i>m</i>
	Magnesium sulfate-PEG	<i>a</i>
35		
	^a P.A. Albertsson, "Partition of Cell Particles and Macromolecules," 3rd Ed. Wiley (Interscience), New York, 1986.	
	^b P.A. Harris, G. Karlstrom, and F. Tjerneld, <i>Bioseparation</i> , 2:237 (1991).	
40	^c F. Tjerneld, in "Separations Using Aqueous Phase Systems" (D. Fisher and I.A. Sutherland, eds.), p. 429, Plenum, New York, 1989.	
	^d M. Lu, F. Tjerneld, G. Johansson, and P.A. Albertson, <i>Bioseparation</i> , 2:247 (1991).	
	^e S. Sturesson, F. Tjerneld, and G. Johansson, <i>Appl. Biochem. Biotechnol.</i> , 26:281 (1990).	
	^f A. Kokkoris, J.B. Blair, and J.A. Shaeiwitz, <i>Biochim. Biophys. Acta</i> , 966:176 (1988).	
	^g D.C. Szlag and K.A. Giuliano, <i>Biotechnol. Tech.</i> , 2:277 (1988).	
45		

The systems are grouped according to nonionic-, ionic- and salt-polymer interactions. The variables that must be controlled when preparing two-phase aqueous systems include: polymer concentration and molecular weight, ionic composition, temperature, time allowed

for separation and interfacial tension. The interfacial tension is directly affected by the polymer concentration. As an example, the interfacial tension of the PEG-dextran system can vary from 0.0001 to 0.1 mN m⁻¹ by increasing the concentration of the components.

Preferred biodegradable polymers include zein, bovine serum albumin, human serum albumin and synthetic copolymers of hydrophilic and hydrophobic polymers, such as PEG-PLGA copolymers. PLGA is defined as a copolymer of polyL-lactic acid and polyglycolic acid.

The polymers are either liquid at room temperature or can be liquefied, for example, by melting the polymers or by dissolving the polymers in a solvent. The most important criteria for determining which polymer systems will form multilayer microspheres is the interfacial tension of the liquefied polymers and the spreading coefficient for the polymer system. Interfacial tension can be measured, calculated from measured surface tension or determined from the published literature. The spreading coefficient of the polymer system is calculated from the interfacial tension. When the spreading coefficient is positive, one polymer will engulf the other.

The theory by which one can determine whether one polymer will completely engulf the other polymer by determining the surface and/or interfacial tension of the polymers in solution is discussed in detail below.

Mixing of the Polymer Solutions with the Substance to be Incorporated

The polymers can be combined with the substance to be incorporated in either of two ways. In one method, each polymer is dissolved or melted separately and the solutions combined. In the second, both polymers are simultaneously dissolved in one solvent or melted together. The ultimate dispersion of the substance within the polymeric microspheres is determined in part by the method of dissolution and combination. The substance to be incorporated can be added directly to one or both of the polymer solutions or to the mixture.

Elements of protein partitioning theory originally developed to separate various parts of cells from each other can be adapted to load one layer or another of a multi-layered polymer microsphere with a particular protein. The partitioning coefficient is dependent upon the properties of the protein itself and of the two phase separated polymers. For each protein, its partitioning between the polymers can be altered by changing certain properties of the polymers. By varying the pH, ionic composition, or temperature of the system, and/or the molecular weight and concentration of the polymers, the partitioning coefficient of the

protein can be altered to achieve preferential loading of a particular polymer layer. For each system, the exact conditions for encapsulation must be determined experimentally from determined partitioning coefficients or from those reported in the literature. "Partitioning in Aqueous Two-Phase Systems," edited by Harry Walter, Donald E. Brooks, and Derek Fisher,
 5 Academic Press, Inc. (London, England), 1985.

The polymers are mixed together using conventional means such as an overhead stirring device, magnetic stirrer or agitation. The rate of stirring has an effect on the formation of the polymer layers and may be optimized for each polymer-solvent mixture.

Spreading Coefficient Calculation

10 The tendency of a liquid to spontaneously spread across a solid or liquid substrate can be expressed in terms of the surface and interfacial tensions of the components using Harkin's equation, described by W.D. Harkin, "The Physical Chemistry of Surface Films", page 23 (Reinhold Pub. Co., New York 1952).

$$15 \quad a. \quad \lambda_{ij} = \gamma_j - \gamma_i - \gamma_{ij} \quad (1)$$

where γ_j and γ_i are the surface tensions of the substrate and the liquid respectively, γ_{ij} is the interfacial tension of the substrate and liquid, and λ_{ij} is the spreading coefficient of liquid i on substrate j . Spreading is predicted to occur only for
 20 positive values of λ .

Harkin's equation can be rewritten for a system in which two dissimilar phases are dispersed within a third, by substituting the appropriate interfacial tensions for the surface tension values in equation 1:

$$25 \quad b. \quad \lambda_{31} = \gamma_{12} - \gamma_{32} - \gamma_{13} \quad (2)$$

In this case, λ_{31} is the spreading coefficient for component 3 on component 1 (conversely, λ_{13} is the spreading coefficient for component 1 on component 3) and describes the physical situation in which the ability of one dispersed component to displace
 30 the matrix from the surface of a second component is considered. In an analogy with equation (1), envelope formation will be observed when λ values are positive; but when λ_{31} and λ_{13} are both negative the dispersed phases will remain separated.

Equation 2 can also be used to predict the behavior of polymer blends, using the method of S.Y. Hobbs, M.E.J. Dekkers and V.H. Watkins, in Polymer, Vol. 29, 1598-1602, (1988), and references cited therein, if the interfacial tension for various polymers are known.

Polymeric Solutions or Liquids.

5 The same equations can be applied when two immiscible liquid drops, designated as phase 1 and 3, suspended in a third immiscible liquid, phase 2, are brought into contact. The resulting equilibrium configuration is readily predicted from the interfacial tension and the spreading coefficients. Three cases can be envisioned, as shown schematically in Figure 1:

- a) polymer A completely engulfing polymer B, or vice versa
- 10 b) polymer B partially engulfing polymer A, or vice versa, and
- c) both polymer phases non-engulfing.

Based on this theory, it is possible to measure the interfacial tension, or calculate the interfacial tension based on measurements of the surface tension of the polymers in solution, and predict which polymer-solvent systems will yield multilayered microspheres.

15 The surface tension can be measured using techniques known to those skilled in the art. For example, one can use a surface tensiometer, which employs the du Nouy ring method and consists of a platinum ring of known diameter which is placed in the polymer solution, then slowly pulled vertically. The ring attaches to the surface of the liquid and resists detaching from the liquid. The force required to detach the ring from the surface of
20 the liquid is measured and noted as apparent surface tension. This is multiplied by a correction factor, to determine the real surface tension.

Interfacial tension between liquids is measured similarly. Two liquids with different densities are carefully placed in a vessel to avoid mixing. The platinum ring is slowly inserted until it is well inside the lower liquid. The ring is lightly shaken to ensure that it is
25 devoid of the top layer liquid, using caution so as to not mix the liquids, especially at the interface. The same procedure for determining surface tension is then followed, pulling the ring vertically until it breaks the surface of the bottom liquid and enters the liquid on the top.

Selection of the Aqueous or Aqueous Organic Solvents

The solvent system must be chosen in conjunction with the polymers so that the polymers to be incorporated into the microcapsules will initially go into aqueous solution and then separate into distinct phases, with one polymer being engulfed by another. Polymers can be dissolved in water, or an aqueous/organic solvent which includes a mixture of water and a polar organic solvent. The choice of solvent will depend on the substance to be incorporated into the polymers since some solvent systems may have a detrimental effect on the biological activity of the substance.

The aqueous/organic solutions may include a mixture of water and a preferred concentration of between about 0 and 50% by volume of a polar organic solvent. Suitable solvents include but are not limited to ketones such as acetone, ethers such as tetrahydrofuran, dibutyl ether and dimethylsulfoxide, alkanamides such as dimethylformamide, and low molecular weight alcohols such as methanol, ethanol, isopropanol and propanol. Other suitable solvents include dioxane, acetonitrile and glycerol.

Selection of the Substance to be Incorporated

Examples of substances which can be incorporated include drugs, fertilizers, insecticides, chemical indicators or dyes, chemical reactants, imaging contrast agents such as air and carbon dioxide, magnetic and radioactive compound, and scents or flavorings.

Biologically active substances that can be incorporated include proteins, carbohydrates, nucleic acids, and inorganic and organic, biologically active molecules. Specific examples include enzymes, vaccines, antibiotics, antineoplastic agents, anesthetics, hormones, angiogenic agents, antibodies, neurotransmitters, psychoactive drugs, drugs affecting reproductive organs, and antisense oligonucleotides.

The substance to be incorporated must not be adversely affected by the polymer, polymer solvent or the temperature at which solvent evaporation or gelation occurs. The substance is preferably provided in solution or in a particle size small enough to avoid "channeling" within the polymer, although it can also be provided in a suspension, or in the case of gases, can be provided by sonicating or aerating the polymer solution in the presence of a gas to be encapsulated. Particle sizes are preferably in the range of 50 microns or less.

A surface active agent can be added in a range of between 0 and 50% surface active agent by volume of the second solution. Useful surface active agents include polyvinyl alcohol, gelatin, and other surfactants and emulsifiers known to those skilled in the art.

II. MICROSPHERE PREPARATION AND CHARACTERIZATION.

Multi-layer polymeric microcapsule delivery systems may be prepared which include a substance, such as a bioactive agent in the polymeric layers. In one embodiment, first and second polymers are dissolved in an aqueous solution, the substance to be encapsulated is
5 dispersed or dissolved in the polymer solution, and the mixture is suspended in a third solution which can be either an organic solvent or an organic oil, or an aqueous solution containing a third polymer, wherein the first two polymers are not soluble in the third solution. The mixture is stirred to form an emulsion of the first two polymers in the third continuous phase, and the solvent is slowly evaporated, creating microspheres with an inner
10 core of the first polymer and an outer layer of the second polymer. In another embodiment, the rate of evaporation may be accelerated if necessary to promote the formation of the outer layer of the second polymer and then the core of the first polymer.

In another embodiment, after phase separation has occurred, one polymer may be formed within a layer of the other polymer by decreasing the temperature thus allowing one
15 of the polymers to gel first and by further cooling to cause the second polymer to gel. In this embodiment, there may be no requirement for water removal from the microcapsules. Additionally, the polymers may be provided with crosslinkable groups, and the polymers may gel by the addition of a crosslinking agent. No evaporation of solvent is required in this case. In still another embodiment, the first polymer core may be formed within the second polymer
20 layer, and then the solvent can be evaporated by spray drying or lyophilization.

Removal of Solvent by Evaporation

In one embodiment, a solvent evaporation technique may be used to make polymeric microspheres. In this embodiment, two polymers are dissolved in an aqueous solvent in which each polymer is soluble, at concentrations slightly above or at the cloud point of the
25 two polymer solution. The resulting solution or suspension of the two polymers in solvent is then added to an organic or aqueous solution containing a different polymer that forces the first two polymers to phase separate, wherein the different polymer will not be part of the final product and is used only as a phase inducer, creating solid microspheres as the solvent evaporates. As the polymers become more concentrated, they begin to phase separate and if
30 given enough time will configure themselves in their most thermodynamically stable configuration as dictated by the spreading coefficient theory described above. When the rate of solvent removal is increased, kinetic factors determine the extent of spreading, often

trapping the spheres in a non-equilibrium configuration.

Due to the competing thermodynamics and kinetic processes, double-walled microspheres can be formed by two mechanisms. The first route involves a two polymer solution for which complete engulfment is predicted by the spreading coefficient theory and
5 the rate of polymer precipitation is slow enough for this thermodynamic equilibrium to be reached. In the second method, the completely engulfed configuration is a transient intermediate of the two polymers as they approach thermodynamic equilibrium, and the rate of polymer precipitation is adjusted so as to trap the two polymers in this non-equilibrium configuration. Under certain conditions, the water phase need not be removed, particularly in
10 embodiments involving cell encapsulation.

To form polymeric multiwall microcapsules, the aqueous solution of the two polymers is suspended in a non-solvent, preferably an organic solvent or an aqueous solution containing a substance that will cause the polymers in the polymer solution to phase separate from the polymeric solution. Between about 0 and 50% by volume of the second solution of
15 a surface active agent also may be added, such as a surfactant or an emulsifier. The solvent(s) then are slowly evaporated. Vacuum evaporation, lyophilization, or solvent evaporation in a non-solvent can be employed, as well as other methods known to those skilled in the art. Temperatures less than 100°C are preferred due to the labile nature of many biological active drugs. The polymer suspension can be frozen after one polymer has
20 engulfed the other to stabilize the microspheres during solvent removal.

It is critical to control the rate of solvent removal, as well as the parameters previously discussed, for one polymer solution to form a layer around a core of another polymer solution and to produce uniform layers. However, the effect of the rate of solvent removal on polymer layer formation may be used advantageously to modify the final product. For example,
25 increasing the rate of solvent removal causes the formation of spheres of the first polymer within the second polymer layer. The inclusion of the spheres can be useful in forming "channels" of one polymer within the other. By increasing the rate of evaporation still further, no inner layer is formed and all of the first polymer is present in spherical form within the second polymer layer. Inclusion of the spheres may be useful in forming
30 "channels" of a biodegradable polymer such as zein, bovine serum (BSA), human serum albumin (HSA), and PEG-PLGA within an outer layer of a non-degradable polymer such as polyethylene glycol (PEG).

Removal of Solvent by Spray Drying

The microspheres also may be formed by spray drying a polymer solution containing the substance to be incorporated. It is important to dry the spheres slowly enough for the engulfing polymer to completely coat the polymer with the higher surface tension.

5 Cooling of Mixtures of Melted Polymers

Multilayer microspheres can be formed when two melted polymers which have a positive spreading coefficient are emulsified in a non-solvent and then are rapidly cooled. The rate of cooling is important to the formation of microspheres having complete, uniform layers of polymer.

10 Crosslinking Polymers Forming One or Both Polymer Layers

Polymers may be utilized which are hydrophilic and also contain crosslinkable groups, such as functional groups that can be ionically or covalently crosslinked. When using these polymers, it may not be necessary to evaporate the polymer solvent before the polymers are crosslinked. In this embodiment, the two polymers in solution are phase separated so that
15 one polymer layer engulfs the other, and then one or both of the polymer layers are crosslinked.

Hydroxyl, carboxylic acid and amine groups can be crosslinked using metal ions, as known to those skilled in the art. In the preferred embodiment, hydrolytically stable poly(organophosphazenes) such as poly(carboxylatophenoxy)phosphazene and its
20 copolymers, poly(acrylic acid), poly(methacrylic acid) or methacrylic acid copolymers, that contain carboxylic acid, sulfonic acid or hydroxyl substituent groups, or alginate or chitosan, are crosslinked with divalent or trivalent cations such as calcium, lead, lanthanum, bismuth, barium, magnesium, aluminum, copper, cobalt, nickel, chromium, or cadmium, and, in a preferred embodiment, zinc. In one embodiment, pharmaceutically acceptable cations may
25 be utilized.

Covalent linkages between amine groups can be formed using a coupling agent such as glutaraldehyde, or by using a diacid chloride.

The polymers can also have free-radical polymerizable functional groups. An example of a free-radical polymerizable group is a carbon-carbon double bond. Preferred
30 polymerizable regions are acrylates, diacrylates, oligoacrylates, dimethacrylates, oligomethoacrylates, or other biologically acceptable photopolymerizable groups. These groups can be polymerized using free-radical initiators such as azo-bis-isobutyronitrile

(AIBN) and t-butyl peroxide, photoinitiators useful in the UV region (wavelengths below 380 nm) such as benzoin ethyl ether, and photoinitiators that are useful in the visible region (approximately 380 to 800 nm) such as certain dyes and chemical compounds known to those skilled in the art.

5 Useful photoinitiators are those which can be used to initiate polymerization of polymers by free-radical generation without cytotoxicity and within a short time frame, minutes at most and most preferably seconds. Initiators of choice for long wavelength ultraviolet (LWUV) initiation are dyes such as ethyl eosin, 2,2-dimethoxy-2-phenyl acetophenone, other acetophenone derivatives, and camphorquinone. Dyes also can be used
10 in the visible region. Light absorption by a dye causes the dye to assume a triplet state, the triplet state subsequently reacting with an amine to form a free radical which initiates polymerization. Preferred dyes include eosin dye and initiators such as 2,2-dimethyl-2-phenylacetophenone, 2-methoxy-2-phenylacetophenone, and camphorquinone.

Microsphere Formation by Gelation of Individual Phases

15 By taking advantage of the individual properties of polymers, it is possible to induce gelation and solidification of the individual layers following phase separation and engulfment. One property that can be exploited is temperature-dependent gelation. Many naturally-occurring hydrophilic polymers such as gelatin, albumin and agarose gel when the temperature of concentrated solutions is lowered. The gelling temperature of agarose and
20 gelatin is in the range of 26-40 °C depending on the source and formulation, while albumin solutions solidify below 15 °C. Hydrophobic derivatives of some synthetic polymers, such as isopropylacrylamide, also exhibit temperature-dependent solution properties, with gel points in the range of 20-60 °C depending on the degree of hydrophobic substitution and concentration.

25 Another thermal property of protein-based polymers, namely denaturation or coagulation, can be used to solidify layers of a multi-walled sphere. When concentrated solutions of albumin, casein or zein are heated above 80 °C, the proteins denature, changing their quaternary structure, and solidify. This property has been used to make single-walled microspheres of bovine serum albumin and zein.

30 Additionally, the thermal gelation or coagulation properties of one polymer can be combined with the ionic (or other) gelation properties of another polymer. Alginate, as an

example, can be crosslinked with divalent or trivalent cations. Concentrated solutions of agarose (heated above the gelation point) can be mixed with alginate, and phase separation can be induced by the cooling of agarose and gelation of alginate with metal ions.

Formation of Additional Polymer Layers

5 Additional polymers can be layered using the above techniques, however, the complexity of the process dramatically increases with each additional polymer. It is therefore preferred to add other layers using methods known to those skilled in the art such as the hot-melt technique.

The present invention is further described by the following non-limiting examples.

10

Example 1: Microcapsulates Prepared from Polyethylene Glycol and Dextran.

Polyethylene glycol (PEG, molecular weight 8,000 Da) and dextran (molecular weight 500,000 D) were used to form double-walled microspheres. Separate solutions of 30% PEG (w/v) and 20% dextran (w/v) were prepared and mixed together in equal volumes. A small
15 quantity of Blue Dextran (molecular weight 2,000,000 Da) was included in the dextran solution to act as a visual tracer. The mixture was shaken to disperse the phases within each other. The solution was poured into 300 ml of mineral oil and stirred to form an emulsion. Stirring was continued for three days, during which time the solution was heated to 90°C to expedite the evaporation of the aqueous solvent. Samples were removed periodically and
20 observed using optical microscopy. Initially, the droplets showed distinct phase separation, with dextran as the outer layer (Figures 2 and 3). While over time some of the microspheres agglomerated, the double-walled nature of the spheres was retained. The hardened beads were recovered by decanting the mineral oil and washing the settled microspheres with ethanol.

25

Example 2: Microspheres Prepared from Agarose and Gelatin

A similar method to Example 1 was used with agarose and gelatin as the polymers, however, in this case, the differences in gelation temperatures induced phase separation. Separate solutions of 20% agarose (w/v) and 4% gelatin (w/v) were prepared and maintained
30 at 50 °C to keep the solutions in the liquid state. The solutions were mixed in equal volumes, dispersed by shaking and poured into 300 mL of mineral oil at 80 °C. The mixture was

stirred until the emulsion droplets were of an appropriate size range, then the oil bath was rapidly cooled to 4 °C. The microspheres were collected by decanting the oil and were washed with ethanol. The spheres were analyzed with scanning electron microscopy (SEM) (Figure 4). The inner core of these spheres consisted of agarose, which solidifies at 42 °C, while the outer core consisted of gelatin which solidifies at 4 °C.

We claim:

1. A method for forming multi-layered polymeric microspheres of hydrophilic, water soluble polymers, the method comprising:
 - (i) selecting first and second hydrophilic, water soluble polymers;
 - (ii) dissolving the first hydrophilic, water soluble polymer in a first solution comprising solvent for the first polymer;
 - (iii) dissolving the second hydrophilic, water soluble polymer in a second solution comprising solvent for the second polymer;
 - (iv) mixing the hydrophilic, water soluble polymer solutions;
 - (v) combining the mixed hydrophilic, water soluble polymer solution with a third solution selected from the group consisting of organic oil, organic solvent, and combinations thereof, in which the first and second hydrophilic, water soluble polymers are not soluble, thereby to cause phase separation of the hydrophilic, water soluble polymers, and to allow the surface tension and the interfacial tension of the hydrophilic, water soluble polymers to cause the formation of microspheres, each microsphere including an inner core of the first hydrophilic, water soluble polymer, and at least one distinct outer layer of the second hydrophilic, water soluble polymer surrounding the first hydrophilic, water soluble polymer core.
2. The method of claim 1 wherein the first and second solutions are aqueous solutions.
3. The method of claim 1 wherein at least one of the first and second solutions includes water and a polar solvent.
4. The method of claim 1 wherein the first and second solutions are identical, and wherein steps (i)-(iv) comprise mixing the first and second hydrophilic, water soluble polymers in a single solution.
5. The method of claim 2 wherein step (v) further includes, after mixing the polymer solutions with the third solution, evaporating solvent from the combined mixture, to promote phase separation of the polymers and formation of the microspheres.
6. The method of claim 5 wherein the third solution is an organic solvent or an organic oil.
7. The method of claim 5 wherein the third solution is an aqueous solution containing a third polymer which promotes phase separation of the first and second polymers

and the third solution.

8. The method of claim 7 wherein the third solution includes a surface active agent.
9. The method of claim 8 wherein the surface active agent is an emulsifier.
10. The method of claim 5 wherein evaporating the solvent is conducted rapidly to form spheres of the first polymer within a layer of the second polymer.
11. The method of claim 1 further comprising:
 - (vi) cooling the combined mixture, thereby to gel the first and second polymers within the microspheres.
12. The method of claim 1 wherein at least one of the first and second hydrophilic, water soluble polymers includes crosslinkable groups, and wherein the method further comprises:
 - (vi) crosslinking the functional groups, thereby to gel at least one of the first and second polymers.
13. The method of claim 1 wherein a substance to be incorporated into the microspheres is added to at least the first polymer solution in step (ii), and wherein the substance is incorporated into at least the first polymer in the microsphere in step (v).
14. The method of claim 13 wherein the substance is incorporated into the first and second hydrophilic, water soluble polymers in the microsphere in step (v).
15. The method of claim 13 wherein a second substance to be incorporated is added to the second polymer solution in step (iii), and wherein the second substance is incorporated into at least the second polymer in the microsphere in step (v).
16. The method of claim 13 wherein the substance to be incorporated is biologically active.
17. The method of claim 1 further comprising forming additional polymer layers around the microspheres.
18. The method of claim 1 wherein the first and second hydrophilic, water soluble polymers are selected from the group consisting of polyamines, natural and synthetic polysaccharides, poly(oxalkylene)oxides, polyacrylamides, and synthetic copolymers of hydrophilic and hydrophobic polymers.
19. The method of claim 1 wherein the first and second hydrophilic, water soluble polymers each are biodegradable polyelectrolytes.

20. Polymeric microspheres formed of a first and second hydrophilic, water soluble polymer and a substance incorporated into at least one of the polymers; wherein each polymer forms at least one layer, and wherein the polymers are distinct from each other.
21. The polymeric microspheres of claim 20 wherein the first and second hydrophilic, water soluble polymers are selected from the group consisting of polyamines, natural and synthetic polysaccharides, poly(oxalkylene)oxides, polyacrylamides, and synthetic copolymers of hydrophilic and hydrophobic polymers.
22. The polymeric microspheres of claim 20 wherein the first and second polymers each are biodegradable polyelectrolytes.
23. The polymeric microspheres of claim 20 wherein the polymers are biodegradable and wherein the substance is a biologically active agent.
24. The polymeric microspheres of claim 20 wherein the second polymer forms spheres within a layer of said first polymer.
25. The polymeric microspheres of claim 20 wherein the polymers form two distinct layers and the substance is incorporated in both layers.

1/2

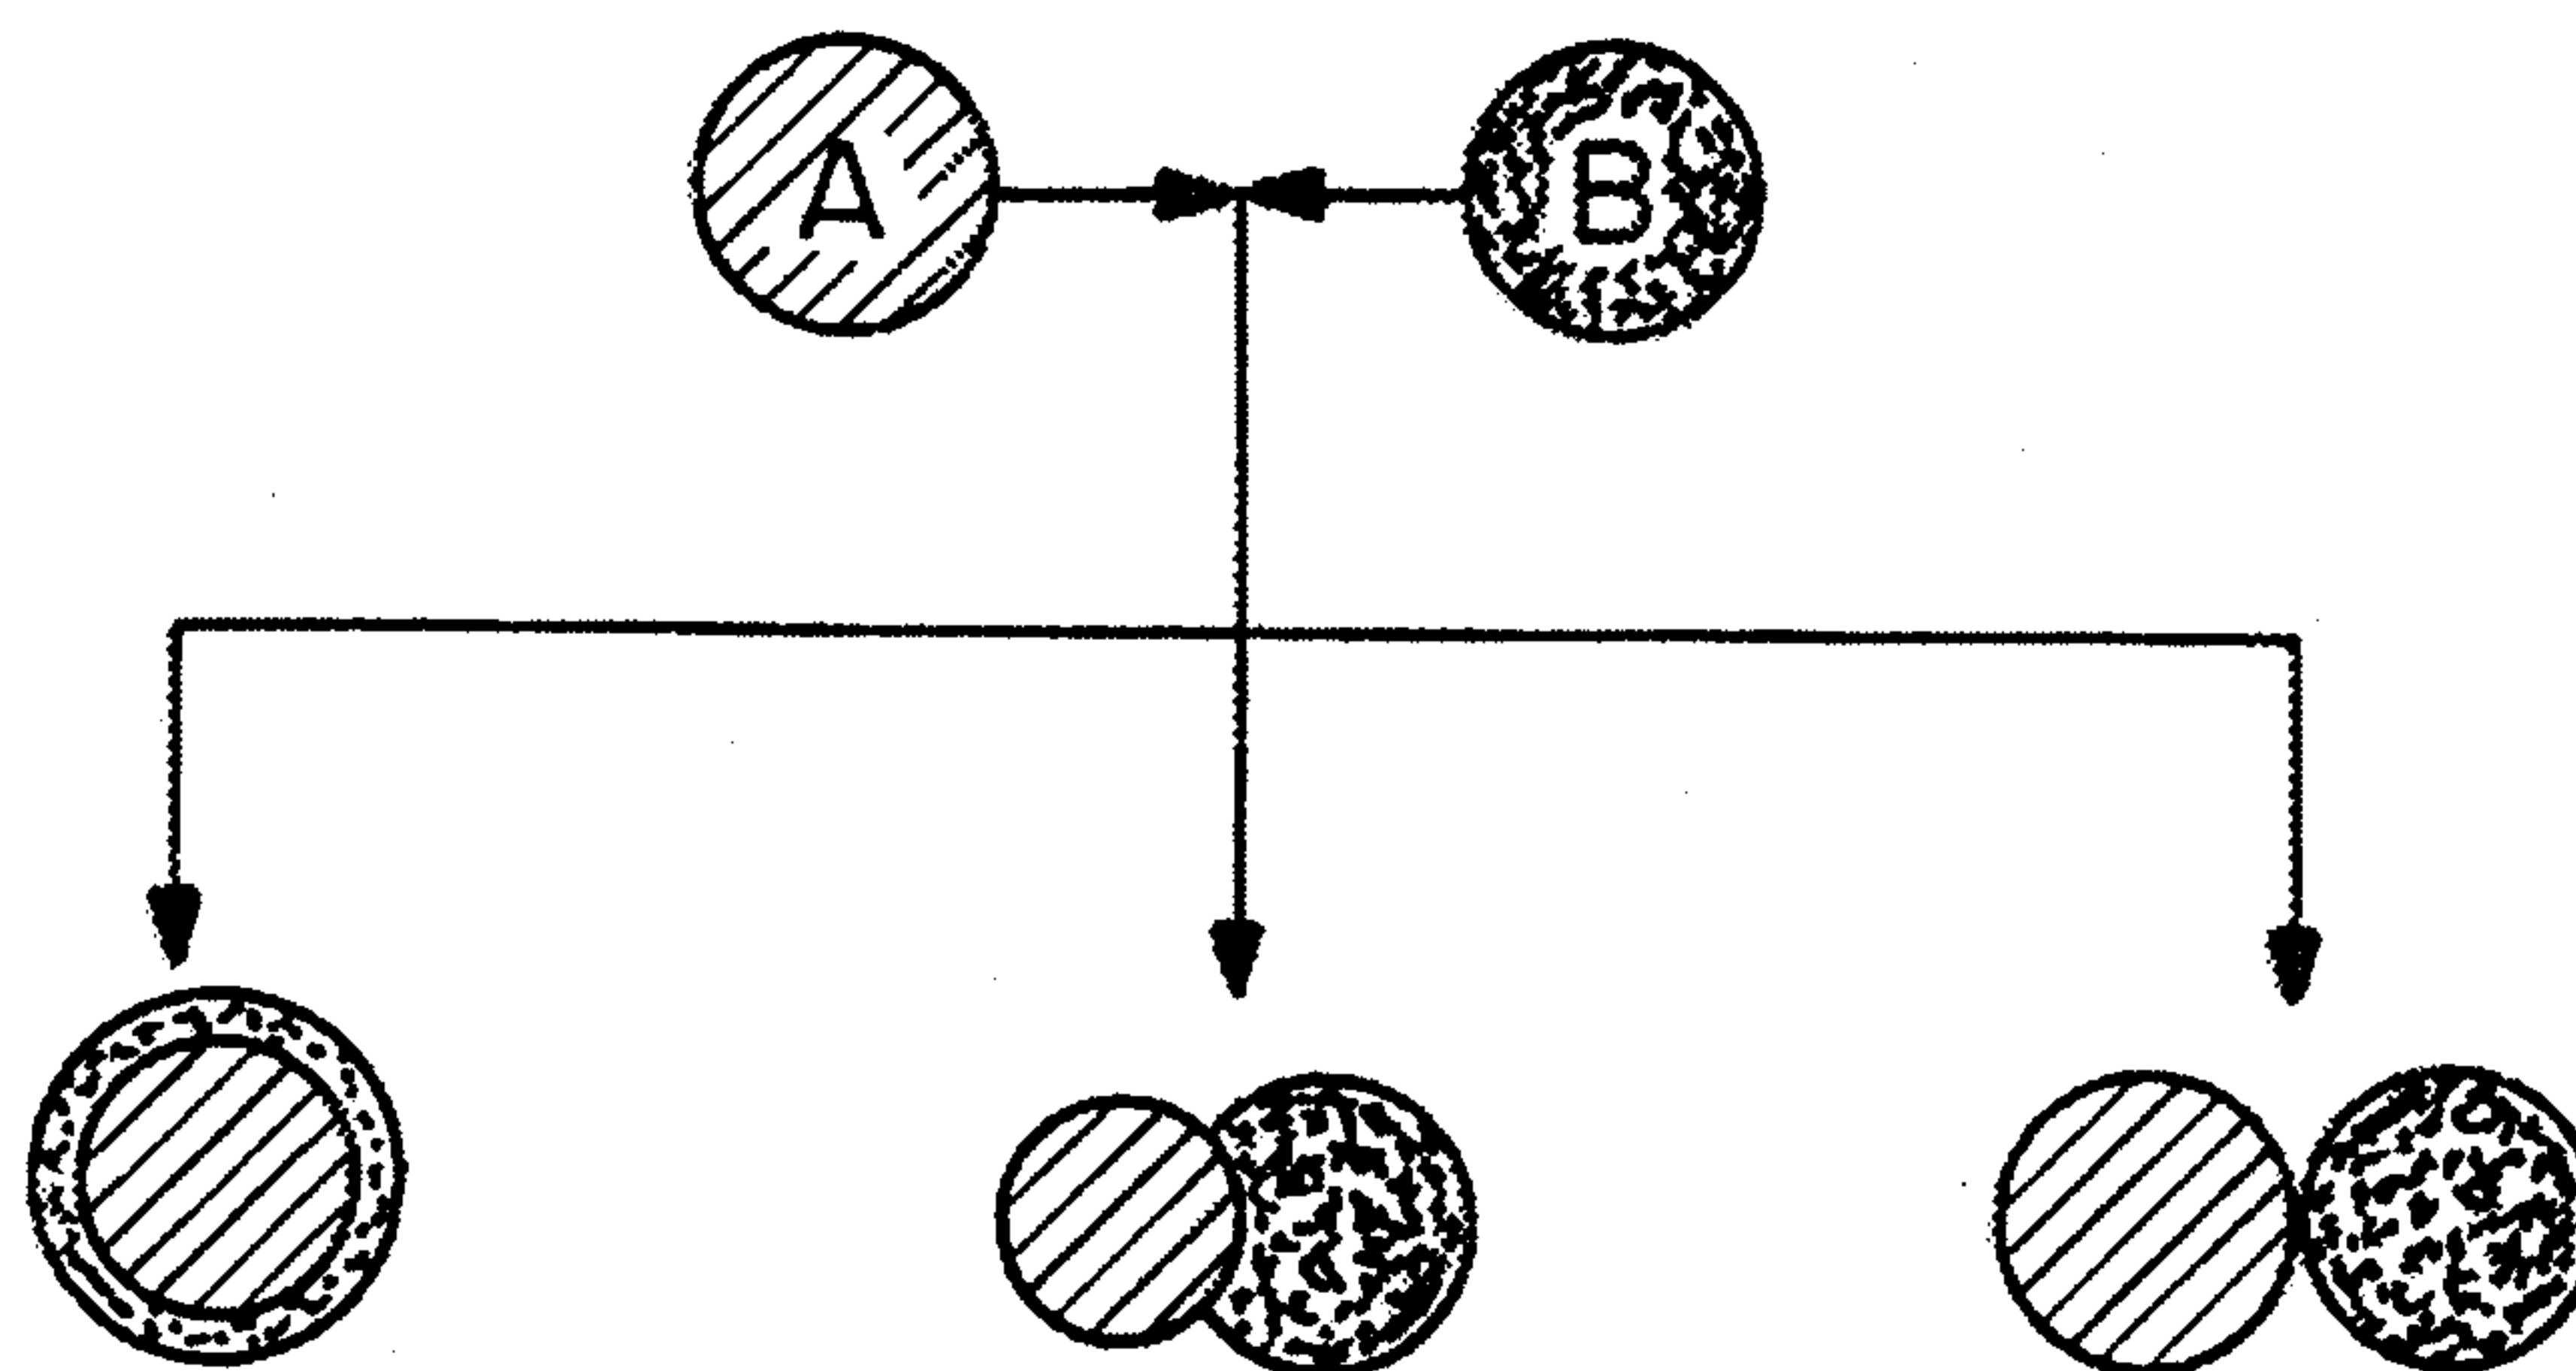


FIG. 1

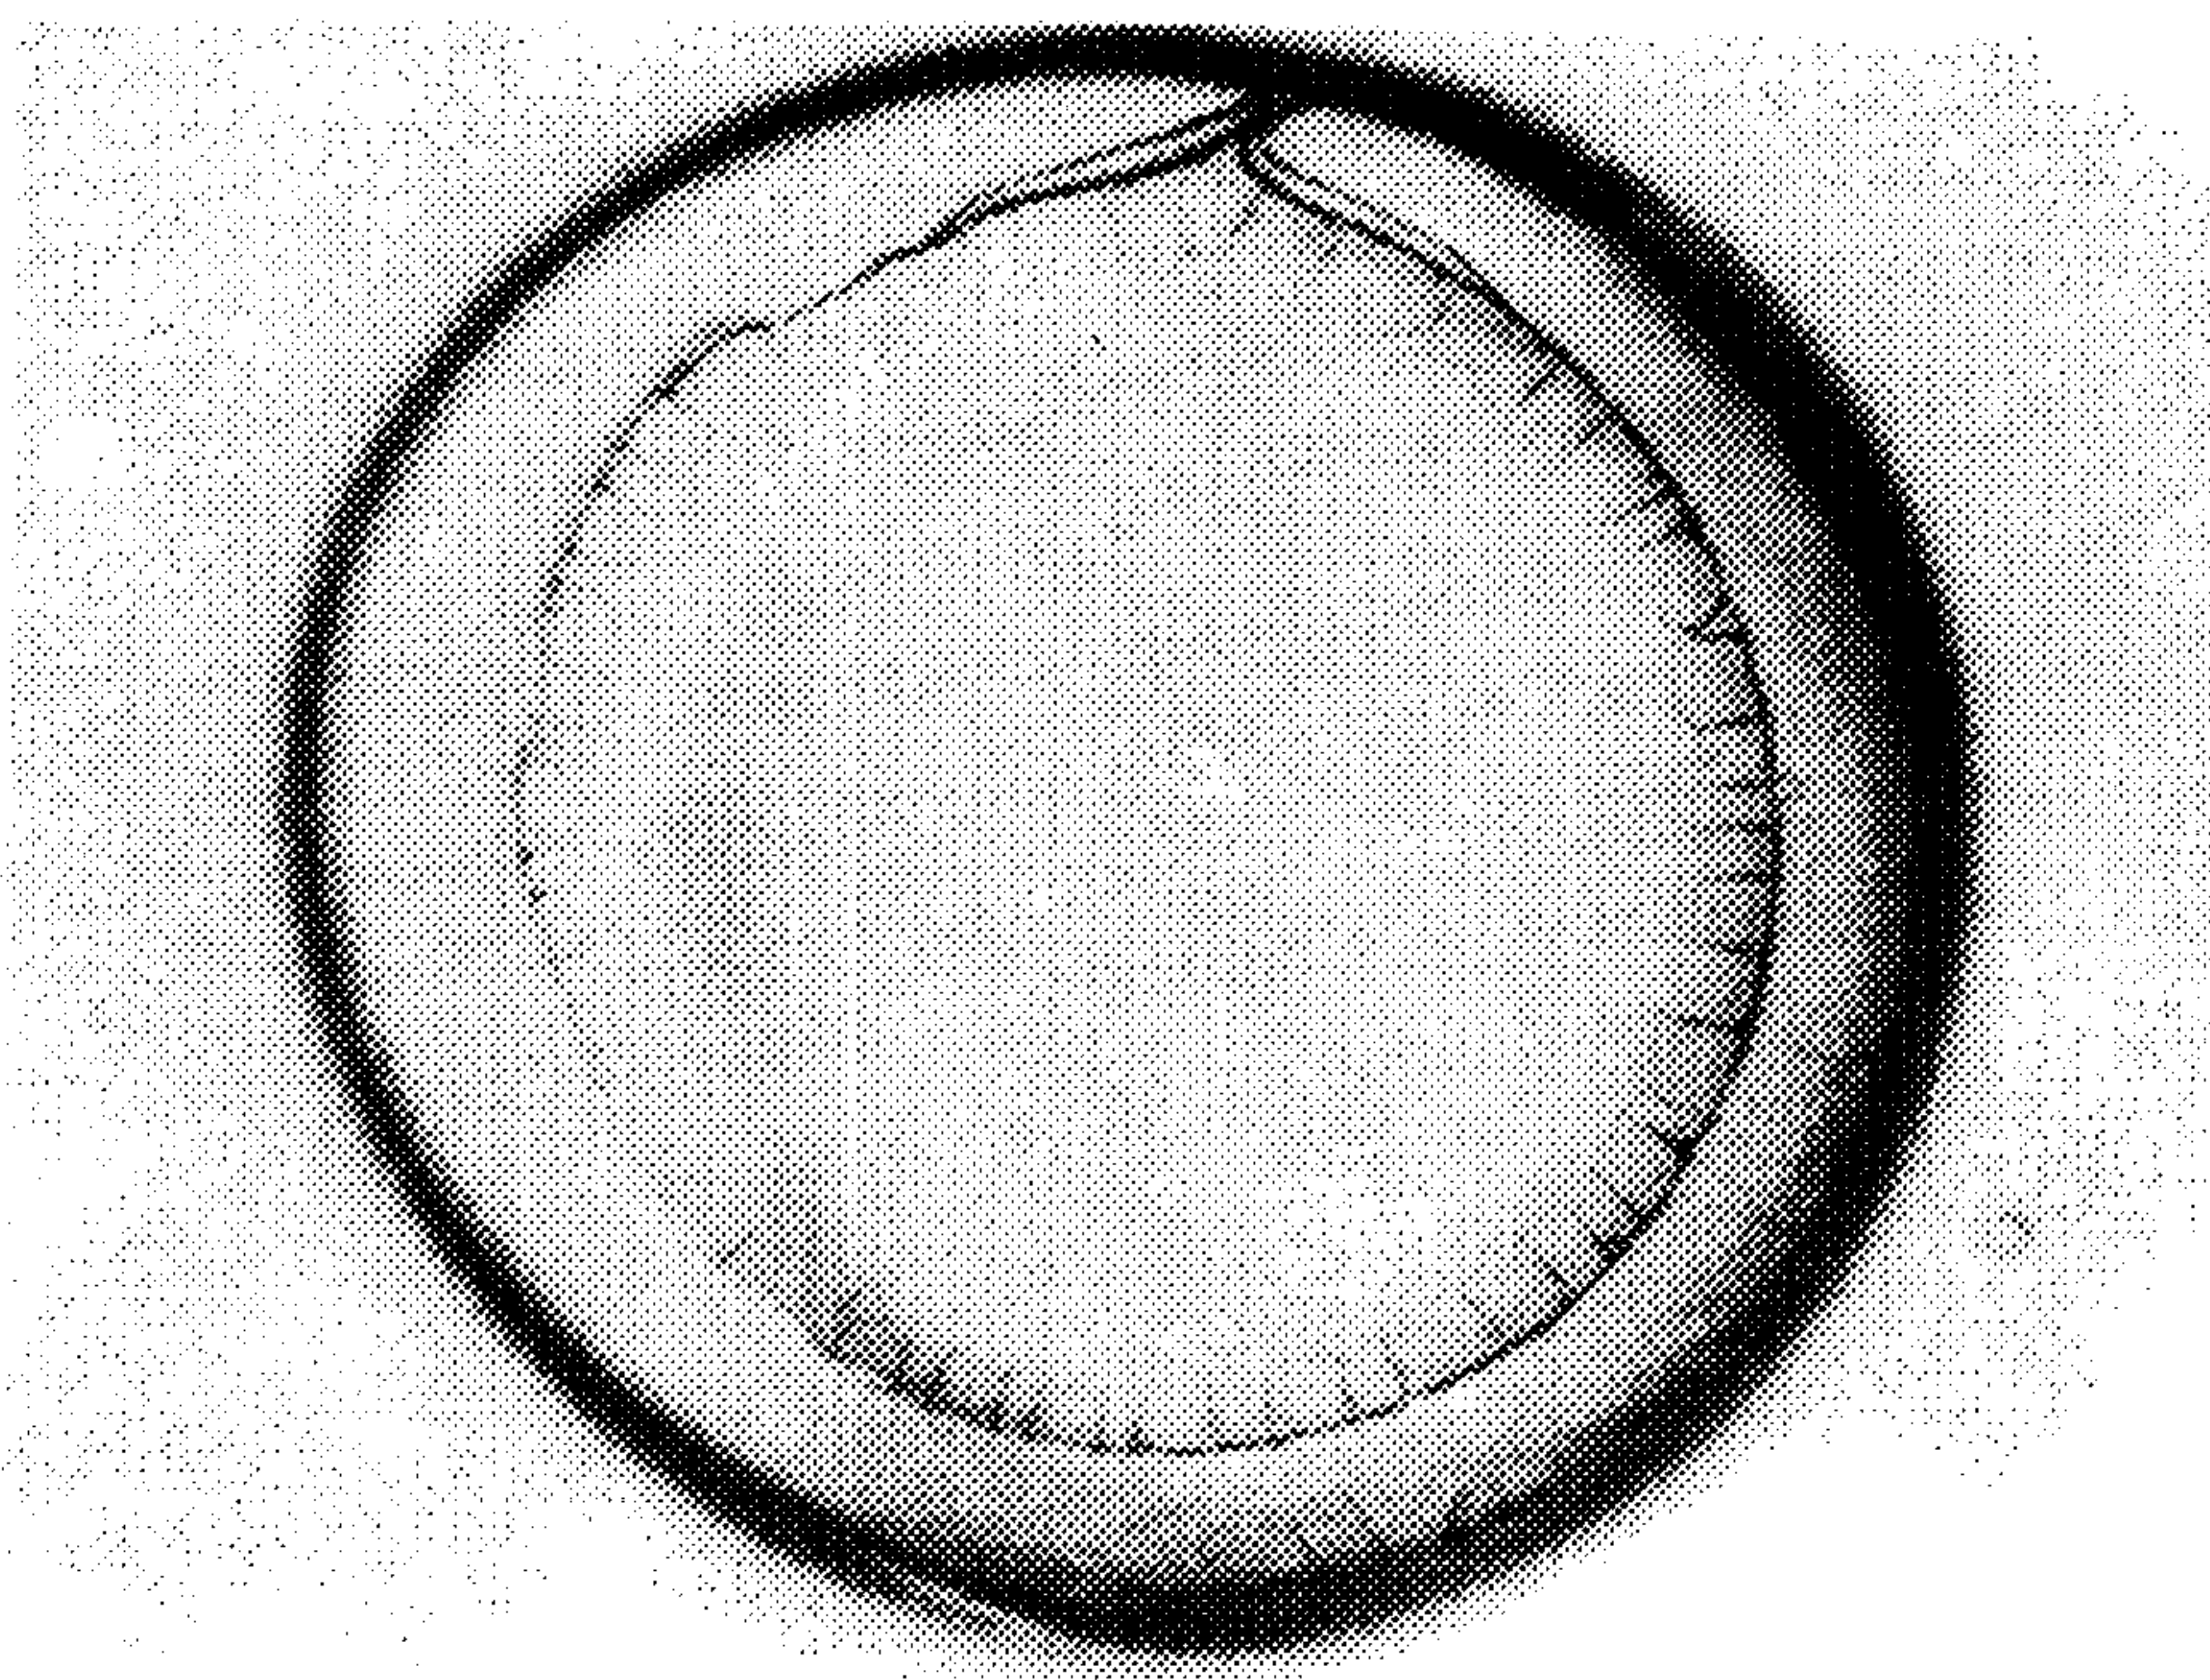


FIG. 2

WO 00/32307

PCT/US98/25435

2/2

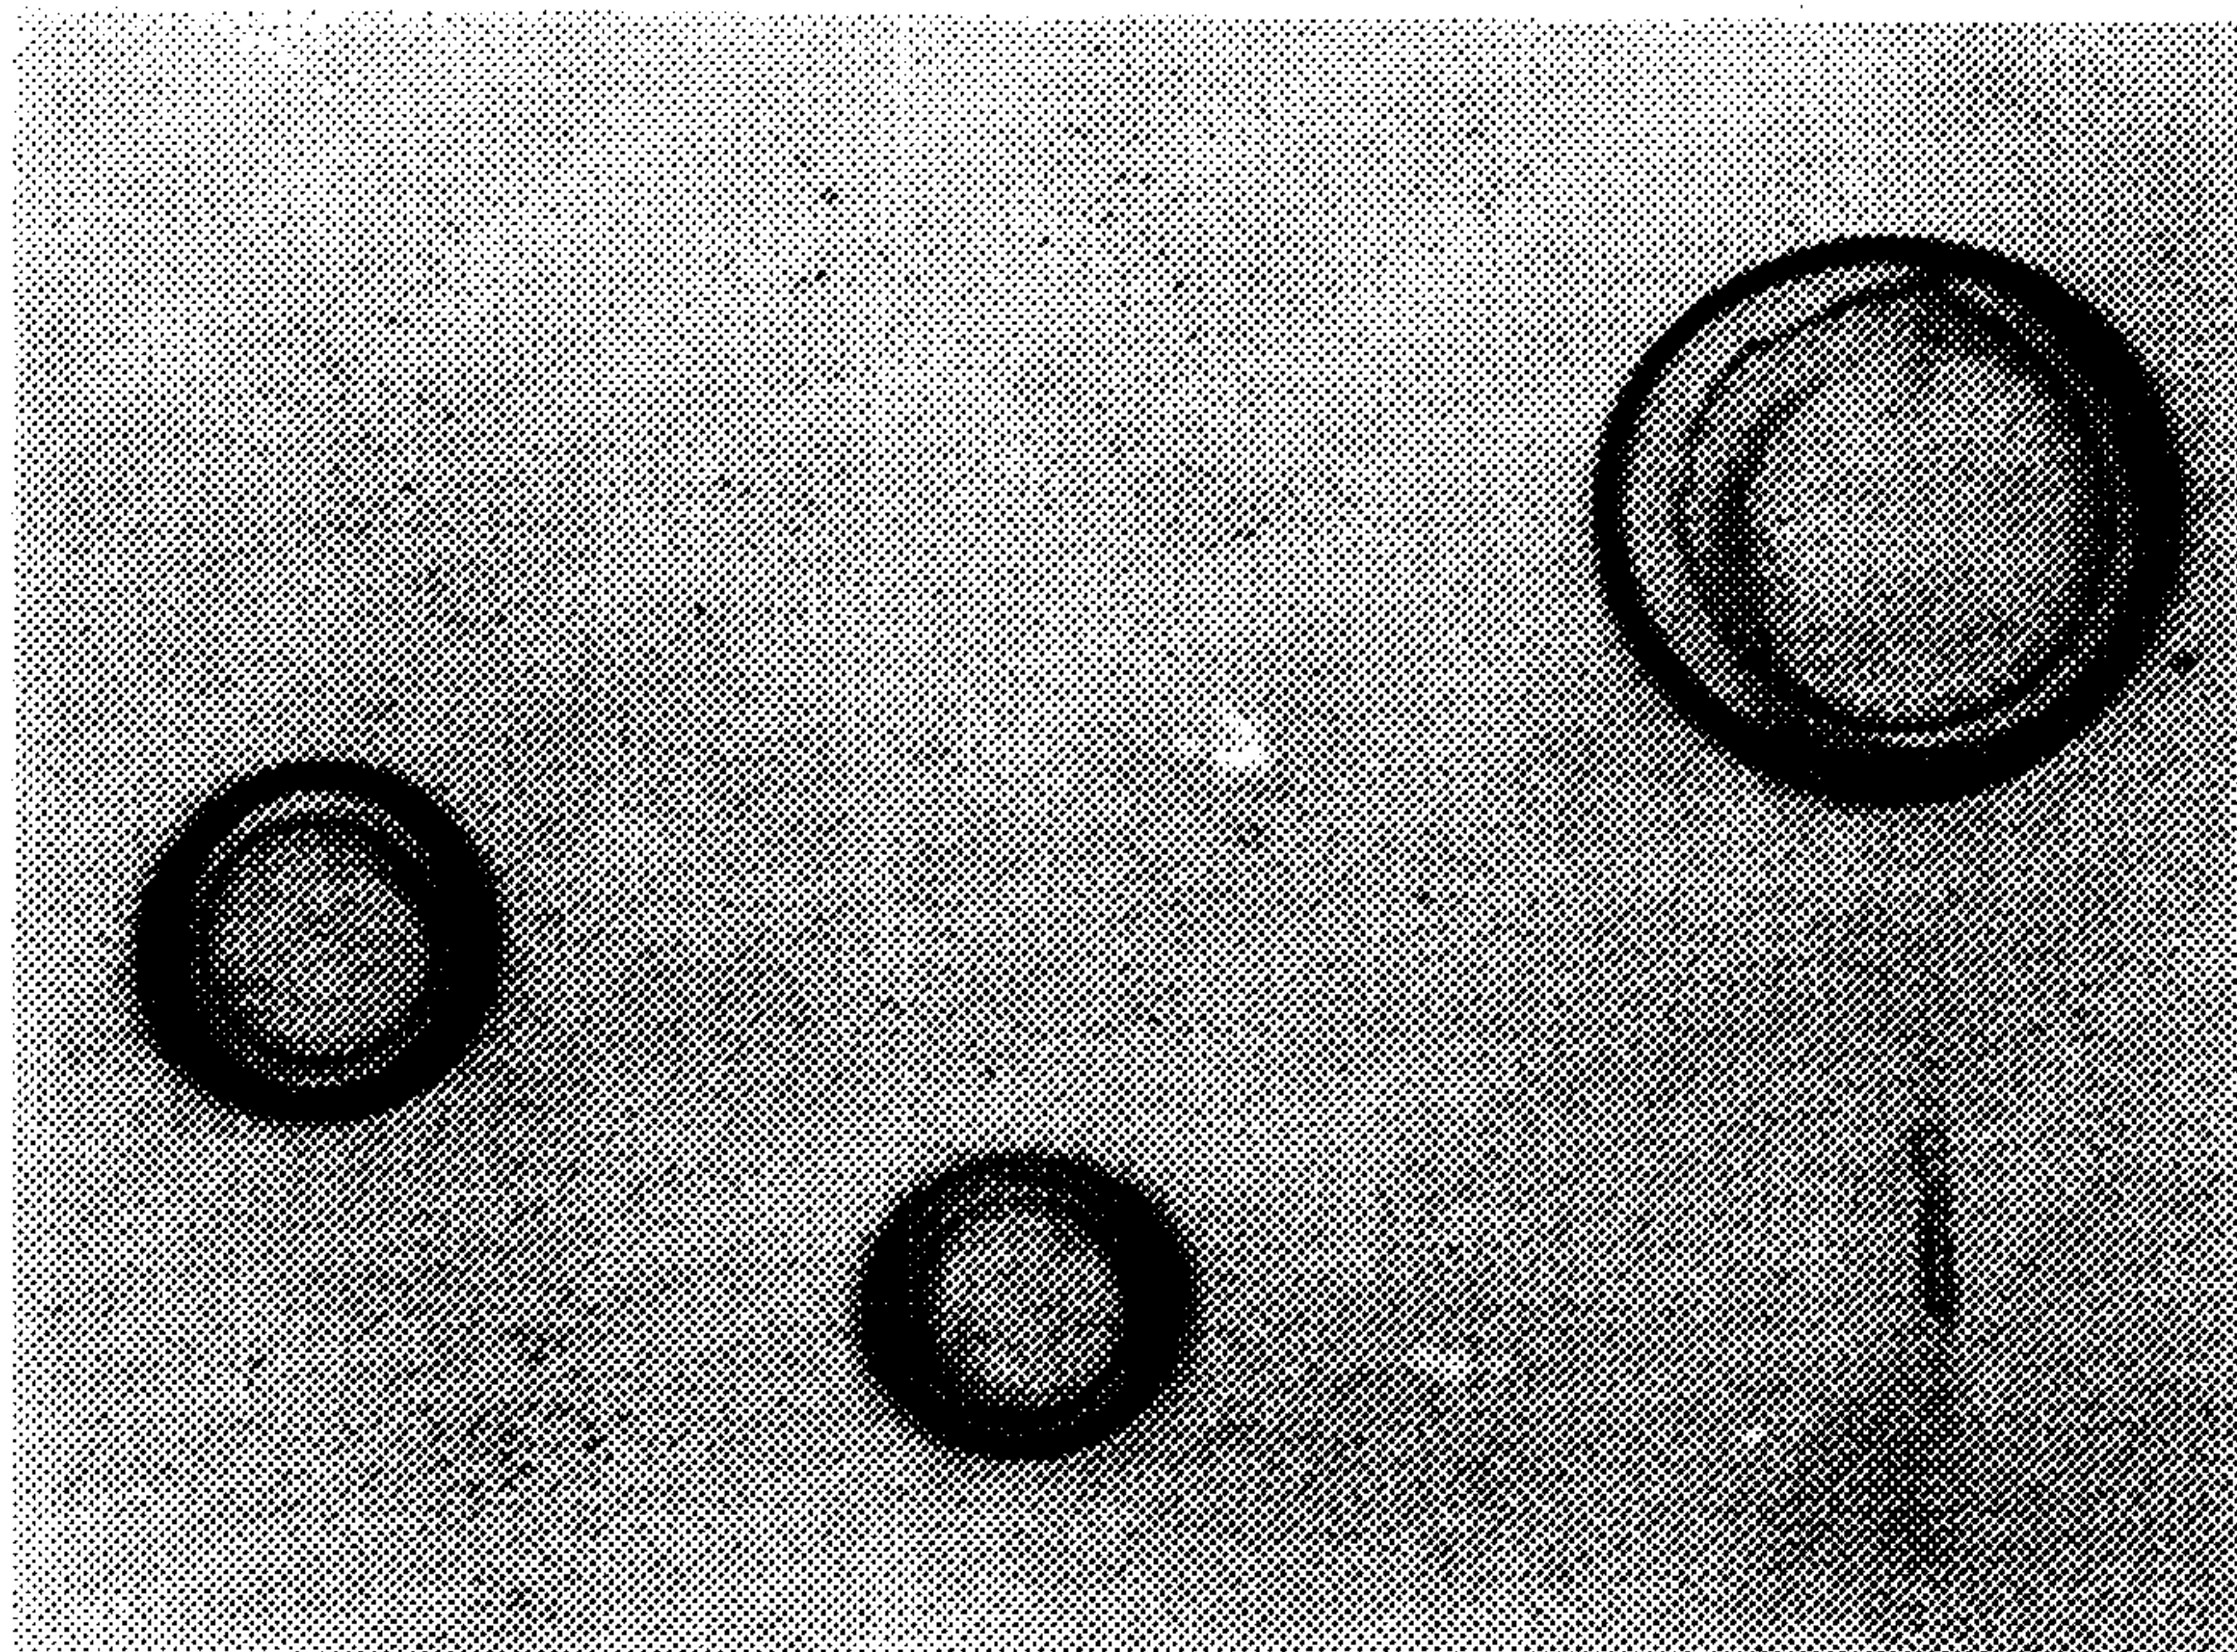


FIG.3

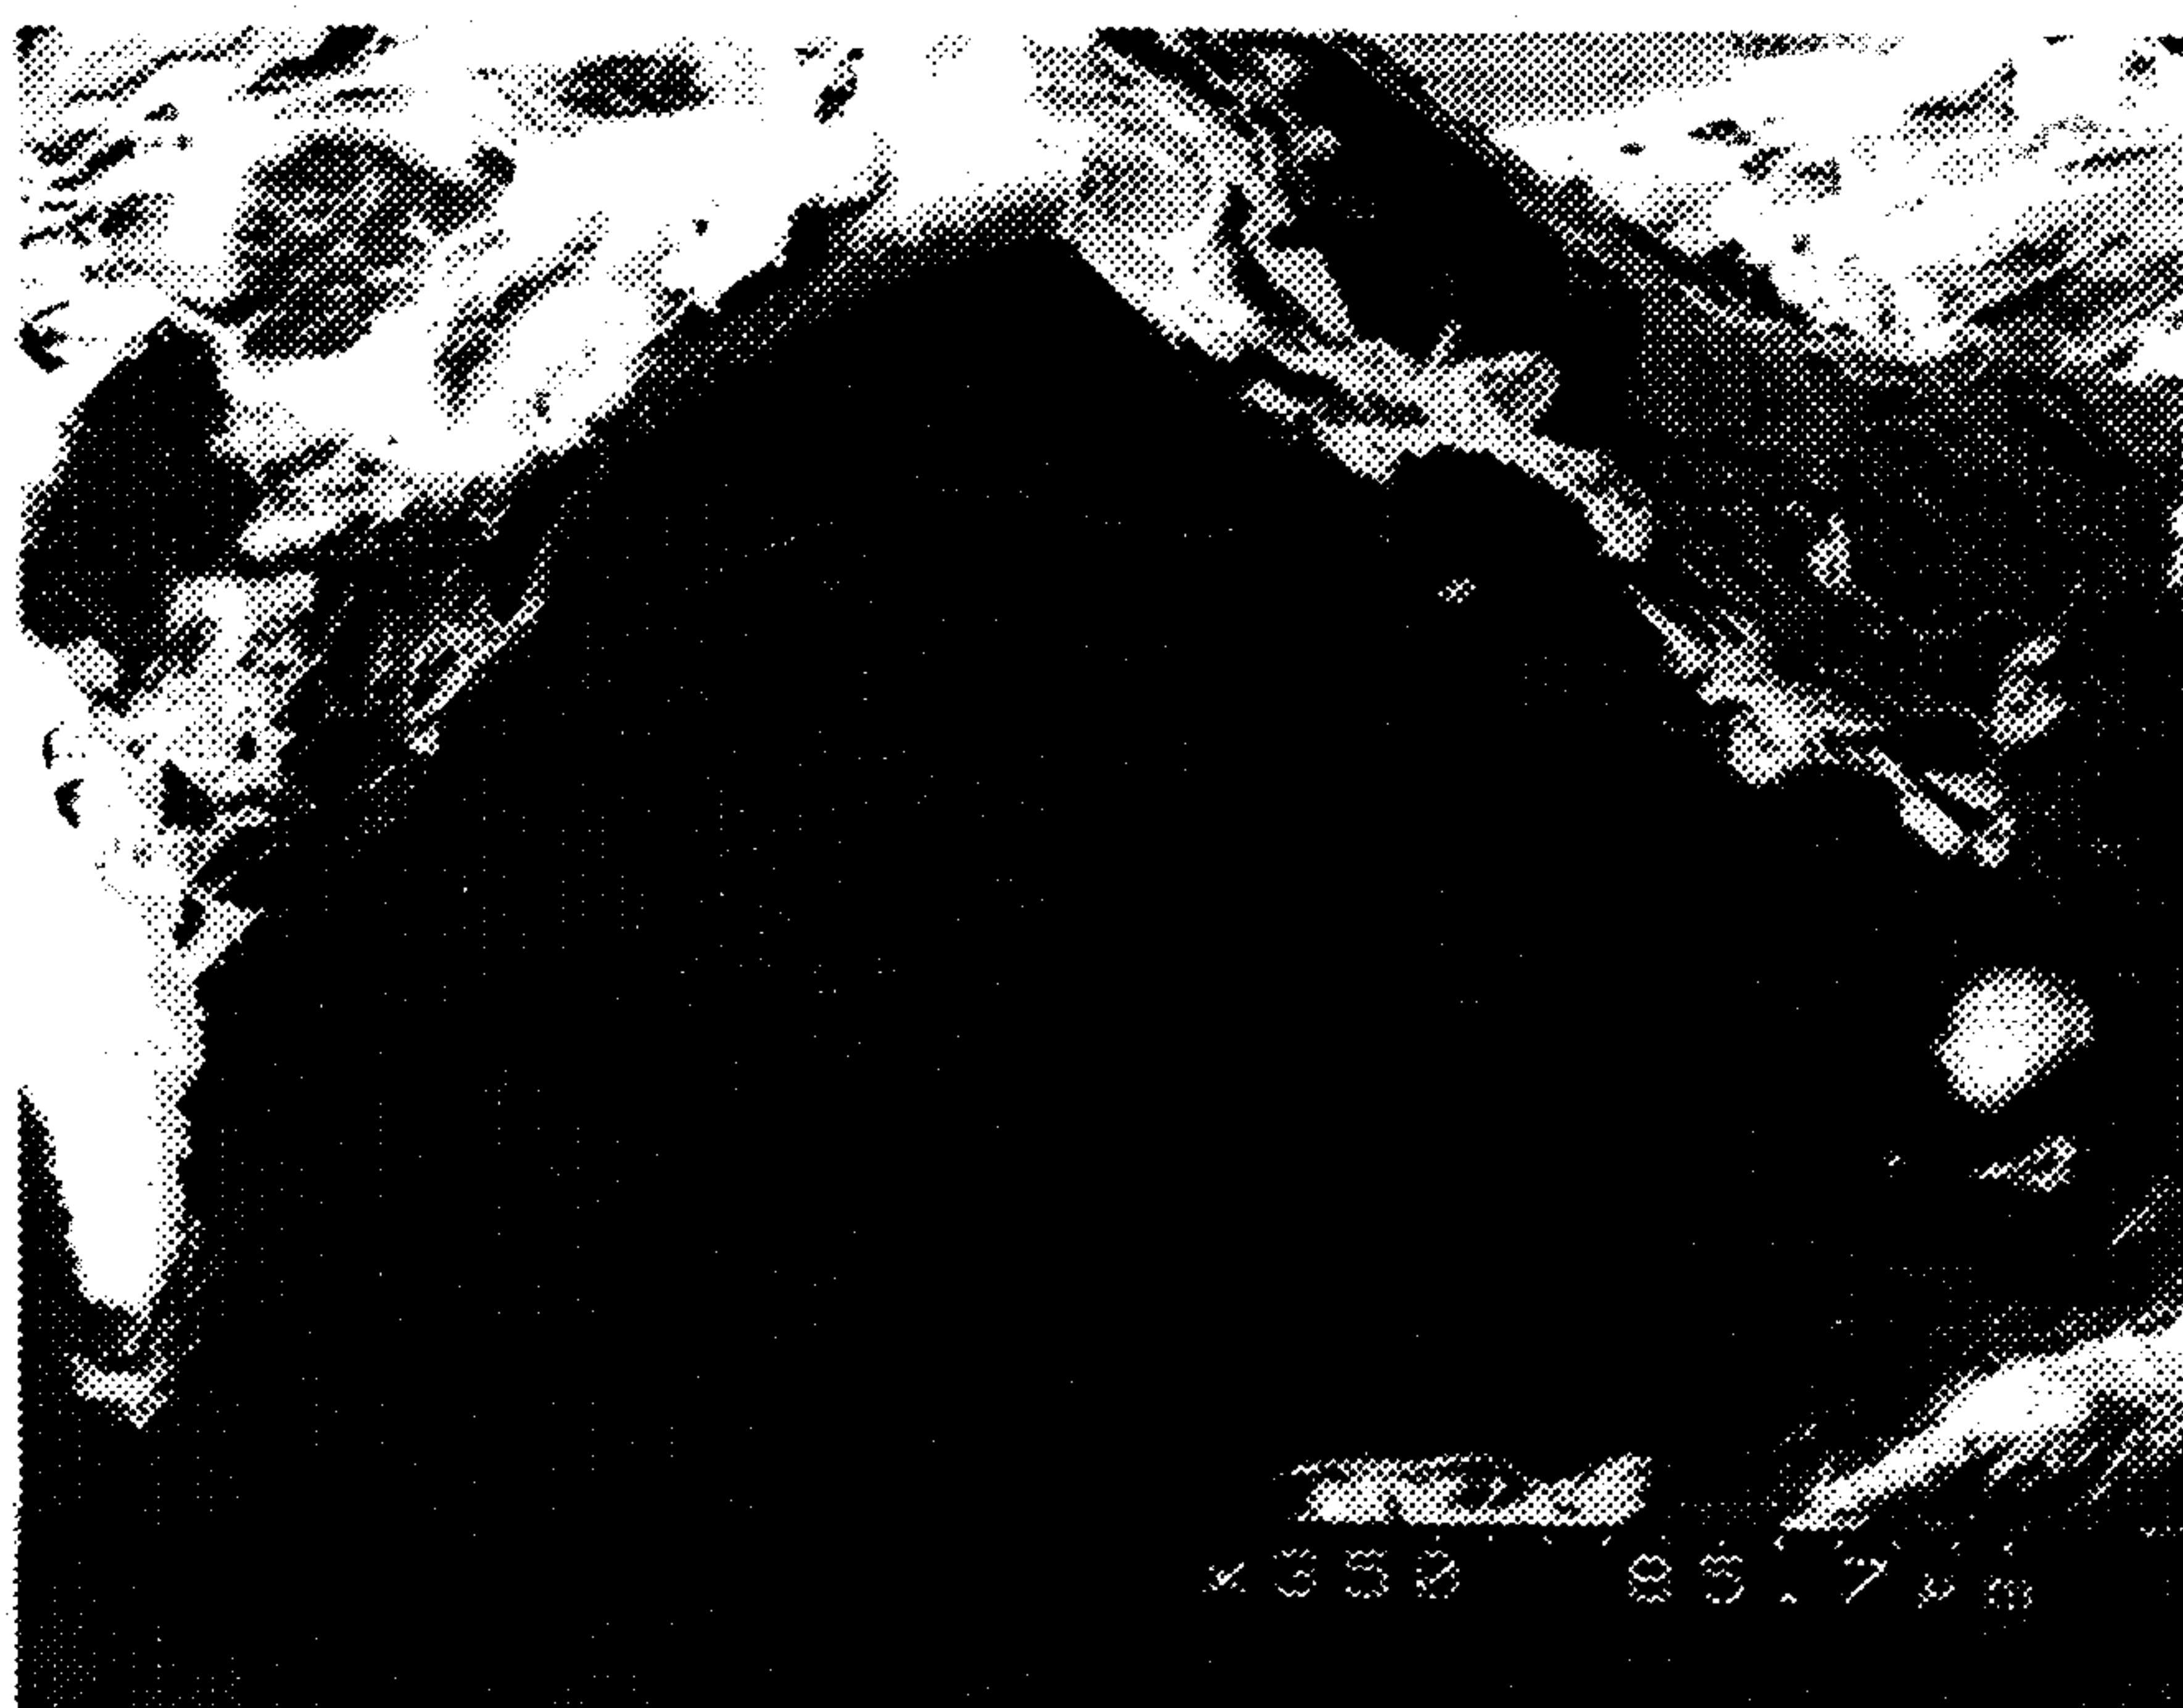


FIG.4