



- (51) International Patent Classification:
H04L 9/06 (2006.01) H04L 9/30 (2006.01)
H04L 9/00 (2006.01) H04L 9/08 (2006.01)
- (21) International Application Number:
PCT/US2018/041623
- (22) International Filing Date:
11 July 2018 (11.07.2018)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
62/532,563 14 July 2017 (14.07.2017) US
15/667,111 02 August 2017 (02.08.2017) US
- (63) Related by continuation (CON) or continuation-in-part (CIP) to earlier application:
US 15/667,111 (CON)
Filed on 02 August 2017 (02.08.2017)
- (71) Applicant: RAYTHEON COMPANY [US/US]; 870 Winter Street, Waltham, Massachusetts 02451-1449 (US).
- (72) Inventor; and
(71) Applicant: JOHNSTON, Anna M. [US/US]; 4336 SE 166th Ct., Vancouver, Washington 98683-8000 (US).
- (72) Inventors: SHAMEE, Bishara; 7532 W 83rd St., Playa Del Rey, California 90293-8817 (US). WILKINSON, Steven R.; 26069 Baldwin Pl., Stevenson Ranch, California 91381-1135 (US).
- (74) Agent: PERDOK, Monique M. et al.; P.O. Box 2938, Minneapolis, Minnesota 55402 (US).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DJ, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JO, JP, KE, KG, KH, KN, KP, KR, KW, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,

(54) Title: ENTWINED ENCRYPTION AND ERROR CORRECTION

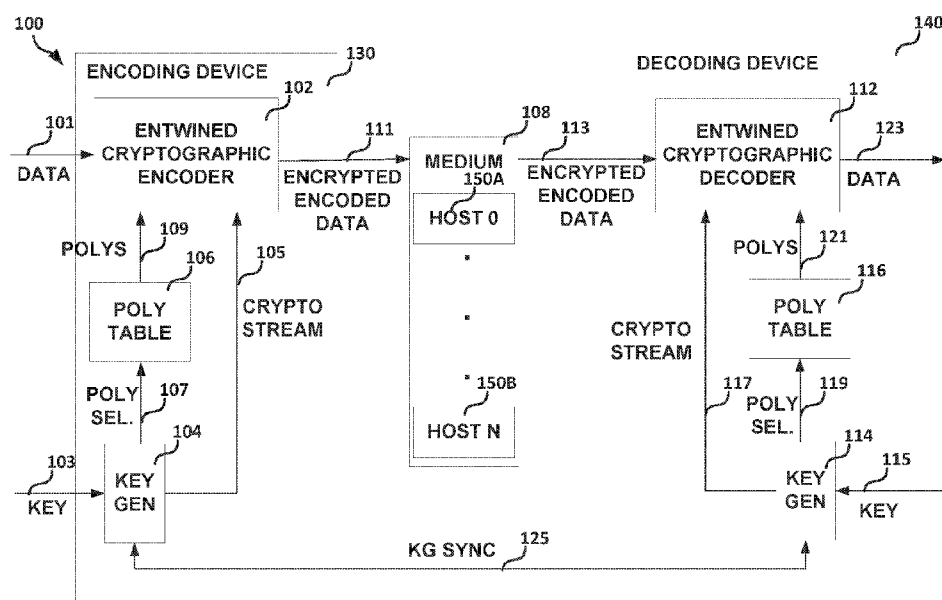


FIG. 1

(57) Abstract: Generally discussed herein are systems, devices, and methods for entwined encryption and error correction and/or error detection. An entwined cryptographic encode device can include a memory including data indicating a set of relatively prime, irreducible polynomials stored and indexed thereon, entwined encryption encoding circuitry to receive data, transform the data to a set of data integers modulo respective polynomial integers representative of respective polynomials of the polynomials stored on the memory, and perform a Da Yen weave on the transformed data based on received cipher data, and provide the weaved transformed data to a medium.



OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN,
TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

- (84) Designated States** (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Published:

— *with international search report (Art. 21(3))*

ENTWINED ENCRYPTION AND ERROR CORRECTION

5 CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This patent application claims the benefit of priority to U.S. Application Serial No. 15/667,111, filed August 2, 2017, which application claims the benefit of priority to U.S. Provisional Patent Application No. 62/532,563, filed July 14, 2017, entitled “ENTWINED ENCRYPTION AND
10 ERROR CORRECTION”, which are incorporated by reference herein in their entirety.

TECHNICAL FIELD

[0002] Embodiments discussed herein regard devices, systems, and
15 methods for encrypting and encoding data. One or more embodiments can include error correction and/or data verification abilities.

BACKGROUND

[0003] Encrypting data obfuscates data to an entity that intercepts the
20 data. The intended information is generally referred to as plaintext. The encrypted information is ciphertext. An authorized receiver of the ciphertext can generally decrypt the ciphertext to recover the plaintext.

[0004] Error detection is an ability to determine whether the plaintext recovered at the receiver is the intended plaintext. Error correction is the ability
25 to determine the intended plaintext if an error is present in the recovered plaintext.

[0005] Previous encryption techniques do not provide an inherent and flexible ability to detect and/or correct errors in recovered plaintext.

30 BRIEF DESCRIPTION OF THE DRAWINGS

[0006] In the drawings, which are not necessarily drawn to scale, like numerals can describe similar components in different views. Like numerals having different letter suffixes can represent different instances of similar

components. The drawings illustrate generally, by way of example, but not by way of limitation, various embodiments or examples discussed in the present document.

5 [0007] FIG. 1 illustrates, by way of example, a schematic diagram of an embodiment of a system.

[0008] FIG. 2 illustrates, by way of example, a schematic diagram of an embodiment of data being split into words.

[0009] FIG. 3 illustrates, by way of example, a diagram of an embodiment of a method for performing an entwined cryptographic encoding.

10 [0010] FIG. 4 illustrates, by way of example, a diagram of an embodiment of a method for performing an entwined cryptographic decoding.

[0011] FIG. 5 illustrates, by way of example, a graph 500 of error rate versus energy for a variety of encoding techniques.

15 [0012] FIG. 6 illustrates, by way of example, a block diagram of an embodiment of a machine on which one or more of the methods as discussed herein can be implemented.

DETAILED DESCRIPTION

20 [0013] Embodiments in this disclosure generally relate to encoding schemes that provide error correction and/or error detection and encryption capabilities, sometimes referred to as entwined encryption. The encodings discussed herein encrypt data and allow portions of the encrypted data to be lost or altered between a sender and a receiver, such as in a medium, while still being able to recreate the original data at the receiver.

25 [0014] Some cryptographic systems convert data from plaintext to equally sized ciphertext (equal in number of bits occupied by the plaintext and ciphertext). These systems may offer no integrity for lost or corrupted data, generally have no secondary protection in case of compromised cryptovariable (key), and are not generally homomorphic. That is, operations on plaintext are
30 not possible in their encrypted form. Entwined Cryptographic Encoding (ECE), a cryptographic technique discussed herein takes a different path, with more flexibility, homomorphic properties, and the ability to add data integrity (e.g., error detection and/or error correction abilities).

[0015] ECE converts a block of data into many independent words of cipher. On their own these pieces are secure; even if the piece of data and the cryptographic key were compromised, no information about the plaintext data would be revealed. Further, the system has error detection and/or error
 5 correction capabilities; errors can be detected and/or corrected. In ECE individual ciphertext pieces may be lost without any loss to the original data.

[0016] This is possible by Da Yen, sometimes referred to as the Chinese Remainder Theorem, and implemented using a stream cipher (e.g., a cipher from the eSTREAM collection, from the European Network of Excellence in
 10 Cryptology (ECRYPT), Advanced Encryption Standard (AES) in counter mode, from the United States Institute of Standards and Technology (NIST), or other stream cipher) and a data transformation technique referred to as a weave.

[0017] ECE is flexible, allowing for different word sizes, plaintext and ciphertext block sizes, and varying error correction capabilities. The system can
 15 be designed with no, minimal, and large error correction capabilities. An amount of overhead required per error is about equivalent to the overhead in Reed-Solomon encoding. ECE was designed so that not all ciphertext is needed for decryption. If a minimum number of ciphertext words are recovered, plaintext can be recovered.

[0018] The following variables are used to tailor the system to a users' needs: a set, M , of irreducible polynomials of degree v , $2r$ plaintext words in a block of data, a maximal number of errors that may be corrected, s , and n cipher words, where $n = 2(r + s)$.

[0019] $2r$ text words and $2s$ key words represent a reduction of a degree $v(n - 1)$ polynomial over F_2 , modulo $2(r + s)$ relatively prime polynomials in M of degree v . The key stream determines the moduli as well as the $2s$ key words. Encryption and encoding are accomplished by swapping one set of moduli for another, leaving the underlying $v(n - 1)$ degree polynomial unchanged.

[0020] Using the Da Yen weave transform (discussed elsewhere), words
 30 of data can be efficiently mixed with key and moduli into cipher words. Only operations in F_{2^v} are necessary. Decoding/decryption can use the same transformation as encoding but with different moduli. Using theoretical tools

similar to those used in Reed-Solomon coding, the overdetermined nature of the system allows errors to be detected and corrected.

[0021] Using entwined encryption, even if a cryptography key is broken, the data remains secure unless enough data blocks (of the original data) are recovered. Entwined encryption may improve diffusion of data in a cryptosystem. If any bit of input data is modified, every bit of the resulting output has about a fifty percent chance of flipping (e.g., from a logical “1” to a logical “0” or vice versa). Other encryption techniques have no such diffusion. By entwining error correction and encryption in a manner discussed herein, the security of the cryptosystem may be improved.

[0022] FIG. 1 illustrates, by way of example, a schematic diagram of an embodiment of a system 100. The system 100 can be used for implementing encoding and decoding using an ECE technique. All the items upstream from encrypted encoded data 111 are part of ECE encryption. All the items downstream from encrypted encoded data 113 are part of ECE decryption. Key syncing can help the performance (in terms of an ability to decipher correct plaintext from ciphertext) of the system 100.

[0023] Data 101 is received at an entwined cryptographic encoder 102. The data 101 is sometimes referred to as plaintext. Other inputs to the entwined cryptographic encoder 102 include a crypto stream 105 and polynomials 109.

[0024] A key 103 is received at a key generator 104. The key 103 is a seed variable or other initializing data that causes the key generator 104 to produce a stream of ciphertext. The stream of ciphertext may be used to select polynomials from a polynomial table 106 (as indicated by polynomial selection 107) and as extra cipher words provided to the entwined cryptographic encoder 102 (as indicated by crypto stream 105). The key generator 104 produces a cipher stream, such as using a cipher technique from eSTREAM or AES previously discussed, or another cipher stream.

[0025] The polynomial table 106 includes v -degree relatively prime polynomials in F_2 . The polynomials in the polynomial table 106 can be indexed by root, with a primitive having index zero, and the remaining polynomials ordered by ascending root. The root and primitive notion is discussed further elsewhere herein. The polynomial selector 107 provides the indexes of

polynomials that are provided to the entwined cryptographic encoder 102 as polynomials 109.

[0026] The entwined cryptographic encoder 102 transforms the data 101 based on the polynomials 109 and the crypto stream 105. The result of the transform is encrypted encoded data 111. At least some of the operations performed by the entwined cryptographic encoder are discussed with regard to FIG. 3 and elsewhere herein. A summary of the operations performed by the entwined cryptographic encoder 102 includes: receiving the data 101, the crypto stream 105, and the polynomials 109; creating data relations based on the data 101 and the polynomials 109; creating key relations based on the crypto stream 105 and the polynomials 109; initializing return relations based on the data 101, the crypto stream 105, and/or the polynomials 109; transforming data relations; weave extracting cipher words; and/or performing a weave transform to create the encrypted encoded data 111.

[0027] The encrypted encoded data 111 is provided to a receiver, such as through a medium 108. The medium 108 can include a wired or wireless medium. A wired medium includes a non-air medium (e.g., an optical fiber or conductive medium). A wireless medium includes a signal provided through an air medium. The signal provided to the medium (the encrypted encoded data 111) may be different than the signal provided to the entwined encrypted decoder 112, as indicated by the encrypted encoded data 113. The medium 108 can interact with and alter the encrypted encoded data 111, such as to drop a portion of the encrypted encoded data 111 and/or alter a value represented by the encrypted encoded data 111. In one or more instances, an entity may intercept the encrypted encoded data 111 as it is being transmitted through the medium 108 and alter the encrypted encoded data 111.

[0028] There may be one or more hosts 150A-150B in the medium 108. Each of the hosts 150A-150B can receive at least a portion of the encrypted encoded data 111. Each of the hosts 150A-150B can forward their portion of the encrypted encoded data 111 as the encrypted encoded data 113. The portions of the encrypted encoded data 111 can comprise disjoint subsets of the data 101, such as to include the entirety of the data 101 in encrypted encoded form. In such an embodiment, an entity would need to intercept all of the data from all of

the hosts 150A-150B to recreate the data 101, assuming the keys and other encryption steps could be determined.

[0029] An entwined crypto decoder 112 can receive the encrypted encoded data 113, polynomials 121, and crypto stream 117. The crypto stream 117 and polynomial selection 119 can be provided by a key generator 114. The key generator 114 is another instantiation of the key generator 104, such that if a key 115 is the same as the key 103, the output of the key generator 104 is the same as the output of the key generator 114. The polynomial table 116, similarly, is another instantiation of the polynomial table 106, such as to include polynomials indexed in the same manner.

[0030] The entwined cryptographic decoder 112 transforms the encrypted encoded data 113 into data 123 based on the polynomials 121 and the crypto stream 105. The data 123 is the same as the data 101 if there are less than (or equal to) a maximum number of errors in the encrypted encoded data 113. The maximum number of errors is configurable and discussed elsewhere herein. The result of the transform is the data 123. The operations performed by the entwined cryptographic decoder 112 are discussed with regard to FIG. 4 and elsewhere herein. A summary of the operations performed by the entwined cryptographic decoder 112 includes: receiving the encrypted encoded data 113, the crypto stream 117, and the polynomials 121; creating key relations based on the crypto stream 117 and the polynomials 121; initializing return relations based on the encrypted encoded data 113, the crypto stream 117, and/or the polynomials 121; performing a weave transform to create a possible version of the data 123; checking the created data 123 to determine if it is correct; if not correct, swapping words in the transformed encrypted encoded data; checking the swapped data to determine if correct; and if correct, providing the data 123 as plaintext to a receiver.

[0031] To perform accurate and consistent decoding, the keys 103 and 115 can be synced, such as to produce consistent keys. The consistent keys can help ensure that the crypto streams 105 and 117 are consistent and/or the polynomial select data 119 and 107 are consistent. That is, for decoding the encrypted encoded data 111 that is encrypted based on the polynomial select data 107 and the crypto stream 105, the key generator 114, in providing a

decryption process cipher stream, produces the same polynomial select data 119 as the polynomial select data 107 and crypto stream 117 as the crypto stream 105. Syncing the keys can include providing a key generator sync signal 125, such as may indicate a start time, an acknowledge or the like, to indicate that
5 each of the key generators 104 and 114 will produce the same bits for their respective cipher streams. One or more of the hosts 150A-150B may be similarly synced with the encoding device 130 and/or the decoding device 140.

[0032] FIG. 2 illustrates, by way of example, a schematic diagram of an embodiment of data 101 being split into words. The data 101 is split into data
10 blocks 203A, 203B, 203C...203N. Each of the data blocks 203A-203N can include $2r$ words. Each of the data blocks 203A-N is split into $2r$ words 205A, 205B, ..., and 205C. Each of the words 205A-C includes v bits including the bits 207A, 207B,...,207V. The entwined cryptographic encoder 102 can perform these data splitting operations to portion the data 101 to the proper level for
15 processing.

[0033] FIG. 3 illustrates, by way of example, a diagram of an embodiment of a method 300 for performing an entwined cryptographic encoding. The method 300 can be performed by the entwined cryptographic encoder 102. The method 300, as illustrated, includes receiving data (to be
20 encrypted and/or encoded), at operation 302; transforming the data to a set of data integers modulo respective polynomial integers representative of respective polynomials of the polynomials stored on the memory; at operation 304; performing a Da Yen weave on the transformed data based on received cipher data, at operation 306; and providing the weaved transformed data to a medium,
25 at operation 308.

[0034] The method 300 can further include producing, by key generator circuitry, a cipher stream of data based on a key. The method 300 can further include, wherein the entwined encryption encoding circuitry is further configured to transform the data to a set of data integers modulo respective
30 polynomial integers and perform the Da Yen weave based on the received cipher stream. The method 300 can further include, wherein another portion of the cipher stream provides an index to the respective polynomials.

[0035] The method 300 can further include, wherein the polynomials are indexed based on a respective root and primitive of the polynomials. The method can further include, wherein the weaved transformed data includes the transformed received data and transformed cipher data transformed, by the
5 entwined cryptographic encoder circuitry, based on data from the cipher stream. The method 300 can further include splitting the received data into blocks of v -bit words. The operation 304 can further include transformation of the blocks of v -bits words individually. The method 300 can further include, wherein v is a maximum degree of the polynomials in the memory. The method 300 can further
10 include, wherein a number of t -bit cipher words provided by the cipher stream includes the number of words in a block of the blocks, $2r$, plus two times a maximum number of errors to be corrected, s , and a number of v -bit cipher words provided by the cipher stream includes two times the maximum number of errors to be corrected, wherein the weaved transformed data includes
15 transformed versions of each of the v -bit words of the data block and transformed versions of the $2s$, v -bit words from the cipher stream, wherein the number of polynomials in the memory is 2^t .

[0036] FIG. 4 illustrates, by way of example, a diagram of an embodiment of a method 400 for performing an entwined cryptographic
20 decoding. The method 400 can be performed by the entwined cryptographic decoder 112. The method 400, as illustrated, includes receiving encrypted, encoded data, at operation 402; performing a Da Yen weave transform on a portion the encrypted, encoded data, at operation 404; comparing the transformed data to another portion of the encrypted, encoded data (to determine
25 if errors exist in the transformed data), at operation 406; and in response to a determination that no errors exist, convert the error-free version of data to plaintext, at operation 408. The method 400 can further include providing the plaintext to a receiver.

[0037] The method 400 can further include in response to a
30 determination that errors exist, perform a weave swap on two words of the transformed data. The method 400 can further include comparing the weave swapped data to a different portion of the encrypted, encoded data to determine if errors exist in the weave swapped version. The method 400 can further include

producing, by key generator circuitry, a cipher stream of data based on a key.
The operation 404 can include transforming the encrypted encoded data to a set of data integers modulo respective polynomial integers and perform the Da Yen weave transform based on the received cipher stream.

- 5 **[0038]** The method 400 can further include, wherein another portion of the cipher stream provides an index to respective polynomials represented by respective polynomial integers. The method 400 can further include, wherein the polynomials are indexed based on a respective root and primitive of the polynomials. The method 400 can further include, wherein the weave
10 transformed data includes the transformed received data and transformed cipher data transformed, by the entwined cryptographic decoding circuitry, based on data from the cipher stream. The method 400 can further include, wherein, wherein v is a maximum degree of the polynomials in the memory, wherein a number of t -bit cipher words provided by the cipher stream includes the number
15 of words in a block of the blocks, $2r$, plus two times a maximum number of errors to be corrected, s , and a number of v -bit cipher words provided by the cipher stream includes two times the maximum number of errors to be corrected, wherein the weaved transformed data includes transformed versions of each of the v -bit words of the data block and transformed versions of the $2s$, v -bit words
20 from the cipher stream, wherein the number of polynomials in the memory is 2^t .

[0039] A summary of operations that may be performed using the method 400 is now provided in more mathematical terms.

- [0040]** The methods 300 and 400 include encoding and decoding, respectively, and may be used together. One or more of the methods 300 and 400
25 may include the following operations:

[0041] A) receive input word size, v , in bits wherein v is a power of two, such as $\{8, 16, 32, 64, \dots\}$ (at entwined cryptographic encoder 102 and/or key generator 104).

- [0042]** B) receive $2r$ plain words to be encrypted (at entwined
30 cryptographic encoder 101).

[0043] C) generate $2sv$ bits (e.g., by key generator 104).

[0044] D) split $2sv$ bits into $2s$ v -bit keys (e.g., at entwined cryptographic encoder 102). Each v -bit key is $\bar{k}_j$.

- [0045] E) generate $2vn$ bits (e.g., by key generator 104).
- [0046] F) split $2vn$ bits into $2n$ v -bit pointers (e.g., at entwined cryptographic encoder 102). Each v -bit pointer is k_j and points to a polynomial in the polynomial table. No two k_j are equal. A maximum value of k_j includes a value less than (or equal to) 2^v-1 .
- [0047] G) generate $2n$ polynomials (e.g., irreducible polynomials) of degree 2^v-1 , where $q=2n>v$ (at polynomial table 106), based on k_j . Each polynomial is indicated by M_{k_j} .
- [0048] H) create data relations $\delta_j = d_j \bmod (M_{k_j})$ (e.g., by the entwined cryptographic encoder 102).
- [0049] I) produce n , C_i , cipher words by performing Da Yen weave transform (e.g., by the entwined cryptographic encoder 102).
- [0050] J) transmit cipher words (e.g., by the entwined cryptographic encoder 102 over the medium 108).
- [0051] K) receive cipher words C_i (e.g., by the entwined cryptographic decoder 112).
- [0052] L) receive input word size, v , in bits wherein v is a power of two, such as $\{8, 16, 32, 64, \dots\}$ (at entwined cryptographic decoder 112 and/or key generator 104).
- [0053] M) generate $2sv$ bits (e.g., by key generator 114).
- [0054] N) split $2sv$ bits into $2s$ v -bit keys (e.g., at entwined cryptographic encoder 112). Each v -bit key is $\bar{k}_j$.
- [0055] O) generate $2vn$ bits (e.g., by key generator 114).
- [0056] P) split $2vn$ bits into $2n$ v -bit pointers (e.g., at entwined cryptographic encoder 112). Each v -bit pointer is k_j and points to a polynomial in the polynomial table. No two k_j are equal. A maximum value of k_j includes a value less than (or equal to) 2^v-1 .
- [0057] Q) generate $2n$ polynomials (e.g., irreducible polynomials) of degree 2^v-1 , where $q=2n>v$ (at polynomial table 116), based on k_j . Each polynomial is indicated by M_{k_j} .
- [0058] R) create key relations: $v_j = (\bar{k}_j \bmod m_{k_{2r+j}})$.
- [0059] S) create the cipher relations: $v_{2s+j} = (c_j \bmod m_{k_j})$.

- [0060] T) Initialize return relations: $\delta_j = (0 \bmod m_{k_j})$ for $0 \leq j < 2r$.
- [0061] U) Perform Da Yen weave transform to extract plain words $\{d_0, d_1, \dots, d_{2r}\}$.
- [0062] The next section details more specifics regarding operations of the system 100. The next section begins with some definitions and basics, on which proofs and further discussion of ECE relies.
- [0063] ECE uses a Da Yen weave transform, and for that a few definitions and some theory may be helpful. A theorem used for the weave is the Da Yen. The Da Yen maps a set of relations to a single relation and back again.
- 10 [0064] Let $\mathcal{E}$ be a Euclidean domain. A relation μ , is a pair of elements $\hat{\mu}, \hat{\mu} \in \mathcal{E}, \hat{\mu} \neq 0$ and a non-unit, $|\hat{\mu}| < |\hat{\mu}|$ with μ representing $\hat{\mu} \bmod \hat{\mu}$
- [0065] In general, a relation $(d \bmod m)$ refers to a coset, or set of elements of the Euclidean domain. Because ECE considers real data and integers, unless stated otherwise, the relations here will always be in reduced
- 15 form (e.g., $|d| < |m|$).
- [0066] The size (Euclidean norm) restriction $|\hat{\mu}| < |\hat{\mu}|$ may provide stability uniqueness of data as it moves between different rings (moduli).
- [0067] Equally sized, relatively prime moduli do not exist over the integers, but can be found if the Euclidean domain is a polynomial ring over a
- 20 finite field. In ECE the Euclidean domain will be $F_2[x]$. The pair of elements $(\hat{\mu}, \hat{\mu})$ in a relation μ with polynomials over F_2 with $|\mu| = |\hat{\mu}| = \deg(\hat{\mu})$.
- [0068] Relations are a component of ECE, therefore a simplified way to compare and combine relations and data may be convenient.
- Let μ_j, μ_k be two relations with $x \in \mathcal{E}$. μ_j, μ_k are relatively prime if their
- 25 respective moduli $\hat{\mu}_j, \hat{\mu}_k$ are relatively prime. μ_j, μ_k are equivalent if respective moduli are the same size ($|\hat{\mu}_j| = |\hat{\mu}_k|$) and $\hat{\mu}_j = \hat{\mu}_k$. $x = \mu$ implies $x = \hat{\mu} \bmod \hat{\mu}$. $x + \mu = \mu + x$ represents the relation $(x + \hat{\mu} \bmod \hat{\mu})$.
- [0069] The Da Yen (Chinese Remainder Theorem) is an isomorphism between the direct product of factor rings and a single factor ring. The Da Yen
- 30 provides a foundation of the Da Yen weave transform equating a set of relations R to a single relation $\langle R \rangle$. Shorthand for the modulus and value of $\langle R \rangle$ is $\langle \hat{R} \rangle = \hat{R}$ and $\langle \hat{R} \rangle = \hat{R}$. The general ring version of the Da Yen and its proof can be

found elsewhere. The following is a presentation of Da Yen using relations. Let R be a set of relatively prime relations. Then there exists a mapping (and its inverse) from R to a relation $\langle R \rangle$ such that:

- 1: $\hat{R} = \sum_{\mu \in R} \hat{\mu}$
- 5 2: $\dot{R} = \mu$ for all $\mu \in R$.
3. (homomorphic) For any two relation sets $R = \{\mu_j \mid 0 \leq j < n\}$, $Q = \{v_k \mid 0 \leq k < n\}$ with equal size and moduli (e.g., $\hat{\mu}_j = \hat{v}_j$ for $0 \leq j < n$),

$$\langle R \rangle + \langle Q \rangle = \langle \{\dot{\mu}_j + \dot{v}_j \bmod \hat{\mu}_j \mid 0 \leq j < n\} \rangle$$

$$\langle R \rangle \langle Q \rangle = \langle \{\dot{\mu}_j \dot{v}_j \bmod \hat{\mu}_j \mid 0 \leq j < n\} \rangle$$

- 10 [0070] The Da Yen weave transform, in part, may convert a set of relations R to the relation $\langle R \rangle$, one relation at a time. Operations of the weave transform may create the relation $\langle R_t \rangle$ where $R_t = \{\mu_j \mid 0 \leq j < t\}$, with $\dot{R}_t$ in reduced form. Let $R = \{\mu_j \mid 0 \leq j < n\}$ be a set of relatively prime relations, the subsets $R_t = \{\mu_j \mid 0 \leq j < t\}$ and $\langle R_1 \rangle = \mu_0$ and $\hat{R}_t = \prod_{j=0}^{t-1} \hat{\mu}_j$ for $1 < t \leq n$.

$$15 \quad \text{Then } \omega_{t-1} = \left(\langle \hat{R}_{t-1} \rangle^{-1} (\mu_{t-1} - \langle R_{t-1} \rangle) \bmod \hat{\mu}_{t-1} \right) \quad (1)$$

$$\langle \dot{R}_t \rangle = \langle R_{t-1} \rangle + \langle \hat{R}_{t-1} \rangle \omega_{t-1} \quad (2)$$

for $1 < t \leq n$.

- [0071] The Da Yen weave transform may compute the inner relations w_{t-1} , such as without computing the large relation $\langle R_{t-1} \rangle$. After the w_{t-1} have
- 20 been computed, the full relation can be computed with the result already in reduced form $\left(\left| \dot{R} \right| < \left| \hat{R} \right| \right)$:

$$\dot{R} = \dot{w}_0 + \hat{w}_0 (\dot{w}_1 + \hat{w}_1 (\dots (\dot{w}_{n-2} + \hat{w}_{n-2} \dot{w}_{n-1} \dots))) \quad (3)$$

- [0072] Because this result is already in reduced form and the w relations can be computed within their own factor rings, the relation may be computed
- 25 and reduced modulo $\hat{\mu}$, such as by using small moduli and relation μ operations.

[0073] Let $R = \{\mu_j \mid 0 \leq j < n\}$ be a set of relatively prime relations with combined relation $\langle R \rangle$. For any relation α , define the relation $R(\alpha) = (\hat{R} \bmod \hat{\alpha})$:

$$R(\alpha) = \dot{w}_0 + \hat{w}_0(\dot{w}_1 + \hat{w}_1(\dots(\dot{w}_{n-2} + \hat{w}_{n-2}\dot{w}_{n-1}))\bmod \hat{\alpha}. \quad (4)$$

5 [0074] The weave encoding can use this relation evaluation process to convert a set of distinct relations I to a set J. Let I, J be sets of relatively prime relations with $|\hat{I}| = |\hat{J}|$. I encoded into J is the set of relations $I(J) = \{I(\alpha) \mid \alpha \in J\}$. Two sets of relations, I, J are called equivalent if:

1. $|I| = |J|$
- 10 2. $\langle I \rangle = \langle J \rangle$

[0075] Notice that encoded set $I(J)$ is equivalent by definition to I. Equivalent sets enable decoding and the independence of encoded blocks. As long as an error free set of $2r$ encoded relations is recovered, the original plain text can be recovered. Any added relations can be used for error checking and

15 correction.

[0076] The weave transform converts an ordered set of relatively prime relations $R = \{\mu_j \mid 0 \leq j < n\}$, to equivalent weave terms. A computational cost in serial is $\binom{n}{2} = \frac{n(n-1)}{2}$ “divide” operations over F_{2^v} . Parallelization can reduce the time to $(n-1)$ operations.

20 [0077] Order does not matter in the set of relations R, but order does matter in the transformed set of w_j values. The w_j value computed during the iterative Da Yen depends on the relations in the subset $R_j = \{\mu_i \mid 0 \leq i < j\}$, to obtain $\langle R_j \rangle$, and μ_j itself, but not on any μ_i with $i > j$. Order can be important during the decoding process. For at least this reason, the ordering of the relations

25 in R will be specified for each transform.

[0078] Da Yen Weave Transform and Permutations

[0079] Let π be a permutation on the integers $0 \leq j < n$, defaulting to the identity: $\pi(j) = j$ for $0 \leq j < n$. Then for any $0 < t \leq n$,

$$\langle R_t^\pi \rangle = \langle \{\mu_{\pi(j)} \mid 0 \leq j < t\} \rangle \quad (5)$$

$$\begin{aligned} \dot{R}_t^\pi = & w_{\pi(0)} + \hat{w}_{\pi(0)}(w_{\pi(1)} + \hat{w}_{\pi(1)}(\dots(w_{\pi(i-2)} \\ & + \hat{w}_{\pi(i-2)}w_{\pi(i-1)})\dots)) \end{aligned} \quad (6)$$

$$R_t^\pi(\alpha) = \dot{R}_t^\pi \bmod \hat{\alpha} \quad (7)$$

and $R_t^\pi(\mu_{\pi(j)}) = \mu_{\pi(j)}$ for all $0 \leq j < t$.

[0080] Da Yen Weave Transform Technique

5 [0081] Input: $R = \{\mu_j \mid 0 \leq j < n\}$, an ordered set of relatively prime relations and π a permutation on $\{0, 1, \dots, n-1\}$

[0082] Output: $W = \{w_j \mid 0 \leq j < n\}$ an ordered set of relatively prime relations satisfying equation (6).

[0083] I: Initialize:

10 [0084] A: $w_{\pi(0)} = \mu_{\pi(0)}$

[0085] B: for $k = 1$ to $(n-1)$: $w_k^{(0)} = \mu_{\pi(k)}$;

[0086] II: For $j = 1$ to $j = (n-1)$:

[0087] A: $w_{\pi(j)} = w_j^{(j)}$

[0088] B: For $k = (j+1)$ to $k = (n-1)$:

15 [0089] $w_k^{(j)} = (\hat{w}_{\pi(j)}^{-1} (w_k^{(j-1)} - \dot{w}_{\pi(j)}) \bmod \hat{w}_k)$

[0090] End of Weave Transform Technique

[0091] ECE detects and corrects errors by assuming a collection of $2r$ received relations are correct, computing the unused $2s$ relations and comparing them to the received values. If at least half of these relations are correct and at
20 most s errors exist, then plain text can be extracted from the set.

[0092] Let $R = \{\mu_{2s+k} \mid 0 \leq k < n\}$ be the set of n received values and their key-determined moduli, $K = \{\mu_j \mid 0 \leq j < 2s\}$ the set of $2s$ key relations.

Decoding begins by transforming $K \cup R = \{\mu_j, \mu_{2s+k} \mid 0 \leq j < 2s; 0 \leq k < n\}$ to R^π . If less than half the $2s$ computed values match the unused received values,
25 then errors exist in the current collection of $2r$ values. Other sets may be tested until one is found that passes the test.

[0093] The Da Yen weave transform of different sets of $2r$ elements can be computed using the weave transform, the swapping pairs of elements in and

out, until either a set passes the checks or there are no more sets to check. If no good set is found, then too many errors exist to recover the plaintext.

[0094] Weave swapping may help efficiency, requiring only a few operations in the base field instead of a re-computation of the entire transform.

- 5 Pairing relations can reduce a maximal number of sets to check from $\binom{2(r+s)}{2r}$ to $\binom{r+s}{r}$, reducing expected computational work to approximately a square

root of the time required swapping individuals.

- [0095] Weave swapping is now explained. Order in the weave transform may help extract values. Let $R = \{\mu_j \mid 0 \leq j < n\}$ and $R^\pi = \{w_{\pi(j)} \mid 0 \leq j < n\}$ be its transform with permutation π . Recall that $w_{\pi(j)}$ value computed during the iterative Da Yen depends on the relations of the unordered subset $\{\mu_{\pi(i)} \mid 0 \leq i < j\}$ and $\mu_{\pi(j)}$ itself, but not on any $\mu_{\pi(i)}$ with $i > j$, and low order weave terms can be combined to compute an extracted weave value. Weave swapping allows swapping of the order of two adjacent relations in a woven transform without recomputing the entire transform. Adjacent weave terms may be swapped with one multiply and one “divide” (e.g., compute an inverse and then multiply), and the permutation keeps track of swaps performed. Swapping weave terms j and $(j + 1)$ converts R^π to R^σ where

$$\begin{aligned} \sigma(k) &= \pi(k) & 0 \leq k < j; (j+1) < k < n \\ \sigma(j) &= \pi(j+1) \\ \sigma(j+1) &= \pi(j). \end{aligned}$$

[0096] The moduli, $\hat{w}_j = \hat{\mu}_j$ are constant and not effected by swapping relations. Recall that the Da Yen weave transform has intermediate results

$w_{\pi(j)}^{(k)} = \hat{w}_{\pi(k)}^{-1} (\dot{w}_{\pi(j)} - \dot{w}_{\pi(k)}) \bmod \hat{\mu}_{\pi(j)}$ with $w_{\pi(j)} = w_{\pi(j)}^{(j)}$. The swapped values

- 25 in terms of these intermediate values is:

$$\begin{aligned} 1. \quad \dot{w}_{\sigma(j)} &= \dot{w}_{\pi(j+1)}^{(j)} \text{ therefore} \\ \dot{w}_{\sigma(j)} &= w_{\pi(j+1)} \hat{w}_{\pi(j)} + \dot{w}_{\pi(j)} \bmod \hat{w}_{\sigma(j)} \quad (9) \\ 2. \quad \dot{w}_{\sigma(j+1)}(j) &= \dot{w}_{\pi(j)}, \text{ and for one term higher: } \dot{w}_{\sigma(j+1)} = (\dot{w}_{\pi(j)} - \\ &\dot{w}_{\sigma(j)}) \hat{w}_{\sigma(j)}^{-1} \bmod \hat{w}_{\sigma(j+1)} \quad (10) \end{aligned}$$

These equations simplify for the relation sets used in ECE. All moduli have the same degree over F_2 with $\hat{\mu}_j \equiv \hat{\mu}_k \oplus \hat{\mu}_j \bmod \hat{\mu}_k$.

$$\dot{w}_{\sigma(j)} = \dot{w}_{\pi(j+1)}(\hat{\mu}_{\sigma(j)} \oplus \hat{\mu}_{\sigma(j+1)} \oplus \dot{w}_{\pi(j)} \bmod \hat{\mu}_{\sigma(j)}) \quad (11)$$

$$\dot{w}_{\sigma(j+1)} = (\dot{w}_{\pi(j)} \oplus \dot{w}_{\sigma(j)})(\hat{\mu}_{\sigma(j)} \oplus \hat{\mu}_{\sigma(j+1)})^{-1} \bmod \hat{w}_{\sigma(j+1)} \quad (12)$$

5 [0097] Weave Swap Technique

[0098] Input: R^π , $0 \leq j < (n - 1)$, with $\hat{w}_j = (x \oplus c_j)$

[0099] Output: R^σ as described elsewhere herein

[00100] I: $\dot{w}_{\sigma(j)} = \dot{w}_{\pi(j+1)}(\hat{\mu}_{\sigma(j)} \oplus \hat{\mu}_{\sigma(j+1)} \oplus \dot{w}_{\pi(j)} \bmod \hat{\mu}_{\sigma(j)})$

[00101] II: $\dot{w}_{\sigma(j+1)} = (\dot{w}_{\pi(j)} \oplus \dot{w}_{\sigma(j)})(\hat{\mu}_{\sigma(j)} \oplus \hat{\mu}_{\sigma(j+1)})^{-1} \bmod \hat{w}_{\sigma(j+1)}$

10 [00102] III: $\sigma = \pi$

[00103] IV: $\sigma(j) = \pi(j + 1)$

[00104] V: $\sigma(j + 1) = \pi(j)$

[00105] VI: R^π is now R^σ

[00106] End Weave Swap Technique

15 [00107] Encoding Technique

[00108] Words of key may be generated using a stream cipher (e.g., a key used for encryption and/or encoding is the stream ciphers output). A set of $2n$ or q irreducible polynomials of degree v over F_2 may be determined. ECE performs a ya den weave encoding using a mix of plaintext and key relations. In

20 embodiments discussed herein, moduli of the relation sets can be determined from the stream cipher. Alternatively, keys and/or moduli may be otherwise randomly chosen.

[00109] Encoding Technique

Input:

V	the fixed word size (bits per word); generally, $v \in \{8, 16; 32; 64; \dots\}$
$M = \{m_i \mid 0 \leq i < q\}$	set of irreducible degree v polynomials over F_2
$2r$	the number of words per plain text block
$2s$	the added key words
n	$n = 2(r + s)$, the number of cipher words
$\{d_0, d_1, \dots, d_{2r-1}\}$	v -bit plain text words

Output: $\{c_i \mid 0 \leq i < n\}$, v – bit cipher words

I: Generate key and set up system (assumes key generator is initialized with cryptovariable (e.g., long term key)),

5 *A:* Generate $2v(s + n)$ bits of key stream from the supplied key generator.

Label the key bits

- $\{\bar{k}_j \mid 0 \leq j < 2s\}$, where $\bar{k}_j$ is a v -bit word of key;
- $\{k_j \mid 0 \leq j, n\}$, where k_j is less than $q = |M|$ and $k_i \neq k_j$ for all $i \neq j$.

B: Create the data relations: $\delta_j = (\delta_j \bmod m_{k_j})$ for $0 \leq j < 2r$.

10 *C:* Create the key relations: $v_j = (\bar{k}_j \bmod m_{k_{2r+j}})$ for $0 \leq j < 2s$.

D: Initialize return relations: $\mu_j = (0 \bmod m_{k_{n+j}})$ for $0 \leq j < n$.

II: Transform $R = \{\delta_j, \delta_{2r+k} = v_k \mid 0 \leq j < 2r, 0 \leq k < 2s\}$ into R^π with π equal to the identity permutation.

III: Weave extract cipher words $c_j = R^\pi(\mu_j)$ for $0 \leq j < n$.

15 [00110] End Encoding Technique

[00111] The decoding process in ECE is like encoding in that a Da Yen weave transform is performed in decoding. If there are no errors and at least $2r$ correct relations, decoding can be performed. If $(2r + t)$ relations were received with at most $t/2$ errors, an error free set of $2r$ relations can be found and error free plaintext extracted.

20 free plaintext extracted.

[00112] Check Decoding Weave Technique

[00113] Input:

$R = \{v_j \mid 0 \leq j < (n + t)\}$	A set of relations
$R^\sigma = \{w_j \mid 0 \leq j < (n + t)\}$	the transformed version of R using permutation σ
n	number of relations which should determine R
t	number of check relations in R

[00114] Output: true, if weave is correct; false, if fails correct check

[00115] *I:* FailCount = 0

25 [00116] *II:* for $j = 0$ to $(t - 1)$:

[00117] A: Weave extract modulus $R_n^\sigma(v_{\sigma(n+j)}) = \tau$

[00118] B: If τ does not equal $v_{\sigma(n+j)}$: $FailCount = FailCount + 1$.

[00119] III: return: if $FailCount \leq \left\lfloor \frac{t}{2} \right\rfloor$, return true; else return false

[00120] End Check Decoding Weave Technique

- 5 [00121] Because there can be at most $t/2$ errors, not all $(2r + t)$ choose $2r$ subsets of the received relations need to be tried. If $t/2$ errors exist and relations were paired with an adjacent relation (e.g., pair 0 is μ_0, μ_1 , pair 1 is μ_2, μ_3 and so on), then there would be $t/2$ pairs not used in the extraction process. If each of these unused pairs contained at least one error, then the used pairs are error free.
- 10 In other words, one of the these $(r + t/2)$ choose r pair subsets would be an error free transformation.

- [00122] A decoding technique can exhaust subsets of the received relations, such as by pairing adjacent relations. Such a technique may reduce computation time per subset, such as by performing the full transform only once
- 15 and modifying the transform to match the new subset by performing a weave swap.

[00123] Decoding Technique

Input:

v	the fixed word size (bits per word); generally, $v \in \{8, 16; 32; 64\}$
$M = \{m_i \mid 0 \leq i < q\}$	set of irreducible degree v polynomials over F_2
$2r$	the number of words per plain text block
$2s$	the added key words
$\{c_{\pi(j)} \mid 0 \leq j < 2r + t - 1\}$	v -bit cipher text words and their ordering π π is a permutation on the integers $0 \leq j < 2(r + s)$ but only lower $(2r + t)$ values needed.

- I : Generate key and set up system (assumes key generator is initialized with
- 20 cryptovariable - i.e., long term key), such as the same as was done for the encoding, using the same cryptovariable.

A: Generate $2v(s + n)$ bits of key stream from the supplied key generator.

Label the key bits

- $\{\bar{k}_j \mid 0 \leq j < 2s\}$, where $\bar{k}_j$ is a v -bit word of key;
- $\{k_j \mid 0 \leq j, n\}$, where k_j is less than $q = |M|$ and $k_i \neq k_j$ for all $i \neq j$

B: Create the key relations: $v_j = (\bar{k}_j \bmod m_{k_{2r+j}})$ for $0 \leq j < 2s$.

C: Create the cipher relations: $v_{2s+j} = \mu_{\pi(j)} = (c_{\pi(j)} \bmod m_{k_{n+\pi(j)}})$ for $0 \leq j$

5 $< (2r + t)$.

D: Initialize return relations: $\delta_j = (0 \bmod m_{k_j})$ for $0 \leq j < 2r$.

II: Let σ be a permutation on the integers $0 \leq j < (2s + n)$, initialized with the identity permutation: $\sigma(j) = j$.

III: Let

$halfSpares = \left\lfloor \frac{t}{2} \right\rfloor$	$lvl = 0$
$nVetted = 0$	$lvlVetted[j] = 0 \quad 0 \leq j < \left\lfloor \frac{t}{2} \right\rfloor$

10 IV: Perform weave transform to map $R = \{v_k \mid 0 \leq j < (2(s + r) + t)\}$ into R^σ .

V: While $lvl < halfSpares$ and the current R^σ fails check decoding weave:

A: for $j = 2(r + s + lvl)$ down to $2(nVetted + s)$:

1 : Weave Swap R^σ at j and $(j - 1)$

2 : Weave Swap R^σ at $(j - 1)$ and j

15 B: $lvlVetted[lvl] = lvlVetted[lvl] + 1; nVetted = nVetted + 1$

C: if $nVetted \geq r$ and $lvl < halfSpares$ /*

go to a more significant level, as this level is exhausted */

1: $nVetted = nVetted - lvlVetted[lvl]$

2: $lvlVetted[lvl] = 0$

20 3: $lvl = lvl + 1$

D: else if $(lvl > 0)$ /*else if not at lowest level, go down to least significant level*/

1: $lvl = 0$

VI: Weave Extract Modulus to get plain words $\delta_j = R^\pi(\delta_j)$ for $0 \leq j < 2r$.

25 [00124] End Decoding Technique

[00125] Hexadecimal shorthand is used for polynomials in $F_2[x]$. For example, $x^5 + x^4 + x^3 + x \Rightarrow 0x3a$.

[00126] Examples of using techniques discussed herein are now provided.

[00127] Example 1: Da Yen

5 • $\varepsilon = \mathbb{Z}$: Let

$$R = \{(2 \bmod 7); (5 \bmod 13); (1 \bmod 2)\}$$

$$Q = \{(5 \bmod 7); (1 \bmod 13); (0 \bmod 2)\}.$$

Then $\langle R \rangle = (135 \bmod 182)$, with $\hat{R} = 135$ and $\hat{R} = 182$ and $\langle Q \rangle = (40 \bmod 182)$.

Notice that $R + Q = \{(0 \bmod 7); (6 \bmod 13); (1 \bmod 2)\}$, $\langle R + Q \rangle = (175 \bmod$

10 182) and $RQ = \{(3 \bmod 7); (5 \bmod 13); (0 \bmod 2)\}$ and $\langle RQ \rangle = (122 \bmod 182)$.

• $= F_2[x]$: Let $R = \{(x^3 + x + 1 \bmod x^4 + x^3 + 1); (x \bmod x^2 + x + 1); (1 \bmod x + 1)\}$.

Then $\langle R \rangle = (x^5 \bmod x^7 + x^6 + x^4 + 1)$ with $\hat{R} = x^5$ and $\hat{R} = x^7 + x^6 + x^4 + 1$.

[00128] End of Example 1.

[00129] Example 2: Equivalent Relation Subsets

15 Let $\varepsilon = F_{11}[x]$ with

$$R = \left\{ \begin{array}{l} \mu_1 = (8 \bmod x - 1), \\ \mu_2 = (1 \bmod x - 4), \\ \mu_3 = (7 \bmod x - 5), \\ \mu_4 = (0 \bmod x - 8), \\ \mu_5 = (7 \bmod x - 10) \end{array} \right\}$$

$$I = \{\mu_2, \mu_4, \mu_5\}$$

The set I maps to the relation $\langle I \rangle = 2x^2 + 6x \bmod (x^3 + 9x + 10)$ while $\langle R \rangle = 3x^4 + 8x^3 + 7x^2 + 9x^2 + 3 \bmod (x^5 + 5x^4 + 3x^3 + 7x^1 + 6)$.

20 Notice that $I(\mu_1) = \mu_1$. This, along with the fact that the size of all moduli in R are identical (degree 1), gives us that the following relation sets are equivalent:

$$I \equiv \{\mu_1, \mu_4, \mu_5\} \equiv \{\mu_1, \mu_2, \mu_5\} \equiv \{\mu_1, \mu_2, \mu_4\}$$

[00130] End of Example 2.

[00131] Example 3: Integer Ya Den Weave Transform

25 Let $R = \{(2 \bmod 3)(3 \bmod 5)(1 \bmod 11)(7 \bmod 13)\}$, find $\hat{R} \bmod 7$.

	$\hat{\mu}_0 = 3$	$\hat{\mu}_1 = 5$	$\hat{\mu}_2 = 11$	$\hat{\mu}_3 = 13$
--	-------------------	-------------------	--------------------	--------------------

$w_k^{(0)}$	2	3	1	7
$w_k^{(1)}$	-	$3^{-1}(3-2)$	$3^{-1}(1-2)$	$3^{-1}(7-2)$
	-	2(1)	4(-1)	9(5)
	-	2	7	6
$w_k^{(2)}$	-	$5^{-1}(7-2)$		$5^{-1}(6-2)$
	-	9(5)		8(4)
	-	1		6
	-	$11^{-1}(6-1)$		$11^{-1}(6-1)$
	-	6(5)		6(5)
	-	4		4
R^π	(2 mod 3)	(2 mod 5)	(1 mod 11)	(4 mod 13)

The full value of $\langle R \rangle$ would be $\langle R \rangle = (2 + 3(2 + 5(1 + 11(4)))) = 683 \bmod 2145$,

but $\dot{R} \bmod 7$ can be computed without the full value:

$$\begin{aligned}
 \dot{R} &\equiv 2 + 3(2 + 5(1 + 11(4))) \bmod 7 \\
 &\equiv 2 + 3(2 + 5(1 + 4(4))) \bmod 7 \\
 &\equiv 2 + 3(2 + 5(3)) \bmod 7 \\
 &\equiv 2 + 3(3) \bmod 7 \\
 &\equiv 4 \bmod 7
 \end{aligned}$$

Now divide $\dot{R}$ by 7 and return the quotient modulo 3, 5, 11, and 13. The

- 5 reminder is already known: $r = 4$. To find the quotient, subtract r and multiply by

7^{-1} . The inverses of 7 mod $\hat{\mu}_i$ are:

$$[1 \bmod 3 \quad 3 \bmod 5 \quad 8 \bmod 11 \quad 2 \bmod 13].$$

Finally, the quotient is equivalent to:

$$\begin{aligned}
 10 \quad q &= 7^{-1}(\dot{R} - 4) \\
 &\equiv \begin{bmatrix} \bmod 3 & \bmod 5 & \bmod 11 & \bmod 13 \\ 1(2-4) \equiv 1 & 3(3-4) \equiv 2 & 8(1-4) \equiv 9 & 2(7-4) \equiv 6 \end{bmatrix}
 \end{aligned}$$

The integer form of the quotient is $\frac{683-4}{7} = 97$. Notice that

$$97 \equiv [1 \bmod 3 \quad 2 \bmod 5 \quad 9 \bmod 11 \quad 6 \bmod 13]$$

[00132] End Example 3.

- 15 [00133] Example 4: Polynomial Ya Den Weave Transform

Let $\varepsilon = F_2[x]$, represent polynomials in hexadecimal: $x^5 + x^3x^2 \rightarrow 0x2c$, and

$R = \{(0x6 \bmod 0x25), (0x1a \bmod 0x29), (0xc \bmod 0x2f), (0x3 \bmod 0x37)\}$ and find $\dot{R} \bmod 0x3b$:

	$\hat{\mu}_0 = 0x25$	$\hat{\mu}_1 = 0x29$	$\hat{\mu}_2 = 0x2f$	$\hat{\mu}_3 = 0x37$
$w_k^{(0)}$	0x6	0x1a	0xc	0x3
$w_k^{(1)}$	-	$0x25^{-1}$	$0x25^{-1}$	$0x25^{-1}(0x3 \oplus 0x6)$
	-	${}^1(0x1a \oplus 0x6)$	${}^1(0xc \oplus 0x6)$	$0x12^{-1} \cdot 0x5$
	-	$0xc^{-1} \cdot 0x1c$	$0xa^{-1} \cdot 0xa$	$0x3 \cdot 0x5$
	-	$0x6 \cdot 0x1c$	0x1	0xf
$w_k^{(2)}$		0x1a	0x1	
	-		$0x29^{-1}$	$0x29^{-1}(0xf \oplus 0x1a)$
	-		${}^1(0x1 \oplus 0x1a)$	$0x10 \cdot 0x15$
	-		$0xd \cdot 0x1b$	0x3
$w_k^{(3)}$			0x13	
	-			$0x2f^{-1}(0x3 \oplus 0x13)$
	-			$0x14 \cdot 0x10$
	-			0x13
w_j	$(0x6 \bmod 0x25)$	$(0x1a \bmod 0x29)$	$(0x13 \bmod 0x2f)$	$(0x13 \bmod 0x37)$

R contains four degree 6 polynomials, therefore $|\hat{R}| = 20$, but we can compute $\dot{R}$

- 5 $\bmod 0x3b$ with the w values and operations $\bmod 0x3b$ (note: all moduli have the same degree, therefore $\hat{w}_j \equiv (\hat{w}_j \oplus 0x3b) \bmod 0x3b$):

$$\begin{aligned}
 \dot{R} &\equiv 0x6 \oplus 0x25 (0x1a \oplus 0x29 (0x13 \oplus 0x2f \cdot 0x13)) \bmod 0x3b \\
 &\equiv 0x6 \oplus 0x1e (0x1a \oplus 0x12 (0x13 \oplus 0x14 \cdot 0x13)) \bmod 0x3b \\
 &\equiv 0x6 \oplus 0x1e (0x1a \oplus 0x12 \cdot 0x16) \bmod 0x3b \\
 10 \quad &\equiv 0x6 \oplus 0x1e \cdot 0x14 \bmod 0x3b \\
 &\equiv 0xb
 \end{aligned}$$

To illustrate how a change in order effects the weave transform, use the same R but swap the order of μ_1, μ_2 :

- 15 $R = \{(0x6 \bmod 0x25), (0x1a \bmod 0x29), (0xc \bmod 0x2f), (0x3 \bmod 0x37)\}$ and find $\dot{R} \bmod 0x3b$:

	$\hat{\mu}_0 = 0x25$	$\hat{\mu}_2 = 0x2f$	$\hat{\mu}_1 = 0x29$	$\hat{\mu}_3 = 0x37$
$w_k^{(0)}$	0x6	0xc	0x1a	0x3
$w_k^{(1)}$	-	0x1	0x1a	0xf
$w_k^{(2)}$	-		0x10	0x4
$w_k^{(3)}$	-			0x13
w_j	$(0x6 \bmod 0x25)$	$(0x1 \bmod 0x2f)$	$(0x10 \bmod 0x29)$	$(0x13 \bmod 0x37)$

Notice that swapping the order of μ_1, μ_2 changes the intermediate results for μ_3 , but not the final value or the result

$$\dot{R} \equiv 0x6 \oplus 0x25 (0x1a \oplus 0x2f (0x10 \oplus 0x29 \cdot 0x13)) \bmod 0x3b$$

$$5 \quad \equiv 0xb$$

The swapped transform can be computed using the weave swap technique. Using the original weave:

	$\hat{\mu}_0 = 0x25$	$\hat{\mu}_1 = 0x29$	$\hat{\mu}_2 = 0x2f$	$\hat{\mu}_3 = 0x37$
w_j	$(0x6 \bmod 0x25)$	$(0x1a \bmod 0x29)$	$(0x13 \bmod 0x2f)$	$(0x13 \bmod 0x37)$

It is known that $w_{\pi(0)}, w_{\pi(3)}$, where $\pi(0) = 0, \pi(3) = 3$, don't change. For the swapped values:

$$\begin{aligned}
 10 \quad w_{\pi(1)} &= w_2 (0x29 \oplus 0x2f) \oplus w_1 & \pi(1) &= 2 \\
 &= 0x1 \bmod 0x2f \\
 w_{\pi(2)} &= (w_1 \oplus w_{\pi(1)}) (0x29 \oplus 0x2f)^{-1} & \pi(2) &= 1 \\
 &= 0x10 \bmod 0x29
 \end{aligned}$$

[00134] End of Example 4.

- 15 **[00135]** Entwined encryption provides an implementer more freedom in implementation than other systems, which require a standard data block size. Many encoding schemes have rather strict restrictions on block size, but entwined encryption allows a user to vary a block size, such as based on their needs.

[00136] Entwined encryption may provide a foundation for a quantum resistant public key cryptosystem. This is a new, important area of cryptography as all currently used public key systems are vulnerable to quantum attacks.

[00137] An example that works with polynomials over F_2 or modulo 2:

5 $f(x) = \sum_{i=0} b_i x^i$ where $b_i \in \{0,1\}$ and x is a variable/placeholder. Arithmetic in this example is standard polynomial addition and multiplication, except coefficient addition and multiplication is done modulo 2: $1 + 1 = 1 \oplus 1 = 0$. As the coefficients are restricted to $\{1,0\}$, polynomials can be written in short hand as hexadecimal numbers. For example, $0x11d = 0b100011101 = x^8 + x^4 + x^3 +$
 10 $x^2 + 1$.

[00138] Modular reduction using polynomials over F_2 as the moduli is used in this example. If $M(x)$ is the polynomial modulus, then $0 = M(x) \bmod M(x)$. This may seem like an obvious statement, but it may be used to simplify polynomial reduction. Let $M(x) = x^n + \sum_{j=0}^{n-1} b_j x^j$ (e.g., a degree n polynomial

15 over F_2). Starting with the obvious relation, then adding x^n to both sides (addition being the same as subtraction mod 2), gives: $x^n = \sum_{j=0}^{n-1} b_j x^j \bmod M(x)$. To reduce a polynomial $P(x) \bmod M(x)$, simply replace n -th powers with the lower terms of $M(x)$ or add left shifted versions of $M(x)$ until the degree is less than n . The following table, the polynomial, $P(x) =$

20 $0x37f6$ is reduced modulo, $M(x)$, $0x11d$.

1	1	0	1	1	1	1	1	1	0	1	1	0
1	0	0	0	1	1	1	0	1	0	0	0	0
1	0	1	0	0	0	1	0	1	0	1	1	0
1	0	0	0	1	1	1	0	1	0	0	0	0
1	0	1	1	0	0	0	0	0	1	1	0	
1	0	0	0	1	1	1	0	1	0	0		
1	1	1	1	1	1	0	0	1	0			
1	0	0	0	1	1	1	0	1				
1	1	1	0	1	1	1	1					

which equals $0xef$.

[00139] Multiplicative inverses (e.g., division) modulo these polynomials is a component of the ECE. The inverse of $a \bmod m$ is b such that $ab = 1 \bmod m$, and it is written $b = a^{-1} \bmod m$. Inverses can be computed in several ways which

are not covered here. These include many variants of the Euclidean algorithm as well as the Da Yen.

[00140] Table 1 includes irreducible polynomials of degree 8 (in hexadecimal short-hand notation). Note that polynomial (j=0) is primitive. This means that every non-zero element of F_2 is generated by a root of the polynomial in the algebraic completion of F_2 . If α is a root of $p_0(x)$, then a root of polynomial $p_j(x)$ is $\alpha^{\exp}$. In the example encryption/encoding scheme below, these polynomials are referred to as $M_{id}(x)$.

id	poly(hex)	exp	id	poly (hex)	exp
0	11d	1	15	15f	37
1	177	3	16	1f9	39
2	1f3	5	17	1e3	43
3	169	7	18	139	45
4	1bd	9	19	1a9	47
5	1e7	11	20	187	53
6	12b	13	21	1b1	55
7	1d7	15	22	14d	59
8	165	19	23	1ef	61
9	18b	21	24	1dd	63
10	163	23	25	1a3	87
11	11b	25	26	1f5	91
12	13f	27	27	19f	95
13	18d	29	28	17b	111
14	12d	31	29	171	127

TABLE 1: Irreducible Polynomials of Degree 8

[00141] The following example encrypts/encodes a block of 24 bits (e.g., three 8-bit words) into five, 8-bit words. Plaintext bits are used as coefficients to a binary polynomial (an element of $F_2[x]$) with degree less than 24. A key stream is provided by a key generator (e.g., a stream cipher), such as can include a randomizer with a seed (e.g., an internal secret seed). This key stream provides integers in the range of the id of the set of irreducible polynomials. In this

example the key stream provides integers in the range $0 \leq k_i < 30$. Thus, these keys serve as indices for the irreducible polynomials, $M_j(x)$ in Table 1.

[00142] Consider $P(x) = \sum_{i=0}^{23} b_i x^i$ where $b_i \in \{0,1\}$. ECE converts $P(x)$ into five 8-bit words C_j where $C_j = P(x) \bmod M_{k_j}(x)$ for $0 \leq j < 5$.

5 Decrypting and decoding using the given key integers uses a Da Yen weave transform.

[00143] There are at least two construction techniques to determine C_j . Assume there are n C_j values mod M_j for $j = 0, 1, 2, \dots, (n-1)$. These may be the entire set of just a sub-set (if the product of M_j has a degree at least as large as the initial modulus (24 in this example)). The first technique can include using the following formula: $P(x) = \sum_{j=0}^{n-1} \prod_{i \neq j} M_i(x) [(\prod_{i \neq j} M_i(x))^{-1} C_j \bmod M_j(x)]$.

[00144] The second technique can include an iterative technique, such as can be more computationally efficient than the first technique. The iterative technique can follow these three formulas:

15
$$P_0(x) = C_0$$

$$P_j(x) = P_{j-1}(x) \oplus \left(\prod_{i=0}^{j-1} M_i(x) \left[\left(\prod_{i=0}^{j-1} M_i(x) \right)^{-1} (C_j \oplus P_{j-1}(x)) \bmod M_j(x) \right] \right)$$

$$P(x) = P_{n-1}(x)$$

[00145] For this example, let $P(x) = 0x23ab1f$ and the key integers be as shown in Table 2:

j	0	1	2	3	4
k _j	21	19	28	18	25

20 TABLE 2: Generated Key Values

[00146] In this example, $P(x)$ encrypts/encodes to:

$$C_0 = 8b \bmod 1b1$$

$$C_1 = 86 \bmod 1a9$$

$$C_2 = 31 \bmod 17b$$

25
$$C_3 = e9 \bmod 139$$

$$C_4 = 73 \bmod 1a3$$

[00147] If only C_1 , C_2 , and C_4 are recovered, and the keys are known, the full plain text can be recovered:

$$P(x) = (17b \cdot 1a3)[(17b \cdot 1a3)^{-1}86 \bmod 1a9] \oplus (1a9 \cdot 1a3)[(1a9 \cdot 1a3)^{-1}31 \bmod 17b] \oplus (1a9 \cdot 17b)[(1a9 \cdot 17b)^{-1}73 \bmod 1a3]$$

$$\begin{aligned} 5 \quad &= 1ea6d (39^{-1}86 \bmod 1a9) \oplus 14a5b(ad^{-1}31 \bmod 17b) \oplus 1e343 (5f^{-1}73 \bmod 1a3) \\ &= 1ea6d (f0 \cdot 86 \bmod 1a9) \oplus 14a5b(d2 \cdot 31 \bmod 17b) \oplus 1e343 (6d \cdot 73 \bmod 1a3) \\ &= (1ea6d \cdot b5) \oplus (14a5b \cdot 2) \oplus (1e343 \cdot 80) \\ &= d09e29 \oplus 294b6 \oplus f1a180 \end{aligned}$$

[00148] In this example, if all cipher words are known, an error may be

10 corrected. For example, let the C_j received after transmission be {8b, 96, 31, e9, 73} (note the error in $C_1 = 96$; C_1 was determined to be 86).

$$P(x) = 113b9e5fd (4b^{-1}C_0 \bmod 1b1) \oplus 101f3e905 (8f^{-1}C_1 \bmod 1a9) \oplus 1fbd82883 (55^{-1}C_2 \bmod 17b) \oplus 18c8b0e55 (14^{-1}C_3 \bmod 139) \oplus 10cd8495b (89^{-1}C_4 \bmod 1a3)$$

$$\begin{aligned} 15 \quad &= 113b9e5fd (7c \cdot C_0 \bmod 1b1) \oplus 101f3e905 (4a \cdot C_1 \bmod 1a9) \oplus 1fbd82883 \\ &(c9 \cdot C_2 \bmod 17b) \oplus 18c8b0e55 (16 \cdot C_3 \bmod 139) \oplus 10cd8495b (a6 \cdot C_4 \bmod 1a3) \\ &= 89dcf2fe8 \oplus 1f157a4763 \oplus 2afb4e07c1 \oplus 8eab0882cf \oplus 4c76d9e299 \\ &= ffae2a0f1c \bmod M_0M_1M_2M_3M_4. \end{aligned}$$

[00149] In only one error is in the blocks, then reducing this result modulo a smaller product (in this case $M_0M_2M_3M_4$) can produce a polynomial with degree less than 24, the corrected plain text. Using a product containing $C_1 \bmod M_1$ returns a polynomial with a higher degree. The value reduced modulo the product of all moduli but one of (in order) $M_0, M_1, \dots, M_4$, is provided:

$$ffa2a0f1c = c3ba8b51 \bmod 113b9e5fd \quad (M_0 \text{ removed, so } M_1M_2M_3M_4)$$

$$25 \quad ffa2a0f1c = 23ab1f \bmod 101f3e905 \quad (M_1 \text{ removed, so } M_0M_2M_3M_4)$$

$$ffa2a0f1c = 4e563719 \bmod 1fbd82883 \quad (M_2 \text{ removed, so } M_0M_1M_3M_4)$$

$$ffa2a0f1c = b925b63f \bmod 18c8b0e55 \quad (M_3 \text{ removed, so } M_0M_1M_2M_4)$$

$$ffa2a0f1c = d13bdbb9 \bmod 10cd8495b \quad (M_4 \text{ removed, so } M_0M_1M_2M_3)$$

[00150] As can be seen, removing M_1 from the modulus recovers the

30 original data 0x23ab1f.

[00151] FIG. 5 illustrates, by way of example, a graph 500 of error rate versus energy for a variety of encoding techniques. The graph 500, as illustrated,

includes uncoded data with added white Gaussian noise (AWGN) represented by line 506, data encoded using a Reed Solomon technique, represented by line 504, and data encoded using ECE, represented by line 502.

[00152] FIG. 6 illustrates, by way of example, a block diagram of an embodiment of a machine 600 on which one or more of the methods, such as those discussed with regard to FIGS. 3 and 4 and elsewhere herein can be implemented. In one or more embodiments, one or more items of the system 100 can be implemented by the machine 600. In alternative embodiments, the machine 600 operates as a standalone device or may be connected (e.g., networked) to other machines. In one or more embodiments, the entwined cryptographic encoder 102, the poly table 106, the key generator 104, the entwined cryptographic decoder 112, the poly table 116, the key generator 114, the medium 108, the encoding device 130 (the transmitter device), and/or the decoding device 140 (the receiver device) can include one or more of the items of the machine 600. In a networked deployment, the machine 600 may operate in the capacity of a server or a client machine in server-client network environment, or as a peer machine in a peer-to-peer (or distributed) network environment. The machine 600 may be a personal computer (PC), a tablet PC, a set-top box (STB), a Personal Digital Assistant (PDA), a cellular telephone, a web appliance, a network router, switch or bridge, or any machine capable of executing instructions (sequential or otherwise) that specify actions to be taken by that machine. Further, while only a single machine is illustrated, the term “machine” shall also be taken to include any collection of machines that individually or jointly execute a set (or multiple sets) of instructions to perform any one or more of the methodologies discussed herein.

[00153] The example machine 800 includes processing circuitry 902 (e.g., a central processing unit (CPU), a graphics processing unit (GPU), an application specific integrated circuit, circuitry, such as one or more transistors, resistors, capacitors, inductors, diodes, logic gates, multiplexers, oscillators, buffers, modulators, regulators, amplifiers, demodulators, radios (e.g., transmit or receive radios or transceivers), sensors 621 (e.g., a transducer that converts one form of energy (e.g., light, heat, electrical, mechanical, or other energy) to another form of energy), or the like, or a combination thereof), a main memory

604 and a static memory 606, which communicate with each other via a bus 608. The machine 600 (e.g., computer system) may further include a video display unit 610 (e.g., a liquid crystal display (LCD) or a cathode ray tube (CRT)). The machine 600 also includes an alphanumeric input device 612 (e.g., a keyboard),
5 a user interface (UI) navigation device 614 (e.g., a mouse), a disk drive or mass storage unit 616, a signal generation device 618 (e.g., a speaker) and a network interface device 620.

[00154] The disk drive unit 616 includes a machine-readable medium 622 on which is stored one or more sets of instructions and data structures (e.g.,
10 software) 624 embodying or utilized by any one or more of the methodologies or functions described herein. The instructions 624 may also reside, completely or at least partially, within the main memory 604 and/or within the processor 602 during execution thereof by the machine 600, the main memory 604 and the processor 602 also constituting machine-readable media.

15 **[00155]** The machine 600 as illustrated includes an output controller 628. The output controller 628 manages data flow to/from the machine 600. The output controller 628 is sometimes called a device controller, with software that directly interacts with the output controller 628 being called a device driver.

[00156] While the machine-readable medium 622 is shown in an example
20 embodiment to be a single medium, the term "machine-readable medium" may include a single medium or multiple media (e.g., a centralized or distributed database, and/or associated caches and servers) that store the one or more instructions or data structures. The term "machine-readable medium" shall also be taken to include any tangible medium that is capable of storing, encoding or
25 carrying instructions for execution by the machine and that cause the machine to perform any one or more of the methodologies of the present invention, or that is capable of storing, encoding or carrying data structures utilized by or associated with such instructions. The term "machine-readable medium" shall accordingly be taken to include, but not be limited to, solid-state memories, and optical and
30 magnetic media. Specific examples of machine-readable media include non-volatile memory, including by way of example semiconductor memory devices, e.g., Erasable Programmable Read-Only Memory (EPROM), Electrically Erasable Programmable Read-Only Memory (EEPROM), and flash memory

devices; magnetic disks such as internal hard disks and removable disks; magneto-optical disks; and CD-ROM and DVD-ROM disks.

[00157] The instructions 624 may further be transmitted or received over a communications network 626 using a transmission medium. The instructions
5 624 may be transmitted using the network interface device 620 and any one of several well-known transfer protocols (e.g., HTTP). Examples of communication networks include a local area network ("LAN"), a wide area network ("WAN"), the Internet, mobile telephone networks, Plain Old Telephone (POTS) networks, and wireless data networks (e.g., WiFi and WiMax networks). The term
10 "transmission medium" shall be taken to include any intangible medium that is capable of storing, encoding or carrying instructions for execution by the machine, and includes digital or analog communications signals or other intangible media to facilitate communication of such software.

[00158] Examples and Additional Notes.

15 [00159] Example 1 can include an entwined cryptographic encode device comprising a memory including data indicating a set of relatively prime, irreducible polynomials stored and indexed thereon in a polynomial table, entwined cryptographic encoding circuitry to receive data, transform the data to a set of data integers modulo respective polynomial integers representative of
20 respective polynomials of the polynomial table, and perform a Da Yen weave on the transformed data based on received cipher data, and provide the weaved transformed data to a medium.

[00160] In Example 2, Example 1 can further include key generator circuitry to produce a cipher stream of data based on a key, and wherein the
25 entwined cryptographic encoding circuitry is further configured to transform the data to a set of data integers modulo respective polynomial integers and perform the Da Yen weave based on the received cipher stream.

[00161] In Example 3, Example 2 can further include, wherein another portion of the cipher stream provides an index to the respective polynomials.

30 [00162] In Example 4, Example 3 can further include, wherein the polynomials are indexed based on a respective root and primitive of the polynomials.

[00163] In Example 5, at least one of Examples 1-4 can further include, wherein the weaved transformed data includes the transformed received data and transformed cipher data transformed, by the entwined cryptographic encoding circuitry, based on data from the cipher stream.

5 [00164] In Example 6, at least one of Examples 1-5 can further include, wherein the entwined cryptographic encoding circuitry is further configured to split the received data into blocks of v -bit words, wherein the transformation of the data includes transformation of the blocks of v -bits words individually, and wherein v is a maximum degree of the polynomials in the memory.

10 [00165] In Example 7, at least one of Example 1-6 can further include, wherein a number of t -bit cipher words provided by the cipher stream includes the number of words in a block of the blocks, $2r$, plus two times a maximum number of errors to be corrected, s , and a number of v -bit cipher words provided by the cipher stream includes two times the maximum number of errors to be
15 corrected, wherein the weaved transformed data includes transformed versions of each of the v -bit words of the data block and transformed versions of the $2s$, v -bit words from the cipher stream, wherein the number of polynomials in the memory is 2^t .

[00166] Example 8 includes an entwined cryptographic decode device
20 comprising a memory including data indicating a set of relatively prime, irreducible polynomials stored and indexed thereon in a polynomial table, entwined cryptographic decoding circuitry to receive encrypted, encoded data, perform a Da Yen weave transform on a portion the encrypted, encoded data, compare the transformed data to another portion of the encrypted, encoded data
25 to determine if errors exist in the transformed data, in response to a determination that no errors exist, convert the error-free version of data to plaintext, and provide the plaintext to a receiver.

[00167] In Example 9, Example 8 further includes, wherein the entwined cryptographic decoding circuitry is further configured to in response to a
30 determination that errors exist, perform a weave swap on two words of the transformed data, and compare the weave swapped data to a different portion of the encrypted, encoded data to determine if errors exist in the weave swapped version.

[00168] In Example 10, Example 9 can further include key generator circuitry to produce a cipher stream of data based on a key, and wherein the entwined cryptographic decoding circuitry is further configured to transform the encrypted encoded data to a set of data integers modulo respective polynomial integers and perform the Da Yen weave transform based on the received cipher stream.

[00169] In Example 11, Example 10 can further include, wherein another portion of the cipher stream provides an index to respective polynomials represented by respective polynomial integers.

10 [00170] In Example 12, Example 11 can further include, wherein the polynomials are indexed based on a respective root and primitive of the polynomials.

[00171] In Example 13, at least one of Examples 8-12 can further include, wherein the weave transformed data includes the transformed received data and transformed cipher data transformed, by the entwined cryptographic decoding circuitry, based on data from the cipher stream.

[00172] In Example 14, at least one of Examples 8-13 can further include, wherein v is a maximum degree of the polynomials in the memory, wherein a number of t -bit cipher words provided by the cipher stream includes the number of words in a block of the blocks, $2r$, plus two times a maximum number of errors to be corrected, s , and a number of v -bit cipher words provided by the cipher stream includes two times the maximum number of errors to be corrected, wherein the weaved transformed data includes transformed versions of each of the v -bit words of the data block and transformed versions of the $2s$, v -bit words from the cipher stream, wherein the number of polynomials in the memory is 2^t .

[00173] In Example 15, an encryption and decryption system includes an entwined cryptographic encode device comprising a first memory including data indicating a set of relatively prime, irreducible polynomials stored and indexed thereon in a first polynomial table, entwined cryptographic encoding circuitry to receive data, transform the data to a set of data integers modulo respective polynomial integers representative of respective polynomials of the polynomial table, perform a Da Yen weave on the transformed data based on received cipher data, and provide the weaved transformed data to a medium, and an entwined

cryptographic decode device comprising a second memory including data indicating the set of relatively prime, irreducible polynomials stored and indexed thereon in a second polynomial table, entwined cryptographic decoding circuitry to receive the encrypted, encoded data from the medium, perform a Da Yen
 5 weave transform on a first portion the encrypted, encoded data, compare the transformed data to a second portion of the encrypted, encoded data to determine if errors exist in the transformed data, in response to a determination that no errors exist, convert the error-free version of data to plaintext, and provide the plaintext to a receiver.

10 [00174] In Example 16, Example 15 may further include, wherein the entwined cryptographic encode device further includes first key generator circuitry to produce a first cipher stream of data based on a first key, and wherein the entwined cryptographic encoding circuitry is further configured to transform the data to a set of data integers modulo respective polynomial
 15 integers and perform the Da Yen weave based on the received first cipher stream, and the entwined cryptographic decode device further includes second key generator circuitry to produce a second cipher stream of data based on a second key, and wherein the entwined cryptographic decoding circuitry is further configured to transform the encrypted encoded data to a set of data
 20 integers modulo respective polynomial integers and perform the Da Yen weave transform based on the received second cipher stream.

[00175] In Example 17, Example 16 can further include, wherein the first and second key generator circuitry are synced.

25 [00176] In Example 18, at least one of Examples 16-17 can further include, wherein a portion of the first cipher stream provides an index to the respective polynomials on the first memory and wherein a portion of the second cipher stream provides an index to the respective polynomials on the second memory.

30 [00177] In Example 19, Example 18 can further include, wherein the polynomials on the first and second memories are indexed based on a respective root and primitive of the polynomials.

[00178] In Example 20, at least one of Examples 16-19 can further include, wherein the entwined cryptographic decoding circuitry is further

configured to, in response to a determination that errors exist, perform a weave swap on two words of the transformed data, and compare the weave swapped data to a different portion of the encrypted, encoded data to determine if errors exist in the weave swapped version.

5 **[00179]** In Example 21, at least one of Examples 16-20 can further include, wherein the weaved transformed data includes the transformed received data and transformed cipher data transformed, by the entwined cryptographic encoder circuitry, based on data from the cipher stream.

10 **[00180]** In Example 22, at least one of Examples 16-21 can further include, wherein the entwined encryption circuitry is further to split the received data into blocks of v-bit words, and transformation of the data includes transformation of the blocks of v-bits words individually, wherein v is a maximum degree of the polynomials in the memory.

15 **[00181]** In Example 23, at least one of Examples 16-22 can further include, wherein a number of t-bit cipher words provided by the first and second cipher streams includes the number of words in a block of the blocks, $2r$, plus two times a maximum number of errors to be corrected, s , and a number of v-bit cipher words provided by the cipher stream includes two times the maximum number of errors to be corrected, wherein the weaved transformed data includes
20 transformed versions of each of the v-bit words of the data block and transformed versions of the $2s$, v-bit words from the cipher stream, wherein the number of first and second polynomials in the first and second memories is 2^t .

25 **[00182]** In Example 24, at least one of Examples 16-23 can further include, wherein another portion of the first cipher stream provides an index to first respective polynomials represented by respective polynomial integers.

30 **[00183]** In Example 25, at least one of Examples 16-24 can further include, wherein the first polynomials are indexed based on a respective root and primitive of the polynomials.

30 **[00184]** In Example 26, at least one of Examples 16-25 can further include, wherein the weave transformed data includes the transformed received data and transformed cipher data transformed, by the entwined cryptographic decoding circuitry, based on data from the cipher stream.

[00185] Example 27 can include a method for entwined cryptographic encoding storing, on a memory, data indicating a set of relatively prime, irreducible polynomials stored and indexed thereon in a polynomial table, receiving data, at entwined cryptographic encoding circuitry, transforming the data to a set of data integers modulo respective polynomial integers representative of respective polynomials of the polynomial table, performing a Da Yen weave on the transformed data based on received cipher data, and providing the weaved transformed data to a medium.

[00186] In Example 28, Example 27 can further include producing, using key generator circuitry, a cipher stream of data based on a key, and wherein the entwined cryptographic encoding circuitry is further configured to transform the data to a set of data integers modulo respective polynomial integers and perform the Da Yen weave based on the received cipher stream.

[00187] In Example 29, Example 28 can further include, wherein another portion of the cipher stream provides an index to the respective polynomials.

[00188] In Example 30, at least one of Examples 27-29 can further include, wherein the polynomials are indexed based on a respective root and primitive of the polynomials.

[00189] In Example 31, at least one of Examples 27-30 can further include, wherein the weaved transformed data includes the transformed received data and transformed cipher data transformed, by the entwined cryptographic encoding circuitry, based on data from the cipher stream.

[00190] In Example 32, at least one of Examples 27-31 can further include splitting the received data into blocks of v -bit words, wherein the transformation of the data includes transformation of the blocks of v -bits words individually, and wherein v is a maximum degree of the polynomials in the memory.

[00191] In Example 33, at least one of Example 27-32 can further include, wherein a number of t -bit cipher words provided by the cipher stream includes the number of words in a block of the blocks, $2r$, plus two times a maximum number of errors to be corrected, s , and a number of v -bit cipher words provided by the cipher stream includes two times the maximum number of errors to be corrected, wherein the weaved transformed data includes transformed versions of

each of the v -bit words of the data block and transformed versions of the $2s$, v -bit words from the cipher stream, wherein the number of polynomials in the memory is 2^l .

[00192] Example 34 includes a method of entwined cryptographic decoding including storing, on a memory, data indicating a set of relatively prime, irreducible polynomials stored and indexed thereon in a polynomial table, receiving, at entwined cryptographic decoding circuitry, encrypted, encoded data, performing a Da Yen weave transform on a portion the encrypted, encoded data, comparing the transformed data to another portion of the encrypted, encoded data to determine if errors exist in the transformed data, in response to a determination that no errors exist, converting the error-free version of data to plaintext, and providing the plaintext to a receiver.

[00193] In Example 35, Example 34 further includes, in response to a determination that errors exist, performing a weave swap on two words of the transformed data, and compare the weave swapped data to a different portion of the encrypted, encoded data to determine if errors exist in the weave swapped version.

[00194] In Example 36, Example 35 can further include producing, using key generator circuitry, a cipher stream of data based on a key, and transforming the encrypted encoded data to a set of data integers modulo respective polynomial integers and perform the Da Yen weave transform based on the received cipher stream.

[00195] In Example 37, Example 36 can further include, wherein another portion of the cipher stream provides an index to respective polynomials represented by respective polynomial integers.

[00196] In Example 38, Example 37 can further include, wherein the polynomials are indexed based on a respective root and primitive of the polynomials.

[00197] In Example 39, at least one of Examples 34-38 can further include, wherein the weave transformed data includes the transformed received data and transformed cipher data transformed, by the entwined cryptographic decoding circuitry, based on data from the cipher stream.

[00198] In Example 40, at least one of Examples 34-39 can further include, wherein v is a maximum degree of the polynomials in the memory, wherein a number of t -bit cipher words provided by the cipher stream includes the number of words in a block of the blocks, $2r$, plus two times a maximum
5 number of errors to be corrected, s , and a number of v -bit cipher words provided by the cipher stream includes two times the maximum number of errors to be corrected, wherein the weaved transformed data includes transformed versions of each of the v -bit words of the data block and transformed versions of the $2s$, v -bit words from the cipher stream, wherein the number of polynomials in the
10 memory is 2^t .

[00199] Example 41 can include a non-transitory machine-readable medium including instructions that, when executed by a machine, configure the machine to perform operations of the method of at least one of Examples 27-40.

[00200] Although an embodiment has been described with reference to
15 specific example embodiments, it will be evident that various modifications and changes may be made to these embodiments without departing from the broader spirit and scope of the invention. Accordingly, the specification and drawings are to be regarded in an illustrative rather than a restrictive sense. The accompanying drawings that form a part hereof, show by way of illustration, and
20 not of limitation, specific embodiments in which the subject matter may be practiced. The embodiments illustrated are described in sufficient detail to enable those skilled in the art to practice the teachings disclosed herein. Other embodiments may be utilized and derived therefrom, such that structural and logical substitutions and changes may be made without departing from the scope
25 of this disclosure. This Detailed Description, therefore, is not to be taken in a limiting sense, and the scope of various embodiments is defined only by the appended claims, along with the full range of equivalents to which such claims are entitled.

CLAIMS

What is claimed is:

- 5 1. An entwined cryptographic encode device comprising:
a memory including data indicating a set of relatively prime, irreducible
polynomials stored and indexed thereon in a polynomial table;
entwined cryptographic encoding circuitry to:
receive data;
10 transform the data to a set of data integers modulo respective
polynomial integers representative of respective polynomials of the
polynomial table; and
perform a Da Yen weave on the transformed data based on
received cipher data; and
15 provide the weaved transformed data to a medium.
2. The device of claim 1, further comprising:
key generator circuitry to produce a cipher stream of data based on a key;
and
20 wherein the entwined cryptographic encoding circuitry is further
configured to transform the data to a set of data integers modulo respective
polynomial integers and perform the Da Yen weave based on the received cipher
stream.
- 25 3. The device of claim 2, wherein another portion of the cipher stream
provides an index to the respective polynomials.
4. The device of claim 3, wherein the polynomials are indexed based on a
respective root and primitive of the polynomials.
- 30 5. The device of claim 4, wherein the weaved transformed data includes the
transformed received data and transformed cipher data transformed, by the

entwined cryptographic encoding circuitry, based on data from the cipher stream.

6. The device of claim 5, wherein the entwined cryptographic encoding
5 circuitry is further configured to:

split the received data into blocks of v -bit words;

wherein the transformation of the data includes transformation of the
blocks of v -bits words individually; and

wherein v is a maximum degree of the polynomials in the memory.

10

7. The device of claim 6, wherein a number of t -bit cipher words provided
by the cipher stream includes the number of words in a block of the blocks, $2r$,
plus two times a maximum number of errors to be corrected, s , and a number of
 v -bit cipher words provided by the cipher stream includes two times the

15 maximum number of errors to be corrected, wherein the weaved transformed data
includes transformed versions of each of the v -bit words of the data block and
transformed versions of the $2s$, v -bit words from the cipher stream, wherein the
number of polynomials in the memory is 2^t .

20 8. An entwined cryptographic decode device comprising:
a memory including data indicating a set of relatively prime, irreducible
polynomials stored and indexed thereon in a polynomial table;

entwined cryptographic decoding circuitry to:

receive encrypted, encoded data;

25 perform a Da Yen weave transform on a portion the encrypted,
encoded data;

compare the transformed data to another portion of the encrypted,
encoded data to determine if errors exist in the transformed data;

in response to a determination that no errors exist, convert the
error-free version of data to plaintext; and

30

provide the plaintext to a receiver.

9. The device of claim 8, wherein the entwined cryptographic decoding circuitry is further configured to:

in response to a determination that errors exist, perform a weave swap on two words of the transformed data; and

5 compare the weave swapped data to a different portion of the encrypted, encoded data to determine if errors exist in the weave swapped version.

10. The device of claim 9, further comprising:

key generator circuitry to produce a cipher stream of data based on a key;

10 and

wherein the entwined cryptographic decoding circuitry is further configured to transform the encrypted encoded data to a set of data integers modulo respective polynomial integers and perform the Da Yen weave transform based on the received cipher stream.

15

11. The device of claim 10, wherein another portion of the cipher stream provides an index to respective polynomials represented by respective polynomial integers.

20 12. The device of claim 11, wherein the polynomials are indexed based on a respective root and primitive of the polynomials.

25 13. The device of claim 12, wherein the weave transformed data includes the transformed received data and transformed cipher data transformed, by the entwined cryptographic decoding circuitry, based on data from the cipher stream.

30 14. The device of claim 13, wherein v is a maximum degree of the polynomials in the memory, wherein a number of t -bit cipher words provided by the cipher stream includes the number of words in a block of the blocks, $2r$, plus two times a maximum number of errors to be corrected, s , and a number of v -bit cipher words provided by the cipher stream includes two times the maximum number of errors to be corrected, wherein the weaved transformed data includes

transformed versions of each of the v -bit words of the data block and transformed versions of the $2s$, v -bit words from the cipher stream, wherein the number of polynomials in the memory is 2^l .

- 5 15. An encryption and decryption system comprising:
 an entwined cryptographic encode device comprising:
 a first memory including data indicating a set of relatively prime,
 irreducible polynomials stored and indexed thereon in a first polynomial table;
 entwined cryptographic encoding circuitry to:
10 receive data;
 transform the data to a set of data integers modulo respective
 polynomial integers representative of respective polynomials of the first
 polynomial table; and
 perform a Da Yen weave on the transformed data based on
15 received cipher data; and
 provide the weaved transformed data to a medium; and
 an entwined cryptographic decode device comprising:
 a second memory including data indicating the set of relatively prime,
 irreducible second polynomials stored and indexed thereon in a second
20 polynomial table;
 entwined cryptographic decoding circuitry to:
 receive the encrypted, encoded data from the medium;
 perform a Da Yen weave transform on a first portion the
 encrypted, encoded data;
25 compare the transformed data to a second portion of the
 encrypted, encoded data to determine if errors exist in the transformed
 data;
 in response to a determination that no errors exist, convert the
 error-free version of data to plaintext; and
30 provide the plaintext to a receiver.
16. The system of claim 15, wherein:
 the entwined cryptographic encode device further includes:

first key generator circuitry to produce a first cipher stream of data based on a first key; and

wherein the entwined cryptographic encoding circuitry is further configured to transform the data to a set of data integers modulo respective polynomial integers and perform the Da Yen weave based on the received first cipher stream; and

the entwined cryptographic decode device further includes:

second key generator circuitry to produce a second cipher stream of data based on a second key; and

wherein the entwined cryptographic decoding circuitry is further configured to transform the encrypted encoded data to a set of data integers modulo respective polynomial integers and perform the Da Yen weave transform based on the received second cipher stream.

17. The system of claim 16, wherein the first and second key generator circuitry are synced.

18. The system of claim 16, wherein a portion of the first cipher stream provides an index to the respective polynomials on the first memory and wherein a portion of the second cipher stream provides an index to the respective polynomials on the second memory.

19. The system of claim 18, wherein the polynomials on the first and second memories are indexed based on a respective root and primitive of the polynomials.

20. The system of claim 16, wherein the entwined cryptographic decoding circuitry is further configured to:

in response to a determination that errors exist, perform a weave swap on two words of the transformed data; and

compare the weave swapped data to a different portion of the encrypted, encoded data to determine if errors exist in the weave swapped version.

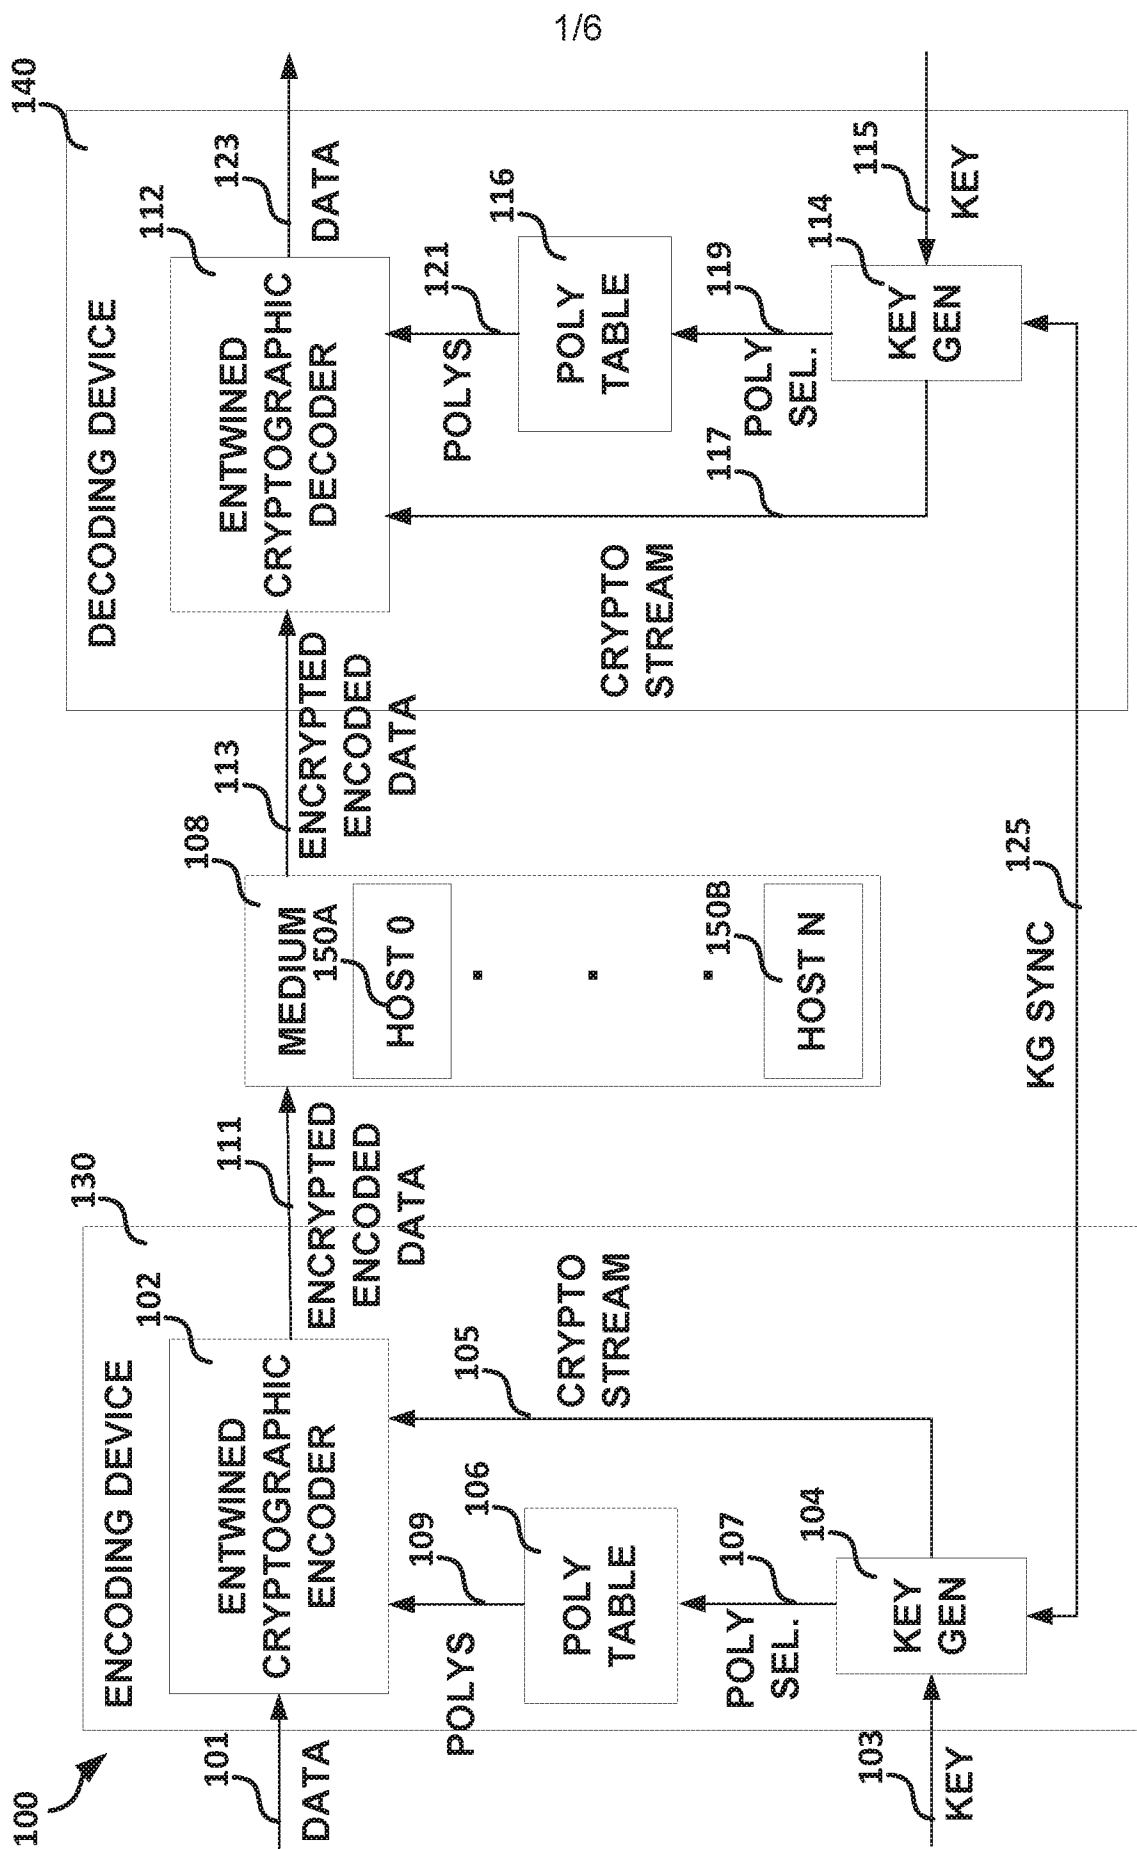
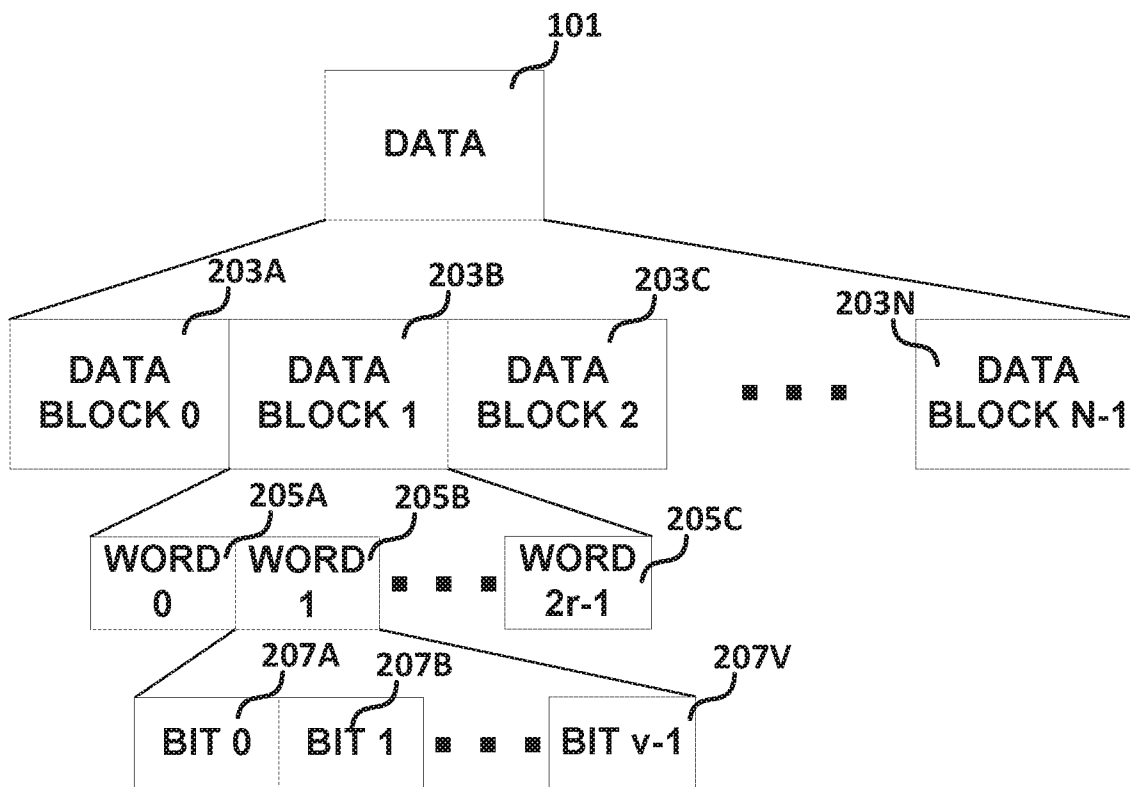
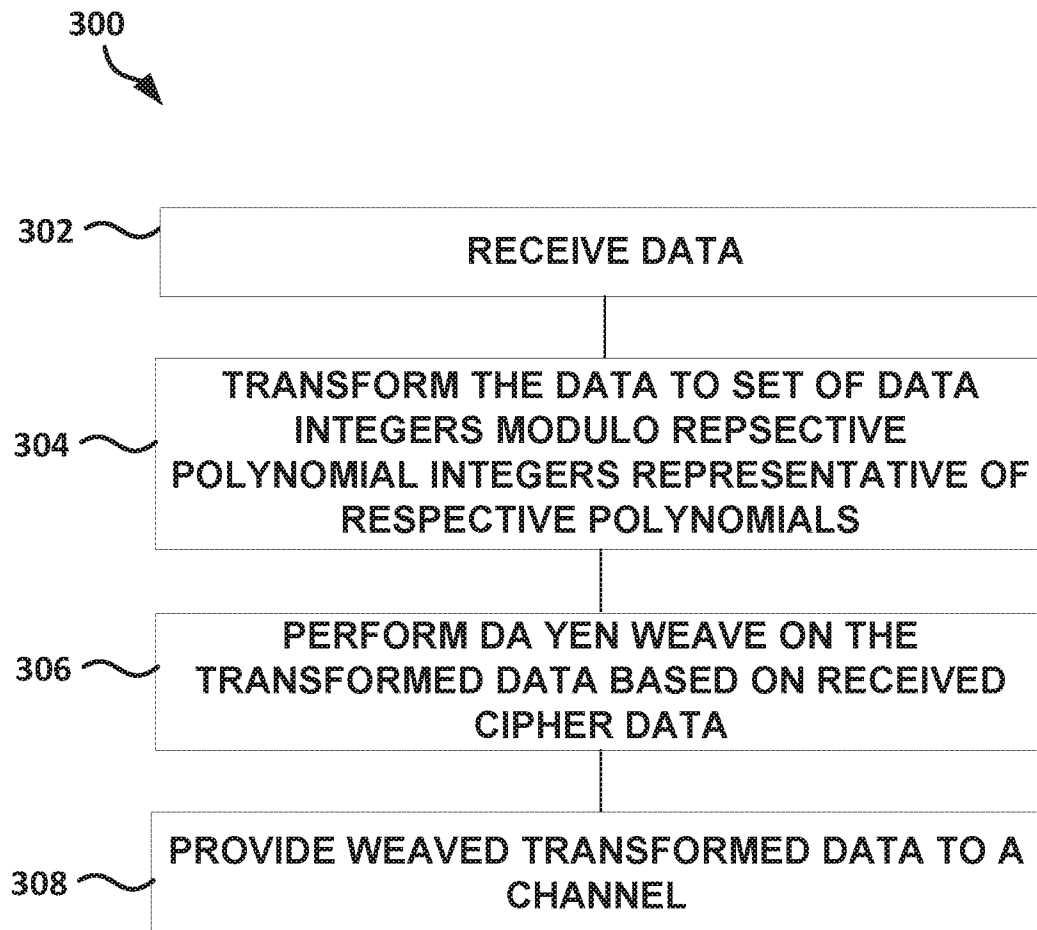
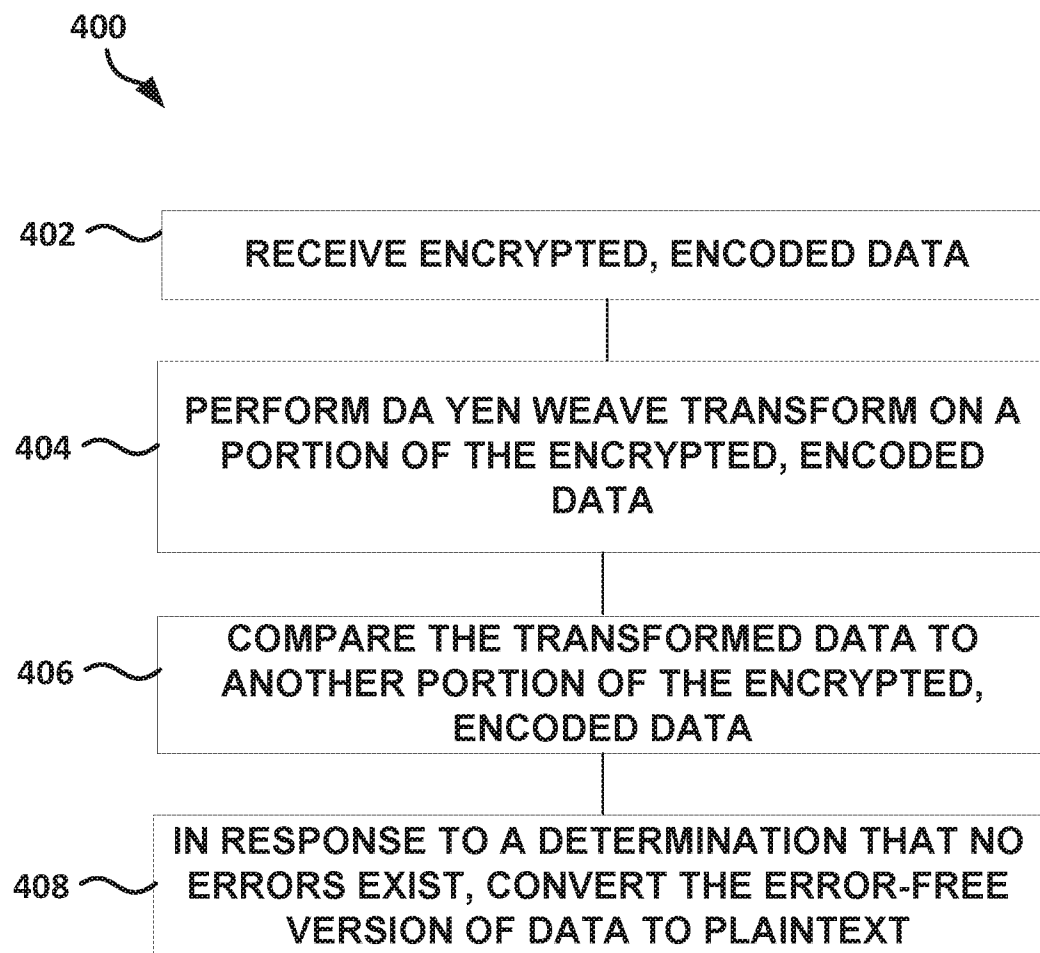


FIG. 1

*FIG. 2*

*FIG. 3*

*FIG. 4*

500

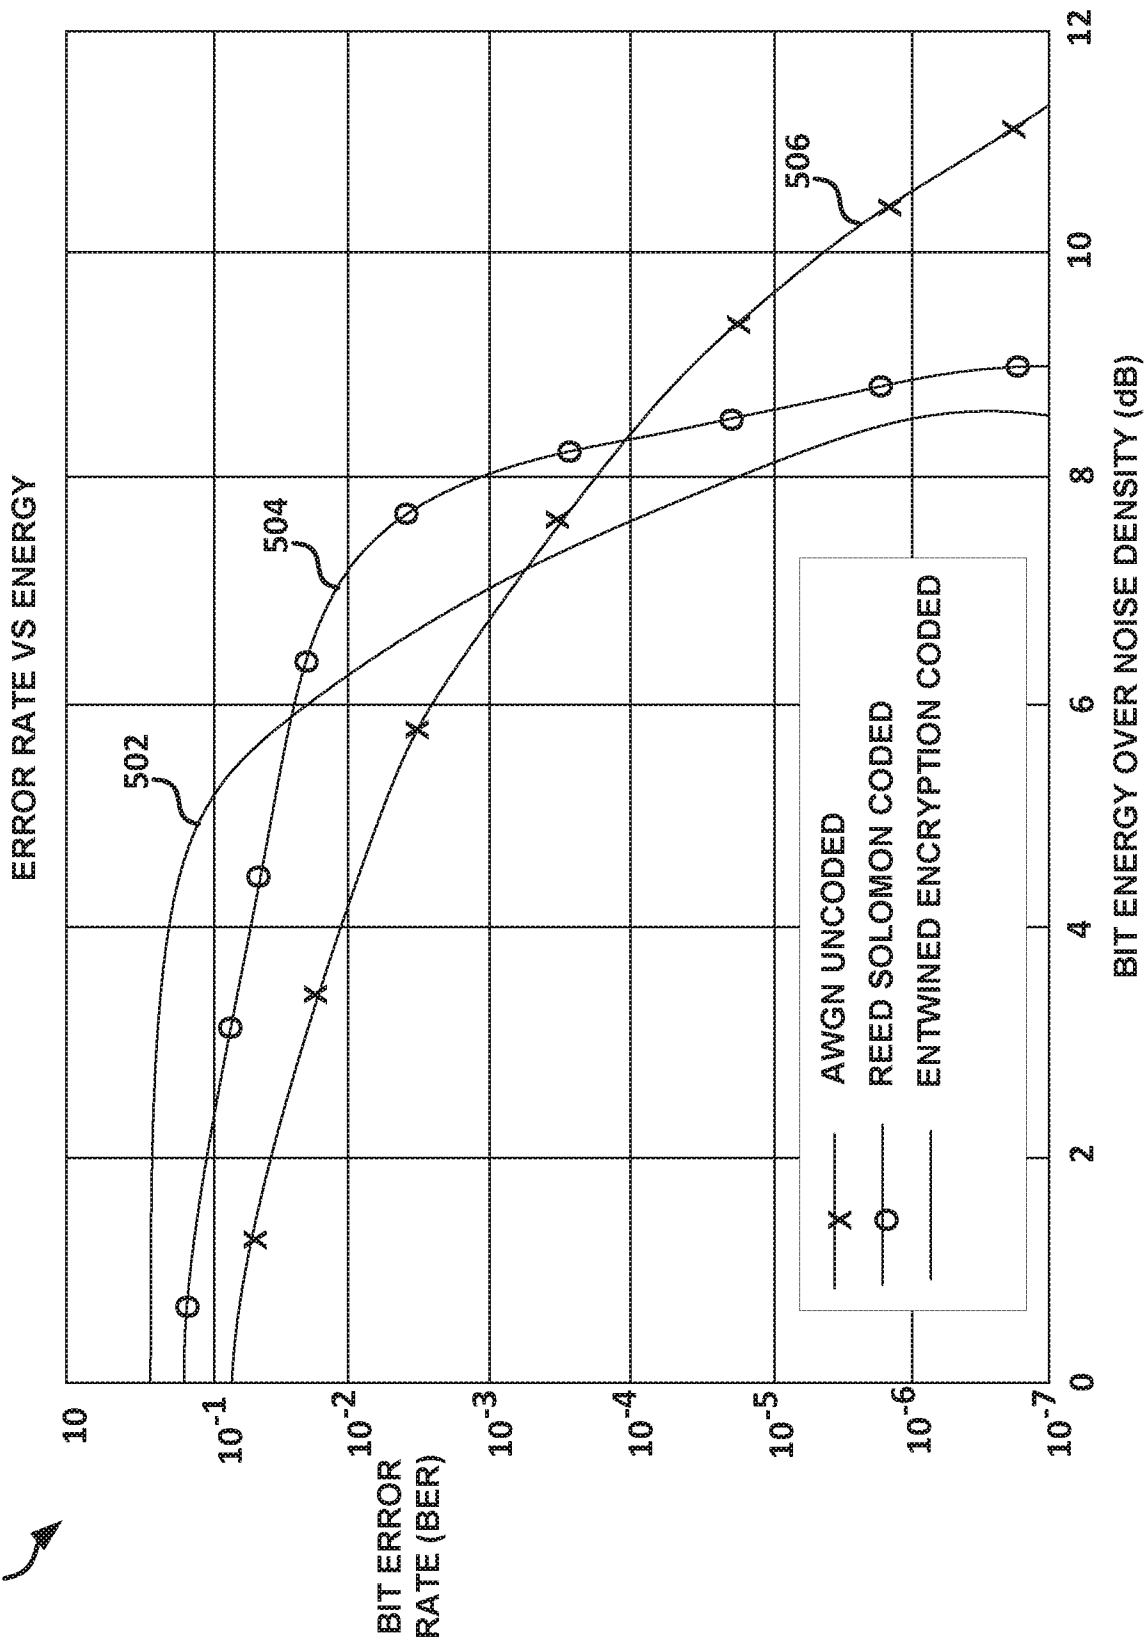


FIG. 5

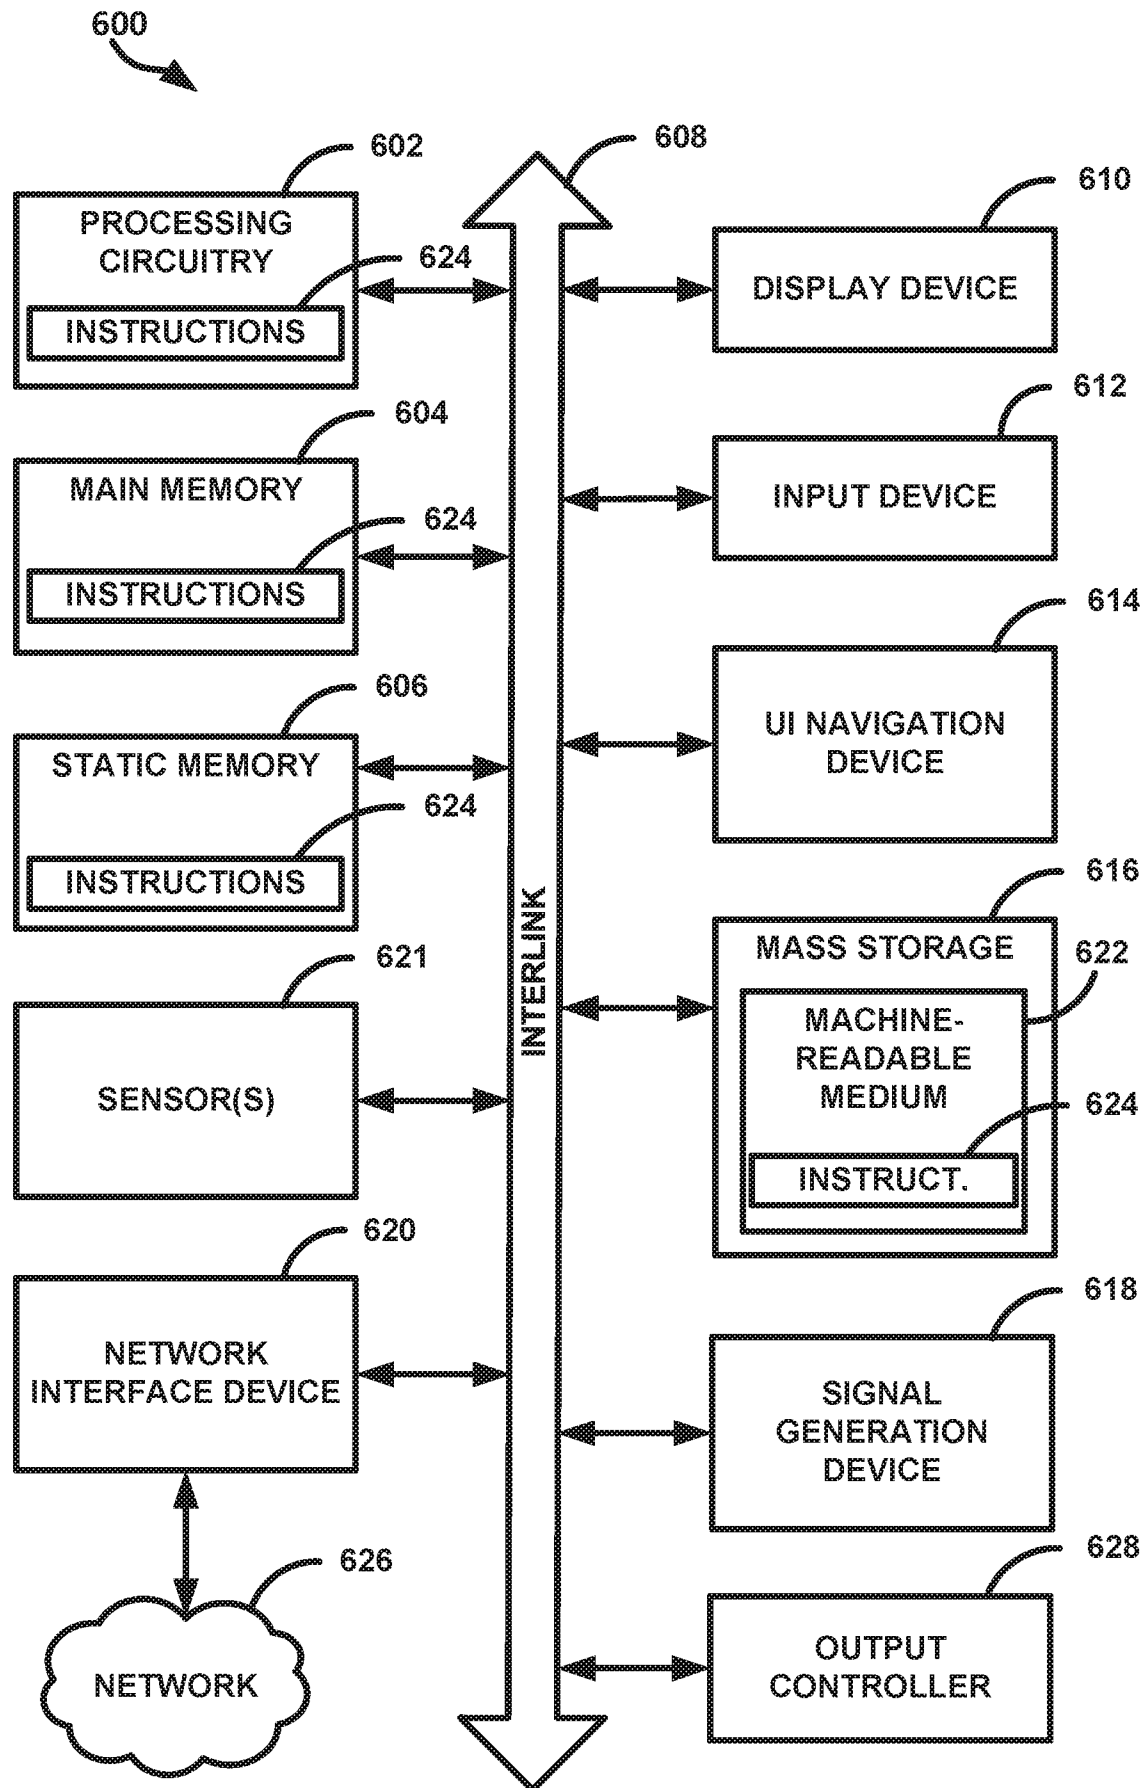


FIG. 6

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2018/041623

A. CLASSIFICATION OF SUBJECT MATTER

INV. H04L9/06 H04L9/00 H04L9/30 H04L9/08
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
H04L

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	ANNA JOHNSTON: "Dispersed Cryptography and the Quotient Ring Transform", INTERNATIONAL ASSOCIATION FOR CRYPTOLOGIC RESEARCH,, vol. 20170220:143702, 14 February 2017 (2017-02-14), pages 1-27, XP061022816, [retrieved on 2017-02-14] abstract page 5, line 20 - page 14, line 12 page 16, line 8 - page 21, line 17 -----	1-20
A	US 2016/112197 A1 (JOHNSTON ANNA M [US]) 21 April 2016 (2016-04-21) abstract paragraph [0008] - paragraph [0010] paragraph [0023] - paragraph [0080]; figures 2-4,7 -----	1-20



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

20 September 2018

Date of mailing of the international search report

08/10/2018

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Spranger, Stephanie

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/US2018/041623

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2016112197	A1	21-04-2016	NONE
