



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : C08F 8/00, C08L 101/00, C08K 5/00	A1	(11) International Publication Number: WO 98/18830 (43) International Publication Date: 7 May 1998 (07.05.98)
(21) International Application Number: PCT/EP97/05782 (22) International Filing Date: 20 October 1997 (20.10.97) (30) Priority Data: 96810726.8 31 October 1996 (31.10.96) EP (34) Countries for which the regional or international application was filed: DE et al. (71) Applicant (for all designated States except US): CIBA SPECIALTY CHEMICALS HOLDING INC. [CH/CH]; Klybeckstrasse 141, CH-4057 Basel (CH). (72) Inventors; and (75) Inventors/Applicants (for US only): PFAENDNER, Rudolf [DE/DE]; Sackgasse 3, D-64668 Rimbach (DE). HERBST, Heinz [DE/DE]; Hohensteiner Strasse 40, D-64686 Lautertal (DE). HOFFMANN, Kurt [DE/DE]; Hans-Willmann-Strasse 1a, D-67157 Wachenheim (DE). EVANS, Samuel [GB/CH]; Route des Charbonnières 17, CH-1723 Marly (CH). STEINMANN, Alfred [CH/CH]; Les Russilles, CH-1724 Praroman (CH). (74) Common Representative: CIBA SPECIALTY CHEMICALS HOLDING INC.; Patentabteilung, Klybeckstrasse 141, CH-4057 Basel (CH).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i>
(54) Title: FUNCTIONALISED POLYMERS		
(57) Abstract <p>This invention relates to a process for stabilising and at the same time phase compatibilising plastics or plastic compositions by incorporating polymeric compounds obtainable by reacting a compound selected from the group consisting of the sterically hindered phenols, sterically hindered amines, lactones, sulfides, phosphites, benzotriazoles, benzophenones and 2-(2-hydroxyphenyl)-1,3,5-triazines, which compounds contain at least one reactive group, with a compatibilisator.</p>		

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakhstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Functionalised polymers

The present invention relates to stabilising plastics and plastic compositions (virgin materials or recyclates, optionally blended with virgin materials) while at the same time improving the mechanical properties by incorporating specific compatibilisers.

The preparation of polymer blends is an established method for producing plastics having novel properties. As is known, however, polymers of different structures usually cannot be blended with each other, i.e. processing two different plastics gives a macroscopical mixture having insufficient mechanical properties. To improve the compatibility and therefore also the properties of the plastic blends, so-called compatibilisers are commercially available. These compatibilisers are polymers which prevent or reduce the separation of two- or multi-component systems or which improve the dispersion, thereby producing a homogeneous blend of different plastics which has good mechanical properties.

The known compatibilisers are predominantly based on polymers of polar and nonpolar structures which are produced by customary polymerisation reactions.

Compatibilisers are used in virgin plastic compositions and also, increasingly, in recyclates. In this case, the production process, or the used plastics collection, often results in plastic compositions the mechanical properties of which are only adequate for new applications if compatibilisers are added to them. In *Kunststoffe 83 (1993), 10, 820-822* and in *Kunststoffe 85 (1995) 4, 446-450*, K. Hausmann discusses the problem of recycling incompatible plastics such as polyethylene/polyethylene terephthalate (PE/PET) and polyamide/polyethylene (PA/PE). For recycling, compatibilisers are used. In *Kunststoffe 83 (1993) 5, 369-372* R.-E. Grützner, R. Gärtner and H.-G. Hock published research on similar systems (PE/PA composite foils). R. Mühlhaupt and J. Rösch report on phase compatibilisers for polypropylene/polyamide (PP/PA) alloys in *Kunststoffe 84 (1994) 9, 1153-1158*. In *Kunststoffe 83 (1993) 11, 926-929*, G. Obieglo and K. Romer also describe compatibilisers for use in plastic recycling. In *Recycle '91, 8/5-1* and *Recycle '95, 6/4-3*, S. Fuzessery presents compatibilisers and polymer modifiers for virgin and recycled thermoplastics. It is known to bind stabilisers to a polymer to obtain a better blend in the product to be stabilised and to prevent the stabiliser from migrating therefrom. This has been suggested, inter alia, by M. Minagawa in *Polymer Degradation and Stability 25 (1989), 121-141* or by H. Yamaguchi, M. Itoh, H. Ishikawa and K. Kusuda in *J.M.S.-Pure Appl. Chem., A30(4)*,

(1993), 287-292. In *Die Angewandte Makromolekulare Chemie* 158/159 (1988), 221-231, in *Advances in Polymer Science* 101, pages 65-167, Springer-Verlag Berlin Heidelberg, 1991 and in Jan Pospíšil, Peter P. Klemchuck, *Oxidation Inhibition in Organic Materials*, Vol. 1 (1989), 193-224, Jan Pospíšil presents a survey of "functionalised" polymers, i.e. polymers containing an effective antioxidant, antiozonant, metal deactivator, light stabiliser or bio-stabiliser group. EP-A 306 729 discloses antioxidants bound to polymers, said polymers being obtained by reacting an anhydride-functionalised polymer with a hydrazide-functionalised antioxidant or with a copolymer consisting of N-substituted imides of cyclic α,β -unsaturated dicarboxylic acid anhydrides (with antioxidant function) and ethylenic or vinylic aromatic monomers.


Stabilising plastic compositions against heat and light poses a special problem because, depending on the polarity of the components, a nonuniform distribution of the stabiliser compounds is obtained in the polyphase polymer system (stabiliser partitioning). This is described, inter alia, by D.M. Kulich, M.D. Wolkowicz and J.C. Wozny in *Makromol. Chem., Macromol. Symp.* 70/71, 407-418 (1993). The distribution equilibrium of the stabilisers is additionally influenced by the compatibilisers used which are moreover often the least stable component of the composition. Thermal or photooxidative damage of the compatibiliser then results in a very rapid breakdown of the entire composition because the compatibilising component is impaired.

Accordingly, it is desirable to provide compounds which improve the compatibility of the components in polymer blends as well as the mechanical properties and which also ensure protection against oxidative and photooxidative damage.

It has now been found that specific polymers with corresponding stabiliser side groups possess these properties.

Accordingly, this invention relates to a process for stabilising and at the same time phase compatibilising plastics or plastic compositions by incorporating polymeric compounds obtainable by reacting a compound selected from the group consisting of the sterically hindered phenols, sterically hindered amines, lactones, sulfide, phosphites, benzotriazoles, benzophenones and 2-(2-hydroxyphenyl)-1,3,5-triazines, which compounds contain at least one functional reactive group, with a compatibiliser.

Suitable sterically hindered phenols which contain at least one reactive group and which are reacted with the compatibiliser compound are compounds of formula I

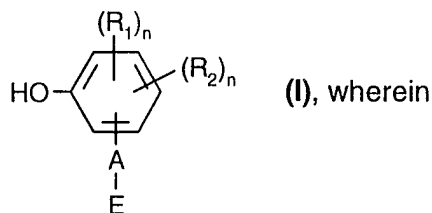

R₁ and **R₂** are each independently of the other hydrogen, C₁-C₂₅alkyl, phenyl-C₁-C₃alkyl which is unsubstituted or substituted once or several times at the aromatic ring by OH or/and C₁-C₄alkyl, unsubstituted or C₁-C₄alkyl-substituted C₅-C₁₂cycloalkyl, or phenyl;

n is 1, 2 or 3;

E is OH, SH, NHR₃, SO₃H, COOH, -CH=CH₂, $\text{---}(\text{CH}_2)_m\text{---}\text{CH}(\text{O})\text{---CH}_2$ or $\text{---}\text{P}(=\text{O})(\text{OH})\text{---R}_4$;

m is 0 or 1;

R₃ is hydrogen or C₁-C₉alkyl;

R₄ is C₁-C₁₂alkyl, or phenyl which is unsubstituted or substituted by one or several C₁-C₄-alkyl, halogen or/and C₁-C₁₈alkoxy;

A if E is OH, SH or -CH=CH₂, is -C_xH_{2x}-, -CH₂-S-CH₂CH₂-, -C_qH_{2q}-(CO)-O-C_pH_{2p}-, -C_qH_{2q}-(CO)-NH-C_pH_{2p}- or -C_qH_{2q}-(CO)-O-C_pH_{2p}-S-C_qH_{2q}- ;

x is a number from 0 to 8;

p is a number from 2 to 8;


q is a number from 0 to 3;

R₁ and **n** are as defined above; or

A if E is -NHR₃, is -C_xH_{2x}- or -C_qH_{2q}-(CO)-NH-C_pH_{2p}- , wherein x, p and q have the meanings cited above; or

A if E is COOH or SO₃H, is -C_xH_{2x}-, -CH₂-S-CH₂- or -CH₂-S-CH₂CH₂- , wherein x has the meaning cited above; or

A if E is $\text{---}(\text{CH}_2)_m\text{---}\text{CH}(\text{O})\text{---CH}_2$, is a direct bond, -C_qH_{2q}-(CO)_m-O-CH₂- or -C_xH_{2x}-S-CH₂- , wherein q, m, x, **R₁** and **R₂** are as defined above;



C₁-C₂₅alkyl is linear or branched and is typically C₁-C₂₀-, C₁-C₁₈-, C₁-C₁₂-, C₁-C₉-, C₁-C₆- or C₁-C₄alkyl. Typical examples are methyl, ethyl, propyl, isopropyl, n-butyl, sec-butyl, iso-butyl, tert-butyl, pentyl, 1,1-dimethylpropyl, hexyl, heptyl, 2,4,4-trimethyl-pentyl, 2-ethylhexyl, octyl, nonyl, decyl, undecyl, dodecyl, tetradecyl, pentadecyl, hexadecyl, heptadecyl, octadecyl, nonadecyl, icosyl, docosyl or pentacosyl.

C₁-C₉Alkyl and C₁-C₄alkyl have, for example, the meanings cited above up to the corresponding number of carbon atoms.

C₂-C₆Alkenyl radicals can be mono- or polyunsaturated and are typically allyl, methallyl, 1,1-dimethylallyl, 1-butenyl, 3-butenyl, 2-butenyl, 1,3-pentadienyl or 5-hexenyl. Allyl is preferred. R₃ defined as C₂-C₆alkenyl is, for example, C₂-C₄alkenyl.

C₁-C₄Alkoxy is a linear or branched radical and is methoxy, ethoxy, propoxy, isopropoxy, n-butyloxy, sec-butyloxy, iso-butyloxy or tert-butyloxy.

Phenyl-C₁-C₃alkyl is typically benzyl, phenylethyl, α-methylbenzyl or α,α-dimethyl-benzyl. Benzyl is preferred.

C₅-C₁₂Cycloalkyl is typically cyclopentyl, cyclohexyl, cyclooctyl, cyclododecyl, in particular cyclopentyl and cyclohexyl, preferably cyclohexyl. C₁-C₄Alkyl-substituted C₅-C₁₂cycloalkyl is typically 1-methylcyclohexyl.

Halogen is fluoro, chloro, bromo and iodo, in particular chloro and bromo, preferably chloro.

Mono- or polysubstituted phenyl is typically substituted one to five times, for example one, two or three times, preferably one or two times, at the phenyl ring.

Substituted phenyl is, for example, substituted by linear or branched C₁-C₄alkyl, such as methyl, ethyl, n-propyl, i-propyl, n-butyl, i-butyl, s-butyl or t-butyl, or by linear or branched C₁-C₄alkoxy, such as methoxy, ethoxy, n-propoxy, i-propoxy, n-butoxy, i-butoxy, s-butoxy or t-butoxy, or by halogen, such as fluoro, chloro, bromo or iodo.

Phenyl is preferably substituted by, in particular, methyl, t-butyl, methoxy, and chloro.

Suitable compounds are those of formula I, wherein R_1 and R_2 are C_1 - C_4 alkyl.

Other compounds to be mentioned are those of formula I, wherein R_1 and R_2 are in ortho-position to the phenolic OH group.



Particularly suitable compounds are those, wherein A is $-C_xH_{2x}-$, typically 6-tert-butyl-2,4-dimethyl-3-hydroxymethylphenol, 2,6-di-tert-butyl-4-(3-hydroxypropyl)phenol or 2,6-di-tert-butyl-4-(2,2-dimethyl-3-hydroxypropyl)phenol.

x is typically a number from 0 to 6, preferably from 0 to 4.



Those compounds of formula I also merit mention, wherein A is a group $-CH_2-S-CH_2-$ or $-CH_2-S-CH_2CH_2-$, typically 2,6-di-tert-butyl-4-(4-hydroxy-2-thiabut-1-yl)phenol or 6-tert-butyl-2,4-dimethyl-3-(4-hydroxy-2-thiabut-1-yl)phenol.


Other important compounds of formula I are those, wherein A is $-C_qH_{2q}-(CO)-O-C_pH_{2p}-$, p is

a number from 2 to 5, and q is 1 to 2, such as

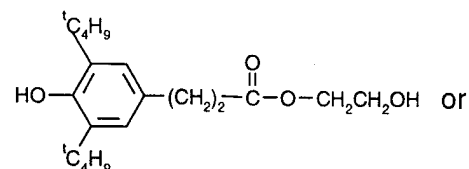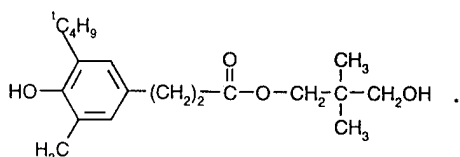Other suitable compounds are

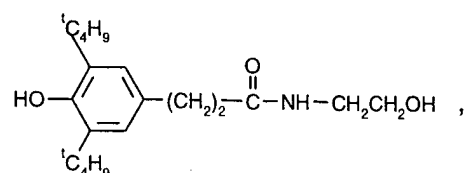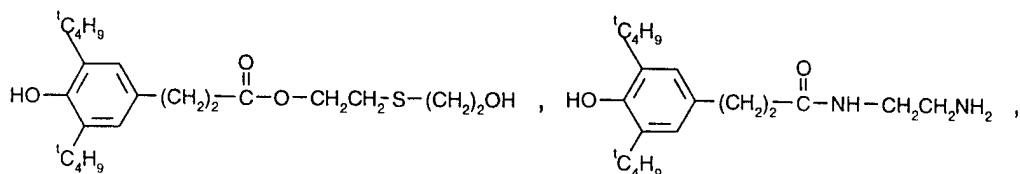


aminopropyl)phenol, 2,6-di-tert-butyl-4-(2,2-dimethyl-2-amino-ethyl)phenol or 2,4,6-trimethyl-3-aminomethylphenol.

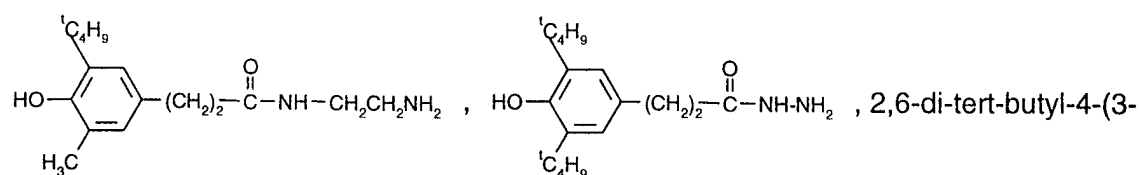
If E is COOH, x is preferably 2 or 3.

Preferred compounds are, for example, 2,6-di-tert-butyl-4-(2-carboxyethyl)phenol, 2-tert-butyl-6-methyl-4-(2-carboxyethyl)phenol and 2,6-di-tert-butyl-4-(3-carboxy-2-thioprop-1-yl)-phenol.


If E is $\begin{array}{c} \text{O} \\ \parallel \\ -\text{P}-\text{R}_4 \\ | \\ \text{OH} \end{array}$, R₄ is e.g. C₁-C₄alkyl, preferably methyl or ethyl, such as

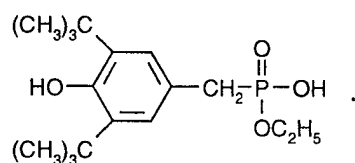

Particularly preferred examples of compounds of formula I with epoxy function are

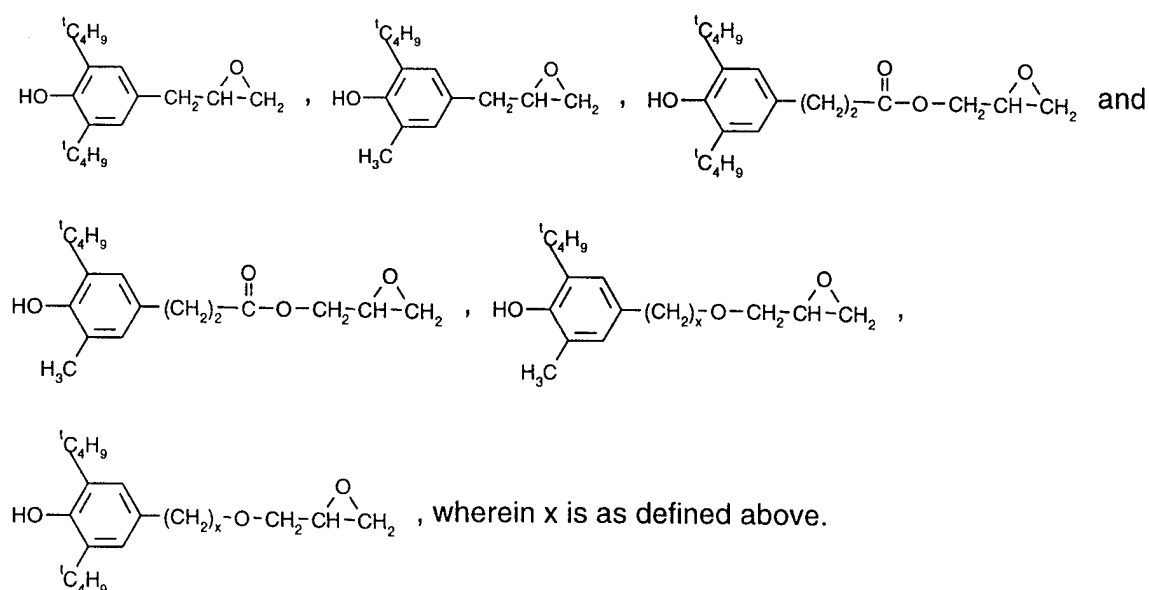


Particularly preferred examples of compounds of formula I with OH-, SH- or NHR₃ function are

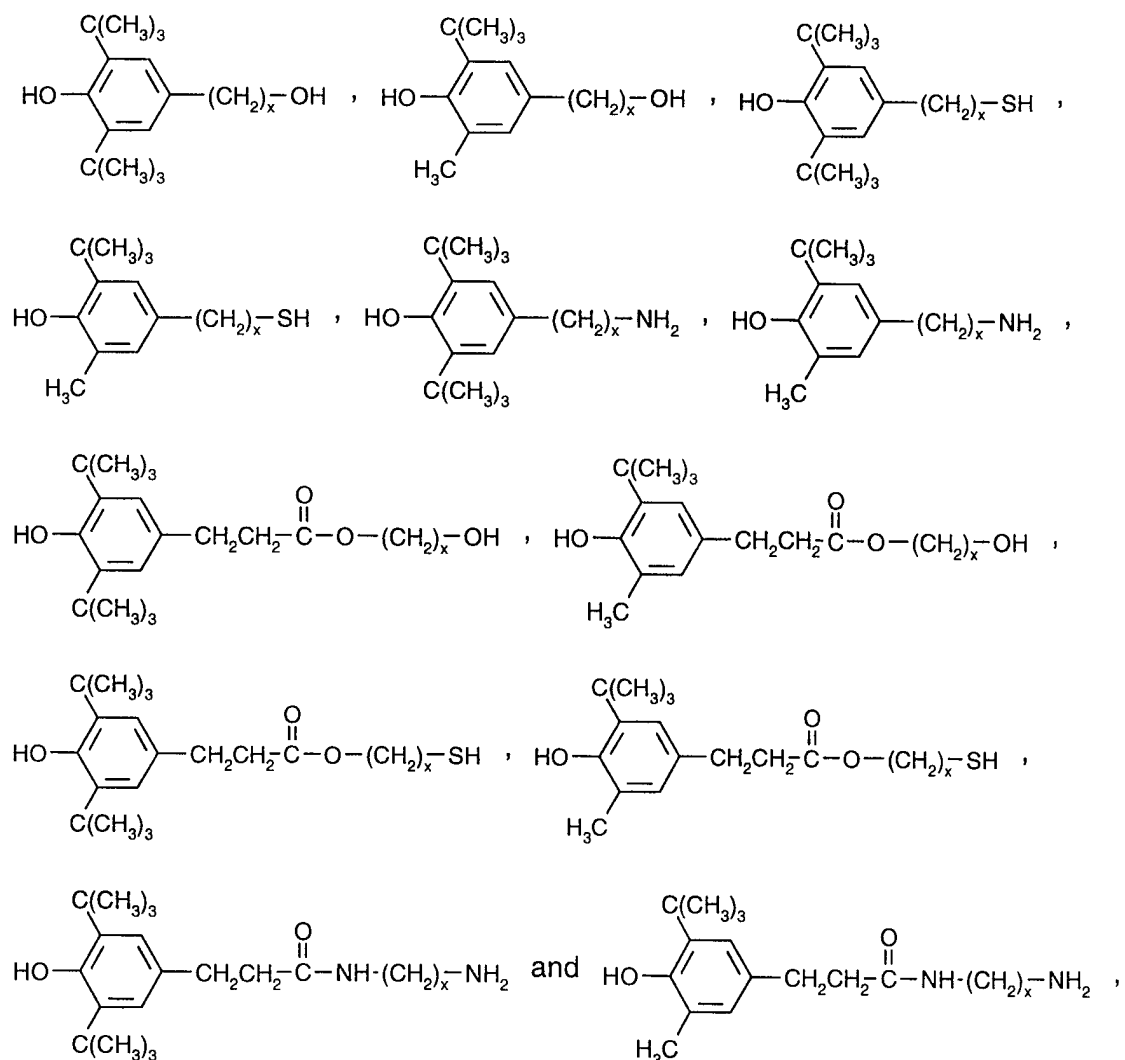

wherein x is a number from 1 to 8.

The preparation of sterically hindered phenols is known to the skilled person and is described, inter alia, in DE-A-42 13 750, DE-A-25 12 895, EP-A-463 835, US 5 189 088, DE-A-24 14 417, US 4 919 684, DE-A-42 42 916, DE-A-20 37 965 and in numerous other publications.

Suitable sterically hindered amines which contain at least one reactive group and which are reacted with the compatibiliser compound are the compounds of formula II, IIa or IIb

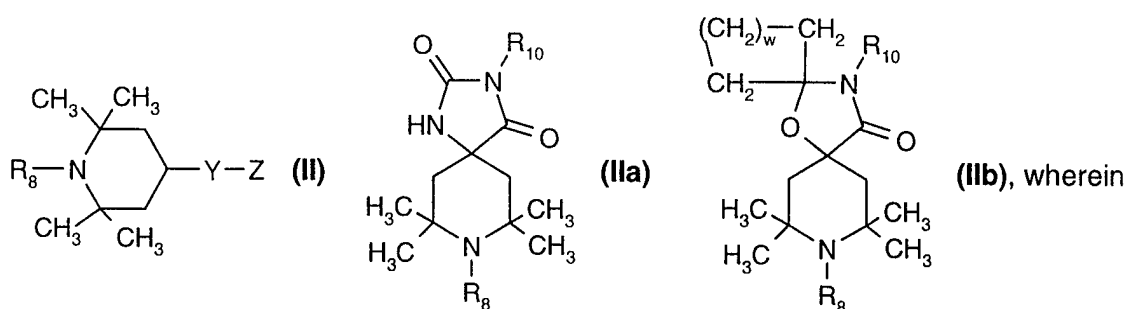

R₈ is hydrogen, C₁-C₂₅alkyl, C₂-C₂₀alkenyl, C₂-C₂₀alkynyl, C₁-C₂₀alkoxy, phenyl-C₁-C₃alkyl, C₅-C₁₂cycloalkyl, C₅-C₈cycloalkoxy, phenyl, naphthyl, hydroxyethyl, CO-C₁-C₂₅alkyl, CO-phenyl, CO-naphthyl, CO-phenyl-C₁-C₃alkyl, O-CO-C₁-C₂₀alkyl or C₁-C₆alkyl-S-C₁-C₆alkyl, C₁-C₆alkyl-O-C₁-C₆alkyl,

C₁-C₆alkyl-(CO)-C₁-C₆alkyl, $-\text{CH}_2\text{CH}_2-\text{O}-\text{CH}_2-\overset{\text{O}}{\underset{|}{\text{CH}}}-\text{CH}_2$ or $-\text{CH}_2-\overset{\text{O}}{\underset{|}{\text{CH}}}-\text{CH}_2$;

w is a number from 1 to 10;

Y is a single bond, C₁-C₂₅alkylene, phenylene, biphenylene, naphthylene,

$-\text{O}-\text{C}_1-\text{C}_{25}\text{alkylene}$, $-\text{NR}_9-$, $-\text{O}-$ or $\begin{array}{c} \text{R}_9-\text{C}=\text{O} \\ | \\ -\text{N}-\text{C}_1-\text{C}_{25}\text{alkylene} \end{array}$;

Z is hydrogen, $-\text{COOR}_9$, $-\text{NH}_2$, $-\text{OR}_9$, hydroxyethyl, $-\text{CH}_2-\overset{\text{O}}{\underset{|}{\text{CH}}}-\text{CH}_2$ or $-\overset{\text{O}}{\underset{||}{\text{C}}}-\overset{\text{R}_9}{\underset{|}{\text{C}}}=\text{CH}_2$;



R₉ is hydrogen or C₁-C₁₂alkyl;

R₁₀ has the same definition as R₈.




C₁-C₂₅Alkyl, phenyl-C₁-C₃alkyl and C₅-C₁₂cycloalkyl have, for example, the meanings given above for formula I. C₁-C₁₂Alkyl also has these meanings up to the corresponding number of carbon atoms.

C₁-C₂₅Alkylene is linear or branched, such as methylene, ethylene, propylene, isopropylene, n-butylene, sec-butylene, iso-butylene, tert-butylene, pentylene, hexylene, heptylene, octylene, nonylene, decylene, dodecylene, tetradecylene, heptadecylene or octadecylene. Y is in particular C₁-C₁₂alkylene, for example C₁-C₈alkylene, preferably C₁-C₄alkylene.

Particularly preferred examples of compounds of formula II with epoxy function are

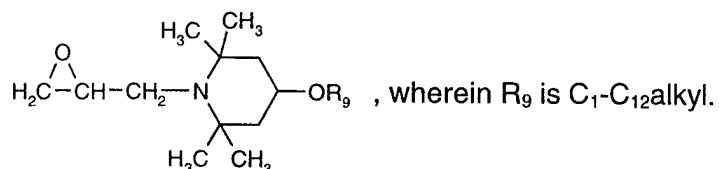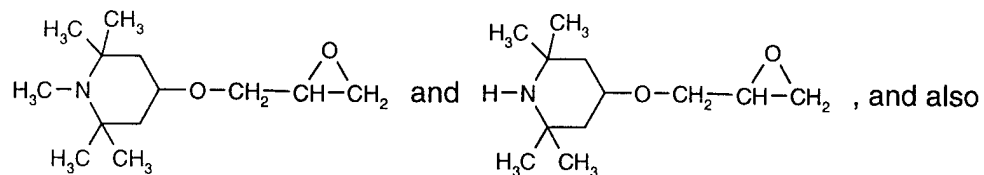


Particularly preferred examples of compounds of formula II with OH- or NH₂ function are

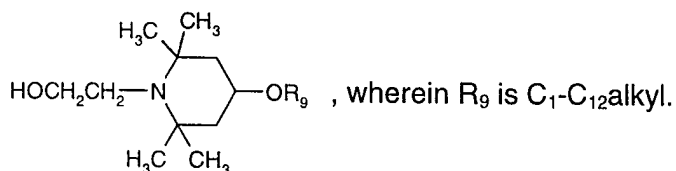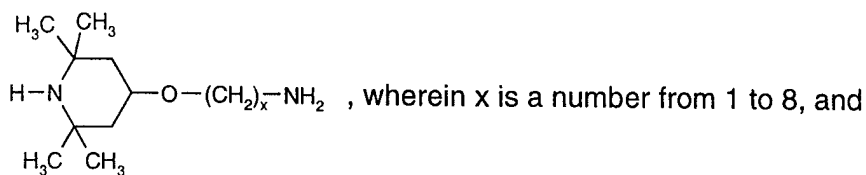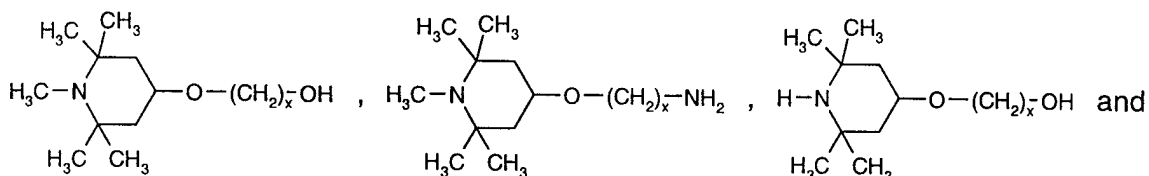

The skilled person is familiar with the preparation of suitable sterically hindered amine compounds, which is described, inter alia, in EP-A-634 450, EP-A-634 449, EP-A-434 608, EP-A-389 419, EP-A-0 634 399, EP-A-0 001 835 or by Luston and Vass, Makromolekulare Chemie, Macromol. Symp. 27, 231 (1989) and other publications.

Suitable lactones which contain at least one reactive group and which are reacted with the compatibiliser compound are compounds of formula III

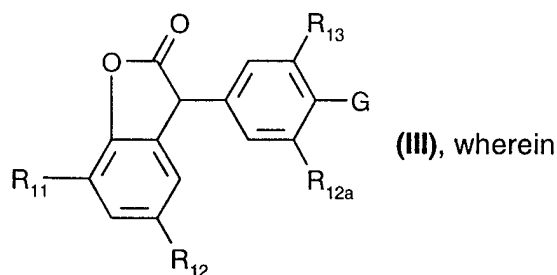

R_{11} , R_{12} , R_{12a} and R_{13} are each independently of one another hydrogen, C_1 - C_{25} alkyl, phenyl- C_1 - C_3 alkyl, C_5 - C_{12} cycloalkyl or phenyl; and

G is OH, $-O-CH_2-\overset{\text{O}}{\underset{\text{O}}{\text{CH}}}-CH_2-$, $-OCH_2CH_2OH$ or $-OCH_2COOH$.


The meanings of C_1 - C_{25} alkyl, C_1 - C_{12} alkyl, phenyl- C_1 - C_3 alkyl, C_5 - C_{12} -cycloalkyl and C_1 - C_{25} alkylene correspond to those given for formulae I, II and IIa.

Preferred compounds are those of formula III, wherein G is a radical OH.

Particularly suitable compounds of formula III are those, wherein R_{11} , R_{12} , R_{12a} and R_{13} are hydrogen, C_1 - C_{10} alkyl, phenyl- C_1 - C_3 alkyl or cyclohexyl.

R_{11} , R_{12} , R_{12a} and R_{13} are preferably C_1 - C_4 alkyl, in particular methyl and tert-butyl.


Preferred examples of compounds of formula III are, for example,

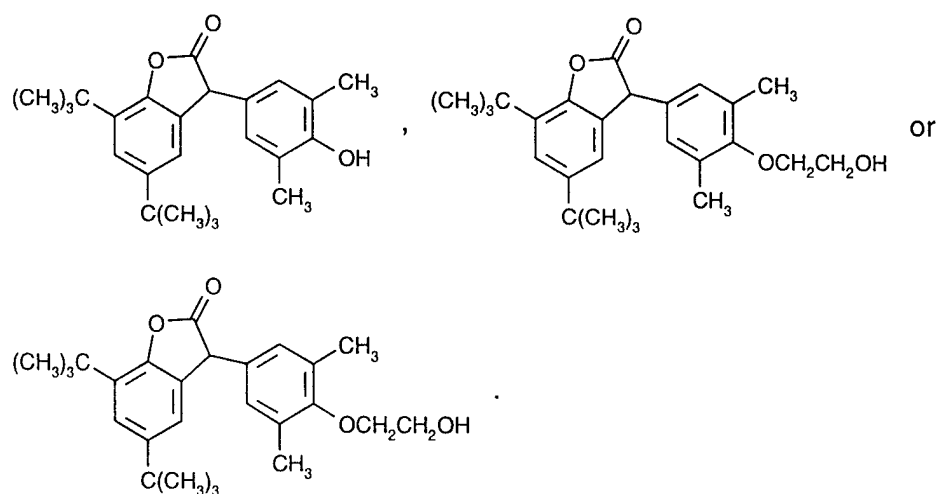

It is also possible to use mixtures of positional isomeric compounds.

The preparation of suitable lactones is known to the skilled person and is described, inter alia, in EP-A-591 102 and other publications.

Suitable sulfides which contain at least one reactive group and which are reacted with the compatibiliser compound are compounds of formula IV



R_{15} is C_1 - C_{18} alkyl, benzyl, phenyl or $\text{—}\overset{\text{S}}{\underset{\text{||}}{\text{P}}}\text{—}(\text{OR}_{17})_2$; and

R_{16} is $-\text{CH}_2\text{CH}_2\text{OH}$, $-\text{CH}_2-\overset{\text{O}}{\underset{\text{||}}{\text{CH}}}-\text{CH}_2$, $-\text{CH}_2\text{COOH}$ or $-\text{CH}_2\text{CH}_2\text{COOH}$; and


R_{17} is C_1 - C_{18} alkyl or unsubstituted or C_1 - C_4 alkyl-substituted phenyl.

The meanings of C_1 - C_{18} alkyl and of C_1 - C_4 alkyl-substituted phenyl are the same as those given above for formula I.

R_{15} is preferably C_8 - C_{12} alkyl, benzyl or phenyl, in particular C_8 - C_{12} alkyl. R_{16} is preferably


$-\text{CH}_2\text{CH}_2\text{OH}$ or $-\text{CH}_2-\overset{\text{O}}{\underset{\text{||}}{\text{CH}}}-\text{CH}_2$. Typical examples are $\text{C}_8\text{H}_{17}\text{—S—CH}_2-\overset{\text{O}}{\underset{\text{||}}{\text{CH}}}-\text{CH}_2$ or $\text{C}_{12}\text{H}_{25}\text{—S—CH}_2\text{CH}_2\text{OH}$.

Also suitable are compounds of formula IV, wherein R_{15} is $\text{—}\overset{\text{S}}{\underset{\text{||}}{\text{P}}}\text{—}(\text{OR}_{17})_2$, preferably



The preparation of suitable sulfides is known to the skilled person and is described, inter alia, in Abh. Akad. Wiss. DDR Abt. Math., Naturwiss., Tech. (1987), Vol. Oct. 1986 (IN), 511-5; EP-A-166 695, EP-A-413 562 and other publications.

Suitable phosphites which contain at least one reactive group and which are reacted with the compatibiliser compound are compounds of formula V




R_{16a} is $-\text{CH}_2\text{CH}_2\text{OH}$ or $-\text{CH}_2\text{CH}_2\text{COOH}$; and

R_{17a} is $\text{C}_1\text{-C}_{18}$ alkyl or unsubstituted or $\text{C}_1\text{-C}_4$ alkyl-substituted phenyl.





The meanings of $\text{C}_1\text{-C}_{18}$ alkyl and of $\text{C}_1\text{-C}_4$ alkyl-substituted phenyl are the same as those given above for formula I.

Particularly suitable phosphites are those of formula $(\text{C}_2\text{H}_5\text{O})_2-\overset{\overset{O}{\parallel}}{P}-\text{CH}_2\text{CH}_2\text{OH}$,




The skilled person is familiar with the preparation of suitable phosphites which is described, inter alia, in Khim.-Famy. Zh. (1988),22(2), 170-4 and other publications.

Suitable benzotriazoles, benzophenones and 2-(2-hydroxyphenyl)-1,3,5-triazines which contain at least one reactive group and which are reacted with the compatibiliser compound are compounds of formula VI, VIa, VIb or VIc

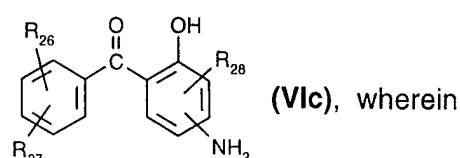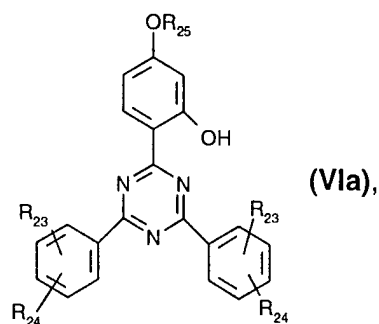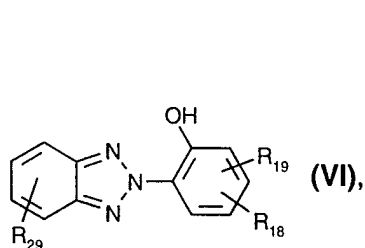

R_{18} is $-(\text{CH}_2)_t\text{-R}_{20}$, $-\text{O}-\text{CH}_2-\text{CH}(\text{O})-\text{CH}_2$ or NH_2 ;

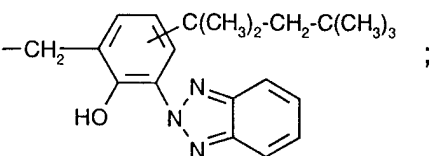R₁₉ is C₁-C₁₂alkyl, α,α-dimethylbenzyl or a radical  ;

R₂₀ is -OH, -SH, -NHR₃₀, -SO₃H, -COOR₂₁, -CH=CH₂, $-(CH_2)_m-\overset{\text{O}}{\text{CH}}-\text{CH}_2$ or $-(CO)-NH-(CH_2)_u-NCO$;

R₂₁ is hydrogen, $-\text{CH}_2-\overset{\text{O}}{\text{CH}}-\text{CH}_2$ or $-\text{CH}_2-\text{CH}(\text{OH})-\text{CH}_2-\text{O}-(CO)-R_{22}$;


R₂₂ is C₁-C₄alkyl or phenyl;

R₂₃ and **R₂₄** are each independently of the other hydrogen or C₁-C₄alkyl;

R₂₅ is hydrogen, $-(CH_2)_u-OH$, $-\text{CH}_2-\overset{\text{O}}{\text{CH}}-\text{CH}_2$, $-(CH_2)_uCOOH$ or $-(CO)-NH-(CH_2)_u-NCO$;

R₂₆ is hydrogen, OH or C₁-C₁₂alkoxy;

R₂₇ is hydrogen or OH;

R₂₈ is hydrogen or  ;

R₂₉ is hydrogen or halogen;

R₃₀ is hydrogen or C₁-C₉alkyl;


m is 0 or 1;

t is a number from 0 to 6;


u is a number from 2 to 12.

C₁-C₄Alkyl is typically linear or branched and is methyl, ethyl, propyl, isopropyl, n-butyl, sec-butyl, iso-butyl or tert-butyl. Methyl is preferred.

Particularly suitable compounds are, for example, hydroxy-substituted benzophenones such

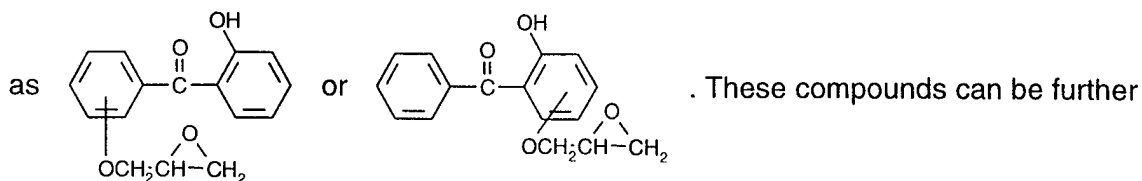


substituted at the aromatic rings, for example with additional hydroxyl groups or alkoxy.



epoxy-functionalised radical, the hydroxyphenyl group can also contain alkyl substituents.

Particularly suitable triazine compounds are, for example, those of formula

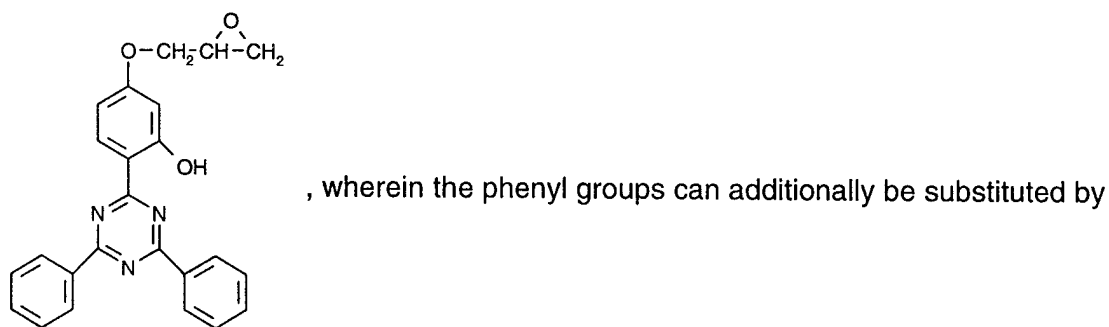


methyl.

The preparation of suitable benzotriazoles is known to the skilled person and is described, inter alia, in EP-A-693 483; Polymer (1995), 36(17), 3401-8 and other publications.

The preparation of suitable 2-(2-hydroxyphenyl)-1,3,5-triazines is known to the skilled person and is described, inter alia, in EP-A-434 608; CA-A-2062217 and other publications.

The preparation of suitable benzophenones is known to the skilled person and is described, inter alia, in EP-A-693 483; EP-A-538 839; Zh. Prikl. Khim. (Leningrad) (1976), 49(5), 1129-34; JP-A- Hei 3 31235 (=Chemical Abstract No. 115:49102) and other publications.

This invention also relates to compounds which are obtainable by reacting sterically hindered phenols of formula I

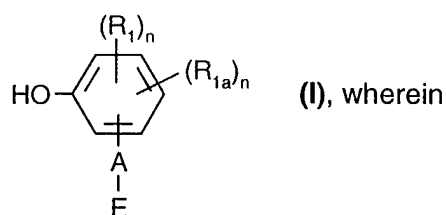

R₁ and **R₂** are each independently of the other hydrogen, C₁-C₂₅alkyl, phenyl-C₁-C₃alkyl which is unsubstituted or substituted once or several times at the aromatic ring by OH or/and C₁-C₄alkyl, unsubstituted or C₁-C₄alkyl-substituted C₅-C₁₂cycloalkyl, or phenyl;
n is 1, 2 or 3;

E is OH, SH, NHR₃, SO₃H, COOH, -CH=CH₂, $\text{---}(\text{CH}_2)_m\text{---}\overset{\text{O}}{\text{CH}}\text{---CH}_2$ or $\text{---}\overset{\text{O}}{\underset{\text{OH}}{\text{P}}}\text{---R}_4$;

m is 0 or 1;

R₃ is hydrogen or C₁-C₉alkyl;

R₄ is C₁-C₁₂alkyl, phenyl which is unsubstituted or substituted by one or several C₁-C₄alkyl, halogen or/and C₁-C₁₈alkoxy;

A if E is OH, SH or -CH=CH₂, is -C_xH_{2x}-, -CH₂-S-CH₂CH₂-,
 -C_qH_{2q}-(CO)-O-C_pH_{2p}-, -C_qH_{2q}-(CO)-NH-C_pH_{2p}- or -C_qH_{2q}-(CO)-O-C_pH_{2p}-S-C_qH_{2q}- ;

x is a number from 0 to 8;

p is a number from 2 to 8;

q is a number from 0 to 3;

R₁ and **n** are as defined above; or




A if E is -NHR₃, is -C_xH_{2x}- or -C_qH_{2q}-(CO)-NH-C_pH_{2p}- , wherein x, p and q have the meanings cited above; or

A if E is COOH or SO₃H, is -C_xH_{2x}-, -CH₂-S-CH₂- or -CH₂-S-CH₂CH₂- , wherein x has the meaning cited above; or

A if E is $\text{---}(\text{CH}_2)_m\text{---}\overset{\text{O}}{\text{CH}}\text{---CH}_2$, is a direct bond, -C_qH_{2q}-(CO)-O-CH₂- or
 -C_xH_{2x}-S-CH₂-, wherein q, m, x, **R₁** and **R₂** are as defined above;

A if E is $\text{---}\overset{\text{O}}{\underset{\text{OH}}{\text{P}}}\text{---R}_4$, is -CH₂- ;

or sterically hindered amines of formula II, IIa or IIb

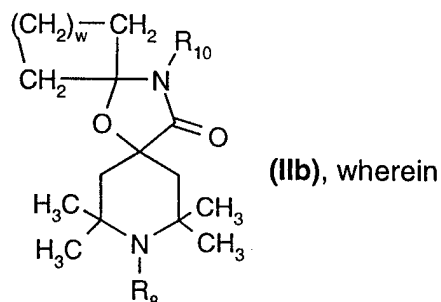

R₈ is hydrogen, C₁-C₂₅alkyl, C₂-C₂₀alkenyl, C₂-C₂₀alkynyl, C₁-C₂₀alkoxy, phenyl-C₁-C₃alkyl, C₅-C₁₂cycloalkyl, C₅-C₈cycloalkoxy, phenyl, naphthyl, hydroxyethyl, CO-C₁-C₂₅alkyl, CO-phenyl, CO-naphthyl, CO-phenyl-C₁-C₃alkyl, O-CO-C₁-C₂₀alkyl or C₁-C₆alkyl-S-C₁-C₆alkyl, C₁-C₆alkyl-O-C₁-C₆alkyl,

$$\text{C}_1\text{-C}_6\text{alkyl}-(\text{CO})-\text{C}_1\text{-C}_6\text{alkyl}, -\text{CH}_2\text{CH}_2-\text{O}-\text{CH}_2-\overset{\text{O}}{\text{CH}}-\text{CH}_2 \text{ or } -\text{CH}_2-\overset{\text{O}}{\text{CH}}-\text{CH}_2;$$

w is a number from 1 to 10;


Y is a single bond, C₁-C₂₅alkylene, phenylene, biphenylene, naphthylene,

$$-O-C_1-C_{25}\text{alkylene}, -NR_9-, -O- \text{ or } \begin{array}{c} R_9-C=O \\ | \\ -N-C_1-C_{25}\text{alkylene} \end{array};$$

Z is hydrogen, $-\text{COOR}_9$, $-\text{NH}_2$, $-\text{OR}_9$, hydroxyethyl, $-\text{CH}_2-\text{CH}(\text{O})-\text{CH}_2$ or $-\text{C}(=\text{O})-\text{C}(\text{R}_9)=\text{CH}_2$;

R₉ is hydrogen or C₁-C₁₂alkyl;


R₁₀ has the same definition as R₈:

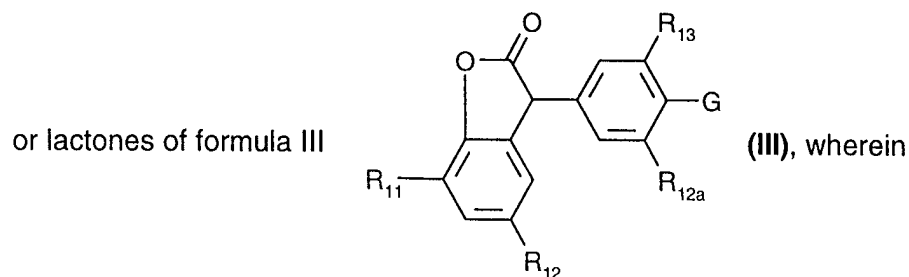

R₁₁, R₁₂, R_{12a} and R₁₃ are each independently of one another hydrogen, C₁-C₂₅alkyl, phenyl-C₁-C₃alkyl, C₅-C₁₂cycloalkyl or phenyl; and

G is OH, OCH₂CH₂OH, $-\text{CH}_2-\overset{\text{O}}{\underset{\text{O}}{\text{CH}}}-\text{CH}_2$ or -OCH₂COOH;

or sulfides of formula IV



R₁₅ is C₁-C₁₈alkyl, benzyl, phenyl or $-\overset{\text{S}}{\underset{\text{O}}{\text{P}}}-(\text{OR}_{17})_2$; and

R₁₆ is -CH₂CH₂OH, $-\text{CH}_2-\overset{\text{O}}{\underset{\text{O}}{\text{CH}}}-\text{CH}_2$, -CH₂COOH or -CH₂CH₂COOH; and





R₁₇ is C₁-C₁₈alkyl or unsubstituted or C₁-C₄alkyl-substituted phenyl;

or phosphites of formula V $\text{R}_{16a}-\overset{\text{O}}{\underset{\text{O}}{\text{P}}}-\text{OR}_{17a}$ (V), wherein

R_{16a} is -CH₂CH₂OH or -CH₂CH₂COOH; and


R_{17a} is C₁-C₁₈alkyl or unsubstituted or C₁-C₄alkyl-substituted phenyl;

or benzotriazoles, benzophenones or 2,4,6-triaryl-1,3,5-triazines of formula VI, VIa, VIb or VIc

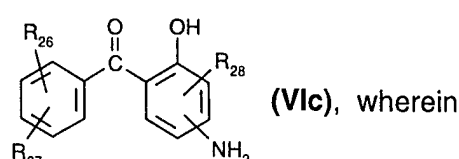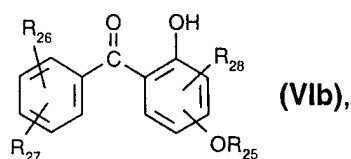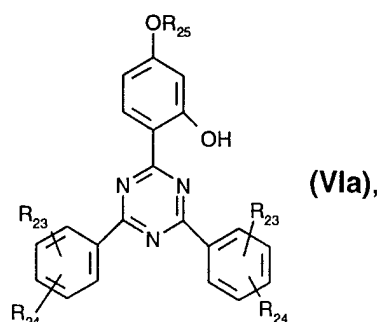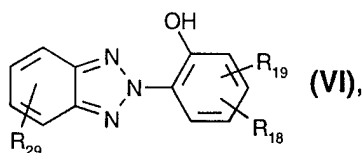

R₁₈ is -(CH₂)₁-R₂₀, $-\text{O}-\text{CH}_2-\overset{\text{O}}{\underset{\text{O}}{\text{CH}}}-\text{CH}_2$ or NH₂;

R₁₉ is C₁-C₁₂alkyl, α,α-dimethylbenzyl or a radical

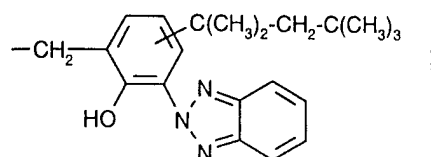

R_{20} is $-OH$, $-SH$, $-NHR_{30}$, $-SO_3H$, $-COOR_{21}$, $-CH=CH_2$, $-(CH_2)_m-\overset{\text{O}}{\text{CH}}-\text{CH}_2$ or $-(CO)-NH-(CH_2)_u-NCO$;

R_{21} is hydrogen, $-\text{CH}_2-\overset{\text{O}}{\text{CH}}-\text{CH}_2$ or $-\text{CH}_2-\text{CH}(\text{OH})-\text{CH}_2-\text{O}-(CO)-R_{22}$;


R_{22} is C_1 - C_4 alkyl or phenyl;

R_{23} and R_{24} are each independently of the other hydrogen or C_1 - C_4 alkyl;

R_{25} is hydrogen, $-(CH_2)_u-OH$, $-\text{CH}_2-\overset{\text{O}}{\text{CH}}-\text{CH}_2$, $-(CH_2)_uCOOH$ or $-(CO)-NH-(CH_2)_u-NCO$;

R_{26} is hydrogen, OH or C_1 - C_{12} alkoxy;

R_{27} is hydrogen or OH ;

R_{28} is hydrogen or $-\text{CH}_2-$  ;

R_{29} is hydrogen or halogen;

R_{30} is hydrogen or C_1 - C_9 alkyl;

m is 0 or 1;

t is a number from 0 to 6;

u is a number from 2 to 12;

with a compatibiliser compound.

To prepare the novel compounds, compatibilisers with specific reactive groups are suitable. These compatibilisers are polymers containing acid groups, acid anhydride groups, ester groups, epoxy groups or alcohol groups. Copolymers or terpolymers of polyethylene, polypropylene, vinyl acetate or styrene with acrylates are also suitable.

Typical examples are polymers with acrylic acid (AA) function, glycidyl methacrylate (GMA) function, methacrylic acid (MAA) function, maleic anhydride (MAH) function or vinyl alcohol (VA) function.

Preferred compatibilisers are, for example, copolymers consisting of polyethylene acrylic acid (PE-AA), polyethylene glycidyl methacrylate (PE-GMA), polyethylene methacrylic acid

(PE-MAA), polyethylene maleic anhydride (PE-MAH) or terpolymer of polyethylene and vinyl acetate with acrylates (e.g. PE-AA-acrylate).

Also suitable as compatibilisers are grafted polyethylene or polypropylene copolymers selected from the group consisting of maleic anhydride grafted to polyethylene vinyl acetate (MAH-g-PE-vinyl acetate), maleic anhydride grafted to low density polyethylene (MAH-g-LDPE), maleic anhydride grafted to high density polyethylene (MAH-g-HDPE), maleic anhydride grafted to linear low density polyethylene (MAH-g-LLDPE), acrylic acid grafted to polypropylene (AA-g-PP), glycidyl methacrylate grafted to polypropylene (GMA-g-PP), maleic anhydride grafted to polypropylene (MAH-g-PP), maleic anhydride grafted to ethylene/propylene terpolymer (MAH-g-EPDM), maleic anhydride grafted to ethylene/propylene rubber (MAH-g-EPM) and maleic anhydride grafted to polyethylene/polypropylene copolymer (MAH-g-PE/PP).

Other suitable compatibiliser components are grafted styrene co- or terpolymers selected from the group consisting of styrene/acrylonitrile grafted with maleic anhydride (SAN-g-MAH), styrene/maleic anhydride/methyl methacrylate, styrene/butadiene/styrene block copolymer grafted with maleic anhydride (SBS-g-MAH), styrene/ethylene/propylene/styrene block copolymer grafted with maleic anhydride (SEPS-g-MAH), styrene/ethylene/butadiene/styrene block copolymer grafted with maleic anhydride (SEPS-g-MAH) and acrylic acid/polyethylene/polystyrene terpolymer (AA-PE-PS-terpolymer).

Important compatibilisers are those containing anhydride units. Illustrative examples of suitable anhydrides are itaconic acid anhydride, citraconic acid anhydride, bicyclo[2.2.2]-5-octene-2,3-dicarboxylic acid anhydride, bicyclo[2.2.1]-5-heptene-2,3-dicarboxylic acid anhydride or maleic anhydride. Maleic anhydride is preferred.

Particularly suitable as compatibilisers are copolymers or terpolymers having one anhydride. Typical examples are ethylene/vinyl acetate/maleic anhydride terpolymers, ethylene/ethylacrylate/maleic anhydride terpolymers, ethylene/acrylic acid/ maleic anhydride terpolymers, styrene/maleic anhydride copolymer or styrene/maleic anhydride/methyl methacrylate terpolymer.

Such polymers and their preparation are known and are described, inter alia, by P.J. Flory in Principles of Polymer Chemistry, 1964, Cornell University Press, Ithaca, NY, as well as in Compatibilizers and polymer modifiers for virgin and recycled thermoplastics including

multipolymer and multilayer materials, Maack Business Services, Study MBS No. 10, September 1990, Zürich.

Also preferred as compatibiliser component are copolymers or terpolymers containing a grafted anhydride, such as maleic anhydride grafted to polypropylene, maleic anhydride grafted to polyethylene, maleic anhydride grafted to ethylene/vinylacetate copolymer, styrene/ethylene/propylene/styrene block copolymer (SEPS), styrene/ethylene/butylene/styrene block copolymer (SEBS), maleic anhydride grafted to ethylene/propylene terpolymer (EPDM), maleic anhydride grafted to ethylene/propylene copolymer.

Such graft polymers and their preparation are known and are described, inter alia, in H.-G. Elias, Makromoleküle 1981, Hüthig & Wepf Verlag Heidelberg; or in Compatibilizers and polymer modifiers for virgin and recycled thermoplastics including multipolymer and multilayer materials, Maack Business Services, Study MBS No. 10, September 1990, Zürich; as well as in M. Xanthos, Reactive Extrusion, 1992, Oxford University Press, NY.

The maleic anhydride content is typically from 0.05-15%, preferably from 0.1-10%.

Also suitable as compatibiliser component are copolymers or terpolymers containing unsaturated carboxylic acid, typically acrylic acid, methacrylic acid, crotonic acid, fumaric acid, vinyl acetic acid, maleic acid, itaconic acid. Acrylic acid, methacrylic acid, fumaric acid and maleic acid are preferred, and acrylic acid and methacrylic acid are particularly preferred. Illustrative examples of such copolymers or terpolymers are ethylene/acrylic acid copolymer, propylene/acrylic acid copolymer or ethylene/propylene/acrylic acid terpolymer. Such polymers and their preparation are described, inter alia, in Compatibilizers and polymer modifiers for virgin and recycled thermoplastics including multipolymer and multilayer materials, Maack Business Services, Study MBS No. 10, September 1990, Zürich.

The acrylic acid content is typically from 0.1-30%, preferably from 0.1-25%.

The preparation of the polymeric, copolymeric and terpolymeric compatibilisers is carried out by conventional polymerisation processes with which the skilled person is familiar.

The preparation of carboxyl group-containing polymers has been published, for example, by N.G. Gaylord in "Reactive Extrusion; Principles and Practice", Polymer Processing Institute,

page 56 et seq., Hanser Verlag, München, Wien, New York (1992). In the same work, p. 116 et seq., S. Brown describes the preparation of other carboxylated compatibilisers.

The reaction of the compatibiliser compound with a compound selected from the group consisting of the sterically hindered phenols, sterically hindered amines, lactones, sulfides, phosphites, benzotriazoles, benzophenones and 2-(2-hydroxyphenyl)-1,3,5-triazines, containing at least one functional reactive group, is carried out as a grafting reaction or polymer- analogous reaction.

The reactions can be carried out in solution or in the melt, depending on the reactants. Different reactors may be used in this case, for example tanks, extruders, mixers and the like. Extrusion is preferred.

The reactive extrusion has been described, inter alia, by M. Xanthos in Reactive Extrusion, Principle and Practice, Polymer Processing Institute, Hanser Verlag, München 1992.

The reactants can be fed into the extruder premixed or separate, i.e. via separate feeding devices, and can be reacted in the extruder. Liquid components or low-melting components may also be fed into the extruder via feeding pumps (side channel proportioning). It may also be useful to degas the melt in the extruder, in particular when low molecular products are obtained in the reaction which are then preferably removed. To this purpose the extruder needs to be equipped with a corresponding degassing device. The preparation can be carried out on commercially available single- or twin-screw extruders. Twin-screw extruders are preferred. Compounding is carried out by the customary techniques, for example granulating. It is also possible to prepare and use a masterbatch (concentrate) from this compatibiliser/stabiliser by the methods known in the art.

The ratio of the compatibiliser component to the stabiliser component in the polymer-analogous reactions is, of course, limited by the number of reactive groups present on the compatibiliser component. A suitable compatibiliser/stabiliser weight ratio is 100:0.05 to 100:50, in particular 100:0.1 to 100:25, preferably 100:1 to 100:20.

The novel compatibiliser/stabiliser compounds can be used, for example, for stabilising the following polymers and, in particular, mixtures of such polymers.

1. Polymers of monoolefins and diolefins, for example polypropylene, polyisobutylene, polybut-1-ene, poly-4-methylpent-1-ene, polyisoprene or polybutadiene, as well as polymers of cycloolefins, for instance of cyclopentene or norbornene, polyethylene (which optionally can be crosslinked), for example high density polyethylene (HDPE), low density polyethylene (LDPE), linear low density polyethylene (LLDPE), low density branched polyethylene (VLDPE).
2. Mixtures of the polymers mentioned under 1), for example mixtures of polypropylene with polyisobutylene, polypropylene with polyethylene (for example PP/HDPE, PP/LDPE, PP/HDPE/LDPE, PP/HDPE/LLDPE/LDPE) and mixtures of different types of polyethylene (for example LDPE/HDPE, LLDPE/LDPE, HDPE/LLDPE/LDPE).
3. Copolymers of monoolefins and diolefins with each other or with other vinyl monomers, for example ethylene/propylene copolymers, linear low density polyethylene (LLDPE) and mixtures thereof with low density polyethylene (LDPE), propylene/but-1-ene copolymers, propylene/isobutylene copolymers, ethylene/but-1-ene copolymers, ethylene/hexene copolymers, ethylene/methylpentene copolymers, ethylene/heptene copolymers, ethylene/octene copolymers, propylene/butadiene copolymers, isobutylene/isoprene copolymers, ethylene/alkyl acrylate copolymers, ethylene/alkyl methacrylate copolymers, ethylene/vinyl acetate copolymers and their copolymers with carbon monoxide or ethylene/acrylic acid copolymers and their salts (ionomers) as well as terpolymers of ethylene with propylene and a diene such as hexadiene, dicyclopentadiene or ethylidene-norbornene; and mixtures of such copolymers with one another and with polymers mentioned in 1) above, for example polypropylene/ethylene-propylene copolymers, LDPE/ethylene-vinyl acetate copolymers, LDPE/ethylene-acrylic acid copolymers, LLDPE/ethylene-vinyl acetate copolymers, LLDPE/ethylene-acrylic acid copolymers and alternating or random polyalkylene/carbon monoxide copolymers and mixtures thereof with other polymers, for example polyamides.
4. Polystyrene, poly(p-methylstyrene), poly(α -methylstyrene).
5. Copolymers of styrene or α -methylstyrene with dienes or acrylic derivatives, for example styrene/butadiene, styrene/acrylonitrile, styrene/alkyl methacrylate, styrene/butadiene/alkyl acrylate, styrene/butadiene/alkyl methacrylate, styrene/maleic anhydride, styrene/acrylonitrile/methyl acrylate; mixtures of high impact strength of styrene copolymers and another polymer, for example a polyacrylate, a diene polymer or an ethylene/propylene/diene terpo-

lymer; and block copolymers of styrene such as styrene/butadiene/styrene, styrene/isoprene/styrene, styrene/ethylene/butylene/styrene or styrene/ethylene/propylene/styrene.

6. Graft copolymers of styrene or α -methylstyrene, for example styrene on polybutadiene, styrene on polybutadiene-styrene or polybutadiene-acrylonitrile copolymers; styrene and acrylonitrile (or methacrylonitrile) on polybutadiene; styrene, acrylonitrile and methyl methacrylate on polybutadiene; styrene and maleic anhydride on polybutadiene; styrene, acrylonitrile and maleic anhydride or maleimide on polybutadiene; styrene and maleimide on polybutadiene; styrene and alkyl acrylates or methacrylates on polybutadiene; styrene and acrylonitrile on ethylene/propylene/diene terpolymers; styrene and acrylonitrile on polyalkyl acrylates or polyalkyl methacrylates, styrene and acrylonitrile on acrylate/butadiene copolymers, as well as mixtures thereof with the copolymers listed under 5), for example the copolymer mixtures known as ABS, MBS, ASA or AES polymers.
7. Halogen-containing polymers such as polychloroprene, chlorinated rubber, chlorinated or chlorosulfonated polyethylene, copolymers of ethylene and chlorinated ethylene, epichlorohydrin homo- and copolymers, especially polymers of halogen-containing vinyl compounds, for example polyvinyl chloride, polyvinylidene chloride, polyvinyl fluoride, polyvinylidene fluoride, as well as copolymers thereof such as vinyl chloride/vinylidene chloride, vinyl chloride/vinyl acetate or vinylidene chloride/vinyl acetate.
8. Polymers derived from α,β -unsaturated acids and derivatives thereof such as polyacrylates and polymethacrylates; polymethyl methacrylates, polyacrylamides and polyacrylonitriles, impact-modified with butyl acrylate.
9. Copolymers of the monomers mentioned under 8) with each other or with other unsaturated monomers, for example acrylonitrile/butadiene copolymers, acrylonitrile/alkyl acrylate copolymers, acrylonitrile/alkoxyalkyl acrylate or acrylonitrile/vinyl halide copolymers or acrylonitrile/alkyl methacrylate/butadiene terpolymers.
10. Polymers derived from unsaturated alcohols and amines or the acyl derivatives or acetals thereof, for example polyvinyl alcohol, polyvinyl acetate, polyvinyl stearate, polyvinyl benzoate, polyvinyl maleate, polyvinyl butyral, polyallyl phthalate or polyallyl melamine; as well as their copolymers with olefins mentioned in 1) above.

11. Polyamides and copolyamides derived from diamines and dicarboxylic acids and/or from aminocarboxylic acids or the corresponding lactams, for example polyamide 4, polyamide 6, polyamide 6/6, 6/10, 6/9, 6/12, 4/6, 12/12, polyamide 11, polyamide 12, aromatic polyamides starting from m-xylene diamine and adipic acid; polyamides prepared from hexamethylenediamine and isophthalic or/and terephthalic acid and with or without an elastomer as modifier, for example poly-2,4,4'-trimethylhexamethylene terephthalamide or poly-m-phenylene isophthalamide; and also block copolymers of the aforementioned polyamides with polyolefins, olefin copolymers, ionomers or chemically bonded or grafted elastomers; or with polyethers, e.g. with polyethylene glycol, polypropylene glycol or polytetramethylene glycol; as well as polyamides or copolyamides modified with EPDM or ABS; and polyamides condensed during processing (RIM polyamide systems).

12. Polyesters derived from dicarboxylic acids and diols and/or from hydroxycarboxylic acids or the corresponding lactones, for example polyethylene terephthalate, polybutylene terephthalate, poly-1,4-dimethylolcyclohexane terephthalate and polyhydroxybenzoates, as well as block copolyether esters derived from hydroxyl-terminated polyethers; and also polyesters modified with polycarbonates or MBS.

13. Polycarbonates and polyester carbonates.

14. Blends of the aforementioned polymers (polyblends), for example PP/EPDM, polyamide/EPDM or ABS, PVC/EVA, PVC/ABS, PVC/MBS, PC/ABS, PBTP/ABS, PC/ASA, PC/PBT, PVC/CPE, PVC/acrylates, POM/thermoplastic PUR, PC/thermoplastic PUR, POM/acrylate, POM/MBS, PPO/HIPS, PPO/PA 6.6 and copolymers, PA/HDPE, PA/PP, PA/PPO, PA/LDPE, PE/PET, PS/PE, PS/PP, PS/PE/PP, PE/PP/PET/PS.

The novel compatibiliser/stabiliser compounds are added to the polymer to be stabilised in amounts of 0.5-30%, e.g. of 1-20%, preferably of 2-15% (based on the amount of polymer to be stabilised).

The amounts depend on the one hand on the number of active stabiliser groups in the compounds and, on the other hand, on the requirements of the polymers or polymer blends to be stabilised.

The novel compatibiliser/stabiliser compounds are also used for phase compatibilisation in plastic compositions where they act at the same time as stabilisers. These plastic compositions can be virgin plastic compositions (as described above) or also recyclates.

The novel compatibiliser/stabiliser compounds can, in principle, be used in all incompatible plastic compositions, virgin materials or recyclates or in blends of virgin material and recyclates. The plastic compositions can consist of two or more components. The novel compounds are preferably added to mixtures of polar and nonpolar plastics.

The nonpolar components of plastic compositions are, for example, polyolefins, typically polyethylene (PE) and polypropylene (PP). To be mentioned in particular are low density polyethylene (LDPE), low density linear polyethylene (LLDPE) and high density polyethylene (HDPE), and also copolymers, such as ethylene/propylene (EPM) and ethylene/propylene/ diene copolymers (EPDM) as well as ULDPE and MDPE. Such nonpolar plastics also include polystyrene (PS, EPS) and copolymers having a styrene component (e.g. ABS, ASA, HIPS, IPS) and polyvinyl chloride (PVC), as well as copolymers with a predominant vinyl chloride component (e.g. CPE)

The polar components are, for example, polyesters, such as polyethylene terephthalate (PET) or polybutylene terephthalate (PBT), polyamides or polycarbonates.

Mixtures of polyethylene and polypropylene or of polyethylene and polyamide are particularly preferred.

The novel compatibiliser/stabiliser compounds can be used, for example, in recycled plastic compositions comprising 25-100 % by weight, preferably 35-95 % by weight, e.g. 40-85 % by weight, of polyolefins, 0-25 % by weight of polystyrene, 0-25 % by weight of polyvinyl chloride and 0-25 % by weight of other thermoplastics. Non-thermoplastic materials may also be obtained in minor amounts in the mixture.

Of the polyolefins, polyethylene (PE), in particular low density polyethylene, usually dominates. Polystyrene (PS) is also understood to be copolymers having a predominant styrene component (e.g. ABS, HIPS), and polyvinyl chloride (PVC) is also understood to be copolymers having a predominant vinyl chloride component (e.g. CPE). Other thermoplastics present in the used material are, in particular, polyethylene terephthalate (PET), and also polyamides, polycarbonate, cellulose acetate and polyvinylidene chloride. Non-

thermoplastic materials can be present in minor amounts of up to 5%, typically polyurethanes, formaldehyde resins and phenolic resins or also typical aminoplastics, as well as elastomers such as caoutchouc or rubber. Minor amounts of foreign matter may also be present in used plastics, such as paper, pigments, paint systems, printing inks, adhesives, which are often difficult to remove. Minor amounts of cellulose or fibre materials do not interfere with recycling either.

Blends of the novel compatibiliser/stabiliser compounds may also be added to the plastic compositions to be stabilised and to be made compatible. It is, for example, convenient to use compounds having the same compatibiliser backbone but which are differently functionalised as regards the stabiliser, typically mixtures of compounds having a phenolic antioxidant function with compounds having a benzotriazole function, mixtures of compounds having an antioxidant function with compounds having a HALS function, mixtures of compounds having a HALS function with compounds having a UV absorber function or e.g. mixtures of compounds having an antioxidant function with compounds having a HALS function and with compounds having a UV absorber function.

The plastic compositions may additionally be mixed with other additives known to the skilled person. These additional additives are used in the customary amounts and combinations detailed in the relevant literature (e.g. "Plastics Additives", Gächter/Müller, Hanser Verlag, München/Wien/ New York, 3rd edition).

The incorporation of the novel compatibiliser/stabiliser compounds into the polymers or polymer blends to be stabilised can be conveniently carried out as follows:

- as emulsion or dispersion;
- as dry mixture while blending additional components or polymer blends;
- by direct addition to the processing apparatus (e.g. calender, mixer, kneader, extruder and the like), or
- as solution or melt.

The plastic compositions can be prepared in a manner known per se by mixing the novel compounds and further optional additives with the plastic composition using appliances known per se, such as the above-mentioned processing apparatus. The additional additives can be added singly or in admixture or also in the form of so-called masterbatches.

By adding a suitable monomeric functionalised stabiliser compound and a radical initiator to the plastic composition direct while processing the mixture, i.e. without previous separate preparation of the compatibiliser/stabiliser compound, it is furthermore possible to produce said compatibiliser/stabiliser compound and the compatible plastic composition in one process step. In similar manner it is possible to process a suitable monomeric functionalised stabiliser compound and a corresponding compatibiliser together with the polymer mixture so that the compatibiliser compound reacts with the stabiliser compound without prior processing, an improved compatibilised polymer blend being obtained at the same time.

The plastic compositions obtainable according to this invention can be brought into the desired shape in known manner. Such processes are, for example, grinding, calendering, extruding, injection moulding, sintering or spinning, and also extrusion blow moulding or processing by the plastisol process.

The novel process comprises two different aspects, i.e. two different aims are attained by using the novel polymeric compatibiliser/stabiliser compounds.

On the one hand, polymers are made compatible with each other in blends of different polymers (virgin material or recyclates), which, without compatibilisers, would form several phases, and the polymer is stabilised at the same time.

On the other hand, the stabiliser is made compatible or its solubility in the polymer is enhanced because the polymer backbone of the compatibiliser/stabiliser compound is compatible with the polymer to be stabilised.

This also reduces the migration of the stabiliser from the polymer which is conceivable e.g. in extracting ambient media. This is the case, for example, when said compounds are used for fuel tanks, geotextiles, dry cleaning fibres (e.g. textiles, carpet floors), pipes, applications with foodstuff contact and the like.

The following Examples illustrate the invention in more detail. Here as well as in the remainder of the description and in the claims, parts and percentages are by weight unless otherwise stated.

I. Preparation of the functionalised polymers

Example A

On a twin-screw extruder (TW 100, of Haake, Germany), an SEBS copolymer (styrene/ethylene/butadiene/styrene copolymer) is extruded with maleic anhydride groups (Kraton® FG 1901, of Shell) at a temperature of 210-230°C (heating zone 1-5) and at 45 rpm with addition of 2% of 2,3-epoxypropyl 3,5-bis(1,1-dimethylethyl)-4-hydroxybenzenepropionate. Subsequent analysis by gas chromatography shows that the additive can no longer be detected in its original form, i.e. it is completely chemically bound to the polymer chain.

Example B

In general analogy to Example A, a polyethylene/acrylic acid/acrylate (Lucalen® A 3110 MX, of BASF) is extruded with 2% of 2,3-epoxypropyl 3,5-bis(1,1-dimethylethyl)-4-hydroxybenzenepropionate.

Example C

The procedure of Example B is repeated, but using 4% of 2,3-epoxypropyl 3,5-bis(1,1-dimethylethyl)-4-hydroxybenzenepropionate.

Example D

In general analogy to Example A, SEBS copolymer with maleic anhydride groups is reacted with 2% of 1,2,2,6,6-pentamethyl-4-(2,3-epoxypropyloxy)piperidine.

Example E

In general analogy to Example B, polyethylene/acrylic acid/acrylate is reacted with 2% of 1,2,2,6,6-pentamethyl-4-(2,3-epoxypropyloxy)piperidine.

Examples F, G, H

In general analogy to Example E, 4%, 6% and 8% each of 1,2,2,6,6-pentamethyl-4-(2,3-epoxypropyloxy)piperidine are used.

II) Use of the polymeric stabilisers

Examples 1-3 (Impact strength as a function of oven ageing)

To test the products obtained, a mixture of 70% of LDPE, low density polyethylene (Lupolen® 3026 F, of BASF) with polyamide 6 (Ultrad® B 30, pre-dried, of BASF) is compounded with the functionalised compatibilisers prepared in the above Examples at 240°C and at 75 rpm (twin-screw extruder TW 100, of Haake, Germany), granulated and then injection moulded at 240°C to test samples. The impact strength of these test samples is determined according to DIN 53 448 as a function of ageing at 100°C in a circulating air oven.

For comparison purposes, compositions comprising instead of the functionalised compatibilisers the corresponding unfunctionalised compounds were prepared and tested.

The tested compositions and the test results are given in the following Table 1. The higher the impact strength value, the more stable the tested composition.

Table 1

Ex.	Additive 5% each of	Impact strength [kJ/m ²]					
		0h	500h	1000h	2500h	5000h	7725h
	--	292	158	161	113	60	53
	Kraton FG 1901	571	509	458	451	311	241
	Lucalen A 3110 MX	673	476	361	195	145	112
1	cmpd. of Example A	544	503	479	473	448	428
2	cmpd. of Example B	663	581	583	570	538	478
3	cmpd. of Example C	692	580	578	571	538	419

The values obtained show that the functionalised compatibilisers stabilise the polymer more effectively when aged over a prolonged period of time than the of non-functionalised compatibilisers.

Examples 4-8: (Impact strength as a function of artificial weathering)

In general analogy to the method described in Examples 1-3, test samples are prepared and their impact strength is determined as a function of artificial weathering. The weatherings are carried out in a Weather-O-meter [Type Ci 65A, of Atlas, BPT (black panel temperature) 63°C, RH (relative humidity) 60%, water spray].

The compositions and test results are shown in Table 2.

Table 2

Ex.	Additive 5% each of	Impact strength [kJ/m ²]			
		0h	1000h	2000h	5000h
	--	292	99	104	93
	Kraton FG 1901	571	83	52	45
	Lucalen A 3110 MX	673	122	97	55
4	cmpd. of Example D	569	456	408	283
5	cmpd. of Example E	702	651	503	249
6	cmpd. of Example F	635	588	485	269
7	cmpd. of Example G	668	670	533	362
8	cmpd. of Example H	596	535	476	416

The values obtained show that the functionalised compatibilisers stabilise the polymer more effectively when weathered over a prolonged period of time than the non-functionalised compatibilisers.

Examples 9-12: (Impact strength as a function of oven ageing after extraction)

A mixture of 70% of low density polyethylene (LDPE) (Lupolen® 3026 F, of BASF) with 30% of polyamide 6 (Ultramid® B36, pre-dried, of BASF) is compounded with the novel compatibiliser/stabiliser compounds to be tested at 240°C and at 75 rpm in a twin-screw extruder. Test samples are then injection moulded at 240°C.

These test samples are stored in an extraction medium:

- A) in white spirit for 25 days at room temperature,
- B) in water with 1% of Igepal CO630 (nonoxynol 9) for 2 weeks at 40°C.

The dried test samples are then aged at 100°C in a circulating air oven. The impact strength is determined according to DIN 53 448 as a function of ageing.

The higher the impact strength value and the less this value diminishes after ageing, the more stable the tested composition. The tested compounds and the test results for the extraction variant A are given in Table 3 and those for variant B are given in Table 4.

Table 3:


LDPE/PA6 70:30		Impact strength after extraction in white spirit [kJ/m ²]					
Ex.		0 h	503 h	723 h	1006 h	1990 h	4004 h
9	5% of the compd. of Ex. B	535	554	574	582	595	538
10	5% of the compd. of Ex. C	547	542	557	541	567	515

Table 4:

LDPE/PA6 70:30		Impact strength after extraction in water/surfactant [kJ/m ²]					
Ex.		0 h	235 h	498 h	750 h	1241 h	2995 h
11	5% of the compd. of Ex. B	636	579	591	600	591	578
12	5% of the compd. of Ex. C	661	539	575	563	580	555

What is claimed is

1. A process for stabilising and at the same time phase compatibilising plastics or plastic compositions by incorporating polymeric compounds obtainable by reacting a compound selected from the group consisting of the sterically hindered phenols, sterically hindered amines, lactones, sulfides, phosphites, benzotriazoles, benzophenones and 2-(2-hydroxy-phenyl)-1,3,5-triazines, which compounds contain at least one reactive group, with a compatibilisator.
2. A process according to claim 1, wherein the sterically hindered phenols are

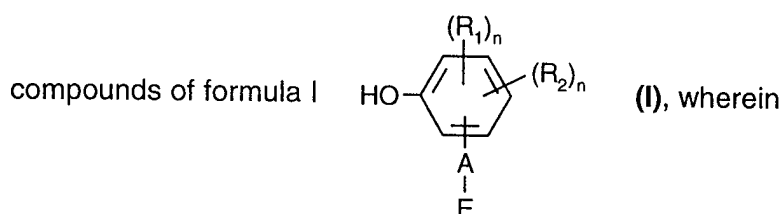

R₁ and **R₂** are each independently of the other hydrogen, C₁-C₂₅alkyl, phenyl-C₁-C₃alkyl which is unsubstituted or substituted once or several times at the aromatic ring by OH or/and C₁-C₄alkyl, unsubstituted or C₁-C₄alkyl-substituted C₅-C₁₂cycloalkyl, or phenyl;

n is 1, 2 or 3;

E is OH, SH, NHR₃, SO₃H, COOH, -CH=CH₂, $-(CH_2)_m-\text{CH}-\text{CH}_2$ or $-\text{P}(=\text{O})(\text{OH})-\text{R}_4$;

m is 0 or 1;

R₃ is hydrogen or C₁-C₉alkyl;

R₄ is C₁-C₁₂alkyl, or phenyl which is unsubstituted or substituted by one or several C₁-C₄-alkyl, halogen or/and C₁-C₁₈alkoxy;

A if E is OH, SH or -CH=CH₂, is -C_xH_{2x}-, -CH₂-S-CH₂CH₂-,
-C_qH_{2q}-(CO)-O-C_pH_{2p}-, -C_qH_{2q}-(CO)-NH-C_pH_{2p}- or -C_qH_{2q}-(CO)-O-C_pH_{2p}-S-C_qH_{2q}- ;


x is a number from 0 to 8;

p is a number from 2 to 8;

q is a number from 0 to 3;


R₁ and **n** are as defined above; or



- A** if E is -NHR_3 , is $\text{-C}_x\text{H}_{2x}\text{-}$ or $\text{-C}_q\text{H}_{2q}\text{-(CO)-NH-C}_p\text{H}_{2p}\text{-}$, wherein x, p and q have the meanings cited above; or
- A** if E is COOH or SO_3H , is $\text{-C}_x\text{H}_{2x}\text{-}$, $\text{-CH}_2\text{-S-CH}_2\text{-}$ or $\text{-CH}_2\text{-S-CH}_2\text{CH}_2\text{-}$, wherein x has the meaning cited above; or

- A** if E is $\text{---(CH}_2\text{)}_m\text{---CH---CH}_2$ , is a direct bond, $\text{-C}_q\text{H}_{2q}\text{-(CO)}_m\text{-O-CH}_2\text{-}$ or $\text{-C}_x\text{H}_{2x}\text{-S-CH}_2\text{-}$, wherein q, m, x, R_1 and R_2 are as defined above;

- A** if E is ---P(=O)(OH)-R_4 , is $\text{-CH}_2\text{-}$.

3. A process according to claim 1, wherein the sterically hindered amines are compounds

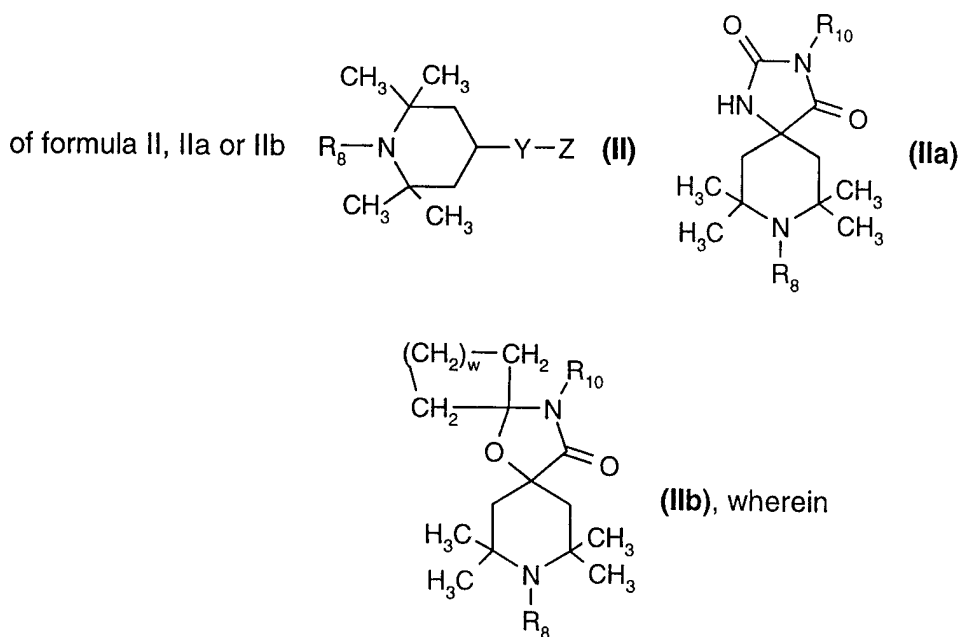

- R_8 is hydrogen, $\text{C}_1\text{-C}_{25}\text{alkyl}$, $\text{C}_2\text{-C}_{20}\text{alkenyl}$, $\text{C}_2\text{-C}_{20}\text{alkynyl}$, $\text{C}_1\text{-C}_{20}\text{alkoxy}$, phenyl- $\text{C}_1\text{-C}_3\text{alkyl}$, $\text{C}_5\text{-C}_{12}\text{cycloalkyl}$, $\text{C}_5\text{-C}_8\text{cycloalkoxy}$, phenyl, naphthyl, hydroxyethyl, $\text{CO-C}_1\text{-C}_{25}\text{alkyl}$, CO-phenyl , CO-naphthyl , $\text{CO-phenyl-C}_1\text{-C}_3\text{alkyl}$, $\text{O-CO-C}_1\text{-C}_{20}\text{alkyl}$ or $\text{C}_1\text{-C}_6\text{alkyl-S-C}_1\text{-C}_6\text{alkyl}$, $\text{C}_1\text{-C}_6\text{alkyl-O-C}_1\text{-C}_6\text{alkyl}$, $\text{C}_1\text{-C}_6\text{alkyl-(CO)-C}_1\text{-C}_6\text{alkyl}$, $\text{-CH}_2\text{CH}_2\text{-O-CH}_2\text{-CH---CH}_2$  or $\text{-CH}_2\text{-CH---CH}_2$  ;

w is a number from 1 to 10;

Y is a single bond, C₁-C₂₅alkylene, phenylene, biphenylene, naphthylene,


-O-C₁-C₂₅alkylene, -NR₉-, -O- or $\begin{array}{c} \text{R}_9-\text{C}=\text{O} \\ | \\ -\text{N}-\text{C}_1-\text{C}_{25}-\text{alkylene} \end{array}$;

Z is hydrogen, -COOR₉, -NH₂, -OR₉, hydroxyethyl, $-\text{CH}_2-\text{CH}(\text{O})-\text{CH}_2$ or $-\text{C}(=\text{O})-\text{C}(\text{R}_9)=\text{CH}_2$;

R₉ is hydrogen or C₁-C₁₂alkyl;

R₁₀ has the same definition as R₈.


4. A process according to claim 1, wherein the lactones are compounds of formula III

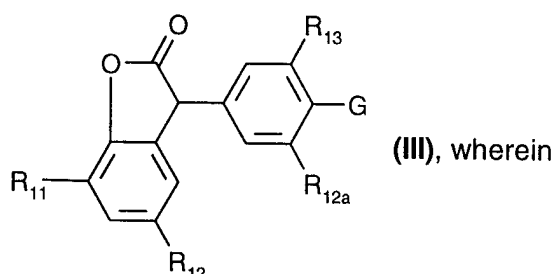

R₁₁, **R₁₂**, **R_{12a}** and **R₁₃** are each independently of one another hydrogen, C₁-C₂₅alkyl, phenyl-C₁-C₃alkyl, C₅-C₁₂cycloalkyl or phenyl; and

G is OH, OCH₂CH₂OH, $-\text{O}-\text{CH}_2-\text{CH}(\text{O})-\text{CH}_2$ or -OCH₂COOH.

5. A process according to claim 1, wherein the sulfides are compounds of formula IV




R₁₅ is C₁-C₁₈alkyl, benzyl, phenyl or $-\text{P}(=\text{S})(\text{OR}_{17})_2$; and

R₁₆ is -CH₂CH₂OH, $-\text{CH}_2-\text{CH}(\text{O})-\text{CH}_2$, -CH₂COOH or -CH₂CH₂COOH; and

R₁₇ is C₁-C₁₈alkyl or unsubstituted or C₁-C₄alkyl-substituted phenyl.





6. A process according to claim 1, wherein the phosphites are compounds of formula V



R_{16a} is $-\text{CH}_2\text{CH}_2\text{OH}$ or $-\text{CH}_2\text{CH}_2\text{COOH}$; and

R_{17a} is $\text{C}_1\text{-C}_{18}$ alkyl or unsubstituted or $\text{C}_1\text{-C}_4$ alkyl-substituted phenyl.

7. A process according to claim 1, wherein the benzotriazoles, benzophenones and 2,4,6-triaryl-1,3,5-triazines are compounds of formula VI, VIa, VIb or VIc

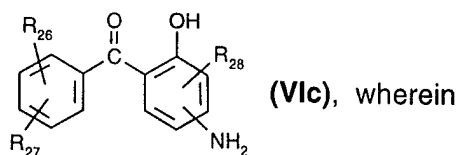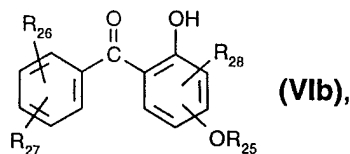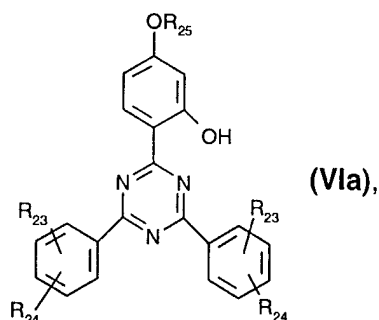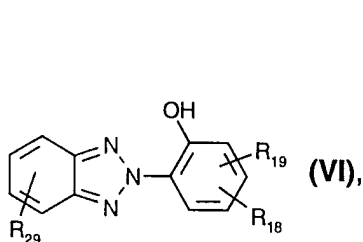

R_{18} is $-(\text{CH}_2)_t\text{-R}_{20}$, $-\text{O}-\text{CH}_2-\overset{\text{O}}{\underset{\text{||}}{\text{CH}}}-\text{CH}_2$ or NH_2 ;

R_{19} is $\text{C}_1\text{-C}_{12}$ alkyl, α,α -dimethylbenzyl or a radical $-\text{CH}_2-\text{C}_6\text{H}_3(\text{OH})-\text{N}=\text{N}-\text{C}_6\text{H}_5$; $-\text{CH}_2-\text{C}_6\text{H}_4-\text{C}(\text{CH}_3)_2-\text{CH}_2-\text{C}(\text{CH}_3)_3$;

R_{20} is $-\text{OH}$, $-\text{SH}$, $-\text{NHR}_{30}$, $-\text{SO}_3\text{H}$, $-\text{COOR}_{21}$, $-\text{CH}=\text{CH}_2$, $-(\text{CH}_2)_m-\overset{\text{O}}{\underset{\text{||}}{\text{CH}}}-\text{CH}_2$ or $-(\text{CO})\text{-NH}-(\text{CH}_2)_u\text{-NCO}$;

R_{21} is hydrogen, $-\text{CH}_2-\overset{\text{O}}{\underset{\text{||}}{\text{CH}}}-\text{CH}_2$ or $-\text{CH}_2\text{-CH}(\text{OH})\text{-CH}_2\text{-O}-(\text{CO})\text{-R}_{22}$;


R_{22} is $\text{C}_1\text{-C}_4$ alkyl or phenyl;

R_{23} and R_{24} are each independently of the other hydrogen or $\text{C}_1\text{-C}_4$ alkyl;

R_{25} is hydrogen, $-(\text{CH}_2)_u\text{-OH}$, $-\text{CH}_2-\overset{\text{O}}{\underset{\text{||}}{\text{CH}}}-\text{CH}_2$, $-(\text{CH}_2)_u\text{COOH}$ or $-(\text{CO})\text{-NH}-(\text{CH}_2)_u\text{-NCO}$;

R₂₆ is hydrogen, OH or C₁-C₁₂alkoxy;

R₂₇ is hydrogen or OH;

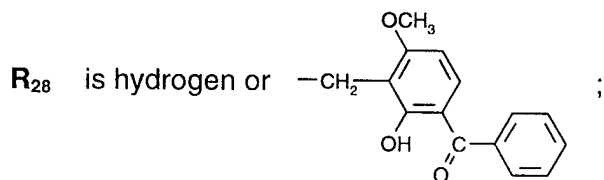

R₂₉ is hydrogen or halogen;

R₃₀ is hydrogen or C₁-C₉alkyl;

m is 0 or 1;

t is a number from 0 to 6;

u is a number from 2 to 12.

8. A process according to claim 1, wherein the compatibiliser compound is a polymer containing acid groups, acid anhydride groups, ester groups, epoxy groups or alcohol groups or wherein the compatibiliser compound is a copolymer or terpolymer of polyethylene, polypropylene, vinyl acetate or styrene with acrylic acid.

9. A process according to claim 8, wherein the compatibiliser compound is a polymer with acrylic acid (AA) function, glycidyl methacrylate (GMA) function, methacrylic acid (MAA) function, maleic anhydride (MAH) function or vinyl alcohol (VA) function.

10. A process according to claim 8, wherein the compatibiliser compound is a copolymer consisting of polyethylene acrylic acid (PE-AA), polyethylene glycidyl methacrylate (PE-GMA), polyethylene methacrylic acid (PE-MAA) or polyethylene maleic anhydride (PE-MAH) or a terpolymer of polyethylene and vinyl acetate with acrylic acid or a terpolymer of polyethylene and acrylates with acrylic acid.

11. A process according to claim 8, wherein the compatibiliser compound is a grafted polyethylene or polypropylene copolymer selected from the group consisting of maleic anhydride grafted to polyethylene vinyl acetate (MAH-g-PE-vinyl acetate), maleic anhydride grafted to low density polyethylene (MAH-g-LDPE), maleic anhydride grafted to high density

polyethylene (MAH-g-HDPE), maleic anhydride grafted to linear low density polyethylene (MAH-g-LLDPE), acrylic acid grafted to polypropylene (AA-g-PP), glycidyl methacrylate grafted to polypropylene (GMA-g-PP), maleic anhydride grafted to polypropylene (MAH-g-PP), maleic anhydride grafted to ethylene/propylene terpolymer (MAH-g-EPDM), maleic anhydride grafted to ethylene/propylene rubber (MAH-g-EPM) and maleic anhydride grafted to polyethylene/polypropylene copolymer (MAH-g-PE/PP).


12. A process according to claim 8, wherein the compatibiliser compound is a grafted styrene co- or terpolymer selected from the group consisting of styrene/acrylonitrile grafted with maleic anhydride (SAN-g-MAH), styrene/maleic anhydride/methyl methacrylate, styrene/butadiene/styrene block copolymer grafted with maleic anhydride (SBS-g-MAH), styrene/ethylene/propylene/styrene block copolymer grafted with maleic anhydride (SEPS-g-MAH), styrene/ethylene/butadiene/styrene block copolymer grafted with maleic anhydride (SEPS-g-MAH) and acrylic acid/polyethylene/polystyrene terpolymer (AA-PE-PS-terpolymer).

13. A process according to claim 8, wherein the compatibiliser compound is a vinyl alcohol copolymer.

14. A process according to claim 1, wherein the polymers to be stabilised are at least two different polymers.

15. A process according to claim 1, wherein the polymers to be stabilised are recycled material.

16. A compound obtainable by reacting sterically hindered phenols of formula I

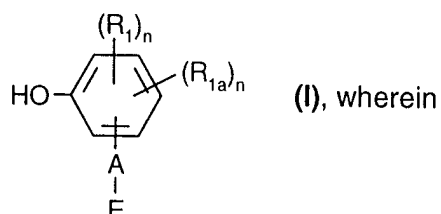

R_1 and R_2 are each independently of the other hydrogen, C_1 - C_{25} alkyl, phenyl- C_1 - C_3 alkyl which is unsubstituted or substituted once or several times at the aromatic ring by OH or/and C_1 - C_4 alkyl, unsubstituted or C_1 - C_4 alkyl-substituted C_5 - C_{12} cycloalkyl, or phenyl;

n is 1, 2 or 3;

E is OH, SH, NHR_3 , SO_3H , $COOH$, $-CH=CH_2$, $-(CH_2)_m-\overset{\text{O}}{\text{CH}}-\text{CH}_2$ or $-\overset{\text{O}}{\underset{\text{OH}}{\text{P}}}-R_4$;

m is 0 or 1;

R_3 is hydrogen or C_1 - C_9 alkyl;

R_4 is C_1 - C_{12} alkyl, phenyl which is unsubstituted or substituted by one or several C_1 - C_4 alkyl, halogen or/and C_1 - C_{18} alkoxy;

A if E is OH, SH or $-CH=CH_2$, is $-C_xH_{2x}-$, $-CH_2-S-CH_2CH_2-$, $-C_qH_{2q}-(CO)-O-C_pH_{2p}-$, $-C_qH_{2q}-(CO)-NH-C_pH_{2p}-$ or $-C_qH_{2q}-(CO)-O-C_pH_{2p}-S-C_qH_{2q}-$;

x is a number from 0 to 8;

p is a number from 2 to 8;

q is a number from 0 to 3;

R_1 and n are as defined above; or




A if E is $-NHR_3$, is $-C_xH_{2x}-$ or $-C_qH_{2q}-(CO)-NH-C_pH_{2p}-$, wherein x , p and q have the meanings cited above; or

A if E is $COOH$ or SO_3H , is $-C_xH_{2x}-$, $-CH_2-S-CH_2-$ or $-CH_2-S-CH_2CH_2-$, wherein x has the meaning cited above; or

A if E is $-(CH_2)_m-\overset{\text{O}}{\text{CH}}-\text{CH}_2$, is a direct bond, $-C_qH_{2q}-(CO)-O-CH_2-$ or $-C_xH_{2x}-S-CH_2-$, wherein q , m , x , R_1 and R_2 are as defined above;

A if E is $-\overset{\text{O}}{\underset{\text{OH}}{\text{P}}}-R_4$, is $-CH_2-$;

or sterically hindered amines of formula II, IIa or IIb

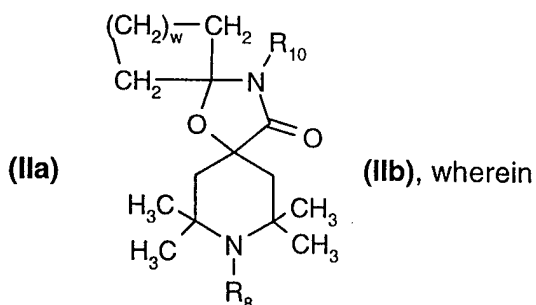

R₈ is hydrogen, C₁-C₂₅alkyl, C₂-C₂₀alkenyl, C₂-C₂₀alkynyl, C₁-C₂₀alkoxy, phenyl-C₁-C₃alkyl, C₅-C₁₂cycloalkyl, C₅-C₈cycloalkoxy, phenyl, naphthyl, hydroxyethyl, CO-C₁-C₂₅alkyl, CO-phenyl, CO-naphthyl, CO-phenyl-C₁-C₃alkyl, O-CO-C₁-C₂₀alkyl or C₁-C₆alkyl-S-C₁-C₆alkyl, C₁-C₆alkyl-O-C₁-C₆alkyl,

C₁-C₆alkyl-(CO)-C₁-C₆alkyl, -CH₂CH₂-O-CH₂-CH(O)-CH₂ or -CH₂-CH(O)-CH₂ ;

w is a number from 1 to 10;

Y is a single bond, C₁-C₂₅alkylene, phenylene, biphenylene, naphthylene,


-O-C₁-C₂₅alkylene, -NR₉-, -O- or $\begin{array}{c} R_9-C=O \\ | \\ -N-C_1-C_{25}alkylene \end{array}$;

Z is hydrogen, -COOR₉, -NH₂, -OR₉, hydroxyethyl, -CH₂-CH(O)-CH₂ or $\begin{array}{c} O \\ || \\ -C-C=CH_2 \end{array}$;

R₉ is hydrogen or C₁-C₁₂alkyl;

R₁₀ has the same definition as R₈;

or lactones of formula III

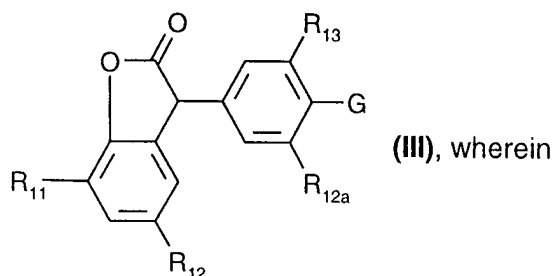


R₁₁, **R₁₂**, **R_{12a}** and **R₁₃** are each independently of one another hydrogen, C₁-C₂₅alkyl,

phenyl-C₁-C₃alkyl, C₅-C₁₂cycloalkyl or phenyl; and

G is OH, OCH₂CH₂OH, $-\text{CH}_2-\text{CH}(\text{O})-\text{CH}_2$ or -OCH₂COOH;


or sulfides of formula IV



R₁₅ is C₁-C₁₈alkyl, benzyl, phenyl or $-\text{P}(=\text{S})(\text{OR}_{17})_2$; and

R₁₆ is -CH₂CH₂OH, $-\text{CH}_2-\text{CH}(\text{O})-\text{CH}_2$, -CH₂COOH or -CH₂CH₂COOH; and





R₁₇ is C₁-C₁₈alkyl or unsubstituted or C₁-C₄alkyl-substituted phenyl; or phosphites of formula V




R_{16a} is -CH₂CH₂OH or -CH₂CH₂COOH; and

R_{17a} is C₁-C₁₈alkyl or unsubstituted or C₁-C₄alkyl-substituted phenyl;

or benzotriazoles, benzophenones or 2,4,6-triaryl-1,3,5-triazines of formula VI, VIa, VIb or VIc

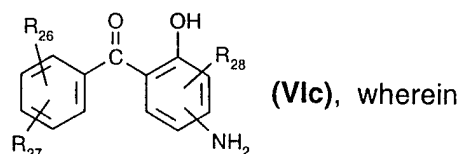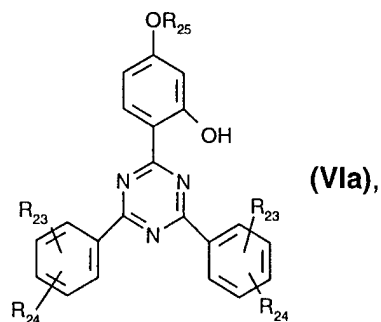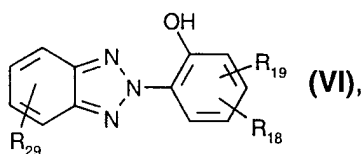

R₁₈ is -(CH₂)_t-R₂₀, $-\text{O}-\text{CH}_2-\text{CH}(\text{O})-\text{CH}_2$ or NH₂;

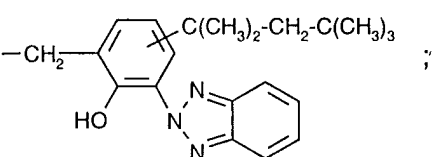R₁₉ is C₁-C₁₂alkyl, α,α -dimethylbenzyl or a radical  ;

R₂₀ is -OH, -SH, -NHR₃₀, -SO₃H, -COOR₂₁, -CH=CH₂, $-(CH_2)_m-CH-CH_2$ or $-(CO)-NH-(CH_2)_u-NCO$;

R₂₁ is hydrogen, $-(CH_2)-CH-CH_2$ or $-CH_2-CH(OH)-CH_2-O-(CO)-R_{22}$;


R₂₂ is C₁-C₄alkyl or phenyl;

R₂₃ and **R₂₄** are each independently of the other hydrogen or C₁-C₄alkyl;

R₂₅ is hydrogen, $-(CH_2)_u-OH$, $-(CH_2)-CH-CH_2$, $-(CH_2)_uCOOH$ or $-(CO)-NH-(CH_2)_u-NCO$;

R₂₆ is hydrogen, OH or C₁-C₁₂alkoxy;

R₂₇ is hydrogen or OH;

R₂₈ is hydrogen or  ;

R₂₉ is hydrogen or halogen;

R₃₀ is hydrogen or C₁-C₉alkyl;

m is 0 or 1;

t is a number from 0 to 6;

u is a number from 2 to 12;

with a compatibiliser compound.

17. Use of compounds according to claim 16 as stabilisers and at the same time as phase compatibilisers in plastics or plastic compositions.

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 97/05782

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 C08F8/00 C08L101/00 C08K5/00

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 C08F C08L C08K

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category °	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US RE34791 E (KAZMIERZAK ET AL.) 15 November 1994 see column 1, line 29 - line 68; claims 1,16,17; examples ---	1,3,8,9
A	DE 35 17 798 A (HERCULES INC.) 20 November 1986 see page 6, line 9 - line 12; claims 1,7 ---	1,3,8
A	DE 42 30 157 C (MERCEDES-BENZ) 2 December 1993 see page 2, line 53 - line 67; claim 1 ---	1
A	WO 93 20133 A (EXXON) 14 October 1993 see page 1, line 16 - line 26 see page 8, line 13 - page 9, line 7 --- -/--	1,7



Further documents are listed in the continuation of box C.



Patent family members are listed in annex.

° Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

20 February 1998

Date of mailing of the international search report

02/03/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Engel, S

INTERNATIONAL SEARCH REPORT

International Application No

PCT/EP 97/05782

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP 0 638 597 A (CIBA) 15 February 1995 see page 27 - page 28; claims 1,9-15 ---	1,7,8
A	EP 0 303 986 A (PENNWALT CORP.) 22 February 1989 see page 3, line 53 - page 4, line 57 see page 20, line 12 - line 15; claims 1,28 ---	1,16
A	EP 0 673 949 A (KAWASAKI) 27 September 1995 see claims 1,3,22 -----	1

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP 97/05782

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US RE34791 E	15-11-94	US 4857595 A	15-08-89
		CA 1329298 A	03-05-94
		DE 3875307 A	19-11-92
		EP 0303987 A	22-02-89
		ES 2052652 T	16-07-94
		JP 1066212 A	13-03-89
		MX 166313 B	29-12-92
		US 4975489 A	04-12-90
DE 3517798 A	20-11-86	US 4520171 A	28-05-85
		BE 902595 A	05-12-85
		GB 2174996 A, B	19-11-86
		JP 1973710 C	27-09-95
		JP 7002773 B	18-01-95
		JP 61276801 A	06-12-86
DE 4230157 C	02-12-93	NONE	
WO 9320133 A	14-10-93	US 5455307 A	03-10-95
EP 638597 A	15-02-95	BR 9402694 A	04-04-95
		CA 2127731 A	14-01-95
		JP 7070248 A	14-03-95
		MX 9405327 A	31-01-95
		SK 82394 A	08-03-95
		US 5541274 A	30-07-96
EP 303986 A	22-02-89	US 4863999 A	05-09-89
		CA 1336527 A	01-08-95
		DE 3873212 A	03-09-92
		ES 2042660 T	16-12-93
		JP 1066211 A	13-03-89
		US 4981915 A	01-01-91
		US 5096974 A	17-03-92
EP 673949 A	27-09-95	CA 2144587 A	17-09-95
		JP 8157664 A	18-06-96
		US 5594062 A	14-01-97