



HU000034623T2

(19) **HU****MAGYARORSZÁG****Szellemi Tulajdon Nemzeti Hivatala**(11) Lajstromszám: **E 034 623**(13) **T2**

EURÓPAI SZABADALOM SZÖVEGÉNEK FORDÍTÁSA

(21) Magyar ügyszám: **E 13 759022**(22) A bejelentés napja: **2013. 07. 24.**(51) Int. Cl.: **B65D 83/04** (2006.01)**A61J 7/00** (2006.01)

(96) Az európai bejelentés bejelentési száma:

EP 20130759022

(86) A nemzetközi (PCT) bejelentési szám:

PCT/IL 13/050631

(97) Az európai bejelentés közzétételi adatai:

EP 2879974 A2 **2014. 02. 06.**

(87) A nemzetközi közzétételi szám:

WO 14020594

(97) Az európai szabadalom megadásának meghirdetési adatai:

EP 2879974 B1 **2017. 08. 23.**

(30) Elsőbbségi adatok:

22118612 **2012. 07. 30.** **IL****22607413** **2013. 04. 30.** **IL**

(73) Jogosult(ak):

P.C.O.A. Devices Ltd., 65272 Tel Aviv (IL)

(72) Feltaláló(k):

PAZ, Ilan, 90433 Alon Shvut (IL)

(74) Képviselő:

SBGK Szabadalmi Ügyvivői Iroda, Budapest

(54)

Szilárd gyógyszerpirulák tárolására és kiadagolására szolgáló tartály

Az európai szabadalom ellen, megadásának az Európai Szabadalmi Közlönyben való meghirdetésétől számított kilenc hónapon belül, felszólalást lehet benyújtani az Európai Szabadalmi Hivatalnál. (Európai Szabadalmi Egyezmény 99. cikk(1))

A fordítást a szabadalmas az 1995. évi XXXIII. törvény 84/H. §-a szerint nyújtotta be. A fordítás tartalmi helyességét a Szellemi Tulajdon Nemzeti Hivatala nem vizsgálta.



(11) **EP 2 879 974 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
23.08.2017 Bulletin 2017/34

(21) Application number: **13759022.0**

(22) Date of filing: **24.07.2013**

(51) Int Cl.:
B65D 83/04 (2006.01) A61J 7/00 (2006.01)

(86) International application number:
PCT/IL2013/050631

(87) International publication number:
WO 2014/020594 (06.02.2014 Gazette 2014/06)

(54) **A RECEPTACLE FOR CONTAINING AND DISPENSING SOLID MEDICINAL PILLS**
BEHÄLTER ZUR AUFNAHME UND AUSGABE FESTER MEDIZINISCHER PILLEN
RÉCEPTACLE POUR CONTENIR ET DISTRIBUER DES COMPRIMÉS MÉDICINAUX SOLIDES

(84) Designated Contracting States:
AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR
Designated Extension States:
BA ME

(30) Priority: **30.07.2012 IL 22118612**
30.04.2013 IL 22607413

(43) Date of publication of application:
10.06.2015 Bulletin 2015/24

(73) Proprietor: **P.C.O.A. Devices Ltd.**
65272 Tel Aviv (IL)

(72) Inventor: **PAZ, Ilan**
90433 Alon Shvut (IL)

(74) Representative: **Kilger, Ute**
Boehmert & Boehmert
Anwaltspartnerschaft mbB
Pettenkoferstrasse 22
80336 München (DE)

(56) References cited:
EP-A2- 0 869 079 DE-U1- 20 210 715
DE-U1-202006 011 530 US-A- 4 237 884
US-A- 4 237 884 US-A1- 2008 164 275

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

Description

FIELD OF THE INVENTION

[0001] The present invention relates to the field of controlled medication administration. Particularly, the present invention relates to medication dispensers. More particularly, the present invention relates to a receptacle for containing and dispensing solid medicinal pills.

BACKGROUND OF THE INVENTION

[0002] A major problem in hospitals and nursing facilities, where pills are dispensed on a regular basis, is that pills are brought manually by a medical person to a patient who then manually takes them for swallowing. Unfortunately, many patients receiving medication are groggy, shaky or infirm. During the handling of the pills, the patient may drop the pills, which will result in their becoming contaminated or even lost.

[0003] Another serious problem in hospitals, and in general, is with the control of the distribution of narcotic pain killers, where patients are known to palm the same in order to transfer and/or sell the pill to an unauthorized user.

[0004] It is an object of the present invention to obviate these and other associated problems by providing a receptacle for containing and dispensing solid medicinal pills wherein said receptacle is provided with dispensing means provided with a sealable dispensing closure, wherein displacement of the closure from its sealed position, to enable the dispensing of a pill, is actuated by the mouth of the user.

[0005] Since the unique receptacle of the present invention is designed to specifically and only dispense one or more pills directly into the mouth of the designated patient there is no danger that a patient who is groggy, shaky or infirm will drop the pill(s) and much less danger of transfer and/or sale of a pill to an unauthorized user once it has been in the mouth of the designated patient.

[0006] There exist prior art devices for containing and dispensing solid medicinal pills, however, they all have difficulties or drawbacks associated with them.

[0007] US 5,259,531 to Bennett discloses a container for storing and dispensing pills which dispenses individual pills by manually operating a lever. The container employs a hollow vertical cylinder having an upper region for receiving pills and a lower region from which pills are dispensed. The lower region has a first opening in its lower end which is adapted to pass a pill therethrough and has at least one second opening in its side wall. In use, it is first necessary to fill the upper region with pills to be dispensed. The container is then tapped gently or subjected to similar movements, and one of the pills in the upper region will be moved into engagement with a section which is connected to a lever. When the lever is in its first position, the section is placed under the third opening in order to receive any pill delivered through the

third opening thereto. When the lever is in its second position, the section is placed above the first opening in order to deliver any pill previously received by the section to the first opening for discharge therethrough.

[0008] Bennett's container is manually operable which requires the user to remove the pill therefrom and transfer it to his mouth via his hand. Thus, a groggy, shaky or infirm user may drop, contaminate and even lose the pill, as described herein above.

[0009] US 4,402,425 to von Schukmann discloses a tablet dispensing container having a spring-loaded slide pushbutton operated to release one tablet and bottom projection to hold back others. The container for the dispensing of individual tablets one by one comprises a tablet drop-out opening provided in the wall of the container below a storage chamber, a spring-loaded slide traveling in front of the region of the opening and releasing in each case one of the tablets so that it can drop out, the slide having associated with it a division finger which, in the depressed position of the slide which is continued towards the outside by an actuating button, blocks the path between the bottom opening of the storage chamber and the tablet drop-out opening.

[0010] Similar to the drawback associated with Bennett's container, the container of von Schukmann is not intended for the user to distribute the pills directly into his mouth, rather into his hand, thereby potentially resulting in contamination or loss of the pill prior to ingestion.

[0011] Additional prior art documents that describe devices for dispensing solid medicaments such as pills, tablets and the like include: US 5,657,901, FR 2,637,266, US 2007/114239, US 4,354,619, US 2004/124204, US 7,147,130, US 5,850,919, US 5,018,644, US 4,653,668, US 4,744,492, US 4,784,291 and US 6,131,765. However, none the above patent documents solve the problems associated with pill dispensers as described herein above.

[0012] JP 2008110158 to Ilzuka discloses an inhalation-type medicine delivery device that has a body having a storage chamber storing the capsule filled with a medicine, a piercing means to make a hole in the capsule arranged in the storage chamber of the body, and a mouthpiece to inhale the medicine of the pierced capsule through a discharge route connected with the storage chamber. The body is composed of a cylindrical member having openings in two positions. The mouthpiece is provided in one opening 1d of the cylindrical member and a lid member openably connected with the cylindrical member through a connecting portion such as a pivot or a hinge and opening the inlet of the storage chamber to load the capsule in an open state is provided in the other opening 1e of the cylindrical member. A check valve permitting outside air to be conducted into the body only during aspiration by the mouthpiece is arranged in the lid member.

[0013] Ilzuka's device allows the user to avoid manual handling of the pill, however it is a complex design, which adds to the cost of manufacturing as well as the sale

price. Furthermore said device is, like many inhalators, designed to deliver a fine powder from the capsule and not the capsule itself.

[0014] Document US 4,237,884 discloses a medication dispenser-container for depositing medication tablets one at a time on a person's tongue to affect taste buds.

[0015] Accordingly, it is a principal object of the present invention to provide a receptacle for containing and dispensing solid medicinal pills, that overcomes the difficulties and drawbacks associated with the prior art as described in part herein above.

[0016] Additionally, it is an object of the present invention to provide a receptacle for containing and dispensing solid medicinal pills in hospitals and nursing facilities as well as at home.

[0017] It is yet another object of the present invention to provide a receptacle for containing and dispensing solid medicinal pills, one or more at a time, whenever used in conjunction with an automated medication dispenser of the type enabling the controlled sequential delivery of a regimen of pills on an as-needed basis.

[0018] It is another object of the present invention to provide a receptacle for containing and dispensing solid medicinal pills that prevents contamination or loss of the drug prior to reaching the patient.

[0019] It is yet another object of the present invention to provide a receptacle for containing and dispensing solid medicinal pills that is easy and inexpensive to manufacture, and simple to use.

[0020] Additional objects and advantages of the invention will become apparent as the description proceeds.

SUMMARY OF THE INVENTION

[0021] For solving the objective, a receptacle of claim 1 is provided.

[0022] In accordance with a preferred embodiment of the present invention, a receptacle for containing and dispensing solid medicinal pills directly into the mouth of the user, is disclosed, comprising a container with a Storage chamber leading to a spout outlet sized to be comfortably inserted between the lips of a user. The spout outlet is further provided with a displaceable sealing closure having a normally closed position, wherein displacement of the closure from the closed position, to enable the dispensing of at least one pill from the chamber, is actuated by the mouth of the user interacting with the spout outlet.

[0023] The displacement of the closure from the closed position, to enable the dispensing of at least one pill from the chamber, is preferably actuated by an air pressure differential, particularly by suction, inhalation or exhalation applied to the spout and the closure by the mouth of the user.

[0024] Preferably, the inner cross-section of the opening of the spout is less than 4, optionally less than 3 cm.

[0025] The receptacle preferably additionally compris-

es an inlet for introducing at least one solid medicinal pill into the chamber to be dispensed via the spout outlet.

[0026] According to one aspect, the inlet is hingedly attached to an opening provided in a surface of the container. According to another aspect, the inlet comprises a one-way valve. According to another embodiment inlet comprises an opening covered by a semi-flexible material having a resealably openable slit.

[0027] Preferably, the receptacle is provided with a handle for bringing and positioning the spout outlet of the receptacle in dispensing relation vis-à-vis the mouth of the user.

[0028] The sealing closure is preferably maintained in its closed position by interengagement with a frame provided inside the spout outlet. Preferably, the sealing closure is hingedly attached to an at least partially flexible frame means provided inside the spout and the portal is held maintained in its closed position by interengagement with the flexible frame.

[0029] The at least partially flexible frame is preferably provided with an opening sealable by the sealing closure and the portal is displaceable through the opening in response to an air pressure differential between the two sides of the frame.

[0030] The at least partially flexible frame is preferably provided with an opening sealable by the sealing closure and the closure is inwardly displaceable through the opening toward the chamber for insertion of pills therein and outwardly displaceable toward the spout outlet for dispensing of pills to the mouth of the user.

[0031] In especially preferred embodiments of the present invention, the receptacle is used for dispensing at least one pill from said chamber, wherein any one linear measurement of the pill is between 3mm and 30mm.

[0032] The receptacle is preferably used in conjunction with an automated, controlled, solid pill medication dispenser.

[0033] The dispensing receptacle is preferably provided in conjunction with an integral housing, which integral housing is lockable to a pill dispenser, and the integral housing and dispensing receptacle are together disposable, to enable sequential use of the dispenser by multiple sequential patients with a new integral housing and dispensing receptacle attached to the dispenser for each sequential patient.

[0034] The disclosed receptacle for containing and dispensing solid medicinal pills, one or more at a time, is provided whenever used in conjunction with a medication dispenser of the type enabling the controlled sequential delivery of a regimen of pills on an as-needed basis with a predetermined prescribed minimum time interval between delivery of each type of pill, from any standard commercial flat multiple pill-containing pack of the blister package type having at least one column of pills to be dispensed.

[0035] Optionally said spout outlet is releasably connected to said receptacle.

[0036] In other embodiments of the present invention

said releasable spout outlet is disposable and replaceable.

[0037] Optionally said spout outlet is provided with a stop surface positioned in spaced apart relationship, relative to and outwardly in front of said displaceable sealing closure, said stop surface being provided with at least one air hole enabling air displacement between the mouth of the user and said closure, to open the same, said surface being adapted to deflect a pill exiting said closure and encountering said surface, said spout outlet being further provided with an opening, positioned to dispense, under the effect of gravity, a pill exiting said closure, irrespective of whether said pill reaches said stop surface and is deflected thereby or not.

[0038] While the opening of the displaceable sealing closure according to the present invention is preferably activated by the user blowing air into the receptacle to force open the sealing closure or applying suction generated by cheek or lung action to pull the closure open towards the user, it is possible to have other alternative mouth activated opening mechanisms such as a mechanical latch operated by the pressure of the lips, teeth or jaws of the user, a sensor of the temperature of the breath of the user when said breath is exhaled into the receptacle, a sensor activated by the humidity of the breath of the user when said breath is exhaled into the receptacle, or even a carbon dioxide sensor activated by the content of the expelled breath of the user.

[0039] To accomplish the above and related objects, the invention may be embodied in the form illustrated in the accompanying drawings. With specific reference now to the figures in detail, it is stressed that the particulars shown are by way of example and for purposes of illustrative discussion of the preferred embodiments of the present invention only and are presented in the cause of providing what is believed to be the most useful and readily understood description of the principles and conceptual aspects of the invention. In this regard, no attempt is made to show details of the invention in more detail than is necessary for a fundamental understanding of the invention, the description taken with the attached figures making apparent to those skilled in the art how the several forms of the invention may be embodied in practice.

BRIEF DESCRIPTION OF THE DRAWINGS

[0040]

Fig. 1 shows the receptacle of the present invention, for containing and dispensing solid medicinal pills, in a cross-sectional side view, having a pill within the storage chamber;

Figs. 2a and 2b show outlet closure pivoted outward toward the opening of the receptacle (Fig. 2a), and the closure pivoted inward toward the storage chamber of the receptacle (Fig. 2b);

Fig. 3 shows an alternative embodiment of the receptacle, wherein the storage chamber comprises

an inlet through which one or more pills are insertable and a handle for enabling the user to grasp the container to bring the receptacle close to the user's mouth and position the spout outlet within the mouth of the user;

Fig. 4 shows the embodiment of the receptacle of Fig. 3, further comprising a integral housing, which is lockable to an automated, controlled solid pill medication dispenser;

Fig. 5 is a front perspective view of a medication dispenser according to Israel Specification No: 220,794 with the receptacle of the present invention incorporated therein;

Fig. 6 shows a receptacle of the present invention, for containing and dispensing solid medicinal pills, in a cross-sectional side view, having a pill within the storage chamber wherein the displaceable sealing closure is formed from a plurality of flexible flaps which are at least partially overlapping as shown in Fig 6a;

Fig 6b shows a sealing closure formed from a plurality of flexible filaments;

Fig. 7 shows a receptacle of the present invention, for containing and dispensing solid medicinal pills, in a cross-sectional side view, having a pill within the storage chamber and

Figs. 7a and 7b are partial views of the receptacle of figure 7 in which the spout outlet is respectively, releasably connected to and disconnected from said receptacle, said spout outlet being provided with a stop surface and with air holes enabling air displacement between the mouth of the user and the closure of the receptacle, said spout outlet being further provided with an opening, positioned to dispense, under the effect of gravity, a pill exiting said closure.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0041] A preferred embodiment of the receptacle of the present invention, for containing and dispensing solid medicinal pills, is shown in a cross-sectional side view in Fig. 1, and generally designated by numeral (100). Receptacle (100) comprises a container (102) with a storage chamber (104) leading to a spout outlet (106). Pill (108) is shown positioned in storage chamber (104).

[0042] Spout outlet (106) is shaped and sized in a manner such that it is comfortable to dispose spout outlet (106) between the lips of a user (not shown). To that end the inner diameter (d) of the opening (110) of spout outlet (106) is less than 4, preferably less than 3cm, which also assures ready passage of the pill (108) through opening (110) of spout outlet (106) and prevents easy manual removal of the pill from the chamber..

[0043] A preferred embodiment of a displaceable sealing closure (112) is shown in Fig. 1, having a normally closed position. The displacement of closure (112) from the normally closed position to an open position that en-

ables the dispensing of a pill from storage chamber (104) is preferably actuated by the mouth of the user when interacting with spout outlet (106), as described further herein below.

[0044] According to a preferred embodiment, closure (112) is maintained in its normally closed position by interengagement with a frame (114), provided inside spout outlet (106), and which surrounds closure (112). One end (113) of closure (112) is preferably hingedly attached to one end (116) of frame (114) for enabling closure (112) to selectively pivot inward toward storage chamber (104) and outward toward opening (110).

[0045] The displacement (i.e. pivoting) of closure (112) via the mouth of the user as mentioned above is actuated by an air pressure differential, wherein the differential may be produced by one or more of the suction, inhalation and exhalation created by the mouth of the user. When the user creates a suction or inhalation with his mouth closure (112) pivots outward toward opening (110) (see Fig. 2a), and when the user creates an exhalation with his mouth, closure (112) pivots inward toward storage chamber (104) (see Fig. 2b).

[0046] Additionally, the inward displacement of closure (112) may be actuated by a pusher device (not shown) which is inserted through opening (110) for providing a force on closure (112) similar to that provided by the ex-hale pressure created by the mouth of the user in order to initially insert one or more pills into chamber (104) for later mouth actuated dispensing. The pusher device may be a narrow elongated object that is held by a hand and thrust toward closure (112). The mouth of the user is typically used to actuate the displacement of closure (112) when the user desires to ingest a pill (108) contained in storage chamber (104). The pusher device is typically used to actuate the displacement of closure (112) when the user or medication distributor desires to insert a pill (108) into storage chamber (104).

[0047] With reference to Fig. 1, at least the end (118) of frame (114) opposite that of end (116) of frame (114) with which closure (112) is hingedly connected, is made of a flexible material, such as rubber or other sealing material, for providing a sealed relationship between frame (114) and closure (112). Preferably the entire inner periphery of frame (114) is made of a flexible, sealing material.

[0048] In an alternative embodiment (not shown) at least one end of closure (112) comprises a flexible, sealing material for providing a sealed relationship directly with the inner wall (120) of spout outlet (106).

[0049] When a pill (108) is disposed in storage chamber (104), following the inward or outward displacement of closure (112), pill (108) is discharged from receptacle (100) through opening (110) of spout outlet (106) directly into the user's mouth. Hence, the potential problems resulting from having an unsteady person handling the pill is avoided. Additionally, the chances of unauthorized transferring or selling of a narcotic pain killer after contamination via contact with the mouth of a user is greatly

diminished.

[0050] Once the user discontinues the suction, inhalation or exhalation with his mouth, closure (112) pivots in an opposite direction and returns to the normally closed position. Similarly, when the pusher device is removed from spout outlet (106) after being used to inwardly displace closure (112), closure (112) pivots in an opposite direction and returns to the normally closed position.

[0051] According to a preferred embodiment of the present invention, the walls (122) of storage chamber (104) are sealed such that the only method of inserting a pill therein is through spout outlet (106).

[0052] According to an alternative embodiment (200), as seen in Fig. 3, a wall (222a) of storage chamber (204) comprises a one-directional trap (224) through which one or more pills (108) are insertable. One-directional trap (224) enables pills to enter into storage chamber (204) while reducing the chances of the pills exiting there-through. In an alternative aspect, the inlet comprises an opening (not shown) that is covered by, for instance, a semi-flexible material comprising a slit. Pills may enter into the storage chamber by the user providing a thrusting force for pushing the pills through the slit, but pills are unable to exit the storage chamber through the slit since a thrusting force large enough to pass the pills through the slit cannot be generated from within the storage chamber. In yet a further alternative aspect, the inlet comprises an opening (not shown) that is covered by a second closure, which is hingedly attached at one of its ends to an end of the opening.

[0053] According to one embodiment, as shown in Fig. 3, receptacle (200) additionally comprises a handle (226) for enabling the user to grasp container (202) thereby, and for bringing receptacle (200) close to the user's mouth and positioning spout outlet (206) within the mouth of a user, in a dispensing relationship. However, in alternative embodiments, receptacle (200) does not comprise a handle (not shown). Thus, when a user desires to receive a pill from receptacle (200) he manually positions receptacle (200) as desired by directly grasping the container (202).

[0054] In a preferred embodiment, receptacle (200) is used in conjunction with an automated, controlled solid pill medication dispenser, for instance, the medication dispenser described in Israeli patent application IL220794 by the same inventors as the present invention. With reference to Fig. 4, receptacle (200) is further provided in conjunction with an integral housing (228), which is lockable to the pill dispenser (230) described in Israeli patent application IL220794. Both receptacle (200) and housing (228) are disposable in order to enable sequential use of pill dispenser (230) by multiple sequential patients, wherein a new receptacle (200) and housing (228) is provided to pill dispenser (230) for each sequential patient.

[0055] Thus, a preferred embodiment of the present invention further comprises a receptacle (200) for containing and dispensing solid medicinal pills, one or more

at a time, when used in conjunction with a medication dispenser (230) of the type described in Israeli patent application IL220794, which enables the controlled sequential delivery of a regimen of pills on an as-needed basis with a predetermined prescribed minimum time interval between delivery of each type of pill, from any standard commercial flat multiple pill-containing pack of the double arrayed blister package type having two columns and a plurality of rows of pills to be dispensed.

[0056] The pill dispenser comprises an access portal sized to receive at least one of any such blister pack and to guide the blister pack to at least one pair of motor driven driving wheels which in turn sequentially advance the blister pack to a stationary depilling station. The depilling station comprises a pill detecting means; a blister pack support having two spaced-apart pill receiving apertures, each aperture being sized and positioned to receive pills of different sizes, shapes and spacing in the blister pack array; and, motor driven depilling press means positioned, upon activation, to force one pill at a time from its respective blister through the backing of the blister via one of the apertures, as the blister pack is advanced through the stationary depilling station within the dispenser.

[0057] The dispenser further comprises a channel into which the pill enters from the apertures, and a dispensing receptacle for receiving the pill from the channel.

[0058] Referring now to Figure 5; there is seen a front perspective view of a medication dispenser 300, wherein the outer housing is removed to show the inner components of the dispenser, which dispenser incorporates receptacle 200 of the present invention as seen in Fig. 3 therein. More specifically, there is seen dispenser (300) which comprises an access portal (302) through which a blister pack (304) is inserted. Blister pack (304) is preferably a standard commercial flat multiple pill-containing pack of the double arrayed blister package type, having two columns and a plurality of rows of pills (306). An authorized medical person manually inserts blister pack (304) through access portal (302) until distal edge (305) of blister pack (304) is received by a pair of motor driven driving wheels (308a), (308b), which are preferably spur gears.

[0059] In a preferred embodiment, a second pair of driving wheels (310a), (310b) is present, for advancing blister pack (304) toward the depilling station (312).

[0060] Still referring to Fig. 5, driving wheels (308a), (308b) and (310a), (310b) are positioned lengthwise along the central longitudinal axis of a blister pack support means, preferably comprising a surface (314) along which blister pack (304) is conveyed. Upper wheels (308a), (310a) are situated above surface (314) and lower wheels (308b), (310b) are situated below surface (314). Surface (314) is shown in Fig. 5 partially cut out in order to view lower wheels (308b), (310b). Longitudinally spaced openings (316) in surface (314) enable gear teeth (309a), (309b) and (311a), (311b) to mesh.

[0061] Referring to Fig. 3 in combination with Fig. 4,

depilling station (112) and channels (132a), (132b) are shown in Fig. 3, and surface (114), blister pack (104), channels (132a), (132b) and one depilling means (126) are shown in Fig. 4, wherein the other components of the dispenser are removed for clarity.

[0062] As blister pack (304) reaches depilling station (312) a pill detecting means (not shown), comprising a sensor system having, for instance, an IR, a laser source and a detector, or any other detection system situated on opposing longitudinal sides of blister pack (304) to determine whether at least one pill is present in the first row of pills. If at least one pill is present, at least one depilling press means (326) of depilling station (312) is activated, for forcing one pill at a time from its blister out of the flat backing of blister pack (304), through pill receiving apertures (not shown) of surface (314).

[0063] In operation, once it is determined that, for instance, a depilling means (326) is positioned above a blister containing a pill (306), the depilling motor is actuated and depilling means (326) is lowered, thereby pushing pill (306) out of its blister through pill receiving aperture (not shown) into channel (332a), which channel opens into a pill dispensing receptacle (200) of the present invention via a one-way valve (not shown) that allows only one pill at a time to pass therethrough. As seen in Figures 3 and 4, the receptacle 200 is preferably provided with a handle (226) for enabling the user to manipulate the receptacle therewith.

[0064] Referring to figures 6 and 6a there is shown a receptacle (400) of the present invention, for containing and dispensing solid medicinal pills, (408) from a storage chamber (404), wherein the displaceable sealing closure (412) shown in Fig. 6a is formed from a plurality of flexible flaps (413) which are at least partially overlapping;

[0065] Referring to Fig 6b there is shown an alternative embodiment in which the sealing closure (412) is formed from a plurality of flexible filaments (415).

[0066] Referring now to Figs. 7, 7a and 7b there are seen a cross-sectional view and two partial views, respectively, of a receptacle (500) of the present invention in which the spout outlet (506) is respectively, releasably connected to (as seen in fig 7a, and disconnected from, said receptacle (500) (as shown in fig 7b), In this embodiment said spout outlet (506) is provided with a stop surface (507) positioned in spaced apart relationship, relative to, and outwardly in front of, said displaceable sealing closure (512), said stop surface being provided with air holes (509) enabling air displacement between the mouth of the user and said closure, (512), to open the same, said surface (507) being adapted to deflect a pill (508) exiting said closure and encountering said surface (507), said spout outlet (506), being further provided with an opening (511), positioned to dispense, under the effect of gravity, a pill (508) exiting said closure, irrespective of whether said pill reaches said stop surface (507) and is deflected thereby or not.

[0067] It is understood that the above description of the embodiments of the present invention are for illustra-

tive purposes only, and is not meant to be exhaustive or to limit the invention to the precise form or forms disclosed, as many modifications and variations are possible. Such modifications and variations are intended to be included within the scope of the present invention as defined by the accompanying claims.

Claims

1. A receptacle (100; 200; 400; 500) for containing and dispensing solid medicinal pills, directly into the mouth of the user, comprising a container with a storage chamber (104; 204; 404) leading to an outlet (106; 506) sized to be comfortably inserted between the lips of a user, said outlet (106; 506) being further provided with a displaceable sealing closure (112; 212; 412; 512) having a normally closed position, **characterized in that** displacement of said closure from said closed position, to enable the dispensing of at least one pill from said chamber (104; 204; 404), is actuated only by the mouth of the user interacting with said outlet (106; 506).
2. The receptacle (100; 200; 400; 500) for containing and dispensing solid medicinal pills according to claim 1, wherein displacement of said closure (112; 212; 412; 512) from said closed position, to enable the dispensing of at least one pill from said chamber (104; 204; 404), is actuated by an air pressure differential.
3. The receptacle (100; 200; 400; 500) for containing and dispensing solid medicinal pills according to claim 1, wherein displacement of said closure (112; 212; 412; 512) from said closed position, to enable the dispensing of at least one pill from said chamber (104; 204; 404), is actuated by suction applied to said outlet (106; 506) and said closure (112; 212; 412; 512) by the mouth of the user, or is actuated by exhalation applied to said outlet (106; 506) and said closure (112; 212; 412; 512) by the mouth of the user.
4. The receptacle (100; 200; 400; 500) for containing and dispensing solid medicinal pills according to claim 1, wherein the inner cross-section of the opening of said outlet (106; 506) is less than 4 cm.
5. The receptacle (100; 200; 400; 500) for containing and dispensing solid medicinal pills according to claim 1, additionally comprising an inlet for introducing at least one solid medicinal pill into said chamber (104; 204; 404) to be dispensed via said outlet (106; 506).
6. The receptacle (100; 200; 400; 500) for containing and dispensing solid medicinal pills according to claim 6, wherein said inlet is hingedly attached to an

opening provided in a surface of said container (102), or wherein said inlet comprises an opening covered by a semi-flexible material having a resealably openable slit, or optionally wherein said inlet comprises a one-way valve.

7. The receptacle (100; 200; 400; 500) for containing and dispensing solid medicinal pills according to claim 1 wherein said receptacle (100; 200; 400; 500) is provided with a handle for bringing and positioning the outlet (106; 506) of the receptacle (100; 200; 400; 500) in dispensing relation vis-à-vis the mouth of the user.
8. The receptacle (100; 200; 400; 500) for containing and dispensing solid medicinal pills according to claim 1, wherein said sealing closure (112; 212; 412; 512) is maintained in its closed position by interengagement with a frame (114) provided inside said outlet (106; 506).
9. The receptacle (100; 200; 400; 500) for containing and dispensing solid medicinal pills according to claim 1, wherein said sealing closure (112; 212; 412; 512) is hingedly attached to an at least partially flexible frame means provided inside said outlet (106; 506) and said sealing closure (112; 212; 412; 512) is maintained in its closed position by interengagement with said flexible frame (114), optionally, wherein said at least partially flexible frame (114) is provided with an opening sealable by said sealing closure (112; 212; 412; 512) and said sealing closure (112; 212; 412; 512) is displaceable through said opening in response to an air pressure differential between the two sides of said frame (114), and optionally said sealing closure (112; 212; 412; 512) is inwardly displaceable through said opening toward said chamber (104; 204; 404) for insertion of pills therein and outwardly displaceable toward said outlet (106; 506) for dispensing of pills to the mouth of the user.
10. The receptacle (100; 200; 400; 500) for containing and dispensing solid medicinal pills according to claim 1 wherein said displaceable sealing closure (112; 212; 412; 512) is formed from a plurality of flexible flaps, optionally wherein said flexible flaps are at least partially overlapping.
11. The receptacle (100; 200; 400; 500) for containing and dispensing solid medicinal pills according to claim 1 wherein said displaceable sealing closure (112; 212; 412; 512) is formed from a plurality of flexible filaments.
12. The receptacle (100; 200; 400; 500) for containing and dispensing solid medicinal pills according to claim 1 wherein said outlet is releasably connected

to said receptacle (100; 200; 400; 500), optionally wherein said releasable outlet (106; 506) is disposable and replaceable.

13. The receptacle (100; 200; 400; 500) for containing and dispensing solid medicinal pills according to claim 1 wherein said spout outlet (106; 506) is provided with a stop surface positioned in spaced apart relationship, relative to and outwardly in front of said displaceable sealing closure (112; 212; 412; 512), said stop surface being provided with air holes enabling air displacement between the mouth of the user and said sealing closure to open the same, said surface being adapted to deflect a pill exiting said sealing closure (112; 212; 412; 512) and encountering said surface, said outlet being further provided with an opening, positioned to dispense, under the effect of gravity, a pill exiting said sealing closure.
14. Use of a receptacle (100; 200; 400; 500) according to one of the claims 1 to 13 for dispensing at least one pill from said chamber (104; 204; 404), wherein any one linear measurement of said at least one pill is between 3mm and 30mm.
15. Use of a receptacle (100; 200; 400; 500) according to claim 5 in conjunction with an automated, controlled, solid pill medication dispenser.

Patentansprüche

1. Behälter (100; 200; 400; 500) zur Bevorratung und zur Abgabe von festen medizinischen Tabletten direkt in den Mund des Benutzers, mit einem Behältnis mit einer Vorratskammer (104; 204; 404), welche zu einem Austritt (106; 506) führt, der bequem zwischen die Lippen des Benutzers passt, wobei dieser Austritt (106; 506) des Weiteren einen bewegbaren abdichtenden Verschluss (112; 212; 412; 512) aufweist, der sich normal in einer geschlossenen Position befindet, **dadurch gekennzeichnet, dass** die Bewegung dieses Verschlusses aus der geschlossenen Position, um die Abgabe von mindestens einer Tablette aus der Kammer (104; 204; 404) zu ermöglichen, ausschließlich durch Zusammenwirken des Mundes des Benutzers mit dem Austritt (106; 506) erfolgt.
2. Behälter (100; 200; 400; 500) zur Bevorratung und Abgabe von festen medizinischen Tabletten nach Anspruch 1, wobei die Bewegung des Verschlusses (112; 212; 412; 512) aus der geschlossenen Position, um die Abgabe von mindestens einer Tablette aus der Kammer (104; 204; 404) zu ermöglichen, durch einen Luftdruckunterschied erfolgt.
3. Behälter (100; 200; 400; 500) zur Bevorratung und

Abgabe von festen medizinischen Tabletten nach Anspruch 1, wobei die Bewegung des Verschlusses (112; 212; 412; 512) aus der geschlossenen Position, um die Abgabe von mindestens einer Tablette aus der Kammer (104; 204; 404) zu ermöglichen, erfolgt, indem der Benutzer mit dem Mund an dem Austritt (106; 506) und dem Verschluss (112; 212; 412; 512) saugt oder indem der Benutzer mit dem Mund gegen die Abgabetülle (106; 506) und den Verschluss (112; 212; 412; 512) bläst.

4. Behälter (100; 200; 400; 500) zur Bevorratung und Abgabe von festen medizinischen Tabletten nach Anspruch 1, wobei der innere Querschnitt des Austritts (106; 506) weniger als 4 cm beträgt.
5. Behälter (100; 200; 400; 500) zur Bevorratung und Abgabe von festen medizinischen Tabletten nach Anspruch 1, welcher zusätzlich eine Aufnahmevorrichtung umfasst, über die mindestens eine feste medizinische Tablette zur Abgabe über den Austritt (106; 506) in der Kammer (104; 204; 404) aufgenommen werden kann.
6. Behälter (100; 200; 400; 500) zur Bevorratung und Abgabe von festen medizinischen Tabletten nach Anspruch 6, wobei die Aufnahmevorrichtung schwenkbar an einer Öffnung an einer Oberfläche des Behältnisses (102) befestigt ist oder wobei die Aufnahmevorrichtung eine Öffnung umfasst, die mit einem halbflexiblen Material abgedeckt ist, welches einen wiederverschließbaren, öffnbaren Schlitz aufweist, oder wobei wahlweise das Aufnahmeteil ein Einwegeventil umfasst.
7. Behälter (100; 200; 400; 500) zur Bevorratung und Abgabe von festen medizinischen Tabletten nach Anspruch 1, wobei der Behälter (100; 200; 400; 500) mit einen Griff aufweist mit dem der Austritt (106; 506) des Behälters (100; 200; 400; 500) dem Mund des Benutzers gegenüber in Abgabeposition gebracht und positioniert werden kann.
8. Behälter (100; 200; 400; 500) zur Bevorratung und Abgabe von festen medizinischen Tabletten nach Anspruch 1, wobei der abdichtende Verschluss (112; 212; 412; 512) durch Ineinandergreifen mit einem in dem Austritt (106; 506) bereitgestellten Rahmen (114) in der geschlossenen Position gehalten wird.
9. Behälter (100; 200; 400; 500) zur Bevorratung und Abgabe von festen medizinischen Tabletten nach Anspruch 1, wobei der abdichtende Verschluss (112; 212; 412; 512) schwenkbar an einem mindestens teilweise flexiblen, in dem Austritt (106; 506) bereitgestellten Rahmen befestigt ist und der abdichtende Verschluss (112; 212; 412; 512) durch In-

einandergreifen mit dem flexiblen Rahmen (114) in der geschlossenen Position gehalten wird, wobei wahlweise der mindestens teilweise flexible Rahmen (114) mit einer Öffnung vorgesehen ist, die durch den abdichtenden Verschluss (112; 212; 412; 512) abdichtbar ist, und der abdichtende Verschluss (112; 212; 412; 512) durch die Öffnung als Reaktion auf einen Luftdruckunterschied zwischen den beiden Seiten des Rahmens (114) bewegbar ist und wahlweise der abdichtende Verschluss (112; 212; 412; 512) durch die Öffnung nach innen in Richtung der Kammer (104; 204; 404) zur Einführung von Tabletten und nach außen in Richtung des Austritts (106; 506) zur Abgabe von Tabletten in den Mund des Benutzers bewegbar ist.

10. Behälter (100; 200; 400; 500) zur Bevorratung und Abgabe von festen medizinischen Tabletten nach Anspruch 1, wobei der bewegbare abdichtende Verschluss (112; 212; 412; 512) aus mehreren flexiblen Klappen gebildet ist, wobei sich diese flexiblen Klappen wahlweise zumindest teilweise überlappen.

11. Behälter (100; 200; 400; 500) zur Bevorratung und Abgabe von festen medizinischen Tabletten nach Anspruch 1, wobei der bewegbare abdichtende Verschluss (112; 212; 412; 512) aus mehreren flexiblen Filamenten gebildet ist.

12. Behälter (100; 200; 400; 500) zur Bevorratung und Abgabe von festen medizinischen Tabletten nach Anspruch 1, wobei der Austritt lösbar mit dem Behälter (100; 200; 400; 500) verbunden ist, wobei der lösbare Austritt (106; 506) wahlweise ein austauschbarer Einwegartikel ist.

13. Behälter (100; 200; 400; 500) zur Bevorratung und Abgabe von festen medizinischen Tabletten nach Anspruch 1, wobei der Austritt (106; 506) mit einer Anschlagfläche versehen ist, die im Verhältnis zu dem bewegbaren abdichtenden Verschluss (112; 212; 412; 512) räumlich beabstandet und nach außen gerichtet vor dem bewegbaren abdichtenden Verschluss (112; 212; 412; 512) angeordnet ist, wobei die Anschlagfläche mit Luftlöchern versehen ist, die eine Luftverdrängung zwischen dem Mund des Benutzers und dem abdichtenden Verschluss ermöglichen, um den Verschluss zu öffnen, wobei die Fläche so angepasst ist, dass eine Tablette, die durch den abdichtenden Verschluss (112; 212; 412; 512) austritt und auf diese Fläche auftrifft, abgelenkt wird, wobei der Austritt weiterhin über eine Öffnung verfügt, die so positioniert ist, dass eine aus dem abdichtenden Verschluss austretende Tablette unter Schwerkrafteinwirkung abgegeben wird.

14. Verwendung eines Behälters (100; 200; 400; 500) nach einem der Ansprüche 1 bis 13 zur Abgabe von

mindestens einer Tablette aus der Kammer (104; 204; 404), wobei jedes der Längenmaße der mindestens einen Tablette zwischen 3 mm und 30 mm liegt.

15. Verwendung eines Behälters (100; 200; 400; 500) nach Anspruch 5 in Verbindung mit einer automatischen, gesteuerten Medikamentenabgabevorrichtung für feste Tabletten.

Revendications

1. Réceptacle (100; 200; 400; 500) pour contenir et distribuer des comprimés médicinaux solides directement dans la bouche de l'utilisateur. Ledit réceptacle comprend un contenant muni d'une chambre de stockage (104; 204; 404) qui conduit à un orifice de sortie (106; 506) en forme de goulotte facile à insérer entre les lèvres d'un utilisateur. Ledit orifice de sortie (106; 506) comprend par ailleurs une fermeture étanche déplaçable (112; 212; 412; 512) ayant une position normalement fermée, **caractérisée en ce que** le déplacement de ladite fermeture à partir de ladite position fermée est actionné uniquement par la bouche de l'utilisateur par l'interaction avec ledit orifice de sortie (106; 506) pour permettre la distribution d'au moins un comprimé à partir de ladite chambre (104; 204; 404).

2. Réceptacle (100; 200; 400; 500) pour contenir et distribuer des comprimés médicinaux solides selon la revendication 1, le déplacement de ladite fermeture (112; 212; 412; 512) à partir de ladite position fermée étant actionné par une pression d'air différentielle de sorte à permettre la distribution d'au moins un comprimé à partir de ladite chambre (104; 204; 404).

3. Réceptacle (100; 200; 400; 500) pour contenir et distribuer des comprimés médicinaux solides selon la revendication 1, le déplacement de ladite fermeture (112; 212; 412; 512) à partir de ladite position fermée, pour permettre la distribution d'au moins un comprimé à partir de ladite chambre (104; 204; 404), étant actionné par une aspiration exercée sur ledit orifice de sortie (106; 506) et ladite fermeture (112; 212; 412; 512) par la bouche de l'utilisateur, ou actionné par l'expiration exercée sur ledit orifice de sortie (106; 506) et ladite fermeture (112; 212; 412; 512) par la bouche de l'utilisateur.

4. Réceptacle (100; 200; 400; 500) pour contenir et distribuer des comprimés médicinaux solides selon la revendication 1, la section transversale intérieure de l'ouverture dudit orifice de sortie (106; 506) étant inférieure à 4 cm.

5. Réceptacle (100; 200; 400; 500) pour contenir et dis-

- tribuer des comprimés médicaux solides selon la revendication 1, comprenant en outre un orifice d'entrée pour introduire au moins un comprimé médical solide dans ladite chambre (104; 204; 404) pour être distribué par l'intermédiaire dudit orifice de sortie (106; 506).
6. Réceptacle (100; 200; 400; 500) pour contenir et distribuer des comprimés médicaux solides selon la revendication 6, ledit orifice d'entrée étant attaché de façon articulée à une ouverture prévue dans une surface dudit contenant (102), ou ledit orifice d'entrée comprenant une ouverture couverte par un matériau semi-flexible ayant une fente refermable, ou ledit orifice d'entrée comprenant en option un clapet anti-retour.
7. Réceptacle (100; 200; 400; 500) pour contenir et distribuer des comprimés médicaux solides selon la revendication 1, ledit réceptacle (100; 200; 400; 500) étant muni d'un manche pour amener et placer l'orifice de sortie (106; 506) du réceptacle (100; 200; 400; 500) en position de distribution sur la bouche de l'utilisateur.
8. Réceptacle (100; 200; 400; 500) pour contenir et distribuer des comprimés médicaux solides selon la revendication 1, ladite fermeture étanche (112; 212; 412; 512) étant maintenue en position fermée par accouplement avec un cadre (114) prévu dans ledit orifice de sortie (106; 506).
9. Réceptacle (100; 200; 400; 500) pour contenir et distribuer des comprimés médicaux solides selon la revendication 1, ladite fermeture étanche (112; 212; 412; 512) étant attachée de façon articulée sur un cadre au moins partiellement flexible prévu dans ledit orifice de sortie (106; 506) et ladite fermeture étanche (112; 212; 412; 512) étant, en option, maintenue dans sa position fermée par accouplement avec ledit cadre flexible (114), ledit cadre (114) au moins partiellement flexible étant muni d'une ouverture pouvant être fermée par ladite fermeture étanche (112; 212; 412; 512) et ladite fermeture étanche (112; 212; 412; 512) étant déplaçable à travers ladite ouverture en réponse à une pression d'air différentielle entre les deux côtés dudit cadre (114), et ladite fermeture étanche (112; 212; 412; 512) optionnelle étant déplaçable vers l'intérieur à travers ladite ouverture en direction de ladite chambre (104; 204; 404) où les comprimés seront introduits, et déplaçable vers l'extérieur en direction dudit orifice de sortie (106; 506) pour distribuer les comprimés vers la bouche de l'utilisateur.
10. Réceptacle (100; 200; 400; 500) pour contenir et distribuer des comprimés médicaux solides selon la revendication 1, ladite fermeture étanche déplaçable (112; 212; 412; 512) étant formée de plusieurs rabats flexibles, lesdits rabats flexibles se chevauchant au moins partiellement en option.
11. Réceptacle (100; 200; 400; 500) pour contenir et distribuer des comprimés médicaux solides selon la revendication 1, ladite fermeture étanche déplaçable (112; 212; 412; 512) étant formée de plusieurs filaments flexibles.
12. Réceptacle (100; 200; 400; 500) pour contenir et distribuer des comprimés médicaux solides selon la revendication 1, ledit orifice de sortie étant relié de façon amovible audit réceptacle (100; 200; 400; 500), ledit orifice de sortie (106; 506) amovible en option étant jetable et remplaçable.
13. Réceptacle (100; 200; 400; 500) pour contenir et distribuer des comprimés médicaux solides selon la revendication 1, ledit bec de sortie (106; 506) étant muni d'une surface d'arrêt positionnée à distance l'un de l'autre, par rapport et vers l'extérieur en face de ladite fermeture déplaçable (112; 212; 412; 512), ladite surface d'arrêt étant munie de trous d'évacuation d'air permettant le passage de l'air entre la bouche de l'utilisateur et ladite fermeture étanche pour ouvrir cette dernière, ladite surface étant adaptée pour dévier un comprimé sortant de ladite fermeture étanche (112; 212; 412; 512) et venant en contact avec ladite surface, ladite sortie étant en outre munie d'une ouverture, positionnée pour distribuer, sous l'effet de la gravité, un comprimé sortant de ladite fermeture étanche.
14. Utilisation d'un réceptacle (100; 200; 400; 500) selon une des revendications 1 à 13 pour distribuer au moins un comprimé provenant de ladite chambre (104; 204; 404), une quelconque des mesures linéaires dudit au moins un comprimé étant entre 3 mm et 30 mm.
15. Utilisation d'un réceptacle (100; 200; 400; 500) selon la revendication 5 conjointement avec un distributeur à commande automatique de comprimés solides.

Fig 1.

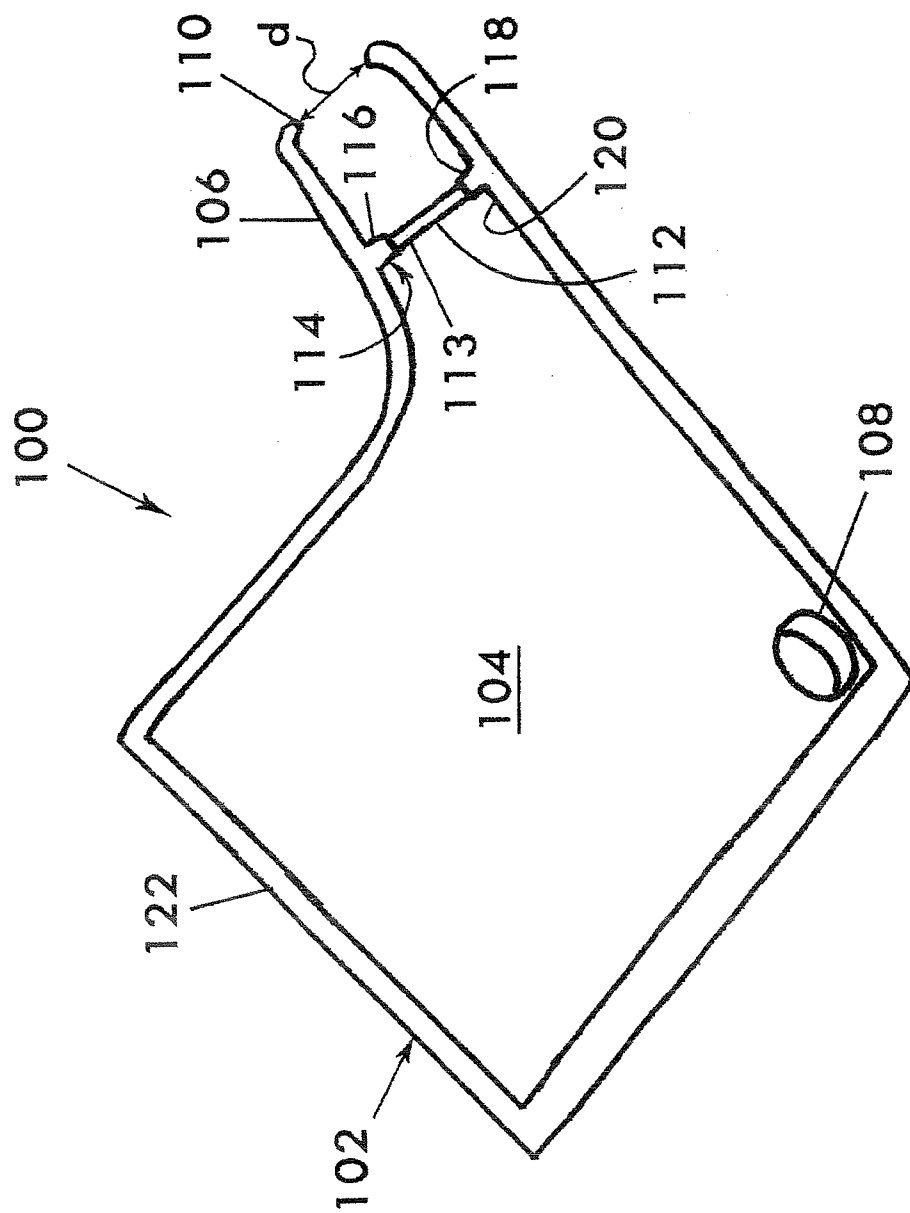


Fig 2a.

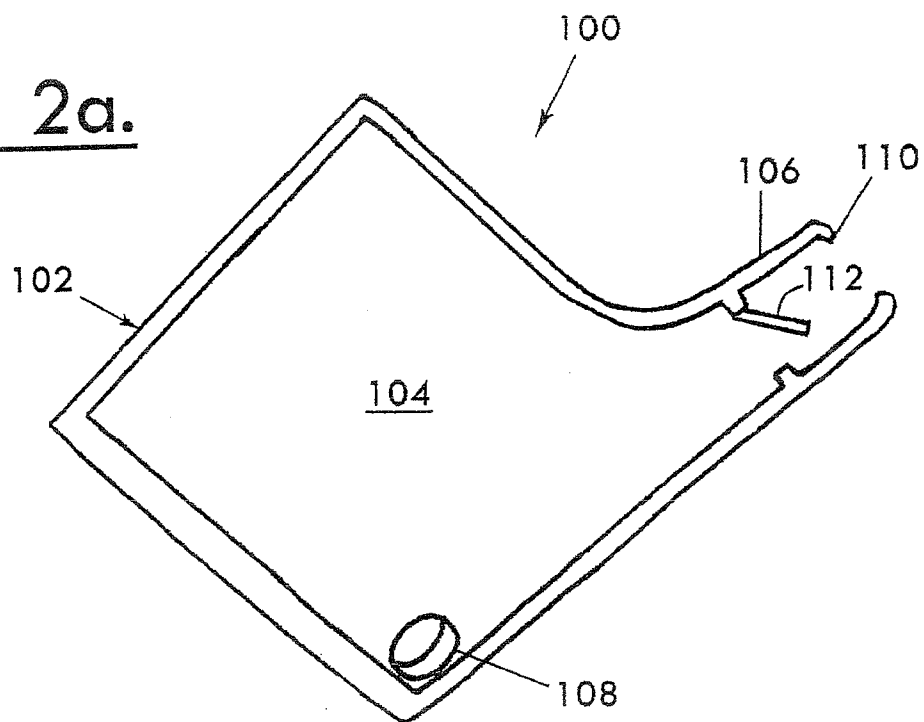


Fig 2b.

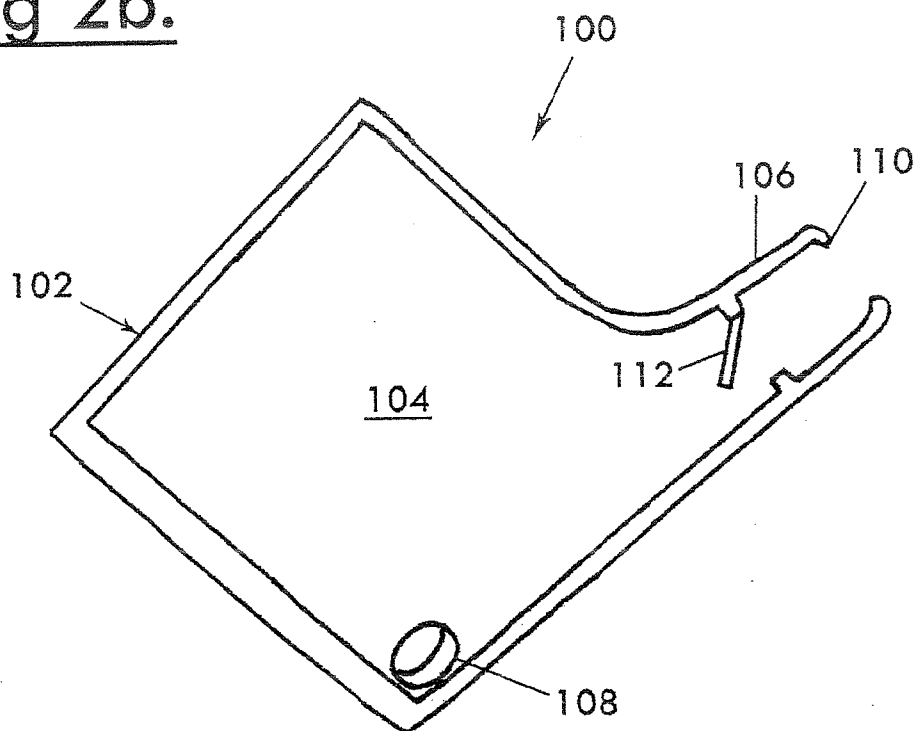


Fig 3.

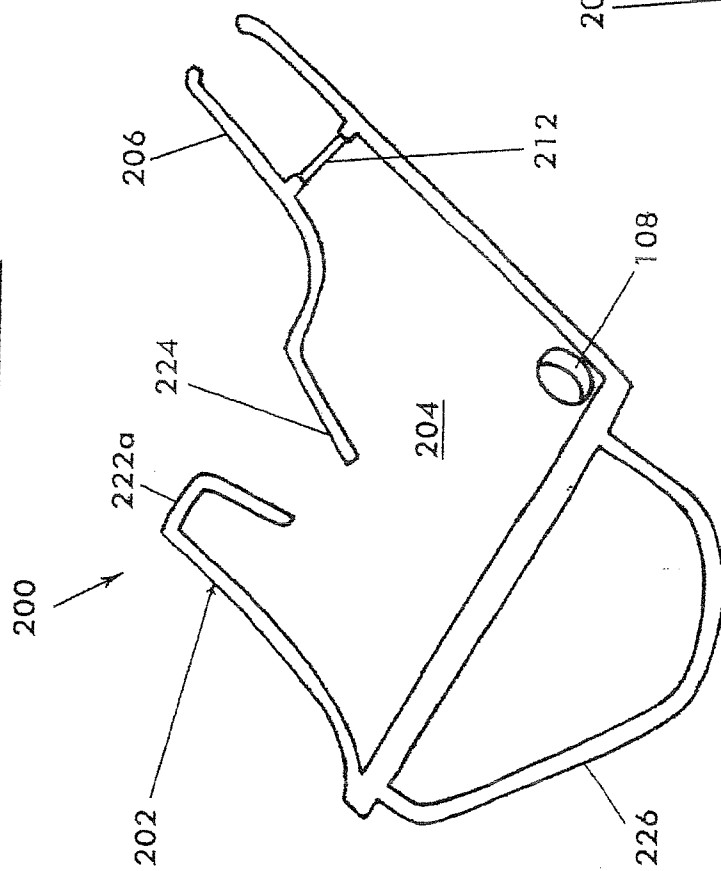


Fig 4.

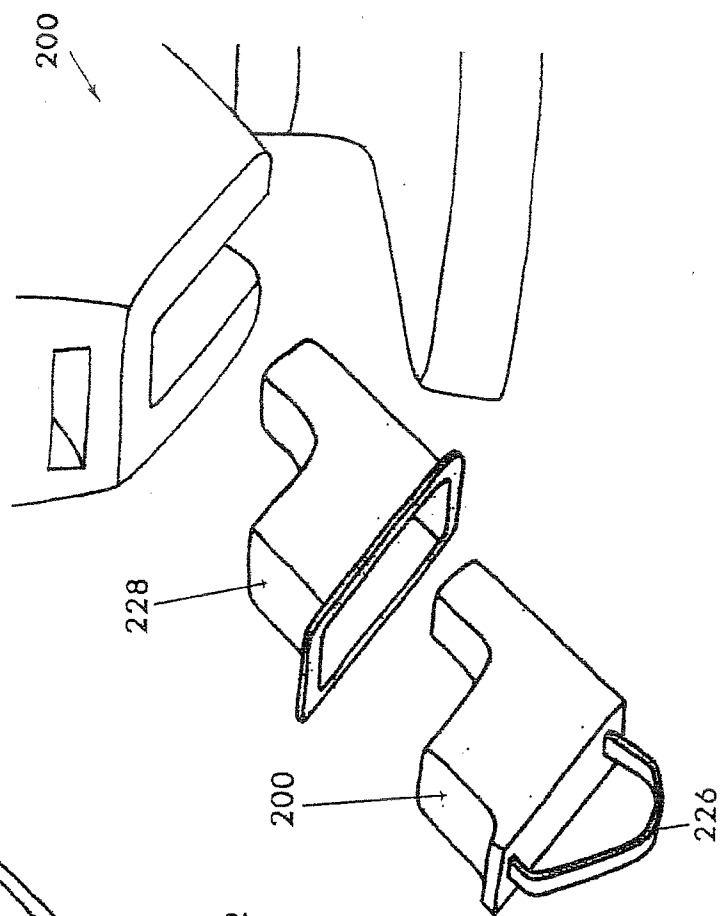
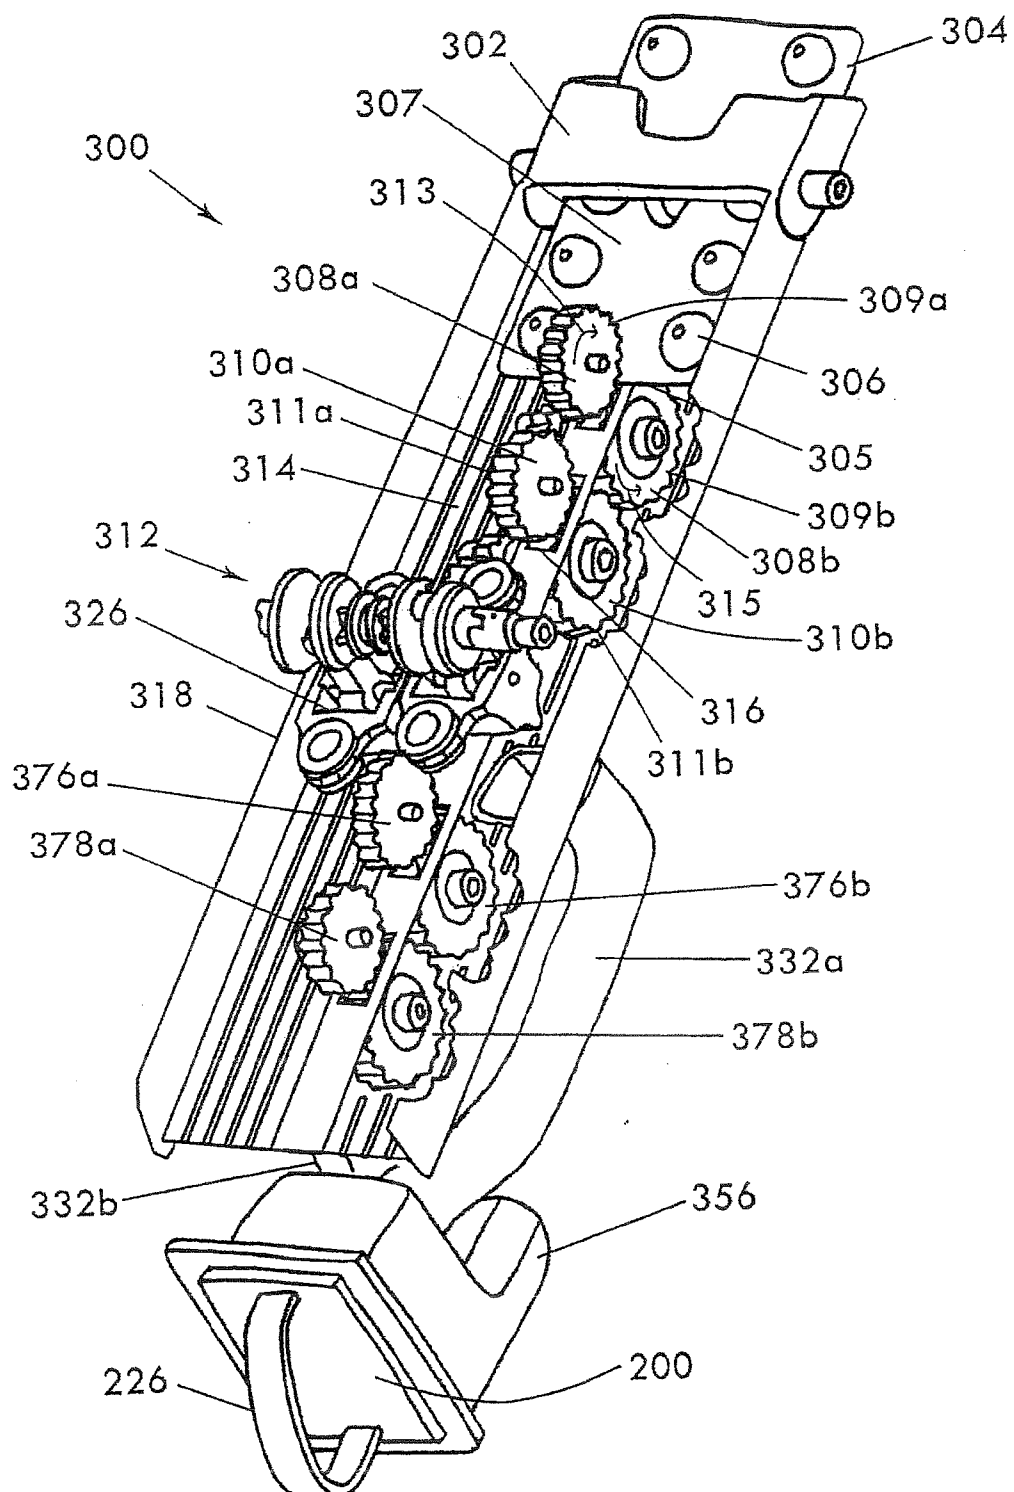
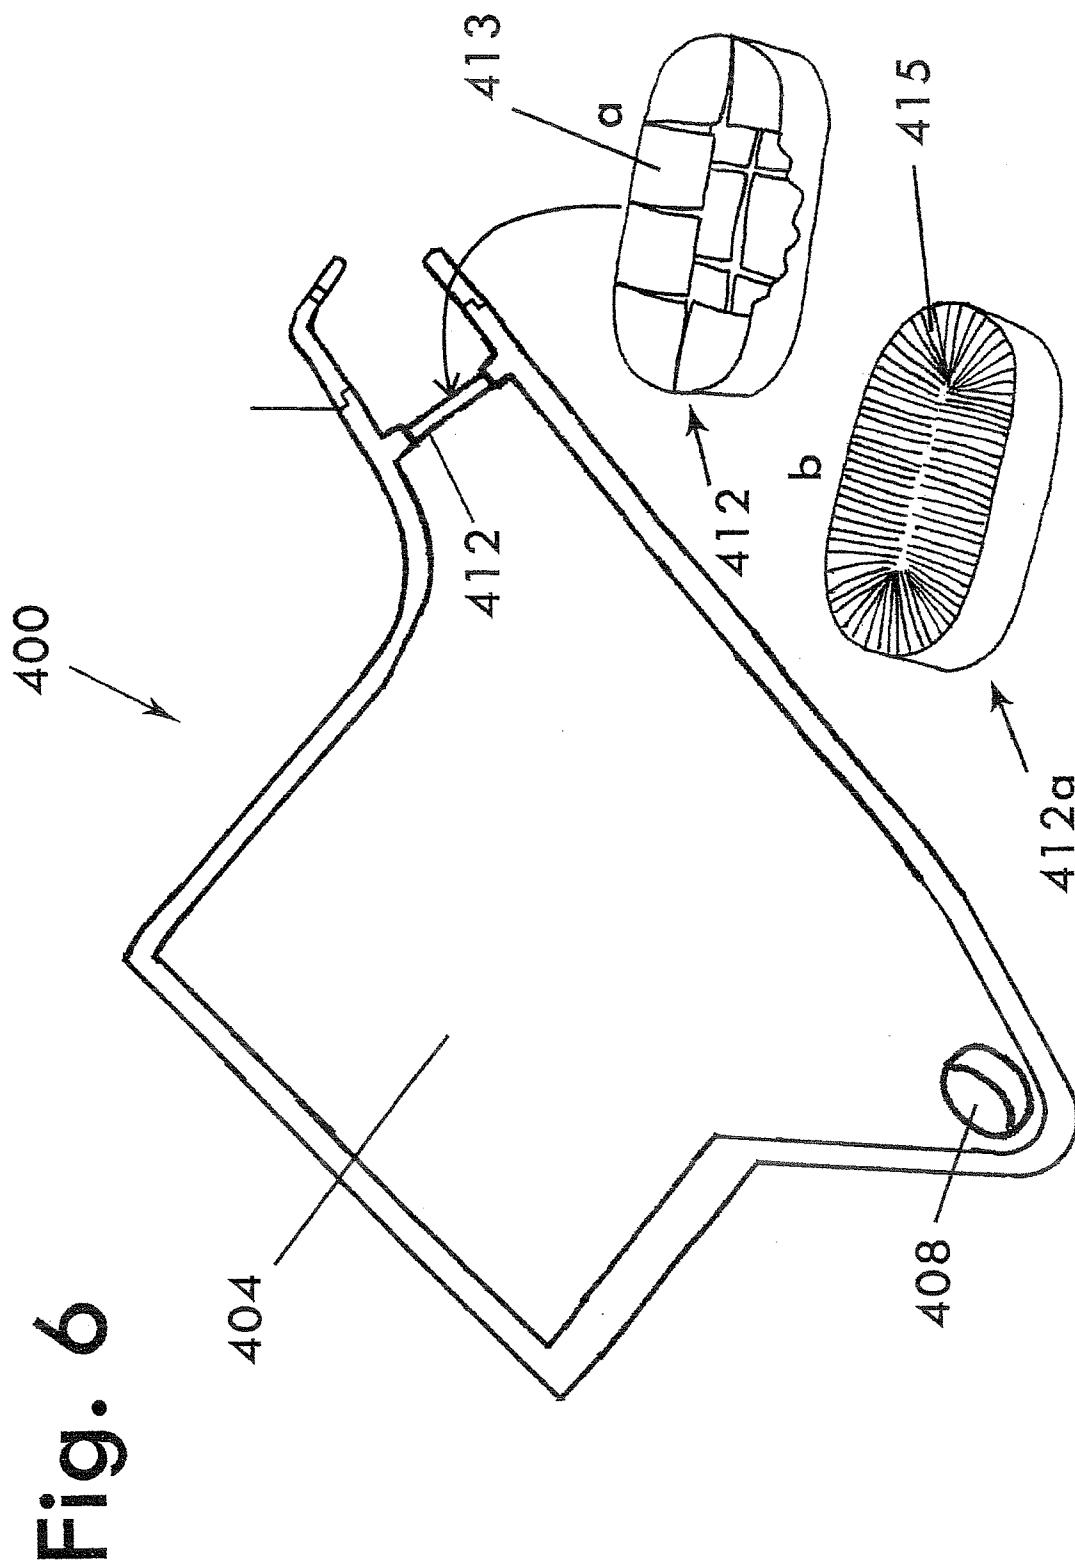
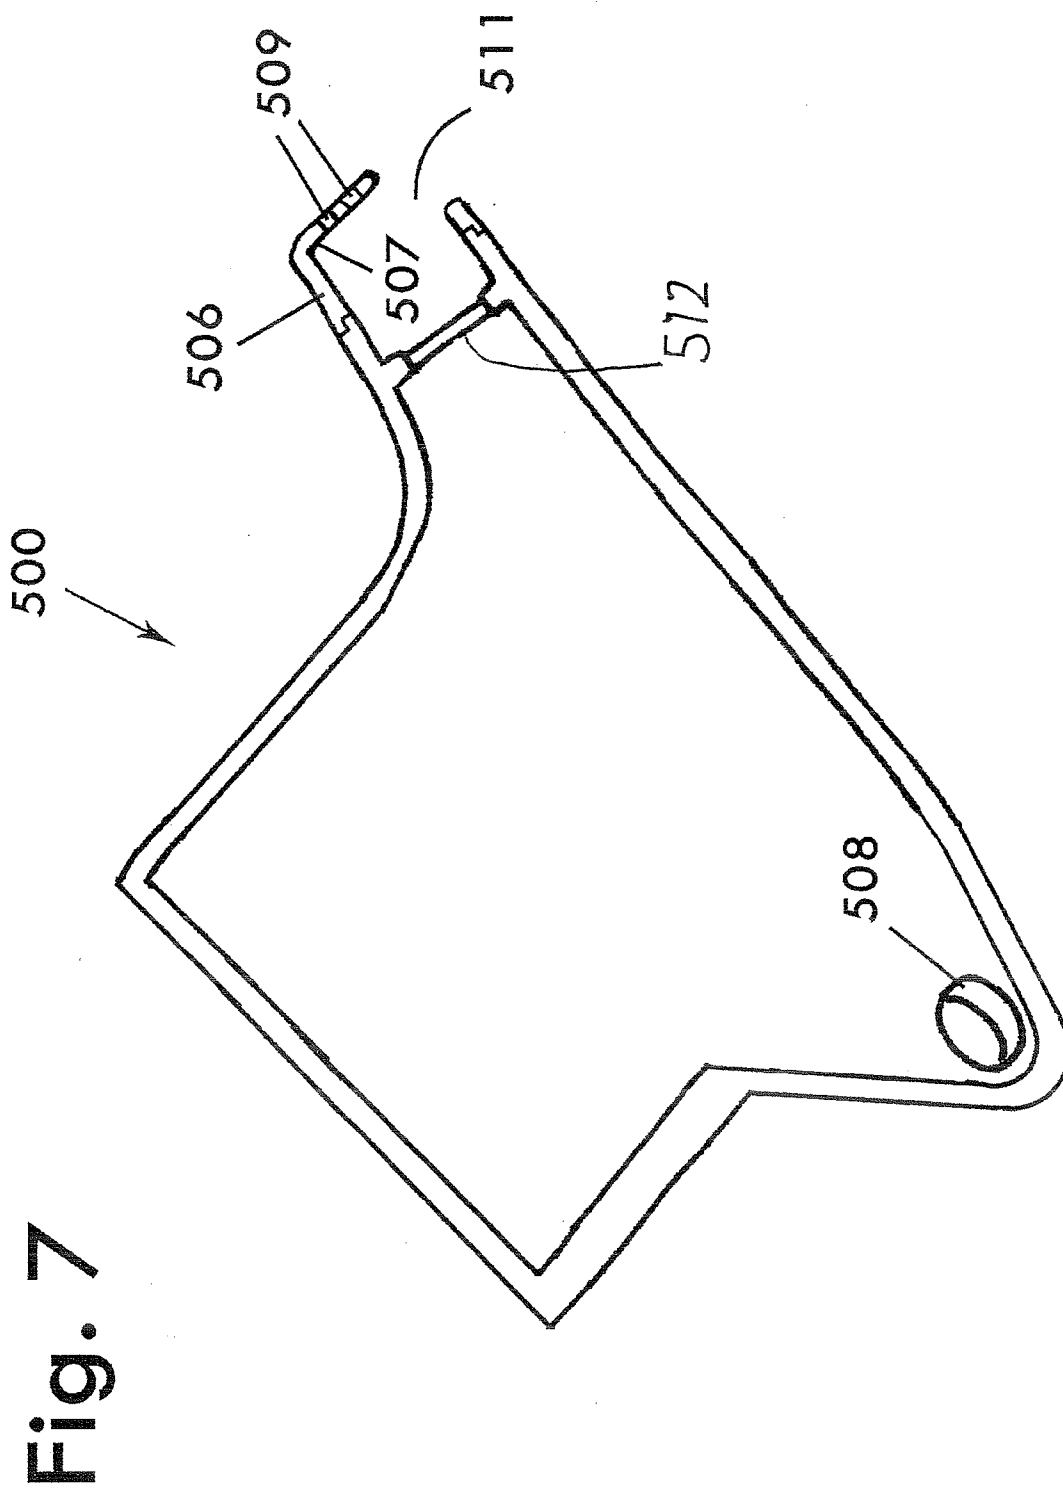


Fig 5.








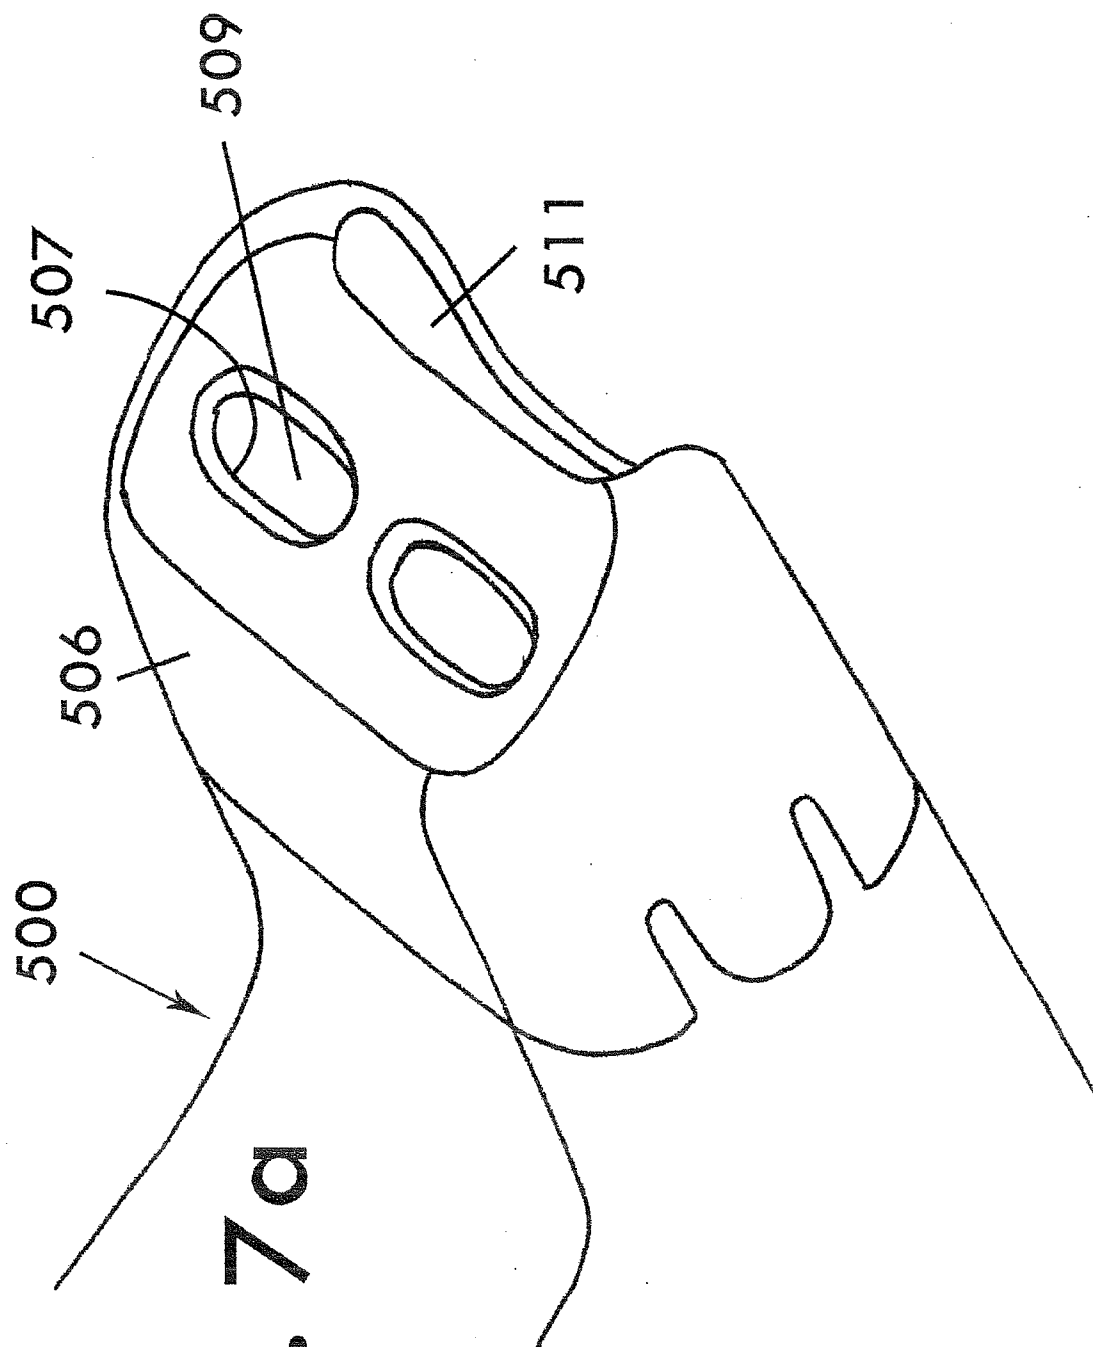


Fig. 7a

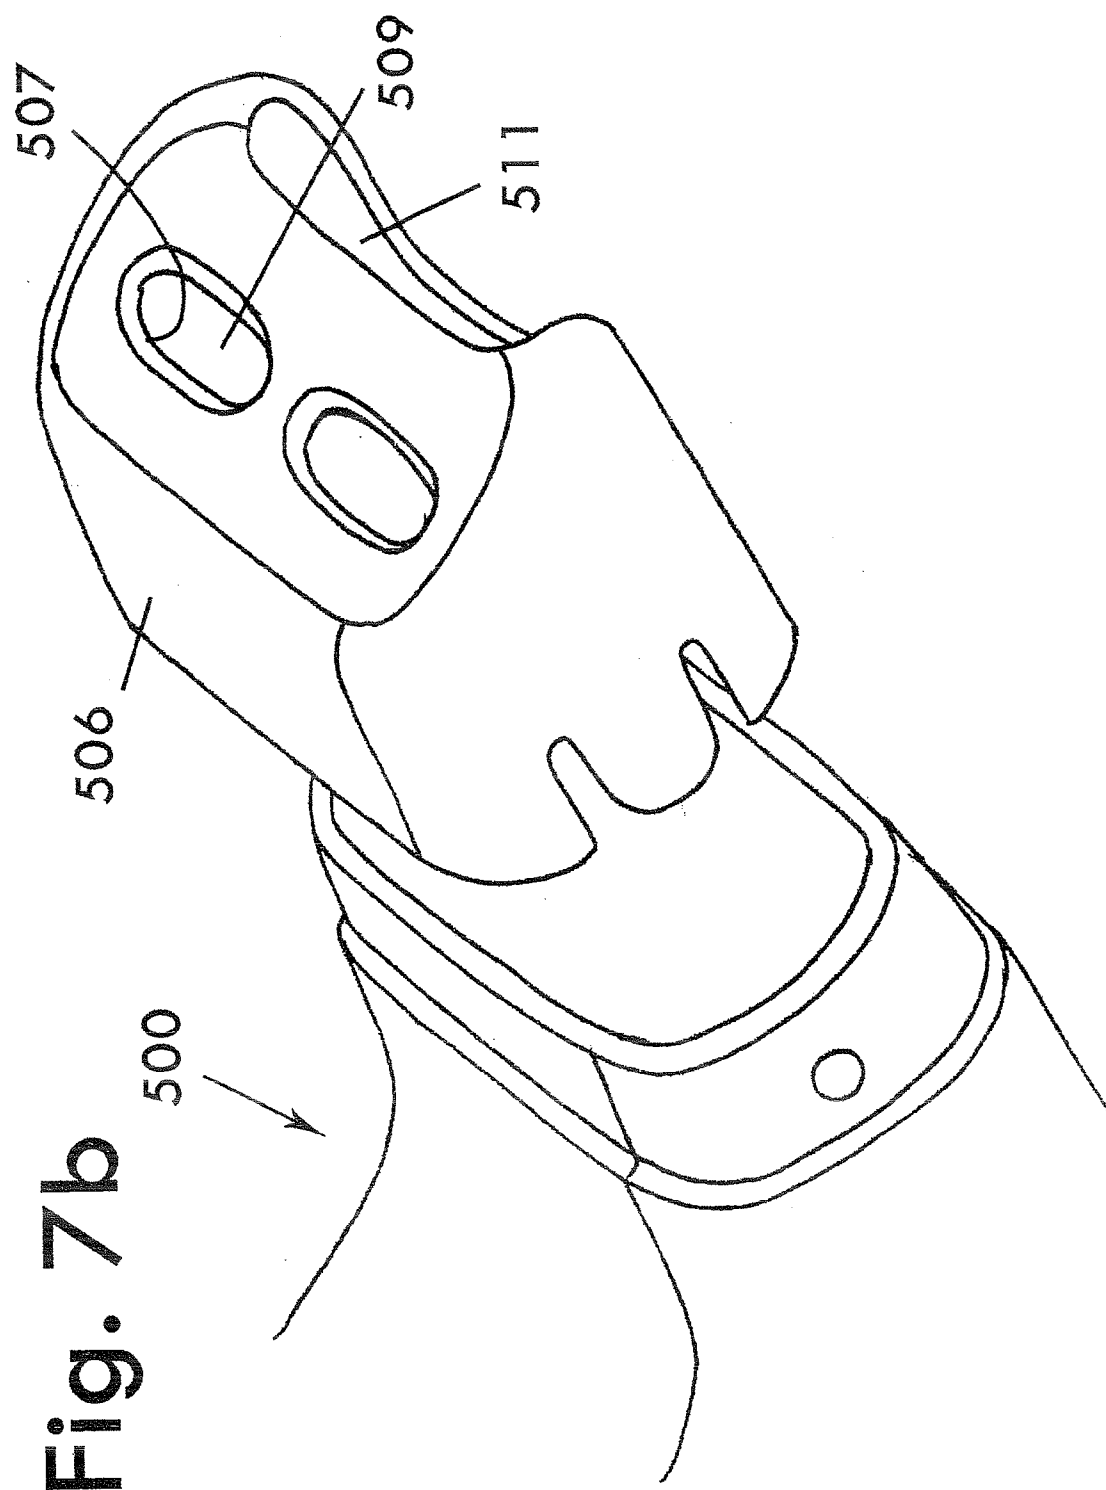

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 5259531 A, Bennett [0007]
- US 4402425 A, von Schukmann [0009]
- US 5657901 A [0011]
- FR 2637266 [0011]
- US 2007114239 A [0011]
- US 4354619 A [0011]
- US 2004124204 A [0011]
- US 7147130 B [0011]
- US 5850919 A [0011]
- US 5018644 A [0011]
- US 4653668 A [0011]
- US 4744492 A [0011]
- US 4784291 A [0011]
- US 6131765 A [0011]
- JP 2008110158 B, Iizuka [0012]
- US 4237884 A [0014]
- IL 220794 [0054] [0055]



SZILÁRD GYÓGYSZERPIRULÁK TÁROLÁSÁRA ÉS KIADAGOLÁSÁRA SZOLGÁLÓ TARTÁLY

SZABADALMI IGÉNYPONTOK

1. Tartály (100; 200; 400; 500) szilárd gyógyszerpirulák tárolására és kiadagolására közvetlenül a felhasználó szájába, amely tartály magában foglal egy konténert tároló kamrával (104; 204; 404), amely egy, a felhasználó ajkai közé való kényelmes behelyezésre méretezett kimenethez (106; 506) vezet, amely kimenet (106; 506) el van továbbá látva egy elmozdítható tömítő záróelemmel (112; 212; 412; 512), amelynek rendes körülmények között zárt helyzete van, azzal jellemezve, hogy a záróelem elmozdulását a zárt helyzetből – a kamrából legalább egy pirula (104; 204; 404) kiadagolásának a lehetővé tétele céljából – egyedül a felhasználónak a szája váltja ki, amely kölcsönhatásban van a kimenettel (106; 506).

2. Az 1. igénypont szerinti, szilárd gyógyszerpirula tárolására és kiadagolására szolgáló tartály (100; 200; 400; 500), amelyben a záróelem (112; 212; 412; 512) elmozdulását a zárt helyzetből – a kamrából legalább egy pirula (104; 204; 404) kiadagolásának a lehetővé tétele céljából – légnyomáskülönbség váltja ki.

3. Az 1. igénypont szerinti, szilárd gyógyszerpirula tárolására és kiadagolására szolgáló tartály (100; 200; 400; 500), amelyben a záróelem (112; 212; 412; 512) elmozdulását a zárt helyzetből – a kamrából legalább egy pirula (104; 204; 404) kiadagolásának a lehetővé tétele céljából – a felhasználó szája által a kimenetre (106; 506) és a záróelemre (112; 212; 412; 512) adott szívás váltja ki, vagy a felhasználó szája által a kimenetre (106; 506) és a záróelemre (112; 212; 412; 512) adott kilégzés váltja ki.

4. Az 1. igénypont szerinti, szilárd gyógyszerpirula tárolására és kiadagolására szolgáló tartály (100; 200; 400; 500), amelyben a kimenet (106; 506) nyílásának belső keresztmetszete 4 cm-nél kisebb.

5. Az 1. igénypont szerinti, szilárd gyógyszerpirula tárolására és kiadagolására szolgáló tartály (100; 200; 400; 500), amely kiegészítőleg magában foglal egy bemenetet legalább egy, a kimeneten (106; 506) keresztül kiadagolandó szilárd gyógyszerpirulának a kamrába (104; 204; 404) való bevezetésére.

6. A 6. igénypont szerinti, szilárd gyógyszerpirula tárolására és kiadagolására szolgáló tartály (100; 200; 400; 500), amelyben a bemenet csuklósan hozzá van erősítve egy, a konténer (102) egyik felületében lévő nyíláshoz, vagy a bemenet magában foglal egy félrugalmas anyag által fedett nyílást, amelynek van egy visszazárhatóan nyitható rése, vagy opcionálisan a bemenet magában foglal egy együtű szelepet.

7. Az 1. igénypont szerinti, szilárd gyógyszerpirula tárolására és kiadagolására szolgáló tartály (100; 200; 400; 500), amely tartály (100; 200; 400; 500) el van látva fogantyúval a tartály (100; 200; 400; 500) kimenetének (106; 506) közel hozására és pozicionálására a felhasználó szájával szemben egy kiadagolási kapcsolatban.

8. Az 1. igénypont szerinti, szilárd gyógyszerpirula tárolására és kiadagolására szolgáló tartály (100; 200; 400; 500), amelyben a tömítő záróelemet (112; 212; 412; 512) zárt helyzetben tartja egy, a kimenet (106; 506) belsejében lévő kerettel (114) való egymásba kapcsolódás.

9. Az 1. igénypont szerinti, szilárd gyógyszerpirula tárolására és kiadagolására szolgáló tartály (100; 200; 400; 500), amelyben a tömítő záróelem (112; 212; 412; 512) csuklósan hozzá van erősítve egy, a kimenet (106; 506) belsejében lévő, legalább részben hajlékony kereteszkozhöz, és a tömítő záróelemet (112; 212; 412; 512) a hajlékony kerettel (114) való egymásba kapcsolódás tartja zárt helyzetben, opcionálisan a legalább részben hajlékony keret (114) el van látva egy, a tömítő záróelemmel (112; 212; 412; 512) zárható nyílással, és a tömítő záróelem (112; 212; 412; 512) a keret (114) két oldala közötti légnyomáskülönbség hatására ezen a nyíláson keresztül mozdítható el, és opcionálisan amely tömítő záróelem (112; 212; 412; 512) befelé mozdítható el a nyíláson keresztül a kamra (104; 204; 404) felé abba pirulák behelyezése céljából, és kifelé mozdítható el a kimenet (106; 506) felé piruláknak a felhasználó szájához való kiadagolása céljából.

10. Az 1. igénypont szerinti, szilárd gyógyszerpirula tárolására és kiadagolására szolgáló tartály (100; 200; 400; 500), amelyben az elmozdítható tömítő záróelem (112; 212; 412; 512) több hajlékony lapból van kialakítva, opcionálisan a hajlékony lapok legalább részben átfedik egymást.

11. Az 1. igénypont szerinti, szilárd gyógyszerpirula tárolására és kiadagolására szolgáló tartály (100; 200; 400; 500), amelyben az elmozdítható tömítő záróelem (112; 212; 412; 512) hajlékony szájak sokaságából van kialakítva.

12. Az 1. igénypont szerinti, szilárd gyógyszerpirula tárolására és kiadagolására szolgáló tartály (100; 200; 400; 500), amelyben a kimenet oldhatóan van a tartályhoz (100; 200; 400; 500) csatlakoztatva, opcionálisan az oldható kimenet (106; 506) elmozdítható és cserélhető.

13. Az 1. igénypont szerinti, szilárd gyógyszerpirula tárolására és kiadagolására szolgáló tartály (100; 200; 400; 500), amelyben a kiöntő kimenet (106; 506) el van látva egy ütközőfelülettel, amely az elmozdítható tömítő záróelemhez (112; 212; 412; 512) képest térben elkülönített kapcsolatban és kifelé előtte van elhelyezve, amely ütközőfelület el van látva levegőnyílásokkal, amelyek lehetővé teszik a levegő elmozdulását a felhasználó szája és a tömítő záróelem között ugyanennek a nyitása céljából, amely felület úgy van kialakítva, hogy egy, a tömítő záróelemen (112; 212;

412; 512) kilépő és a felülettel ütköző pirulát eltérítsen, és amely felület továbbá el van látva egy nyílással, amely úgy van elhelyezve, hogy gravitáció hatására kiadagoljon egy, a tömítő záróelemen kilépő pirulát.

14. Az 1-13. igénypontok egyike szerinti tartály (100; 200; 400; 500) alkalmazása legalább egy pirulának a kamrából (104; 204; 404) való kiadagolására, amely legalább egy pirula bármelyik lineáris mérete 3 mm és 30 mm között van.

15. Az 5. igénypont szerinti tartály (100; 200; 400; 500) alkalmazása szilárd gyógyszerpirulához való, automatikus, szabályozott kiadagolóval együtt.