

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
26 July 2007 (26.07.2007)

PCT

(10) International Publication Number
WO 2007/084155 A2

(51) International Patent Classification:
C08G 75/00 (2006.01) *C08G 79/02* (2006.01)

(21) International Application Number:
PCT/US2006/010636

(22) International Filing Date: 22 March 2006 (22.03.2006)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/664,808 24 March 2005 (24.03.2005) US

(71) Applicant: **THE REGENTS OF THE UNIVERSITY OF CALIFORNIA** [US/US]; Los Alamos National Laboratory, LC/IP, MS A187, Los Alamos, NM 87545 (US).

(72) Inventors: **PIVOVAR, Bryan, S.**; 1997 Cumbers Patio, Los Alamos, NM 87544 (US). **THORN, David, L.**; 49 Grand Canyon Drive, Los Alamos, NM 87544 (US).

(74) Agents: **BORKOWSKY, Samuel, L.** et al.; Los Alamos National Laboratory, LC/IP, MS A187, Los Alamos, NM 87545 (US).

(81) Designated States (*unless otherwise indicated, for every kind of national protection available*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, LY, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (*unless otherwise indicated, for every kind of regional protection available*): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *without international search report and to be republished upon receipt of that report*

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: ANION-CONDUCTING POLYMER, COMPOSITION, AND MEMBRANE

(57) Abstract: Anion-conducting polymers and membranes with enhanced stability to aqueous alkali include a polymer backbone with attached sulfonium, phosphazanium, phosphazene, and guanidinium residues. Compositions also with enhanced stability to aqueous alkali include a support embedded with sulfonium, phosphazanium, and guanidinium salts.



WO 2007/084155 A2

ANION-CONDUCTING POLYMER, COMPOSITION, AND MEMBRANE

RELATED CASES

This application claims the benefit of U.S. Provisional Patent Application Serial Number 60/664,808 filed on March 24, 2005, incorporated by reference herein.

STATEMENT REGARDING FEDERAL RIGHTS

This invention was made with government support under Contract No. W-7405-ENG-36 awarded by the U.S. Department of Energy. The government has certain rights in the invention.

5

FIELD OF THE INVENTION

The present invention relates generally to membranes and more particularly to anion-conducting polymers, compositions, and membranes for fuel cells, electrolyzers, and other chemical or electrochemical applications.

BACKGROUND OF THE INVENTION

10


An electronically non-conducting, ion-conducting medium is an essential part of fuel cells and electrolyzers, can be used in separations and ion exchange, and is also important for other electrochemical applications. Liquids can serve as the ion-conducting medium but there are practical difficulties with the use of liquids and it is highly advantageous to use ion-conducting

15

membranes instead of liquids for electrochemical applications. In all fuel cells and electrolyzers where water is involved, the fundamental reactions require either a proton-conducting membrane or anion-conducting membrane. Of the two, proton-conducting membranes, which operate in acidic media, offer the required combination of adequate longevity and good conductivity at near ambient temperature (25-100 degrees Celsius).

20

The aqueous reduction chemistry that takes place in acidic media is summarized by the equation




25

Precious metals such as platinum and platinum alloy catalysts are used as electrocatalysts in acidic media because they are relatively unreactive with strong acids and can perform the needed electrocatalytic oxidation and

reduction chemistry in acid media. However, the above reduction reaction is relatively slow using a platinum catalyst and requires an overpotential on the order of about 0.3 to 0.5 volts to drive the reaction at a useful rate.


While fuel cells and electrolyzers employing acidic electrolytes require
5 proton-conducting membranes, those employing alkaline electrolytes require anion-conducting (hydroxide-conducting, in particular) membranes. The aqueous reduction chemistry that takes place in alkaline media is summarized by the equation



10 This reduction reaction is relatively rapid compared to the previous reaction and requires a smaller overpotential (about 0.2-0.4 volts) to drive the reaction at a useful rate, which also results in producing less waste heat for removal. Besides the increased efficiency of the oxygen reduction reaction, the expensive noble metal catalysts that are required for proton-conducting
15 systems could be replaced with inexpensive base metal catalysts such as nickel.

Attempts have been made at identifying and developing materials useful for hydroxide-conducting membranes. Examples of these materials include cationic polymers with tetraalkylammonium and N-alkylpyridinium side chains
20 and mobile hydroxide counterions. The chemical stability of these polymers has been reported in "Ionic Polymers VI. Chemical Stability of Strong Base Anion Exchangers in Aggressive Media," Polymer Degradation and Stability, vol. 70 (2000) pp. 463-468, incorporated by reference herein. According to this paper, exposing these polymers to concentrated alkali results in chemical degradation
25 of the side chains. Some of the degradation chemistry for one of these polymers in concentrated alkali is shown SCHEME 1 below.

SCHEME 1

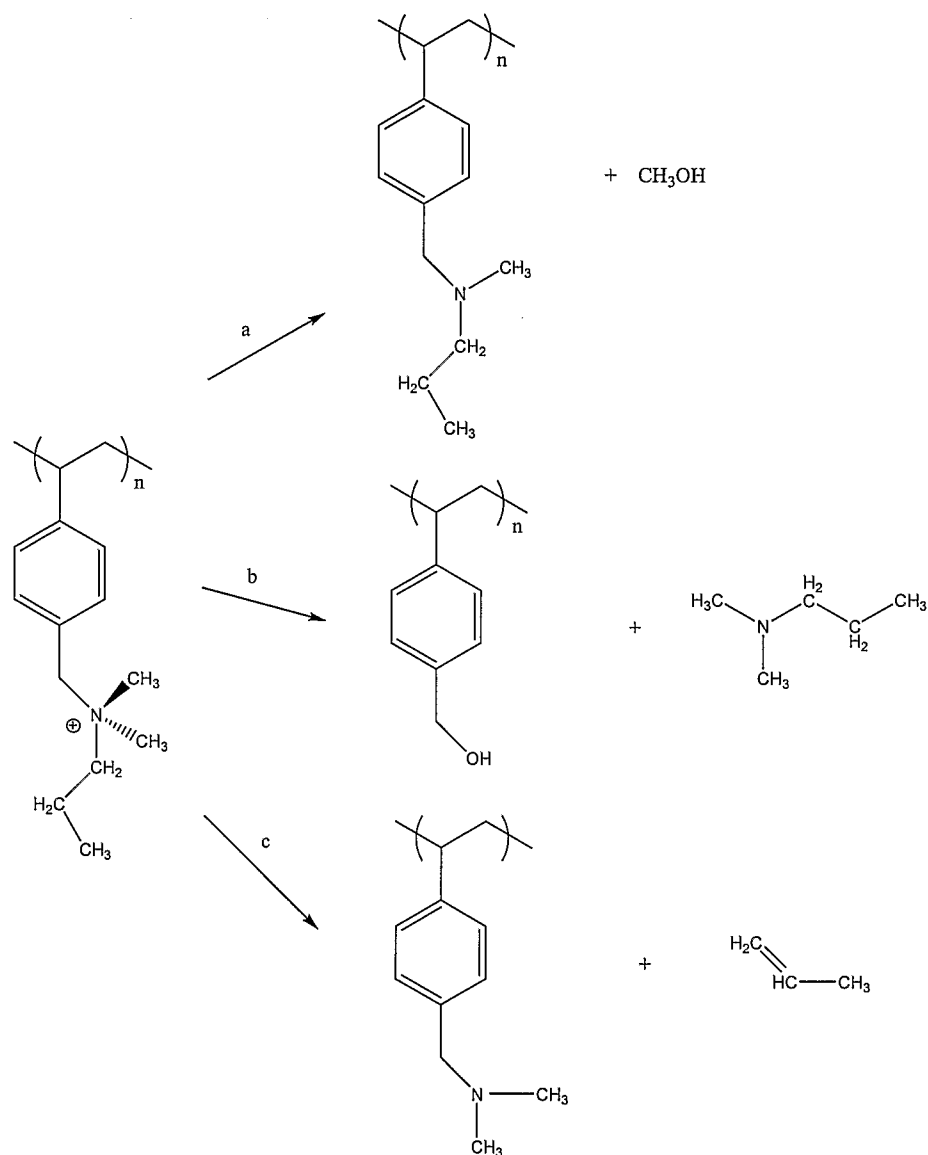

Pathway 'a' of SCHEME 1 shows polymer degradation by demethylation of the
 5 starting cationic polymer. This pathway produces a neutral polymer with an
 amine side chain and a molecule of methanol. Pathway 'b' shows a
 degradation that generates polymer with a benzylic alcohol side chain; a
 molecule of a neutral amine is also released. Pathway c shows a beta-
 elimination degradation. The beta-elimination of the starting cationic polymer
 10 results in the production of a neutral polymer with an amine side chain. An
 olefin molecule is also produced.

The use of anionic-conducting membranes for fuel cells has been reviewed by Varcoe et al. in "Prospects for Alkaline Anion-Exchange Membranes in Low Temperature Fuel Cells," Fuel Cells, vol. 4, no. 4 (2004), pp. 1-14, incorporated by reference herein. According to this paper, anion-conducting membranes suffer from performance loss when they are used in the air. While the reasons for the loss in performance are not fully understood, it is believed that the degradation of the polymer and the formation of carbonates play an important role.

Anion-conducting membranes, hydroxide-conducting membranes in particular, that are chemically stable, highly conducting, and not significantly affected by degradation or by the formation of carbonates remain desirable.


Therefore, an object of the present invention is an anion-conducting membrane that is more stable to chemical degradation at high pH than currently available anion exchange membranes.

Another object of the present invention is a polymer that may be used to prepare a robust anion-conducting membrane.


Additional objects, advantages and novel features of the invention will be set forth in part in the description which follows, and in part will become apparent to those skilled in the art upon examination of the following or may be learned by practice of the invention. The objects and advantages of the invention may be realized and attained by means of the instrumentalities and combinations particularly pointed out in the appended claims.

SUMMARY OF THE INVENTION

In accordance with the purposes of the present invention, as embodied and broadly described herein, the present invention includes a polymeric reaction product of the reaction of at least one compound having the structure

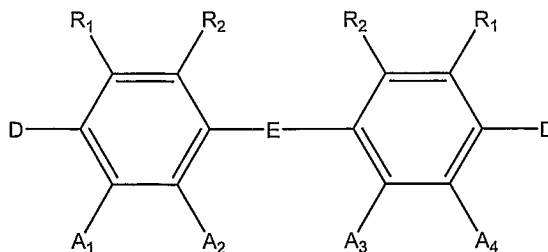

with at least one compound having the structure

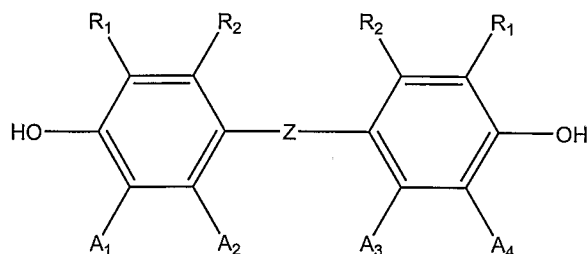

wherein D is halide selected from F, Cl, Br, and I;


wherein E is selected from $-\text{SO}_2-$, $-\text{C}(=\text{O})-$, and $-\text{P}(=\text{O})(\text{aryl})-$;

wherein Z is a direct bond or $-\text{C}(\text{CX}_3)_2-$ where X is hydrogen or fluorine;

- 5 wherein R_1 and R_2 independently of one another denote H, an alkyl, cycloalkyl, alkenyl, aryl, or aralkyl group having 1 to 10 carbon atoms or a heterocyclic group having 4 to 20 carbon atoms;

wherein R_1 and R_2 may together form a $-(\text{CH}_2)_2-$, $-(\text{CH}_2)_3-$, $-(\text{CH}_2)_4-$, $-(\text{CH}_2)_5-$, $-\text{CH}=\text{CH}-$, or $-\text{CH}=\text{CH}-\text{CH}=\text{CH}-$;


- 10 wherein A_1 , A_2 , A_3 , and A_4 are independently selected from hydrogen, alkyl, cycloalkyl, alkenyl, aryl, aralkyl having 1 to 10 carbon atoms, a heterocyclic group having 4 to 20 carbon atoms, and a residue of the formula

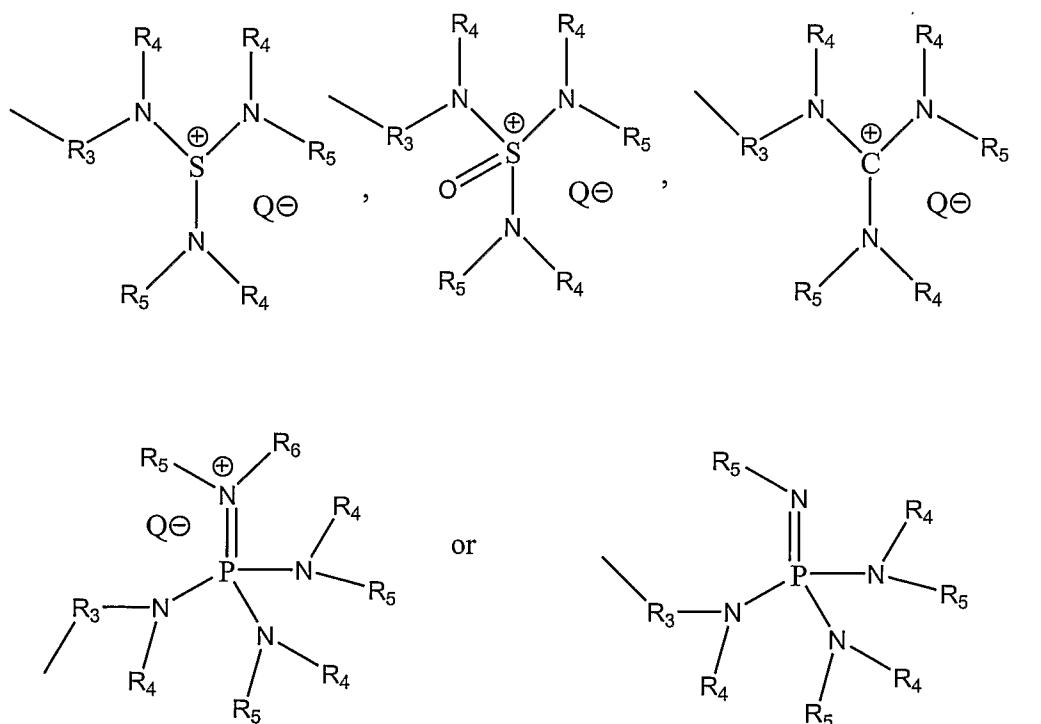

wherein R_3 is a direct bond or a group selected from $-(\text{CH}_2\text{CH}_2)-$, $-(\text{C}_6\text{H}_4)-$,


$-(CF_2CF_2)-$, $-(CH_2CH_2CH_2)-$; wherein R_4 and R_5 independently of one another denote an alkyl, cycloalkyl, alkenyl, aryl, or aralkyl group having 1 to 10 carbon atoms or a heterocyclic group having 4 to 20 carbon atoms; wherein R_4 and R_5 may together form a $-(CH_2)_2-$, $-(CH_2)_3-$, $-(CH_2)_4-$, $-(CH_2)_5-$, $-CH=CH-$,
 5 or $-CH=CH-CH=CH-$; wherein R_6 is selected from the group consisting of H, alkyl, cycloalkyl; wherein Q is any anion; and with the caveat that the polymeric reaction product is prepared from monomer having at least 5 mole percent of the residue.

The invention also includes a composition of a support and a salt
 10 embedded in the support, the salt being selected from the group consisting of

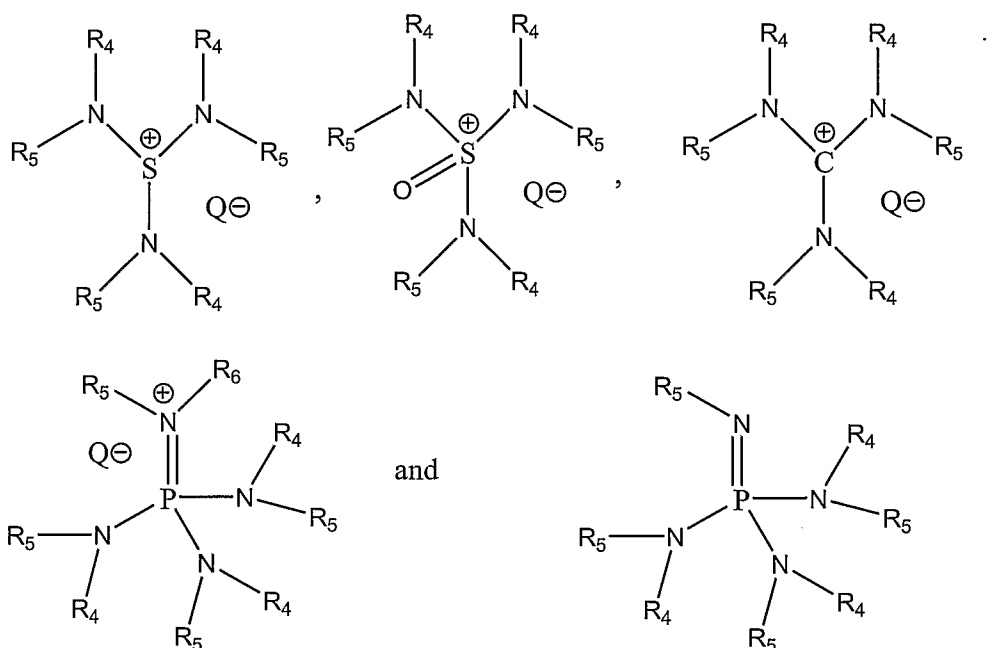


wherein R_4 and R_5 independently of one another denote an alkyl, cycloalkyl, alkenyl, aryl, or aralkyl group having 1 to 10 carbon atoms or a heterocyclic group having 4 to 20 carbon atoms; wherein R_4 and R_5 may together form a
 15 $-(CH_2)_2-$, $-(CH_2)_3-$, $-(CH_2)_4-$, $-(CH_2)_5-$, $-CH=CH-$, or $-CH=CH-CH=CH-$; wherein R_6 is selected from H, alkyl, cycloalkyl; and wherein Q is any anion. The invention also includes a membrane prepared using this composition.

The invention also includes a polymer having the structure




- wherein Z is a direct bond or a chemical group independently selected from -O-, -S-, -SO₂-, -C(CH₃)₂-, -C(CF₃)₂-, -C(=O)-, -P(=O)(aryl)-, phenyl; wherein R₁ and R₂ independently of one another denote H, an alkyl, cycloalkyl, alkenyl, aryl, or aralkyl group having 1 to 10 carbon atoms or a heterocyclic group having 4 to 20 carbon atoms; wherein R₁ and R₂ together may form a -(CH₂)₂-, -(CH₂)₃-, -(CH₂)₄-, -(CH₂)₅-, -CH=CH-, or -CH=CH-CH=CH-; and wherein A₁ and A₂ are selected from hydrogen, alkyl, cycloalkyl, alkenyl, aryl, aralkyl group having 1 to 10 carbon atoms, a heterocyclic group having 4 to 20 carbon atoms, and a residue selected from those of the formula

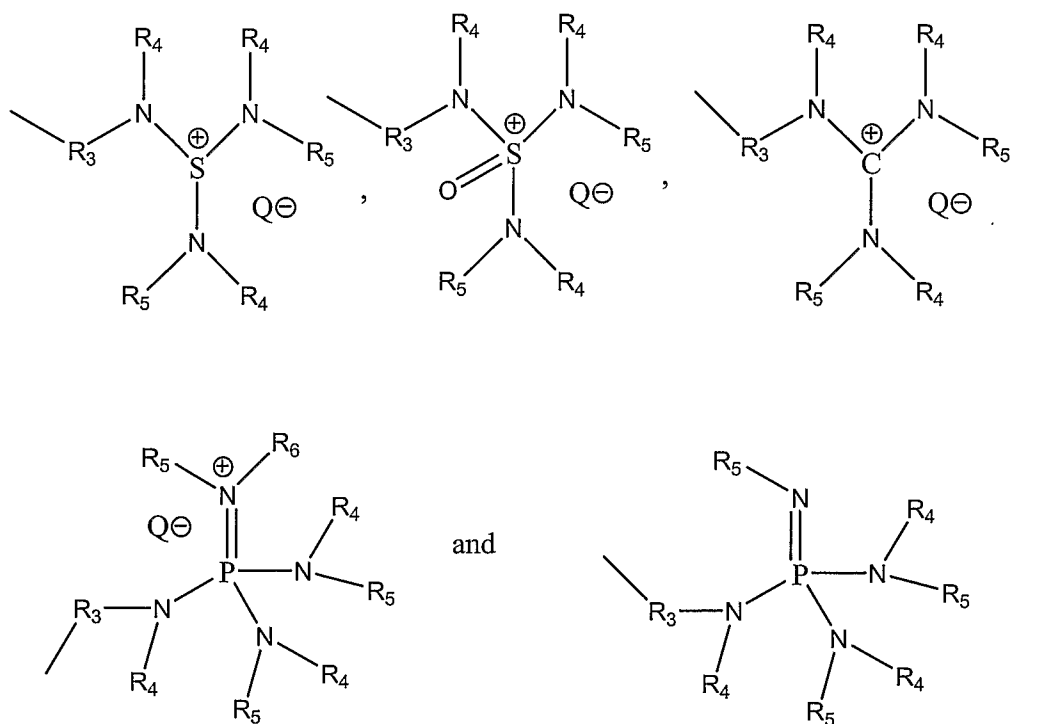

- wherein R₃ is a direct bond or a group selected from -(CH₂CH₂)-, -(C₆H₄)-, -(CF₂CF₂)-, -(CH₂CH₂CH₂)-; wherein R₄ and R₅ independently of one another denote an alkyl, cycloalkyl, alkenyl, aryl, or aralkyl group having 1 to 10 carbon

atoms or a heterocyclic group having 4 to 20 carbon atoms; wherein R_4 and R_5 may together form a $-(CH_2)_2-$, $-(CH_2)_3-$, $-(CH_2)_4-$, $-(CH_2)_5-$, $-CH=CH-$, or $-CH=CH-CH=CH-$; wherein R_6 is selected from H, alkyl or cycloalkyl; wherein Q is any anion; and with the caveat that the polymer has at least 1 weight percent of the residue.


The invention also includes a polymer of the formula

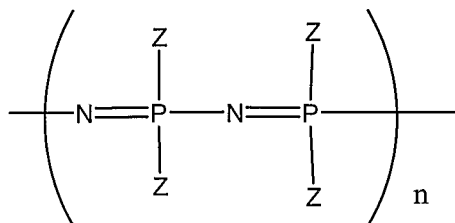


wherein n is any integer greater than 1; wherein Z is NR_1R_2 or $N(=PZ_3)$; and wherein R_1 and R_2 are independently selected from C_1 to C_{10} alkyl, C_1 to C_{10} partially fluorinated alkyl, or C_1 to C_{10} fluorinated alkyl, and also wherein R_1 and R_2 may together form a $-(CH_2)_2-$, $-(CH_2)_3-$, $-(CH_2)_4-$, $-(CH_2)_5-$, $-CH=CH-$, or $-CH=CH-CH=CH-$.

DETAILED DESCRIPTION

The present invention is concerned with polymers and anion-conducting (hydroxide- and/or carbonate-conducting, in particular) membranes. Polymers of this invention may be prepared, for example, by condensation polymerization by reacting a compound of the formula

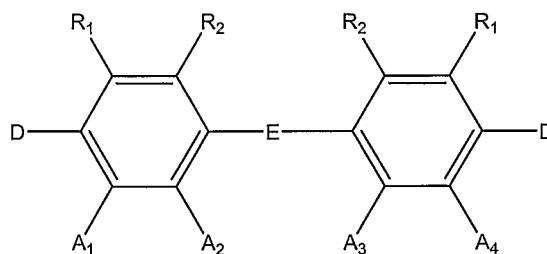

with at least one compound of the formula

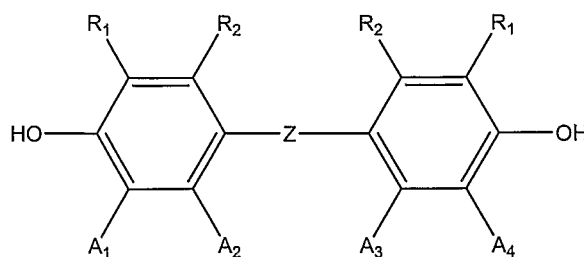

wherein D is halide selected from F, Cl, Br, and I;

wherein E is selected from $-\text{SO}_2-$, $-\text{C}(=\text{O})-$, and $-\text{P}(=\text{O})(\text{aryl})-$;

wherein Z is a direct bond or $-\text{C}(\text{CX}_3)_2-$ where X is hydrogen or fluorine;


wherein R_1 and R_2 independently of one another denote H, an alkyl, cycloalkyl,

5 alkenyl, aryl, or aralkyl group having 1 to 10 carbon atoms or a heterocyclic group having 4 to 20 carbon atoms; wherein R_1 and R_2 may together form a

$-(\text{CH}_2)_2-$, $-(\text{CH}_2)_3-$, $-(\text{CH}_2)_4-$, $-(\text{CH}_2)_5-$, $-\text{CH}=\text{CH}-$, or $-\text{CH}=\text{CH}-\text{CH}=\text{CH}-$;

wherein A_1 , A_2 , A_3 , and A_4 are independently selected from hydrogen, alkyl, cycloalkyl, alkenyl, aryl, aralkyl having 1 to 10 carbon atoms, a heterocyclic

10 group having 4 to 20 carbon atoms, and a residue of the formula

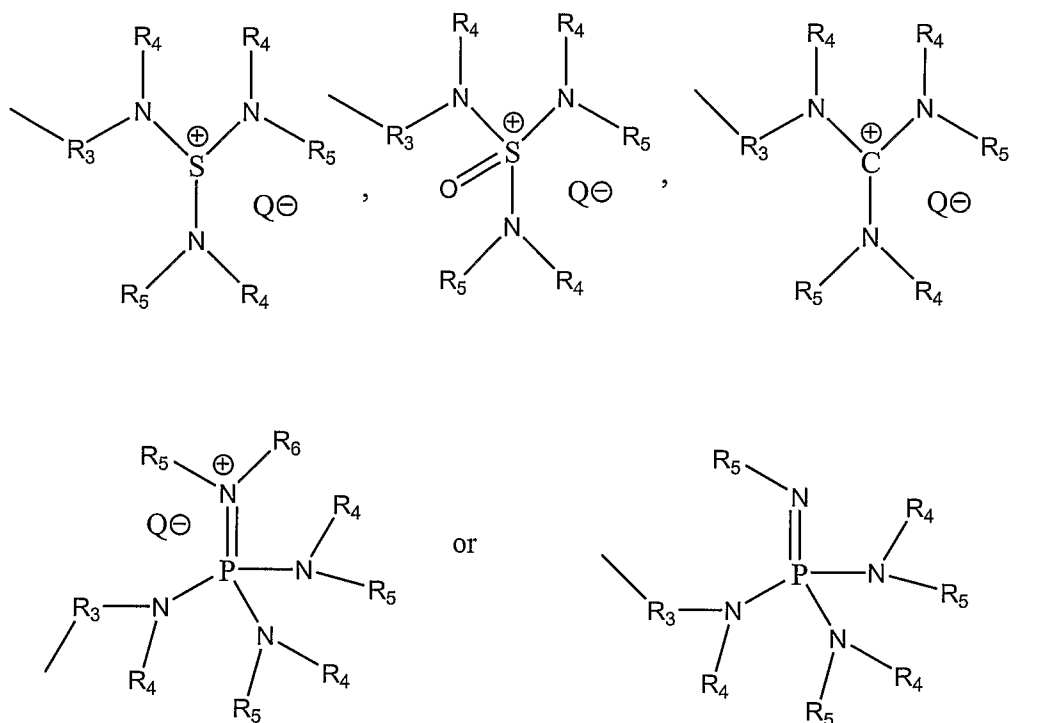

wherein R_3 is a direct bond or a group selected from $-(\text{CH}_2\text{CH}_2)-$, $-(\text{C}_6\text{H}_4)-$,

$-(\text{CF}_2\text{CF}_2)-$, $-(\text{CH}_2\text{CH}_2\text{CH}_2)-$; wherein R_4 and R_5 independently of one another

15 denote an alkyl, cycloalkyl, alkenyl, aryl, or aralkyl group having 1 to 10 carbon atoms or a heterocyclic group having 4 to 20 carbon atoms; wherein R_4 and R_5


may together form a $-(\text{CH}_2)_2-$, $-(\text{CH}_2)_3-$, $-(\text{CH}_2)_4-$, $-(\text{CH}_2)_5-$, $-\text{CH}=\text{CH}-$,

or $-\text{CH}=\text{CH}-\text{CH}=\text{CH}-$; wherein R_6 is selected from H, alkyl, cycloalkyl; and with



the caveat that the polymeric reaction product is prepared from monomer

having at least 5 mole percent of the residue. In other words, polymers of this


invention must include one or more of these residues. Exemplary monomers that are useful for preparing polymers and membranes by a condensation polymerization reaction according to this invention include, but are not limited to

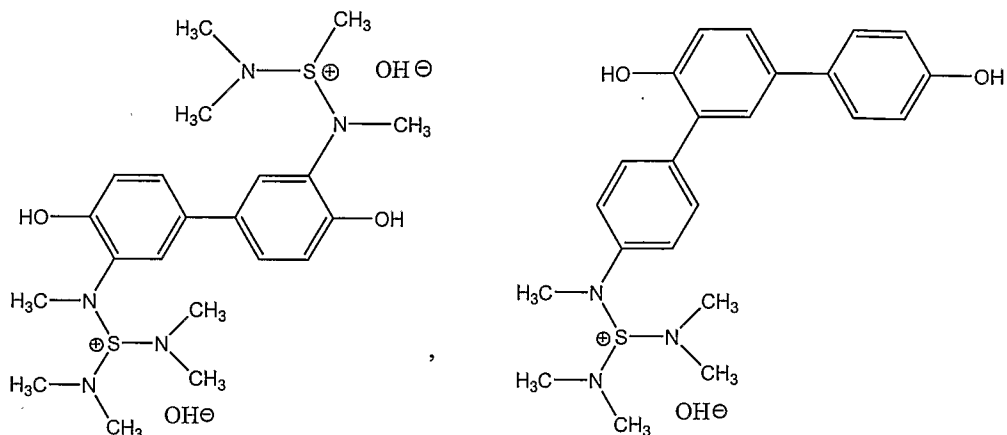


5

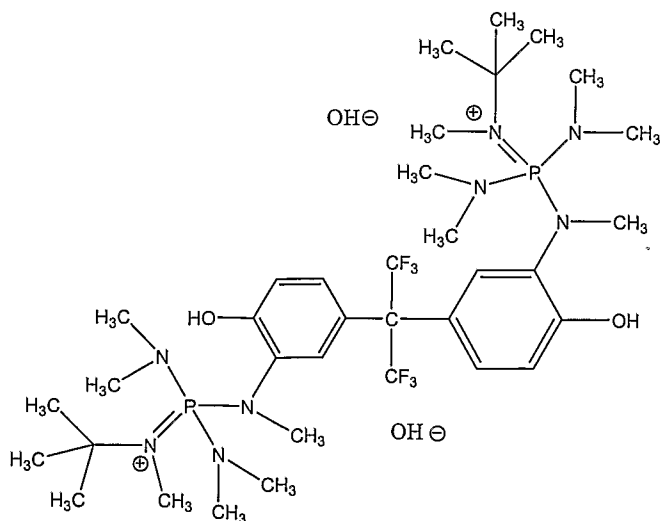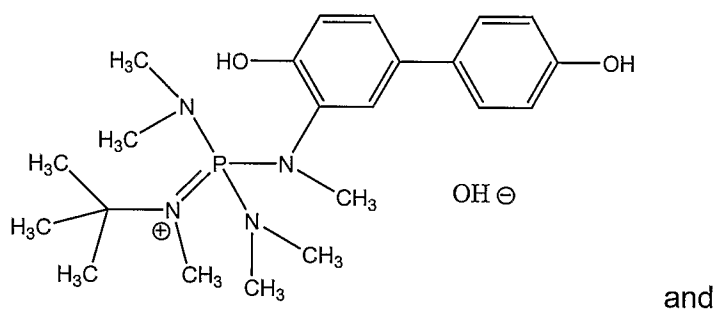

Polymers of this invention are also those having the formula




wherein n is an integer of 3 or greater; wherein Z is a direct bond or a chemical group independently selected from $-O-$, $-S-$, $-SO_2-$, $-C(CH_3)_2-$, $-C(CF_3)_2-$, $-C(=O)-$, $-P(=O)(aryl)-$, phenyl; wherein R_1 and R_2 independently of one another
 5 denote H, an alkyl, cycloalkyl, alkenyl, aryl, or aralkyl group having 1 to 10 carbon atoms or a heterocyclic group having 4 to 20 carbon atoms; wherein R_1 and R_2 together may form a $-(CH_2)_2-$, $-(CH_2)_3-$, $-(CH_2)_4-$, $-(CH_2)_5-$, $-CH=CH-$, or $-CH=CH-CH=CH-$; and wherein A_1 and A_2 are selected from hydrogen, alkyl, cycloalkyl, alkenyl, aryl, aralkyl group having 1 to 10 carbon atoms, a
 10 heterocyclic group having 4 to 20 carbon atoms, and a residue selected from those of the formula

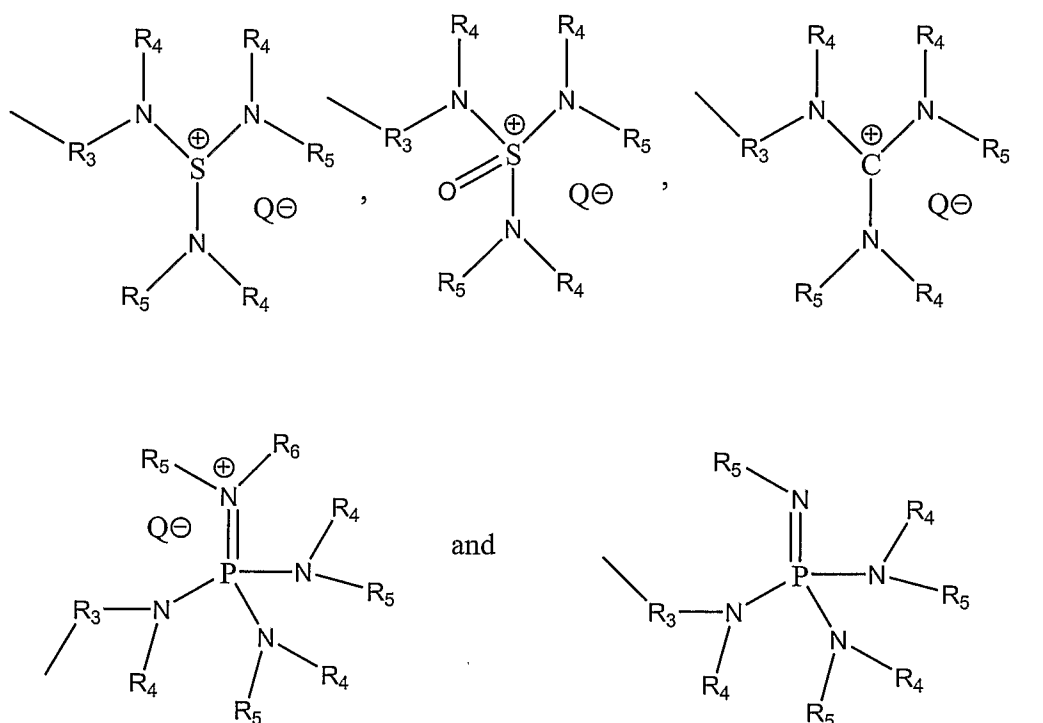

wherein R_3 is a direct bond or a group selected from $-(CH_2CH_2)-$, $-(C_6H_4)-$,

$-(CF_2CF_2)-$, $-(CH_2CH_2CH_2)-$; wherein R_4 and R_5 independently of one another denote an alkyl, cycloalkyl, alkenyl, aryl, or aralkyl group having 1 to 10 carbon atoms or a heterocyclic group having 4 to 20 carbon atoms; wherein R_4 and R_5 may together form a $-(CH_2)_2-$, $-(CH_2)_3-$, $-(CH_2)_4-$, $-(CH_2)_5-$, $-CH=CH-$,
 5 or $-CH=CH-CH=CH-$; wherein R_6 is selected from H, alkyl or cycloalkyl; and with the caveat that the polymer has at least 1 weight percent of the residue. Preferred anions are hydroxide, carbonate, bicarbonate, and halide. If Q is monovalent such as hydroxide or halide, then the polymer should include one hydroxide for every cationic side chain. If Q is a divalent anion such as
 10 carbonate, then the polymer should include one carbonate anion for every two cationic side chains. Polymers with these structures may be prepared by attaching a cationic side chain to a polymer backbone. One possible synthetic scheme is shown in SCHEME 2 below.


SCHEME 2

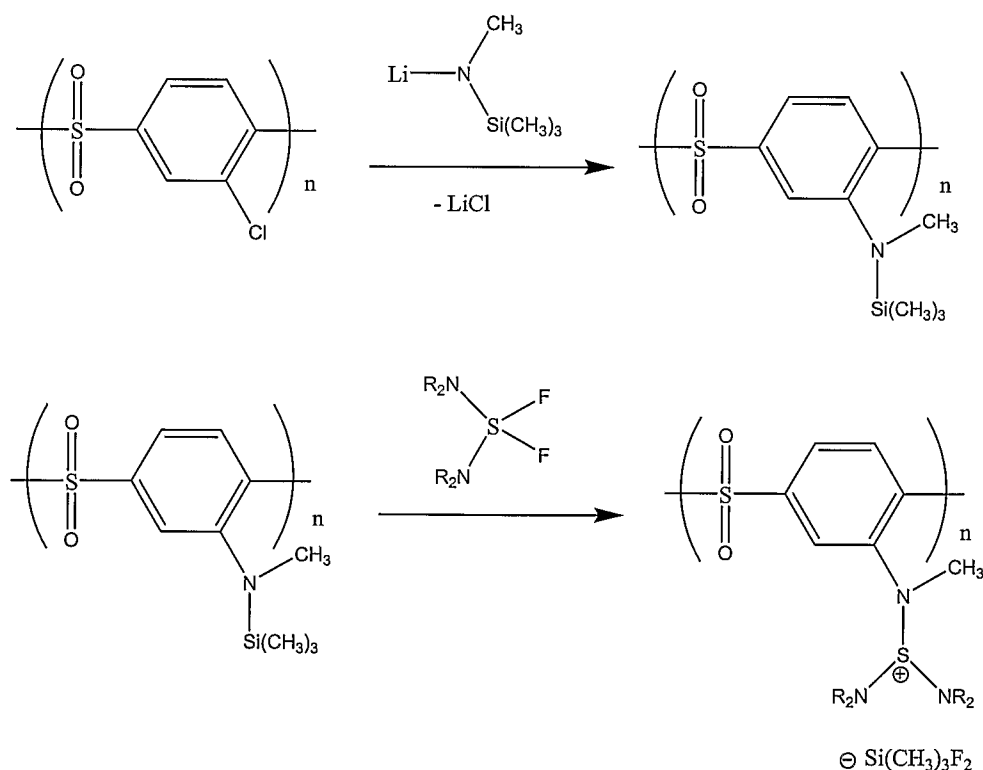


15

According to this exemplary scheme, poly(3-chlorophenylsulfone) is reacted with lithium trimethylsilylmethylamide, as shown in the first equation, and the reaction product is then reacted with the bis(dialkylamino) adduct of


difluorosulfide to produce an exemplary invention polymer. Polymers prepared according to this type of scheme may have portions with structures such as

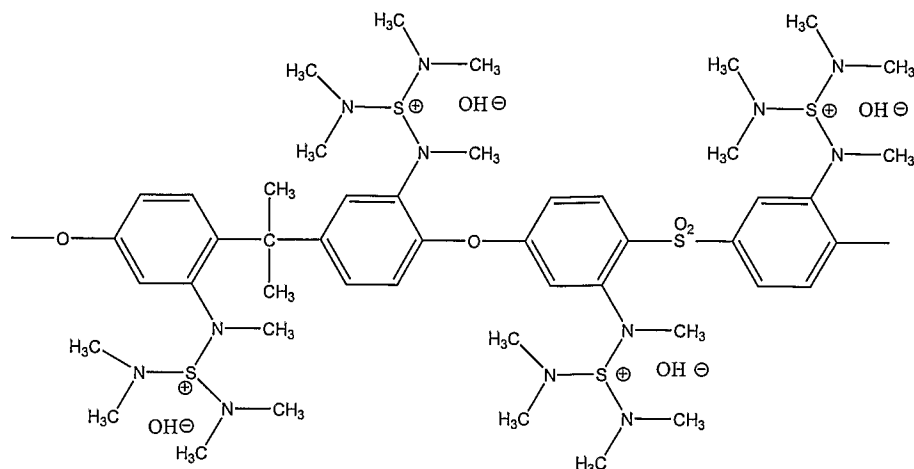


5 and

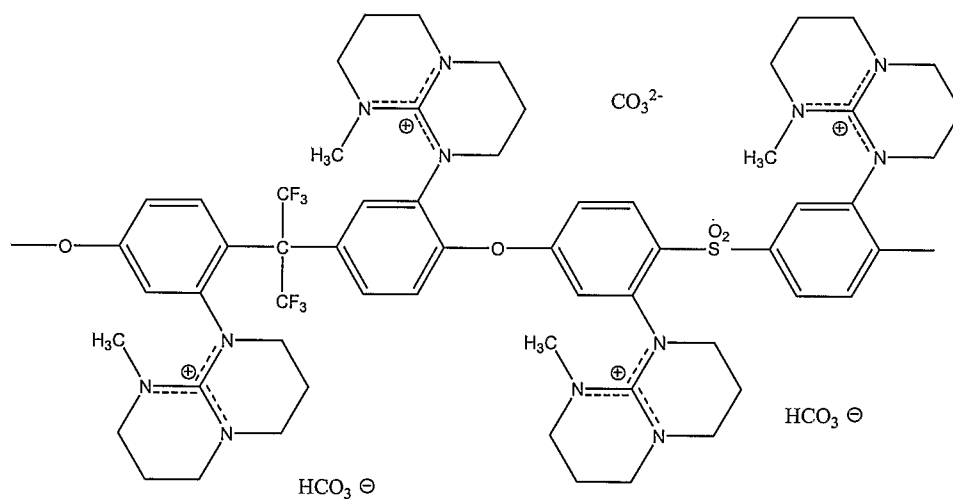

Other portions may include structures such as

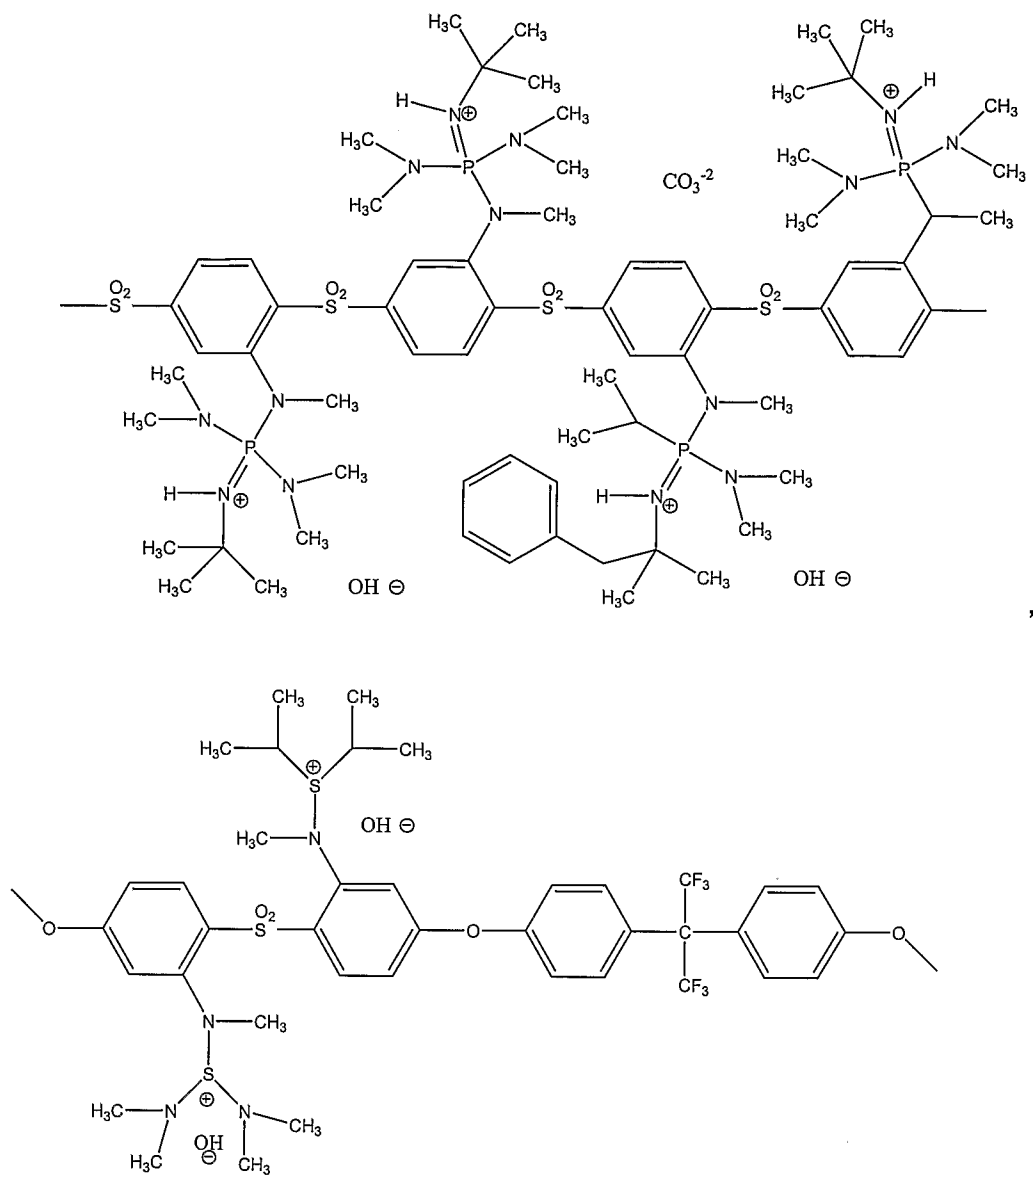


and

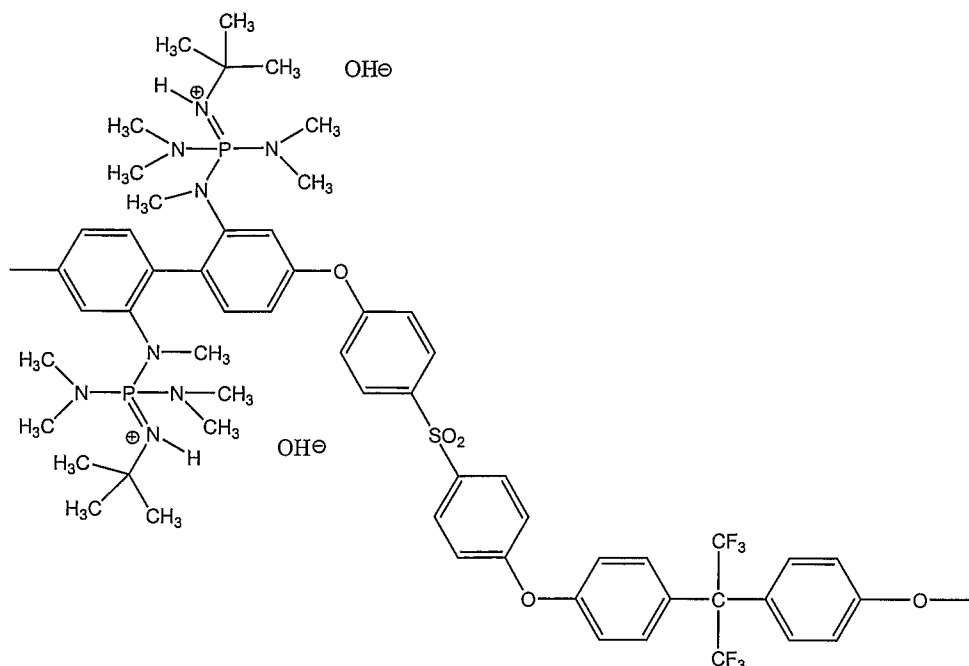

It should be understood that these structures are only illustrative of the many possible structures within the scope of this invention.

The invention is also related to compositions that include supports
5 embedded with one or more salts having the structures

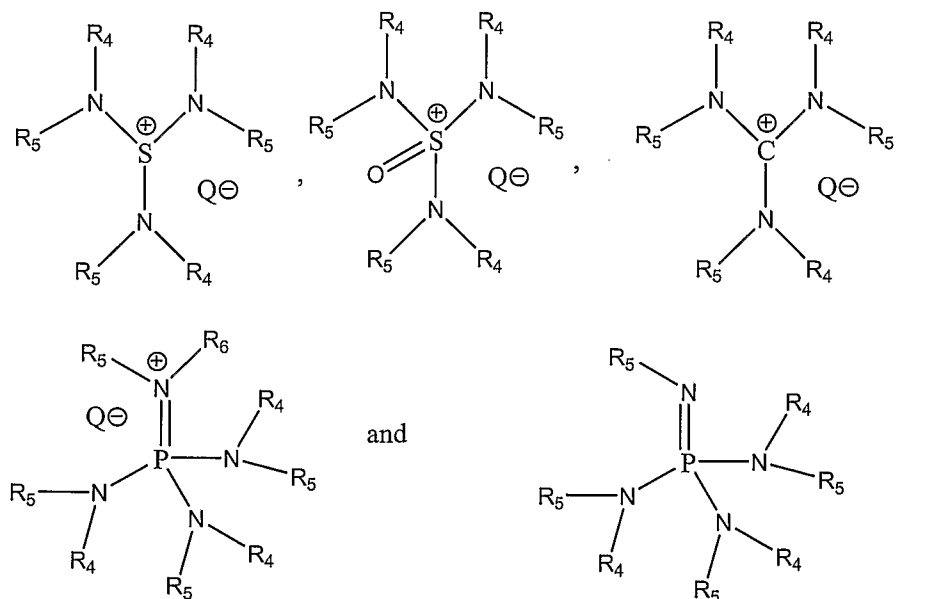


wherein R_4 and R_5 independently of one another denote an alkyl, cycloalkyl, alkenyl, aryl, or aralkyl group having 1 to 10 carbon atoms or a heterocyclic group having 4 to 20 carbon atoms; wherein R_4 and R_5 may together form a

-(CH₂)₂-, -(CH₂)₃-, -(CH₂)₄-, -(CH₂)₅-, -CH=CH-, or -CH=CH-CH=CH-; wherein R₆ is selected from H, alkyl, cycloalkyl; and wherein Q is a monovalent, divalent, or trivalent anion. The invention also includes a membrane prepared using this composition. Preferred anions are hydroxide, carbonate, bicarbonate, and halide. If Q is monovalent such as hydroxide or halide, then there should be one cation for every hydroxide. If Q is a divalent anion such as carbonate, then there should be two cations for every carbonate. Compositions of this invention may be prepared by embedding polysulfones, polyamides, polyamines, polyalcohols, polybenzimidazoles, polyolefins, and the like with these salts. Other supports that include, but are not limited to, fiberglass and asbestos may also be used.

Polymers and compositions of this invention, and membranes prepared using these polymers and compositions, are used in an aqueous alkali medium. An exemplary salt, tris(piperidino)sulfonium hydroxide, has been shown to be stable in aqueous solution elevated temperatures for days. Another exemplary salt, tris(dimethylamino)sulfonium chloride, does not decompose after about 81 hours at a temperature of about 89 degrees Celsius in a solution of about 1 molar alkali solution. Yet another exemplary salt, tris(dimethylamino)sulfonium tetrafluoroborate, has shown excellent electrochemical stability in the potential window of +/- 2 volts vs. Ag/AgCl, which is a much larger potential window than what is required for any water based process (see: Becker et al., "New Organic Electrolytes: Tris(dialkylamino)sulfonium salts: (R₂N)₃S⁺X⁻," Journal of Electroanalytical Chem., vol. 248 (1988) pp. 363-368, incorporated by reference). In view of these observations, it is expected that polymers and compositions of this invention will be stable in alkaline media. For cases where enhanced stability is needed, salts and polymers may be designed with the intention of minimizing the types of degradation chemistry outlined in SCHEME 1 (vide supra). One degradation reaction that has been shown to occur for tris(piperidino)sulfonium hydroxide in nonaqueous media (tetrahydrofuran solution or vacuum-dried solid material, for example) is shown in the reaction of SCHEME 3 below.

SCHEME 3

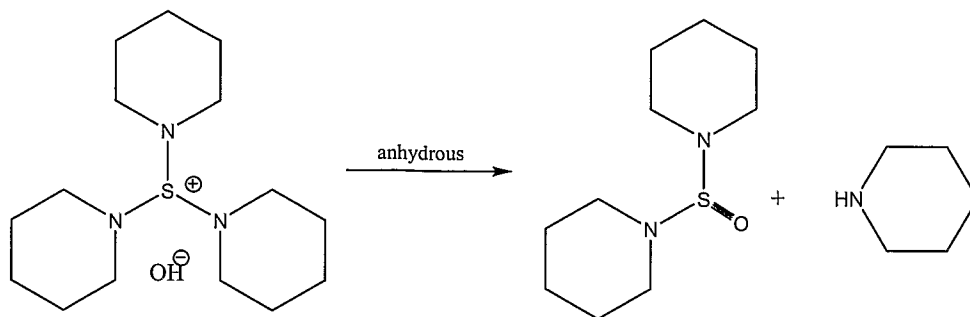


The reaction outlined in SCHEME 3 involves the attack at sulfur by the
 5 hydroxide. Chemical degradation by this pathway may be minimized by, for
 example, introducing chemical groups (alkyl groups, for example) into the
 compound at positions chosen to sterically shield the sulfur center in order to
 make it less accessible to hydroxide attack.

Another aspect of this invention is concerned with polymers that have
 10 phosphazene groups. Phosphazene groups useful with this invention are those
 where the phosphorus atom is bound to four nitrogen atoms. The neutral forms
 of these types of phosphazene groups are strong Lewis bases and are
 expected to undergo a chemical reaction with water to form phosphazanium
 cations and hydroxide, as shown in SCHEME 4 below.

15

SCHEME 4

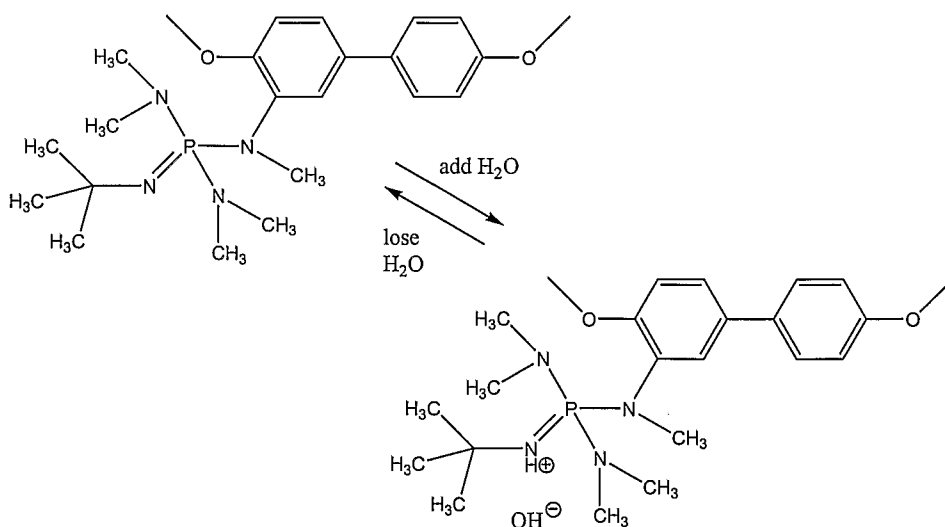


The polymer shown on the right is expected to be an ionic conductor and an
 anion exchange material. It should be noted that the reaction with water may be

reversible. It has been reported that when only small amounts of water are present with representative compounds that include phosphazene, the neutral hydrate was formed (see: Hartmann et al., in "Crystal Chemistry of Uncharged Phosphazene Bases .1. Structures of Two Hydrates and an Acetate of Tris(dimethylamino)methyliminophosphorane," Zeitschrift fur Naturforschung Section B, 51b, 1996, 1369, and by Hartmann et al., "Crystal chemistry of uncharged phosphazene bases .2. Structures of the anhydrous form and two hydrates of the diphosphazene (Me(2)N)(3)P=N-(Me(2)N)(2)P=NH," Zeitschrift fur Naturforschung Section B, 51b, 1996, p.1375). Thus, the ionic form shown on the right in SCHEME 4 is mostly present only when there is enough water to hydrate the hydroxide ion, which occurs when the stoichiometric ratio of water to phosphazene is about 2 or higher, and it is in materials of such a degree of hydration that ionic conductivity will be observed. According to the reversible reaction sketched in SCHEME 4, whenever hydroxide ions remove the most acidic proton from the phosphazanium cation, the product is the neutral phosphazene, which resists further reaction with hydroxide. This resistance against further reaction with hydroxide illustrates an aspect of "self-protection" against degradation reactions.

It is important to distinguish between the phosphazene moieties described herein, where each phosphorus atom is bonded to 4 nitrogen atoms and whose neutral forms are very strong Lewis bases, and other phosphazene and polyphosphazene moieties described in the art where phosphorus atoms are bonded to both nitrogen and oxygen atoms. Materials containing these latter moieties may be cationic conducting materials and are not pertinent to the present invention (see for example: Zhou et al., "High Temperature Transport Properties of Polyphosphazene Membranes for Direct Methanol Fuel Cells," Electrochim. Acta 48, 2003, p. 2173-2180).

Another aspect of this invention relates to polymeric structures comprising phosphazenes of the formula

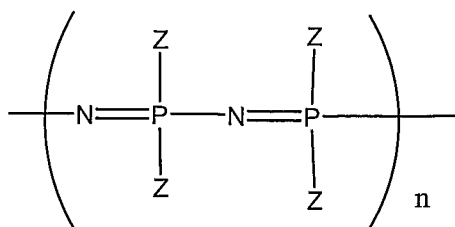

wherein n is any integer greater than 1; wherein Z is NR_1R_2 or $\text{N}(\text{PZ}_3)$; and wherein R_1 and R_2 are independently selected from C_1 to C_{10} alkyl, C_1 to C_{10} partially fluorinated alkyl, or C_1 to C_{10} fluorinated alkyl, and also wherein R_1 and R_2 may together form a $-(\text{CH}_2)_2-$, $-(\text{CH}_2)_3-$, $-(\text{CH}_2)_4-$, $-(\text{CH}_2)_5-$, $-\text{CH}=\text{CH}-$, or $-\text{CH}=\text{CH}-\text{CH}=\text{CH}-$. Such polymers may be synthesized by phosphazene condensation reactions similar to those reported by Schwesinger et al. in "Extremely Strong, Uncharged Auxiliary Bases; Monomeric and Polymer-Supported Polyaminophosphazenes (P-2-P-5)," Liebigs Annalen, (1996) vol. 7, p.1055-1081. Again the phosphazene units, while neutral as shown in the above formula are expected to react with water when the material is sufficiently hydrated to form phosphazanium ions and hydroxide, and the resulting ionized material is expected to be an anionic conductor and an anion-exchange material.

Membranes of this invention may be used with fuel cells and water electrolyzers. Unlike the cation-exchange membranes used with acidic systems, the anion-exchange membranes of this invention may result in lower cell voltages for reactions involving oxygen. One advantage of using anion-exchange membranes instead of cation-exchange membranes relates to the use of non-noble metals instead of noble metals (nickel instead of platinum, for example) as catalysts for fuel cells, for example. This replacement would provide significant cost savings and perhaps system efficiency gains for electrolyzers and fuel cells.

In summary, the present invention is directed to polymers and compositions and anion-conducting membranes using these materials. Membranes of this invention are expected to be more robust than known anion-conducting membranes because they are less susceptible to degradation than current membranes are. It is expected that these membranes may be used in fuel cells, in membrane-based water electrolyzers, and in other chemical


(anion-exchange resin, wastewater treatment, for example) and electrochemical processes (salt splitting, for example).

The foregoing description of the invention has been presented for purposes of illustration and description and is not intended to be exhaustive or
5 to limit the invention to the precise form disclosed, and obviously many modifications and variations are possible in light of the above teaching.


The embodiments were chosen and described in order to best explain the principles of the invention and its practical application to thereby enable others skilled in the art to best utilize the invention in various embodiments and
10 with various modifications as are suited to the particular use contemplated. It is intended that the scope of the invention be defined by the claims appended hereto.

WHAT IS CLAIMED IS:

1. A polymeric reaction product of a first monomer of the formula

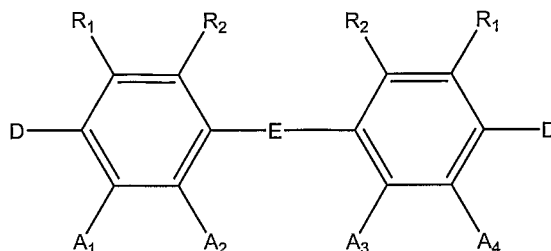


with at least one second monomer having of the formula

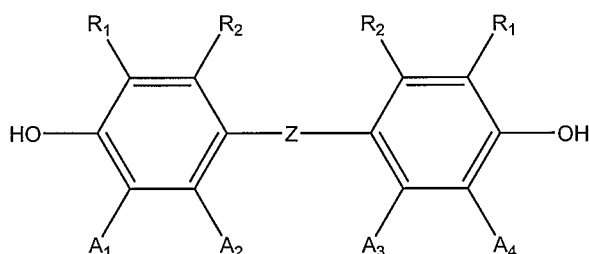


- 5 wherein D is halide selected from F, Cl, Br, and I;
 wherein E is selected from $-\text{SO}_2-$, $-\text{C}(=\text{O})-$, and $-\text{P}(=\text{O})(\text{aryl})-$;
 wherein Z is a direct bond or $-\text{C}(\text{CX}_3)_2-$ where X is hydrogen or fluorine;
 wherein R₁ and R₂ independently of one another denote H, an alkyl, cycloalkyl,
 alkenyl, aryl, or aralkyl group having 1 to 10 carbon atoms or a heterocyclic
 10 group having 4 to 20 carbon atoms;
 wherein R₁ and R₂ may together form a $-(\text{CH}_2)_2-$, $-(\text{CH}_2)_3-$, $-(\text{CH}_2)_4-$, $-(\text{CH}_2)_5-$,
 $-\text{CH}=\text{CH}-$, or $-\text{CH}=\text{CH}-\text{CH}=\text{CH}-$;
 wherein A₁, A₂, A₃, and A₄ are independently selected from hydrogen, alkyl,
 cycloalkyl, alkenyl, aryl, aralkyl having 1 to 10 carbon atoms, a heterocyclic
 15 group having 4 to 20 carbon atoms, and a residue of the formula

22

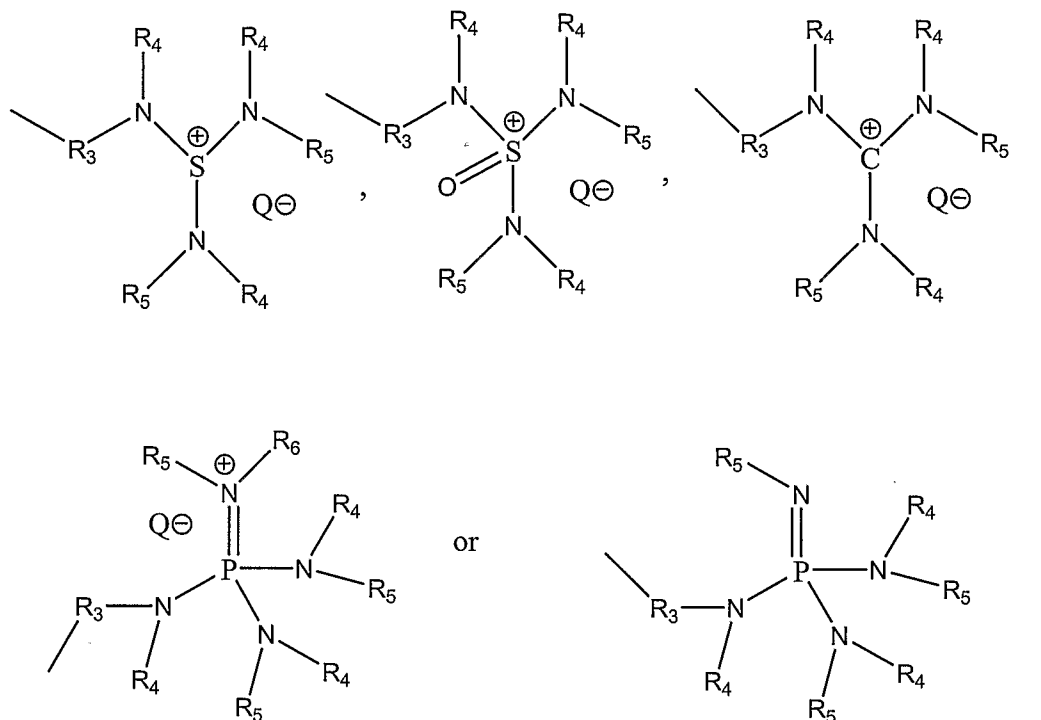


wherein R_3 is a direct bond or a group selected from $-(CH_2CH_2)-$, $-(C_6H_4)-$, $-(CF_2CF_2)-$, $-(CH_2CH_2CH_2)-$; wherein R_4 and R_5 independently of one another denote an alkyl, cycloalkyl, alkenyl, aryl, or aralkyl group having 1 to 10 carbon atoms or a heterocyclic group having 4 to 20 carbon atoms; wherein R_4 and R_5 may together form a $-(CH_2)_2-$, $-(CH_2)_3-$, $-(CH_2)_4-$, $-(CH_2)_5-$, $-CH=CH-$, or $-CH=CH-CH=CH-$; wherein R_6 is selected from H, alkyl, cycloalkyl; and wherein Q is any anion; and with the caveat that the polymeric reaction product is prepared from first monomer and/or second monomer having at least 5 mole percent of the residue.

2. A membrane comprising a polymeric reaction product of the reaction of a monomer of the formula

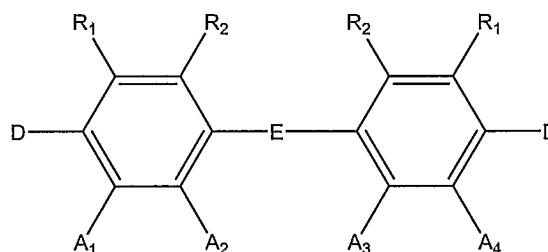

with one at least one second monomer of the formula

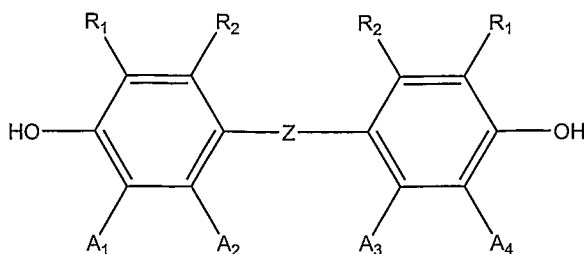

5

wherein D is halide selected from F, Cl, Br, and I;


wherein E is selected from $-\text{SO}_2-$, $-\text{C}(=\text{O})-$, and $-\text{P}(=\text{O})(\text{aryl})-$;

wherein Z is a direct bond or $-\text{C}(\text{CX}_3)_2-$ where X is hydrogen or fluorine;

wherein R_1 and R_2 independently of one another denote H, an alkyl, cycloalkyl,
 10 alkenyl, aryl, or aralkyl group having 1 to 10 carbon atoms or a heterocyclic
 group having 4 to 20 carbon atoms;

wherein R_1 and R_2 may together form a $-(\text{CH}_2)_2-$, $-(\text{CH}_2)_3-$, $-(\text{CH}_2)_4-$, $-(\text{CH}_2)_5-$,
 $-\text{CH}=\text{CH}-$, or $-\text{CH}=\text{CH}-\text{CH}=\text{CH}-$;


wherein A_1 , A_2 , A_3 , and A_4 are independently selected from hydrogen, alkyl,
 15 cycloalkyl, alkenyl, aryl, aralkyl having 1 to 10 carbon atoms, a heterocyclic
 group having 4 to 20 carbon atoms, and a residue of the formula

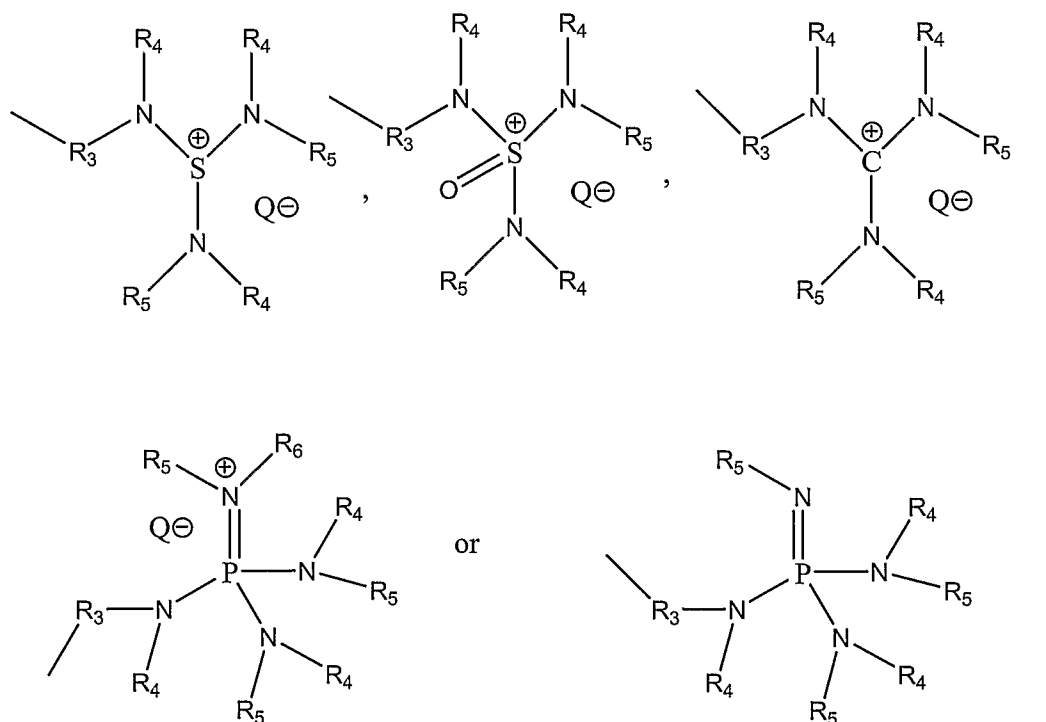

wherein R_3 is a direct bond or a group selected from $-(\text{CH}_2\text{CH}_2)-$, $-(\text{C}_6\text{H}_4)-$,

20 $-(CF_2CF_2)-$, $-(CH_2CH_2CH_2)-$; wherein R_4 and R_5 independently of one another denote an alkyl, cycloalkyl, alkenyl, aryl, or aralkyl group having 1 to 10 carbon atoms or a heterocyclic group having 4 to 20 carbon atoms; wherein R_4 and R_5 may together form a $-(CH_2)_2-$, $-(CH_2)_3-$, $-(CH_2)_4-$, $-(CH_2)_5-$, $-CH=CH-$, or $-CH=CH-CH=CH-$; wherein R_6 is selected from H, alkyl, cycloalkyl; wherein Q is any anion; and with the caveat that the polymeric reaction product is
25 percent of the residue.

3. A composition comprising a support and a salt embedded in the support, the salt being selected from the group consisting of salts of the formula

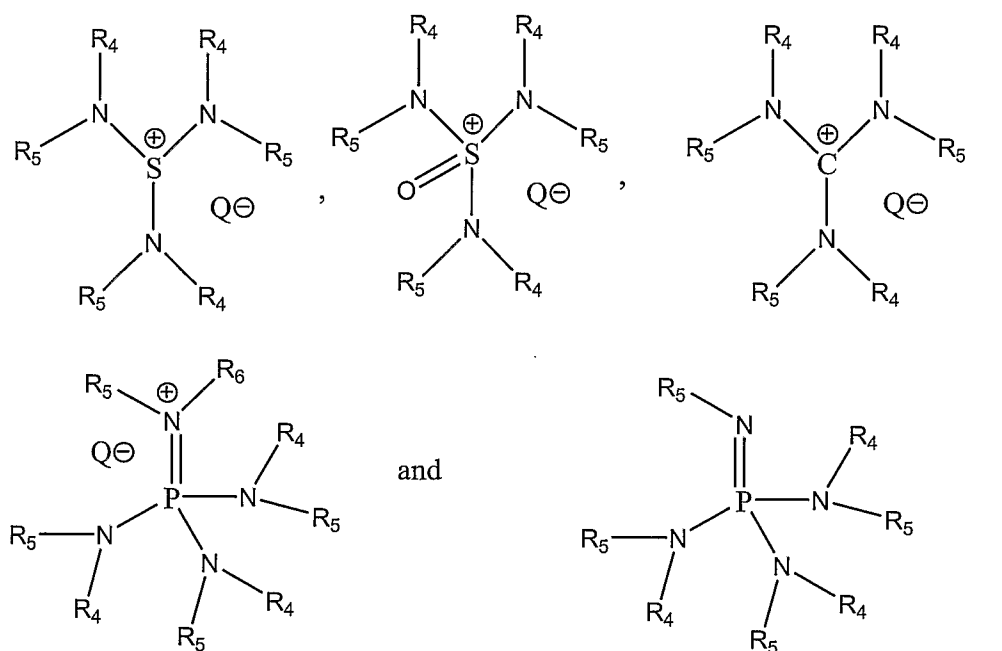


5 wherein R_4 and R_5 independently of one another denote an alkyl, cycloalkyl, alkenyl, aryl, or aralkyl group having 1 to 10 carbon atoms or a heterocyclic group having 4 to 20 carbon atoms; wherein R_4 and R_5 may together form a $-(CH_2)_2-$, $-(CH_2)_3-$, $-(CH_2)_4-$, $-(CH_2)_5-$, $-CH=CH-$, or $-CH=CH-CH=CH-$; wherein R_6 is selected from H, alkyl, cycloalkyl; and wherein Q is any anion.


4. The composition of claim 3, wherein the support comprises asbestos, ceramic, an organic polymer, or mixtures thereof.

5. A polymer of the formula

25



wherein n is an integer of 3 or greater; wherein Z is a direct bond or a chemical group independently selected from $-O-$, $-S-$, $-\text{SO}_2-$, $-\text{C}(\text{CH}_3)_2-$, $-\text{C}(\text{CF}_3)_2-$, $-\text{C}(=\text{O})-$, $-\text{P}(=\text{O})(\text{aryl})-$, phenyl; wherein R_1 and R_2 independently of one another denote H, an alkyl, cycloalkyl, alkenyl, aryl, or aralkyl group having 1 to 10 carbon atoms or a heterocyclic group having 4 to 20 carbon atoms; wherein R_1 and R_2 together may form a $-(\text{CH}_2)_2-$, $-(\text{CH}_2)_3-$, $-(\text{CH}_2)_4-$, $-(\text{CH}_2)_5-$, $-\text{CH}=\text{CH}-$, or $-\text{CH}=\text{CH}-\text{CH}=\text{CH}-$; and wherein A_1 and A_2 are selected from hydrogen, alkyl, cycloalkyl, alkenyl, aryl, aralkyl group having 1 to 10 carbon atoms, a heterocyclic group having 4 to 20 carbon atoms, and a residue selected from those of the formula

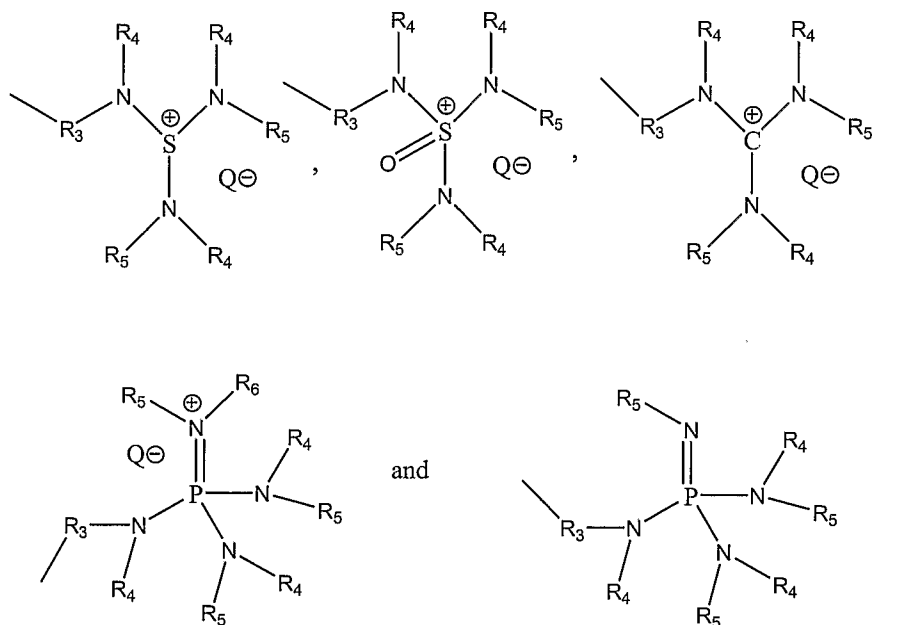


wherein R_3 is a direct bond or a group selected from $-(\text{CH}_2\text{CH}_2)-$, $-(\text{C}_6\text{H}_4)-$, $-(\text{CF}_2\text{CF}_2)-$, $-(\text{CH}_2\text{CH}_2\text{CH}_2)-$; wherein R_4 and R_5 independently of one another denote an alkyl, cycloalkyl, alkenyl, aryl, or aralkyl group having 1 to 10 carbon


atoms or a heterocyclic group having 4 to 20 carbon atoms; wherein R_4 and R_5 may together form a $-(CH_2)_2-$, $-(CH_2)_3-$, $-(CH_2)_4-$, $-(CH_2)_5-$, $-CH=CH-$,
 20 or $-CH=CH-CH=CH-$; wherein R_6 is selected from H, alkyl or cycloalkyl; wherein Q is any anion; and with the caveat that the polymer comprises at least 1 weight percent of the residue.

6. The polymer of claim 1, wherein Q is an anion selected from the group consisting of hydroxide, carbonate, bicarbonate, and halide.

7. An anion-conducting membrane comprising a polymer of the formula




wherein n is an integer of 3 or greater; wherein Z is a direct bond or a chemical
 5 group independently selected from $-O-$, $-S-$, $-\text{SO}_2-$, $-\text{C}(\text{CH}_3)_2-$, $-\text{C}(\text{CF}_3)_2-$,
 $-\text{C}(=\text{O})-$, $-\text{P}(=\text{O})(\text{aryl})-$, phenyl; wherein R_1 and R_2 independently of one another denote H, an alkyl, cycloalkyl, alkenyl, aryl, or aralkyl group having 1 to 10
 carbon atoms or a heterocyclic group having 4 to 20 carbon atoms; wherein R_1
 and R_2 together may form a $-(CH_2)_2-$, $-(CH_2)_3-$, $-(CH_2)_4-$, $-(CH_2)_5-$, $-CH=CH-$, or
 10 $-CH=CH-CH=CH-$;
 and wherein A_1 and A_2 are selected from hydrogen, alkyl, cycloalkyl, alkenyl,
 aryl, aralkyl group having 1 to 10 carbon atoms, a heterocyclic group having 4
 to 20 carbon atoms, and a residue selected from those of the formula

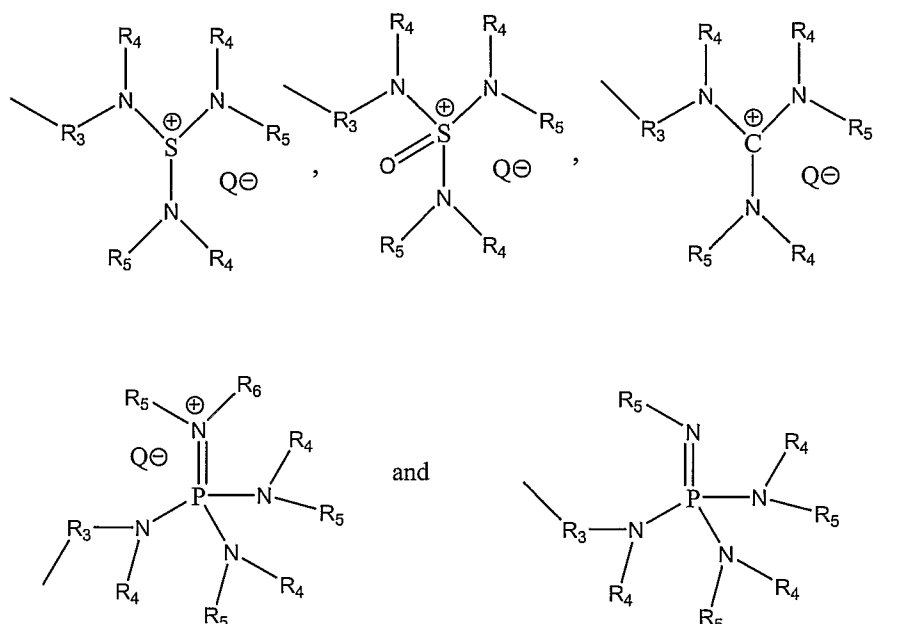

- 15 wherein R_3 is a direct bond or a group selected from $-(CH_2CH_2)-$, $-(C_6H_4)-$, $-(CF_2CF_2)-$, $-(CH_2CH_2CH_2)-$; wherein R_4 and R_5 independently of one another denote an alkyl, cycloalkyl, alkenyl, aryl, or aralkyl group having 1 to 10 carbon atoms or a heterocyclic group having 4 to 20 carbon atoms; wherein R_4 and R_5 may together form a $-(CH_2)_2-$, $-(CH_2)_3-$, $-(CH_2)_4-$, $-(CH_2)_5-$, $-CH=CH-$,
 20 or $-CH=CH-CH=CH-$; wherein R_6 is selected from H, alkyl or cycloalkyl; wherein Q is any anion; and with the caveat that the polymer comprises at least 1 weight percent of the residue.

8. The anion-conducting membrane of claim 7, wherein Q is an anion selected from the group consisting of hydroxide, carbonate, bicarbonate, and halide.


9. A polymer of the formula

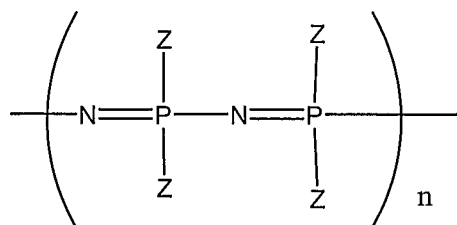

wherein n is any integer greater than 1; wherein Z is NR_1R_2 or $N(=PZ_3)$; and wherein R_1 and R_2 are independently selected from C_1 to C_{10} alkyl, C_1 to C_{10}

- 5 partially fluorinated alkyl, or C₁ to C₁₀ fluorinated alkyl, and also wherein R₁ and R₂ may together form a -(CH₂)₂-, -(CH₂)₃-, -(CH₂)₄-, -(CH₂)₅-, -CH=CH-, or -CH=CH-CH=CH-.

10. The polymeric reaction product of water and a polymer of the formula

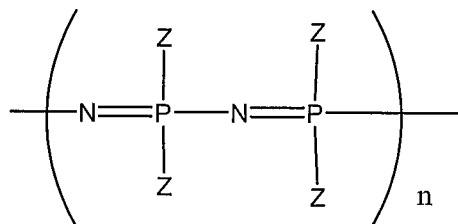

- wherein n is any integer greater than 1; wherein Z is NR₁R₂ or N(=PZ₃); and
- 5 wherein R₁ and R₂ are independently selected from C₁ to C₁₀ alkyl, C₁ to C₁₀ partially fluorinated alkyl, or C₁ to C₁₀ fluorinated alkyl, and also wherein R₁ and R₂ may together form a -(CH₂)₂-, -(CH₂)₃-, -(CH₂)₄-, -(CH₂)₅-, -CH=CH-, or -CH=CH-CH=CH-.