US 20030009753A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2003/0009753 A1**

Brodersen et al. (43) **Pub. Date: Jan. 9, 2003**

(54) **METHOD OF SYNCHRONIZING INDEPENDENTLY DISTRIBUTED SOFTWARE AND DATABASE SCHEMA**

(76) Inventors: **Robert A. Brodersen**, Redwood City, CA (US); **Prashant Chatterjee**, Saratoga, CA (US); **John L. Coker**, Hillsborough, CA (US); **Peter S. Lim**, Redwood City, CA (US)

Correspondence Address:
COOLEY GODWARD LLP
ATTN: PATENT GROUP
11951 FREEDOM DRIVE, SUITE 1700
ONE FREEDOM SQUARE- RESTON TOWN CENTER
RESTON, VA 20190-5061 (US)

(21) Appl. No.: **09/992,813**

(22) Filed: **Nov. 27, 2001**

Related U.S. Application Data

(63) Continuation of application No. 09/375,427, filed on Aug. 17, 1999, now Pat. No. 6,324,693, which is a continuation of application No. PCT/US98/03572, filed on Feb. 24, 1998.

(60) Provisional application No. 60/040,534, filed on Feb. 27, 1997.

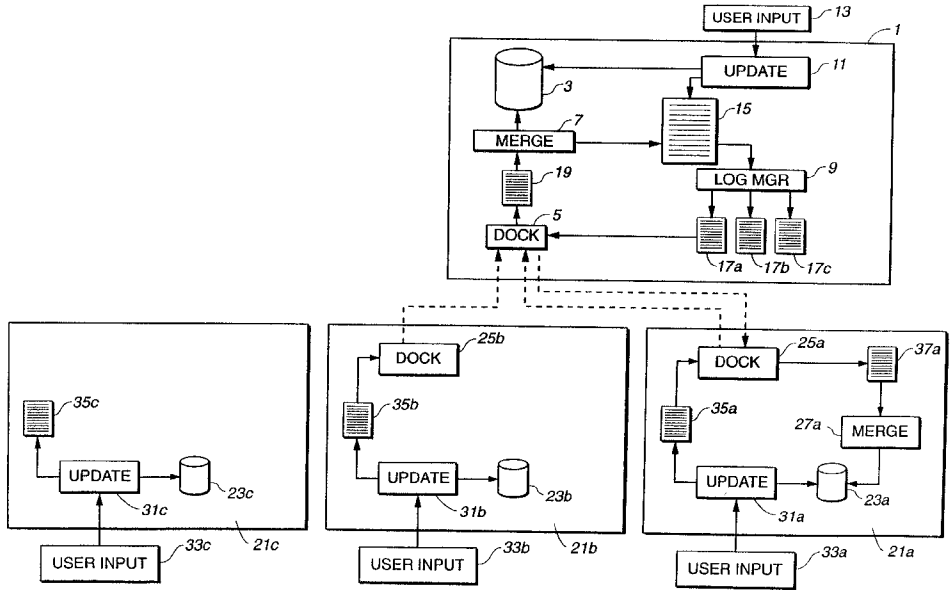
Publication Classification

(51) **Int. Cl.**[7] **G06F 9/445**

(52) **U.S. Cl.** **717/172**; 717/169

(57) **ABSTRACT**

Upgrading a software application from one or more upgrade package files in a server (**1**) to a client (**21***a*, **21***b*, **21***c*). According to this method a copy of the upgrade package files and an upgrade database table are created on the server (**1**). A pointer is created in the client's (**21***a*, **21***b*, **21***c*) file on the server (**1**). This pointer points to the upgrade package files on the server (**1**); In invoking the upgrade the, the upgrade files are made active, and the upgrade database table is scanned when a client (**21***a*, **21***b*, **21***c*) docks. This is to determine the status of an upgrade with respect to the particular client (**21***a*, **21***b*, **21***c*). The upgrade is copied to the client (**21***a*, **21***b*, **21***c*) if the client (**21***a*, **21***b*, **21***c*) has not received the upgrade. At this point the upgrade may be invoked at the client (**21***a*, **21***b*, **21***c*). Also disclosed is a program product carrying code for the upgrade method.



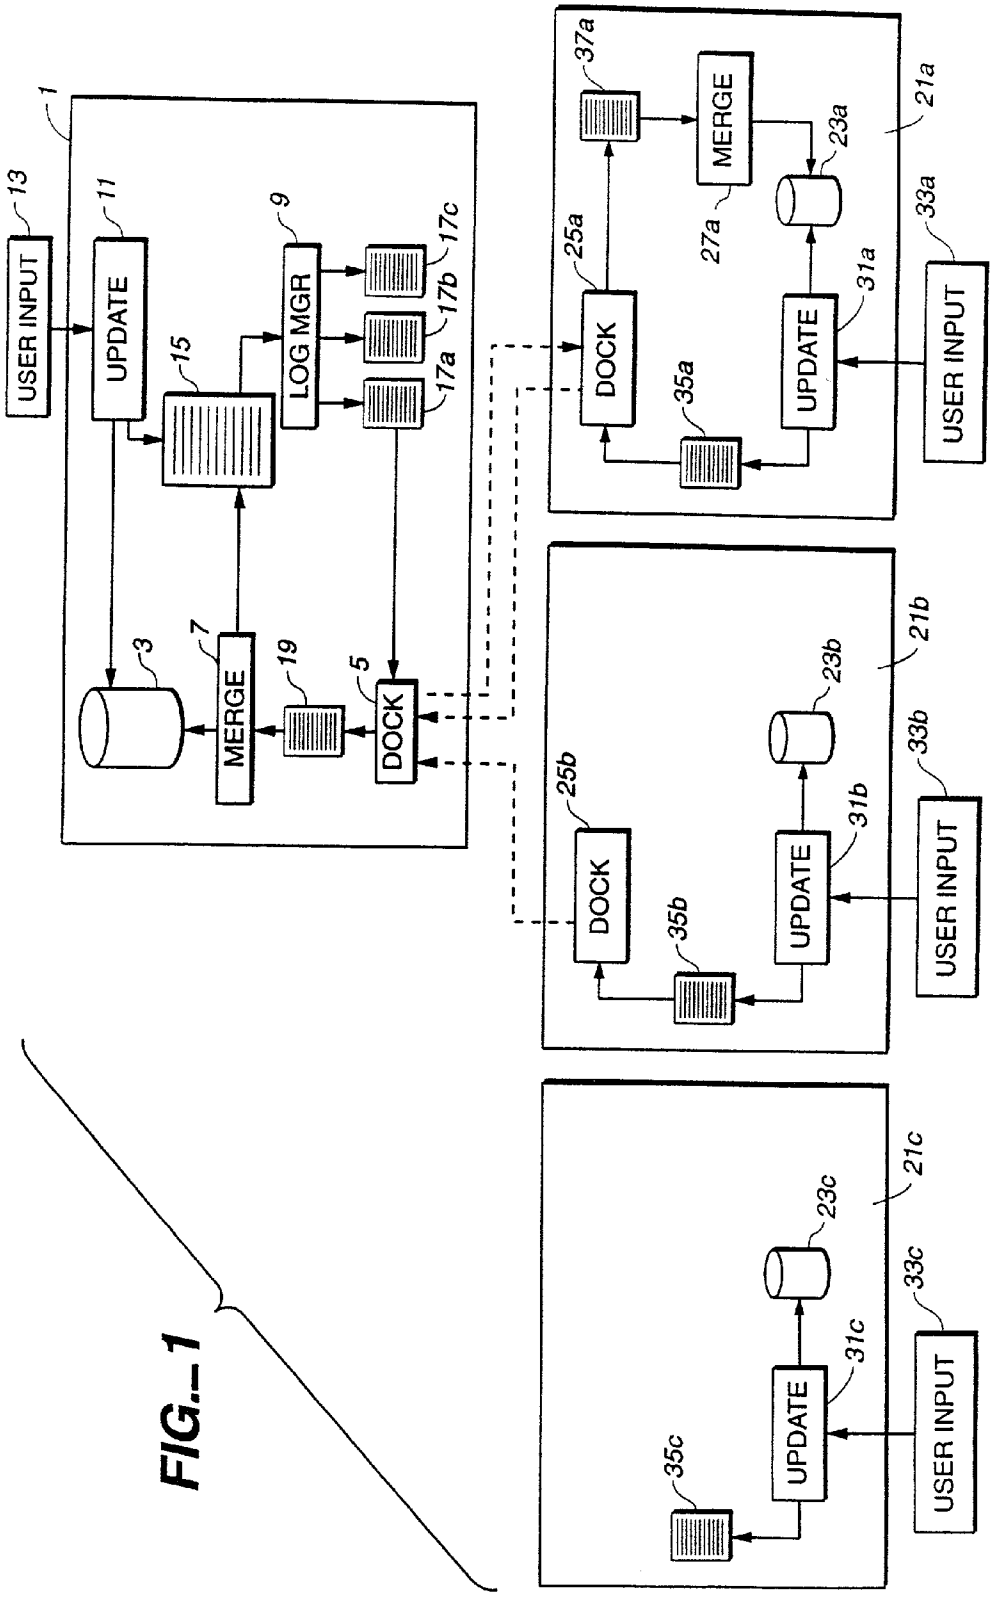

1
USER INPUT
13
UPDATE
11
LOG MGR
9
15
17a
17b
17c
3
7
MERGE
19
5
DOCK
21a
37a
MERGE
23a
25a
27a
DOCK
31a
33a
USER INPUT
35a
UPDATE
21b
23b
25b
DOCK
31b
33b
USER INPUT
35b
UPDATE
21c
23c
31c
33c
USER INPUT
35c
UPDATE

FIG._1

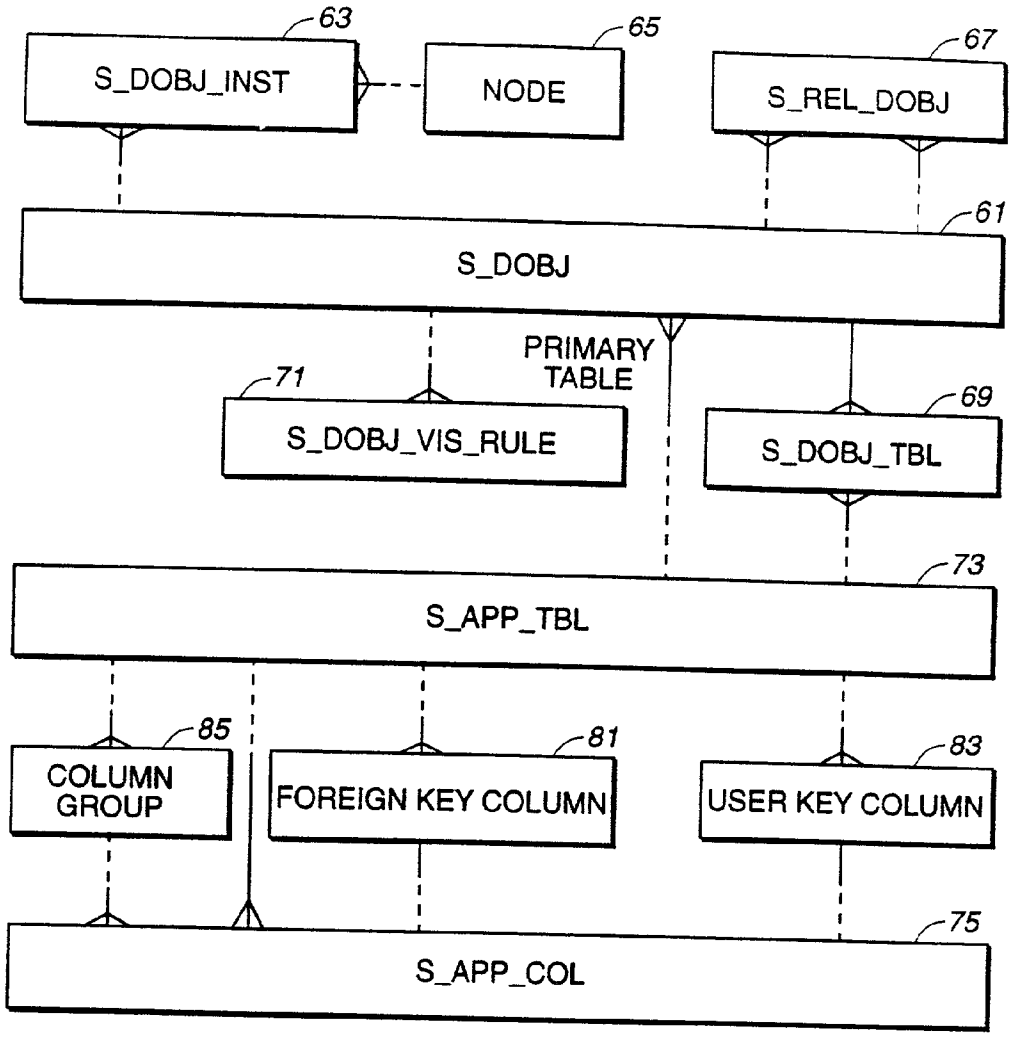

63
S_DOBJ_INST
65
NODE
67
S_REL_DOBJ
61
S_DOBJ
PRIMARY TABLE
71
S_DOBJ_VIS_RULE
69
S_DOBJ_TBL
73
S_APP_TBL
85
COLUMN GROUP
81
FOREIGN KEY COLUMN
83
USER KEY COLUMN
75
S_APP_COL

FIG._2

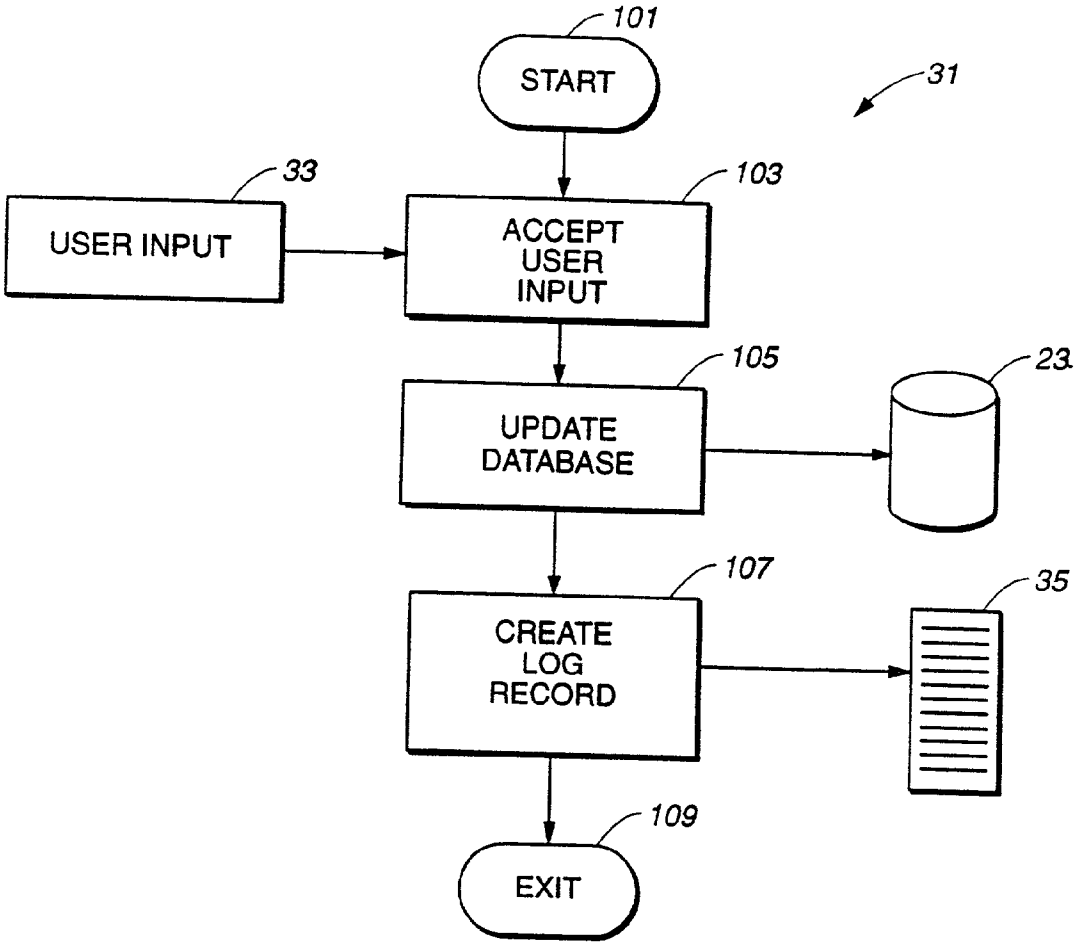

101
START
31
33
USER INPUT
103
ACCEPT USER INPUT
105
UPDATE DATABASE
23
107
CREATE LOG RECORD
35
109
EXIT

FIG._3

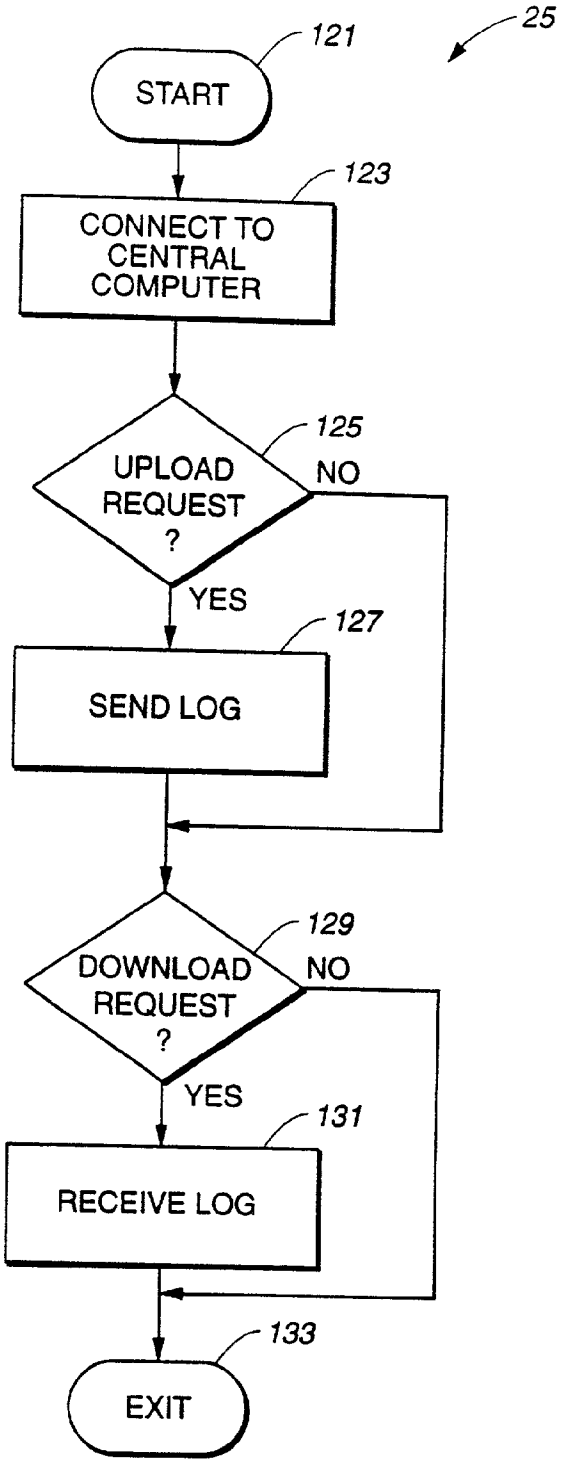

25
121
START
123
CONNECT TO CENTRAL COMPUTER
125
UPLOAD REQUEST ?
NO
YES
127
SEND LOG
129
DOWNLOAD REQUEST ?
NO
YES
131
RECEIVE LOG
133
EXIT

FIG._4

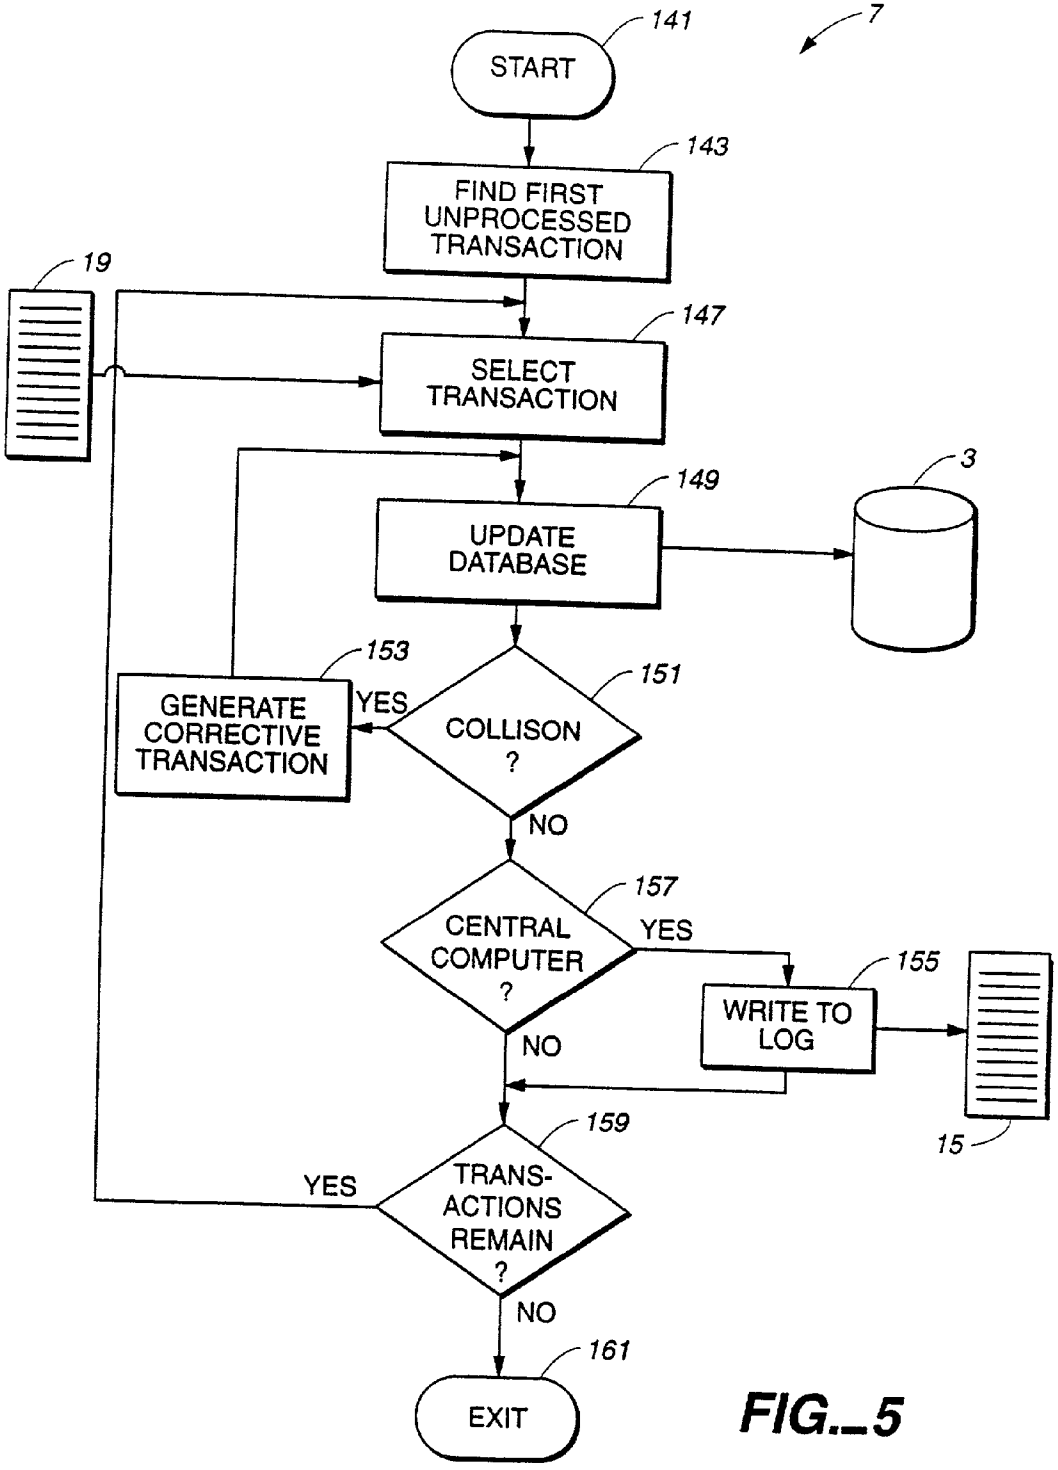

7
141
START
143
FIND FIRST UNPROCESSED TRANSACTION
19
147
SELECT TRANSACTION
3
149
UPDATE DATABASE
153
GENERATE CORRECTIVE TRANSACTION
YES
151
COLLISON ?
NO
157
CENTRAL COMPUTER ?
YES
155
WRITE TO LOG
15
NO
159
TRANS-ACTIONS REMAIN ?
YES
NO
161
EXIT

FIG._5

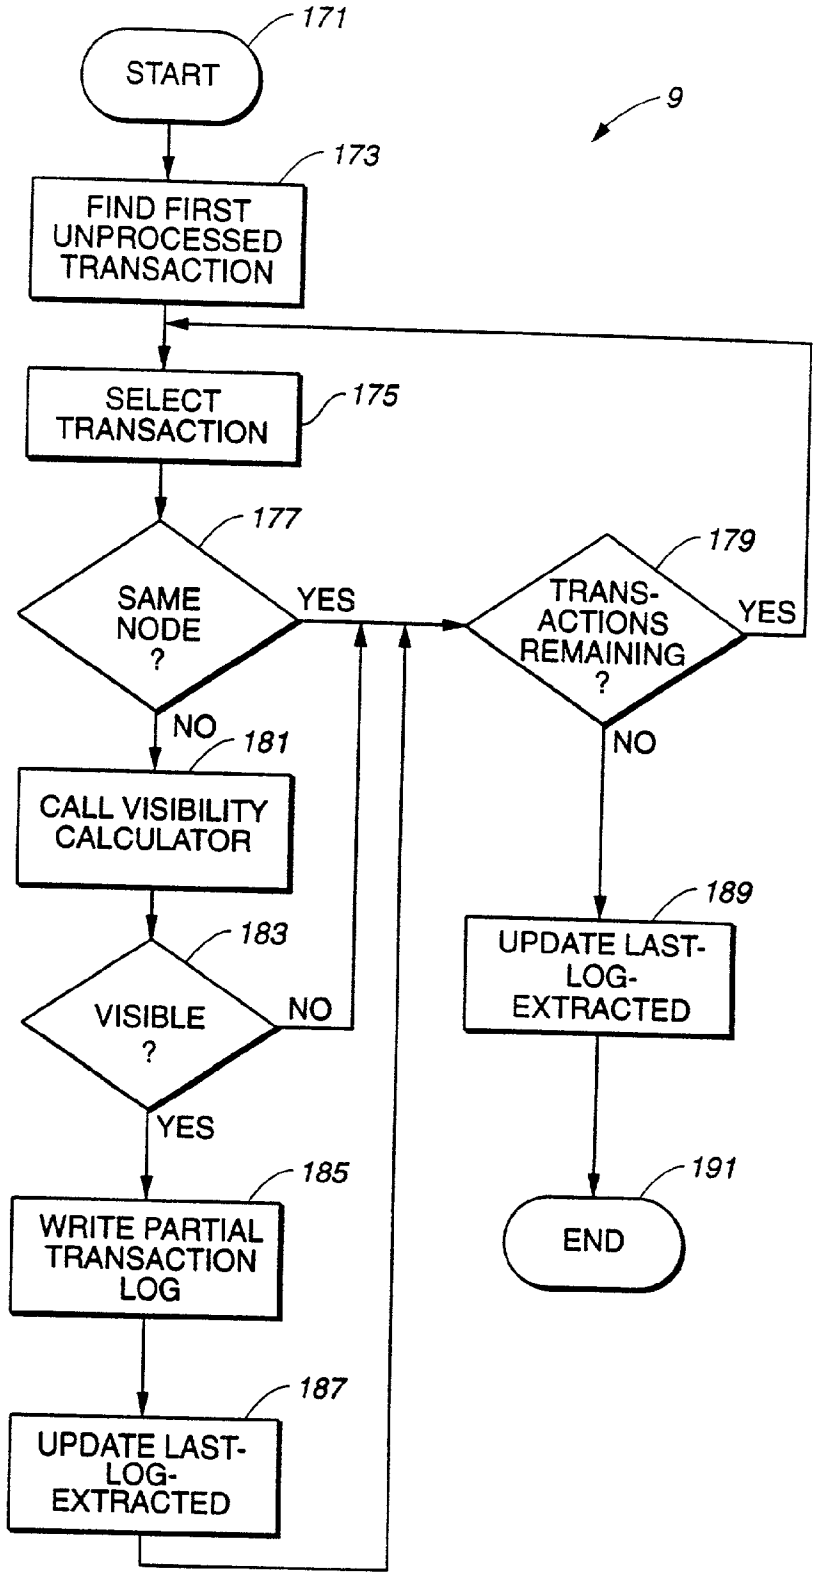

171
START
9
173
FIND FIRST UNPROCESSED TRANSACTION
SELECT TRANSACTION
175
177
SAME NODE ?
YES
179
TRANS-ACTIONS REMAINING ?
YES
NO
181
CALL VISIBILITY CALCULATOR
183
VISIBLE ?
NO
YES
185
WRITE PARTIAL TRANSACTION LOG
187
UPDATE LAST-LOG-EXTRACTED
NO
189
UPDATE LAST-LOG-EXTRACTED
191
END

FIG._6

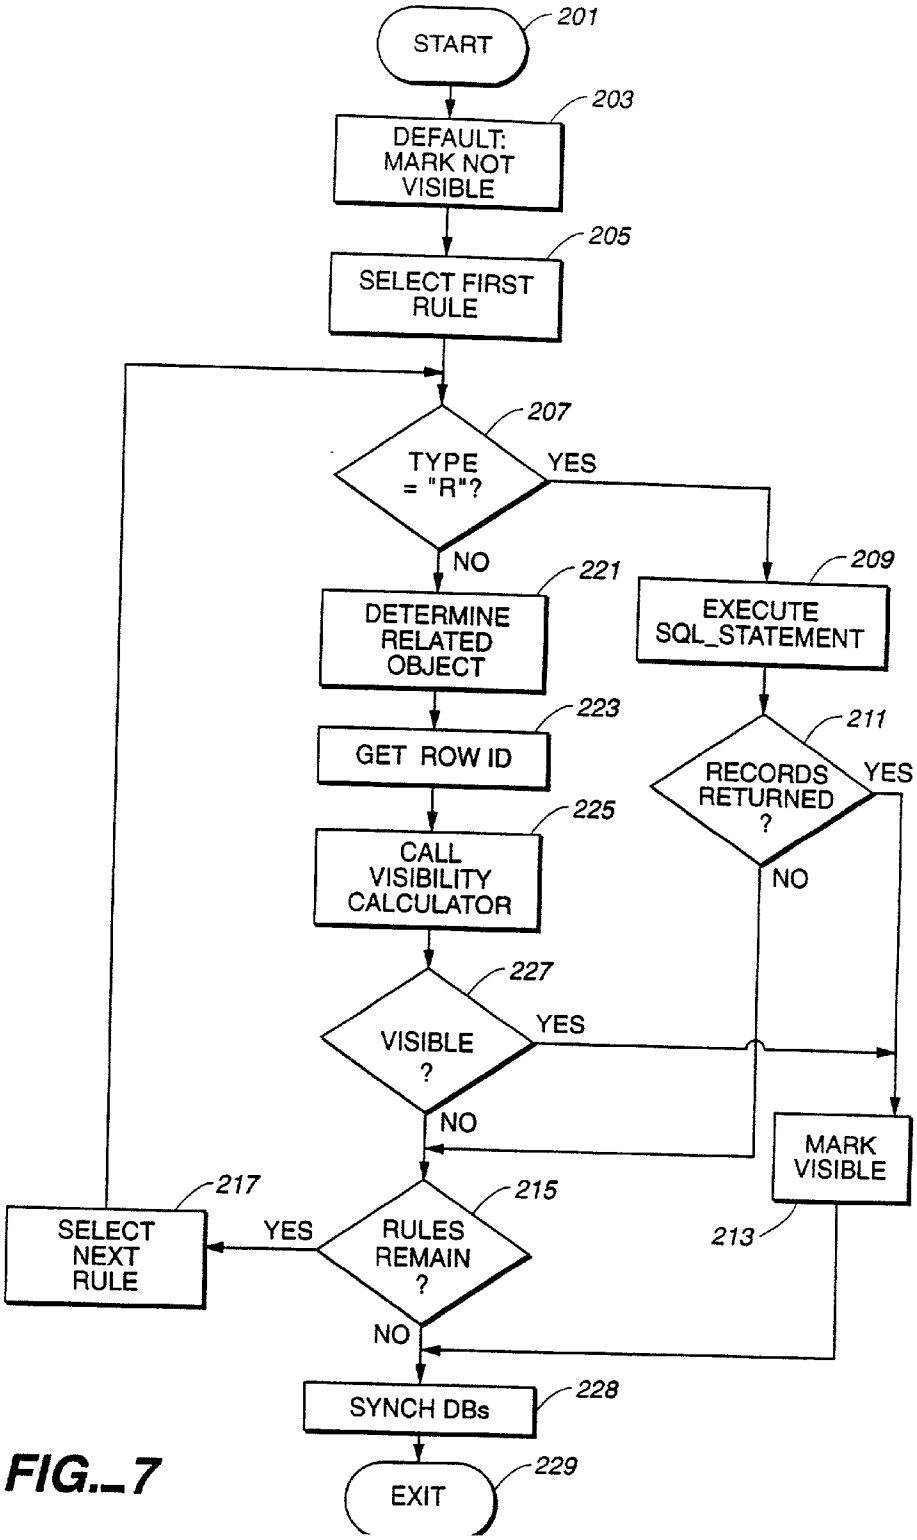

START
201
DEFAULT: MARK NOT VISIBLE
203
SELECT FIRST RULE
205
TYPE = "R"?
207
YES
NO
DETERMINE RELATED OBJECT
221
EXECUTE SQL_STATEMENT
209
GET ROW ID
223
RECORDS RETURNED ?
211
YES
NO
CALL VISIBILITY CALCULATOR
225
VISIBLE ?
227
YES
NO
MARK VISIBLE
213
SELECT NEXT RULE
217
YES
RULES REMAIN ?
215
NO
SYNCH DBs
228
EXIT
229

FIG._7

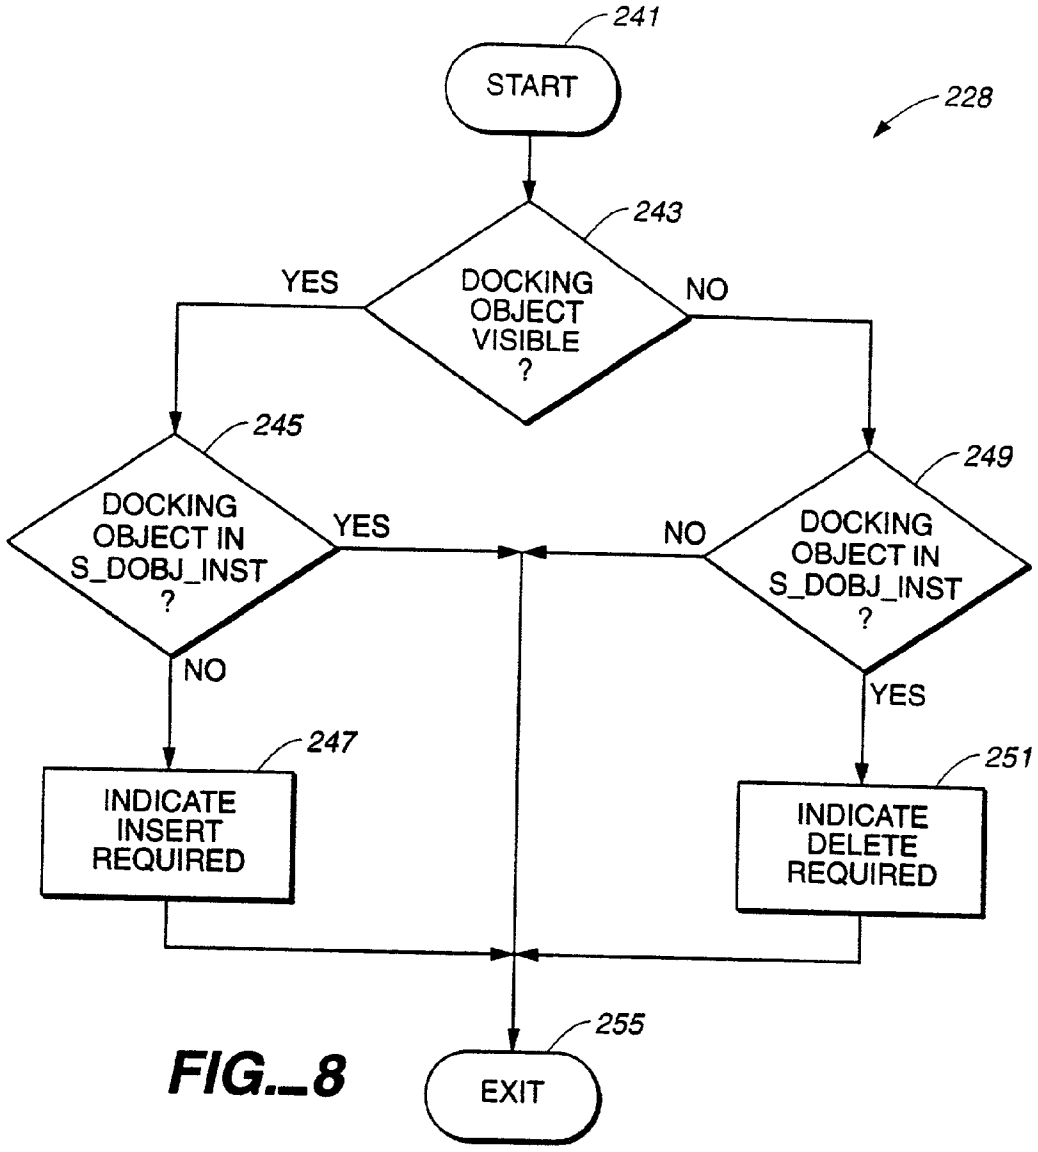

241
START
228
243
DOCKING OBJECT VISIBLE ?
YES
NO
245
DOCKING OBJECT IN S_DOBJ_INST ?
YES
NO
249
DOCKING OBJECT IN S_DOBJ_INST ?
NO
YES
247
INDICATE INSERT REQUIRED
251
INDICATE DELETE REQUIRED
255
EXIT

FIG._8

METHOD OF SYNCHRONIZING INDEPENDENTLY DISTRIBUTED SOFTWARE AND DATABASE SCHEMA

INTRODUCTION

[0001] I. Technical Field

[0002] This invention relates to a system and method for providing updates to a network of partially replicated relational database systems, and, more particularly, for providing an efficient means for computing the visibility to a client on the network of a transaction processed against the database.

[0003] II. Background

[0004] Relational databases are a commonly-employed data structure for representing data in a business or other environment. A relational database represents data in the form of a collection of two-dimensional tables. Each table comprises a series of cells arranged in rows and columns. Typically, a row in a table represents a particular observation. A column represents either a data field or a pointer to a row in another table.

[0005] For example, a database describing an organizational structure may have one table to describe each position in the organization, and another table to describe each employee in the organization. The employee table may include information specific to the employee, such as name, employee number, age, salary, etc. The position table may include information specific to the position, such as the position title ("salesman", "vice president", etc.), a salary range, and the like. The tables may be related by, for example, providing in each row of the employee table a pointer to a particular row in the position table, coordinated so that, for each row in the employee table, there is a pointer to the particular row in the position table that describes that employee's position. A relational database management system (RDBMS) supports "joining" these tables in response to a query from a user, so that the user making a query about, for example, a particular employee, may be provided with a report of the selected employee, including not only the information in the employee table, but also the information in the related position table.

[0006] Relational databases may be much more complex than this example, with several tables and a multiplicity of relations among them.

[0007] With the widespread use of inexpensive portable computers, it is advantageous to replicate a database onto a portable computer for reference at locations remote from the central computer. The replicated database may then be referenced by the user of the portable computer, without requiring reference to the main database, which may be maintained at a central location inconvenient to the user of the portable computer. However, there are a number of difficulties with the use of a replicated database.

[0008] One disadvantage is that a full copy of the central database may require more data storage than is desired or economical. For example, a salesman working in the field may need to refer to the database for information regarding sales opportunities in his sales area, but have no need to refer to any information regarding sales opportunities outside of his area. One possible approach to reduce the amount of required data storage is to simply replicate only that portion of the database that is needed by the user. However, this approach does not recognize that the criteria to determine which portions of the data are required is likely to vary over time. For example, the salesman may have a new city added to his territory. Under conventional approaches, the salesman would need to re-replicate his local copy of the database, this time selecting data including the added city. Such a practice is inconvenient, subject to error, and time-consuming.

[0009] A further disadvantage to a replicated database is the difficulties encountered in attempting to update data using the replicated copy. A change made to the replicated database is not made to the central database, leading to a discrepancy between the information that is stored in the replicated copy of the database and the information that is stored in the central database. Although it is possible to journal modifications made to the replicated copy and apply an identical modification to the central database, one problem that this approach faces is the possibility of colliding updates; that is, where a user of a replicated copy makes a change to data that is also changed by a user of the central copy or by the user of another replicated copy.

[0010] It is therefore desirable to provide a capability to maintain one or more partially-replicated copies of a central database, in such a way that the degree of replication may be easily changed without requiring a refresh of the entire replicated database, and that permits updates to be coordinated among users of the central database and users of the partially replicated databases.

SUMMARY OF THE INVENTION

[0011] The present invention is directed to a method of maintaining a partially replicated database in such a way that updates made to a central database, or to another partially replicated database, are selectively propagated to the partially replicated database. Updates are propagated to a partially replicated database if the owner of the partially replicated database is deemed to have visibility to the data being updated. Visibility is determined by use of predetermined rules stored in a rules database. In one aspect of the invention, the stored rules are assessed against data content of various tables that make up a logical entity, known as a docking object, that is being updated.

[0012] In another aspect of the invention, the stored rules are assessed against data content of one or more docking objects that are not necessarily updated, but that are related to a docking object being updated. In one embodiment, the visibility attributes of the related docking objects are recursively determined.

[0013] In yet another aspect of the invention, changes in visibility are determined to enable the central computer to direct the nodes to insert the docking object into its partially replicated database. Such changes in visibility are determined so as to enable the central computer to direct a node to remove a docking object from its partially replicated database.

[0014] In a further aspect of the invention, the predetermined rules are in declarative form and specify visibility of data based upon structure of the data without reference to data content.

[0015] In still another aspect of the invention, the levels of the database schema and the database access software are synchronized to prevent an updated schema from being processed by a back-level version of software.

[0016] A still further aspect of our invention is a method of upgrading a software application from one or more upgrade package files in a server (**1**) to a client (**21***a*, **21***b*, **21***c*). According to this method a copy of the upgrade package files and an upgrade database table are created on the server (**1**). A pointer is created in the client's (**21***a*, **21***b*, **21***c*) file on the server (**1**). This pointer points to the upgrade package files on the server (**1**). In invoking the upgrade the, the upgrade files are made active, and the upgrade database table is scanned when a client (**21***a*, **21***b*, **21***c*) docks. This is to determine the status of an upgrade with respect to the particular client (**21***a*, **21***b*, **21***c*). The upgrade is copied to the client (**21***a*, **21***b*, **21***c*) if the client (**21***a*, **21***b*, **21***c*) has not received the upgrade. At this point the upgrade may be invoked at the client (**21***a*, **21***b*, **21***c*).

[0017] A still further aspect of our invention is a program product article of manufacture encompassing a computer usable medium with computer program code embodied therein for causing the upgrading of a software application from upgrade package files in a server (**1**) to a client (**21***a*, **21***b*, **21***c*). The computer readable program in the program product article of manufacture contains computer readable program code means for causing a computer to effect creating a copy of the upgrade package files on the server (**1**), creating an upgrade database table on the server (**1**); creating a pointer in the client's (**21***a*, **21***b*, **21***c*) file on the server (**1**) pointing to the upgrade package files on the server (**1**), making the upgrade active, scanning the upgrade database table when a client (**21***a*, **21***b*, **21***c*) docks to determine the status of an upgrade with respect to the client (**21***a*, **21***b*, **21***c*), copying the upgrade to a client (**21***a*, **21***b*, **21***c*) if the client (**21***a*, **21***b*, **21***c*) has not received the upgrade, and invoking the upgrade at the client (**21***a*, **21***b*, **21***c*).

[0018] A even further aspect of our invention is a program product in the form of a program storage device readable by a machine, tangibly embodying a program of instructions executable by a machine to perform method steps for of upgrading a software application from upgrade package files in a server (**1**) to a client (**21***a*, **21***b*, **21***c*) said method steps comprising creating a copy of the upgrade package files on the server (**1**), creating an upgrade database table on the server (**1**); creating a pointer in the client's (**21***a*, **21***b*, **21***c*) file on the server (**1**) pointing to the upgrade package files on the server (**1**), making the upgrade active, scanning the upgrade database table when a client (**21***a*, **21***b*, **21***c*) docks to determine the status of an upgrade with respect to the client (**21***a*, **21***b*, **21***c*), copying the upgrade to a client (**21***a*, **21***b*, **21***c*) if the client (**21***a*, **21***b*, **21***c*) has not received the upgrade, and invoking the upgrade at the client (**21***a*, **21***b*, **21***c*).

BRIEF DESCRIPTION OF THE DRAWINGS

[0019] **FIG. 1** depicts an overview of the operation of one embodiment of the present invention.

[0020] **FIG. 2** depicts a database schema that shows the relationship of the various components that make up a Docking Object.

[0021] **FIG. 3** depicts steps performed by an update manager to update a database.

[0022] **FIG. 4** depicts steps performed by a Docking Manager to transmit and/or receive one or more transaction logs.

[0023] **FIG. 5** depicts the steps performed by a merge processor to merge transaction log records into an existing database.

[0024] **FIG. 6** depicts the steps performed by a log manager to prepare a partial transaction log.

[0025] **FIG. 7** depicts the steps performed by a visibility calculator for calculating visibility for a docking object as invoked by a log manager.

[0026] **FIG. 8** depicts the steps performed to synchronize a partially replicated database in response to a change in data visibility.

DESCRIPTION OF SPECIFIC EMBODIMENTS

[0027] Overview

[0028] **FIG. 1** depicts an overview of the operation of one embodiment of the present invention. **FIG. 1** depicts a central computer system **1** and three remote computer systems (or "nodes") **21**-*a*, **21**-*b*, and **21**-*c*. Each of nodes **21**-*a*, **21**-*b* and **21**-*c* are depicted in various states of communication with central computer system **1**, as will be more fully explained. Central computer system **1** includes a central database **3**, a docking manager **5**, a merge processor **7** and a log manager **9**. Central computer system **1** additionally optionally includes update manager **11** responsive to user input **13**.

[0029] Node **21**-*a* is a remote computer system, such as a mobile client such as a laptop computer. Node **21**-*a* includes a partially replicated remote database **23**-*a*, update manager **31**-*a* responsive to user input **33**-*a*, docking manager **25**-*a* and merge manager **27**-*a*. In operation, update manager is responsive to user input **33**-*a* to make changes to remote database **23**-*a* as directed by the operator of node **21**-*a*. Updates made are recorded, or journaled, in node update log **35**-*a*.

[0030] At some point at the convenience of the operator of node **21**-*a*, node docking manager **35**-*a* is activated, and enters into communication with central docking manager **5**. Update log **35**-*a* is taken as input by node docking manager **25**-*a*, and provided to central docking manager **5**. Central docking manager **5** creates a received node update log **19**, which contains all the information that had been recorded in update log **35**-*a*. Optionally, partial log **17**-*a* is taken as input by central docking manager **5** and provided to node docking manager **25**-*a*, as more fully described herein.

[0031] At some point in time, at the convenience of the operator of central computer system **1**, merge processor **7** is activated. Merge processor **7** takes as input received node update log **19**, and applies the updates described therein to central database **3**. In the process of applying the updates from received node update log **19**, merge processor journals the updates applied to central update log **15**. Optionally, update manager **11**, responsive to user input **12** makes additional changed to central database **3** as directed by the

operator of central computer system **1**. The updates made by update manager **11** are additionally journaled in central update log **15**.

[**0032**] At some point in time, at the convenience of the operator of central computer system **1**, log manager **9** is activated. Log manager **9** takes as input central update log **15** and produces as output a set of partial logs **17**-*a*, **17**-*b* and **17**-*c* according to visibility rules as will be further described herein. Each of partial logs **17**-*a*, **17**-*b* and **17**-*c* corresponds to one of nodes **21**-*a*, **21**-*b* and **21**-*c*. When a node docking manager such as node docking manager **25**-*a* enters into communication with central docking manager **5** and optionally requests transmission of its corresponding partial log, central docking manager **5** takes as input the appropriate partial log, such as partial log **17**-*a*, and presents it to node docking manager **25**-*a*. Node docking manager **25**-*a* then replicates partial log **17**-*a* as merge log **37**-*a*.

[**0033**] At some point in the future, at the convenience of the operator of node **21**-*a*, merge processor **27**-*a* is activated. Merge processor **27**-*a* takes as input merge log **37**-*a*, and applies the updates described therein to partially replicated database **23**-*a*.

[**0034**] In addition to node **21**-*a*, **FIG. 1** also depicts two additional nodes **21**-*b* and **21**-*c*. Node **21**-*b* is depicted in communication with central computer **1**. However, unlike node **21**-*a*, the operator of node **21**-*b* has requested only to send his updates to central computer system **1**, and has not requested to be presented with changes made elsewhere to be made to his partially replicated database **23**-*b*. This may be, for example, if the operator has an urgent update that must be made as soon as possible, but does not have the time to receive updates from other nodes. Accordingly, **FIG. 1** shows only transmission of node update log **35**-*a* from node docking manager **25**-*b* to central docking manager **5**, and no transmission from central docking manager **5** to node docking manager **25**-*b*. Accordingly, the merge manager for node **21**-*b* is not activated and is not shown.

[**0035**] Likewise, node **21**-*c* is depicted as not in communication with central computer system **1**. Accordingly, the docking manager for node **21**-*c* is not activated and is not shown.

[**0036**] By the cycle described above, updates made by each of nodes **21**-*a*, **21**-*b* and **21**-*c* are presented to central computer system **1**, permitting central database **3** to be updated accordingly. In addition, each of the updates made by each of the nodes **21**-*a*, **21**-*b* and **21**-*c*, as well as updates made on central computer system **1**, are routed back to each of nodes **21**-*a*, **21**-*b*, and **21**-*c*, thereby keeping each of partial databases **23**-*a*, **23**-*b* and **23**-*c* in synchronization with each other and with central database **3**.

[**0037**] Database Structure

[**0038**] The synchronization of central database **3** with node databases **23**-*a*, **23**-*b* and **23**-*c* is performed using a construct called a Docking Object. A Docking Object consists of Member Tables (including one Primary Table), Visibility Rules, Visibility Events, and related Docking Objects.

[**0039**] A Member Table is a table of the relational database that makes up a docking object. When a docking object is propagated from central database **3** to one of node databases **23**-*a*, **23**-*b* or **23**-*c*, the propagation takes the form of an insertion into each of the Member Tables associated with the particular docking object. Similarly, when a docking object is scheduled to be removed from a database, that removal consists of deleting records from the member tables associated with the docking object. For example, a docking object that represents a sales opportunity may include tables that represent the opportunity itself (e.g., named "S_OPTY"), the product whose sale is represented by the opportunity (e.g., named "S_OPTY_PROD"), the contact for the opportunity (e.g., named "S_OPTY_CONTACT"), etc. Each of these tables is said to be a member table of the "Opportunity Docking Object."

[**0040**] A Primary Table is a Member Table that controls whether a particular instance of a Docking Object is visible to a particular node. The Primary Table has a Primary Row-ID value that is used to identify a row of the Primary Table being updated, deleted or inserted. For example, the "Opportunity Docking Object" may have as a primary table the table S_OPTY. The row-id of that table, i.e., S_OPTY-.row_id, is the Primary Row-ID for the Opportunity Docking Object.

[**0041**] A Visibility Rule is a criterion that determines whether a particular instance of a Docking Object is "visible" to a particular node **21**. If a Docking Object is visible to a particular node, that node will receive updates for data in the Docking Object. Visibility Rules are of two types, depending on the field RULE_TYPE. A Visibility Rule with a RULE TYPE of "R" is referred to as an SQL Rule. An SQL Rule includes a set of Structured Query Language (SQL) statements that is evaluated to determine if any data meeting the criteria specified in the SQL statements exists in the Docking Object. If so, the Docking Object is visible to the node. A Visibility Rule with a RULE_TYPE of "O" is referred to as a Docking Object Rule. A Docking Object Rule specifies another Docking Object to be queried for visibility. If the specified Docking Object is visible, then the Docking Object pointing to it is also visible.

[**0042**] A Related Docking Object is a Docking Object that is propagated or deleted when the Docking Object under consideration is propagated or deleted. For example, an Opportunity Docking Object may have related Docking Objects representing the sales contacts, the organizations, the products to be sold, and the activities needed to pursue the opportunity. When an Opportunity Docking Object is propagated from Central Database **3** to one of node databases **23**, the related docking objects are also propagated.

[**0043**] **FIG. 2** depicts a database schema that shows the relationship of the various components that make up a Docking Object. The schema is a meta-database, in that it does not describe the data being accessed in the database. Rather, the schema is a separate database that defines the structure of the database being accessed. That is, it is a database comprising tables that describe the relationships and data contexts of another database.

[**0044**] Each of the tables shown in **FIG. 2** is a table in a relational database, and as such is in row-column form. Many columns represent fields that are common to all the illustrated tables. Such fields include for example, a ROW_ID to identify a particular row in the table, as well as fields to tack the date and time that a row was created and last modified, and the identity of the user who created or

modified the row. In addition, each table contains fields specific to that table, and which are described in detail below.

[0045] Table S_DOBJ **61** describes the Docking Objects in an application. Table S_DOBJ **61** includes the fields OBJ_NAME and PRIMARY_TABLE_ID. Field OBJ_NAME defines the name of the Docking Object being described. Field PRIMARY_TABLE_ID is used to identify the primary table associated with this Docking Object.

[0046] Table S_DOBJ_INST **63** describes whether a particular instance of a Docking Object, described by table S_DOBJ **61**, is present on a particular node's database. Table S_DOBJ_INST **63** includes the fields NODE_ID, DOBJ_ID and PR_TBL_ROW_ID. Field NODE_ID points to a particular node table **65**. Field DOBJ_ID points to the Docking Object to which the Docking Object instance applies. Field PR_TBL_ROW_ID is used to select a particular row in the Primary Table of the Docking Object. This value identifies the Docking Object instance.

[0047] Table S_REL_DOBJ **67** describes the related Docking Objects of a particular Docking Object, described by table S_DOBJ **61**. Table S_REL_DOBJ **67** includes the fields DOBJ_ID, REL_DOBJ_ID, and SQL_STATEMENT. Field DOBJ_ID identifies the Docking Object that owns a particular related Docking Object. Field REL_DOBJ_ID identifies the related Docking Object that is owned by the Docking Object identified by DOBJ_ID. Field SQL_STATEMENT is an SQL statement that may be executed to obtain the Primary ID value of the related Docking Object.

[0048] Table S_DOBJ_TBL **69** describes the member tables of a particular Docking Object, described by table S_DOBJ **61**. Table S_DOBJ_TBL **69** includes the fields DOBJ_ID, TBL_ID, and VIS_EVENT_FLG. Field DOBJ_ID identifies the Docking Object that contains the member table described by the row. Field TBL_ID identifies the particular table in the database that is the member table described by the row. Field VIS_EVENT_FLG is a flag that indicates whether a change to this Docking Object can result in a visibility event. A value of "Y" indicates that a change can result in a visibility event; a value of "N" indicates that it cannot.

[0049] Table S_DOBJ_VIS_RULE **71** contains the visibility rules associated with a particular Docking Object. S_DOBJ_VIS_RULE **71** contains the fields DOBJ_ID, RULE_SEQUENCE, RULE_TYPE, SQL_STATEMENT and CHECK_DOBJ_ID. Field DOBJ_ID identifies the Docking Object with which a particular visibility rule is associated. Field RULE_SEQUENCE is a sequence number that indicates the sequence, relative to other visibility rules in table S_DOBJ_VIS_RULE **71**, in which the particular visibility rule should be run. RULE_TYPE specifies whether the particular visibility rule is of type "R," indicating an SQL visibility rule or of type "O," indicating a Docking Object visibility rule.

[0050] If RULE_TYPE is equal to "R," field CHECK_DOBJ_ID is not meaningful, and field SQL_STATEMENT contains an SQL statement that is evaluated using the Primary ROW-ID of the primary table associated with this Docking Object and a particular Node **21**. If the SQL statement returns any records, the Docking Object is deemed to be visible to the Node **21** for which visibility is being determined.

[0051] If RULE_TYPE is equal to "O," both field CHECK_DOBJ_ID and field SQL_STATEMENT are meaningful. Field CHECK_DOBJ_ID specifies a docking object whose visibility should be determined. If the specified docking object is deemed to be visible, then the docking object associated with the visibility rule is also visible. Field SQL_STATEMENT contains a SQL statement that, when executed, returns the Row-ID of the docking object identified by CHECK_DOBJ_ID that corresponds to the docking object instance associated with the visibility rule.

[0052] Table S_APP_TBL **73** is an Application Table that describes all the tables used in a particular application. It is pointed to by table S_DOBJ_TBL **69** for each member table in a docking object, and by table S_DOBJ for the primary table in a docking object. S_APP_TBL **73** points to table S_APP_COL **75**, which is an Application Column Table that describes the columns of data in a particular application. S_APP_TBL **73** points to table S_APP_COL **75** directly through a primary key and indirectly through such means as a Foreign Key Column Table **81**, User Key Column Table **83**, and Column Group Table **85**. The relationship of an Application Table, Application Column Table, Foreign Key Column Table, User Key Column Table and Column Group Table are well known in the art and are not further described.

[0053] Update Processing

[0054] **FIG. 3** depicts steps performed by an update manager **31** such as update manager **31**-*a*, **31**-*b* or **31**-*c* in updating a database, such as a node database **23**-*a*, **23**-*b* or **23**-*c*, responsive to user input. Execution of update manager **31** begins in step **101**. In step **103**, the update manager **31** accepts from the user input **33** in the form of a command requesting that the data in database **23** be altered. The request may be in the form of a request to delete a row of a table, to add a row to a table, or to change the value of a cell at a particular column of a particular row in a table. In step **105**, using a well-known means, the update manager **31** applies the requested update to database **23**. In step **107**, the update manager **31** creates a log record describing the update and writes it to update log **35**.

[0055] The contents of a log record describe the update made. Each log record indicates the node identifier of the node making the update, an identification of the table being updated, and an identification of the type of update being made, i.e., an insertion of a new row, a deletion of an existing row, or an update to an existing row. For an insertion, the log record additionally includes an identifier of the row being inserted, including its primary key and the values of the other columns in the row. For a deletion, the log record identifies the primary key of the row being deleted. For an update, the log record identifies the primary key of the row being updated, the column within the row being updated, the old value of the cell at the addressed row and column, and the new value of the cell.

[0056] After writing a log record in step **107**, the update processor exits for this update. The foregoing description of the update processing preferably includes additional steps not material to the present invention, for example, to assure authorization of the user to make the update, to stage and commit the write to the database to allow for rollback in the event of software or hardware failure, and the like. These steps are well-known in the art and are not described further.

[0057] An update manager **11** executing in central computer system I operates in an analogous manner, except that it updates central database **3** and writes its log records to central update log **11**.

[0058] Docking Processing

[0059] **FIG. 4** depicts steps performed by a Docking Manager **25** such as Docking Manager **25**-*a*, **25**-*b* or **25**-*c* to transmit and/or receive one or more transaction logs. Docking Manager **25** is invoked by the user of a remote node such as node **21**-*a*, **21**-*b* or **21**-*c*, whereby the user requests that the node dock with central computer **1** to upload an update log such as update log **35**-*a* to central computer **1**, to download a partial log such as partial log **17**-*a*, or both. Execution of Docking Manager **25** begins in step **121**. In step **123**, Docking Manager **25** connects with central computer **1** under the control of Central Docking Manager **5**. This connection can be any connection that enables data exchange. It is anticipated that the most common form of a connection is a telephone line used in conjunction with a modem, but other forms of data connection, such as a Local Area Network or a TCP/IP connection may also be used. Step **125** checks to see whether the user has requested that node update log **35**-*a* be uploaded to the Central Computer **1**. If so, execution proceeds to step **127**. If not, step **127** is skipped and control is given to step **129**. In step **127**, Docking Manager **25** uploads its update log to central computer **1**. The upload may be accomplished with any known file transfer means, such as XMODEM, ZMODEM, KERMIT, FTP, ASCII transfer, or any other method of transmitting data. In step **129**, Docking Manager **25** checks to see whether the user has requested that a partial log such as partial log **17**-*a* be downloaded from Central Computer **1**. If so, execution proceeds to step **131**. If not, step **131** is skipped and control is given to step **133**. In step **131**, Docking Manager **25** downloads its partial log from central computer **1**. The download may be accomplished with any known file transfer means, such as XMODEM, ZMODEM, KERMIT, FTP, ASCII transfer, or any other method of transmitting data. In step **133**, having completed the requested data transfer, Docking Manager **25** exits.

[0060] Merge Processing

[0061] Merge processing is performed by a processor such as node merge processor **27**-*a*, **27**-*b*, or **27**-*c*, or central merge processor **7**. The merge process serves to update its associated database with a transaction that has been entered by a user of a computer remote from the computer where merge processing is being performed. Merge processing is analogous to update processing and is similar in form to update processing as previously disclosed with reference to **FIG. 3**, with three differences. First, the input to a merge processor is not an update entered directly by a user, but rather is a log file that is obtained from a computer remote from the computer where the merge is executing. A second difference is that, as shown by in **FIG. 1**, merge processing does not produce a log when performed at a node. The function of a log on a node is to record a transaction for propagation to Central Computer system **1** and thence to other nodes as required. A transaction that is the subject of a merge in a node has been communicated to Central Computer System **1**, and there is no need to re-communicate it.

[0062] A third difference is that merge processing must be capable of detecting and resolving multiple conflicting transactions. For example, assume that a field contains the value "Keith Palmer." Assume further that a user at node **27**-*a* enters a transaction to update that field to "Carl Lake," and a user at node **27**-*b* enters a transaction to update the same field to "Greg Emerson." Without collision detection, data among various nodes may become corrupt. When the transaction for user **27**-*a* is merged, the field is updated from "Keith Palmer" to "Carl Lake." Without collision handling, when the transaction for node **27**-*b* is merged, the field would be updated to "Greg Emerson," and the central database would then be out of synch with the database of node **27**-*a*. Furthermore, when merge processing is performed on each of nodes **27**-*a* and **27**-*b*, each node will update its database with the other's transactions, leaving at least one node out of synch with the other node and with central database.

[0063] Therefore, merge processing must also have a means of detecting collisions and correcting them. In the above example, a simple way to detect and correct a collision is to compare the value in the database to the value that the merge log reflects as being the previous value in the node database. If the two values do not match, Merge processor **7** may reject the transaction and generate a corrective transaction to be sent to the node from which the conflicting transaction originated. In the above example, when the transaction for node **27**-*b* was presented to merge processor **7**, merge processor **7** would compare "Keith Palmer," the prior value of the field as recorded by node **27**-*b* to "Carl Lake," the present value of the field as recorded in central database **3**. Detecting the mismatch, merge processor **7** may then generate a transaction to change the value "Greg Emerson" to "Carl Lake," and write that transaction to update log **15**. In a subsequent docking operation, that transaction would be routed back to node **27**-*b* to bring its database **23**-*b* in synch with the other databases.

[0064] The above is one example of a collision and a resulting corrective action. Other types of collisions include, for example, an update to a row that has previously been deleted, inserting a row that has previously been inserted, and the like. Merge processing must detect and correct each of these collisions. This may be performed using any of a number of well-known methods, and is not discussed further.

[0065] **FIG. 5** depicts the steps performed by merge processor such as central merge processor **7**. Although it depicts merge processor **7** writing to central database **3** and to transaction log **15**, it is equally representative of a node merge processor such as node merge processor **27**-*a*, **27**-*b* or **27**-*c* updating a node database **23**-*a*, **23**-*b* or **23**-*c*. Merge processing begins at step **141**. In step **143**, merge processor **7** finds the first unprocessed transaction on received log **19**. In step **147**, merge processor **7** selects a transaction from received log **19**. In step **149**, merge processor **149** attempts to update database **3** according to the transaction selected in step **147**. In step **151**, merge processor **7** determines whether the database update of step **149** failed due to a collision. If so, merge processor proceeds to step **153**, which generates a corrective transaction. Following the generation of the corrective transaction, the merge processor returns to step **149** and again attempts to update database **3**. If no collision was detected in step **151**, execution proceeds to step **157**. In step **157**, merge processing checks to see if it is executing on central computer **1**. If so, step **155** is executed to journal the

transaction to log **15**. In any case, either if step **157** determines that the merge processing is being performed on a node or after step **155**, execution proceeds to step **159**. Step **159** checks to see if any transactions remain to be processed from log **19**. If so, execution repeats from step **147**, where the next transaction is selected. If not, merge processing exits in step **161**.

[**0066**] Log Management

[**0067**] **FIG. 6** depicts the steps to be performed by log manager **9** to prepare a partial transaction log such as partial transaction log **17**-*a*, **17**-*b*, or **17**-*c*. The procedure depicted in **FIG. 6** is executed for each node available to dock with central computer system **1**. Log manager **9** begins execution in step **171**. In step **173**, Log Manager **9** finds the first unprocessed transaction for the node whose partial transaction log is being prepared. In step **175**, log manager **9** selects a transaction for processing. In step **177**, log manager **9** checks to see whether the selected transaction originated on the same node for which processing is being performed. If so, there is no need to route the transaction back to the node, and control proceeds to step **179**. Step **179** checks to see whether there are any transactions remaining to be processed. If so, control is given again to step **175**. If not, control passes to step **189**, which records the last transaction that was processed for this node, and then exits at step **191**. If the transaction originates in other than the same node as the node for which processing is being performed, control is given to step **181**. Step **181** calls a visibility calculator to determine whether the selected transaction is visible to the node being processed. The Visibility calculator routine is described in detail further herein. In step **183**, merge processor **9** checks to see whether the visibility calculator determined that the transaction is visible. If it is not visible, control is passed to step **179**, which performs as disclosed above. If the transaction is visible, control is passed to step **185**. Step **185** writes a record for this transaction to the partial transaction log for the node being processed, for example, partial transaction log **17**-*a* for node **21**-*a*. In step **187**, the log manager **9** records the last transaction that was processed for this node, and then passes control to step **179**, which determines whether to select additional transactions or exit, as disclosed above.

[**0068**] Visibility Calculation

[**0069**] **FIG. 7** depicts a flowchart describing the process a visibility calculator for calculating visibility for a docking object as invoked by step **181** of log manager **9**. The visibility calculator is called with the node-id of the node for which visibility is being calculated, the docking object for which the visibility is being calculated, and the row-id of the docking object whose visibility id being calculated. The visibility calculator uses this information, in conjunction with information obtained from meta-data stored in the schema depicted in **FIG. 2**, to determine whether a particular transaction that updates a particular row of a particular docking object is visible to a particular node.

[**0070**] The Visibility calculator begins execution at step **201**. In step **203**, the visibility calculator makes a default finding that the transaction is not visible. Therefore, unless the visibility calculator determines that a transaction is visible, it will exit with a finding of no visibility. In step **205**, the visibility calculator selects the first visibility rule associated with the docking object. This is done by finding the table S_DOBJ_VIS_RULE **71** associated with the current Docking Object as pointed to by table S_DOBJ **61**. In step **205**, the visibility calculator selects the row of table S_DOBJ_VIS_RULE **71** with the lowest value for field RULE_SEQUENCE.

[**0071**] In step **207**, the Visibility Calculator checks the field RULE_TYPE for a value of "R." The value of "R" indicates that the rule is a SQL visibility rule. If so, the Visibility Calculator proceeds to step **209**. In step **209** the Visibility Calculator obtains a SQL statement from field SQL_STATEMENT and executes it. An example of such an SQL statement might be:

[**0072**] SELECT 'X' FROM S_OPTY_EMP

[**0073**] WHERE OPTY_ID=:PrimaryRowId

[**0074**] AND EMP_ID=:NodeId;

[**0075**] This SQL statement causes a query to be made of application table S_OPTY_EMP. The query selects any records meeting two criteria. First, the records selected must have a field OPTY_ID, which is a row id or key, equal to the Primary Row-ID of the Docking Object whose visibility is being determined. Second, the records selected must have a field EMP_ID, which may be for example, an identifier of a particular employee, equal to the NodeId of the node for whom visibility is being determined. In ordinary language, this SQL statement will return records only if a row is found in a table that matches employees to opportunities, where the opportunity is equal to the one being updated, and the employee to whom the opportunity is assigned is the operator of the node.

[**0076**] This is a simplistic example, provided for maximum comprehension. More complex SQL statements are possible. For example, the rule:

[**0077**] SELECT 'X' FROM

[**0078**] &Table_Owner.S_ACCT_POSTN ap

[**0079**] &Table_Owner.S_EMP_POSTN ep

[**0080**] WHERE ap.POSITION_ID=ep.POSITION_ID

[**0081**] AND ep.EMP_ID=:NodeId;

[**0082**] This rule queries the tables S_ACCT_POSTN (which relates a particular account with a particular position in the organization that is responsible for the account) and S_EMP_POSTN (which relates what employee corresponds to a particular position). The condition "ap.POSITION_ID =ep.POSITION_ID" requires finding a row in the account-to-position table that has the same position as a row in the employee-to-position table. The condition "ep.EMP_ID= :NodeId" further requires that the selected row in the employee-to-position table also have an Employee ID equal to the ID of the user of the Node for which visibility is being determined. In ordinary language, this condition allows visibility if the employee occupies the position that has responsibility for the account in the docking object being updated.

[**0083**] There is no particular limit to the complexity of the conditions in the SQL statement used to evaluate visibility. Particular implementations of SQL may impose limitations,

and resource considerations may make it desirable to use less complex statements, but these limitations are not inherent in the invention.

[0084] Step **211** evaluates whether the execution of SQL_STATEMENT in step **209** returned any records. If records were returned, this indicates that the Node for which visibility is being checked has visibility to the docking object being processed. Accordingly, if records are returned, the Visibility Calculator proceeds to step **213**. In step **213**, the transaction is marked visible. Because no further rules need to be evaluated to determine visibility, the visibility calculator proceeds to step **228**. Step **228** synchronizes the databases by determining whether the calculated visibility requires the insertion or deletion of a docking object into a particular node's partially replicated database. This may occur, for example, if a node is determined to have visibility to a docking object due to a change to a related docking object. For example, an owner of a node may be assigned to a particular activity that is related to a particular sales opportunity. As a result, the node should be provided with a copy of the object representing the sales opportunity.

[0085] **FIG. 8** depicts the steps performed to synchronize a partially replicated database in response to a change in data visibility. Execution begins in step **241**. In step **243**, the Visibility Calculator references the visibility just calculated for a docking object. If the Docking Object is visible, execution proceeds to step **245**. Step **245** references the S_DOBJ_INST table, to verify that a row exists for the Docking Object for the current node. If a row exists, this indicates that the node in question already has a copy of the referenced Docking Object, and the routine proceeds to step **255**, where it exits. If, however, no row exists for the Docking Object at the node being processes, this indicates that the node in question does not have a copy of the Docking Object on its partially replicated database. The routine then proceeds to step **247**, where a transaction is generated to direct the node to insert the Docking Object into its partially replicated database.

[0086] If step **243** determines that the Docking Object is not visible, execution proceeds to step **249**. Step **249** references the S DOBJ_INST table, to verify that no row exists for the Docking Object for the current node. If step **243** determines that no row exists in the S_DOBJ_INST table for the current docking object for the current row, this indicates that the node in question does not have a copy of the referenced Docking Object, and the routine proceeds to step **255**, where it exits. If, however, a row exists for the Docking Object at the node being processed, this indicates that the node in question does have a copy of the Docking Object on its partially replicated database. The routine then proceeds to step **251**, where a transaction is generated to direct the node to delete the Docking Object from its partially replicated database.

[0087] Referring again to **FIG. 7**, following the data synchronization routine of step **228**, the Visibility Calculator proceeds to step **229**, where it exits. Referring to **FIG. 6**, as previously described, the resulting finding of visibility is available to be checked by the log manager in step **183** to determine to write the transaction.

[0088] Referring again to **FIG. 7**, if step **211** determines that no records were returned by the execution of the SQL statement in step **209**, execution proceeds with step **215**. Step **215** checks to see whether there are any remaining visibility rules to be assessed. If not, the visibility calculator proceeds to step **228** to synchronize the database, and then to step **229**, where it exits. In this case, the default mark of no visibility that was set in step **203** remains set. This value will also be used by the log manager as shown in **FIG. 6**, step **183**, to determine not to write the transaction.

[0089] Referring again to **FIG. 7**, if rules remain to be assessed, control proceeds to step **217**, which selects the next rule to be processed. Control is then given again to step **207** to begin processing the new rule.

[0090] The preceding text provided a description of the processing or SQL visibility rule; that is, visibility rules of type "R." If step **207** determines that the visibility rule is not of type "R," the visibility rule is of type "O." Type "O" indicates a docking-object visibility rule. In such a case, the docking object being processed will be considered to be visible if it is related to a particular related docking object that is visible. If field RULE_TYPE is not equal to "R," then. execution proceeds to step **221**. Step **221** determines the related Docking Object whose visibility must be determined to determine whether the current docking object is visible. The related Docking Object identifier is obtained from field CHECK_DOBJ_ID in table S_DOBJ_VIS_RULE **71**. In step **223**, the Visibility Calculator determines which row in the related Docking Object must be queried for visibility. In order to determine this, the Visibility Calculator obtains a predetermined SQL statement from the field SQL_STATEMENT and executes it. The SQL statement is a query that select one or more rows of the Docking Object that, for example, correspond to the docking object for which the Visibility Calculator was invoked.

[0091] For example, assume that it is desired to indicate that a record for a sales opportunity should be visible if the Node has visibility to any sales quote made for that sales opportunity. This may be accomplished using the following SQL statement:

[0092] SELECT"_ID" FROM

[0093] &Table_Owner.S_DOC_QUOTE

[0094] WHERE OPTY_ID=:Primary Rowld

[0095] This SQL statement accesses a table S_DOC_QUOTE that contains all sales quotes. The WHERE clause specifies retrieval of all rows where the Opportunity ID of the row is equal to the Row-ID of the opportunity for which visibility is being calculated. The Visibility manager retrieves the specified Row-Ids, thereby identifying the rows of the S_DOC_QUOTE table whose visibility must checked.

[0096] Having determined the a related docking object and the row-ID of that related docking object upon whose visibility the visibility of the current docking object depends, the Visibility Calculator proceeds to step **225**. In step **225**, the Visibility Calculator recursively invokes itself to determine visibility of the related docking object. The recursively invoked Visibility Calculator operates in the same manner as the Visibility Calculator as called from the Log Manager **9**, including the capability to further recursively invoke itself. When the recursive call concludes, it returns a visibility indicator for the related Docking Object, and control proceeds to step **227**. In step **227**, the Visibility

calculator determines whether the related Docking Object was determined to have been visible. If so, the Visibility Calculator proceeds to step **213** to mark the originally current Docking Object as visible, and then to step **228** to synchronize the database and then to step **229** to exit. If the related Docking Object was not determined to be visible, control proceeds to step **215** to determine whether additional visibility rules remain to be assessed.

[**0097**] The Visibility Calculator, in conjunction with the Log Manager is therefore able to determine what subset of update transaction data is required to be routed to any particular node. This operation serves to reduce the transmission of unneeded data from the Central Computer **1** to the various nodes such as nodes **21**-*a*, **21**-*b* and **21**-*c* that utilize partially replicated databases, and to reduce the system resources such as disk space needed to store, and the CPU time needed to process, what would otherwise be required to maintain a fully replicated database on each remote node.

[**0098**] The operation of the log manager **9** in conjunction with the Visibility Calculator herein described will be apparent from reference to the description and to the drawings. However, as a further aid in the description of these facilities, a pseudocode representation of these facilities is hereto attached as an Appendix.

[**0099**] Software Distribution Integration with Remote Upgrade

[**0100**] The docking facility of the present invention also permits the distribution of software upgrades and related database schema. This provides an easy process to allow administrators to notify remote users of the existence of software upgrades and to distribute software upgrades to remote users. It provides an easy process for remote users to receive notification of software upgrades and to apply the software upgrade. It provides a means to associate a software upgrade with a remote schema upgrade so that the software upgrade is not applied before the remote schema upgrade. It provides a means for a remote user to provide feedback regarding a successful or unsuccessful completion of the software upgrade to the administrator.

[**0101**] Typically, implementation of software upgrades is very passive. The user does not actively receive information about the availability of software that should be downloaded. Users are required to download the file manually, and, once received, the upgrade is installed using an installer package separate from the software package being upgraded. It would be advantageous to provide a means in the software package to publish the availability of software for download to remote users so that the remote users are informed of the need to download software and are prompted when the download should occur, and provide for the dependency of a software upgrade on an accompanying schema upgrade.

[**0102**] According to one embodiment of our invention there is provided is a method of upgrading a software application from one or more upgrade package files in a server (**1**) to a client (**21***a*, **21***b*, **21***c*). According to this method a copy of the upgrade package files and an upgrade database table are created on the server (**1**). A pointer is created in the client's (**21***a*, **21***b*, **21***c*) file on the server (**1**). This pointer points to the upgrade package files on the server (**1**); In invoking the upgrade the, the upgrade files are made active, and the upgrade database table is scanned when a client (**21***a*, **21***b*, **21***c*) docks. This is to determine the status of an upgrade with respect to the particular client (**21***a*, **21***b*, **21***c*). The upgrade is copied to the client (**21***a*, **21***b*, **21***c*) if the client (**21***a*, **21***b*, ^{21}*c*) has not received the upgrade. At this point the upgrade may be invoked at the client (**21***a*, **21***b*, **21***c*).

[**0103**] The upgrade can be invoked at any point during a docking session, for example, at the beginning of a client (**21***a*, **21***b*, **21***c*) session., or, and most preferably, at the end of a client (**21***a*, **21***b*, **21***c*) session. The upgrade can be invoked at the client user's option, or at the server's option, that is, by forced downloading as will be described hereinbelow.

[**0104**] One way of implementing the invention, as will be described more fully hereinbelow, is to create a docking item file type to scan the upgrade database table when the client (**21***a*, **21***b*, **21***c*) docks to thereby determine the status of an upgrade with respect to the client (**21***a*, **21***b*, **21***c*).

[**0105**] These various aspects of our invention may be implemented as program products. That is, they may be implemented as a computer usable medium with computer program code embodied therein for causing the upgrading of a software application from upgrade package files in a server (**1**) to a client (**21***a*, **21***b*, **21***c*). The computer readable program in the program product article of manufacture contains computer readable program code means for causing a computer to effect creating a copy of the upgrade package files on the server (**1**), creating an upgrade database table on the server (**1**); creating a pointer in the client's (**21***a*, **21***b*, **21***c*) file on the server (**1**) pointing to the upgrade package files on the server (**1**), making the upgrade active, scanning the upgrade database table when a client (**21***a*, **21***b*, **21***c*) docks to determine the status of an upgrade with respect to the client (**21***a*, **21***b*, **21***c*), copying the upgrade to a client (**21***a*, **21***b*, **21***c*) if the client (**21***a*, **21***b*, **21***c*) has not received the upgrade, and invoking the upgrade at the client (**21***a*, **21***b*, **21***c*).

[**0106**] Additionally, our invention may be implemented as a program product in the form of a program storage device readable by a machine, tangibly embodying a program of instructions executable by a machine to perform method steps for of upgrading a software application from upgrade package files in a server (**1**) to a client (**21***a*, **21***b*, **21***c*) said method steps comprising creating a copy of the upgrade package files on the server (**1**), creating an upgrade database table on the server (**1**); creating a pointer in the client's (**21***a*, **21***b*, **21***c*) file on the server (**1**) pointing to the upgrade package files on the server (**1**), making the upgrade active, scanning the upgrade database table when a client (**21***a*, **21***b*, **21***c*) docks to determine the status of an upgrade with respect to the client (**21***a*, **21***b*, **21***c*), copying the upgrade to a client (**21***a*, **21***b*, **21***c*) if the client (**21***a*, **21***b*, **21***c*) has not received the upgrade, and invoking the upgrade at the client (**21***a*, **21***b*, **21***c*).

[**0107**] The integrated update works as follows. At the end of a normal docking session, the user is prompted with the information regarding the availability of a software upgrade. The user has the option to download the software upgrade or to defer and download the software upgrade later. This can be overridden by the system administrator, who has the

ability to mark the file as a force download. In such a case, the user is not prompted to download the file; instead, the file is downloaded without input from the user. The user is prompted using a message box that has the ability to time out.

[0108] There are two classes of software upgrades: software that is being distributed in conjunction with a schema upgrade and software that is not associated with a schema upgrade. If the software is associated with a schema upgrade, the software upgrade is not applied until after the schema upgrade has been applied. The applying of the schema upgrade invokes the software upgrade at the end of the processing of the schema upgrade. If the software is not associated with a schema upgrade, then after successfully downloading the software upgrade files, the user will be prompted to apply the upgrade now or to defer. The administrator will have the ability to force the applying of the software upgrade immediately upon completion of the docking session.

[0109] Once the user chooses to apply the software upgrade, the installation component is invoked and the database application is closed. The installation component then guides the user through the necessary steps needed to apply the software.

[0110] The system administrator uses a dialog to specify the association of files, messages and schema upgrades for an upgrade package. The dialog includes a master section and a detail section. The master section allows for the creation of a header record that names the upgrade package and specifies some general attributes regarding the upgrade. The detail section associates software upgrade files, messages and schema upgrades.

[0111] The attributes of the master record include the name of the upgrade package; the schema version of the database after the upgrade is applied; a message supplied to users to view prior to downloading the upgrade; a message to be displayed when the upgrade is applied; a download attribute indicating how the file must be downloaded, e.g., whether the file must be downloaded immediately or whether it may be deferred by the user; an application attribute indicating how the upgrade may be applied, e.g., whether the upgrade must be applied immediately, may be deferred by the user, or must be deferred pending a corresponding upgrade of a corresponding schema or software upgrade; and a description.

[0112] The attributes of the detail record include a record type indicating whether the file is a message, a software upgrade, etc., and the name of the file.

[0113] Upgrades are denoted by a record in an upgrade table in the database. Once a record is created in the upgrade table and the associated upgrade package is made active, Log Manager routes this information using the previously described docking mechanisms to remote users by creating an entry in the users' server.ts files. This entry points to a global upgrade table of contents (TOC) file. A single TOC file serves all docking users per application server installation. The upgrade TOC file contains the detailed information regarding the upgrade package. In this embodiment, only one upgrade package is active at a given time.

[0114] When a user docks and retrieves the server.ts file, the docking client scans the server.ts file for the existence of upgrade entries. Depending upon the attributes of any upgrade entries in the server.ts file, either the upgrade files be downloaded immediately or a message is displayed to the user. The user optionally has have the option either download the files during the current docking session or defer download until a later docking session.

[0115] Depending upon the attributes of the upgrade package, the installation component may be invoked automatically or the user may defer applying the upgrade. If the software upgrade is associated with a schema upgrade, then after the schema upgrade has been applied, the status of software upgrade files is checked to verify that all files associated with the upgrade have been downloaded. Any files not yet downloaded will be downloaded, making a connection to the application server if necessary. The software upgrade will then be invoked by the installation component.

[0116] The file types are represented by the field UTLTocFileType. A file type of UTLTocFileTOCUpg indicates the Upgrade TOC file, and a file type of UTLTocFileUpgrade indicates a file that is a constituent part of an upgrade. Optionally, a file type of UTLTocFileMessage indicates a file containing a message to be displayed to the user.

[0117] The upgrade is represented to the user as a new dock item type, named CSSDockUpg. The CSSDockUpg class is derived from the CSSDockItem class.

[0118] When the user docks and is sending or receiving data from the server, the CSSDockUpg dock item type is created. When executed, this class examines the server.ts file for an entry type of UTLTocFileTOCUpg. If found, either the message specified by the entry pre-download message will be displayed to the user using a time-out dialog box at the end of the docking session or the files will be downloaded immediately depending on the attributes of the entry type UTLTocFileTOCUpg.

[0119] Once the files are downloaded, the apply message from the upgrade TOC file is displayed to the user at the end of the docking session. Alternatively, the installation component is invoked by the mobile client.

[0120] When the upgrade is applied, the installation component is invoked. If the user defers application of the upgrade, then each time the user issues docks to the headquarters server, the docking client looks for the upgrade TOC file in the upgrade directory on the client machine. If the file exists, the apply message is displayed to the user.

[0121] After the upgrade files have been downloaded the upgrade TOC file is stored locally on the client. This file will then be examined after the schema upgrade process has completed.

[0122] The master copy of the upgrade package files is placed on the file server. When a Log Manager process is processing a user and encounters the transaction that makes the upgrade package active, Log Manager copies these files to the local application server upgrade directory if the files do not already exist. Log Manager also creates the upgrade TOC file in this directory if the TOC file does not already exist.

[0123] Once an upgrade package is marked as active, a record in the docking transaction log is created. This record will cause the log preprocessor to create the global upgrade

TOC file. The contents of the file are inserted into a text column of the upgrade package. When the log router is executing for a particular user, this record will cause the log router to create an entry in the user's server.ts file, which that points to the global upgrade TOC file. The log router also ensures that the global upgrade TOC file exists in a predetermined directory. If the file exists, the log router reads the text column of the upgrade package that contains the contents of the TOC file and creates the global upgrade TOC file. Alternatively, the log router may read the text column and create an upgrade TOC file for each user. This would prevent more than one log router executable from creating the global upgrade TOC file.

[0124] In some cases, a schema upgrade will require a corresponding software upgrade in order for the schema to function properly. This may occur, for example, when the vendor supplies a new software-schema pair. A customer cannot cause a software version conflict with the ability for dbinit/data merge to apply the schema changes. If schema upgrade that requires a corresponding software upgrade is to be applied, the software upgrade must be applied first, because it is the new software that provides support for the schema upgrade.

[0125] An example of this scenario is when the vendor ships new software and a new version of the database. The system administrator packages the software and makes it available for download by the user. The system administrator then applies the database upgrade to the central database.

[0126] At some point, a remote user docks and is informed that the central database has been updated, and that the user's docking operation is limited to downloading changes to the database; that is, the user is not permitted to upload transactions until his own partially replicated database has been upgraded to match the central database schema. The user then downloads the database upgrade files corresponding to the upgrade installed on the central database. The installation component is invoked (either by the client-side software upon detecting the upgrade condition, or expressly invoked by the user, depending on the upgrade file's attributes). The installation component opens the database upgrade files and contains a checksum value for the upgrade file set. The checksum is compared against a value in the user's configuration file that uniquely identifies the user's software level. If the checksum value is different, then the client software does not have the ability to apply the schema changes. The schema changes will be deferred until the user separately upgrades his or her software level.

[0127] A checksum may also be included in the DX files that represent transactions. The data merge component verifies the checksum associated with the transaction against the checksum in the configuration file. If the checksums do not match, the application of the DX file is deferred. This prevents a user from inadvertently applying changes that cannot be supported by the software.

CONCLUSION

[0128] Various modifications to these embodiments will be readily apparent to those skilled in the art, and the generic principles defined herein may be applied to other embodiments without the use of inventive faculty. Thus, the present invention is not intended to be limited to the embodiments shown herein, but is to be accorded the widest scope consistent with the principles and novel features disclosed herein.

[0129] All publications and patent applications mentioned in this specification are herein incorporated by reference to the same extent as if each individual publication or patent application was specifically and individually indicated to be incorporated by reference.

[0130] The invention now being fully described, it will be apparent to one of ordinary skill in the art that many changes and modifications can be made thereto without departing therefrom.

APPENDIX

Writing User Transaction Log File for a Given Laptop Node

This program will be called by a server-side process that processes transaction log entries for all Laptop Nodes. For each Laptop Node, the calling process building the UserTrxnLogFileName and calling Program 1.

Input Parameters

- LaptopNodeId - node_id of the destination laptop
- UserTxnLogFileName - full path of the file where txns will be written
- MaxBatchTxns - number of txns between commits and updates to the S_DOCK_STATUS table
- MaxTxns - number of txns to process in this session. Use this parameter to limit processing.

Main Algorithm

```
- - Check parameters
IF (MaxTxns < 1 || MaxBatchTxns < 1) THEN
    Invalid Parameter
END IF
- - Get last LOG_EXTRACT number for the Laptop from S_DOCK_STATUS
last_txn_commit_number = UTLDStatGetLogNum(LaptopNodeId);
- - Initialize Variables
NumTxns = 0;          - - Total number of txns processed
NumBatchTxns = 0;     - - Total number of txns written in the current batch
- - Read Docking Object and Table definitions into memory structures
StartDictApi ( );
- - Open the User Log Txn file
Open User Log Txn file
```

APPENDIX-continued

Writing User Transaction Log File for a Given Laptop Node

```
- - Select and process new txns in S_DOCK_TRANSACTION_LOG
- - where txn_commit_number > last_txn_commit_number
FOR each new txn LOOP
    - - Stop processing if reach MaxTxns
    IF NumTxns = MaxTxns THEN
        break;
    END IF;
    - - Prevent circular txns. Do not send the txn back to the originating laptop
    IF txn.OriginNodeId = LaptopNodeId THEN
        Goto next transaction
    END IF;
    - - Process all other types of transactions
    - - This is the visibility calculator!
    - - This routine also processes implicit visibility events
    - - Later: Data Merge can call this function to check whether a txn is
    - - still visible when merging txns into a laptop or server database.
    CheckVisibility (LaptopNodeId, LogRecordType, TableName, TransRowId);
    IF txn is visible THEN
        - - Write transactions to UserTxnLog file depending on the
        - - type of LogRecordType.
        Write the txn to the user log file
        ++NumBatchTxns
    END IF;
    - - Finished processing the txn
    - - Commit (if needed)
    IF NumBatchTxns = MaxBatchTxns THEN
        - - Assume that separate process comes around and deletes
        - - Txns in S_DOCK_TRANSACTION_LOG that have been processed
        - - for all nodes. So, no need to delete the txns from the log.
        Update last LOG_EXTRACT number for Laptop in S_DOCK_STATUS
        Commit;
        NumBatchTxns = 0
    END IF;
    ++NumTxns
End Loop; /* Each transaction in the Txn Log table */
- - Commit
Update last LOG_EXTRACT number for Laptop in S_DOCK_STATUS
Commit;
- - Close log file (if needed)
IF UserTxnLogFileP != NULL THEN
    Close File;
END IF;
StopDictApi ( );
```

Check Visibility Routines

```
- - Check if a record in the txn log is visible to a LaptopNodeId
BOOL CheckVisibility (LaptopNodeId, LogRecordType, TableName, TransRowId)
{
    - - SQLStatements routed based on the destination list
    IF LogRecordType in ('SQLStatement') THEN
        IF Laptop Node in destination list THEN
            return TRUE;
        END IF;
    - - Shadow and Multi Record LogRecordTypes are routed to all nodes
    - - No visibility events with these LogRecordTypes.
    ELSIF LogRecordType in ('ShadowOperation', 'MultiRecordDelete',
                            'MultiRecordUpdate') THEN
        return TRUE;
    - - Simple Deletes need more processing
    ELSIF LogRecordType in (—Simple Delete') THEN
        IF (table.visibility in ('Enterprise', 'Limited')) THEN
            return TRUE;
        END IF;
    - - Simple Inserts and Simple Updates need more processing
    - - CheckTxnVisibility( ) also processes implicit visibility events
    ELSIF LogRecordType in ('Simple Insert', 'Simple Update') THEN
        IF (table.visibility = 'Enterprise') THEN
            return TRUE;
        ELSIF table.visibility = 'Limited' THEN
            IF CheckTxnVisibility (LaptopNodeId, Table, RowId) THEN
                return TRUE;
            END IF;
        END IF;
    END IF;
```

APPENDIX-continued

Writing User Transaction Log File for a Given Laptop Node

```
}
- - Check if a record in the txn log is visible to a LaptopNodeId
static BOOL CheckTxnVisibility (LaptopNodeId, Table, RowId)
{
    BOOL bVisible = FALSE;
    Find the Table in the Dictionary;
    IF Table not found THEN
        Error: Table not defined
    END IF;
    FOR all docking objects that the table belongs to LOOP
    - - Generate SQL to get PrimaryId values of the Docking Object
    GeneratePrimaryIdSQL (Table, RowId, DockingObject);
    FOR each PrimaryId value retrieved LOOP
    CheckObjectVisibility (LaptopNodeId, PrimaryTable, PrimaryRowId)
    IF object is visible THEN
                - - Because CheckObjectVisibility( ) also processes implicit
                - - visibility events, we must loop through ALL docking objects
            - - even if we already know that the Txn is visible.
                - - Exception: if the table has VIS_event_FLG = 'N'
                - - then we can return immediately.
                IF Table.visibilityEventFLG = 'N' THEN
                    return TRUE;
                ELSE
                    bVisible = TRUE;
                END IF;
            END IF;
        END LOOP;
    END LOOP;
    return bVisible;
}
- - Check if an instance of a docking object is visible to the laptop user.
- - Also processes implicit visibility events!
BOOL CheckObjectVisibility (LaptopNodeId, DockingObjectName, PrimaryRowId)
{
    FOR each visibility rule for the Docking Object LOOP
        IF RuleType = RuleSQL THEN
            Run the select SQL statement using PrimaryRowId;
            IF any rows returned THEN
                - - row is visible
                - - Process an implicit Download Object
                    DownloadObjectInstance (LaptopNodeId, PrimaryTableName,
                                            PrimaryRowId);
                    return TRUE;
            END IF;
        ELSIF RuleType = CheckDockingObject THEN
            Run the ParameterSQL using PrimaryRowId to get newPrimaryRowId
            FOR each record retrieved by ParameterSQL LOOP
                - - RECURSIVE!
                CheckObjectVisibility (LaptopNodeId, CheckDockingObjectName,
                                       newPrimaryRowId);
                IF rc = TRUE THEN
                    - - Process an implicit Download Object
                    DownloadObjectInstance (LaptopNodeId, PrimaryTableName,
                                            PrimaryRowId);
                return TRUE;
                END IF;
            END LOOP;
        END IF;
    END LOOP;
    - - Object is not visible.
    - - Process an implicit Remove Object
    RemoveObjectInstance (LaptopNodeId, PrimaryTableName, PrimaryRowId);
    return FALSE;
}
```

Generate SQL Statement to Get PrimaryId

```
- - Generate the SELECT SQL statement to get the PrimaryId value of
- - the docking object for the given MemberTable
- -
- - SQL statement looks like:
- -       SELECT tp.<row_id>
- -           FROM <table_owner>.<Table> t1,
- -               <table_owner>.<PKTable> t2,
- -               ... one or more intermediate tables between the table
```

APPENDIX-continued

Writing User Transaction Log File for a Given Laptop Node

```
- -                    and the PrimaryTable
- -                <table_owner>.<PKTable> tN
- -                    <table_owner>.<PrimaryTable> tp
- -            WHERE t1.ROW_ID = :row_id /* row_id in transaction log */
- -                /* join to PK table t2 */
- -                AND t1.<FKColumn> = t2.<PKColumn>
- -                AND <t1 FKCondition>
- -                /* any number of joins until reach the table that joins
- -                    to the PrimaryTable */
- -                /* join from t2 to tN */
- -                AND t2.<FKColumn> = tN.<PKColumn>
- -                AND <t2 FKCondition>
- -                    /* join to the PrimaryTable */
- -                    AND tN.<FKColumn> = tp.<PKColumn>
- -                    AND <tN FKCondition>
- - Note that there may be one or more paths from the Member Table
- - to the Primary Table. We need to generate a SQL select statement
- - for each of the paths and UNION the statements together.
- -
- - This function assumes that there are no loops in the definition.
- -
- - These SQL statement do not change for each Table in a Docking Object,
- - so we can calculate them one and store them in memory.
- -
struct
{
    CHAR* selectList;
    CHAR* fromClause;
    CHAR* whereClause;
    UINT numTables; /* also the number of joint to reach the Primary Table */
} GenStmt;
GeneratePrimaryIdSQL (Table, DockingObject)
{
    /* there may be more than one SQL statement, so we have a dynamic
        array of SQL statements. Each element in the array is a path
        from the Table to the Primary Table*/
    DynArrId GenStmtArr;
    GenStmt newGenStmt;
    CHAR* sqlStmt;
    DynArrCreate (GenStmtArr);
    - - Create the first element and initialize
    newGenStmt = malloc( );
    newGenStmt.numTables = 1;
    newGenStmt.selectList = "SELECT row_id";
    newGenStmt.fromClause = "FROM <Table> t1";
    newGenStmt.whereClause = "WHERE t1.ROW_ID = :row_id";
    DynArrAppend (GenStmtArr, &newGenStmt);
    /* Recursively follow FKs to the PrimaryTable */
        Build the select, from and where clause simultaneously */
    AddPKTable (Table, DockingObject, GenStmtArr, 0);
    - - Union all the paths together
    numStmts = DynArrSize (GenStmtArr);
    FOR all elements in the array LOOP
        tmpSqlStmt = GenStmtArr[j].selectList|| GenStmtArr[j].fromClause ||
GenStmtArr[j].whereClause;
        sqlStmt = sqlStmt || 'UNION' || tmpSqlStmt;
    END LOOP;
    DynArrDestroy (GenStmtArr);
    IF sqlStmt = NULL THEN
        Error: no path from Table to Primary Table.
    END IF;
}
- - Recursively follow all FKs to the Primary Table
AddPKTable (Table, DockingObject, GenStmt, InputStmtNum)
{
    UINT numFKS = 0;
    UINT StmtNum;
    GenStmt newGenStmt;
    FOR all FKs for the table LOOP
        IF PKTable is a Member Table of the Docking Object THEN
            - - If there's more than one FK, then there is more than one path
            - - out of the current table.
            - - Copy the SQL stmt to a new DynArrElmt to create a new path
            IF numFKs > 0 THEN
```

APPENDIX-continued

Writing User Transaction Log File for a Given Laptop Node

```
                    - - Create a new element and copy from GenStmt[InputStmtNum]
                    newGenStmt = malloc( );
                    newGenStmt.numTables = GenStmt[InputStmtNum].numTables;
                    newGenStmt.selectList = GenStmt[InputStmtNum].selectList;
                    newGenStmt.fromClause = GenStmt[InputStmtNum].fromClause;
                    newGenStmt.whereClause = GenStmt[InputStmtNum].whereClause;
                    DynArrAppend (GenStmtArr, &newGenStmt);
                    StmtNum = DynArrSize (GenStmtArr);
                    - - Put a check here for infinite loops
                    IF StmtNum == 20 THEN
                        Error: Probably got an Infinite loop?
                END IF;
            ELSE
                    StmtNum = InputStmtNum;
            END IF;
                - - Append the new PKTable to the fromClause and whereClause
            GenStmt[StmtNum].fromClause =
                GenStmt[StmtNum].fromClause || ",\n <Table> t<numTables + 1>";
            GenStmt[StmtNum].whereClause =
                GenStmt[StmtNum].whereclause ||
                "AND t<numTables>.<FKColumn> = t<numTables + 1>.<PKColumn>" ||
                "AND <FKCondition for Table if any>";
            ++GenStmt.numTables;
            - - PKTable is the Primary Table then Done.
            IF PKTable = PrimaryTable THEN
                RETURN;
            ELSE
                    AddPKTable (PKTable, DockingObject, GenStmt, StmtNum);
            END IF;
                    - - Only count FKs to other member tables in the same Docking Object
                    ++numFKs;
            END IF;
        END LOOP;
        RETURN;
}
```

Process Visibility Events

```
- - Download an Object Instance to a Laptop
- - This function also downloads all Related Docking Object instances.
BOOL DownloadObjectInstance (LaptopNodeId, ObjectName, PrimaryRowId)
{
    - - Check if the object instance is already downloaded to the laptop
    Find the object instance in the S_DOBJ_INST table
    IF exists on laptop THEN
        return TRUE;
    END IF;
    - - Register object instance in S_DOBJ_INST table
    - - Write Download Object records to the Txn Log
    FOR each member table of the docking object LOOP
        Generate SQL select statement to download records
        Write each retrieved record to the User Txn Log file
    END LOOP;
    - - Download records for Parent Object instances
    FOR each RelatedDockingObject LOOP
        Run ParameterSQL to get newPrimaryId of RelatedDockingObjects
        FOR each newPrimaryId retrieved LOOP
            - - Check if the instance of the object is visible to the laptop user
            CheckObjectVisibility (LaptopNodeId, ObjectName, PrimaryRowId)
            IF visible THEN
                DownloadObjectInstance (LaptopNodeId,
                    RelatedDockingObject, newPrimaryRowId);
            END IF;
        END LOOP;
    END LOOP;
    return TRUE;
}
- - Remove an Object Instance to a Laptop
- - This function also removes all Related Docking Object instances.
BOOL RemoveObjectInstance (LaptopNodeId, ObjectName, PrimaryRowId)
{
    - - Check if the object instance is already downloaded to the laptop
    Find the object instance in the S_DOBJ_INST table
    IF does not exist on laptop THEN
        return TRUE;
```

APPENDIX-continued

Writing User Transaction Log File for a Given Laptop Node

```
    END IF;
    - - Delete the object instance from S_DOBJ_INST table
    - - Write Remove Object records to the Txn Log
    FOR each member table of the docking object LOOP
        Generate SQL select statement to get records to delete
        Write each retrieved record to the User Txn Log file
    END LOOP;
    - - Remove for Parent Object instances
    FOR each RelatedDockingObject LOOP
        Run ParameterSQL to get newPrimaryId of RelatedDockingObjects
        FOR each newPrimaryId retrieved LOOP
                - - Check if the instance of the object is visible to the laptop user
            CheckObjectVisibility (LaptopNodeId, ObjectName, PrimaryRowId)
            IF not visible THEN
                RemoveObjectInstance (LaptopNodeId,
                    RelatedDockingObject, newPrimaryRowId);
            END IF;
        END LOOP;
    END LOOP;
    return TRUE;
}
```

We claim:

1. A method of upgrading a software application from upgrade package files in a server (**1**) to a client (**21***a*, **21***b*, **21***c*) comprising the steps of:

a) creating a copy of the upgrade package files on the server (**1**);

b) creating an upgrade database table on the server (**1**);

b) creating a pointer in the client's (**21***a*, **21***b*, **21***c*) file on the server (**1**) pointing to the upgrade package files on the server (**1**);

c) making the upgrade active;

d) scanning the upgrade database table when a client (**21***a*, **21***b*, **21***c*) docks to determine the status of an upgrade with respect to the client (**21***a*, **21***b*, **21***c*);

d) copying the upgrade to a client (**21***a*, **21***b*, **21***c*) if the client (**21***a*, **21***b*, **21***c*) has not received the upgrade; and

e) invoking the upgrade at the client (**21***a*, **21***b*, **21***c*).

2. The method of claim 1 comprising invoking the upgrade at the beginning of a client (**21***a*, **21***b*, **21***c*) session.

3. The method of claim 1 comprising invoking the upgrade at the end of a client (**21***a*, **21***b*, **21***c*) session.

4. The method of claim 1 comprising invoking the upgrade at the client's (**21***a*, **21***b*, **21***c*) option.

5. The method of claim 1 comprising invoking the upgrade at the server's (**1**) option.

6. The method of claim 1 comprising creating a docking item file type to scan the upgrade database table when the client (**21***a*, **21***b*, **21***c*) docks to thereby determine the status of an upgrade with respect to the client (**21***a*, **21***b*, **21***c*).

7. An article of manufacture comprising a computer usable medium having computer program code means embodied therein for causing upgrading a software application from upgrade package files in a server (**1**) to a client (**21***a*, **21***b*, **21***c*), the computer readable program means in said article of manufacture comprising:

a) computer readable program code means for causing a computer to effect creating a copy of the upgrade package files on the server (**1**);

b) computer readable program code means for causing a computer to effect creating an upgrade database table on the server (**1**);

b) computer readable program code means for causing a computer to effect creating a pointer in the client's (**21***a*, **21***b*, **21***c*) file on the server (**1**) pointing to the upgrade package files on the server (**1**);

c) computer readable program code means for causing a computer to effect making the upgrade active;

d) computer readable program code means for causing a computer to effect scanning the upgrade database table when a client (**21***a*, **21***b*, **21***c*) docks to determine the status of an upgrade with respect to the client (**21***a*, **21***b*, **21***c*);

d) computer readable program code means for causing a computer to effect copying the upgrade to a client (**21***a*, **21***b*, **21***c*) if the client (**21***a*, **21***b*, **21***c*) has not received the upgrade; and

e) computer readable program code means for causing a computer to effect invoking the upgrade at the client (**21***a*, **21***b*, **21***c*).

8. The article of manufacture of claim 7 further comprising computer readable program code means for causing a computer to effect invoking the upgrade at the beginning of a client (**21***a*, **21***b*, **21***c*) session.

9. The article of manufacture of claim 7 further comprising computer readable program code means for causing a computer to effect invoking the upgrade at the end of a client (**21***a*, **21***b*, **21***c*) session.

10. The article of manufacture of claim 7 further comprising computer readable program code means for causing a computer to effect invoking the upgrade at the client's (**21***a*, **21***b*, **21***c*) option.

11. The article of manufacture of claim 7 further comprising computer readable program code means for causing a computer to effect invoking the upgrade at the server's (**1**) option.

12. The article of manufacture of claim 7 further comprising computer readable program code means for causing a computer to effect creating a docking item file type to scan the upgrade database table when the client (**21***a*, **21***b*, **21***c*) docks to thereby determine the status of an upgrade with respect to the client (**21***a*, **21***b*, **21***c*).

13. A program storage device readable by a machine, tangibly embodying a program of instructions executable by a machine to perform method steps for of upgrading a software application from upgrade package files in a server (**1**) to a client (**21***a*, **21***b*, **21***c*) said method steps comprising:

a) creating a copy of the upgrade package files on the server (**1**);

b) creating an upgrade database table on the server (**1**);

b) creating a pointer in the client's (**21***a*, **21***b*, **21***c*) file on the server (**1**) pointing to the upgrade package files on the server (**1**);

c) making the upgrade active;

d) scanning the upgrade database table when a client (**21***a*, **21***b*, **21***c*) docks to determine the status of an upgrade with respect to the client (**21***a*, **21***b*, **21***c*);

d) copying the upgrade to a client (**21***a*, **21***b*, **21***c*) if the client (**21***a*, **21***b*, **21***c*) has not received the upgrade; and

e) invoking the upgrade at the client (**21***a*, **21***b*, **21***c*).

14. The program storage device of claim 13 wherein said method steps further comprise invoking the upgrade at the beginning of a client (**21***a*, **21***b*, **21***c*) session.

15. The program storage device of claim 13 wherein said method steps further comprise invoking the upgrade at the end of a client (**21***a*, **21***b*, **21***c*) session.

16. The program storage device of claim 13 wherein said method steps further comprise invoking the upgrade at the client's (**21***a*, **21***b*, **21***c*) option.

17. The program storage device of claim 13 wherein said method steps further comprise invoking the upgrade at the server's (**1**) option.

18. The program storage device of claim 13 wherein said method steps further comprise creating a docking item file type to scan the upgrade database table when the client (**21***a*, **21***b*, **21***c*) docks to thereby determine the status of an upgrade with respect to the client (**21***a*, **21***b*, **21***c*).

* * * * *