

[54] **SUTURE REEL-LABEL PACKAGE**

[75] Inventor: **Mario Sonnino**, New Canaan, Conn.

[73] Assignee: **American Cyanamid Company**,
Stamford, Conn.

[22] Filed: **Aug. 8, 1973**

[21] Appl. No.: **386,672**

[52] **U.S. Cl.** 206/227; 206/63.3; 242/159

[51] **Int. Cl.** **A61b 17/06; A61l 17/02**

[58] **Field of Search** 206/63.3, 227

[56] **References Cited**

UNITED STATES PATENTS

2,949,181	8/1960	Buccino	206/63.3
3,180,487	4/1965	Uddenborg	206/227
3,185,299	5/1965	Trainer	206/63.3
3,206,018	9/1965	Lewis et al.	206/63.3
3,648,949	3/1972	Berger et al.	206/63.3 X

FOREIGN PATENTS OR APPLICATIONS

1,081,123	8/1967	United Kingdom.....	206/63.3
-----------	--------	---------------------	----------


Primary Examiner—Leonard Summer

Attorney, Agent, or Firm—Samuel Branch Walker

[57] **ABSTRACT**

Surgical sutures, including ligatures, are wound from a needled or free end on a printed reel-label. The reel-label is made from sealed together thicknesses of stiff inert sterilizable label stock, with means, such as an aperture or grommet, to act as a rotatable axis to permit holding between a finger and thumb for unwinding. A needle, if attached, is held in a pocket between the thicknesses with the armed portions of the needle protected. The friction between the thicknesses and the suture permits retention of the suture during storage and unwinding from either end. The suture reel assembly is stored in a sterile envelope which may be completely dry. The thus formed package protects the suture from kinks during storage, it protects the suture from the needle and the package from the needle. It permits unwinding from either end without tangling and it is capable of being rewound.

6 Claims, 16 Drawing Figures

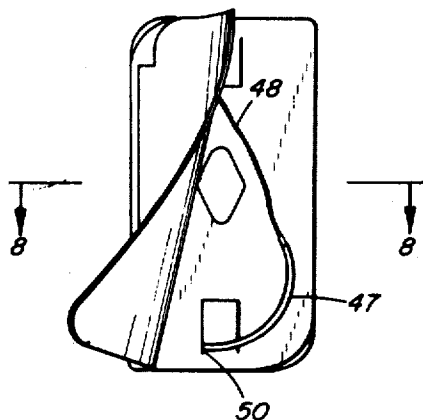

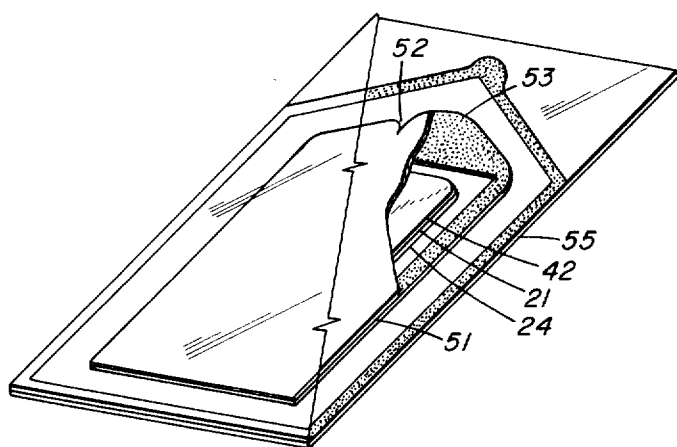
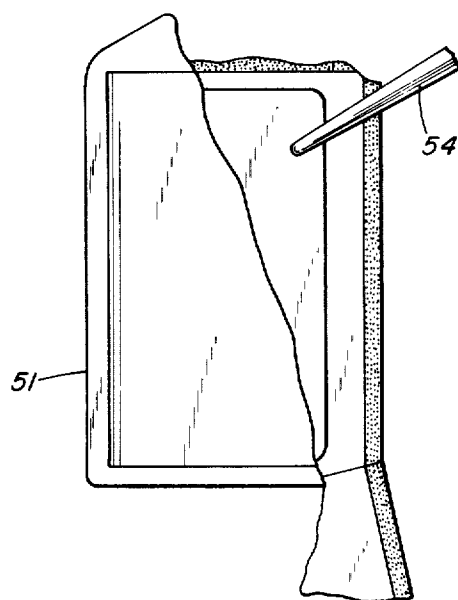


FIG. 9

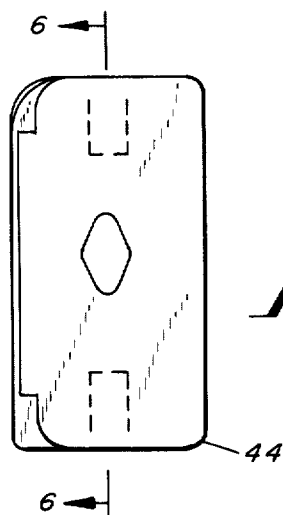


FIG. 5

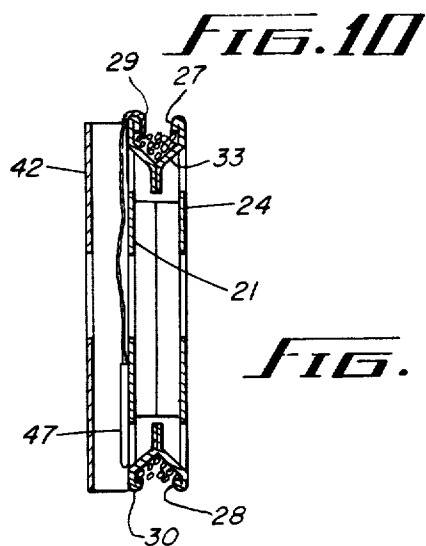


FIG. 6

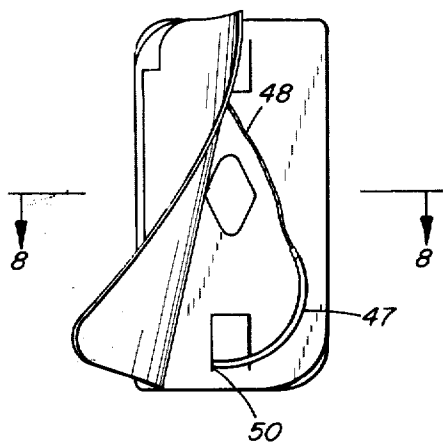


FIG. 7




FIG. 8

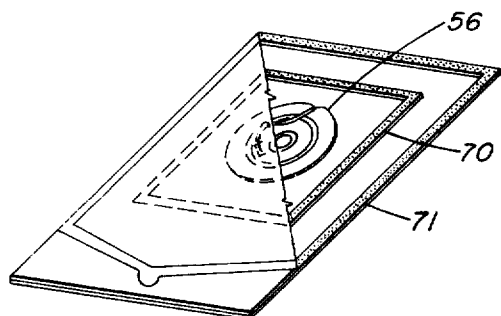


FIG. 11

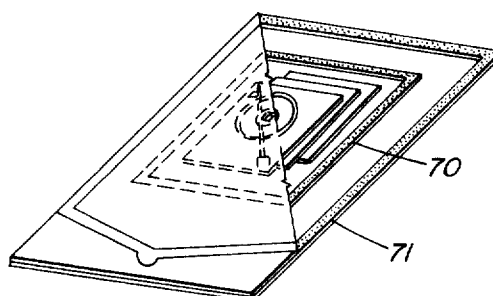


FIG. 12

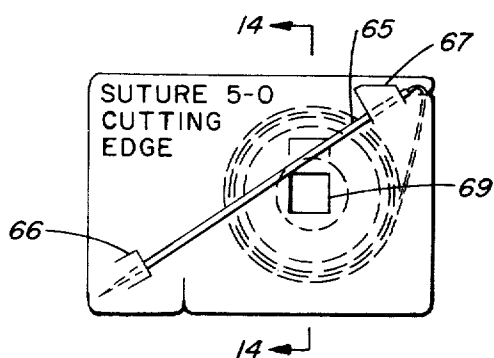


FIG. 13



FIG. 14

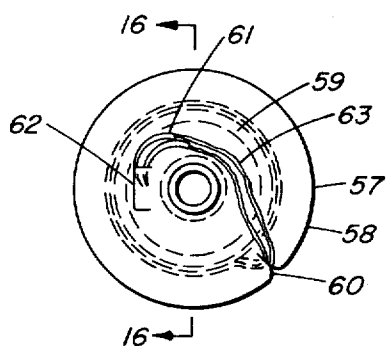


FIG. 15




FIG. 16

SUTURE REEL-LABEL PACKAGE

BACKGROUND OF THE INVENTION

In this modern day of convenience packaging, more and more effort is being put into attempting to package in a form which is convenient and economical and which meets requirements for the particular item being packaged.

In the packaging of surgical sutures, it is necessary that the sutures be released in sterile condition, ready for use by the surgeon with the economic requirement that the packaging be as economical as consistent with the qualities required and to the extent possible that a minimum of number pieces and minimum quantity of packaging materials result from releasing the suture for use. A count is often kept to insure that each needle and each reel and envelope is removed from the operating field.

An acceptable package needs to be inexpensive and completely reliable. The package must release a sterile suture for the surgeon's use with his positive knowledge that the suture is, in fact, sterile and none of its design characteristics have been compromised during storage prior to use. Sutures may be stored in hospitals for several years before use, although the usual storage time is much shorter.

There are many sizes of sutures, and many materials of construction, such as catgut, or polyglycolic acid for absorbables, and non-absorbables of silk, cotton, nylon, dacron, polyethylene, polypropylene, stainless steel, insulated stainless steel, and other materials of construction. There are several different needle types in common use, including pointed straight, pointed curved, three cornered straight, three cornered curved, both regular and reverse, and needles with side cutting edges of various types. The variations and combinations of each of these to meet the preferences of many surgeons for different operative procedures means that a suture manufacturer needs to supply different suture combinations running into the thousands. Some of these are fast moving items, others meet only with occasional demand. For purposes of convenience and storage in the hospital as well as economy of manufacture, it is highly desirable that as many suture combinations as feasible be packaged in a minimum number of different package styles and shapes and storage units. It is quite common to package three dozen identical sutures in a box. It is convenient to have most of the boxes about the same size and shape, so that the hospital may store them most conveniently. It is also convenient from the manufacturer's standpoint to be able to reduce his inventory of box sizes and to be able to use the same components for the maximum number of suture combinations in the product line.

It is essential that a package for a side cutting needle; that is, a needle which has a sharp edge on the side, protect the suture from contact with the sharp side, or armed edge, of the needle which could partially cut the suture and to avoid having the sharp edges cut the package. Also, the armed needle edges need to be protected so as to maintain their sharpness.

Additionally, it is highly desirable that the needles and sutures be oriented in a consistent relationship within packages so that the using surgeon, directly, or the nurse who passes the sutures to the surgeon, will be able to rapidly and reliably grip the needle without hav-

ing to take time to orient the needle with respect to the needle forceps at the time of use.

These requirements are so rigorous and of such importance that many different package designs have been tried, some have been used, and many have been found wanting in one or more particulars.

Most of the suture packages today are strippable, double envelope packages of the type first disclosed in U.S. Pat. No. 3,043,067, Rynkiewicz and Ayres, "Suture Package", July 10, 1962.

The outer envelope and certain details are disclosed in U.S. Pat. No. 2,949,181, Buccino, "Suture Package And Process Of Making Same", Aug. 16, 1960.

U.S. Pat. No. 3,357,550, Holmes and Murphy, "Combination Reel And Label For Surgical Sutures", Dec. 12, 1967, shows a system in which the reel also serves as a label with the reel being torn apart to release the suture wound on the label.

U.S. Pat. No. 3,376,973, Granowitz and Buccino, "Package For Surgical Sutures", Apr. 9, 1968, shows a molded plastic reel fitting in a hub for surgical sutures with the assembled reel, hub and suture being packaged in outer envelopes.

U.S. Pat. No. 3,038,475, Orcutt, "Surgical Needles And Manufacture Of Same", June 12, 1962, shows certain forms of surgical needles, including curved, triangular shaped needles with the edges being sharp or round and which sharp side edges can damage sutures or packages.

U.S. Pat. No. 2,841,150, Riall, "Cutting Edge Suture Needle", July 1, 1958, shows another type of side cutting needle, the sharp edges of which can damage sutures or packages.

SUMMARY OF THE INVENTION

It has now been found that a suture package meeting the requirements set forth above is advantageously formed from sheet label stock one side of which is coated with a thermoplastic adhesive, such as polyethylene, with either a single sheet of such a material being doubled on itself to provide two thicknesses, or two separate sheets of material being sealed together and appropriately folded, so that the suture is wrapped between at least two thicknesses of the label stock which are sealed together. The suture is retained between the two sheets of material sealed together, whereby the suture is held in position until time for use and the suture is readily unreeled from either end from between the two thicknesses of label stock. Conveniently, the needled end is placed first and the free end is wound around the reel-label. At the time of use, the needle is pulled free and the suture is unwound from the needled end with the various turns of the suture passing each other in the V-groove between the label stock thicknesses, without tangling and without compromise of suture quality.

In preferred embodiments of the invention, an additional thickness of label stock which may be transparent covers and protects the needle from contact with either the turns of the suture or the envelope. The needle is inserted in retaining means in the reel-label. The additional thickness of label stock covers the needle in such fashion that the covering portion can be turned back to release the needle in oriented relationship so that it may be picked up by the user in consistent orientation. Any of the usual types of needle forceps may be used.

The reel-label having the suture wound thereon may be packaged dry or in a selected tubing fluid in an interiorly and exteriorly sterile inner envelope, which inner envelope is packaged in a strippable outer envelope.

As is conventional in the art, the suture is served to a surgeon by stripping the outer envelope, and either with forceps, or by manually projecting, the inner envelope is passed across the sterile barrier, into the sterile areas of the operating room.

The inner envelope is opened at time of use.

As used herein, the term sutures includes ligatures. Ligatures technically are used without a needle for tying, whereas sutures are used with a needle for penetration of tissues as well as tying. The same material can be used for both purposes and frequently parts of the same strand are actually used as both a suture and a ligature depending upon the requirements of the surgeon at a particular time during a surgical procedure.

The sutures may have a needle on one or both ends. Frequently a needle is placed on each end so that the suture is cut and each needle used separately, and sometimes each needle is used for penetration for particular tissues at a particular time. Conveniently, the needles are of the eyeless type that is permanently attached to the end of the suture and designed for but a single use. Such needles cause less trauma to tissues in which they are used and are becoming surgically preferred.

The present invention is particularly adapted for the packaging of polyglycolic acid sutures. These are a new class of synthetic absorbable suture which is to be packed and stored dry. The requirement for dryness is disclosed in U.S. Pat. No. 3,728,839, Glick, "Storage Stable Surgically Absorbable Polyglycolic Acid Products", Apr. 24, 1973.

The sutures may be collagen, either natural catgut or regenerated catgut, which sutures are usually packed in a conditioning fluid such as a mixture of one or more alcohols in water so that the collagen will have a preferred flexibility. Non-absorbable sutures may be packed on the present reel-label and include such materials as silk, silicone or wax coated, or cotton or linen, or one of the newer synthetic materials such as nylon, polyester, isotactic polypropylene, or linear polyethylene, stainless steel wire or other wire, either insulated or bare, or the suture may be of such other composition as preferred by the surgeon for the surgical procedure in progress.

The reel-label is preferably of a label paper which is manufactured for suture labels and is a sterilizable paper designed for either letter press or offset printing. A paper with a 90 lb. weight basis and designed to withstand heat, steam, or gas sterilization without discoloration, and which accepts alcohol and water insoluble ink is satisfactory. It is preferred that such paper be coated with about one-half mil of polyethylene so that it becomes heat sealable. Such paper is known in the trade and readily available. The sealing may be by heated dies, or heat may be internally generated by ultrasonic means.

The present reel-label is and remains as a single piece, so that there is only one piece for disposal. In a preferred embodiment, the inner envelope which encloses and protects the suture on its reel-label is notched and fits around the reel-label so that it may be breached starting at the notch and torn open without

tearing the envelope into more than one piece so that the inner envelope is a single piece for discarding.

It is important that the various pieces be identifiable so that after an operation, the surgical team can reliably find and count all components of packaging as well as surgical needles to be certain that undesired foreign elements are not sewn into the patient at the time of use.

Time and motion studies show that the serving of a suture using the present reel-label is faster and more efficient than with conventional reels. Saving time reduces the time a patient is in surgery, and, hence, the duration of risk, risks, saves time of the medical operating team, and reduces time charges for the operating-theater, all of which are conducive to better and more economical patient care.

The present reel-label can have size and type designations for the suture and needle. The reel itself as well as the envelopes and boxes used may be color coded to designate the type of suture material, and/or other useful information.

The present invention, and its advantages are also apparent from the detailed description of certain embodiments thereof which follow.

THE DRAWINGS

In the drawings:

FIG. 1 shows a flat scored cut-out for a rectangular reel-label;

FIG. 2 is a pictorial view of the cut-out of FIG. 1 partially folded;

FIG. 3 is the cut-out of FIG. 1 folded, and sealed to itself as a reel-label;

FIG. 4 is a needle protective cover for the reel-label of FIG. 3;

FIG. 5 shows a rectangular reel-label with needle protective cover;

FIG. 6 is a cross-section of FIG. 5 at 6—6;

FIG. 7 shows the cover turned back to expose a curved needle and suture wound on the reel-label;

FIG. 8 is a cross-section of FIG. 7 at 8—8, but with the cover shown flat;

FIG. 9 shows a rectangular reel-label in a notched tearable inner envelope in a strippable outer envelope;

FIG. 10 shows the inner envelope of FIG. 9 torn open, and the reel label being removed;

FIG. 11 shows a round reel-label in a double strippable envelope;

FIG. 12 shows three rectangular reel-labels in a single package of double envelopes;

FIG. 13 shows a rectangular reel label;

FIG. 14 shows a cross-section of FIG. 13 at 14—14;

FIG. 15 shows a round reel-label;

FIG. 16 shows a cross-section of FIG. 15 at 16—16, and shows a X-ray opaque grommet;

As shown in FIG. 1, a reel-label is cut out and scored from a sheet of stiff material such as 90 pound, sterilizable offset printing paper which has thereon a coating of one-half mil polyethylene so that it is heat sealable. The label is conveniently, but not necessarily, die cut from rolls of paper stock and conveniently may be cut out and printed in continuous rolls, except for a final cut which is made at the time the label is folded and sealed.

As shown in FIG. 1, with the printed side up and the polyethylene coated side down, face panel 21 has attached thereto along score lines a first and a second ac-

cordion pleat panels **22** and **23**, to the second of which is attached the back panel **24**. On the other side of the rectangular panel are the third and fourth accordion pleat panels **25** and **26**. Conveniently, but not necessarily, the third accordion pleat panel **25** is just slightly wider than the fourth accordion pleat panel **26** so that, in folding, when adhesively united to the back panel, the edge of the fourth accordion pleat panel is just slightly back of the edge of the back panel to insure that no edges stick out which can snag a suture being wound on the reel-label. Conveniently, when the reel-label is being cut, score lines are formed where the panels are to bend to insure that the bending occurs at a designed fold line.

To the top and bottom of the face panel and the back panel are attached ears, respectively, the top face panel ear **27**, the bottom face panel ear **28**, top back panel ear **29**, and the bottom back panel ear **30**. These ears are attached to the respective panels with score lines **31** being stamped into the label stock at the time of cut-out. These score lines permit accurately positioned folds to be readily made between the panels. A tab notch **32** is formed in each of the four ears. A tab **33** is cut on three sides near the top and bottom of each of the face and back panels pointing towards the center of the panels.

As shown in FIG. 2, the four ears are folded inwardly against the face and back panels with the adhesive coated sides coming into the contact and similarly the accordion pleat panels are folded inwardly from each panel so that the face and back panels can then be folded towards each other, as shown in FIG. 3, with the adhesive of the face and back panels being sealed to each other at the tabs, through the tab notches **32**, in the upper tab seal zone **34** and the lower tab seal zone **35**. This holds the face and back panels together in resilient spring-like configuration. The face and back panels and united with side seal zones **36** on each side which adhesively unite the accordion pleat panels to the face and back panels for the length of the accordion pleat panels and adhesively unite the panel ears to the respective panels. The seals may be formed consecutively or concurrently.

The ears are advantageously fractionally smaller than the face and back panel to which they are adhesively united. Conveniently, they may be about a sixty-fourth of an inch narrower, so that allowing for manufacturing tolerances in cutting and folding the ears, the ears are necessarily slightly back from the face and back panels so that no corners protrude on which the suture can be snagged. The corners may be slightly rounded to reduce the chance of snagging.

The back panel has four intermediate radius rounded corners **37**. The face panel has diagonally oriented two smaller radius rounded corners **38** and two diagonal larger radius rounded corners **39**. By having the larger and smaller radii on the front face, as the reel-label is assembled, two corners have the face panel protruding slightly beyond the back panel so that they may be lifted easily with the finger and the other two corners with a larger radius and, hence, are slightly back of the back panel so that on each of the corners, one of the panels may be conveniently manipulated to open up the winding notch **49** between the panels.

Near the center of the face panel is a face panel rotating hole **40** and near the center of the back panel is a back panel rotating hole **41**. These holes extend

through the panel so that in unwrapping the suture, the surgeon may hold the reel-label with the thumb and a finger on each side and touching through the hole to permit the reel-label to rotate during release of the suture. Preferably, the rotating hole is of a rounded polygon configuration. As shown, it is conveniently a diamond shaped hole with rounded corners. By having the hole other than round, the suture reel-labels may be mounted on a spindle and positively driven by a non-round spindle which is shaped to match the rotating hole. Conveniently, a diamond shaped hole with rounded corners is used but a hexagonal, triangular, or other shaped hole may be used for the purpose if desired.

A separate needle protective cover **42** is cut from similar stiff label paper of s size and shape to nearly cover the face of the assembled panels with a cover seal flap **43**. The needle protective cover is sealed along one edge to position the cover seal flap close to the face panel of the reel-label assembly, as shown in FIG. 5. One corner of the needle protective cover is a lifting corner **44** which extends slightly beyond the face panel so that it may be lifted by the thumb of the user.

Identifying indicia **45** may be printed on the needle protective cover. Conveniently, but not necessarily, a cover rotating hole **46** is formed in the needle protective cover so that the cover may be either in the closed position or in the open position as the reel-label is rotated to unwind a suture.

The needle protective cover may also be of a transparent material, for example, a mylar polyethylene laminate which permits inspection of the needle and suture while protecting the needle and suture. If transparent, the identifying indicia may either be printed on the needle protective cover or on the face panel of the reel-label.

In FIG. 7 is shown a curved needle **47** which is inserted through the cut-out notch of the tab **33** so that the needles extend between the tab and the panel ear. This keeps the needle away from the suture and holds it in a positively oriented position until time of use. The suture **48** extends from the curved needle **47** and is wound up and into the winding notch **49** which winding notch is formed by the tabs sealed together in the tab seal zones at the top and bottom and the accordion pleated panels on the edges. The suture may be wound in this winding notch by wrapping the suture in either direction with the free end being wound down into the notch or left free. At the time of use, the needle may be removed from its pocket and unwound with the turns of the suture passing each other in the winding notch.

By having the suture fit in the winding notch **49** in such fashion that turns can pass each other, the suture may be wound or unwound from either end at any time. This permits placing the needle **47** first, and winding the suture in the winding notch without slack and yet without tension. The needle pocket **50**, which is formed by the cut-out for the tab **33** and the panel ear, permits a needle to be placed between two thicknesses of the panel stock and out of contact with the suture independently of whether the needle is curved, straight, triangular in cross-section, or duck-billed with sharp sides, the needle pocket provides a receptacle in which the point may be placed and the diagonal from the pocket is long enough for the entire needle to be placed be-

tween the face panel and the needle protective cover 42.

If the tabs 33 are narrower than the tab notches, the reel-label is easier to assemble and has more resiliency. If the tab is slightly wider, the needle is necessarily more certainly diverted from passing into the winding notch rather than being retained between the face panel and the face panel ear.

For those packages in which the suture is double-armed, that is, has a needle on each end, a pocket at the top and a pocket at the bottom can be used, one for each needle. Alternatively, both needles may be placed in the same pocket.

In FIG. 8 is shown the suture wound between the accordion pleat panels. In this, as in other figures, the thickness of the panel stock is exaggerated for clarity.

The niceties of having the radii of curvature on the face panel and the back panel different in each corner and having all corners slightly rounded, and slightly smaller so that even with manufacturing tolerances, none of the ears or accordion panels stick out enough to snag the suture are features which are preferred for the best practice of the invention. For many purposes, a less refined reel-label may be adequate.

The cover 42, as well as the paper stock from which the panels are formed, may be colored in order that the color of the reel-label give a clue as to the type of suture material wound around. Similarly, the suture size, the suture material, and the type of needle may be printed on the needle protective cover on the face panel or the back panel. Usually, to avoid confusion, a minimum of printing is desirable in order that the user may very rapidly identify the data which is needed and not be too confused with extraneous information.

The size of the reel-label is, of course, commensurate with the size of the suture and its needle. Conveniently, a face panel which is 2 7/16 inches long and 1 1/4 inches wide gives good results. The radii of curvature of the back panel can conveniently be about a quarter of an inch whereas the smaller radius can be one-sixteenth inch and the larger radius three-eighths inch on the face panel with the ears one-sixty-fourth inch less on each corner. The accordion folds are conveniently a quarter of an inch for the first and second accordion pleat and a sixty-fourth of an inch more for the third accordion pleat panel and a sixty-fourth of an inch less for the fourth accordion pleat panel. Such a size permits sutures normally in use in a hospital to be conveniently packaged. For metric countries or where desired, panels may be varied considerably in size to accommodate sutures of selected sizes and appropriate needles.

In FIG. 9 is shown the reel-label with the needle protective cover attached in a notched tearable inner envelope 51 in a strippable outer envelope 55. The inner envelope may conveniently be made of a moisture proof material such as a 25 pound, calendered, bleached, pouch paper laminated with about a half a mil of polyethylene to a metallic foil such as about a one mil aluminum foil which is again laminated to one mil polyethylene as an inner sealable layer. Such a material is disclosed in U.S. Pat. No. 3,728,839, supra. Such material is essentially moisture proof so that synthetic absorbable sutures such as those of polyglycolic acid are protected from hydrolytic degradation. The same material may be used for the packaging of catgut sutures which are packaged with a desired quantity of water to maintain plasticity. Some sutures in which the

moisture content is immaterial may be also packaged in the same material to maintain consistency of packaging standards.

By having a peaked seal 53 and a tearing notch 52 therein, when the inner envelope is to be opened, the user can use the tearing notch as a start, and tear the laminate longitudinally along the face of the reel-label as shown in FIG. 10 so that without detaching the torn portion, the suture on the reel-label can be removed with forceps 54 or with the gloved fingers to release the reel-label having the suture thereon for use.

The notched tearable inner envelope 51 is packaged in a strippable outer envelope 55 of the type disclosed in U.S. Pat. No. 2,949,181, supra.

A modification of this invention is shown in FIG. 11. As shown in FIGS. 15 and 16, a round reel 56 is formed from sealing together a round face panel 57 and a round back panel 58 with an annular seal 59. The annular seal is inside the periphery of the face and back panels. As shown in FIG. 16, this leaves an external notch in which the suture is wound. As shown in FIG. 15, a threading notch 60 is formed in at least one of the panels in order that one or more needles 61 may be placed in an internal slit 62 with the suture 63 being wound into the winding notch formed between the round face panel and the round back panel.

From the constructional standpoint, the panels may be sealed together before the round face panel and the round back panel are cut out from larger stock.

As shown in FIG. 16, conveniently, an X-ray opaque grommet 64 may be inserted to hold the panels together and also serve as a turning axis for unreeling the suture. The metal grommet gives positive indication by X-ray if a package is accidentally dropped into an incision during an operation.

In FIG. 13 is shown a similar type of reel except that the face panels are rectangular and long enough so that a straight needle 65 can be inserted into the retaining slit 66 with the rear end being held in a positioning slit 67. In this modification, an annular seal 68 is used to hold the panels together and a square hold 69 is used for a rotatable axis. The square hole has the advantage that it may be used on a square drive shaft in winding the suture onto the reel assembly.

In FIG. 12 is shown an assembly with three rectangular reels of the type shown in 13 packaged into a sterile envelope 70 in a strippable envelope 71.

Many incidental advantages accrue from the use of the present reel-label. For instance, it takes from 8 to 16 turns, depending on length, to wind a suture onto the present reel-labels. It is convenient to have one or more suture reel-labels ganged on a single spindle with the needles being inserted into the needle pockets. All of the sutures are wound on the reels by mechanically turned spindles simultaneously. Gang winding permits saving of time and effort, even though winding eight turns by hands is comparatively quick.

The use of rectangular reels gives a larger printing surface for identification of the suture type, size, and needle. Additionally, it provides a longer diagonal so that long straight needles can be inserted in the pocket and protected for their entire length. A rectangular reel permits the use of a rectangular envelope which maintains the orientation so that the user can expect to find a needle in the same relative position with respect to the envelope each time the sterile inner envelope is opened. This permits more rapid seizing of the needle

with needle forceps with positive knowledge that orientation is as planned.

By having no sharp corners around which the suture is wound, even sutures which tend to attain a permanent set are curved minimally when unreeled for use.

By using the cover and having the needle point between the face panel and a face panel ear, the needle is positively positioned and is protected during winding so that the needle neither harms the suture nor the envelope nor has its sharpness compromised during the assembly and storage prior to actual use. The light frictional crimp from the sealed together panels permits as many as three sutures to be wound on a single reel and yet each one can be positively unwound without tangling. It also permits a longer length material to be wound for use as ligatures.

A radio opaque or magnetic grommet or ink permits detection of the package should it be inadvertently dropped into an incision.

By only having one part to the reel, the number of extraneous pieces in the operating theater are reduced. It permits more positive counting in and out of the operating room of each of the elements of packaging to insure that all needles and extraneous items are accounted for before an incision is closed. The paper stock from which the panels are made, as well as the envelope, are free from traps which would pick up and retain contaminants and are readily sterilized by conventional sterilizing procedures. The package is such that any sterilizing cycle which is adaptable to the suture may be used. The package, for instance, will stand heat, dry or wet, ethylene oxide, radiation, ultrasonic vibration, or other sterilizing agents or combinations of these. The reel-label and package are sufficiently sturdy that only the characteristics of the suture material need to be considered as controlling parameters during packaging, sterilization, and storage.

Whereas, it is usually most convenient to cut the reel-label blank of FIG. 1 from strip material and fold on score lines to form the finished reel-label, the face and back panels and accordion pleats as well as ears may be cut from separate strips or cut out as separate panels and adhered together. For constructions such as shown in FIGS. 13 and 15 where the edges of the panels extend beyond the annular seals, it is essentially necessary that separate panels be used. The feasibility of using folded panels is an alternative that must be placed in its proper economic context with, of course, the cost of each method of operation being considered before the final decision is made.

The reel-label may be made of plastic, or a plastic laminate, or foam, or paper of unique characteristics as well as conventional label stock.

I claim:

1. A reel-label surgical suture combination comprising two superimposed panels of stiff sterilizable label

stock having a heat sealable facing on one side; said panels being rectangular, with rounded corners, with the superimposed rounded corners having different radii;

accordion pleat folds joining the two panels on two parallel edges;

an infolded panel ear strengthening the top and bottom of each said panel;

cut-out tabs near the top and bottom of each panel, said tabs being heat sealed to tabs from the opposing panel, to hold said panels together;

said panels each having therein a hole, said holes being in registration, and forming a spin axis substantially at the center of said panels;

said tabs and said accordion pleat folds forming a suture holding groove, to frictionally hold a suture therein;

said groove being effectively continuous and operatively centered towards said spin axis;

at least one of said panels having therein at least one needle retaining cut-out adapted to hold the sharp end of at least one needle between panels in protective relationship;

a suture wound thereon, and at least in part in, said suture holding groove;

said suture having thereon an eyeless surgical needle, the point of said needle being inserted in one of said needle retaining cut-outs;

and a needle protective cover adjacent to one of said panels on the side opposite the other of said panels, covering and protecting said needle;

whereby the sharp portion of said needle is protected from dulling during shipment and the suture and the package are protected from being damaged by the needle during packaging and shipment.

2. The reel-label surgical suture combination of claim 1 in which the two superimposed panels and the accordion pleat folds are formed from a single flat piece of label stock.

3. The reel-label surgical suture combination of claim 1 in which the surgical needle has sharp edges at the sides of the needle, which edges are protected by said needle protective cover.

4. A suture package consisting of a sealed envelope and enclosed therein at least one reel-label surgical suture combination as set forth in claim 1, and in which said needle protective cover protects the envelope from the sharp edges of the needle.

5. A double envelope suture package comprising a strippable outer envelope having therein at least one suture package as set forth in claim 4, and in which the said suture package is both interiorly and exteriorly sterile.

6. The reel-label of claim 1 in which at least a part of the reel-label is of an X-ray opaque material to provide for X-ray detection in a patient.

* * * * *