



(51) International Patent Classification:

G06F 17/30 (2006.01) *G06Q* 30/02 (2012.01)
H04L 29/08 (2006.01) *H04M* 3/487 (2006.01)

(21) International Application Number:

PCT/EP2013/073332

(22) International Filing Date:

8 November 2013 (08.11.2013)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

12193336.0 20 November 2012 (20.11.2012) EP

(71) Applicant: **ALCATEL LUCENT** [FR/FR]; 3 Avenue
Octave Gréard, F-75007 Paris (FR).

(72) Inventors: **BOUZID, Makram**; co/Alcatel Lucent Bell
Labs France, Centre de Villarceaux, Route de Villejust, F-
91620 Nozay (FR). **BETGE-BREZETZ, Stéphane**;
co/Alcatel Lucent Bell Labs France, Centre de Villarceaux,
Route de Villejust, F-91620 Nozay (FR).

(74) Agent: **THERIAS, Philippe**; Alcatel-Lucent International,
32 Avenue Kléber, F-92700 Colombes (FR).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,

AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,
BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM,
DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT,
HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR,
KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME,
MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ,
OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA,
SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM,
ZW.

(84) Designated States (unless otherwise indicated, for every
kind of regional protection available): ARIPO (BW, GH,
GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ,
UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ,
TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK,
EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV,
MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM,
TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW,
KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

(54) Title: METHOD AND APPARATUS FOR PROVIDING GREEN RECOMMENDATIONS OF DIGITAL CONTENTS

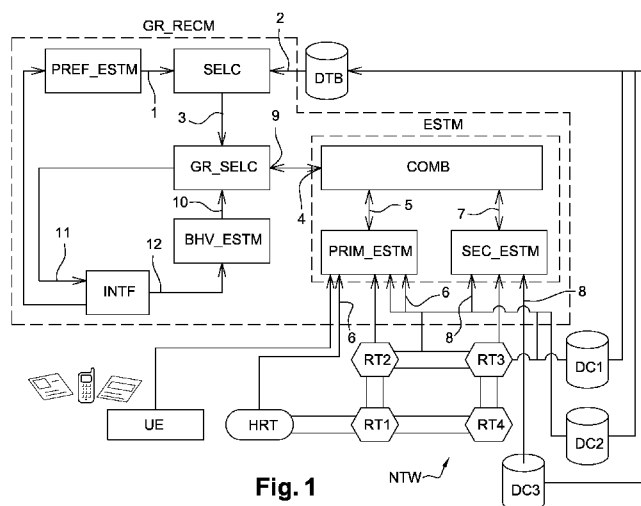


Fig. 1

(57) Abstract: The present invention relates to a green recommender device (GR_RECM) of digital contents to deliver across a telecommunication network (NTW) to a user terminal (UE), said digital contents being hosted by at least one database (DTB) of said telecommunication network (NTW), said green recommender device (GR_RECM) comprising: - a content selector (SELC) adapted for selecting a set of digital contents according to user's features, the user features comprising a user profile including consumption history of the user and user preferences for a digital content; - an estimator (ESTM) adapted for estimating, for each selected content, the green impact of its delivery from the host data center (DC1, DC2, DC3) to the user terminal (UE); - a green content selector (GR_SEL) adapted for: - computing, for each selected content, a global score depending on its estimated green impact and the predicted user interest for said content; - extracting the top k selected contents which have the highest global scores; - an interface (INTF) adapted for notifying the k extracted contents to the user terminal (UE).

1

**METHOD AND APPARATUS FOR PROVIDING GREEN
RECOMMENDATIONS OF DIGITAL CONTENTS****5 FIELD OF THE INVENTION**

The present invention relates to recommendation systems of digital contents, adapted for selecting a set of contents matching the interests of a user.

10

BACKGROUND

A huge number of digital contents such as video on demand (VoD) or television channels are proposed by telecommunication operators and service providers. The delivery of these digital contents, notably
15 video, represents a huge part of the traffic of telecommunication networks. For instance, in North America, the highest traffic during the peak hours is the traffic generated by the Netflix system, which is a VoD delivery system.

20

However, the delivery of Web and telecom services has an ecological impact in terms of energy consumption or carbon footprint. For instance, a research institute has estimated the cost of a simple Google request: a typical search on a desktop computer generates
25 about seven grams of carbon dioxide, which is comparable with bringing a kettle to boil. Another study ("Shipping to Streaming: is this shift green ?", A. Seetharam et al., Green Networking '10, Proceeding of the first ACM SIGCOMM workshop on Green networking, New Delhi, India, 2010) compares the ecological cost

2

between sending a movie as a DVD by mailing it to the customer house, or by delivering it as a VoD through a network. This study shows that non-energy optimized streaming of a movie through the Internet consumes approximately 78% of the energy needed to ship
5 a movie, but has a carbon footprint that is approximately 100% higher.

SUMMARY

10 It is an object of the invention to reduce such ecological impact.

To this end, the invention provides a method for recommending digital contents to deliver across a telecommunication network to a user terminal, said digital contents being hosted by at least one data
15 center of said telecommunication network, said method comprising:

- selecting a set of digital contents, according to user's features;
- estimating, for each selected content, the green impact of its delivery from the host data center to the user terminal;
- 20 - computing, for each selected content, a global score depending on its estimated green impact;
- extracting the top k selected contents which have the highest global scores;
- notifying the k extracted contents to the user terminal.

25

Indeed, regarding this huge number of content available for the end-users, recommendation systems, which aim at selecting a set of contents matching the interests of the end-user, have been introduced and are more and more deployed and adopted by the

3

end-users. For instance, 60% of Netflix customers use recommendations, and 35% of Amazon's revenue comes from recommendations. As a consequence, the traffic generated by recommendation systems is becoming absolutely not negligible and
5 these recommenders tend therefore to have an actual impact on the network traffic.

The invention thus provides a content recommendation technology that can select contents of interest to the user within a huge
10 content catalogue, and which delivery will have the less ecological impact. The method consists in making a first filtering step of the content catalogue based on the user's preferences and/or profile, and then reorders the list according to the estimation of the end-to-end green impact of recommended content delivery. Content with
15 high green impact would be promoted to the top of the recommendation list. The reordering is made based on computed scores for preselected contents, which are a combination between predicted user interest and green impact, to avoid disappointing user with recommendations of low interest and high green impact.

20 The green impact is estimated based on the carbon footprint and the energy consumption of involved data center hosting the contents, the core networks and routers, the user access network (for example 3G, Wi-Fi, LAN), and the user device to deliver the content. The method also allows telecommunication operators to be compliant
25 with the upcoming "green regulations" and is a mean to improve their image to their final customers in promoting their ecological business attitude.

According to not limited embodiments, the method can comprise

4

one or more of the following additional characteristics:

- User's features comprise a user's profile including digital contents consumption history of said user.
- User's features comprise a user's profile including user's preferences for a digital content
- User's features comprise user's context information. This information is for example the time, the user location, the user mood, etc.
- The method comprises a preliminary step of receiving the user's features from the user terminal.
- The global score is computed as follows:
$$\text{Score}(c) = \alpha \cdot \text{Rating}(c) + \beta \cdot \text{GreenImpact}(c) \text{ with } \alpha + \beta = 1,$$

where:
 - $\text{Score}(c)$ is the global score for a content c ;
 - $\text{Rating}(c)$ is an estimator of the estimated appreciation degree of the user for the content c , computed according to the user's features;
 - $\text{GreenImpact}(c)$ is the estimated green impact of the delivery of the content c ;
 - α and β are parameters such as $\alpha + \beta = 1$.
- The method comprises determining parameters α and β according to the consumption history, such as the more the user has consumed digital contents having high green impact, the bigger β is.
- The green impact depends on:
 - a primary carbon footprint corresponding to the carbon footprint due to energy consumed by all equipments along the delivery path from the data center to the user terminal;

5

- a secondary carbon footprint corresponding to the carbon footprint spent for producing said equipments.
- The green impact is computed as follows:

5
$$\text{GreenImpact}(c) = \frac{1}{\text{FirstFootprint}(c) + \text{SecondFootprint}(c)}$$

where:

- $\text{GreenImpact}(c)$ is the estimated green impact of the delivery of the content c ;
 - $\text{FirstFootprint}(c)$ is the primary carbon footprint;
 - 10 ○ $\text{SecondFootprint}(c)$ is the second carbon footprint.
- The method comprises ranking the top k selected contents according to their global scores.

In addition, there is provided a green recommender device of digital
15 contents to deliver across a telecommunication network to a user terminal, said digital contents being hosted by at least one database of said telecommunication network, said green recommender device comprising:

- a content selector adapted for selecting a set of digital
20 contents according to user's features;
- an estimator adapted for estimating, for each selected content, the green impact of its delivery from the host data center to the user terminal;
- a green content selector adapted for:
25 ○ computing, for each selected content, a global score depending on its estimated green impact and the predicted user interest in the content;

6

- extracting the top k selected contents which have the highest global scores;
- an interface adapted for notifying the k extracted contents to the user terminal.

5

According to a not limited embodiment, the green recommender device can comprise one or more of the following additional characteristics:

- 10 - The green content selector is adapted for ranking the top k selected contents according to their global scores.
- The estimator comprises:
 - 15 ○ a primary carbon footprint estimator adapted for estimating, for each selected content, the carbon footprint due to energy consumed by all equipments along the delivery path from the host data center to the user terminal;
 - a secondary carbon footprint estimator adapted for estimating the carbon footprint spent for producing said equipments.
- 20 - The green recommender device comprises a behavior estimator adapted for estimating, for all the selected contents, a parameter used for computing the global score's selected content, said parameter being such as the more the user has consumed digital contents having high green impact, the biggest the parameter is.
- 25 - The content selector is adapted for communicating with a database managing a list of available digital contents, the selecting being made among said list.

7

In addition, there is provided a computer program product for a computer, comprising a set of instructions, which when loaded into said computer, causes the computer to carry out the method previously described.

5

BRIEF DESCRIPTION OF THE DRAWINGS

Some embodiments of apparatus and/or methods in accordance with embodiments of the present invention are now described, by way of example only, and with reference to the accompanying drawings, in which:

- figure 1 schematically illustrates a green recommender device according to a non limited embodiment of the invention;
- figure 2 shows a flowchart which schematically illustrates a method according to a non limited embodiment of the invention.

15

DESCRIPTION OF EMBODIMENTS

In the following description, well-known functions or constructions by the man skilled in the art are not described in detail since they would obscure the invention in unnecessary detail.

20

The present invention relates to a method METH for recommending digital contents to a user. Said method METH is carried out by a green recommender device GR_RECM, whose a non limited embodiment is detailed hereafter. A green recommender device GR_RECM according to an embodiment is illustrated in figure 1, and steps of the method METH are shown in figure 2.

25

8

Digital contents are likely to be delivered across a telecommunication network NTW to a user terminal UE, if said user would like to get them. They are to be consumed online, for example
5 using a streaming technology, or offline on the user terminal UE after their download over the Internet. The user terminal UE is for example a mobile device, a laptop, a set-top box, etc.

Digital contents are hosted by data centers DC1, DC2, DC3 of the
10 telecommunication network NTW. These data center DC1, DC2, DC3 are content sources hosting the digital content that the user can access from its terminal UE. They can, for example, correspond to the original store of a content provider and some caches for content
15 duplication in different geographic locations. It is to be noted that data centers can also be all user terminals connected to the network NTW, so as to deliver contents by the peer-to-peer technology.

The list of available content and their descriptions, for example metadata, are communicated to a database DTB, also named content
20 catalog, to be used by the green recommender device GR_RECM. Said content catalog is a database in charge of hosting the lists of available contents that a user can access in the scope of a particular application. The database DTB is populated by the different data centers DC1, DC2, DC3.

25

Digital contents are recommended to a user according to features related to the user, and according to their green impact. The user's features are:

- the user's profile including user's preferences for a digital

content, and

- some user's context information, such as the time, the user location, the mood, etc.

5 A user profile is a collection of personal data associated to a specific user. A profile refers therefore to the explicit digital representation of a person's identity. A user profile can also be considered as the computer representation of a user model. A profile can be used to store the description of a person and/or his/her preferences. The
10 user profile can be built explicitly by the user, for example through forms, questionnaires, etc, and/or implicitly by analyzing (data mining) user consumption traces (this is called a profiling process) via a preference estimator PREF_ESTM). It is to be noted that the preference estimator can also be hosted by the user equipment UE,
15 instead of being hosted by the green recommender device GR_RECM.

User preferences are either communicated explicitly by the user to the green recommender device GR_RECM through the interface INTF, or inferred by the green recommender device GR_RECM from
20 user consumptions.

According to a not limited embodiment, the green recommender device GR_RECM comprises:

- an interface INTF, also named green recommender interface;
- 25 - a content selector SELC, which is a classical recommendation system;
- a green content selector GR_SELC, also named green recommendation component;
- an estimator ESTM, also named green impact predictor;

10

- a behavior estimator BHV_ESTM, also named green behavior estimator.

The interface INTF

5 The user can access the green recommendation device GR_RECM from its terminal UE using the interface INTF. When the user asks for a digital contents recommendation, his profile and preferences are communicated to the content selector SELC through link 1. In another embodiment, the user's profile is hosted by the content
10 selector SELC and the user has just to authenticate to activate or retrieve his profile.

The interface INTF is also responsible for displaying the received lists of recommendations to the user with the indications on the
15 green impact of each recommended content, which can be presented to the user using for example a Green Star scale (link 11). After the selection and consumption of a content by the user, this interface INTF sends the information about selected content to the behavior estimator BHV_ESTM (link 12) to evaluate and update the
20 information about the green behavior of the user.

The content selector SELC

The content selector SELC makes a first selection of a list of content matching the user's features, such as in classical recommendation
25 systems. The selection is realized for example by a content-based filtering algorithm, a collaborative-filtering one, or a hybrid solution mixing both of them. The selection is made among the available content described in the content catalog database DTB that is communicated to the content selector SELC through (link 2). The

11

content selector SELC estimates a rating $\text{Rating}(c)$, for example between 0 and 1, indicating how much the user would appreciate the content c based on past user consumptions stored or modeled in his profile.

5

The green content selector GR_SELC

This component gets as inputs the list of initially selected content generated by the content selector SELC, through link 3. The green content selector GR_SELC checks the green impact of the delivery of each content c from its source, that is to say the data center DC1 or DC2 or DC3 hosting the content, to the user terminal UE. The green impact is estimated by the estimator ESTM, which communicates with the green content selector GR_SELC through links 4 and 9.

15 The green content selector GR_SELC then computes a global score $\text{Score}(c)$ for each content c , as follows:

$$\text{Score}(c) = \alpha \cdot \text{Rating}(c) + \beta \cdot \text{GreenImpact}(c);$$

where:

- $\text{Score}(c)$ is the global score for a content c ;
- 20 - $\text{Rating}(c)$ is an estimator of the appreciation degree of the user for the content c , computed according to the user's features;
- $\text{GreenImpact}(c)$ is the estimated green impact of the delivery of the content c ;
- 25 - α and β are parameters such as $\alpha + \beta = 1$.

The parameters α and β are chosen according to the green behavior of the user which is provided as an input by the behavior estimator BHV_ESTM (link 10). For example, if the user is a green "addictive",

12

α will be set to a small value, to give less importance to user's tastes, and β will be big, to give more importance to the green impact of the content.

- 5 The green content selector GR_SEL_C then selects the top k items having the highest global scores and generates a revised list of content recommendations. The new list of selected content are then sent to the interface INTF along the indications of the Green Impact of each recommended content (link 11).

10

In one embodiment, k is an intrinsic parameter of the green content selector GR_SEL_C, determined according to statistical studies about the number of recommended contents necessary for obtaining at least one content which interests the user. For example k=10 or
15 k=20. In another embodiment, k is settled by the user via the interface INTF.

20

In another embodiment of the invention, the green content selector GR_SEL_C suggests to the user to use another access network available around him with a better green impact and/or to use another terminal UE with a better green impact too, for example a less energy consuming user terminal UE that also suits for the consumption/download of a recommended content.

25

It is to be noted that if a same digital content is available from two data centers DC1, DC2, DC3, the green content selector GR_SEL_C would privilege the recommendation of the content coming from the data center DC1, DC2, DC3 with the lowest carbon footprint and energy consumption (if the green impact of the rest of the delivery

13

infrastructure remains the same when changing the source data center). Moreover, if a user has two terminals UE available next to him, the green content selector GR_SEL_C would also suggest him to use the one with the best green impact (also if the green impact of the rest of the delivery infrastructure remains the same). Indeed, the different user's terminals can be memorized in the user profile. It is to be noted that the green impact of a terminal can change, for example if the Wi-Fi and/or the Bluetooth are activated. Moreover, if the terminal with the best green impact is not appropriate, for example if its screen is too small, then this terminal is not suggested.

The estimator ESTM

The estimator ESTM is in charge of estimating the green impact of the delivery of a content from its source host (a data center DC1, DC2, DC3) to the user terminal UE. The estimator ESTM comprises:

- a primary carbon footprint estimator PRIM_ESTM;
- a secondary carbon footprint estimator SEC_ESTM;
- a combiner COMB.

20

Indeed, the green impact is estimated based on the estimation of a primary carbon footprint and a secondary carbon footprint:

- The primary carbon footprint, estimated by the primary carbon footprint estimator PRIM_ESTM, corresponds to the carbon footprint, for example in kilograms of CO₂, due to the energy consumed by all the equipments all along the delivery path of the content. It takes into account the content characteristics (size, estimated delivery time, the required bandwidth for its delivery, etc) and estimates the carbon

25

14

footprint of the energy consumptions of the following elements (links 6 and 8):

- the data center DC1 or DC2 or DC3 hosting the content,
- the core network and routers,
- 5 ○ the user access network, whether his is connected using 3G network NTW, Wi-Fi, LAN, etc,
- the user terminal UE to consume the content online or to download it for offline consumption.

Existing statistical analysis and models of energy
10 consumption and primary carbon footprint of the different equipments can be used to make such above estimations.

- The secondary carbon footprint, also called grey energy, which is estimated by the secondary carbon footprint estimator SEC_ESTM, corresponds to the carbon footprint, for example
15 in kilograms of CO₂, spent for producing all these equipments (brought by the delivery of one content). The secondary carbon footprint estimator SEC_ESTM estimates the secondary carbon footprint spent for producing all the equipments involved in the delivery of a content from its source host (a
20 datacenter DC1 or DC2 or DC3) to the user terminal UE. It can takes into account the estimated production carbon footprint of the following elements (links 6 and 8):

- the data center DC1 or DC2 or DC3 hosting the content,
- the core network and routers,
- 25 ○ the user access network, whether his is connected using 3G network NTW, WiFi, LAN, etc,
- the user terminal UE to consume the content online or to download it for offline consumption.

15

Existing statistical analysis and models of equipments carbon footprint can be used to make such above estimations.

- 5 Then, the combiner COMB combines the primary carbon footprint (link 5) and the secondary carbon footprint (link 7) to compute the overall green impact. This combination is configurable by the operator. It can be a simple inverse of the addition, but it could be also computed with other formula depending on the strategy of the
10 operator.

The behavior estimator BHV_ESTM

- The behavior estimator BHV_ESTM receives the information about selected content by the user and its estimated green impact from
15 the interface INTF (link 12), with the global list of recommended items, and update the classification of the user green behavior when needed. A relevance feedback approach, like Rocchio algorithm (J. Rocchio, Relevance Feedback in Information Retrieval, chapter 14, pages 313-323, Prentice-Hall, 1971), can be used to update the
20 information about the user green behavior. The classification of the green behavior of a user could run from for example low to high, on a more or less fine-grained scale, and updated through the time after the user selection of content from the recommendation list according to the estimated content's green impact.

25

In one embodiment, the behavior estimator BHV_ESTM also ranks users with another, according to their green behaviors. All users could for example see the top ten of greenest users, which could encourage the others to behave greener.

16

On the other hand, the method METH for recommending digital contents comprises:

- 5 - selecting 100 a set of digital contents, according to the user's features. Selection is made by the content selector SELC, as previously explained.
- 10 - Estimating 110, for each selected content, the green impact of its delivery from the host data center DC1 or DC2 or DC3 to the user terminal UE. Estimation is made by the estimator ESTM, as previously explained.
- 15 - Computing 120, for each selected content, a global score depending on its estimated green impact and the predicted user interest for the content. Computing the global score is made by the green content selector GR_SELC, as previously explained.
- 20 - Extracting 130 the top k selected contents which have the highest global scores score. Extraction is also made by the green content selector GR_SELC, as previously explained.
- Notifying 140 the k extracted contents to the user terminal UE. Notification is realized via the interface INTF, as previously explained.

17

CLAIMS

- 1 – Method (METH) for recommending digital contents to deliver
across a telecommunication network (NTW) to a user terminal
5 (UE), said digital contents being hosted by at least one data
center (DC1, DC2, DC3) of said telecommunication network
(NTW), said method (METH) comprising:
- selecting a set of digital contents, according to user's
features, said user's features comprising a user's profile
10 including digital contents consumption history of said user,
and user's preferences for a digital content;
 - estimating, for each selected content, the green impact of
its delivery from the host data center (DC1, DC2, DC3) to
the user terminal (UE);
 - 15 - computing, for each selected content, a global score
depending on its estimated green impact and the predicted
user interest for said selected content;
 - extracting the top k selected contents which have the
highest global scores;
 - 20 - notifying the k extracted contents to the user terminal
(UE).
- 2 – Method (METH) according to claim 1, wherein user's features
comprise user's context information.
- 25
- 3 – Method (METH) according to the previous claim, comprising a
preliminary step of:
- receiving the user's features from the user terminal (UE).

18

- 4 – Method (METH) according to any of the previous claims,
wherein the global score is computed as follows:
$$\text{Score}(c) = \alpha \cdot \text{Rating}(c) + \beta \cdot \text{GreenImpact}(c) \text{ with } \alpha + \beta = 1,$$

where:
- 5 –
- $\text{Score}(c)$ is the global score for a content c ;
 - $\text{Rating}(c)$ is an estimator of the appreciation degree of the user for the content c , computed according to the user's features;
 - $\text{GreenImpact}(c)$ is the estimated green impact of the delivery
10 of the content c ;
 - α and β are non-zero parameters such as $\alpha + \beta = 1$.
- 5 – Method (METH) according to claims 2 and 5, comprising:
- 15
- Determining parameters α and β according to the consumption history, such as the more the user has consumed digital contents having high green impact, the bigger β is.
- 6 – Method (METH) according to any of the previous claims,
20 wherein the green impact depends on:
- a primary carbon footprint corresponding to the carbon footprint due to energy consumed by all equipments along the delivery path from the data center (DC1, DC2, DC3) to the user terminal (UE);
 - 25 - a second carbon footprint corresponding to the carbon footprint spent for producing said equipments.
- 7 – Method (METH) according to the previous claim, wherein the green impact is computed as follows:

19

$$\text{GreenImpact}(c) = \frac{1}{\text{FirstFootprint}(c) + \text{SecondFootprint}(c)}$$

where:

- GreenImpact(c) is the estimated green impact of the delivery of the content c;
 - 5 - FirstFootprint(c) is the primary carbon footprint;
 - SecondFootprint(c) is the second carbon footprint.
- 8 – Method (METH) according to any of the previous claims, comprising ranking the top k selected contents according to their
- 10 global scores.
- 9 – A green recommender device (GR_RECM) of digital contents to deliver across a telecommunication network (NTW) to a user terminal (UE), said digital contents being hosted by at least one
- 15 database (DTB) of said telecommunication network (NTW), said green recommender device (GR_RECM) comprising:
- a content selector (SELC) adapted for selecting a set of digital contents according to user's features, said user's features comprising a user's profile including digital
 - 20 contents consumption history of said user, and user's preferences for a digital content;
 - an estimator (ESTM) adapted for estimating, for each selected content, the green impact of its delivery from the host data center (DC1, DC2, DC3) to the user terminal (UE);
 - 25 - a green content selector (GR_SELC) adapted for:
 - computing, for each selected content, a global score depending on its estimated green impact and the predicted user interest for the content;

20

- extracting the top k selected contents which have the highest global scores ;
- an interface (INTF) adapted for notifying the k extracted contents to the user terminal (UE).

5

10 – A green recommender device (GR_RECM) according to the previous claim, wherein the green content selector (GR_SEL) is adapted for ranking the top k selected contents according to their global scores.

10

11 – A green recommender device (GR_RECM) according to any one of claims 9 to 10, wherein the estimator (ESTM) comprises:

- a primary carbon footprint estimator (PRIM_ESTM) adapted for estimating, for each selected content, the carbon footprint due to energy consumed by all equipments along the delivery path from the host data center (DC1, DC2, DC3) to the user terminal (UE);
- a secondary carbon footprint estimator (SEC_ESTM) adapted for estimating the carbon footprint spent for producing said equipments.

20

12 – A green recommender device (GR_RECM) according to any one of claims 9 to 11, comprising a behavior estimator (BHV_ESTM) adapted for estimating, for each selected content, a parameter used for computing the global score's selected content, said parameter being such as the more the user has consumed digital contents having high green impact, the biggest the parameter is.

25

21

- 13 – A green recommender device (GR_RECM) according to any one of claims 9 to 12, wherein the behavior estimator (BHV_ESTM) is adapted for ranking the users connected to the communication network (NTW) according to their consumption of green digital contents, and the interface (INTF) is adapted for notifying at least a part of said ranking to the user terminal (UE).
- 14 – A green recommender device (GR_RECM) according to any one of claims 9 to 13, wherein the content selector (SELC) is adapted for communicating with a database (DTB) managing a list of available digital contents, the selecting being made among said list.
- 15 – A computer program product (PG) for a computer, comprising a set of instructions, which when loaded into said computer, causes the computer to carry out the method (METH) according to any one of the previous claims 1 to 8.

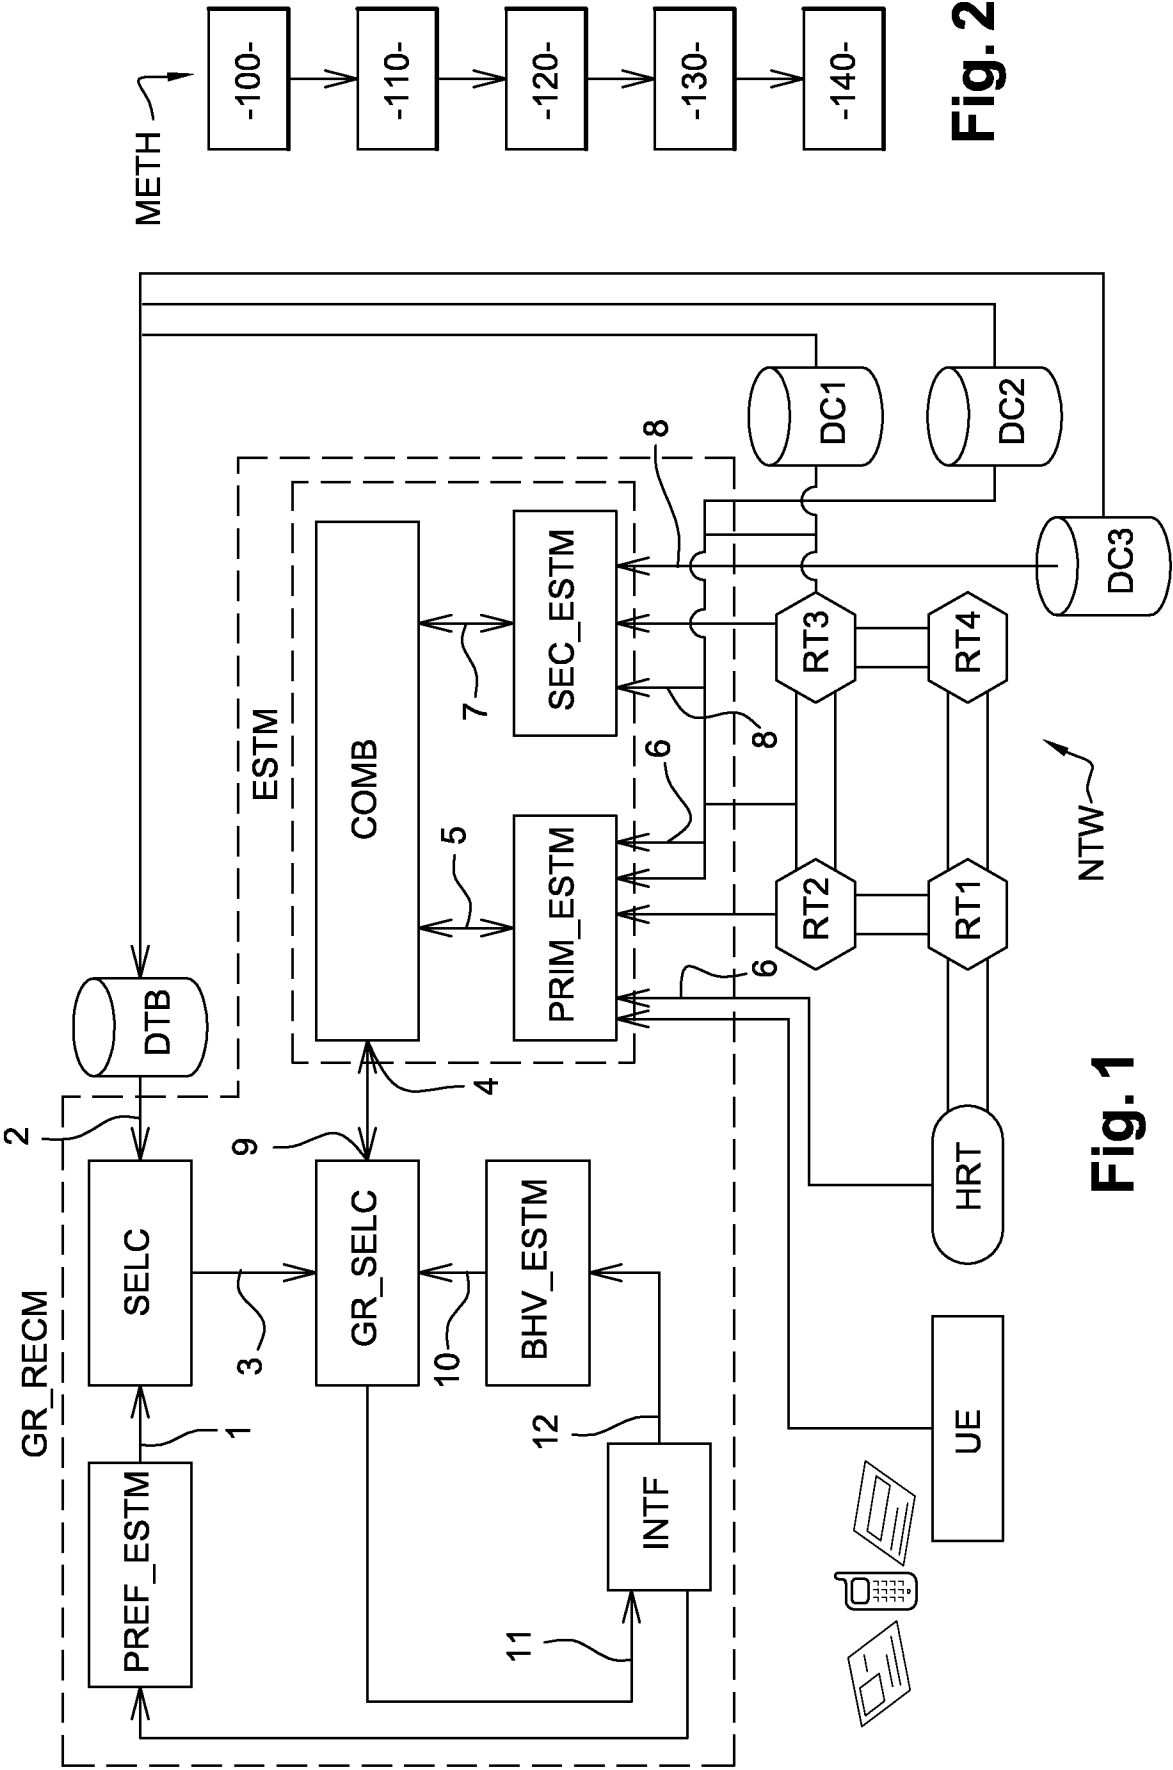


Fig. 1

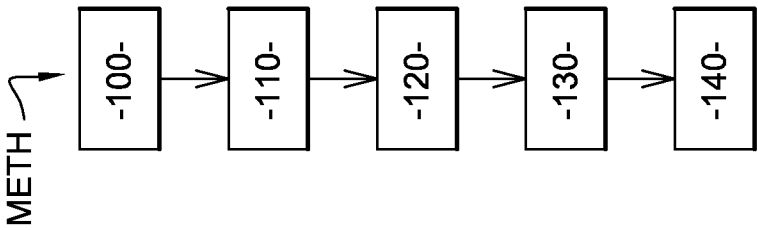


Fig. 2

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2013/073332

A. CLASSIFICATION OF SUBJECT MATTER

INV. G06F17/30 H04L29/08 G06Q30/02
 ADD. H04M3/487

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

G06F H04L G06Q H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	A. SEETHARAM ET AL.: "Shipping to Streaming: is this shift green?", GREEN NETWORKING '10, PROCEEDING OF THE FIRST ACM SIGCOMM WORKSHOP ON GREEN NETWORKING, NEW DELHI, INDIA, 2010, XP002694488, cited in the application abstract page 61, column 1, paragraph 2 - page 61, column 2, paragraph 5 page 62, column 1, paragraph 4 - page 65, column 1, paragraph 4 page 66, column 1, paragraph 4 - page 66, column 2, paragraph 2 -----	1-15
X	JP 2009 212744 A (KYOCERA MITA CORP) 17 September 2009 (2009-09-17) abstract ----- -/-	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

11 December 2013

Date of mailing of the international search report

19/12/2013

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
 NL - 2280 HV Rijswijk
 Tel. (+31-70) 340-2040,
 Fax: (+31-70) 340-3016

Authorized officer

Molinari, Fausto

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2013/073332

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2012/209907 A1 (ANDREWS ANTON O A [US] ET AL) 16 August 2012 (2012-08-16) abstract paragraph [0002] - paragraph [0008] paragraph [0096] - paragraph [0097] paragraph [0101] -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2013/073332

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
JP 2009212744	A	17-09-2009	NONE

US 2012209907	A1	16-08-2012	CN 102646109 A 22-08-2012
			EP 2676234 A2 25-12-2013
			TW 201237789 A 16-09-2012
			US 2012209907 A1 16-08-2012
			WO 2012112330 A2 23-08-2012
