

(43) International Publication Date  
17 April 2014 (17.04.2014)(51) International Patent Classification:  
*A61M 37/00* (2006.01)(US). **SEBBA, David, S.**; 109 Barons Glenn Way, Cary, NC 27513 (US). **HARRIS, Todd, J.**; 1630 Basswood Ave., Carlsbad, CA 92008 (US).

(21) International Application Number:

PCT/US2013/063920

(74)

(22) International Filing Date:

8 October 2013 (08.10.2013)

(25) Filing Language:

English

(26) Publication Language:


English

(30) Priority Data:

61/795,149 11 October 2012 (11.10.2012) US

(71) Applicants: **NANOCOMPOSIX, INC.** [US/US]; 4878 Ronson Court, Suite K, San Diego, CA 92111 (US). **SIENNA LABS, INC.** [US/US]; 3210 Merryfield Row, San Diego, CA 92121 (US).(72) Inventors: **OLDENBURG, Steven, J.**; 1440 Hotel Circle North #373, San Diego, CA 92108 (US). **MIRANDA, Martin, G.**; 5765 Adams Avenue, San Diego, CA 92115(81) **Designated States** (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.*[Continued on next page]*

(54) Title: SILVER NANOPLATE COMPOSITIONS AND METHODS

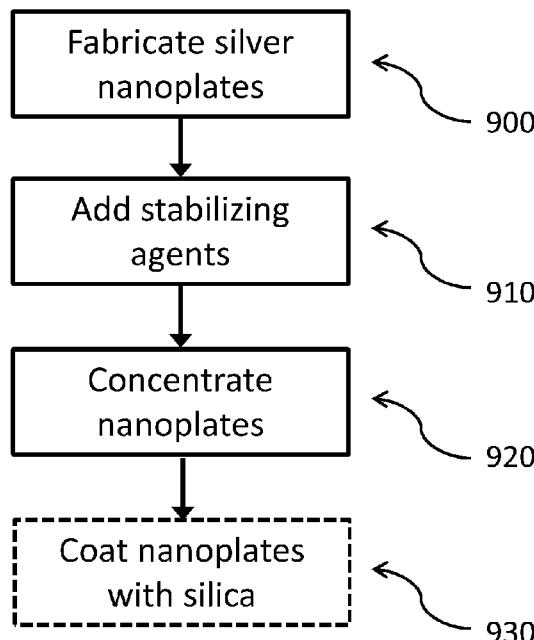

**(57) Abstract:** Embodiments of the present invention relate to methods for preparing high optical density solutions of nanoparticle, such as nanoplates, silver nanoplates or silver platelet nanoparticles, and to the solutions and substrates prepared by the methods. The process can include the addition of stabilizing agents (e.g., chemical or biological agents bound or otherwise linked to the nanoparticle surface) that stabilize the nanoparticle before, during, and/or after concentration, thereby allowing for the production of a stable, high optical density solution of silver nanoplates. The process can also include increasing the concentration of silver nanoplates within the solution, and thus increasing the solution optical density.

Figure 9



**(84) Designated States** (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

**Published:**

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

## SILVER NANOPLATE COMPOSITIONS AND METHODS

### INCORPORATION BY REFERENCE TO ANY PRIORITY APPLICATIONS

**[0001]** This application claims the benefit of priority from U.S. Provisional Application 61/795,149, filed on October 11, 2012, which is incorporated by reference in its entirety.

### PARTIES TO JOINT RESEARCH AGREEMENT

**[0002]** The invention described herein was created subject to a Joint Research Agreement between Sienna Labs, Inc. and nanoComposix, Inc.

### BACKGROUND

#### Field of the Invention

**[0003]** The invention relates to a method for preparing high optical density solutions of silver platelet nanoparticles (e.g., nanoplates) and to nanoparticles, solutions and substrates prepared by said methods.

#### Description of the Related Art

**[0004]** Nanoparticles, including nanospheres, nanorods, nanowires, nanocubes, nanoplates, as well as other shapes can be synthesized from a range of materials. In one embodiment, a platelet nanoparticle is a nanoplate. Nanoparticles made from metals including gold and silver have unique optical properties which can be tuned to interact with light throughout the electromagnetic spectrum due to the localized surface plasmon resonance supported by these nanomaterials. Technologies that take advantage of the unique optical properties of silver nanoparticles include, but are not limited to, diagnostic, photonic, medical, and obscurant technologies. A subset of these technologies including photothermal tumor ablation, hair removal, acne treatment, wound healing, and antimicrobial applications among others, may use solutions of nanoparticles with high optical densities. Silver nanoplates, which are also known as silver platelet nanoparticles or nanoprisms, are of particular interest for technologies that utilize nanoparticle optical properties due to their tunable spectral peaks and extremely high optical efficiencies. While methods of fabricating silver nanoplates via photoconversion (Jin et al. 2001; Jin et al. 2003), pH-controlled photoconversion (Xue 2007), thermal growth (Hao et al. 2004; Hao 2002; He 2008; Metraux

2005), templated growth (Hao et al. 2004; Hao 2002), and seed mediated growth (Aherne 2008; Chen; Carroll 2003; Chen; Carroll 2002, 2004; Chen et al. 2002; He 2008; Le Guevel 2009; Xiong et al. 2007) have been developed, these methods generate relatively dilute solutions with correspondingly low visible and near-infrared optical density.

## SUMMARY

**[0005]** For many silver nanoplate applications, a more concentrated solution of the silver nanoplates is of utility and can be particularly advantageous. In some instances, when as-fabricated solutions of silver nanoplates are concentrated to yield a higher particle density under previously developed methods, the shape of the nanoparticle can undergo a change resulting in a shift in optical properties, such as optical density. In many cases, these changes result in an undesirable degradation of the nanoparticle's optical properties. Accordingly, several embodiments of the present invention provide methods of preparing silver nanoplates solutions in higher concentrations with increased optical density while reducing degradation of the silver nanoplates' optical properties. In various embodiments, methods of the present invention provide for preparing high optical density solutions of silver nanoplates from dilute silver nanoplate solutions that partially, substantially, or fully preserve the shape and optical properties of the fabricated silver nanoplates when the particle concentration is increased.

**[0006]** Various embodiments of the invention provide methods for preparing high optical density solutions of silver nanoplates, as well as the nanoparticles and solutions prepared by those methods. In one embodiment, the process comprises the replacement of one or more original components (e.g., chemical or biological agents) bound to, or otherwise coupled to, the nanoparticle surface with a stabilizing agent. In another embodiment, the stabilizing agent does not replace the original component but rather supplements or alters the original component. The stabilizing agent can be a biological or chemical agent that stabilizes the nanoplates before, during, and/or after concentration, thereby allowing for the production of a stable, high optical density solution of silver nanoplates. In one embodiment, the process also comprises a method of increasing the concentration of silver nanoplates within the solution, and thus increasing the solution optical density. In several embodiments, the stability (e.g., the characteristics of the nanoparticles in the solution, such as shape, size, optical properties, peak response, plasmonic properties, etc.) of the high optical density

solution is unaffected or substantially unaffected during the process. Several embodiments of the invention comprise a high optical density solution of silver nanoplates that have been stabilized with stabilizing agents (e.g., surface bound molecules, chemical agents, and/or biological agents). In one embodiment, the invention comprises a solution of silver nanoplates that have been surface functionalized with chemical or biological agents that are physisorbed to the surface, molecularly bound to the surface through specific interactions, or encapsulate each nanoparticle.

**[0007]** In one embodiment, a high optical density solution of silver nanoplates is associated with a substrate. In one embodiment, a portion of the nanoplates in solution bind to the substrate to create a nanoplate-substrate composite. The high optical density solutions of silver nanoplates can be exposed to substrates to generate nanoplate composites where a substantial portion of the surface area of a substrate is coated with nanoplates. In some embodiments the substrate comprises fibers, cloth, mesh, bandages, socks, wraps, other articles of clothing, sponges, high porosity substrates, particles with edge lengths greater than 1 micron, beads, hair, skin, paper, absorbent polymers, foam, wood, cork, slides, roughened surfaces, biocompatible substrates, filters, and/or medical implants.

**[0008]** In several embodiments, a process for increasing the optical density of a stable, silver nanoplate solution, comprises (i) providing a solution comprising a plurality of silver nanoplates having a plate shape and having a peak optical density between  $0.1 - 10 \text{ cm}^{-1}$ ; (ii) adding a stabilizing agent to the solution; (iii) adding a buffer to the solution; and (iv) concentrating the buffer-containing solution to form a concentrated solution, wherein the concentrated solution comprises a plurality of silver nanoplates having the plate shape, and wherein the concentrated solution has a peak optical density greater than  $10 \text{ cm}^{-1}$ .

**[0009]** In several embodiments, a method for producing a stable, high optical density solution of silver nanoplates comprises the following: (i) adding a stabilizing agent to a solution of silver nanoplates, (ii) adding a buffer (e.g., such as a buffer containing a water soluble salt) to the solution of silver nanoplates, (iii) mixing the stabilizing agent with the buffer and the silver nanoplates over a period of time sufficient for the stabilizing agent to interact with the water soluble salt in the buffer on the surface of the silver nanoplates, and (iv) concentrating the solution to a peak optical density greater than  $10 \text{ cm}^{-1}$  (e.g.,  $50-1500 \text{ cm}^{-1}$ ).

**[0010]** The stabilizing agents can include one or more of sodium citrate, a water soluble polymer, (such as polystyrene sodium sulfonate and/or a hydrocarbon polymer derivatized with sulfonate), a poly vinyl based polymer (such as polyvinyl alcohol (PVA) and/or polyvinylpyrrolidone (PVP)), polyethylene glycol, polyacrylic acid, or dextran. The water soluble salt can include one or more of the sulfates, carbonates, chromates, borates, phosphates, and sulfites, acetates, and nitrates. In various embodiments, the combination of the stabilizing agent and a buffer containing one or more water soluble salts provides stabilization to the nanoplate formulation, wherein one of the components of the salt can interact with the stabilizing agent to crosslink the stabilizing agent and increase the stability of a coating on the silver nanoplate. In one embodiment an initial solution of silver nanoplates can be produced from a solution comprising one or more stabilizing agents and a silver source (e.g., such as a silver salt, silver seeds), and in which chemical agents, biological agents, mixing, electromagnetic radiation, and/or heat are used to reduce the silver source (e.g., photoconversion, pH controlled photoconversion, thermal growth, templated growth, and/or seed mediated growth).

**[0011]** In various embodiments, a process for concentrating a solution of silver nanoplates includes the steps of providing a solution comprising a plurality of silver nanoplates having a peak optical density below  $10\text{ cm}^{-1}$  (e.g.,  $0.1 - 9.9\text{ cm}^{-1}$ ,  $1-9\text{ cm}^{-1}$ ,  $3-7\text{ cm}^{-1}$ ,  $1-5\text{ cm}^{-1}$ , and/or  $5-10\text{ cm}^{-1}$ ), adding a stabilizing agent to the solution, adding a buffer containing a water soluble salt to the solution, and concentrating the solution to a peak optical density greater than  $10\text{ cm}^{-1}$  (e.g.,  $80-150\text{ cm}^{-1}$ ,  $900 - 1100\text{ cm}^{-1}$ ,  $100\text{ cm}^{-1}$ ,  $1000\text{ cm}^{-1}$  or more). In various embodiments, the peak optical density is increased by 10%, 50%, 100%, 200%, 500%, 1,000%, 10,000% or more, and/or increased by a ratio of 1:1.5, 1:2, 1:5, 1:10 or more, and/or increased by a factor of 1, 1.5, 2, 5, 10, 25, 50, 100, 1000 or more.

**[0012]** In various embodiments, the silver nanoplates have an aspect ratio of between 1.5 and 50 (e.g., 1.5 – 10, 25-50). In one embodiment, the silver nanoplates comprise an edge length between 10 nm and 300 nm (e.g., 50-250, 65-100 nm). In various embodiments, the stabilizing agent comprises sodium citrate, or at least one water soluble polymer selected from the group consisting of polystyrene sodium sulfonate and a hydrocarbon polymer derivatized with sulfonate. In some embodiments, the water soluble salt comprises one or more of sulfates, carbonates, chromates, borates, phosphates, and

sulfites, acetates, and nitrates. In one embodiment, the stabilizing agent comprises at least one of the group consisting of polyvinyl pyrrolidone, polyvinyl alcohol, polyethylene glycol, polyacrylic acid, and dextran. In one embodiment, the stabilizing agent comprises a thiol-containing molecule. The thiol-containing molecule can comprise a dihydrolipoic acid or a derivative thereof. The process optionally includes the steps of isolating the concentrated nanoplates and encapsulating the isolated concentrated nanoplates (e.g., with silica or another material). In one embodiment, the process includes the step of concentrating the encapsulated nanoplates to an optical density greater than 10 cm<sup>-1</sup> (e.g., 100 cm<sup>-1</sup>, 1000 cm<sup>-1</sup> or more). The stabilizing agent is added prior to the formation of the silver nanoplates. In one embodiment, the nanoplates are concentrated by tangential flow filtration. In one embodiment, the silver concentration is greater than 1.0 mg/mL (e.g., 1-1000, 10-300 mg/mL).

**[0013]** In various embodiments, a process for generating metal oxide coated silver nanoplates is provided. The method can include the steps of providing a solution of silver nanoplates having a peak absorption spectrum between 500 and 1500 nm (e.g., 600-1400, 800-1200 nm) and an optical density greater than 10 cm<sup>-1</sup> (e.g., 100 cm<sup>-1</sup>, 1000 cm<sup>-1</sup> or more) and contacting this solution with a solution of metal oxide or metal oxide precursor in an amount sufficient to form a metal oxide coating on an exterior surface of the silver nanoplates. In certain embodiments the silver nanoplates are associated with a stabilizing polymer (e.g., polyvinyl pyrrolidone, polyvinyl alcohol, or a combination thereof) prior to contact with the metal oxide precursor, such as by disposing the stabilizing polymer on an exterior surface of the silver nanoplates. In various embodiments, the metal oxide is silica or includes silica.

**[0014]** In various embodiments, a process for generating a solution of silver nanoplates includes the steps of providing a solution comprising a reducing agent, a stabilizing agent, a water soluble polymer, and a silver salt, forming a plurality of silver seeds from the solution, growing the plurality of silver seeds into a plurality of silver nanoplates in the solution to form a silver nanoplate solution, adding a stabilizing agent to the silver nanoplate solution, adding a buffer containing a water soluble salt to the silver nanoplate solution, and concentrating the silver nanoplate solution to a peak optical density greater than 10 cm<sup>-1</sup> (e.g., 100 cm<sup>-1</sup>, 1000 cm<sup>-1</sup> or more).

**[0015]** In various embodiments, a composition comprises or consists essentially of a solution of silver nanoplates, wherein the silver nanoplates comprise a poly vinyl polymer. In some embodiments, the poly vinyl polymer comprises polyvinyl pyrrolidone or polyvinyl alcohol. In several embodiments, the composition (e.g., solution) comprises one or more salts, such as water soluble salts (e.g., sulfates, carbonates, chromates, borates, phosphates, and sulfites, acetates, and nitrates).

**[0016]** In various embodiments, the poly vinyl polymer is associated with the salt, the poly vinyl polymer coats at least a portion of the silver nanoplates, and/or the poly vinyl polymer is disposed on an exterior surface of the silver nanoplates. In one embodiment, the solution comprises silver nanoplates in a concentration effective to adhere to a non-metal coating material present in the solution. The solution may be formulated to be concentrated. In some embodiments, the optical density of the solution or of the silver nanoplates is greater than 10 cm<sup>-1</sup> (e.g., 100 cm<sup>-1</sup>, 1000 cm<sup>-1</sup> or more). The solution may contain a salt (sulfates, carbonates, chromates, borates, phosphates, and sulfites, acetates, and nitrates) at a concentration greater than 0.1 mM (e.g., 0.1 mM to 10 mM). In one embodiment, the solution has a pH greater than 7 (e.g., 8 - 13). In some embodiments, an absorption spectrum of the silver nanoplates comprises a peak wavelength of between 500 and 1500 nm (e.g., 600-1400, 550-1100, 810-830, 1000-1100 nm). In one embodiment, the solution comprises bicarbonate. The silver nanoplates may be silica-coated. The silver nanoplates can have edge lengths between 10 nm and 500 nm (e.g., 50-300, 100-150 nm).

**[0017]** In various embodiments, a composition comprises or consists essentially of a solution of silver nanoplates bonded to a shell material comprising a poly vinyl polymer. In one embodiment, the silver nanoplates are substantially coated with the poly vinyl polymer. In various embodiments, the composition includes a metal oxide, the metal oxide comprises silica, the poly vinyl polymer comprises polyvinyl alcohol or polyvinylpyrrolidone, the silver nanoplates are bonded to polyvinyl alcohol and silica, and/or the silver nanoplates are bonded to polyvinylpyrrolidone and silica, or any combination thereof. In one embodiment, the composition includes a moiety selected from an amine moiety and a mercapto moiety. In one embodiment, the moiety is bound to the silica. In one embodiment, the composition includes aluminum. In one embodiment, the optical density of the solution is greater than 10 cm<sup>-1</sup> (e.g., 100 – 1100 cm<sup>-1</sup>, or more). In one embodiment, the

optical density of the silver nanoplates is greater than 10 cm<sup>-1</sup> (e.g., 100 cm<sup>-1</sup>, 1000 cm<sup>-1</sup>, 11-5000 cm<sup>-1</sup>, or more). In some embodiments, the solution comprises a water soluble salt (such as sulfates, carbonates, chromates, borates, phosphates, and sulfites, acetates, and nitrates) at a concentration greater than 0.1 mM (e.g., 0.5 mM to 2 mM, 0.1 mM to 10 mM). In one embodiment, the pH is greater than 7 (e.g., 8, 9, 10, 11, 12, 13). In one embodiment, the silver nanoplates comprise a peak wavelength of between 500 and 1500 nm (e.g., 700-1300, 810-830, 1000-1100 nm).

**[0018]** In various embodiments, a composition includes silver nanoplates at least partially coated by a shell material that includes a poly vinyl polymer, wherein the mean thickness of the shell material is between 1 nm and 50 nm (e.g., 5, 15, 40 nm). In one embodiment, the silver nanoplates have at least one edge length of between 10 nm and 500 nm. (e.g., 25, 100, 250, 300 nm).

**[0019]** In various embodiments, a kit comprises or consists essentially of one or more containers comprising nanoplates with an optical density greater than 10 cm<sup>-1</sup> (e.g., 100 cm<sup>-1</sup>, 1000 cm<sup>-1</sup> or more), a solution suitable for coating nanoplates with a shell of metal oxide, and instructions for use thereof. In one embodiment, the nanoplates comprise a poly vinyl polymer. In one embodiment, the poly vinyl polymer interacts (e.g., cross links or otherwise couples) with the water soluble salt (e.g., sulfates, carbonates, chromates, borates, phosphates, and sulfites, acetates, and nitrates).

**[0020]** In various embodiments, a solution includes silver nanoplates at least partially coated by a silica coating, wherein the silver nanoplates comprise a peak optical density of greater than 10 cm<sup>-1</sup> (e.g., 11-5000 cm<sup>-1</sup>, 90 – 1100 cm<sup>-1</sup>, or more). In one embodiment, the silica coating has a shell thickness between 2 and 100 nm (e.g., 10-70, 30-90, 40-60 nm). In one embodiment, the solution comprises a water soluble salt (e.g., sulfates, carbonates, chromates, borates, phosphates, and sulfites, acetates, and nitrates) at a concentration greater than 0.1 mM (e.g., 0.1 mM to 10 mM). In one embodiment, the solution has a pH greater than 7 (e.g., 9, 12, 13). In one embodiment, the silver nanoplates have a peak absorption spectrum comprising a peak wavelength between 500 nm and 1500 nm (e.g., 800-1400 nm). In one embodiment, the silica coating is disposed on an exterior surface of the silver nanoplates. In one embodiment, the coating includes an amine moiety or a mercapto moiety. In one embodiment, the coating further includes aluminum. In one

embodiment, the coating includes bicarbonate. In one embodiment, the coating includes polyvinylpyrrolidone. In one embodiment, the silver nanoplates comprise a thickness between 1 nm and 50 nm (e.g., 10-40, 15-25, 5-30). In one embodiment, the silver nanoplates comprise at least one edge length between 10 nm and 500 nm (e.g., 20-400, 50-250, 300-450).

**[0021]** In some embodiments, a process for generating a solution of silver nanoplates with extremely high optical density includes the steps of (i) adding a concentration stabilizing chemical agent to a solution of silver nanoplates or precursor reagents and (ii) increasing the concentration of silver nanoplates to increase the optical density of the solution.

**[0022]** In various embodiments, the silver nanoplates have an aspect ratio of between 1.5 and 25 (e.g., 1.5 – 10, 1.5-5, 10-30, 25-50); and/or the nanoplate has an edge length between about 10 nm and 250 nm(e.g., 25-180, 50-150 nm); and/or the nanoplate is triangular in cross section; and/or the nanoplate is circular in cross section. In one embodiment, the perimeter of the nanoplate cross section has between 4 and 8 edges (e.g., 5, 6, 7). In various embodiments, the solution of silver nanoplates is formed using one or more of a photoconversion method, a pH-controlled photoconversion method, a thermal growth method, a seed mediated growth method, and/or a solution comprising a shape stabilizing agent or agents and a silver source. In various embodiments, chemical or biological agents, and/or electromagnetic radiation, and/or heat, or a combination thereof are used to reduce the silver source. In one embodiment, the solution of silver nanoplates is formed from some combination of a reducing agent, a shape stabilizing agent, a light source, a heat source, and a silver source.

**[0023]** In one embodiment, an acid, base, or buffer (also termed a “buffering agent”) is added to change the solution pH. In various embodiments, the concentration stabilizing chemical agent is added prior to, during, and/or after the formation of the silver nanoplates. In one embodiment, the concentration stabilizing chemical agent acts as a shape stabilizing agent. In one embodiment, the concentration stabilizing chemical agent acts as a reducing agent. In one embodiment, the concentration stabilizing chemical agent acts as an agent to change the solution pH.

**[0024]** In one embodiment, the concentration stabilizing chemical agent is a water soluble polymer. In various embodiments, the polymer is any one or more of a derivative of polysulfonate, sodium polystyrene sulfonate, a derivative of a vinyl polymer, and a polyvinyl alcohol (PVA). In various embodiments, the PVA has a molecular weight of less than about 80,000 Dalton, between about 80,000 Dalton and 120,000 Dalton, and/or more than about 120,000 Dalton. In one embodiment, the polymer is polyvinylpyrrolidone (PVP). In various embodiments, the PVP has a molecular weight of less than about 20,000 Dalton, more than about 20,000 Dalton, between about 20,000 Dalton and 60,000 Dalton, and/or more than about 60,000 Dalton. In one embodiment, the polymer is an ethylene oxide derivative.

**[0025]** In one embodiment, the polymer is a polyethylene glycol (PEG). In various embodiments, the PEG has a molecular weight of less than about 5,000 Dalton, between about 5,000 Dalton and 10000 Dalton, and/or more than about 10000 Dalton. In one embodiment, the PEG contains a single functional group. In one embodiment, the PEG contains two functional groups. According to some embodiments, the functional group or groups consist of one or more of the following: an amine, thiol, acrylate, alkyne, maleimide, silane, azide, hydroxyl, lipid, disulfide, fluorescent molecule, and/or biotin, or combinations thereof. In one embodiment, the functional group or groups can be any one or more of an amine, thiol, acrylate, alkyne, maleimide, silane, azide, hydroxyl, lipid, disulfide, fluorescent molecule, and/or biotin. In one embodiment, the concentration stabilizing agent is a carbohydrate derivative. In various embodiments, the polymer is a monosaccharide, a disaccharide, an oligosaccharide, a polysaccharide, and/or dextran. In various embodiments, the dextran has a molecular weight that is less than about 2000 Dalton (e.g., 500, 1000, 1500 Dalton), between about 2000 Dalton and 5000 Dalton (e.g., 3000, 4000 Dalton), and/or more than about 5000 Dalton (e.g., 6000, 8000, 10000 Dalton or more).

**[0026]** In various embodiments, the concentration stabilizing chemical agent is any one or more of a phenol, a monomeric phenol, a dimeric phenol, a trimeric phenol, a polyphenol, a tannic acid, is gum Arabic, a biological molecule, a protein, a bovine serum albumin, streptavidin, biotin, a peptide, an oligonucleotide, a naturally occurring oligonucleotide, a synthetic oligonucleotide, a metal or metalloid oxide, and/or a silicon dioxide shell. In one embodiment, a silicon dioxide shell has ranges in thickness from about

less than 1 nm to about 100 nm (e.g., 2-90, 5-25, 30-70). In one embodiment, a combination of stabilizing agents is used.

**[0027]** In various embodiments, the solvent can be one or more of water, an alcohol, ethanol, isopropyl alcohol, t-butanol, a mixture of a water and an alcohol.

**[0028]** In one embodiment, the concentration of silver nanoplates is increased using tangential flow filtration. In one embodiment, the tangential flow filtration is performed using a tangential flow filter membrane. In one embodiment, the tangential flow membrane is made from a cellulose ester or mix of cellulose esters.

**[0029]** In various embodiments, the tangential flow membrane is made from one or more of polyetheresulfone and/or polysulfone. In various embodiments, the tangential flow membrane has a molecular weight cut off of less than about 10 kD (e.g., 1, 5, 8 kD), of between about 10 kD and 500 kD (e.g., 50, 250, 400 kD), of more than about 500 kD (e.g., 750, 1000, 5000 kD or more), of less than about 0.05  $\mu$ m (e.g., 0.01, 0.03  $\mu$ m), of between about 0.05  $\mu$ m and 0.5  $\mu$ m (e.g., 0.1, 0.25, 0.4  $\mu$ m), and/or of more than about 0.5  $\mu$ m (e.g., 1.0, 2, 5, 10, 100  $\mu$ m).

**[0030]** In various embodiments, the silver nanoplate solution is concentrated to produce a solution with an optical density of greater than about 10  $\text{cm}^{-1}$ , greater than about 50  $\text{cm}^{-1}$ , greater than about 75  $\text{cm}^{-1}$ , greater than about 100  $\text{cm}^{-1}$ , and/or greater than about 500  $\text{cm}^{-1}$  (e.g., 100-1000, 100-2000  $\text{cm}^{-1}$ ).

**[0031]** In one embodiment, the solvent of the concentrated solution is exchanged using tangential flow filtration. In one embodiment, the concentrated solution is processed to remove residual chemicals using tangential flow filtration.

**[0032]** In various embodiments, a solution of nanoparticles comprising silver nanoparticles is coated with a polymer with an optical density greater than 100  $\text{cm}^{-1}$  (e.g., 200, 500, 700, 1500  $\text{cm}^{-1}$ , or more) In one embodiment, the solution of silver nanoplates is incubated with a substrate. In one embodiment, the substrate is removed from the solution of silver nanoplates and dried.

**[0033]** One embodiment of the present invention provides processes for making solutions of plasmonic nanoparticles, such as e.g., silver nanoplates, that are suitable for performing thermomodulation of a target tissue region. Thermomodulation of a target tissue can be achieved when a composition comprising a plurality of plasmonic nanoparticles is

administered to a subject under conditions such that an effective amount of the plasmonic nanoparticles localize to a domain of the target tissue region, and exposing the target tissue region to energy delivered from a excitation surface plasmon resonance source in an amount effective to induce thermomodulation of the domain of the target tissue region. In various embodiments, materials described herein are useful for performing targeted ablative or non-ablative heating of tissue. For example, in one embodiment, provided is a method for performing targeted ablative or non-ablative heating of a tissue to treat a mammalian subject in need thereof, comprising the steps of (i) topically administering to a skin surface of the subject the composition of plasmonic nanoparticles including silver nanoplates; (ii) providing penetration means to redistribute the plasmonic particles from the skin surface to a component of dermal tissue; and (iii) causing irradiation of the skin surface by light.

**[0034]** In several embodiments, the invention comprises compositions that, when used with appropriate methods of administration and excitation with a light-based energy source, can achieve noninvasive or minimally-invasive treatment of skin and underlying tissues, or other accessible tissue spaces with the use of nanoparticles. Use of optical density solutions of plasmonic nanoparticles, such as e.g., silver nanoplates, with short pulse width laser excitation (e.g. pulse widths from 0.1ms to 1s) can create steep transient heat gradients that selectively target ablative or non-ablative heat to structures within several cell layers of where particles are localized, e.g.. pilosebaceous unit for acne treatment and pore size reduction, targeted epidermal and dermal layers for skin resurfacing and small profile scar remodeling, and hair follicle for permanent hair removal. The treatment can include, but is not limited to, hair removal, hair growth and regrowth, and skin rejuvenation or resurfacing, acne removal or reduction, wrinkle reduction, pore reduction, ablation of cellulite and other dermal lipid depositions, wart and fungus removal, thinning or removal of scars including hypertrophic scars, atrophic scars, and keloids, abnormal pigmentation (such as port wine stains), tattoo removal, and/or skin inconsistencies (e.g. in texture, color, tone, elasticity, hydration). Other therapeutic or preventative methods include, but are not limited to, treatment of hyperhidrosis, anhidrosis, Frey's Syndrome (gustatory sweating), Horner's Syndrome, and Ross Syndrome, actinici keratosis, keratosis follicularis, dermatitis, vitiligo, pityriasis, psoriasis, lichen planus, eczema, alopecia, psoriasis, malignant or non-malignant skin tumors.

## BRIEF DESCRIPTION OF THE DRAWINGS

**[0035]** Further objects, features and advantages of the invention(s) will become apparent from the following detailed description taken in conjunction with the accompanying figures showing illustrative embodiments of the invention, in which the following is a description of the drawings. The drawings are examples, and should not be used to limit the embodiments. Moreover, recitation of embodiments having stated features is not intended to exclude other embodiments having additional features or other embodiments incorporating different combinations of the stated features. Further, features in one embodiment (such as in one figure) may be combined with descriptions (and figures) of other embodiments.

**[0036]** FIG. 1 illustrates the optical spectrum of a silver nanoplate solution fabricated using a photoconversion method according to one embodiment of the present invention. As fabricated, these silver nanoplates, in one embodiment, have a peak optical density of less than  $1 \text{ cm}^{-1}$  (e.g., approximately  $0.8 \text{ cm}^{-1}$ )

**[0037]** FIG. 2 illustrates the optical spectrum of a silver nanoplate solution fabricated using a seeded growth method according to one embodiment of the present invention. As fabricated, these silver nanoplates have a peak optical density of less than  $3 \text{ cm}^{-1}$ .

**[0038]** FIG. 3A is a transmission electron microscope image of a silver nanoplate solution fabricated using a photoconversion method according to one embodiment of the present invention.

**[0039]** FIG. 3B is a transmission electron microscope image of a silver nanoplate solution fabricated using a seeded growth method according to one embodiment of the present invention.

**[0040]** FIG. 4 is the optical spectra of silver nanoplates without the addition of a stabilizing agent and water soluble salt according to one embodiment of the invention before tangential flow concentration and after tangential flow concentration.

**[0041]** FIG. 5 is the normalized optical spectra of silver nanoplates without the addition of a stabilizing agent and water soluble salt according to one embodiment of the invention before tangential flow concentration and after concentration.

**[0042]** FIG. 6 is the optical spectra according to one embodiment of silver nanoplates combined with polyvinyl alcohol and a water soluble salt before concentration and after concentration.

**[0043]** FIG. 7 is the normalized optical spectra according to one embodiment of silver nanoplates combined with polyvinyl alcohol and a water soluble salt before concentration and after concentration.

**[0044]** FIG. 8 illustrates an optical extinction spectra of high optical density nanoplate solutions processed using the methods described in various embodiments of the invention.

**[0045]** FIG. 9 illustrates steps for producing one embodiment of silver nanoplates by fabricating the silver nanoplates, adding stabilizing agents, concentrating the nanoplates and optionally coating the nanoplates with silica.

#### DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENT

**[0046]** Several embodiments of the present invention comprise processes for making solutions of plasmonic nanoparticle including silver nanoplates that are suitable for performing thermomodulation of a target tissue region. In one embodiment, thermomodulation of a target tissue can be achieved when a composition comprising a plurality of plasmonic nanoparticles is administered to a subject under conditions such that an effective amount of the plasmonic nanoparticles localize to a domain of the target tissue region. The target tissue region is exposed to energy delivered from a excitation surface plasmon resonance source. The energy is delivered in an amount effective to induce thermomodulation of the domain of the target tissue region.

**[0047]** Optical Density (O.D.), which is used herein as a synonym for absorbance, is defined to be the logarithmic ratio of the radiation incident on a material to the radiation transmitted through the material ( $O.D. = -\log_{10}(I_1/I_0)$  where  $I_1$  is the intensity of transmitted light and  $I_0$  is the intensity of the incident light). For solutions, the optical density is a function of the path length through the liquid sample and is expressed in units of  $\text{cm}^{-1}$ . In some instances, optical density is expressed without the unit  $\text{cm}^{-1}$  – such as in instances in which a standard path length of 1 cm is used. In some traditional methods of manufacturing silver nanoplates, the maximum optical density of silver nanoplates in as-synthesized

solutions without any additional processing is typically less than 10 cm<sup>-1</sup> (e.g., 0.1 – 9.9 cm<sup>-1</sup>, 1-9 cm<sup>-1</sup>, 3-7 cm<sup>-1</sup>, 1-5 cm<sup>-1</sup>, and/or 5-10 cm<sup>-1</sup>). However, according to some embodiments of the present invention, silver nanoplates can be produced with increased optical densities. Generally, optical densities of solutions containing plasmonic particles including silver nanoplates are most effective with an optical density that is higher than 10 cm<sup>-1</sup> (e.g., 11-5000 cm<sup>-1</sup>, 15-2000 cm<sup>-1</sup>, 20-1000 cm<sup>-1</sup>, 80-150 cm<sup>-1</sup>, 90-110 cm<sup>-1</sup>, 900 – 1100 cm<sup>-1</sup>, 100 cm<sup>-1</sup>, 1000 cm<sup>-1</sup> or more) and formulated into a pharmaceutical or cosmetic carrier and stable for days, months, weeks, or years without alterations in particle shape and/or properties. In one embodiment, optical densities of solutions containing plasmonic particles including silver nanoplates are higher than 10 cm<sup>-1</sup> (e.g., 11-5000 cm<sup>-1</sup>, 15-2000 cm<sup>-1</sup>, 20-1000 cm<sup>-1</sup>, 80-150 cm<sup>-1</sup>, 90-110 cm<sup>-1</sup>, 900 – 1100 cm<sup>-1</sup>, 100 cm<sup>-1</sup>, 1000 cm<sup>-1</sup> or more) and formulated into a pharmaceutical or cosmetic carrier and stable for days, months, weeks, or years without alterations in particle shape and/or properties. In one embodiment, the carrier and composition are suitable for topical administration to the skin of a mammalian subject, such that the plasmonic nanoparticles are present in an effective amount for selective thermomodulation of a component of the skin.

**[0048]** In some embodiments, the nanoparticle formulations are formulated for application by a sponge applicator, cloth applicator, direct contact via a hand or gloved hand, spray, aerosol, vacuum suction, high pressure air flow, or high pressure liquid flow, roller, brush, planar surface, semi-planar surface, wax, ultrasound and other sonic forces, mechanical vibrations, hair shaft manipulation (including pulling, massaging), physical force, thermal manipulation, and/or other treatments. In some embodiments, nanoparticle formulation treatments are performed alone, in combination, sequentially or repeated 1-24 times, or more. In other embodiments, the plasmonic nanoparticles are capable of selectively localizing to a first component of the skin, where physical massage or pressure, ultrasound, or heat increase the selective localization of the nanoparticles to this first component. Additionally, the nanoparticles are selectively removable from components of the skin other than the first component, such removal can be accomplished with acetone, alcohol, water, air, peeling of the skin, chemical peeling, waxing, or reduction of the plasmonic compound. Further, in some embodiments the nanoparticles have a coat layer to increase solubility of the nanoparticles in the carrier and/or reduce “stickiness” and accumulation in non-target areas.

In one embodiment, at least a portion of an exterior surface of the nanoparticle is modified, such as to include a layer of a polymer, polar monomer, non-polar monomer, biologic compound, a metal (e.g., metallic thin film, metallic composite, metal oxide, or metallic salt), a dielectric, or a semiconductor. In one embodiment, the exterior surface modification is polar, non-polar, charged, ionic, basic, acidic, reactive, hydrophobic, hydrophilic, agonistic, and/or antagonistic. In one embodiment, at least one dimension of at least one nanoparticle within a solution of plasmonic nanoparticles is below 50-100 nm (e.g., 1, 5, 10, 25, 40, 60, 75, 90 nm), and the nanoparticle surface can be coated with a matrix (e.g. silica) of 10-100 nm thickness or more (e.g., 20, 50, 75, 150, 200, 500 nm) in order to increase that dimension or particle to 50-100 nm or more (e.g., 75, 80, 110, 140, 200, 800 nm). This increased dimension size can increase the delivery of all nanoparticles to a target region (e.g., hair follicle, pore, skin, etc.) and limit delivery to non-target region (e.g. dermis).

**[0049]** In various embodiments, materials described herein are useful for performing targeted ablative or non-ablative heating of tissue. For example, in one embodiment, provided is a method for performing targeted ablative or non-ablative heating of a tissue to treat a mammalian subject in need thereof, comprising the steps of (i) topically administering to a skin surface of the subject the composition of plasmonic nanoparticles including silver nanoplates; (ii) providing penetration means to redistribute the plasmonic particles from the skin surface to a component of dermal tissue; and (iii) causing irradiation of the skin surface by light. In further or additional embodiments, provided is a method wherein the light source comprises excitation of mercury, xenon, deuterium, or a metal-halide, phosphorescence, incandescence, luminescence, light emitting diode, or sunlight. In still further or additional embodiments, provided is a method wherein the penetration means comprises high frequency ultrasound, low frequency ultrasound, massage, iontophoresis, high pressure air flow, high pressure liquid flow, vacuum, pre-treatment with fractionated photothermolysis or dermabrasion, or a combination thereof. In still further embodiments, provided is a method wherein the irradiation comprises light having a wavelength of light between about 200 nm and about 10,000 nm (e.g., 300-9000, 700-1300, 800-1200, 800-1300, 900-1100, 550-1100, 810-830, 1000-1100 nm), a fluence of about 1 to about 100 joules/cm<sup>2</sup> (e.g., 5-20, 40-70, 10-90), a pulse width of about 1 femtosecond to about 1 second, and a

repetition frequency of about 1 Hz to about 1 THz (e.g., 1-10, 10-100, 100-1000, 1000-10000, 10000-100000 Hz or more).

**[0050]** An object of one embodiment of the subject matter described herein is to provide compositions, that when used with appropriate methods of administration and excitation with a light-based energy source can achieve noninvasive and minimally-invasive treatment of skin and underlying tissues, or other accessible tissue spaces with the use of nanoparticles. Use of optical density solutions of plasmonic nanoparticles, such as e.g., silver nanoplates, with short pulse width laser excitation (e.g. pulse widths from 0.1ms to 1s) can create steep transient heat gradients that selectively target ablative or non-ablative heat to structures within several cell layers of where particles are localized, e.g.. pilosebaceous unit for acne treatment and pore size reduction, targeted epidermal and dermal layers for skin resurfacing and small profile scar remodeling, and hair follicle for permanent hair removal. The treatment can include, but is not limited to, hair removal, hair growth and regrowth, and skin rejuvenation or resurfacing, acne removal or reduction, wrinkle reduction, pore reduction, ablation of cellulite and other dermal lipid depositions, wart and fungus removal, thinning or removal of scars including hypertrophic scars, atrophic scars, and keloids, abnormal pigmentation (such as port wine stains), tattoo removal, and/or skin inconsistencies (e.g. in texture, color, tone, elasticity, hydration). Other therapeutic or preventative methods include, but are not limited to, treatment of hyperhidrosis, anhidrosis, Frey's Syndrome (gustatory sweating), Horner's Syndrome, and Ross Syndrome, actinici keratosis, keratosis follicularis, dermatitis, vitiligo, pityriasis, psoriasis, lichen planus, eczema, alopecia, psoriasis, malignant or non-malignant skin tumors.

### **Silver Nanoplate Physical Description**

**[0051]** In one embodiment, nanoplates, such as silver nanoplates, are characterized by lengths along the three principle axes wherein: the axial length of two of the principle axes is at least two times greater than the axial length of the shortest principle axis, and the shortest principal axial length is less than about 500 nm (e.g., 450, 400, 350, 300, 250, 100, 150, 50, 30, 20, 10 nm). The “edge length” of the nanoplate is defined to be the average of the length of the two longer principle axes. The “thickness” of the nanoplate is defined to be the shortest principal axis.

**[0052]** The ratio of the edge length to the thickness is referred to as the “aspect ratio”. In various embodiments the average aspect ratio of the silver nanoplates is greater than 1.5, 2, 3, 4, 5, 7, 10, 20, 30, or 50 and any range therein. In one embodiment the average aspect ratio of the silver nanoplates is between 1.5 and 25, 2 and 25, 1.5 and 50, 2 and 50, 3 and 25, and/or 3 and 50.

**[0053]** In various embodiments a nanoplate has edge lengths less than 500 nm, 250 nm, 200 nm, 150 nm, 100 nm, 80 nm, 60 nm or 50 nm. In one embodiment the nanoplate has edge lengths greater than 5 nm, 10 nm, 20 nm, 30 nm, 50 nm or 100 nm. In various embodiments the edge length is from 30 nm to 100 nm, 20 nm to 150 nm, 10 nm to 200 nm, 10 nm to 300 nm. In various embodiments, the nanoplate has a thickness that is less than 500 nm, 300 nm, 200 nm, 100 nm, 80 nm, 60 nm, 50 nm, 40 nm, 30 nm, 20 nm, and/or 10 nm and any range therein. In various embodiments the nanoplate thickness is from 5 nm to 20 nm, 5 nm to 30 nm, 10 nm to 30 nm, 10 nm to 50 nm, 10 nm to 100 nm.

**[0054]** Various embodiments of silver nanoplates have a variety of different cross sectional shapes including (but not limited to) circular, triangular, or shapes that have any number of discrete edges. In non-limiting embodiments, the nanoplates can be shaped as circular, ovals, squares, rectangles, rods, stars, tubes, pyramids, prisms, triangles, branches, or comprised of a planar surface. In various embodiments the nanoplates have less than 20, 15, 10, 8, 6, 5, or 4 edges, and/or any number between 20 and 1. In various embodiments, the nanoplates can have between 1 and 20, 15, 10, 8, 6, 5, 4, or 3 edges. In one embodiment the nanoplates have more than 2, 3, 4, or 5 edges. In some embodiments the silver nanoplates have sharp corners and in other embodiments the corners are rounded. In some embodiments of silver nanoplates, there are a variety of different cross sectional shapes within the same sample. In other embodiments of silver nanoplate solutions greater than 5%, 10%, 20%, 30%, 40%, 50%, 60%, 70%, 80%, or 90% of the number of particles in solution are silver nanoplates with the other particles having different shapes including but not limited to spherical, cubic, and irregular. In various embodiments, a silver nanoplate solution has a percentage of silver nanoplates, with other particles in the solution having different shapes, including but not limited to spherical, cubic, and/or irregular. In various embodiments, a silver nanoplate solution has 5% to 100%, 10% to 50%, 50% to 100%, 30% to 60%, 60% to 100%, 40% to 70%, 70% to 100%, 50% to 80%, 80% to 100%, 60% to 90%, and/or 90% to

100% of the number of particles in solution are silver nanoplates with the other particles having different shapes including but not limited to spherical, cubic, and/or irregular. In some embodiments, methods can enhance the stability of silver nanoplates to facilitate increased optical density while retaining at least 50%, 60%, 70%, 80%, 90%, 95%, 98% or more of the silver nanoplate shape while undergoing a concentrating process. In some embodiments, methods can enhance the stability of silver nanoplates to facilitate increased optical density while changing shape from the nanoplate to another shape (e.g., spherical, cubic, and/or irregular) in less than 50%, 40%, 30%, 25%, 20%, 10%, 5%, 3%, 2%, 1% of the silver nanoplates while undergoing a concentrating process. In various embodiments the nanoplates can have one, two, or more flat sides. In another embodiment the nanoplates are pyramidal.

**[0055]** Silver nanoplates have distinct advantages over other plasmonic nanoparticle shapes and compositions. For example, silver nanoplates have advantages over plasmonic nanoparticle shapes and compositions including gold nanoshells and gold nanorods due to potential for lower production costs (less reaction waste and lower material costs). Furthermore, optical density (O.D.) per weight of metal is greater for silver nanoplates relative to gold nanorods when randomly oriented in solution and irradiated with non-polarized light because the planar surface of a nanoplate resonates with both polarizations of incident light. Additionally, absorbance of silver nanoplates is higher than that of gold nanoshells for the same weight of metal as a greater fraction of light is absorbed versus scattered with a nanoplate architecture relative to a nanoshell. For many applications, these benefits in cost and absorbance can only be realized if nanoplates are stabilized at high concentration and for long periods of time, which is the subject of one embodiment of the present invention.

### Silver Nanoplate Fabrication

**[0056]** Modern nanoparticle synthesis techniques have enabled the development of materials with unique optical properties for a wide range of applications including diagnostic, obscurant, and therapeutic applications. Silver nanoplates, as fabricated by current traditional methods including photoconversion, pH controlled photoconversion, thermal growth, and/or seed mediated growth methods typically have optical densities ranging from 0.1 to 10 cm<sup>-1</sup> (e.g., e.g., 0.1 – 9.9 cm<sup>-1</sup>, 1-9 cm<sup>-1</sup>, 3-7 cm<sup>-1</sup>, 1-5 cm<sup>-1</sup>, and/or 5-

10 cm<sup>-1</sup>). A number of technologies seek higher optical density solutions of silver nanoplates. Several embodiments of the present invention describe a novel and non-obvious method for concentrating silver nanoplates and generating higher optical density silver nanoplate solutions. For example, in various embodiments, methods can increase the optical density of silver nanoplate solutions to greater than 10 cm<sup>-1</sup>, 20 cm<sup>-1</sup>, 30 cm<sup>-1</sup>, 50 cm<sup>-1</sup>, 80 cm<sup>-1</sup>, 100 cm<sup>-1</sup>, 150 cm<sup>-1</sup>, 200 cm<sup>-1</sup>, 300 cm<sup>-1</sup>, 400 cm<sup>-1</sup>, 500 cm<sup>-1</sup>, 600 cm<sup>-1</sup>, 700 cm<sup>-1</sup>, 800 cm<sup>-1</sup>, 900 cm<sup>-1</sup>, and/or 1000 cm<sup>-1</sup>, or more.

**[0057]** Silver nanoplates may be fabricated using photoconversion (Jin et al. 2001; Jin et al. 2003), pH controlled photoconversion (Xue 2007), thermal growth (Hao et al. 2004; Hao 2002; He 2008; Metraux 2005), templated growth (Hao et al. 2004; Hao 2002), seed mediated growth (Aherne 2008; Chen; Carroll 2003; Chen; Carroll 2002, 2004; Chen et al. 2002; He 2008; Le Guevel 2009; Xiong et al. 2007), all herein incorporated by reference, or alternative methods. Alternative methods according to various embodiments of the present invention include methods in which the silver nanoplates are formed from a solution comprising one or more stabilizing agents and a silver source, and in which chemical agents, biological agents, mixing, electromagnetic radiation, and/or heat are used to reduce the silver source.

**[0058]** An optical spectrum of silver nanoplates fabricated using one embodiment of a photoconversion method is shown in FIG 1. The peak wavelength of the optical spectra (100) is at a wavelength of 775 nm with an optical density of 0.74 cm<sup>-1</sup>. The optical spectra of silver nanoplates fabricated using one embodiment of a seed mediated growth method is shown in FIG 2. The peak wavelength of the optical spectra (200) is at a wavelength of 930 nm with an optical density of 2.58 cm<sup>-1</sup>. A transmission electron microscope image of silver nanoplates made using a photoconversion method is shown in FIG. 3A. A transmission electron microscope image of silver nanoplates made using a seed mediated growth method is shown in FIG 3B.

**[0059]** In one embodiment, when as-fabricated nanoplates are concentrated using tangential flow filtration, the shape of many of the nanoplates can shift to nanospheres, reducing the formulation efficacy, as evidenced by an increased peak height at ~400 nm which is the peak optical resonance of spherical silver nanoparticles. FIG. 4 shows the optical density of one embodiment of a solution of the nanoplates in the absence of a

concentration stabilization agent before (400) and after (410) concentration. The optical resonance peak that corresponds to the plasmon resonance of the nanoplates shifts from 815 nm (420) to 745 nm (430) demonstrating that the average edge length of the nanoplates is reduced.

**[0060]** FIG. 5 shows a normalized plot of the nanoplate spectra shown in FIG. 4. For this solution of nanoplates, the intensity of the peak in the 700 nm – 850 nm range is correlated to the number of nanoplates in solution. The intensity of the peak in the 400 nm range is correlated to the number of spheroidal particles in solution. Before concentration the ratio of the longer wavelength peak (520) to the shorter wavelength peak (540) is 3. After concentration the ratio of the longer wavelength peak (530) to the shorter wavelength peak (550) is 0.8. This changing ratio demonstrates that the silver nanoplates are changing shape and that the number of nanoplates in solution is reduced.

**[0061]** In one embodiment, a solution of nanoplates can be stabilized. FIG. 6 shows the optical density of one embodiment of a solution of nanoplates that have been stabilized by polyvinyl alcohol in a solution of borate (e.g., sodium borate, potassium tetraborate, etc.). The peak wavelength of the nanoplate peak is the same for both the unconcentrated (620) and concentrated (630) solutions indicating that the edge length of the nanoplates is the same before concentration (600) and after concentration (610). FIG. 7 shows the normalized spectrum which demonstrates that the spectral shape of the peak does not change before concentration (700) and after concentration (710), thereby indicating that in one embodiment, a surface coating is sufficient to prevent the shape of the nanoparticles from shifting. In various embodiments, greater than 10%, greater than 20%, greater than 30% or greater than 50% of the silver nanoplates change shape without a surface protection. In other embodiments less than 20%, less than 10% or less than 5% of the silver nanoplates undergo a shape change if the nanoplates are coated with a protective surface coating. In one embodiment, a spectrum of a nanoplate solution concentrated to have a peak optical density of  $\sim 900 \text{ cm}^{-1}$  is shown in FIG. 8.

**[0062]** In one embodiment, the silver nanoplates are formed in a multi-step process. In one embodiment, the steps to concentrating nanoplates are shown in FIG. 9 and comprise of fabricating the silver nanoplates (900), adding stabilizing agents (910), concentrating the nanoplates (920) and optionally coating the nanoplates with silica (930). In

various embodiments, the steps can be taken in any order. In one embodiment, a first step forms silver seeds from an aqueous solution comprising a reducing agent, a stabilizing agent, a water soluble polymer and a silver salt. The reducing agent, stabilizing agent and water soluble polymer may be mixed prior to the addition of a silver source. In various embodiments, the reducing agent used in the silver seed formation step can be formaldehyde, sodium borohydride, another borohydride, hydrogen gas, carbon monoxide gas, hydrazine, or reducing sugars, or combinations of these. In various embodiments, the reducing agent may be present at a concentration of at least 0.1 mM, 1 mM, or 3mM. In various embodiments the reducing agent may be present at a concentration from 0.1 mM to 1 mM, 0.3 mM to 3 mM, 0.5 mM to 2 mM, 0.1 mM to 2 mM, 0.1 mM to 10 mM.

**[0063]** In various embodiments, the stabilizing agent may be a salt, a polymer, or a biomolecule. In one embodiment the stabilizing agent is trisodium citrate or another citrate derivative.

**[0064]** In one embodiment, the water soluble polymer is a polyanionic polymer including, but not limited to, polymers derivatized with sulphonate, derivatives of polystyrene sulphonate such as an inorganic salt of polystyrene sulphonate, or a monovalent salt of polystyrene sulphonate. In one embodiment the water soluble polymer is poly (sodium styrenesulphonate) (PSSS). In one embodiment the PSSS has a molecular weight between about 3 kDa and about 1,000 kDa. In various embodiments the PSSS has a molecular weight of from 3 kDa to 10 kDa, 5 kDa to 50 kDa, 10 kDa to 100k Da, 30 kDa to 300 kDa, 50 kDa, to 500 kDa, 100 kDa to 1000 kDa, 300 kDa to 100 kDa, 500 kDa, to 1000 kDa.

**[0065]** In various embodiments, the silver salt may be any water soluble silver salt including but not limited to silver acetate, silver perchlorate, silver nitrate, silver trifluoroacetate, or silver triflate.

**[0066]** In one embodiment, a step for the formulation of silver nanoplates includes having the seeds grown into silver nanoplates in an aqueous solution comprising silver seeds, an acidic reducing agent and a silver salt. In one embodiment, the acidic reducing agent is citric acid or ascorbic acid. The silver salt for the step where seeds are grown into silver nanoplates may be any water soluble silver salt including silver acetate,

silver perchlorate, silver nitrate, silver trifluoroacetate, silver triflate, or combinations thereof.

**[0067]** In one embodiment, the silver nanoplates are stirred at a shear flow rate between 1 s<sup>-1</sup> and 100,000 s<sup>-1</sup> (e.g., at least 10, 50, 100, 200, 300, 400, 500, 1000, 2000, 5000, 10000, 20000, 50000, 75000, 90000 s<sup>-1</sup>). In various embodiments the silver nanoplates are stirred at a shear flow rate from between 10 s<sup>-1</sup> and 100 s<sup>-1</sup>, 50 s<sup>-1</sup> and 500 s<sup>-1</sup>, 100 s<sup>-1</sup> and 300 s<sup>-1</sup>, 200 s<sup>-1</sup> and 500 s<sup>-1</sup>, 100 s<sup>-1</sup> and 400 s<sup>-1</sup>, 500 s<sup>-1</sup> and 1000 s<sup>-1</sup>, 1000 s<sup>-1</sup> and 10000 s<sup>-1</sup>, 2000 s<sup>-1</sup> and 5000 s<sup>-1</sup>, 1000 s<sup>-1</sup> and 2000 s<sup>-1</sup>, 5000 s<sup>-1</sup> and/or 10000 s<sup>-1</sup>.

### Silver Nanoplate Coating

**[0068]** In one embodiment, silver nanoplates have molecules that are adsorbed or otherwise bound to the particle surface. The molecules on the surface are the reactants or reactant by-products of the synthesis. One object of this invention is to partially or fully exchange the molecules that are bound to the surface of the silver nanoplates with other molecules that more fully protect the particles from changing shape during concentration. Another object of the invention is to use a stabilizing agent during fabrication that generates plate shapes and also stabilizes the plates during subsequent concentration.

**[0069]** In various embodiments, stabilizing agents that may be utilized include chemical or biological agents that are physisorbed (e.g., absorbed by non-molecular binding forces) to the surface, molecularly bound to the surface through specific interactions (e.g. thiol or amine), or encapsulate the surface (e.g. a metal oxide or metalloid oxide shell). In one embodiment, specific chemical agents of interest include polymers. In one embodiment, specific chemical agents of interest include polymers such as polysulphonates. In one preferred embodiment the stabilizing polymer is derivatized with sulfonates. In some embodiments, vinyl polymers, carbohydrates, ethylene oxides, phenols, and carbohydrates may be employed. Specific examples of these polymers include polystyrene sodium sulfonate, polyvinyl alcohol (PVA), polyvinyl pyrrolidone (PVP), polysaccharides, phenol, tannic acid, dextran, and polyethylene glycol (PEG) including PEG molecules which contain one or more chemical groups (e.g. amine, thiol, acrylate, alkyne, maleimide, silane, azide, hydroxyl, lipid, disulfide, fluorescent molecule, or biomolecule moieties). Specific molecules of interest include proteins, peptides, oligonucleotides, biotin, alkane thiols, lipoic and dihydrolipoic acid and derivatives of these acids, bovine serum albumin, streptavidin,

neutravidin, wheat germ agglutinin, naturally occurring and synthetic oligonucleotides and peptides, including synthetic oligonucleotides which have one or more chemical functionalities (e.g. amine, thiol, dithiol, acrylic phosphoramidite, azide, digoxigenin, alkynes, or biomolecule moieties). Specific encapsulating chemical agents of interest include metal oxide shells such as  $\text{SiO}_2$  and  $\text{TiO}_2$ . Stabilizing agents may be added prior to the formation of silver nanoplates, during the formation of silver nanoplates, or after the formation of silver nanoplates. An additional chemical agent of interest is gum arabic. In some embodiments, the stabilizing agent also modifies the pH of the solution.

### Carrier Solutions

**[0070]** In one embodiment of this invention, the silver nanoplates are fabricated in aqueous solutions. In other embodiments, the silver nanoplates are fabricated in other solutions that can include ethanol, isopropanol, or organic solvents such as heptane, toluene, or butanol.

**[0071]** In one embodiment an acid, base or buffering agent is added to change the solution pH either before, during, or after the addition of a stabilant. In one embodiment, a buffer, typically containing a water soluble salt, is added. In one embodiment, the water soluble salt comprises borate. In one embodiment, the water soluble salt comprises sodium borate. In one embodiment the nanoplates are suspended in a sodium bicarbonate buffer or a sodium borate buffer. In one embodiment the pH of the solution after addition of the pH modifying agent is greater than pH 6, pH 7, pH 8, pH 9, or pH 10. In various embodiments, the pH of the solution after addition of the pH modifying agent is from pH 6 to pH 8, pH 6.0 to pH 9, pH 7 to pH 10, pH 7 to pH 11, pH 8 to pH 10, pH 8 to pH 11, or pH 7 to pH 12.

**[0072]** In one embodiment, the combination of a nanoplate coating and a water soluble salt present in a buffer provides stabilization to the nanoplate formulation. In some embodiments, one of the components of the salt can interact with the nanoplate coating or stabilizing agent to crosslink the coating and increase the stability of the coating. In various embodiments, such crosslinking can include non-covalent bonds (e.g., ionic bonds, hydrophobic interactions, hydrogen bonds and van der Waals forces including dispersion attractions, dipole-dipole and dipole-induced dipole interactions) and/or covalent bonds between the nanoplate surface, water soluble salts, and/or coating materials/stabilizing agents. In some embodiments the presence of the water-soluble salt present in a buffer

changes the binding affinity of a stabilizing agent or coating material to the nanoplate surface, e.g., by modifying the zeta potential and/or charges on the surface of the nanoplate. In other embodiments the water-soluble salt present in a buffer changes the binding affinity of a stabilizing agent or coating material to itself through covalent or non-covalent binding. In some embodiments the presence of the water-soluble salt intermediates binding of a stabilizing agent to the surface of a particle by becoming physisorbed to the particle surface in association with the stabilizing agent. In further embodiments the water-soluble salt intermediates binding of polymer to itself by associating with units of the stabilizing agent or coating materials and lowering the free energy necessary for the coating materials to order on or around a nanoplate surface. In one embodiment, the nanoplate coating is a polymer and the crosslinking produces a viscoelastic gel surrounding all or a portion of the nanoplate.. In other embodiments the stabilizing agent is mixed with a buffer containing a water-soluble salt, and both the stabilizing agent and a component of the water soluble salt bind to the surface of the nanoplate. In one embodiment, a polyvinyl based polymer such as polyvinylalcohol or polyvinylpyrrolidone is mixed with a borate salt such as sodium borate. Polyvinylalcohol and borate are can be complexed to form gels via hydrogen bonding (Schultz 1969). In one embodiment, FIG. 6 and FIG. 7 show the effect of stabilizing silver nanoplates with polyvinyl alcohol and sodium borate before concentration to preserve the shape of the nanoparticles.

### Surface Stabilization

**[0073]** In various embodiments, stabilizing agents can be solid or liquid formulations that are added to the silver nanoplate solution. The stabilizing agents have an affinity for the surface of the silver nanoplates and are able to associate with the plate surface at wide ranges of relative concentrations. In some embodiments, bound molecules on the silver nanoplates are displaced by a stabilizing agent. Alternatively, a stabilizing agent, such as a polymer, is covalently attached to a silver atom present on the surface of the nanoplate. The polymer coating may extend over all or a portion of the exterior surface of a silver nanoplate. For example, at least 5%, 10%, 15%, 20%, 25%, 50%, 75%, 80%, 90%, 95%, 99%, 99.9% or greater than 99.9% of the exterior surface of a silver nanoplate is coated with one type of polymer or a plurality of different polymer types. In one embodiment, the stabilizing agent is added before the formation of the silver nanoplates while in another

embodiment, the stabilizing species is added after the synthesis of the silver nanoplates. Thus, provided are compositions containing polymer-coated silver nanoplates, and solutions containing these compositions may have an optical density less than or equal to 10 cm<sup>-1</sup>. Alternatively, such solutions have polymer-coated silver nanoplates and an optical density greater than 10 cm<sup>-1</sup>; these solutions can be achieved by concentrating or purifying polymer-coated silver nanoplates present in a more dilute solution. In some embodiments the stabilants are added to the as-fabricated silver nanoplate solution. In other embodiments, the solution of nanoplates is washed, or the residual reactants are otherwise removed. In some embodiments, the suspending solution is exchanged one or more times with one or more solution, e.g., to wash the nanoplates or to alter the pH of the solution, before the stabilizing agents are added. Also provided are kits containing, in one or more containers, nanoplates in a solution having an optical density greater than 10 cm<sup>-1</sup> and a metal oxide-containing solution or a metal oxide precursor-containing suitable for coating the nanoplates with a shell (or coating) of the metal oxide. Preferably, the containers are provided with instructions for use thereof. In some embodiments the kits contain nanoplates having a coating containing a poly vinyl polymer. In other embodiments the poly vinyl polymer contains borate. Nanoplates having a stabilizer coating are characterized as provided herein or otherwise known in the art, such as by particle analyzers or emission detectors such as NMR, Fourier transform spectroscopy, mass spectrometry, or similar assays.

**[0074]** Once the stabilizing agent is added, the mixture of the stabilant and the silver nanoplates can undergo a number of different processes including heating, boiling, boiling under reflux, rotary evaporation, vacuum, stirring, stirring with magnetic stir bars, stirring with overhead mixers, stirring with homogenizers, shaking, microfluidization, refrigeration, and freezing.

### **Washing and Concentrating**

**[0075]** In one embodiment, after the stabilization step is complete, the silver nanoplates can be washed to remove residual reactants or to exchange the solution with another solution. The exchange of solution can be accomplished using dialysis, centrifugation, filtration, or tangential flow filtration (also known as cross flow filtration). In various embodiments, the number of wash volumes exchanged within the sample is zero, 1, 2, 3, 4, 5, 1 and 5, 5 to 10, 10 to 20, or more than 20 wash volumes, inclusive.

**[0076]** Nanoparticle solutions with optical densities greater than  $10\text{ cm}^{-1}$  (e.g.,  $11\text{--}5000\text{ cm}^{-1}$ ,  $15\text{--}2000\text{ cm}^{-1}$ ,  $20\text{--}1000\text{ cm}^{-1}$ ,  $80\text{--}150\text{ cm}^{-1}$ ,  $90\text{--}110\text{ cm}^{-1}$ ,  $900\text{--}1100\text{ cm}^{-1}$ ,  $100\text{ cm}^{-1}$ ,  $1000\text{ cm}^{-1}$  or more) can be fabricated using centrifugation, evaporation, filtration, dialysis or tangential flow filtration. One embodiment of this invention utilizes tangential flow filtration as the process of concentrating the silver nanoplate solution. The filter membrane utilized may be formed from a variety of materials. In various embodiments, specific filter membrane materials of interest can include cellulose esters, polysulfone, and polyetheresulfone. In various embodiments, the filter membrane utilized may have pores with a molecular weight cutoff of less than about  $10\text{ kD}$ , between  $10\text{ kD}$  to  $500\text{ kD}$ , or more than about  $500\text{ kD}$ , and/or pore sizes of less than about  $0.05\text{ }\mu\text{m}$ , between  $0.05\text{ }\mu\text{m}$  and  $0.5\text{ }\mu\text{m}$ , or larger than about  $0.5\text{ }\mu\text{m}$ . In various embodiments, the filter membrane utilized may have pores with a molecular weight cutoff between  $10\text{ kD}$ , to  $100\text{kD}$ ,  $10\text{kD}$  to  $500\text{kD}$ ,  $20\text{kD}$  to  $500\text{kD}$ ,  $20\text{kD}$  to  $250\text{kD}$  and/or pore sizes between  $0.02\text{ }\mu\text{m}$  and  $0.1\text{ }\mu\text{m}$ ,  $0.05\text{ }\mu\text{m}$  and  $0.2\text{ }\mu\text{m}$ ,  $0.05\text{ }\mu\text{m}$  and  $0.5\text{ }\mu\text{m}$ ,  $0.10\text{ }\mu\text{m}$  and  $0.2\text{ }\mu\text{m}$ ,  $0.1\text{ }\mu\text{m}$  and  $0.5\text{ }\mu\text{m}$ . Tangential flow filtration can also be utilized to change the solvent in which the silver nanoplates are dispersed. In various embodiments, specific solvents of interest include water and alcohols (e.g. t-butanol, ethanol, and isopropyl alcohol), as well as other polar or non-polar solvents. Additionally, tangential flow filtration can be utilized to remove residual chemicals. FIG. 8 shows an embodiment of a solution of nanoplates that has been concentrated to a peak optical absorbance of  $930\text{ cm}^{-1}$ .

**[0077]** In various embodiments, the silver nanoplate solution concentration is increased to produce a final solution with optical densities of greater than about  $5\text{ cm}^{-1}$ , greater than about  $10\text{ cm}^{-1}$ , greater than about  $50\text{ cm}^{-1}$ , greater than about  $75\text{ cm}^{-1}$ , greater than about  $100\text{ cm}^{-1}$ , greater than about  $500\text{ cm}^{-1}$ , and/or greater than about  $1000\text{ cm}^{-1}$ . In various embodiments, the silver nanoplate solution concentration is increased to produce a final solution with optical densities from between  $10\text{ cm}^{-1}$  to  $100\text{ cm}^{-1}$ ,  $30\text{ cm}^{-1}$  to  $300\text{ cm}^{-1}$ ,  $50\text{ cm}^{-1}$  to  $500\text{ cm}^{-1}$ ,  $100\text{ cm}^{-1}$  to  $1000\text{ cm}^{-1}$ ,  $300\text{ cm}^{-1}$  to  $3000\text{ cm}^{-1}$ , or  $500\text{ cm}^{-1}$  to  $5000\text{ cm}^{-1}$ . One embodiment of the invention is where the silver nanoplate solution concentration is increased to above  $10^6$ ,  $10^7$ ,  $10^8$ ,  $10^9$ ,  $10^{10}$ ,  $10^{11}$ ,  $10^{12}$  or  $10^{13}$  particles per milliliter. In various embodiments, the silver nanoplate solution concentration is increased to be between  $10^6$  and  $10^{13}$ ,  $10^7$  and  $10^{13}$ ,  $10^8$  and  $10^{13}$ ,  $10^9$  and  $10^{13}$ ,  $10^{10}$  and  $10^{13}$ ,  $10^{11}$  and  $10^{13}$ , or  $10^{12}$  and  $10^{13}$ .

particles per milliliter. In various embodiments, the silver concentration is greater than 0.1, 1.0, 2, 4, 5, 7, 8, 9, and/or 10 mg/mL. In various embodiments, the silver concentration is between 0.1 to 1.0, 0.3 to 3.0, 0.5 to 5.0, 1.0 to 10.0, 3.0 to 30.0, 5.0 to 50.0, 10.0 to 200.0, 1.0 to 200.0, 1.0 to 500.0, or 10.0 to 500.0 mg/mL.

### **Silica Coating and Shelling**

**[0078]** In one embodiment, the concentrated silver nanoplates are encapsulated with a shell of silica. The coating may extend over all or a portion of the exterior surface of a silver nanoplate. For example, at least 5%, 10%, 15%, 20%, 25%, 50%, 75%, 80%, 90%, 95%, 99%, 99.9% or greater than 99.9% of the exterior surface of a silver nanoplate is coated with silica. The concentrated plates can be mixed with an alcohol (e.g. ethanol or isopropanol). In one embodiment an aminosilane or mercaptosilane is added to the solution to bind silane molecules to the surface of the nanoplates. The binding of silane molecules to the surface of nanoplates is specific to the surface coating on the nanoplates. Some nanoparticle coatings that stabilize the nanoplates during processing will not be compatible with the formation of a silica shell. In one embodiment, the surface of the nanoplates is coated with a molecule that has an affinity for silane molecules in solution. In one embodiment a polyvinyl based polymer such as polyvinylalcohol or polyvinylpyrrolidone is bound to the surface of the nanoplate before the addition of silane molecules. In other embodiments, a polyvinyl based polymer surface is complexed with water soluble salt present in a buffer (e.g., one or more of the sulfates, carbonates, chromates, borates, phosphates, and sulfites, acetates, and nitrates) before the addition of silane molecules. In other embodiments mercaptohexadecanoic acid, mercaptoundecanoic acid, or other thiol containing acids are bound to the surface of the nanoplates. Once there are initial silanes bound to the surface of the nanoplate, additional silane can be added to the solution in the presence of a base to form a silica shell. In one embodiment, the nanoplates coated with a silica shell can be transferred to water and concentrated using a concentration method such as tangential flow filtration. In another embodiment the silica shells are mixed with a solution of aluminum salt such as aluminum chloride, a stabilizing polymer such as polyvinylpyrrolidone, or a buffer such as bicarbonate.

**[0079]** It is an object of this invention to fabricate a solution that comprises a concentrated solution of silver nanoplates coated with a silica shell. In one embodiment, the

peak optical density of the solution as measured in a 1 cm path length cuvette is above 10, 20, 50, 100, 500, or 1000. In various embodiments, the peak optical density of the solution as measured in a 1 cm path length cuvette is between 10-100, 20-200, 30-300, 50-500, 100-1000, 200-1000, 300-1000, 500-1000, and/or 200-2000, and any combinations therein. In another embodiment the silver concentration is above 0.1 mg/mL, 1 mg/mL or above 10 mg/mL. In several embodiments the silver concentration is between 0.1 to 1.0, 0.3 to 3.0, 0.5 to 5.0, 1.0 to 10.0, 3.0 to 30.0, 5.0 to 50.0, 10.0 to 200.0, 1.0 to 200.0, 1.0 to 500.0, and/or 10.0 to 500.0 mg/mL, and any combinations therein. In one embodiment, the silica shell thickness is between 2 and 100 nm, and in another embodiment between 5 and 50 nm. In various embodiments, the silica shell thickness is between 3 and 20 nm, 5 and 20 nm, 10 and 20 nm, 10 and 50 nm, 10 and 100 nm, 1 and 10nm, 3 and 30nm, 5 and 50nm, and/or 5 and 200nm, and any combinations therein. The silica shell can be fabricated from a mixture of silanes including but not limited to aminopropyl triethoxy silane, mercaptopropyl triethoxy silane and tetraethylorthosilicate. The silica shell can contain nitrogen or sulfur atoms. The silica shell can contain amine moieties or mercapto moieties. The silica shell can contain aluminum or sodium atoms.

**[0080]** In another embodiment the solution contains a buffer, that includes a water soluble salt (e.g., one or more of the sulfates, carbonates, chromates, borates, phosphates, and sulfites, acetates, and nitrates) at a concentration greater than 0.1 mM, 1.0 mM or 10.0 mM. In various embodiments the water soluble salt concentration may be from 0.1mM to 1mM, 0.3mM to 3mM, 0.5mM to 5mM, 1mM to 10 mM, 1 mM to 30 mM, 1 mM to 50 mM, 1 mM to 1000 mM, and any combinations therein. The solution can have a peak absorption wavelength between 500 nm and 1500 nm, 500 nm to 1200 nm, 500 nm to 1000nm, 600nm to 1200nm, 700nm to 1200nm, 700nm to 1500nm, 700nm to 900nm, and/or 900 to 1100 nm, and any combinations therein.

### Storage

**[0081]** In various embodiments, the concentrated particles are stored at temperatures below -10, 0, 4, 6, 10, or 20 degrees C. In one embodiment, the particles are frozen and dried under vacuum. In one embodiment, the particles are freeze dried. In one embodiment, the particles are supercritically dried. In one embodiment, an additional

stabilant or other cryoprotectant is added to the solution before the particles are heat dried or freeze dried.

## Composites

**[0082]** In one embodiment of the invention, high optical density solutions of silver nanoplates are associated with a substrate. In various embodiments, examples of substrates include fibers, cloth, mesh, bandages, socks, wraps, other articles of clothing, sponges, high porosity substrates, particles with edge lengths greater than 1 micron, beads, hair, skin, paper, absorbent polymers, foam, wood, cork, slides, roughened surfaces, biocompatible substrates, filters, or medical implants. In various embodiments, solutions of silver nanoplates at a concentration of at least 1 mg/mL, 10 mg/mL, and/or 100 mg/mL are incubated with the substrate. In several embodiments the silver nanoplate concentration incubated with the substrate is between 0.1 to 1.0, 0.3 to 3.0, 0.5 to 5.0, 1.0 to 10.0, 3.0 to 30.0, 5.0 to 50.0, 10.0 to 20.0, 5.0 to 50.0, 3.0 to 50.0, 1.0 to 100.0 mg/mL, 10.0 to 100.0, 20.0 to 100.0, 30.0 to 100.0 mg/mL. In another embodiment, the solutions of silver nanoplates incubated with the substrate are between  $10^6$  and  $10^{13}$ ,  $10^7$  and  $10^{13}$ ,  $10^8$  and  $10^{13}$ ,  $10^9$  and  $10^{13}$ ,  $10^{10}$  and  $10^{13}$ ,  $10^{11}$  and  $10^{13}$ ,  $10^{12}$  and  $10^{13}$  or greater than  $10^{13}$  particles per milliliter. In another embodiment the silver nanoplates are prepared at an optical density of at least 10, 20, 50, 100, 300, 500, 1000 and/or 2000  $\text{cm}^{-1}$  before incubating with the substrate. In various embodiments the silver nanoplates are prepared at an optical density of between 10-100, 20-200, 30-300, 50-500, 100-1000, 200-1000, 300-1000, 500-1000, or 200-2000. In another embodiment the substrate is chemically treated to increase the binding of the nanoplates to the substrate. For example, the substrate could be functionalized with a molecule that yielded a positively or negatively charged surface. In another embodiment, the pH of the incubating solution is selected in order to optimize binding. In another embodiment, the silver nanoplates cover at least 5%, 10%, 20%, 30%, 50% or 75% of the substrate. In various embodiments, the silver nanoplates cover between 5% to 10%, 10% to 100%, 10% to 50%, 50% to 100%, 30% to 100%, 30% to 70%, 40% to 80%, 50% to 90%, 60% to 100%, 70% to 100%, 80% to 100%, 90% to 100%, 0% to 5%, 0% to 10%, 0% to 20%, 0% to 30%, or 0% to 50% of the substrate. In another embodiment, other solvents or chemicals are added to the incubation solution. In another embodiment a biological linker (e.g. antibodies, peptides, DNA) is used to bind the high optical density silver nanoplates to

the surface of the substrate. In one embodiment, the incubation is for less than 1 minute, 5 minutes, 20 minutes, 60 minutes, or 120 minutes. In various embodiments, the incubation is between 0 to 1 minute, 1 minute to 120 minutes, 5 minutes to 120 minutes, 20 minutes to 120 minutes, 60 minutes to 120 minutes, 5 minutes to 60 minutes, 10 minutes to 60 minutes, 20 minutes to 60 minutes, 0 minutes to 10 minutes, 0 minutes to 20 minutes, or 0 minutes to 5 minutes.

**[0083]** In one embodiment, the substrate is separated from the incubating solution and dried. The substrate can be dried using air drying, heat drying, freeze drying, or supercritical drying. In another embodiment the dried substrate can be further processed by soaking the substrate in another material, painting the substrate with another material, or exposing the substrate to another material that is in the vapor phase.

**[0084]** Other embodiments of the invention will be apparent to those skilled in the art from consideration of the specification and practice of the invention disclosed herein. It is intended that the specification and examples be considered as disclosing certain embodiments of the invention only, with a true scope and spirit of the invention being indicated by the following claims.

**[0085]** The subject matter described herein may be embodied in other specific forms without departing from the spirit or essential characteristics thereof. The foregoing embodiments are therefore to be considered in all respects illustrative rather than limiting. While embodiments are susceptible to various modifications, and alternative forms, specific examples thereof have been shown in the drawings and are herein described in detail. It should be understood, however, that the invention is not to be limited to the particular forms or methods disclosed, but to the contrary, the invention is to cover all modifications, equivalents, and alternatives falling within the spirit and scope of the various embodiments described and the appended claims. Any methods disclosed herein need not be performed in the order recited.

**[0086]** The methods disclosed herein include certain actions taken by a practitioner; however, they can also include any third-party instruction of those actions, either expressly or by implication. For example, actions such as “identifying a target region of skin tissue” include “instructing the identification of a target region of skin tissue.”

**[0087]** The ranges disclosed herein also encompass any and all overlap, sub-ranges, and combinations thereof. Language such as “up to,” “at least,” “greater than,” “less than,” “between,” and the like includes the number recited. Numbers preceded by a term such as “about” or “approximately” or “substantially” include the recited numbers. For example, “about 3 mm” includes “3 mm.” The terms “approximately”, “about” and/or “substantially” as used herein represent an amount or characteristic close to the stated amount or characteristic that still performs a desired function or achieves a desired result. For example, the terms “approximately”, “about”, and “substantially” may refer to an amount that is within less than 10% of, within less than 5% of, within less than 1% of, within less than 0.1% of, and within less than 0.01% of the stated amount or characteristic.

## Examples

**[0088]** The description of specific examples below are intended for purposes of illustration only and are not intended to limit the scope of the invention disclosed herein.

### Example 1: Silver Nanoplates

**[0089]** Silver nanoplates were synthesized using silver seeds prepared through the reduction of silver nitrate with sodium borohydride in the presence of sodium citrate tribasic and poly sodium styrene sulfonate under aqueous conditions. Silver seed preparation: 21.3 mL of an aqueous 2.5 mM sodium citrate tribasic solution was allowed to mix under magnetic stirring. 1 mL of a 2 g/L poly styrene sodium sulfonate (PSSS) solution was then prepared in a separate beaker. 21.3 mL of a 0.5 mM silver nitrate solution was then prepared by dissolving the salt in water. Once the above solutions have been prepared, 1.33 mL of a 0.5 mM sodium borohydride solution was prepared in 4°C water. The borohydride and PSSS solutions were then added to the beaker containing the citrate and allowed to mix. The silver nitrate solution was then pumped into the citrate solution using a peristaltic pump at a rate of 100 mL/min. This seed solution was then allowed to stir overnight at room temperature. Silver nanoplates were prepared by mixing 1530 mL Milli-Q water with 35 mL of a 10 mM ascorbic acid solution. Once the solution was sufficiently mixed, the prepared silver seed was added to the reactor. 353 mL of a 2 mM silver nitrate solution was pumped into the reactor at a rate of 100 mL/min. The reaction was mixed for two hours. TEM

analysis showed that over 70% of the particles are nanoplates. The optical density of the solution was 2.8 cm<sup>-1</sup>.

**Example 2:** Concentrated Silver Nanoplates

**[0090]** 15 L of silver nanoplates with a peak optical density of about 5 cm<sup>-1</sup> were mixed with 3.5 g of polyvinylalcohol (PVA) and sodium borate, concentrated using tangential flow filtration using a 500 kD polysulfone tangential flow membrane with 3100 cm<sup>2</sup> of surface area. The solution was concentrated for approximately 90 minutes, and the final solution volume was reduced from 15 L to 0.5 L. The silver nanoplate solution optical density was increase to about 150 cm<sup>-1</sup>. Thus, according to one embodiment, a method for increasing a silver nanoplate solution from 5 cm<sup>-1</sup> to 150 cm<sup>-1</sup> (e.g., an increase of roughly 30 times the optical density) comprises the steps of adding PVA and sodium borate to silver nanoplates, and concentrating the solution with tangential flow filtration.

**Example 3:** Concentrated Silver Nanoplates

**[0091]** In one example of concentrating silver nanoplates, 1.2 L of silver nanoplates with a peak optical density of about 4 cm<sup>-1</sup> were mixed with 4 L of anhydrous ethanol and about 49 mL of ammonium hydroxide solution. 0.6 mL of a dilute aminopropyltriethoxysilane (APTES) was added to the solution. After 15 minutes of incubation, 6.5 mL of tetraethylorthosilicate (TEOS) solution was added. After 24 hours 1 L of the solution was concentrated using a 500 kD polysulfone tangential flow membrane with 1050 cm<sup>2</sup> of surface area. The final solution volume was decreased to 150 mL, increasing the silver nanoparticle solution optical density to about 40 cm<sup>-1</sup>. Thus, according to one embodiment, a method for increasing a silver nanoplate solution from 4 cm<sup>-1</sup> to 40 cm<sup>-1</sup> (e.g., an increase of roughly 10 times the optical density) comprises the steps of adding anhydrous ethanol, ammonium hydroxide solution, aminopropyltriethoxysilane (APTES), and tetraethylorthosilicate (TEOS) to the silver nanoplates, and concentrating the solution with tangential flow filtration.

**Example 4:** Nanoplates with a Silica Shell

**[0092]** A silica shell was grown on the surface of 800 nm resonant (~75 nm edge length) polyvinylpyrrolidone (PVP) capped silver nanoplates. 400 mL of a solution of 800 nm resonant PVP capped silver nanoplates at a concentration of 2 mg/mL (20 cm<sup>-1</sup> O.D.) was added to 2.3 L of reagent grade ethanol and 190 mL Milli-Q water under constant stirring. 4.3 mL of dilute aminopropyl triethoxysilane (215 uL APTES in 4.085 mL isopropanol) was then added to the solution, followed immediately by the addition of 44 mL of 30% ammonium hydroxide. After 15 minutes of incubation, 31 mL of dilute tetraethylorthosilicate (1.55 mL TEOS in 29.45 mL isopropanol) was added to the solution. The solution was then left to stir overnight. The nanoplates were then centrifuged on an Ultra centrifuge at 17000 RCF for 15 minutes and reconstituted in Milli-Q water each time and repeated twice. The silica shell thickness was 15 nm. The optical density of the concentrated material was 2040 cm<sup>-1</sup>.

**Example 5**

**[0093]** A 40 mL solution of 40 O.D. solution of concentrated silver nanoplates stabilized with polyvinylalcohol and sodium borate was spun at 3000 RCF for 30 minutes. The supernatant was removed and the pellet was re-dispersed with bath sonication. The concentrated silver nanoplates had an optical density greater than 900 O.D. as is shown in FIG. 8.

**Example 6:** Concentrated Nanoplates on a Substrate

**[0094]** A 5 mL solution of 1000 O.D. silver nanoplates was added to a 3" x 3" section of absorbent cloth (Absorber Synthetic Drying Chamois, Clean Tools). After addition, the substrate was allowed to air dry. Once dried, the silver nanoplates were bound to the surface of the absorbent cloth and were not released when the cloth was subsequently wet and water removed by applying pressure.

## References

Aherne, D. L., D.M.; Gara, M.; Kelly, J.M., 2008: Optical Properties and Growth Aspects of Silver Nanoprisms Produced by Highly Reproducible and Rapid Synthesis at Room Temperature. *Advanced Materials*, **18**, 2005-2016.

Chen, S., and D. L. Carroll, 2003: Controlling 2-dimensional growth of silver nanoplates. *Self-Assembled Nanostructured Materials Symposium (Mater. Res. Soc. Symposium Proceedings Vol.775)*, 343-348lxiii+394.

Chen, S. H., and D. L. Carroll, 2002: Synthesis and characterization of truncated triangular silver nanoplates. *Nano Letters*, **2**, 1003-1007.

Chen, S., and D. L. Carroll, 2004: Silver nanoplates: Size control in two dimensions and formation mechanisms. *Journal of Physical Chemistry B*, **108**, 5500-5506.

Chen, S. H., Z. Y. Fan, and D. L. Carroll, 2002: Silver nanodisks: Synthesis, characterization, and self-assembly. *Journal of Physical Chemistry B*, **106**, 10777-10781.

Hao, E., G. C. Schatz, and J. T. Hupp, 2004: Synthesis and optical properties of anisotropic metal nanoparticles. *Journal of Fluorescence*, **14**, 331-341.

Hao, E. K., K.L.; Hupp, J.T.; Schatz, G.C., 2002: Synthesis of Silver Nanodisks using Polystyrene Mesospheres as Templates. *J Am Chem Soc*, **124**, 15182-15183.

He, X. Z., X.; Chen, Y.; Feng, J., 2008: The evidence for synthesis of truncated silver nanoplates in the presence of CTAB. *Materials Characterization*, **59**, 380-384.

Jin, R., Y. Cao, C. A. Mirkin, K. L. Kelly, G. C. Schatz, and J. G. Zheng, 2001: Photoinduced Conversion of Silver Nanospheres to Nanoprisms. *Science*, **294**, 1901-1903.

Jin, R., Y. C. Cao, E. Hao, G. S. Metraux, G. C. Schatz, and C. A. Mirkin, 2003: Controlling anisotropic nanoparticle growth through plasmon excitation. *Nature*, **425**, 487.

Le Guevel, X. W., F.Y.; Stranik, O.; Nooney, R.; Gubala, V.; McDonagh, C.; MacCraith, B.D., 2009: Synthesis, Stabilization, and Functionalization of Silver Nanoplates for Biosensor Applications. *J Phys Chem C*, **113**, 16380-16386.

Metraux, G. S. M., C.A; 2005: Rapid Thermal Synthesis of Silver Nanoprisms with Chemically Tailorable Thickness. *Advanced Materials*, **17**, 412-415.

Schultz, R. K.; Myers, R.R; 1969: The Chemorheology of Poly(vinyl alcohol)-Borate Gels. *Macromolecules*, **2**, 281-285.

Xiong, Y. J., A. R. Siekkinen, J. G. Wang, Y. D. Yin, M. J. Kim, and Y. N. Xia, 2007: Synthesis of silver nanoplates at high yields by slowing down the polyol reduction of silver nitrate with polyacrylamide. *Journal of Materials Chemistry*, **17**, 2600-2602.

Xue, C. M., C.A., 2007: pH-Switchable Silver Nanoprism Growth Pathways. *Angew Chem Int Ed*, **46**, 2036-2038.

**[0095]** Each of the references listed above is incorporated by reference in its entirety.

**WHAT IS CLAIMED IS:**

1. A process for increasing the optical density of a stable, silver nanoplate solution, comprising:

providing a solution comprising a plurality of silver nanoplates having a plate shape and having a peak optical density between 0.1 - 10 cm<sup>-1</sup>;

adding a stabilizing agent to the solution;

adding a buffer to the solution; and

concentrating the buffer-containing solution to form a concentrated solution, wherein the concentrated solution comprises a plurality of silver nanoplates having the plate shape, and wherein the concentrated solution has a peak optical density greater than 10 cm<sup>-1</sup>.

2. The process of Claim 1, wherein the stabilizing agent comprises at least one of the group consisting of polyvinyl pyrrolidone, polyvinyl alcohol, polyethylene glycol, and dextran.

3. The process of Claim 1, wherein the stabilizing agent comprises at least one of the group consisting of polysulphonates, ethylene oxides, phenols, and carbohydrates.

4. The process of any one of Claims 1-3, wherein the silver nanoplates have an aspect ratio of between 1.5 and 50.

5. The process of any one of Claims 1-3, wherein the silver nanoplates comprise an edge length between 10 nm and 300 nm.

6. The process of any one of Claims 1-3, wherein the stabilizing agent comprises sodium citrate.

7. The process of any one of Claims 1-3, wherein the buffer comprises borate.

8. The process of any one of Claims 1-3, wherein the buffer comprises sodium borate.

9. The process of any one of Claims 1-3, wherein the stabilizing agent comprises a thiol-containing molecule.

10. The process of Claim 9, wherein the thiol-containing molecule comprises a dihydrolipoic acid or a derivative thereof.

11. The process of any one of Claims 1-3, further comprising the steps of:

isolating the concentrated nanoplates; and

encapsulating the isolated concentrated nanoplates with silica.

12. The process of Claim 11, further comprising the step of concentrating the encapsulated nanoplates to an optical density greater than  $10\text{ cm}^{-1}$ .

13. The process of any one of Claims 1-3, wherein the stabilizing agent is added prior to the formation of the silver nanoplates.

14. The process of any one of Claims 1-3, wherein the nanoplates are concentrated by tangential flow filtration.

15. The process of Claim 14, wherein the silver concentration is greater than 1.0 mg/mL.

16. A process for generating metal oxide coated silver nanoplates, comprising:  
providing a solution of silver nanoplates having a peak absorption spectrum between 500 and 1500 nm and an optical density greater than  $10\text{ cm}^{-1}$ ; and  
contacting the solution with a metal oxide in an amount sufficient to form a metal oxide coating on an exterior surface of the silver nanoplates.

17. The process of Claim 16, wherein the silver nanoplates are associated with a stabilizing polymer.

18. The process of Claim 17, wherein the stabilizing polymer comprises polyvinyl pyrrolidone or polyvinyl alcohol.

19. The process of Claim 16, wherein the metal oxide comprises silica.

20. A process for generating a solution of silver nanoplates comprising the steps of:  
forming a plurality of silver seeds from a solution, wherein the solution comprises a reducing agent, a first stabilizing agent, a polymer, and a silver salt;

growing the plurality of silver seeds into a plurality of silver nanoplates in the solution;

adding a second stabilizing agent and a buffer to the solution comprising the plurality of silver nanoplates,

wherein the second stabilizing agent comprises at least one of the group consisting of polyvinyl pyrrolidone, polyvinyl alcohol, polyethylene glycol, polyacrylic acid, and dextran ; and

concentrating the solution of silver nanoplates until the peak optical density of the solution is greater than about  $10\text{ cm}^{-1}$ .

21. A composition comprising:
  - a solution of silver nanoplates,  
wherein the silver nanoplates comprises a stabilizing agent and a buffer,  
wherein the stabilizing agent is a poly vinyl polymer,  
wherein the optical density of the solution is greater than 100 cm<sup>-1</sup>.
22. The composition of Claim 21, wherein the poly vinyl polymer is selected from the group consisting of polyvinyl pyrrolidone and polyvinyl alcohol.
23. The composition of Claim 21, wherein the buffer comprises borate.
24. The composition of Claim 23, wherein the poly vinyl polymer is associated with the borate.
25. The composition of any one of Claims 21-24, wherein the stabilizing agent and the buffer coat at least a portion of the silver nanoplates.
26. The composition of any one of Claims 21-24, wherein the stabilizing agent and the buffer are disposed on an exterior surface of the silver nanoplates.
27. The composition of any one of Claims 21-24, wherein the solution comprises silver nanoplates in a concentration effective to adhere to a non-metal coating material present in the solution.
28. The composition of any one of Claims 21-24 wherein the solution is formulated to be concentrated by tangential flow filtration.
29. The composition of any one of Claims 21-24 wherein the optical density of the solution is greater than 500 cm<sup>-1</sup>.
30. The composition of any one of Claims 21-24 wherein the optical density of the silver nanoplates is greater than 500 cm<sup>-1</sup>.
31. The composition of any one of Claims 21-24, wherein the solution contains borate at a concentration greater than 0.1 mM.
32. The composition in any one of Claims 21-24, wherein the solution has a pH greater than 7.
33. The composition of any one of Claims 21-24, wherein an absorption spectrum of the silver nanoplates comprises a peak wavelength of between 500 and 1500 nm.
34. The composition of any one of Claims 21-24, wherein the solution further comprises bicarbonate.

35. The composition of any one of Claims 21-24, wherein the silver nanoplates are silica-coated.

36. The composition of any one of Claims 21-24, wherein the silver nanoplates have edge lengths between 10 nm and 500 nm.

37. A composition comprising a solution of silver nanoplates bonded to a shell material comprising poly vinyl polymer and a metal-oxide, wherein the optical density of the solution is greater than  $10\text{ cm}^{-1}$ .

38. The composition of Claim 37, wherein the silver nanoplates are substantially coated with the poly vinyl polymer.

39. The composition of Claim 37, wherein the silver nanoplates are substantially coated with the metal oxide.

40. The composition of any one of Claims 37-39, wherein the metal oxide comprises silica.

41. The composition of any one of Claims 37-39, wherein the poly vinyl polymer comprises polyvinyl alcohol or polyvinylpyrrolidone.

42. The composition of any one of Claims 37-39, wherein the silver nanoplates are bonded to polyvinyl alcohol and silica.

43. The composition of any one of Claims 37-39, wherein the silver nanoplates are bonded to polyvinylpyrrolidone and silica.

44. The composition of any one of Claims 37-39, further comprising a moiety selected from an amine moiety and a mercapto moiety.

45. The composition of Claim 44, wherein the moiety is bound to the silica.

46. The composition of any one of Claims 37-39, further comprising aluminum.

47. The composition of Claim 46, wherein the aluminum is bound to silica.

48. The composition of any one of Claims 37-39, wherein the optical density of the solution is greater than  $100\text{ cm}^{-1}$ .

49. The composition of any one of Claims 37-39, wherein the optical density of the silver nanoplates is greater than  $100\text{ cm}^{-1}$ .

50. The composition of any one of Claims 37-39, wherein the solution comprises borate at a concentration greater than 0.1 mM.

51. The composition of any one of Claims 37-39, wherein the pH is greater than 7.

52. The composition of any one of Claims 37-39, wherein the silver nanoplates comprise a peak wavelength of between 500 and 1500 nm.

53. A composition comprising silver nanoplates at least partially coated by a shell material comprising a poly vinyl polymer, wherein the mean thickness of the shell material is between 1 nm and 50 nm.

54. The composition of Claim 53 wherein the silver nanoplates have at least one edge length of between 10 nm and 500 nm.

55. A kit comprising:

one or more containers comprising nanoplates with an optical density greater than  $10\text{ cm}^{-1}$ ;

a solution suitable for coating nanoplates with a shell of metal oxide; and  
instructions for use thereof.

56. The kit of Claim 55 where the nanoplates comprise a poly vinyl polymer.

57. The kit of Claim 55, wherein the nanoplates comprise borate.

58. A solution comprising silver nanoplates at least partially coated by a silica coating, wherein the silver nanoplates comprise a peak optical density of greater than  $10\text{ cm}^{-1}$ .

59. The solution of Claim 58, wherein the silica coating has a shell thickness between 2 and 100 nm.

60. The solution of Claim 58, wherein the solution comprises borate at a concentration greater than 0.1 mM.

61. The solution of Claim 58, wherein the solution has a pH greater than 7.

62. The solution of any one of Claims 58-61, wherein the silver nanoplates have a peak absorption spectrum comprising a peak wavelength between 500 nm and 1500 nm.

63. The solution of any one of Claims 58-61, wherein the silica coating is disposed on an exterior surface of the silver nanoplates.

64. The solution of any one of Claims 58-61, wherein the coating comprises an amine moiety or a mercapto moiety.

65. The solution of Claim 58, wherein the coating further comprises aluminum.

66. The solution of Claims 58, wherein the coating further comprising bicarbonate.

67. The solution of Claim 58, wherein the coating further comprising polyvinylpyrrolidone.

68. The solution of Claim 58, wherein the silver nanoplates comprise a thickness less than 50 nm.

69. The solution of Claim 55, wherein the silver nanoplates comprise at least one edge length between 10 nm and 500 nm.

70. A process for generating a solution of silver nanoplates with extremely high optical density comprising the steps of:

adding a concentration stabilizing chemical agent to a solution of silver nanoplates or precursor reagents; and  
increasing the concentration of silver nanoplates to increase the optical density of the solution.

71. A process as claimed in Claim 70 wherein the silver nanoplates have an aspect ratio of between 1.5 and 25.

72. A process as claimed in Claim 70 wherein the nanoplate has an edge length between about 10 nm and 250 nm.

73. A process as claimed in Claims 70 wherein the nanoplate is triangular in cross section.

74. A process as claimed in Claims 70 wherein the nanoplate is circular in cross section.

75. A process as claimed in Claims 70 wherein the perimeter of the nanoplate cross section has between 4 and 8 edges.

76. A process as claimed in Claims 70 to 75 wherein the solution of silver nanoplates is formed using a photoconversion method.

77. A process as claimed in Claims 70 to 75 wherein the solution of silver nanoplates is formed using a pH-controlled photoconversion method.

78. A process as claimed in Claims 70 to 75 wherein the solution of silver nanoplates is formed using a thermal growth method.

79. A process as claimed in Claims 70 to 75 wherein the solution of silver nanoplates is formed using a seed mediated growth method.

80. A process as claimed in Claims 70 to 75 wherein the solution of silver nanoplates is formed from a solution comprising a shape stabilizing agent or agents and a silver source.

81. A process as claimed in Claims 70 to 75 wherein chemical or biological agents are used to reduce the silver source.

82. A process as claimed in Claims 70 to 75 wherein electromagnetic radiation is used to reduce the silver source.

83. A process as claimed in Claims 70 to 75 wherein heat is used to reduce the silver source.

84. A process as claimed in Claims 70 to 75 wherein a combination of chemical agents, biological agents, electromagnetic radiation, and heat is used to reduce the silver source.

85. A process as claimed in Claims 70 to 75 wherein the solution of silver nanoplates is formed from some combination of a reducing agent, a shape stabilizing agent, a light source, a heat source, and a silver source.

86. A process as claimed in Claims 70 to 75 wherein an acid, base, or buffering agent is added to change the solution pH.

87. A process as claimed in Claims 70 to 75 wherein the concentration stabilizing chemical agent is added prior to the formation of the silver nanoplates.

88. A process as claimed in Claims 70 to 75 wherein the concentration stabilizing chemical agent is added during the formation of the silver nanoplates.

89. A process as claimed in Claims 70 to 75 wherein the concentration stabilizing chemical agent is added after the formation of the silver nanoplates.

90. A process as claimed in Claims 70 to 75 wherein the concentration stabilizing chemical agent acts as a shape stabilizing agent.

91. A process as claimed in Claims 70 to 75 wherein the concentration stabilizing chemical agent acts as a reducing agent.

92. A process as claimed in Claims 70 to 75 wherein the concentration stabilizing chemical agent acts as an agent to change the solution pH.

93. A process as claimed in Claims 70 to 75 wherein the concentration stabilizing chemical agent is a water soluble polymer.

94. A process as claimed in Claim 93 wherein the polymer is a derivative of polysulfonate.

95. A process as claimed in Claim 93 wherein the polymer is sodium polystyrene sulfonate.

96. A process as claimed in Claim 93 wherein the polymer is a derivative of a vinyl polymer.

97. A process as claimed in Claim 93 wherein the polymer is polyvinyl alcohol (PVA).

98. A process as claimed in Claim 97 wherein the PVA has a molecular weight of less than about 80,000 Dalton.

99. A process as claimed in Claim 97 wherein the PVA has a molecular weight between about 80,000 Dalton and 120,000 Dalton.

100. A process as claimed in Claim 97 wherein the PVA has a molecular weight of more than about 120,000 Dalton.

101. A process as claimed in Claim 93 wherein the polymer is polyvinylpyrrolidone (PVP).

102. A process as claimed in Claim 101 wherein the PVP has a molecular weight of less than about 20,000 Dalton.

103. A process as claimed in Claim 101 wherein the PVP has a molecular weight of more than about 20,000 Dalton.

104. A process as claimed in Claim 101 wherein the PVP has a molecular weight between about 20,000 Dalton and 60,000 Dalton.

105. A process as claimed in Claim 101 wherein the PVP has a molecular weight of more than about 60,000 Dalton.

106. A process as claimed in Claims 93 wherein the polymer is an ethylene oxide derivative.

107. A process as claimed in Claim 93 wherein the polymer is a polyethylene glycol (PEG).

108. A process as claimed in Claim 107 wherein the PEG has a molecular weight of less than about 5,000 Dalton.

109. A process as claimed in Claim 107 wherein the PEG has a molecular weight between about 5,000 Dalton and 10,000 Dalton.

110. A process as claimed in Claim 107 wherein the PEG has a molecular weight of more than about 10,000 Dalton.

111. A process as claimed in Claim 107 wherein the PEG contains a single functional group.

112. A process as claimed in Claim 107 wherein the PEG contains two functional groups.

113. A process as claimed in Claims 111 to 112 wherein the functional group or groups consist of an amine, thiol, acrylate, alkyne, maleimide, silane, azide, hydroxyl, lipid, disulfide, fluorescent molecule, and/or biotin.

114. A process as claimed in Claims 70 to 92 wherein the concentration stabilizing agent is a carbohydrate derivative.

115. A process as claimed in Claim 93 wherein the polymer is a monosaccharide.

116. A process as claimed in Claim 93 wherein the polymer is a disaccharide .

117. A process as claimed in Claim 93 wherein the polymer is an oligosaccharide.

118. A process as claimed in Claim 93 wherein the polymer is a polysaccharide.

119. A process as claimed in Claim 93 wherein the polymer is dextran.

120. A process as claimed in Claim 119 wherein the dextran has a molecular weight is less than about 2000 Dalton.

121. A process as claimed in Claim 119 wherein the dextran has a molecular weight between about 2000 Dalton and 5000 Dalton.

122. A process as claimed in Claim 119 wherein the dextran has a molecular weight of more than about 5000 Dalton.

123. A process as claimed in Claims 70 to 92 wherein the concentration stabilizing chemical agent is a phenol.

124. A process as claimed in Claim 123 wherein the concentration stabilizing chemical agent is a monomeric phenol.

125. A process as claimed in Claim 123 wherein the concentration stabilizing chemical agent is a dimeric phenol.

126. A process as claimed in Claim 123 wherein the concentration stabilizing chemical agent is a trimeric phenol.

127. A process as claimed in Claim 123 wherein the concentration stabilizing chemical agent is a polyphenol.

128. A process as claimed in Claim 127 wherein the concentration stabilizing chemical agent is a tannic acid.

129. A process as claimed in Claims 70 to 92 wherein the concentration stabilizing chemical agent is gum Arabic.

130. A process as claimed in Claims 70 to 92 wherein the concentration stabilizing chemical agent is a biological molecule.

131. A process as claimed in Claim 130 wherein the concentration stabilizing chemical agent is a protein.

132. A process as claimed in Claim 131 wherein the concentration stabilizing chemical agent is bovine serum albumin.

133. A process as claimed in Claim 131 wherein the concentration stabilizing chemical agent is streptavidin.

134. A process as claimed in Claim 131 wherein the concentration stabilizing chemical agent is biotin.

135. A process as claimed in Claim 130 wherein the concentration stabilizing chemical agent is a peptide.

136. A process as claimed in Claim 130 wherein the concentration stabilizing chemical agent is an oligonucleotide.

137. A process as claimed in Claim 136 wherein the concentration stabilizing chemical agent is a naturally occurring oligonucleotide.

138. A process as claimed in Claim 136 wherein the concentration stabilizing chemical agent is a synthetic oligonucleotide.

139. A process as claimed in Claims 70 to 92 wherein the concentration stabilizing chemical agent is a metal or metalloid oxide.

140. A process as claimed in Claim 139 wherein the stabilizing chemical agent is a silicon dioxide shell.

141. A process as claimed in Claim 140 wherein the silicon dioxide shell ranges in thickness from about less than 1 nm to about 100 nm.

142. A process as claimed in Claim 139 wherein the stabilizing chemical agent is a titanium dioxide shell.

143. A process as claimed in Claim 142 wherein the silicon dioxide shell ranges in thickness from about less than 1 nm to about 100 nm.

144. A process as claimed in Claims 70 to 143 wherein a combination of stabilizing agents are used.

145. A process as claimed in Claim 70 wherein the solvent is water.

146. A process as claimed in Claim 70 wherein the solvent is an alcohol.

147. A process as claimed in Claim 146 wherein the solvent is ethanol.

148. A process as claimed in Claim 146 wherein the solvent is isopropyl alcohol.

149. A process as claimed in Claim 146 wherein the solvent is t-butanol.

150. A process as claimed in Claim 70 wherein the solvent is a mixture of a water and an alcohol.

151. A process as claimed in Claim 70 wherein the concentration of silver nanoplates is increased using tangential flow filtration.

152. A process as claimed in Claim 151 wherein the tangential flow filtration is performed using a tangential flow filter membrane.

153. A process as claimed in Claim 152 wherein the tangential flow membrane is made from a cellulose ester or mix of cellulose esters.

154. A process as claimed in Claim 152 wherein the tangential flow membrane is made from polyetheresulfone.

155. A process as claimed in Claim 152 wherein the tangential flow membrane is made from polysulfone.

156. A process as claimed in Claims 151 to 155 wherein the tangential flow membrane has a molecular weight cut off of less than about 10 kD.

157. A process as claimed in Claims 151 to 155 wherein the tangential flow membrane has a molecular weight cut off of between about 10 kD and 500 kD.

158. A process as claimed in Claims 151 to 155 wherein the tangential flow membrane has a molecular weight cut off of more than about 500 kD.

159. A process as claimed in Claims 151 to 155 wherein the tangential flow membrane has a molecular weight cut off of less than about 0.05  $\mu\text{m}$ .

160. A process as claimed in Claims 151 to 155 wherein the tangential flow membrane has a molecular weight cut off of between about 0.05  $\mu\text{m}$  and 0.5  $\mu\text{m}$ .

161. A process as claimed in Claims 151 to 155 wherein the tangential flow membrane has a molecular weight cut off of more than about 0.5  $\mu\text{m}$ .

162. A process as claimed in Claims 151 to 161 wherein the silver nanoplate solution is concentrated to produce a solution with an optical density of greater than about 10  $\text{cm}^{-1}$ .

163. A process as claimed in Claims 151 to 162 wherein the silver nanoplate solution is concentrated to produce a solution with an optical density of greater than about 50  $\text{cm}^{-1}$ .

164. A process as claimed in Claims 151 to 163 wherein the silver nanoplate solution is concentrated to produce a solution with an optical density of greater than about 75  $\text{cm}^{-1}$ .

165. A process as claimed in Claims 151 to 164 wherein the silver nanoplate solution is concentrated to produce a solution with an optical density of greater than about 100  $\text{cm}^{-1}$ .

166. A process as claimed in Claims 151 to 165 wherein the silver nanoplate solution is concentrated to produce a solution with an optical density of greater than about 500  $\text{cm}^{-1}$ .

167. A process as claimed in Claim 70 wherein the solvent of the concentrated solution is exchanged using tangential flow filtration.

168. A process as claimed in Claim 70 wherein the concentrated solution is processed to remove residual chemicals using tangential flow filtration.

169. A solution of nanoparticles comprising silver nanoparticles coated with a polymer with an optical density greater than 100  $\text{cm}^{-1}$ .

170. A process as claimed in Claim 70 where the solution of silver nanoplates is incubated with a substrate.

171. A process as claimed in Claim 170 where the substrate is removed from the solution of silver nanoplates and dried.

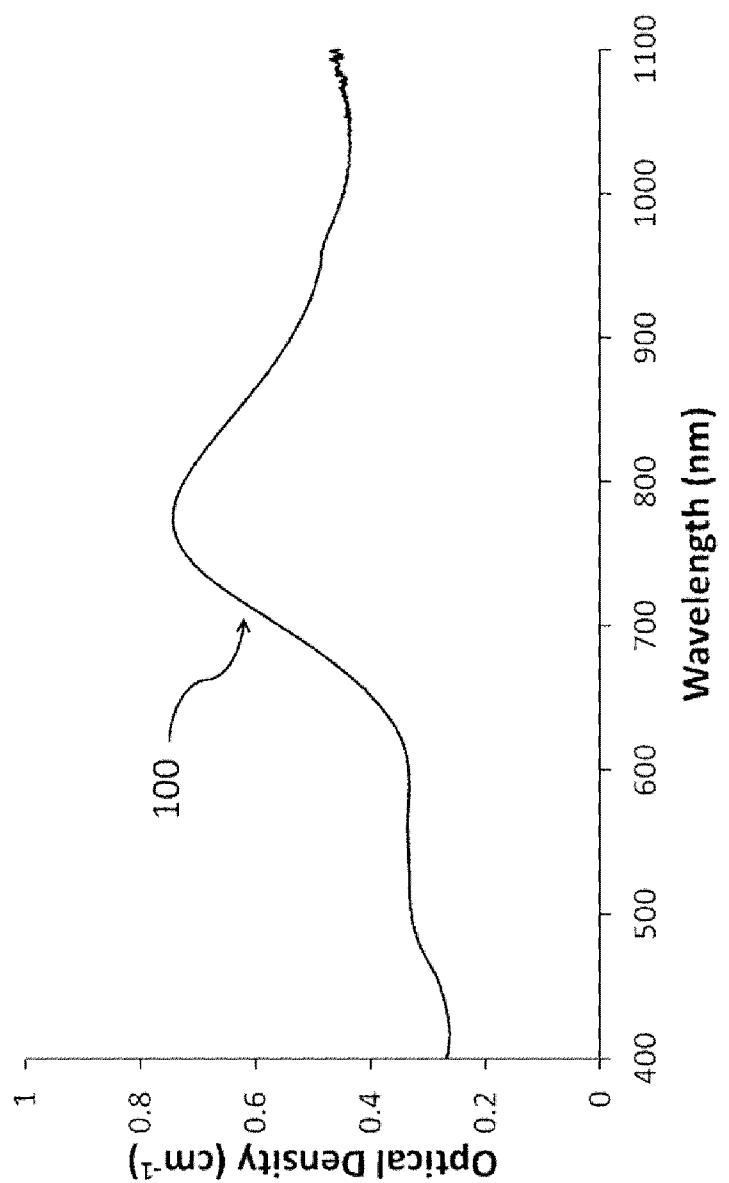


Figure 1

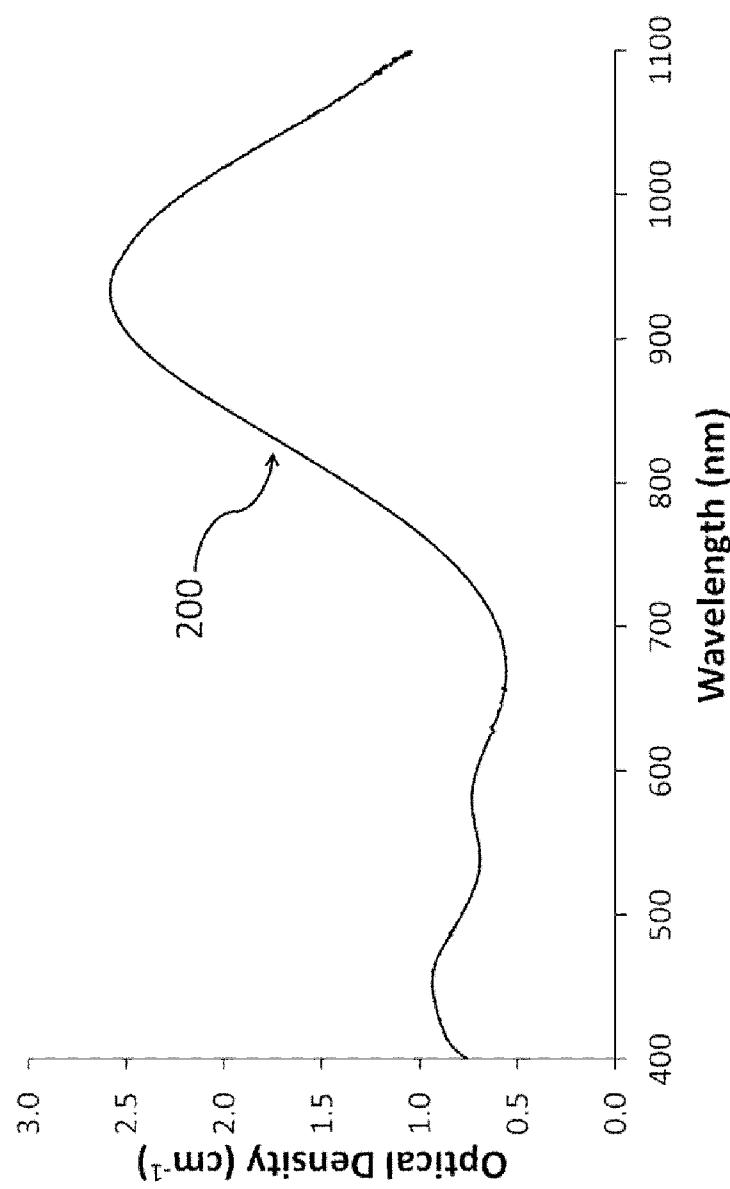


Figure 2

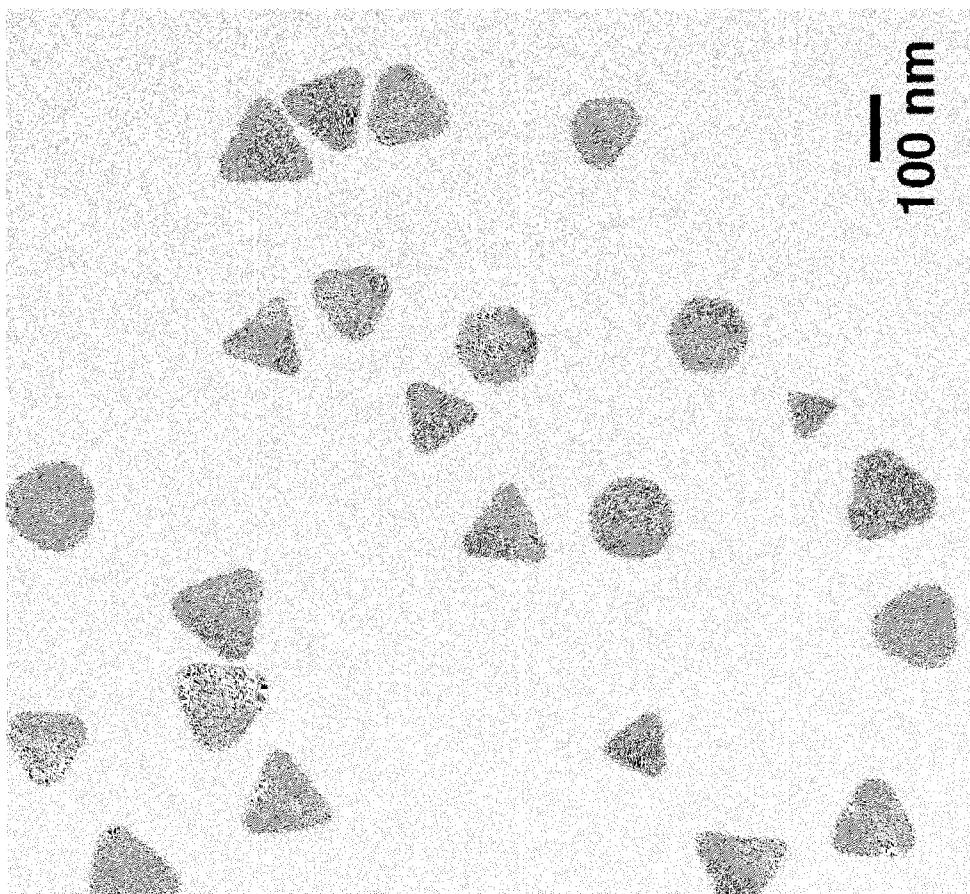


Figure 3B

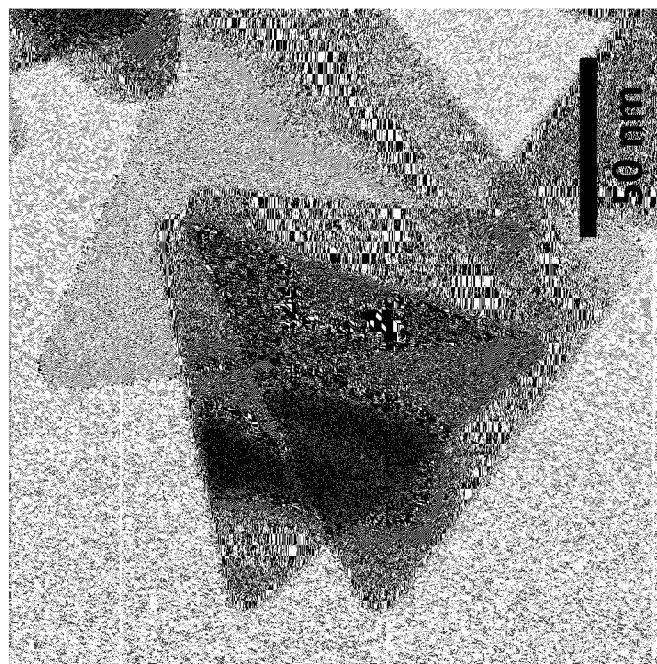


Figure 3A

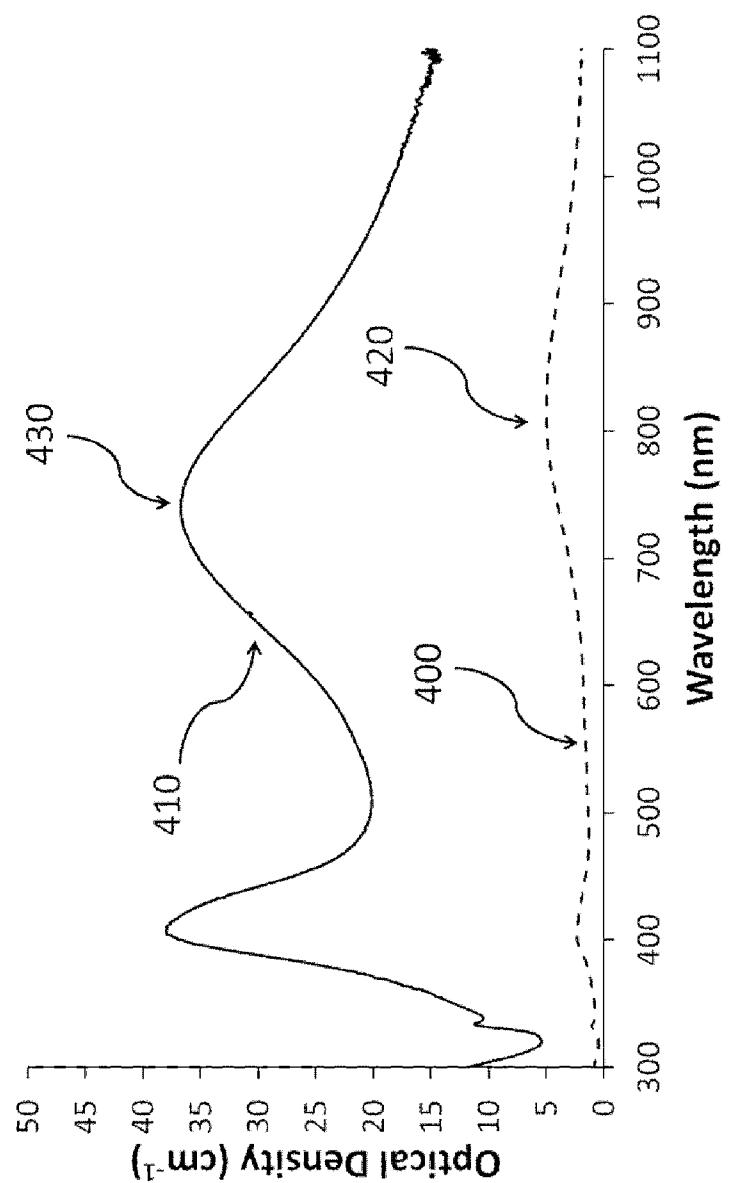


Figure 4

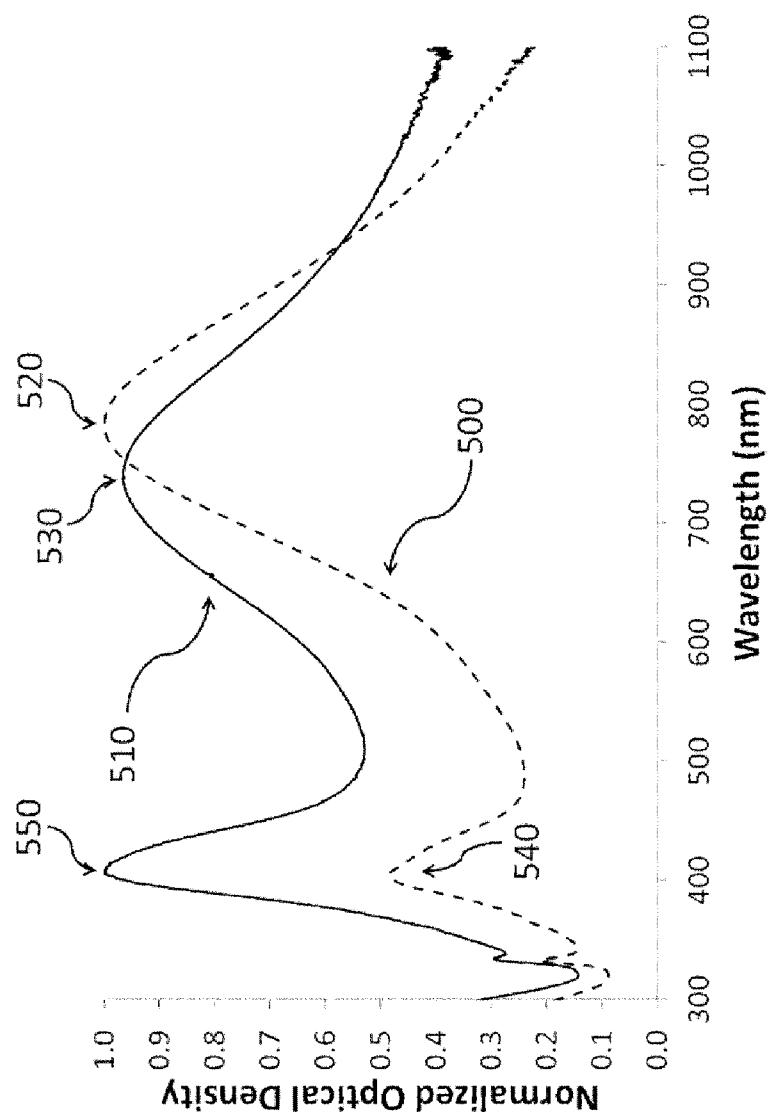


Figure 5

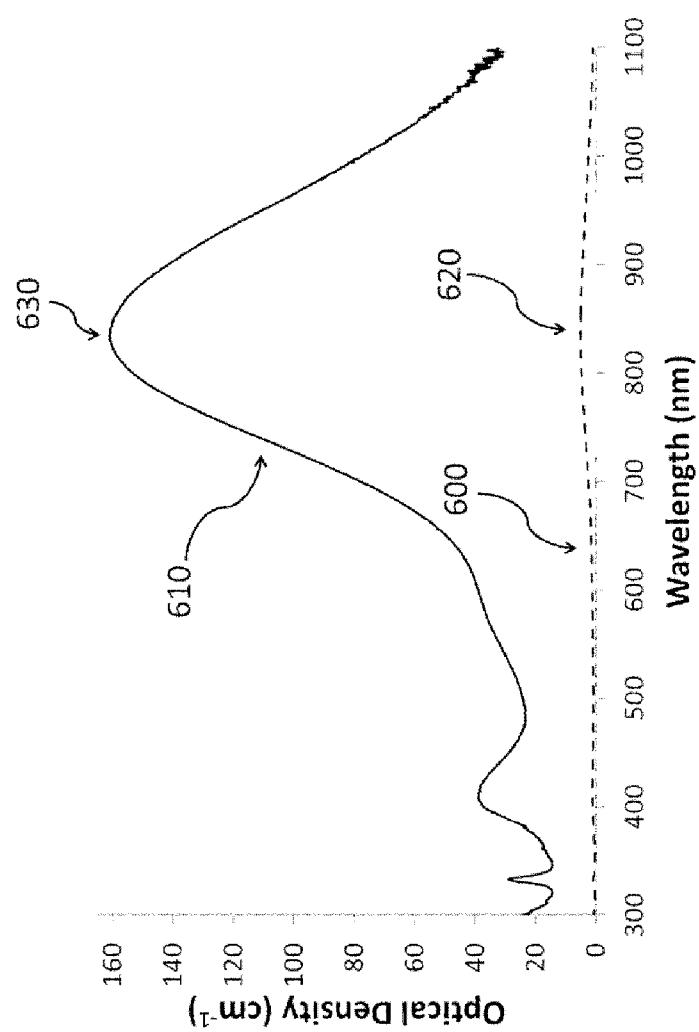


Figure 6

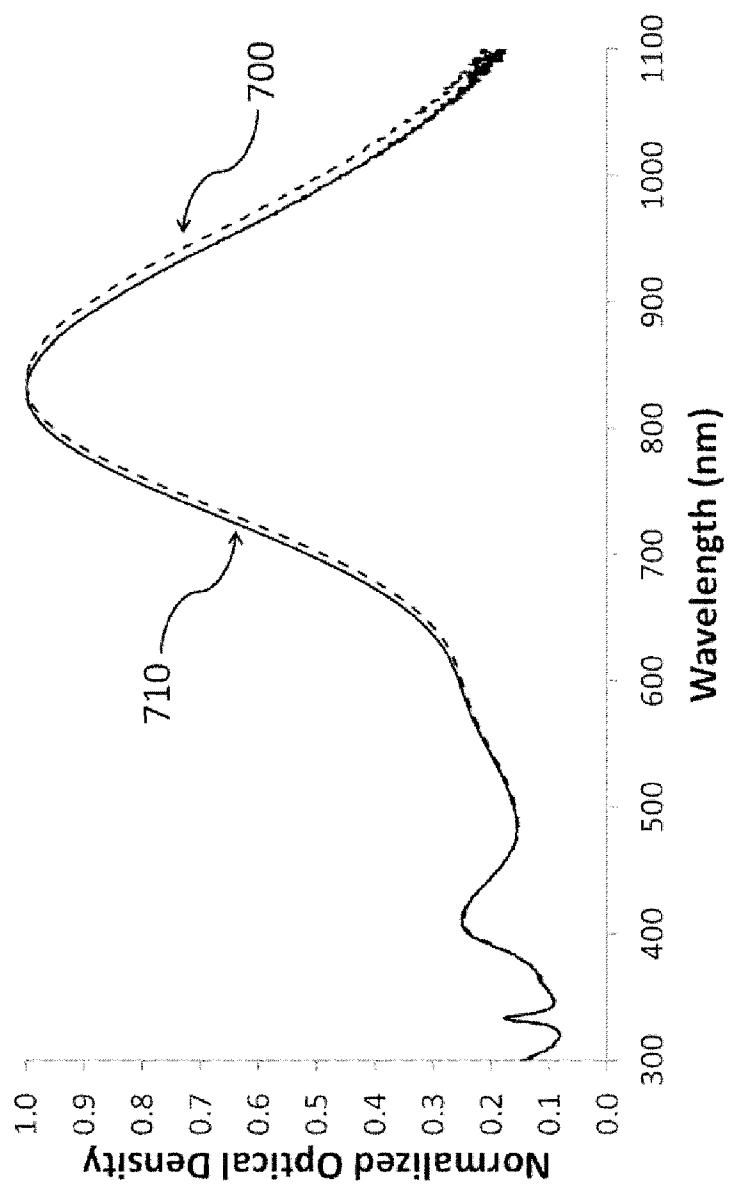


Figure 7

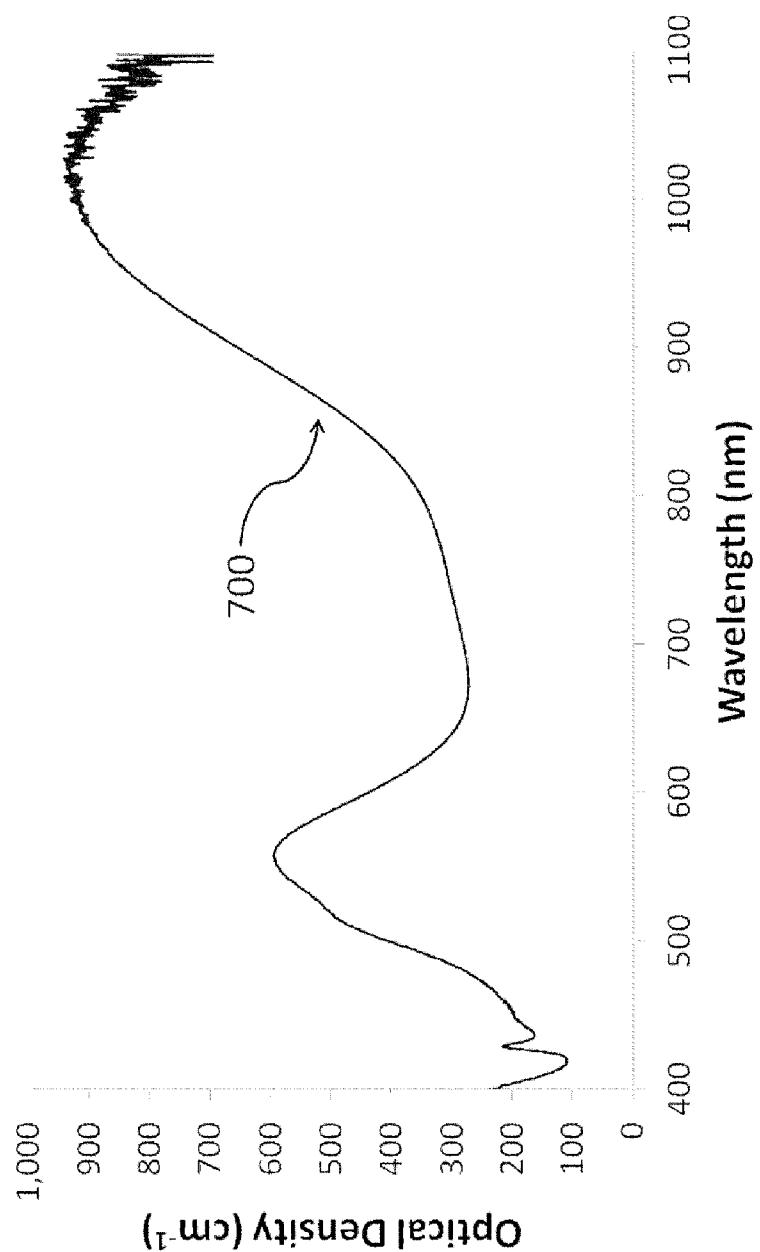


Figure 8

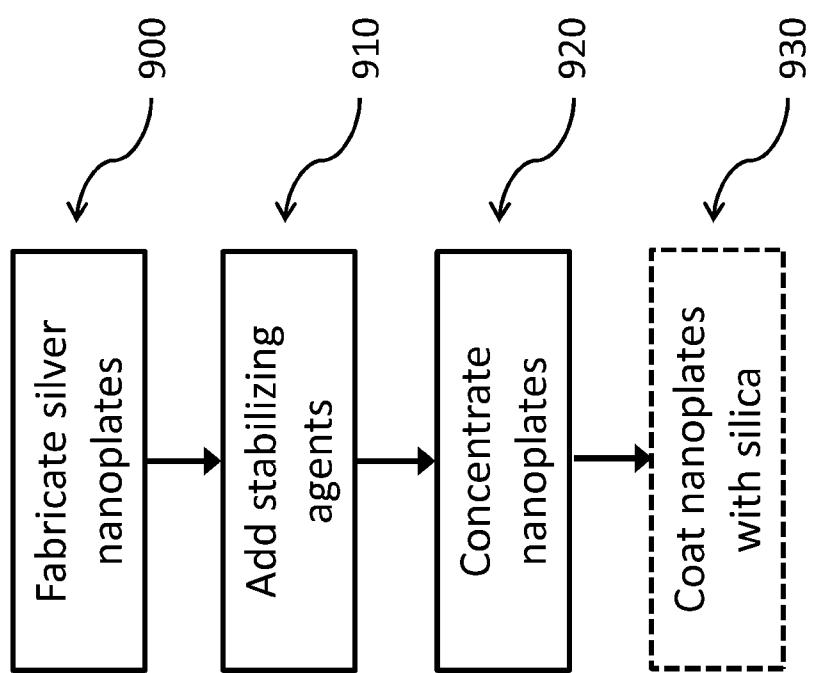


Figure 9

## INTERNATIONAL SEARCH REPORT

International application No.

PCT/US 13/63920

## A. CLASSIFICATION OF SUBJECT MATTER

IPC(8) - A61M 37/00 (2014.01)

USPC - 604/20

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

USPC -- 604/20

IPC(8) - A61M 37/00 (2014.01)

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched  
USPC -- 424/400; 424/490; 424/600; 424/617; 604/20 (Keyword delimited)Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
Patbase, Google Scholar/Patents; Search Terms Used: nanoparticle plate silver aspect ratio concentrate buffer stabilizer optical density tangential flow cross filtration sodium borate cellulose ester polyethersulfone polysulfone remove dry dihydroliptic acid bicarbonate seed ion reducing agent substrate

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 2012/0059307 A1 (HARRIS et al.) 08 March 2012 (08.03.2012), para [0011], [0012], [0013], [0015], [0045], [0046], [0047], [0051], [0052], [0068], [0070], [0113], [0114], [0115], [0120], [0122], [0139]; claims 7, 10 and 20	1-5, 7, 8, 70-72, 75, 145-150
---		-----
Y		6, 9-15, 20-36, 73, 74, 151-155, 167, 168, 170, 171
Y	WO 2011/116963 A2 (VILADOT et al.) 29 September 2011 (29.09.2011), pg 9, ln 11-14; pg 10, ln 33-35; pg 30, ln 22-36	6, 10
Y	US 2011/0159291 A1 (SUN et al.) 30 June 2011 (30.06.2011), para [0041]	9, 21-36
Y	US 2007/0158611 A1 (OLDENBURG) 12 July 2007 (12.07.2007), para [0042], [0082], [0084], [0087], [0088], [0112]-[0115]	11, 12, 14, 15, 28, 73, 74, 151-155, 167, 168
Y	WO 2004/086044 A1 (BRENNAN et al.) 07 October 2004 (07.10.2004), pg 5, ln 7-8; pg 15, ln 4-6; pg 31, ln 22 to pg 32, ln 4	13, 20
Y	WO 2010/073260 A1 (KULKARNI et al.) 01 July 2010 (01.07.2010), -- pg 1, para 1; pg 7, para 4; page 15, para 2; claims 4 and 8	170, 171
Y	WO 2011/031871 A1 (NICK et al.) 17 March 2011 (17.03.2011), pg 16, para 4; abstract	23-26
Y	US 2012/0141380 A1 (MARGEL et al.) 07 June 2012 (07.07.2012), para [0083]; abstract	27
Y	WO 1996/020698 A2 (LEVY et al.) 11 July 1996 (11.07.1996), pg 71, ln 9-17; pg 73, ln 9-15	31, 34

Further documents are listed in the continuation of Box C.

* Special categories of cited documents:	
"A" document defining the general state of the art which is not considered to be of particular relevance	"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
"E" earlier application or patent but published on or after the international filing date	"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
"O" document referring to an oral disclosure, use, exhibition or other means	"&" document member of the same patent family

Date of the actual completion of the international search	Date of mailing of the international search report
31 January 2014 (31.01.2014)	21 FEB 2014
Name and mailing address of the ISA/US Mail Stop PCT, Attn: ISA/US, Commissioner for Patents P.O. Box 1450, Alexandria, Virginia 22313-1450 Facsimile No. 571-273-3201	Authorized officer: Lee W. Young PCT Helpdesk: 571-272-4300 PCT OSP: 571-272-7774

**INTERNATIONAL SEARCH REPORT**

International application No.

PCT/US 13/63920

**C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	US 2011/0240556 A1 (HOEK et al.) 06 October 2011 (06.10.2011), para [0070], [0079]	152-155

**INTERNATIONAL SEARCH REPORT**

International application No.

PCT/US 13/63920

**Box No. II Observations where certain claims were found unsearchable (Continuation of item 2 of first sheet)**

This international search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:

1.  Claims Nos.: because they relate to subject matter not required to be searched by this Authority, namely:
  
2.  Claims Nos.: because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
  
3.  Claims Nos.: 76-144 and 156-166 because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).

**Box No. III Observations where unity of invention is lacking (Continuation of item 3 of first sheet)**

This International Searching Authority found multiple inventions in this international application, as follows:

This application contains the following inventions or groups of inventions which are not so linked as to form a single general inventive concept under PCT Rule 13.1. In order for all inventions to be examined, the appropriate additional examination fees must be paid.

- Group I: Claims 1-15, 20-36, 70-75, 145-155, 167, 168, 170, 171 drawn to a process for increasing the optical density of a stable, silver nanoplate solution, comprising: providing a solution comprising a plurality of silver nanoplates having a plate shape and having a peak optical density between 0.1 - 10 cm<sup>-1</sup>; adding a stabilizing agent to the solution; adding a buffer to the solution; and concentrating the buffer-containing solution to form a concentrated solution, wherein the concentrated solution comprises a plurality of silver nanoplates having the plate shape, and wherein the concentrated solution has a peak optical density greater than 10 cm<sup>-1</sup>
- Group II: Claim 16-19, 37-69, 169 drawn to a process for generating metal oxide coated or polymer coated silver nanoplates, comprising: providing a solution of silver nanoplates having a peak absorption spectrum between 500 and 1500 nm and an optical density greater than 10 cm<sup>-1</sup>; and contacting the solution with a metal oxide in an amount sufficient to form a metal oxide coating on an exterior surface of the silver nanoplates.

- see extra sheet

1.  As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2.  As all searchable claims could be searched without effort justifying additional fees, this Authority did not invite payment of additional fees.
3.  As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
  
4.  No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.: 1-15, 20-36, 70-75, 145-155, 167, 168, 170, 171

**Remark on Protest**

- The additional search fees were accompanied by the applicant's protest and, where applicable, the payment of a protest fee.
- The additional search fees were accompanied by the applicant's protest but the applicable protest fee was not paid within the time limit specified in the invitation.
- No protest accompanied the payment of additional search fees.

**INTERNATIONAL SEARCH REPORT**

International application No.

PCT/US 13/63920

**Continuation of Box No. III -- Observations where unity of invention is lacking**

The inventions listed as Groups I-II do not relate to a single general inventive concept under PCT Rule 13.1 because, under PCT Rule 13.2, they lack the same or corresponding special technical features for the following reasons:

**Special Technical Features:**

Group I includes the special technical feature of, a process for increasing the optical density of a stable, silver nanoplate solution having a peak optical density between 0.1 - 10 cm-1; adding a first and second stabilizing agents to the solution; adding a buffer to the solution; and concentrating the buffer-containing solution to form a concentrated solution; not required by Group II.

Group II includes the special technical feature of coating on an exterior surface of the silver nanoplates, not required by Group I.

**Common Technical Features:**

The only technical features shared by Groups I and II that would otherwise unify the groups, are a solution comprising silver nanoplates, the solution having a peak optical density greater than 10 cm-1 and a polyvinyl polymer.

However, these shared technical feature do not represent a contribution over prior art, because the shared technical features are disclosed by US 2012/0059307 A1 to Harris et al. (hereinafter Harris). Harris discloses a solution (para [0046], [0122], a solution of plasmonic nanoparticles) comprising silver nanoplates (para [0011]; claim 5, 6, plasmonic nanoparticles comprising silver nanoplates), the solution having a peak optical density greater than 10 cm-1 (para [0072], [0115], [0122], it is noted that optical density, as used in the art, is a unit-less value and typically designated O.D. or O.D.<sub>sub.10mm</sub>, indicating the use of a 10mm (i.e. 1cm) sample thickness; therefore, an optical density of 10 cm-1, as claimed, is interpreted as 10 O.D., using the standard 10mm/1cm sample thickness), and a polyvinyl polymer (para [0053]-Table, Matrix entry).

As the technical features were known in the art at the time of the invention, they cannot be considered special technical features that would otherwise unify the groups.

Therefore, Groups I-II lack unity under PCT Rule 13 because they do not share a same or corresponding special technical feature.

**Note:** Claims 76-144 and 156-166 are determined to be unsearchable because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a) and are, therefore, not included in any claim group. Specifically, the claims indicated are not phrased in the alternative.