




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : G06F 17/24, 17/21, 17/60	A1	(11) International Publication Number: WO 99/19813 (43) International Publication Date: 22 April 1999 (22.04.99)
(21) International Application Number: PCT/IL98/00403 (22) International Filing Date: 24 August 1998 (24.08.98) (30) Priority Data: 121990 15 October 1997 (15.10.97) IL 124579 21 May 1998 (21.05.98) IL (71) Applicant (for all designated States except US): MULTITEXT LTD. [IL/IL]; Ben-Yehuda Street 142, 63402 Tel Aviv (IL). (72) Inventor; and (75) Inventor/Applicant (for US only): SOBOL, Idan [IL/IL]; Ben-Yehuda Street 142, 63402 Tel Aviv (IL). (74) Agent: REINHOLD COHN AND PARTNERS; P.O. Box 4060, 61040 Tel Aviv (IL).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: DEVICE FOR THE GENERATION AND USE OF MULTI-LAYERED TEXT**(57) Abstract**

The invention provides for a method for producing a multi-layer text that includes providing a text, selecting a text segment, assigning a value of a text dimension to the text segment and repeating the above steps as many times as desired.

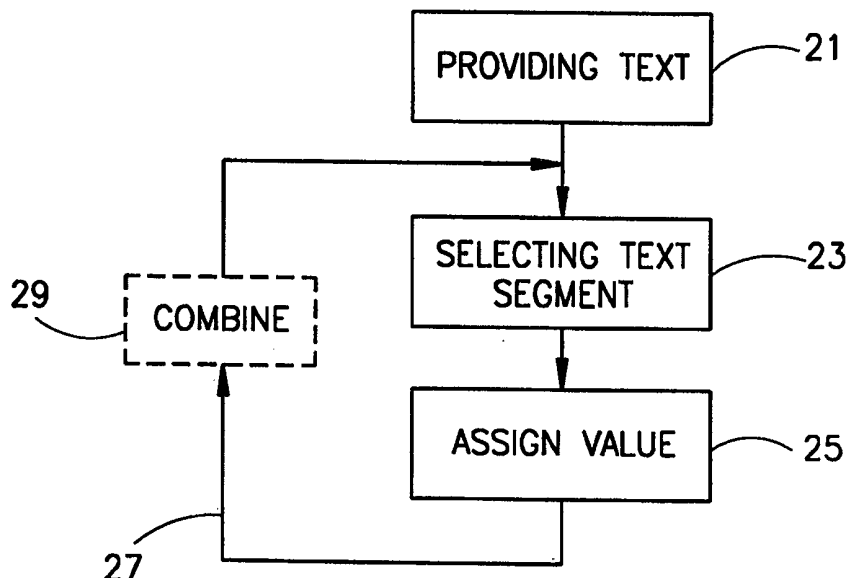

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

Device for the Generation and Use of Multi-layered Text

FIELD OF THE INVENTION

The present invention is in the general field of text manipulation.

BACKGROUND OF THE INVENTION

5 Texts displayed for reading by means of currently available techniques are "flat" texts. In other words, any alteration in the text involves deleting a letter, word, sentence or paragraph and replacing them with a different letter, word, sentence or paragraph, or adding text and integrating it into the basic text. As a result, the display or printing of the
10 result constitutes effectively, a new text. The displayed or printed result does not preserve or reflect the change and development of the basic text.

In many applications, it is desired to reflect information expressed in several dimensions, e.g. the text that is relevant to specific date or period. Typical example being the law text. The Law undergoes revisions from
15 time to time, and an advocate involved in a lawsuit that refers to events that had occurred at a given period in the past should, preferably, have a convenient means for reviewing the language of the law and regulations that were relevant to the specific dates under consideration. The advocate is not interested in later revisions. In other words, the user or advocate

would like to have a convenient means for displaying a given “layer” of the text which is of interest.

As will be explained in greater detail below, whilst the example above illustrated selection of layer of interest according to time dimension, (i.e. displaying a layer of text which is valid for a given time), other dimensions may be of interest either separately or in combination, e.g. displaying in parliament records, only the text layer that relates to a given spokesperson.

There is, accordingly, a need in the art for providing a convenient means for introducing and displaying layers(s) of text according to selected dimension or dimensions.

GLOSSARY:

There follows a glossary of terms that are used in the specification, some of which are conventional and others have been coined.

1. 15 **Dimension** – A variable applied to a text segment, which includes information on one related level. The dimensions are not limited in definition, quantity or number of assigned values per text segment. An unlimited number of dimensions and values can be defined, meaning that the dimension will serve a great number of terms. The dimensions do not have to be defined for every text segment. A text segment that has no defined dimension will be a non-dimensional text segment.

There follows typical, yet not exclusive, types of dimensions:

- A. Dimension of time – the variable that defines the validity in time of a given text segment.
- B.25 Dimension of place – the variable that defines the place where the text was created, occurred, is relevant to, etc.

- C. Spokesperson dimension – the variable that defines the text of a given spokesperson.
- D. Reference Dimension: a variable that defines the source of text that serves
5 as reference to the text segment under question. Thus, for example, when a given text segment in a patent document originates from a given scientific publication (e.g. a publication from the *IEEE* gazette), the reference dimension that is applied to the text segment in the patent is assigned with the value of the specified scientific publication.

10 Those versed in the art will readily appreciate that the dimension is by no means bound by the latter examples and, in fact, dimension may refer to any desired domain of subject. Thus, by way of non-limiting example, in a play script, a dimension may refer to passages with, say, tragic (first value) or comic (second value) connotations.

15 As will be explained in greater detail below, different dimensions may refer to the same text segment.

It should be noted that the dimension and value thereof do not necessarily form an integral part of the text. Thus, for example, the text
20 segment, "*inner-city fare is 200 shekels*", may be assigned with the value, "*Tel Aviv*" of the place dimension, without that value being part of the text segment.

A text segment may vary from the smallest unit (i.e. word), to any defined text portion (e.g. sentence, a few words, paragraph, etc). It should
25 be noted that a text segment is not confined to any particular linguistic syntax structure.

2. **Dimension Value** – A quantitative value in the definition range that a dimension receives for a text segment, or in other words, the value of a given text.
3. **Range of Values** – The range of values that a dimension may receive. This is of particular relevance to text retrieved.
4. **Status of the dimension value** – The status of the given value is either valid or invalid. Put differently, for various types of dimensions, there need not necessarily be a valid value.
5. **Text segment** – The text portion to which a dimension variable is assigned.
16. **Text** – Information that is saved in a given format, and is constructed of text segments.
7. **Word** – A chain of characters separated by dividers on both sides (valid dividers, punctuation marks or a space).
8. **Type of value continuity** – Defines the behavior of values in the dimension. The permitted types of continuity are as follows:
 - **First type:** There may and must only be one valid value that is assigned to a given dimension. The beginning time (say date) of the unit of a new value will cause the former value to close on the specified date minus 1. Time dimension is an example of a first type, seeing that applying an opening date to a segment necessarily entails that the previous text segment expired one day before. Of course, the time dimension is not bound to date and may refer to a different time unit say second, minute, decade etc.
 - **Second type:** There are various dimensions that may have either valid or invalid values.
- 25 Practically speaking, there are various functions that may be applied when editing a text so as to constitute a multi-layer text, including :

- ♦ **Insert** –A function used to insert a text segment into a certain place in the text. This requires to assign dimensions and values to the newly inserted text segment.
 - ♦ **End** – End actually corresponds to “deletion” of text. The text is not
5 actually deleted, but rather the dimension thereof is rendered invalid.
 - ♦ **Author Correction** – Enables to correct text (e.g. editorial errors) without affecting the dimension. In other words, the same value of a given dimension applies to the text before and after Author corrections were effected.
- 10 Those versed in the art will readily appreciate that the specified functions may be modified and/or others may be added, all as required an appropriate.

SUMMARY OF THE INVENTION:

- 15 As specified before, according to prior art, text is displayed in a “flat” (i.e. single layer) form, and reflects the last update. According to the invention, text layering is accomplished by assigning the value of a desired dimension to a selected text segment. As defined above, “dimension” stands for e.g. time, spokesman etc. Thus, by way of example, a given text
20 segment, say a passage in the law, is valid from January 1, 1983 and expires on December 31, 1992. In this example, the text dimension is the time dimension, and the period January 1, 1983 to December 31, 1992 stands for the value range of said time dimension.

Accordingly, the invention provides for a method of producing a
25 multi-level text, comprising

- (a) providing a text;
- (b) selecting a text segment;

- (c) assigning value or value range of a text dimension to said text segment;
- (d) repeating steps (b) and (c) as many times as desired.

The present invention further provides for a system that includes
5 display unit for producing multi-layer text, comprising:

- (i) selector for selecting a text segment in said text;
- (ii) assignor for assigning a value of a dimension to said text segment; and
- (iii) memory for storing the multi-layer text

As specified above, text dimension is selected from the group that
10 includes e.g. time, place, spokesperson and reference dimension. Other dimensions may be used, all as required and appropriate.

If desired, after generating the multi-layer text, it may be displayed preferably (although not necessarily), in a manner where each different value of a given text dimension is displayed in unique manner, e.g. in a
15 different color.

Having produced a multi-layer text, the invention provides multitude manners of retrieving and displaying it.

Accordingly, there is provided for use with a multi-layer text of the kind specified, a method for displaying a text of interest, comprising:

- 20 (a) providing at least one input value or input value range of at least one dimension; and
- (b) retrieving and displaying text segments having assigned thereto, a value that meets said input value, or input value range.

BRIEF DESCRIPTION OF THE DRAWINGS:

For a better understanding, the invention will now be described, by way of example only, with reference to the accompanying drawings, in
5 which:

Fig. 1 illustrates a generalized block diagram of a system according to the invention;

Fig. 2 illustrates a flow chart of a generalized sequence of operation for producing a multi-layer text according to one embodiment of the invention;
10 and

Fig. 3 illustrates a flow chart of a generalized sequence of operation for retrieving and displaying text of interest in a multi-level text of the invention.

DETAILED DESCRIPTION OF A PREFERRED EMBODIMENT

15 Attention is first directed to Fig. 1, illustrating a generalized block diagram of a system according to the invention. As shown, the system (1) includes a processor (2) coupled to memory (4) and to display (6). The processor, memory and display may be any of commercially available devices, e.g. a conventional P.C. running Intel® based processor, and
20 running Windows® based operating system. This is, of course, an example, and any architecture which provides one or more processor coupled to at least one display device and to at least one memory, is suitable for the invention. The processor is loaded from the memory with suitable program and an input text for producing a multi-layer text according to the invention.

The generalized sequence of operation for producing the multi-layer text of the invention is illustrated in the flow chart of Fig. 2., which basically includes the following sequence:

- (a) providing a text **(21)**;
- 5 (b) selecting a text segment **(23)**;
- (c) assigning value of a text dimension to said text segment **(25)**;
- (d) repeating steps (b) and (c) as many times as desired **(27,29)**.

There follows an example (Table I) which illustrates the resulting
10 multi-layer text.

No.	Text Segment	Dimen. Time	Values	Dimen Place	Values
1	Inner-city bus fare is		Begin-01.01.75 End -~		Tel- Aviv
					London
2	Two lira		Begin-01.01.75 End-31.12.79		Tel Aviv
3	Half pound		Begin-01.01.75 End - 31.12.80		London
4	One hundred		Begin-01.01.80 End-31.12.83		Tel-Aviv
5	Two		Begin-01.01.81 End-31.12.89		London

6	Half shequel		Begin-01.01.84 End-31.12.84		Tel-Aviv
7	One hundred and fifty		Begin-01.01.85 End-31.12.86		Tel-Aviv
8	1.5 new		Begin-01.01.87 End-31.12.89		Tel-Aviv
9.	Three		Begin-01.01.90 End--		Tel Aviv
					London

TABLE I

As shown in the specified example, only two dimension types are utilized, i.e. time dimension and place dimension.

Time Dimensions	Dimension Place	Resulting Text
Begin-01.01.75 End-31.12.79	Tel Aviv	Inner city bus fare is two lira
Begin-01.01.75 End – 31.12.80	London	Inner city bus fare is half pound
Begin-01.01.80 End-31.12.83	Tel-Aviv	Inner city bus fare is one hundred lira
Begin-01.01.81 End-31.12.89	London	Inner city bus fare is two pounds
Begin-01.01.84	Tel-Aviv	Inner city bus fare is half a shequel

End-31.12.84		
Begin-01.01.85 End-31.12.86	Tel-Aviv	Inner city bus fare is one hundred and fifty shequels
Begin-01.01.87 End-31.12.89	Tel-Aviv	Inner city bus fare is 1.5 New Shequels
Begin-01.01.90 End--	Tel-Aviv	Inner city bus fare is three New Shequels
Begin 01.01.81 End --	London	Inner city bus fare is three pounds

TABLE II

Attention is now directed to Fig. 3 illustrating a flow chart of a generalized sequence of operation for retrieving (31) and displaying (33) text of interest in a multi-layer text of the invention. As shown, the multi-layer text of the kind specified enables to retrieve and display a text of interest by, generally, following the steps:

(a) providing at least one input value, or input value range, of at least one dimension; and

(b) retrieving and displaying text segments having assigned thereto, each, value or value range that meets said input value, or input value range.

Considering, the example of Table II above, an illustrative query could be "*How much does an inner-city bus ride cost on the date (03 10 1981) in a certain city*"?

The relevant input values are, of course, *03 10 1981* (time dimension) and *Tel-Aviv* or *London* (place dimension). What remains to be done is to retrieve the text segment that corresponds to the specified input

values i.e. *three pound* in London (since *03 10 1981* falls in the range of *01 01 1981 -*) and *one hundred lira* in *Tel-Aviv* (since *03 10 1981* falls in the range of *01 01 1980 - 31 12 1983*).

As clearly shown in Table II, a text segment need not necessarily be
 5 assigned one value. Thus, in Fig. 2, the same text segment is associated with two values belonging to time and place dimensions, respectively.

There follows an example which will assist in clarifying the so called
 "second type" of continuity:

10 Thus, if there is dimension that shouldn't have value all the time, and it can have more than one value at given time period, like employment for example (one is not always employed), then each validity period of any value should contain start and termination of validity, for example:

The next sentence is part of text that has the employment dimension;
 15 the values are as follows:

Text	validity begins	Validity terminates
I am	01/01/1990	~
not	21/12/1995	24/02/1996
employed	01/01/1990	~
by	01/01/1990	20/12/1995
	25/02/1996	~
Firm A	01/01/1990	20/12/1995
Firm B	25/02/1996	20/03/1998
&	20/01/1998	20/03/1998
Firm C	20/01/1998	~

Now if one looks how the text is present at different periods, one can see that:

1. The text will appear as of 01/01/1990: **I am employed by firm A.**
3. The text will appear as of 01/01/1996: **I am not employed.**
3. The text will appear as of 01/01/1990: **I am employed by firm A & firm B.**

The behavior of the employment dimension values is as follows:

10

Value	01/90	02/90	12/95	01/96	02/96	03/96	12/97	01/98	02/98	03/98	04/98
Firm A	++++ +	++++ +	+++								
Firm B					+	++++ +	++++ +	++++ +	++++ +	+++	
Firm C								+	++++ +	++++ +	++++ +

As clearly shown, there is no value in the period of 21/12/1995 until 25/02/1996, and there is multi-value in the period between 20/10/1998 until 20/03/1998.

- 15 With this example, the idea that dimension need not necessarily have valid value at all times is demonstrated.

Those versed in the art will readily appreciate that there are multitude manners of displaying text of interest, and three out of many possible variants are discussed below.

1. Define a requested value (value range) dimension of a text segment.
If, for example, a dimension of time in an updated law text is sought, the law in force at any requested date X will be displayed. The retrieval program, based on the input values, will automatically choose all text segments that correspond to the criterion of: expiration _date = X, and only the requested segment(s) will be displayed.
2. Display text changes according to different values of the same dimension. If all changes made in a selected passage of text during the period Y are of interest, the display program will automatically select all segments concerning the chosen text and display them e.g. as a set of windows, a separate window for each segment. It is, thus, possible to see the modification of the information along the selected dimension (in this case, the dimension of time). When the dimension is time, it is possible to view the modifications in a synchronized display and examine the changes made on a specific date throughout the text. Alternatively, it is possible to select a diachronic display and see all the alterations made to a certain segment of the text within a given range of dates. Other variants are, of course, applicable.
3. A complete visual display. In this case, the text will be marked with a different color for each period of validity. For example: a word valid from January 1, 1990, will be printed in color A (the color assigned to the date January 1, 1990). A word valid from January 1, 1991 will be printed in color B (the color assigned to the date January 1, 1991). If a word colored in A expires on January 1, 1991, it will be marked with an overstrike in color B (the color chosen for the date January 1, 1991). By following this technique, the reader will be able to determine the date on which each word became valid, and the date on which it ceased to be valid. By viewing the text which is not marked with an overstrike, the reader will be able to read the full text as at the date of the last update.

As previously mentioned, no hitherto known technique is capable of conferring additional layering information to a text (e.g. in a simple text file format), utilizing basically, although not necessarily, standard word processing functions.

5 The invention enables the recording of text and the provision of text dimensions with various values. According to these values, it is possible to define text derivatives, and dynamically display them according to user demand.

 According to the invention, it is possible to review various layers
10 and dimensions that reside in the text.

 The invention is by no means bound by any specific implementation for accomplishing text layers and retrieving information from the multi-layer text. Thus, by way of example, if two adjacent text segments have the same value, the system may automatically form the two segments
15 into one segment having a common value. By way of another example, the invention is not bound by any given user-interface that serves for establishing multi-layer text or for accomplishing text retrieval.

 One, non limiting, example of realizing a time dimension is given below, (where date values reside between the /* ... */ signs, and wherein B
20 stands for starting date and E stands for ending date:

 /*B01.07.1976-E01.01.9999*/ small business entity – “business entity
 which does not employ more than two employees and its turnover in all
25 business does not exceed
 350,000 /*B01.07.1976-E01.08.1979*/ LIRA’S
 200,000 /B01.08.1979-E01.04.1983*/

/*B01.04.1983-E01.01.1987*/800,000/*B01.08.1979-E01.01.1987*/
 SHEKEL /*B01.01.1987-E01.08.1988*/50,000
 /*B01.08.1988-E01.04.1989*/60,000 /*B01.04.1989-E01.01.1990*/70,000
 /*B01.01.1990-E01.01.1991*/85,000
 5 /*B01.01.1991-E01.10.1991*/100,000
 /*B01.10.1991-E01.01.1993*/120,000
 /*B01.01.1993-E01.01.1994*/130,000
 /*B01.01.1994-E01.01.1995*/150,000
 /*B01.01.1995-E01.01.1996*/170,000
 10 /*B01.01.1996-E01.01.9999*/185,000 /*B01.01.1987-E01.01.9999*/NEW
 SHEKEL/*B01.07.1976-E01.01.9999*/,

The specified example is parsed to the following information (presented as
 15 a table)

The relevant text	Effective to	Effective from
small business entity – “business entity which does not employ more than two employees and its turnover in all business does not exceed	1.1.9999	1.7.1976
350,000	1.8.1979	1.7.1976
LIRA'S	1.8.1979	1.7.1976
200,000	1.4.1983	1.8.1979
800,000	1.1.1987	1.4.1983
SHEKEL	1.1.1987	1.8.1979
50,000	1.8.1988	1.1.1987
60,000	1.4.1989	1.8.1988
70,000	1.1.1990	1.4.1989
85,000	1.1.1991	1.1.1990
100,000	1.10.1991	1.1.1991
120,000	1.1.1993	1.10.1991
130,000	1.1.1994	1.1.1993

150,000	1.1.1995	1.1.1994
170,000	1.1.1996	1.1.1995
185,000	1.1.9999	1.1.1996
NEW SHEKEL	1.1.9999	1.1.1987

The updated text for 1.1.1998, reads as follows:

small business entity – “business entity which does not employ more than
5 two employees and its turnover in all business does not exceed 185,000
new shekels

It should be noted that order of steps recited in the claims is provided
for convenience of explanation only and should by no means be regarded as
binding.

10 The present invention has been described with a certain degree of
particularity but it should be understood that various modifications and
alterations may be made without departing from the scope or spirit of the
invention as defined by the following claims:

CLAIMS:

1. A method for producing a multi-layer text, comprising
 - (a) providing a text;
 - (b) selecting a text segment;
 - 5 (c) assigning value of a text dimension to said text segment;
 - (d) repeating steps (b) and (c) as many times as desired.
2. The method of Claim 1, wherein said text dimension is selected from the group that includes time, place, spokesperson and reference.
3. The method according to Claim 1, further comprising the step of
 - 10 displaying said multi-layer text, such that different values of a text dimension are displayed in unique manner.
4. The method according to Claim 3 wherein each one of said values is displayed in a different color.
5. The method according to Claim 1, wherein said values are assigned
 - 15 to said text segment using at least one of the following functions: INSERT, END, AUTHOR CORRECTION.
6. For use with a multi-layer text, the multi-level text having text segments assigned with values of text dimensions; a method for displaying a text of interest, comprising:
 - 20 (a) providing at least one input value, or input value range, of at least one dimension; and
 - (b) retrieving and displaying text segments having assigned thereto, value that meets said input value, or input value range.
7. The method of Claim 6, wherein said text dimension is selected from
 - 25 the group that includes time, place, spokesperson and reference.

8. The method of Claim 6, wherein said retrieval includes displaying a requested value, or value range of a dimension of a text segment.
9. The method of Claim 6, wherein said retrieval includes displaying text changes according different values of the same dimension.
- 5 10. The method of Claim 6, wherein said retrieval includes a complete visual display.
11. A system that includes display unit for producing multi-layer text, comprising:
- (i) selector for selecting a text segment in said text;
 - 10 (ii) assignor for assigning a value of a dimension to said text segment; and
 - (iii) memory for storing the multi-layer text
12. The system of Claim 11, wherein said text dimension is selected from the group that includes time, place, spokesperson, reference.
- 15 13. The system of Claim 11, wherein said display device is capable of displaying said multi-layer text, such that different values of a text dimension are displayed in a unique manner.
14. The system according to Claim 13, wherein each one of said values is displayed in a different color.
- 20 15. The system of Claim 11, wherein said values are assigned to said text segment using at least one of the following functions: INSERT, END, AUTHOR CORRECTION.
16. For use with a multi-layer text having text segments assigned with values of text dimensions, a system for displaying a text of interest,
- 25 comprising:

- i. receiver for receiving at least one input value or input value range of at least one dimension; and
- ii. retriever for retrieving and displaying text segments having assigned thereto, value that meets said input value, or input value range.

17. The system of Claim 16, wherein said text dimension is selected from the group that includes time, place, spokesperson and reference.

18. The system of Claim 16, wherein said retrieval includes displaying a requested value, or value range of a dimension of a text segment.

19. The system of Claim 16, wherein said retrieval includes displaying text changes according different values of the same dimension.

20. The system of Claim 16, wherein said retrieval includes a complete visual display.

21. A memory medium containing a file that includes a multi-layer text generated according to the method of Claim 1.

1/1

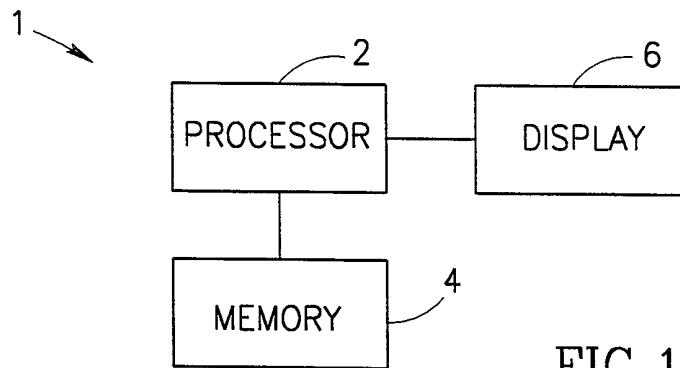


FIG. 1

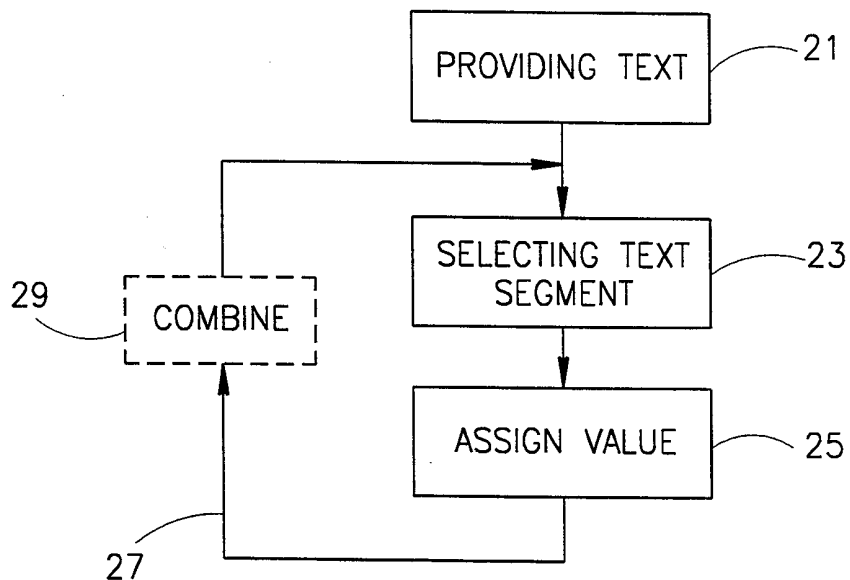


FIG. 2

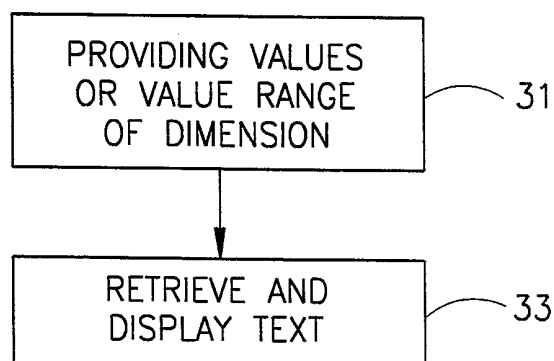


FIG. 3

INTERNATIONAL SEARCH REPORT

International Application No

PCT/IL 98/00403

A. CLASSIFICATION OF SUBJECT MATTER

IPC 6 G06F17/24 G06F17/21 G06F17/60

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 G06F

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	EP 0 230 616 A (IBM) 5 August 1987 see abstract; claims 1-10 see page 4, line 9 - page 5, line 19; figures 1-3 ---	1-21
X	EP 0 483 039 A (IBM) 29 April 1992 see abstract; claims 1,7 see column 4, line 36 - column 12, line 24 ---	1-21
A	US 5 357 631 A (HOWELL WILLIAM E ET AL) 18 October 1994 see abstract; claims 1-3 -----	1,6,11, 16

☐ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

15 December 1998

Date of mailing of the international search report

23/12/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Suendermann, R

INTERNATIONAL SEARCH REPORT

information on patent family members

International Application No

PCT/IL 98/00403

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0230616 A	05-08-1987	CA 1267236 A JP 62173532 A	27-03-1990 30-07-1987
EP 0483039 A	29-04-1992	US 5317729 A JP 4289920 A	31-05-1994 14-10-1992
US 5357631 A	18-10-1994	AT 129580 T CN 1073277 A,B CZ 9401299 A DE 69205690 D DE 69205690 T WO 9312498 A EP 0616713 A ES 2078756 T HU 67493 A JP 1979502 C JP 5233628 A JP 6103484 B KR 9612667 B PL 171126 B SK 63394 A	15-11-1995 16-06-1993 11-06-1997 30-11-1995 30-05-1996 24-06-1993 28-09-1994 16-12-1995 28-04-1995 17-10-1995 10-09-1993 14-12-1994 23-09-1996 28-03-1997 05-10-1994