

(51) International Patent Classification:
A24B 15/28 (2006.01)(21) International Application Number:
PCT/EP2011/001501(22) International Filing Date:
25 March 2011 (25.03.2011)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
12/748, 259 26 March 2010 (26.03.2010) US(71) Applicant (for all designated States except US): **PHILIP MORRIS PRODUCTS S.A.** [CH/CH]; Quai Jeanrenaud 3, CH-2000 Neuchâtel (CH).(72) Inventors: **KARLES, Georgios D.**; 4025 Huntstead Way, Richmond, Virginia 23233 (US). **ZHUANG, Shuzhong**; 9504 Meadowview Road, Richmond, Virginia 23294 (US). **ZENG, Yi**; 6901 Marlowe Road Apt. 717, Richmond, Virginia 23225 (US).(74) Agent: **MILLBURN, Julie Elizabeth**; Reddie & Grose, 16 Theobalds Road, London WC1X 8PL (GB).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,


AO, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PE, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

- with international search report (Art. 21(3))
- before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: CONTROL RELEASE MENTHOLATED TOBACCO BEADS

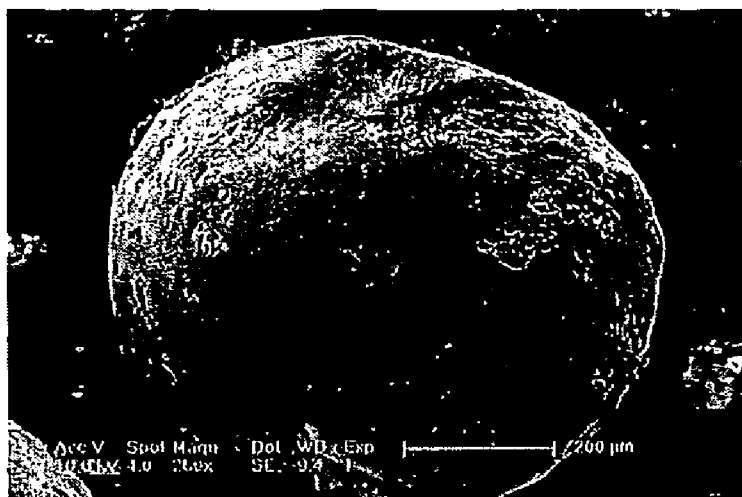**FIG. 1A.**

(57) Abstract: Encapsulated tobacco beads and processes of making the encapsulated tobacco beads are disclosed. According to an embodiment, a process of making encapsulated tobacco beads comprises mixing tobacco particles and menthol in an aqueous solution to form a wet mass; extruding the wet mass to form extrudates; spheronizing the extrudates to form tobacco beads; drying the tobacco beads; contacting the beads with a solution comprising a cation; and introducing the contacted tobacco beads into a solution of coating material in a concentration effective to induce ionic gelation of the coating material around the beads, to form encapsulated tobacco beads having gel coatings. According to another embodiment, an encapsulated tobacco bead comprises a core comprising tobacco particles and encapsulated menthol, an inner coating layer comprising hydroxypropyl methylcellulose or pectin, and an outer coating layer comprising an ionically-crosslinked gel.

CONTROLLED RELEASE MENTHOLATED TOBACCO BEADS

BACKGROUND

Encapsulated tobacco beads having improved storage stability with controlled release of
5 flavorants are disclosed.

SUMMARY

According to an embodiment, an encapsulated tobacco bead comprises a core
comprising tobacco particles and menthol and an outer coating layer comprising an ionically-
10 crosslinked gel. Preferably, encapsulated tobacco bead further comprises, an inner coating
layer comprising hydroxypropyl methylcellulose or pectin. Preferably, the core comprises
encapsulated menthol.

According to another embodiment, a process of making encapsulated tobacco beads
comprises mixing tobacco particles and menthol in an aqueous solution to form a wet mass;
15 extruding the wet mass to form extrudates; spheronizing the extrudates to form tobacco beads;
drying the tobacco beads; contacting the beads with a solution comprising a cation; and
introducing the contacted tobacco beads into a solution of coating material in a concentration
effective to induce ionic gelation of the coating material around the beads, to form encapsulated
tobacco beads having gel coatings.

20 In a further embodiment, the contacting with the solution comprising the cation occurs in
a fluidized bed simultaneously with the drying the tobacco beads.

BRIEF DESCRIPTION OF THE DRAWINGS

The various embodiments will now be described in greater detail with reference to the
25 preferred embodiments illustrated in the accompanying drawings.

FIGS. 1A and 1B are environmental scanning electron microscopy (ESEM) images of
pectin coated mentholated tobacco beads;

FIG. 2 is a graph showing weight losses of hydroxypropyl methylcellulose ("HPMC")
coated and pectin coated mentholated tobacco beads as a function of time in vacuum oven;

30 FIGS. 3A and 3B are ESEM images of crosslinked alginate coated tobacco beads (dry
coating); AND

FIG. 4 is an ESEM image of a HPMC/crosslinked alginate coated mentholated tobacco
bead.

DETAILED DESCRIPTIONGenerally

As used herein, the term "about" when used in conjunction with a stated numerical value or range denotes somewhat more or somewhat less than the stated value or range, to within a range of $\pm 10\%$ of that stated.

As used herein, the terms "tobacco material" or "tobacco" are intended to include both tobacco (for example, cut filler, tobacco powder, etc.) and tobacco substitute materials (for example, vegetable or plant products like shredded lettuce). Thus, both tobacco and tobacco substitute materials are provided herein.

The tobacco material, as mentioned above, can be a tobacco material or a tobacco substitute material. Exemplary tobacco materials can be made of cut or ground tobacco and can include flavorant additives and/or humectants. Examples of suitable types of tobacco materials that may be used include, but are not limited to, flue-cured tobacco, Burley tobacco, Maryland tobacco, Oriental tobacco, rare tobacco, specialty tobacco, reconstituted tobacco, cultured tobacco, blends thereof and the like.

The tobacco material can be provided in any suitable form, including, but not limited to, tobacco lamina, processed tobacco materials, such as volume expanded or puffed tobacco, or ground tobacco, processed tobacco stems, such as cut-rolled or cut-puffed stems, reconstituted tobacco materials, blends thereof, and the like. Tobacco substitutes or genetically modified tobacco may also be used.

Additionally, as mentioned above, the tobacco material can comprise a tobacco substitute material. Exemplary tobacco substitute materials can be made of vegetable or plant fibers, or the like, and can include flavorant additives, humectants or a combination thereof. Examples of suitable types of tobacco substitute materials that may be used include, but are not limited to, lettuce, cotton, flax, cellulosic fibers, blends thereof and the like.

Smokeless tobacco products refer to orally enjoyable products including, but not limited to, pouched tobacco (also known as snus). One drawback of commercial snus packets is that the tobacco material, as well as additives to the tobacco, can cause staining of the pouch material surrounding the tobacco material.

According to one embodiment, tobacco beads with a core-shell structure are provided. These tobacco beads can provide one or more of: (1) extended shelf life and product stability; (2) controlled flavorant delivery; (3) potentially reduced exposure to tobacco specific compounds; and (4) enhanced sensorial attributes.

Such tobacco beads can provide the attributes mentioned above because, when the pouch is placed in the oral cavity, the outer gel coating layer can provide a controlled-release of

- 3 -

flavorant and may provide reduction of tobacco specific compounds by functioning as a barrier either to the compounds themselves or to the compounds bound to a sequestering agent.

Tobacco beads can also be used in smoking articles, as described in commonly-assigned U.S. Patent Application Publication No. 2007/0000505, incorporated herein by reference.

Core

The core of the encapsulated tobacco bead is a spheronized bead comprising tobacco particles and menthol. The tobacco particles are preferably finely ground tobacco. The menthol may be conventional menthol or encapsulated menthol. For example, commercially available encapsulated menthol-gum powder CR200, containing 80 wt.% of menthol and 20 wt.% of gum arabic (TasteTech, United Kingdom), is a preferred form of menthol.

Optionally, other flavorants are included. The flavorants can be soluble or insoluble in water or organic solvents, such as ethanol or propylene glycol. Flavorants can also be encapsulated for controlled delivery. Suitable flavorants and aromas include, but are not limited to, any natural or synthetic flavorant or aroma, such as tobacco, smoke, mint, such as peppermint and spearmint, chocolate, licorice, citrus and other fruit flavorants, gamma octalactone, vanillin, ethyl vanillin, breath freshener flavorants, spice flavorants such as cinnamon, methyl salicylate, linalool, bergamot oil, geranium oil, lemon oil, and ginger oil. Other suitable flavorants and aromas may include flavorant compounds selected from the group consisting of an acid, an alcohol, an ester, an aldehyde, a ketone, a pyrazine, combinations or blends thereof and the like. Suitable flavorant compounds may be selected, for example, from the group consisting of phenylacetic acid, solanone, megastigmatrienone, 2-heptanone, benzylalcohol, cis-3-hexenyl acetate, valeric acid, valeric aldehyde, ester, terpene, sesquiterpene, nootkatone, maltol, damascenone, pyrazine, lactone, anethole, iso-valeric acid, combinations thereof and the like.

Exemplary additional natural and artificial flavorants include peppermint, spearmint, wintergreen, cinnamon, chocolate, vanillin, licorice, clove, anise, sandalwood, geranium, rose oil, vanilla, lemon oil, cassia, spearmint, fennel, ginger, ethylacetate, isoamylacetate, propylisobutyrate, isobutylbutyrate, ethylbutyrate, ethylvalerate, benzylformate, limonene, cymene, pinene, linalool, geraniol, citronellol, citral, peppermint oil, orange oil, coriander oil, borneol, fruit extract, and the like. Particularly preferred additional flavorant and aroma agents are essential oils and essences of coffee, tea, cacao, and mint.

The following percentages of components in the tobacco bead core are listed by weight percent of the component in the core and optional inner coating layer, measured after drying and/or coating with an optional inner coating layer, and prior to encapsulation with a gel coating.

- 4 -

The menthol and optional flavorant can be present in the core tobacco bead in a combined amount of from about 0.001 wt.% to about 50 wt.%. More preferably, the amount is from about 1 wt.% to about 40 wt.%. Most preferably, the amount is from about 10 wt.% to about 30 wt.%.

5 The core of the tobacco beads can further comprise one or more of natural sweeteners, artificial sweeteners and souring agents. Preferred sweeteners include water soluble sweeteners such as monosaccharides, disaccharides and polysaccharides (for example, xylose, ribose, sucrose, maltose, fructose, glucose, maltose, mannose). In addition, or in the alternative to sweeteners, the tobacco beads can comprise souring agents such as acetic acid, adipic acid, 10 citric acid, lactic acid, maleic acid, succinic acid, tartaric acid, and mixtures thereof. A suitable amount of the sweeteners and/or souring agents can be from about 0.001 wt.% to about 5 wt.%. More preferably, the amount is from about 0.1 wt.% to about 2 wt.%.

Humectants can be added to the core of the tobacco beads to maintain and protect the moisture levels of the tobacco material in the tobacco beads. The humectants in the core of the 15 tobacco beads include glycerol and propylene glycol. It is noted that the humectants can also be provided for a preservative effect, as the water activity of the product can be decreased, thus reducing growth of micro-organisms. Additionally, humectants can be used to provide a higher moisture feel in a drier tobacco material (or tobacco substitute material) or a drier smokeless tobacco material. The humectant can be present in the core in an amount of from about 20 0.001 wt.% to about 5 wt.%. More preferably, the amount is from about 0.1 wt.% to about 2 wt.%.

The core of the tobacco beads can further include binders such as mono or polysaccharide based materials, modified cellulotics, etc. A suitable amount of the binders in the core can be up to about 20 wt.% and more preferably the amount can be up to about 25 10 wt.%.

Starches and/or cellulose ethers can be added to the core as a thickening agent or binding agent. Polymers such as polyvinyl pyrrolidone (which preferably also serves as a sequestering agent) and polyvinyl alcohol, and gums such as xanthan gum, gum Arabic, and acacia gum can be used as thickening agents. Generally, the stiffness of tobacco beads can be 30 increased and the dissolution rate (that is, dissolution upon exposure to moisture) can be decreased by increasing the average molecular weight of polymers used. Thickening agents can be added to the core of the tobacco beads to increase the modulus (that is, stiffness) of the tobacco beads and decrease the propensity toward deforming of the tobacco beads during or after drying (for example, during storage). Thickening agents can comprise up to about 20 wt.% 35 and more preferably up to about 5 wt.%.

- 5 -

Surfactants can also be added to the core of the tobacco beads. The surfactants include, but are not limited to, the mono and diglycerides of fatty acids, lactylates, pluronic acid, polyoxyethylene sorbitol esters, lananol, and sodium lauryl sulfate. Surfactants can be present in the core in an amount of up to about 10 wt.% and more preferably in an amount of up to about 2 wt.%.
5

The core of the tobacco beads can further comprise stabilizing agents. Exemplary stabilizing agents are gums such as guar gum, xanthan gum, locust bean gum, and carrageenan. Stabilizing agents can be present in the core in an amount of up to 10 wt.% and more preferably in an amount of up to about 2 wt.% of the final composition of the tobacco beads.
10

Tobacco beads can also comprise antioxidants, preservatives or a combination thereof. Exemplary antioxidants include ascorbic acid, vitamin E and sodium pyrosulfate. Exemplary preservatives include acetic acid, benzoic acid, citric acid, lactic acid, malic acid, sorbic acid, and tartaric acid. A suitable amount of the antioxidants and/or preservatives in the core can be up to about 5 wt.% and more preferably up to about 2 wt.%.
15

Plasticizing agents can also be added to the core of the tobacco beads. The plasticizing agents can be used to control the stiffness of the tobacco beads, as well as the viscosity of the wet mass from which tobacco beads are prepared. Exemplary plasticizing agents include monoacetin, diacetin, triacetin, glycols such as polyethylene glycol and propylene glycol, polyhydric alcohols such as glycerin and sorbitol, mineral oils, vegetable oils, glycerol and glycerol esters such as glycerol triacetate. Plasticizing agents be present in the core in an amount of up to about 20 wt.% and more preferably in an amount of up to about 5 wt.%.
20

The core of the tobacco beads optionally includes one or more sequestering agents, including complexing agents. These are agents that can bind targeted constituents in the core (for example, tobacco-specific nitrosamines) and reduce their diffusion or transport to the mouth. Suitable sequestering agents include, but are not limited to, polyvinylpolypyrrolidone. A suitable amount of the sequestering agents in the core can be up to about 5 wt.% and more preferably up to about 2 wt.%.
25

The core of the tobacco beads can further comprise filling agents to control the tobacco beads' physical properties (for example, texture, weight, etc.). Exemplary filling agents include cellulose, titanium oxide, magnesium silicate (for example, talc), aluminum silicate, magnesium carbonate, calcium carbonate (for example, limestone), calcium phosphate, calcium sulfate, zinc oxide, aluminum oxide, and mixtures thereof. Filling agents can be used to modify the texture of the tobacco beads. Filling agents such as carbonate and phosphate salts can also be used to adjust the pH of the tobacco beads. According to a preferred embodiment, the pH of the tobacco beads is greater than 5, more preferably greater than 6 (for example, greater than 6.5,
30
35

- 6 -

7, or 7.5). The filling agents can be incorporated in the core in an amount of up to about 50 wt.%.

The core of the tobacco beads can also comprise pigments.

5 Coating Layer

The tobacco bead core is substantially surrounded by at least one coating layer. The coating is preferably applied to the tobacco bead by contacting the bead with a cation and then introducing the bead into a solution of coating material so that ionic gelation occurs, thereby creating a gel coating around the tobacco bead. The result is an encapsulated tobacco bead
10 having a core-shell structure. The gel coating preferably swells when in contact with water, and provides a desirable sustained release of the contents of the core.

The gel coating may have a thickness of between about 2 μm and about 40 μm .

Prior to application of the gel coating, the core may first receive an optional inner coating layer.

15 The coating layer can include flavorants, natural sweeteners, artificial sweeteners, souring agents, humectants, binders, thickening agents, pigments, surfactants, stabilizing agents, oxygen scavengers, antioxidants, preservatives *etc.* and combinations thereof. These additives have been described above with respect to the core of the tobacco beads.

The coating layer is a crosslinked polymer which obtained by ionic gelation. According
20 to an embodiment, suitable ions can be selected from the group consisting of sodium, potassium, calcium, aluminum, lanthanum, magnesium, and barium.

According to an embodiment, such a polymer can be selected from among alginates, pectinates, and carrageenan. The polymer can be present in the coating layer in an amount of up to about 95 wt.%, more preferably from about 0.5 wt.% to about 85 wt.%, and most
25 preferably from about 10 wt.% to about 75 wt.% based on the total weight of the coating layer.

Multiple coating layers can be coated on the surface of the core such that each coating layer is discrete and/or fused. For example, the encapsulated tobacco beads may further comprise at least a second coating that is at least partially fused to the gel coating and/or discrete from the gel coating. An optional flavorant can be the same or different in the multiple
30 coating layers coated on the surface of the core.

Further, a coating layer (for example the outer or outermost coating layer) can be engineered to have specific porosity which is one of the primary ways to control a rate of diffusion of the components in the core through the porous outer coating layer. If alginates are used to form the outer coating layer then the porosity of the outer coating layer can be
35 controlled by adjusting the ratio of guluronic to mannuronic units in the alginate.

- 7 -

The crosslinking density of alginates can be controlled by the ratio of M:G (mannuronic acid to guluronic acid) units in the alginate. The solution used can preferably be based on sodium alginate. Alginates having a high content of mannuronic acid residues (mannuronic:guluronic ratio greater than 1:1 and preferably about 1.5:1 to about 3:1) are preferred when the core of the encapsulated tobacco bead has a fluid consistency. In contrast, alginates having a high content of guluronic acid residues (mannuronic:guluronic ratio less than 1:1 and preferably about 0.4:1 to about 0.6:1) are preferred when the core of the encapsulated tobacco bead has a gelled consistency.

10 Process of Making Tobacco Encapsulated Tobacco Beads

According to an embodiment, a process of making encapsulated tobacco beads comprises mixing tobacco particles and menthol in an aqueous solution to form a wet mass; extruding the wet mass to form extrudates; spheronizing the extrudates to form tobacco beads; contacting the beads with a solution comprising a cation; and introducing the contacted tobacco beads into a solution of coating material where the concentration of coating material is effective to induce ionic gelation of the coating material around the beads, to form encapsulated tobacco beads having gel coatings.

The process may further include a pasteurization step. Alternatively or in addition, the process may further comprise drying the encapsulated tobacco beads having gel coatings.

20 The solution comprising a cation preferably comprises water, optionally includes an alcohol (preferably ethanol) and one or more cations. Preferred cations are selected from the group consisting of sodium, potassium, calcium, aluminum, lanthanum, magnesium, and barium.

The coating material is preferably a polymeric material selected from among alginates, pectins, and carrageenan (for example, kappa-carrageenan).

Before introducing the contacted tobacco beads into a solution of coating material, the tobacco beads may comprise 24% or greater menthol by weight.

One or both of the tobacco beads and the coating layer can comprise one or more of (i) natural sweeteners, (ii) artificial sweeteners, (iii) at least one humectant, (iv) at least one binder, (v) at least one thickening agent, (vi) at least one pigment, (vii) at least one surfactant, (viii) at least one stabilizing agent, (ix) at least one antioxidant, (x) at least one preservative, and (xi) at least one flavorant in addition to the menthol.

For example, the solution of coating material may comprise a flavorant, the flavorant being incorporated into the gel coatings. The flavourant may be one or more of: (a) solid or liquid; (b) soluble or insoluble in water or organic solvents selected from the group consisting of ethanol, propylene glycol, and mixtures thereof; (c) added in an encapsulated form; (d) selected

- 8 -

from the group consisting of natural and synthetic flavorants; and/or (e) selected from the group consisting of peppermint, spearmint, wintergreen, menthol, cinnamon, chocolate, vanillin, licorice, clove, anise, sandalwood, geranium, rose oil, vanilla, lemon oil, cassia, spearmint, fennel, ginger, ethylacetate, isoamylacetate, propylisobutyrate, isobutylbutyrate, ethylbutyrate, ethylvalerate, benzylformate, limonene, cymene, pinene, linalool, geraniol, citronellol, citral, peppermint oil, orange oil, coriander oil, borneol, fruit extract, and combinations thereof.

A flavorant in the coating can be the same or different as a flavorant in the core.

The tobacco beads can comprise one or more of (i) at least one plasticizing agent, (ii) complexing and/or sequestering agent, (iii) at least one filling agent, and (iv) at least one protein.

The contacting with the solution comprising the cation can be achieved by spraying, dipping, immersion, drum coating, and/or fluidized bed coating.

The wet mass can be prepared in any suitable mixer. Preferably, the mixer is a planetary mixer. Further, the wet mass can be extruded through suitably sized pierced screens and spheronized using a rotating disk having a grooved surface.

The extrusion can be carried out using extruders such as the screw, sieve and basket, roll, and ram type extruders. Furthermore, spheronization can be carried out using a spinning friction plate that effects rounding of extrudate particles. Details of extrusion and spheronization techniques can be found in U.S. Patent No. 5,725,886, the entirety of which is incorporated herein by reference.

Water is preferably used to provide the wet mass with desired rheological characteristics. For example, the water content can be adjusted to achieve the desired plasticity, for example, the water content may range from 20% to 80% (preferably 40 to 60%) by weight, or about proportions of one-to-four to four-to-one of liquid to dry material. The liquid content of the wet mass is preferably adjusted to account for the effect on the rheological characteristics of the wet mass of any other components added thereto for inclusion in the tobacco bead.

The tobacco beads can be produced in the form of "spheroids" or "ovals" having their largest diameters in the range of about 0.1 mm to about 2.5 mm or about 3 mm, more preferably from about 0.2 mm to about 1.2 mm and most preferably from about 0.4 mm to about 1.0 mm (and any 0.1 mm value in between these ranges). For example, the tobacco beads encapsulated with gel coatings may be substantially spherical with diameters of from about 0.1 mm to about 2.5 mm

Following spheronization, wet tobacco beads are dried, preferably in a fluidized bed or conventional convection oven or vacuum oven. The beads are preferably dried to a moisture level of about 0.5% to about 25%, for example 10% or 20%.

The drying can be done more than once, at different stages in the process, for example during or after contacting with the cation and before introducing the coating material, after forming the gel coating, and/or before contacting with the cation.

After spheronization, the beads are contacted with the solution comprising the cation. In an embodiment, the cation is applied via spraying in a fluidized bed drier immediately after spheronization, preferably at the same time the beads are dried. Preferably, at the time of contacting the beads with the solution comprising the cation, the beads contain at least 5%, at least 10%, at least 20%, at least 30%, or at least 40% moisture by weight.

The gel coating layer preferably substantially surrounds the core and can be formed of various coating materials. If the outer coating layer is of the alginate or pectinate type, the tobacco beads are preferably first contacted with a solution of calcium chloride or other suitable divalent cation. Calcium chloride is a crosslinking agent for alginates and pectinates. If kappa-carageenan is used for the outer coating layer, then monovalent cations such as potassium are preferably used to induce crosslinking.

According to one embodiment, the outer coating layer can be formed on the tobacco beads that are obtained by the process described above by introducing the tobacco beads into a solution of alginate. The presence of Ca^{2+} ions leads to the formation of a spherical coating layer around the tobacco based core. The alginate solution can also include additives such as flavorants, pigments, binders, pH stabilizers, etc., so that during the formation of the coating layer these additives are entrapped in the alginate matrix. The additives have been described above with respect to the core.

According to another embodiment, coating of the core with the coating material may be achieved via fluidized bed coating or a pan coating process.

In one embodiment, after the coating layer is formed on the core, the bead product having a core-shell structure can be subjected to pasteurization. Additional flavorants can be added to the encapsulated tobacco bead having a core-shell structure after the core-shell structure has been formed.

In another embodiment, the bead having a core-shell structure can be dried to allow for improved flowability and ease of packing.

The coating layer can be translucent or substantially opaque.

Flavorants can be admixed with the gelatin or sugar based formulation, respectively. The flavorant containing binders can also be combined with the solid ingredients to form encapsulated products of the matrix type.

Inner Coating Layer

The encapsulated tobacco bead may optionally include an inner coating layer substantially surrounding the core and under the gel coating.

5 Coating materials as described above may be used for the inner coating layer. Other coating materials suitable for an inner coating layer are gum arabic, KOLLICOAT IR (a polyvinyl alcohol-polyethylene glycol graft copolymer), and hydroxypropyl methylcellulose (HPMC). If the inner coating layer is HPMC, it is preferred that the cation solution comprises an alcohol.

10 Coating of the core with the inner coating layer may be achieved via fluidized bed coating or a pan coating process. If fluidized bed coating is used, then preferably the coating with the inner coating layer occurs simultaneously with the drying the tobacco beads.

Various Uses of the Tobacco Beads

15 These tobacco beads can be used in snus type products and in smoking articles such as cigarettes. In one embodiment, when multiple coating layers are coated on the core and the core and coating layers have different flavorants, a multiple flavor experience is provided to a user over a period of time as each coating layer is dissolved or combusted.

20 The "snus" type product can be placed directly in a user's mouth and can provide: (1) controlled flavorant(s) delivery from the coating layer and the inside core to the mouth, (2) potentially reduced exposure to tobacco specific compounds, (3) enhanced sensorial attributes, and (4) reduced staining of the pouch material surrounding the tobacco material. Moreover, the smokeless tobacco product or "snus" as described herein has an extended shelf life and product stability.

25 U.S. Publication Nos. 2007/0261707 and 2007/0012328, each of which is incorporated herein by reference in their entirety, provide examples of smokeless tobacco products into which the herein-described beads may be incorporated.

30 One or more encapsulated tobacco beads according to the invention may be incorporated into a filter of a smoking article. For example, a smoking article may comprise a tobacco rod free of menthol and a filter comprising one or more tobacco beads according to the invention.

The tobacco beads can also be used in cigarettes as flavorant carriers that can be added to a cigarette filter for controlled flavorant delivery in the filter as described in commonly-assigned U.S. Patent Application Publication No. 2007/0000505, incorporated herein by reference.

The tobacco beads can also aid in selective filtration when used in a cigarette due to the incorporation of selective binding agents in the outer coating layer or the core of the tobacco beads.

In an embodiment, a mentholated smoking article (such as a cigarette) contains no menthol in the tobacco rod, but instead the menthol is provided by means of one or more tobacco beads in a filter. Such an arrangement simplifies tobacco processing and eliminates issues such as staining that are typically associated with direct applications of menthol to the tobacco filler of the tobacco rod.

Further, when the tobacco beads are used as tobacco filler of a smoking article a reduction in the formation of undesired tobacco specific compounds in mainstream smoke can be achieved. Without wishing to be bound by theory, a reduction in the formation of tobacco specific compounds could be achieved in this way: as the outer coating layer is pyrolyzed, it forms a layer of charred material through which labile flavorants are easily transported, but heavier compounds resulting from tobacco pyrolysis, and which tend to partition in the particulate phase, are substantially restricted from being released.

Examples

The materials used in the following Examples are summarized as follows. Ground tobacco (HV-305, HV-304, or LV 380) and synthetic menthol were used as received. HPMC and gum arabic (from acacia tree) were obtained from Sigma-Aldrich (St. Louis, MO). Calcium chloride was obtained from Fisher Scientific (Fair Lawn, FL). Kollicoat® IR (for "Instant Release"), a polyvinyl alcohol-polyethylene glycol graft copolymer, is available from BASF (Belvidere, NJ). The commercially available encapsulated menthol-gum powder CR200, containing 80 wt.% of menthol and 20 wt.% of gum arabic, was supplied by TasteTech (United Kingdom). Food colorings were obtained from the C. F. Sauer Company (Richmond, VA).

Example 1

The following sub-examples recite methods used to create tobacco beads. The resulting tobacco beads formed are ready for further processing including contacting with a cation and coating material for forming a gel coating, e.g. as detailed in Example 3 below.

Sub-example A: 200 parts of ground tobacco, 75 parts of menthol-(gum arabic) powder CR200 (Tastetech, UK) and 108 parts of deionized water were mixed to form a wet mass. The wet mass was extruded using a single-screw extruder (LCI Multi-Granulator MG-55) through a dome shaped, 0.7-mm opening die at an extrusion speed of 60 rpm. The resulting extrudates were spheronized using an LCI QJ-230T Marumerizer at a rotation speed of 1400 rpm for 6 minutes. Wet spheroids with narrow size distribution were obtained. The resulting beads contained 16 wt.% menthol.

Sub-example B: 126 parts of ground tobacco were first mixed with 178 parts of deionized water. The mixture was heated up in an oven and kept at 50°C. Synthetic menthol was melted at 50°C. 162 parts of molten menthol was mixed with the (tobacco dust)/(deionized water) mixture to form a wet mass. The wet mass was extruded using a single-screw extruder (LCI Multi-Granulator MG-55) through a dome shaped, 0.7-mm opening die at an extrusion speed of 60 rpm. The resulting extrudates were spheronized using an LCI QJ-230T Marumerizer at a rotation speed of 1400 rpm for 6 minutes. Wet spheroids with narrow size distribution were obtained. The wet spheroids were subsequently dried in a fluidized bed (Mini Glatt, German) at room temperature for 1 hour to remove water. The resulting beads contained 50 wt.% menthol.

Sub-example C: 126 parts of ground tobacco were first mixed with 178 parts of deionized water. The mixture was heated up in an oven and kept at 50°C. Synthetic menthol was melted at 50°C. 162 parts of molten menthol was mixed with the (tobacco dust)/(deionized water) mixture to form a wet mass. The wet mass was extruded using a single-screw extruder (LCI Multi-Granulator MG-55) through a dome shaped, 0.7-mm opening die at an extrusion speed of 60 rpm. The resulting extrudates were spheronized using an LCI QJ-230T Marumerizer at a rotation speed of 1400 rpm for 6 minutes. Wet spheroids with narrow size distribution were obtained. The wet spheroids were subsequently coated with 5 wt.% hydroxypropyl methylcellulose aqueous solution in a fluidized bed coater (Mini Glatt, German) at 30°C for 2 hours. The resulting beads contained 48 wt.% menthol.

Sub-example D: 50 parts of ground tobacco were first mixed with 18 parts of deionized water. The mixture was heated up in an oven and kept at 50°C. A mixture of 50 parts of synthetic menthol and 10 parts of cocoa butter was melted at 50°C. The (molten menthol)/(cocoa butter) mixture was mixed with the (ground tobacco)/(deionized water) mixture to form a wet mass. The wet mass was extruded using a single-screw extruder (LCI Multi-Granulator MG-55) through a dome shaped, 0.7-mm opening die at an extrusion speed of 60 rpm. The resulting extrudates were spheronized using an LCI QJ-230T Marumerizer at a rotation speed of 1400 rpm for 6 minutes. Wet spheroids with narrow size distribution were obtained. The resulting beads contained 36 wt.% menthol.

Sub-example E: 50 parts of ground tobacco were first mixed with 30 parts of deionized water. The mixture was heated up in an oven and kept at 50°C. 20 parts of synthetic menthol was melted at 50°C. The molten menthol was mixed with the (ground tobacco)/(deionized water) mixture to form a wet mass. The wet mass was extruded using a single-screw extruder (LCI Multi-Granulator MG-55) through a dome shaped, 0.7-mm opening die at an extrusion speed of 60 rpm. The resulting extrudates were spheronized using an LCI QJ-230T Marumerizer at a rotation speed of 1400 rpm for 6 minutes. Wet spheroids with narrow size

distribution were obtained. The wet spheroids were subsequently dried in a convection oven under a vacuum pressure of -5 in Hg at 35°C for 2 hours to remove water. The resulting beads contained 24 wt.% menthol.

Example 2

5 Mentholated tobacco beads were coated with an inner coating layer as follows using a fluidized bed coater.

 HPMC aqueous solutions at different HPMC amounts (1, 2, 3 or 5 wt.%), 5 wt.% Kollicoat® IR aqueous solution, and 5 wt.% gum arabic aqueous solution are used to coat mentholated tobacco beads prepared according to Example 1 in a fluidized bed coater
10 assembled with a Wurster insert (Mini Glatt, Glatt Corporation, Germany). For each batch, the coating temperature was 30°C and the coating time varied from 2 to 4 hours. The flow rate of the polymer solution is 0.42 g/min. This coating procedure was effective to dry the beads so that no separate drying step was required.

 The resulting beads with a coating layer of HPMC are ready for further processing by
15 contacting with a cation and coating material for form a gel coating, as detailed in Example 4 below.

Example 3

 Mentholated tobacco beads were coated with crosslinked alginate as follows.

 Dried tobacco beads prepared according to Example 1 are contacted with a 5 wt.%
20 calcium chloride (CaCl₂) aqueous solution by immersion for 30 seconds and then contacted with a 0.25 wt.% sodium alginate solution by immersion for 15 mins. A thin layer of calcium alginate is formed on the surface of tobacco beads. The coated beads are washed with distilled water and dried in ambient conditions.

Example 4

25 A method similar to that of Example 3 is used to form a crosslinked alginate coating on the HPMC coated tobacco beads obtained from Example 2, however, in this instance, a 15 wt.% CaCl₂ ethanol solution was used in place of the 5% CaCl₂ aqueous solution.

Example 5

 Mentholated tobacco beads prepared according to Example 1 were coated with a 2 wt.%
30 pectin solution in the fluidized bed coater during a drying step. The coating time was 4 hours. The resulting beads are ready for further processing by contacting with a cation and coating material for form a gel coating.

Example 6

 Mentholated tobacco beads were created using either molten synthetic menthol or
35 CR200 menthol-gum powder as described in Example 1. The beads were vacuum-dried at 30 °C for six hours, then sealed in vials and stored at room conditions overnight. The resulting

beads are ready for further processing by contacting with a cation and coating material for form a gel coating.

Analysis & Results

5 The coating layer thickness and morphologies were characterized via environmental scanning electron microscopy ("ESEM"). ESEM images of pectin coated mentholated tobacco beads are shown in FIGS. 1A-B. FIG. 1A shows an unbroken bead, while FIG. 1B shows a cross-section of a broken bead. The pectin coating was 1.9 μm thick (FIG. 1B), and the coating thickness was fairly uniform.

10 Menthol release was analyzed by examining the weight losses of 5 wt.% HPMC coated from Example 2 and 2 wt.% pectin coated mentholated tobacco beads from Example 5 in a vacuum oven at 30 °C. Because the mentholated tobacco beads lost most of their water during fluidized bed coating, the weight losses here were mostly attributable to loss of menthol. The results are shown in FIG. 2. The menthol release rate of HPMC coated mentholated tobacco
15 beads is slightly higher than the release rate of pectin coated beads after the first day. This indicated that a pectin coating may provide better protection for menthol in mentholated tobacco beads, even though the pectin coating is thinner. Without wishing to be bound by theory, it is believed that this might be because pectin could react with the calcium ions in the tobacco particles, which may help form denser matrices in the beads.

20 A tobacco bead formed as described in Example 3 was dried. An optical microscope image of the crosslinked alginate on a tobacco bead after drying are shown in FIGS. 3A and B (showing an unbroken and broken bead, respectively). The images show that crosslinked alginate can be successfully coated on the beads via this technique. The coating surface is smooth and varied in thickness from 16 μm to 40 μm .

25 A HPMC/crosslinked alginate dual-layer coating was obtained as described in Example 4. ESEM images of HPMC/crosslinked alginate coated tobacco beads are shown in FIG. 4. A dual-layer coating was identifiable in most areas on the bead. The total thickness of the coating layer was about 30 μm to 40 μm .

30 Regarding the Example 6 wherein mentholated tobacco beads were created using either molten synthetic menthol or CR200 menthol-gum powder, it was found that menthol crystallized on the walls of the vials containing bead made with liquid synthetic menthol, but not on the walls of the vials containing beads made with the encapsulated menthol gum powder CR200. This demonstrated that the menthol gum powder slowed release of menthol from mentholated tobacco beads.

35 Although the invention has been described with reference to particular embodiments and examples, it should be understood that various modifications can be made without departing

- 15 -

from the spirit of the invention. The various parts of the disclosure including the abstract, summary, and the title are not to be construed as limiting the scope of the present invention, as their purpose is to enable the appropriate authorities, as well as the general public, to quickly determine the general nature of the invention. Unless the term "means" is expressly used, none
5 of the features or elements recited herein should be construed as means-plus-function limitations. Accordingly, the invention is limited only by the claims.

CLAIMS:

1. An encapsulated tobacco bead comprising:
a core comprising tobacco particles and menthol, and
5 an outer coating layer comprising an ionically-crosslinked gel.
2. An encapsulated tobacco bead according to claim 1 further comprising an inner coating layer comprising hydroxypropyl methylcellulose or pectin.
- 10 3. An encapsulated tobacco bead according to claim 1, wherein the menthol is encapsulated menthol.
4. An encapsulated tobacco bead according to claim 3, wherein the encapsulated menthol comprises menthol encapsulated in a gum.
- 15 5. An encapsulated tobacco bead according to claim 1, wherein the encapsulated tobacco bead further comprises a sequestering agent.
6. An encapsulated tobacco bead according to claim 5, wherein the sequestering agent
20 comprises polyvinylpyrrolidone.
7. An encapsulated tobacco bead according to claim 1 wherein the gel coating comprises a material selected from the group consisting of alginates, pectins, and carrageenan.
- 25 8. An encapsulated tobacco bead according to claim 6, wherein the gel coating comprises alginate with a ratio of guluronic to mannuronic units of about 0.4:1 to about 0.6:1.
9. A smokeless tobacco product comprising one or more encapsulated tobacco beads according to claim 1.
- 30 10. A smoking article comprising one or more encapsulated tobacco beads according to claim 1.
11. A smoking article according to claim 10, wherein the smoking article comprises a filter
35 and the one or more encapsulated tobacco beads are incorporated in the filter.

- 17 -

12. A process of making encapsulated tobacco beads comprising:
mixing tobacco particles and menthol in an aqueous solution to form a wet mass;
extruding the wet mass to form extrudates;
spheronizing the extrudates to form tobacco beads;
5 drying the tobacco beads;
contacting the tobacco beads with a solution comprising a cation; and
introducing the contacted tobacco beads into a solution of coating material in a
concentration effective to induce ionic gelation of the coating material around the tobacco
beads, to form encapsulated tobacco beads having a gel coating.
- 10
13. A process of according to claim 12, further comprising coating the tobacco beads with an
inner coating layer before contacting the tobacco beads with the solution comprising the cation.
14. A process according to claim 13 wherein the inner coating layer comprises
15 hydroxypropyl methylcellulose and the solution comprising the cation comprises an alcohol.
15. A process according to claim 13 wherein the inner coating layer comprises pectin.

- 1/2 -

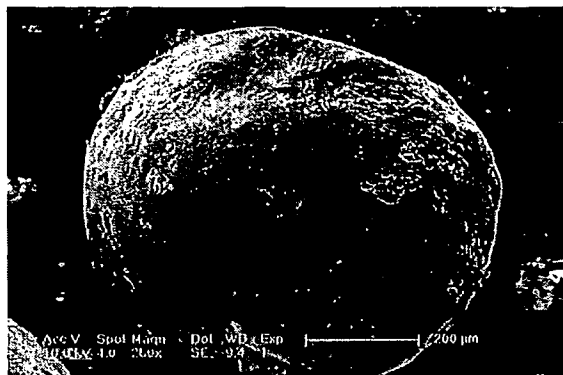


FIG. 1A.

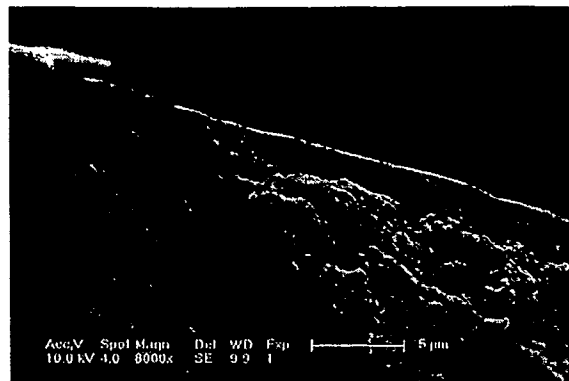


FIG. 1B.

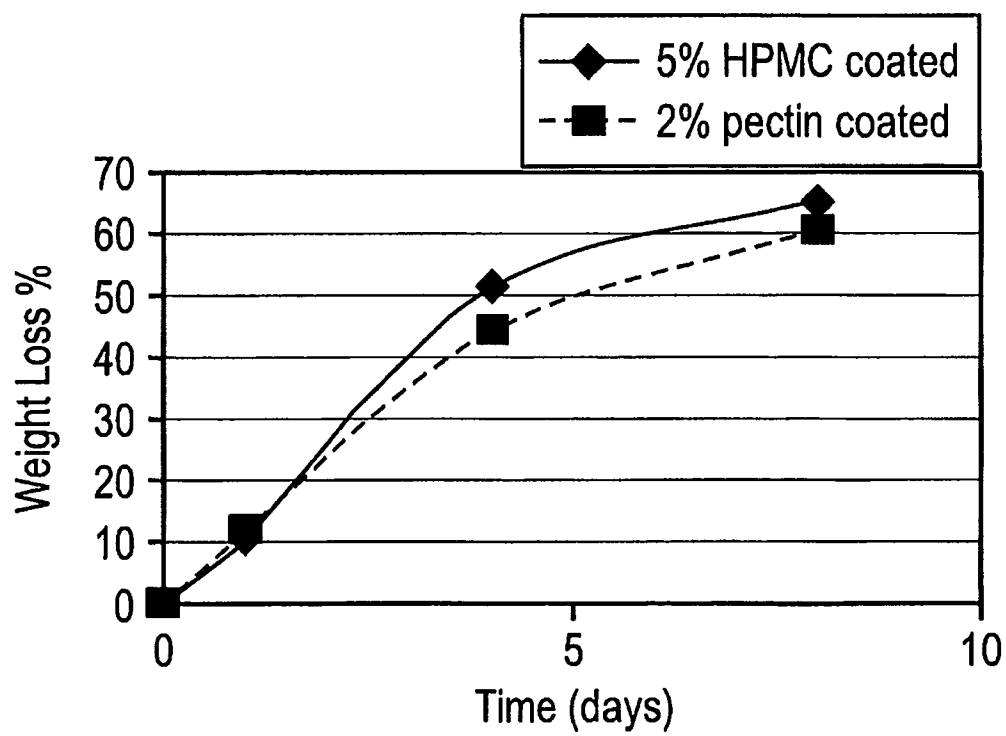


FIG. 2

- 2/2 -

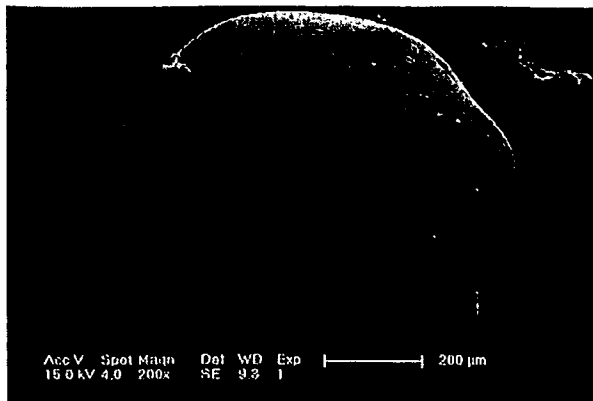


FIG. 3A.

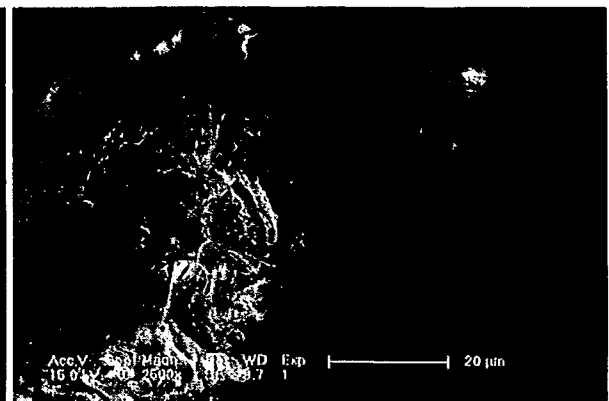


FIG. 3B.

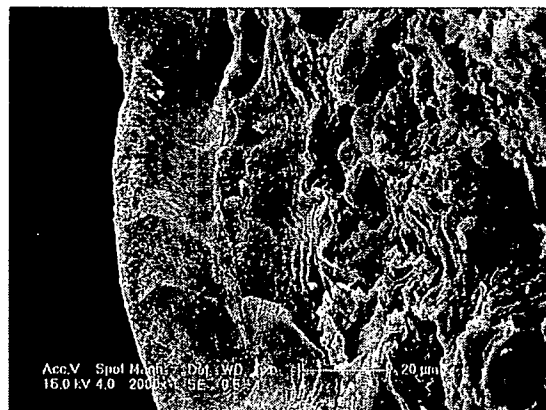


FIG. 4

INTERNATIONAL SEARCH REPORT

International application No
PCT/EP2011/001501

A. CLASSIFICATION OF SUBJECT MATTER
INV. A24B15/28
ADD.

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
A24B A23L A23P

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, FSTA, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
E	WO 2011/042211 A1 (PHILIP MORRIS PROD [CH]) 14 April 2011 (2011-04-14) examples	1-15
Y	----- WO 2006/090290 A1 (PHILIP MORRIS PROD [CH]) 31 August 2006 (2006-08-31) cited in the application examples claim 24 page 14, lines 5-8 page 19, line 5	1-15
Y	----- WO 2008/059375 A2 (PHILIP MORRIS PROD [CH]) 22 May 2008 (2008-05-22) examples 3-5 claim 5 page 2, lines 22-23 ----- -/-	1-15



Further documents are listed in the continuation of Box C.



See patent family annex.

* Special categories of cited documents :

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

21 July 2011

Date of mailing of the international search report

29/07/2011

Name and mailing address of the ISA/

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040,
Fax: (+31-70) 340-3016

Authorized officer

Delorenzi, Sibilla

INTERNATIONAL SEARCH REPORT

International application No

PCT/EP2011/001501

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	WO 2008/146176 A2 (PHILIP MORRIS PROD [CH]) 4 December 2008 (2008-12-04) examples 4-16 claims 1, 6-8 -----	1-15
A	WO 2009/094859 A1 (REYNOLDS TOBACCO CO R [US]; ZHANG WENHUI [CN]) 6 August 2009 (2009-08-06) claims 1, 9, 10 figure 1 -----	1-15
A	GB 2 015 961 A (CELANESE CORP) 19 September 1979 (1979-09-19) claims 1, 12, 14, 25 -----	1-15
A	WO 2004/098318 A1 (GIVAUDAN SA [CH]; SOPER JOHN C [US]; MOLNAR JEFF [US]; VALE JAMES MICH) 18 November 2004 (2004-11-18) claims 1, 2, 11 -----	1-15
A	EP 0 464 324 A2 (JAPAN TOBACCO INC [JP]) 8 January 1992 (1992-01-08) example 1 -----	1-15

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No

PCT/EP2011/001501

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 2011042211	A1	14-04-2011	NONE
WO 2006090290	A1	31-08-2006	AU 2006217545 A1 31-08-2006 BR PI0607887 A2 20-10-2009 CN 101128130 A 20-02-2008 EA 200701795 A1 28-02-2008 EP 1853126 A1 14-11-2007 JP 2008531008 A 14-08-2008 KR 20070107159 A 06-11-2007 ZA 200705690 A 30-07-2008
WO 2008059375	A2	22-05-2008	US 2008202533 A1 28-08-2008
WO 2008146176	A2	04-12-2008	US 2009014018 A1 15-01-2009
WO 2009094859	A1	06-08-2009	CN 101925403 A 22-12-2010 EP 2234711 A1 06-10-2010 JP 2011512122 A 21-04-2011 US 2010294290 A1 25-11-2010
GB 2015961	A	19-09-1979	CA 1113232 A1 01-12-1981 DE 2909547 A1 27-09-1979 JP 54126799 A 02-10-1979 US 4464434 A 07-08-1984
WO 2004098318	A1	18-11-2004	BR PI0410184 A 16-05-2006 CA 2521628 A1 18-11-2004 CN 1784150 A 07-06-2006 EP 1622470 A1 08-02-2006 JP 2006525108 A 09-11-2006 US 2006292280 A1 28-12-2006
EP 0464324	A2	08-01-1992	DE 69105833 D1 26-01-1995 DE 69105833 T2 11-05-1995 US 5186185 A 16-02-1993