

(19) World Intellectual Property Organization  
International Bureau



(43) International Publication Date  
11 July 2002 (11.07.2002)

PCT

(10) International Publication Number  
**WO 02/054302 A2**

(51) International Patent Classification<sup>7</sup>: **G06F 17/60**,  
H04N 7/26, 7/24, 7/08

(21) International Application Number: PCT/IB01/02629

(22) International Filing Date:  
17 December 2001 (17.12.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:  
09/753,844 3 January 2001 (03.01.2001) US

(71) Applicant: **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-00045 (FI).

(71) Applicant (for LC only): **NOKIA INC.** [US/US]; 6000 Connection Drive, Irving, TX 75039 (US).

(72) Inventors: **MEYERS, Stephan**; 1441 Butler Avenue, Los Angeles, CA 90025 (US). **HOLOPAINEN,**

**Jussi**; Näsilinnankatu 16 A 5, FIN-33210 Tampere (FI). **LUNDIN, Terje**; Näyttelijäkatu 19 F 25, FIN-33720 Tampere (FI). **MATTILA, Jouka**; Papinkatu 18 A 16, FIN-33200 Tampere (FI). **RASANEN, Eero**; Tahmelan Viertotie 11 as 8, FIN-33240 Tampere (FI).

(74) Agent: **STUART, Michael, C.**; Cohen, Pontani, Lieberman & Pavane, Suite 1210, 551 Fifth Avenue, New York, NY 10176 (US).

(81) Designated States (national): CN, JP, LC.


(84) Designated States (regional): European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR).

**Published:**

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: STATISTICAL METERING AND FILTERING OF CONTENT VIA PIXEL-BASE METADATA

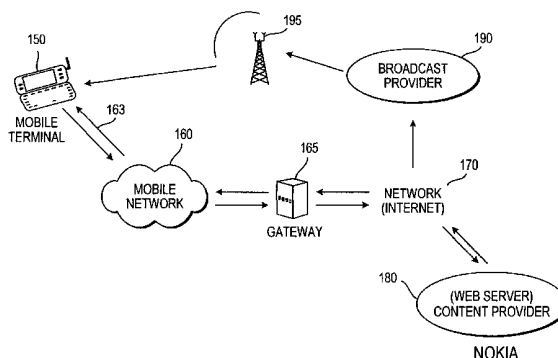

(57) Abstract: Data supplied to a display having a plurality of pixels comprises both content to be displayed and metadata that identifies the content of the respective pixel as being of a particular type by setting the metadata for each pixel to a value that is one of a predefined set of values. The identification of the content as being of a particular type enables the classification of the pixels on a per pixel basis into one or more categories. Pixels containing data for an advertisement can be identified and metered to determine the total display space they occupy and length of time they are displayed, which are both considered measures of the effectiveness of the advertisement. This metering can therefore be used to more equitably charge for advertising on web pages because an advertiser can be charged on the basis of what a user actually sees on the display. If only a percentage of the advertisement is visible, the advertiser pays an amount in proportion to the percentage of the advertisement that is visible. Pixels belonging to an advertisement can also be metered by a video game in a manner that gives an incentive to a game player to view advertisements. Additionally, metadata can be used to identify a pixel as containing objectionable content or some other information or type of content not desired by a user. The pixels containing objectionable or undesired content, which usually are pixels that display an object or portions thereof, can then be filtered out of the picture in a more precise way to either delete or leave a blurred image of the object or objectionable/undesirable portion thereof only, without hiding an entire screen of data.

Statistical Metering and Filtering of Content Via Pixel-  
Base Metadata

BACKGROUND OF THE INVENTION

5 1. Field of the Invention

This application relates to a method of using metadata to more precisely process content for display on a pixel-by-pixel basis.

10 2. Description of the Related Art

As the incremental cost of information and services delivered electronically approaches zero, consumers are unwilling or unable to pay in micropayments, i.e., electronic payments of miniscule amounts, such as a fraction of a Dollar or Euro, to receive this information, whether as a web page to be viewed with a web browser or in another electronic format. It is also too cumbersome and expensive to actually charge a consumer such a miniscule amount of money to view a single web page. Instead, consumers are granted free access to many, if not most, web pages. To generate revenue to cover at least a portion of the costs of delivering information and services electronically, businesses obtain "online" advertising from a third party "sponsor" to be displayed to visitors of the business' web site. The advertisements are displayed in a space or spaces on a web page devoted to the display of advertising. Typically, at least one of the advertisements is displayed as a banner at the top and/or bottom of the web page. The sponsor is often another web site operator who wishes to attract visitors to its web site using the advertisement; the sponsor may, but need not, have a relationship with the web site beyond the advertisement. Generally, a user need only

15  
20  
25  
30

click on the advertisement to transfer from the web page containing the advertisement to the sponsor's web page, which then appears in the web browser.

In the advertisement environment currently prevalent, sponsors of Internet advertisements often do not directly deal with the web site operator who displays the advertisement. Rather, an intermediary between the advertisement sponsor and the web site operator which carries the advertisement typically arranges the transaction, placing advertisements on web sites that attract a visitor having certain characteristics that match a desired audience for the sponsor's web site. The intermediary may also operate an ad server that downloads the advertisement to the user when the user visits a web page, exchange monies between the parties, and, in certain instances, track any transactions that result from a visit to the sponsor's web site.

The advertisers are generally charged for placing the advertisements on a web page on either a *per-clickthrough* or a *per-impression* basis. A *per-clickthrough* billing rate charges an advertising web site sponsoring the advertisement for each time a user clicked on the advertisement to visit the sponsor's web site. The *per-clickthrough* billing is usually metered by the sponsoring site and therefore only counts the number of actual visits to the sponsor's web site. This billing option is not always fair to the web site that displayed the sponsor's ad because, for technical or other reasons, clicking on the ad will not always cause the sponsor's web page to be displayed on the user's

terminal, which means that they will not get paid for the clickthrough.

A per impression billing rate charges an advertiser each time the advertisement makes an  
5 impression on a user's terminal. This occurs when a web page is accessed using a web browser and an ad server transmits an advertisement for placement on the web page. There is no requirement that the advertisement actually be displayed, at least in part because of the  
10 current technical difficulty, if not impossibility, of insuring that the advertisement is displayed. The number of impressions is counted by the distributor of the advertisement, usually the intermediary. In this case, there is no measurement of actual delivery of  
15 information to a user. So, for example, if an ad space is located at the top of a typical web page which cannot be displayed all at once on a single screen, a user scrolls down the web page before an advertisement is loaded into the banner advertisement space at the top of  
20 the web page, and the user does not return to the top of that web page, the user never sees that advertisement, but the advertiser is charged anyway. If, however, a user spends a lot of time looking at the part of the web page that contains the advertisement, the advertiser is  
25 not billed extra beyond the charge for the single ad impression. This may be unfair to advertisement sponsors.

As charging on either a per-clickthrough or a per-impression basis has its shortcomings, it would be  
30 advantageous and fairer to both the ad sponsor and the web site operator bearing the sponsor's advertisement banner to have a system and method which allows an

advertiser to be billed on a modified per-impression basis in which the advertiser is billed only for those impressions of advertisements onto a web page for the length of time the advertisements are actually viewed by  
5 a user and for the percentage of the advertisement viewed.

Moreover, as electronically-delivered information is presented and packaged more elaborately and in an increasingly sophisticated and complex way, it  
10 is challenging to establish a reasonable payment scheme for advertisers whose advertisements appear within a complex multimedia presentation. For example, an advertisement may be displayed within the context of a three-dimensional (3-D) presentation which might not be  
15 seen at all by a particular user, or might not even be readable because at a sharp angle to the viewer the advertisement is distorted or because the advertisement might be shown far in the distance and be difficult to discern. As another example, some users may choose to  
20 block advertisements from appearing on their screen by overlapping the window with the advertisement with another one or more windows or by some other software means. In these circumstances, it has not yet been determined how to best charge for an advertisement  
25 placed within the presentation.

At the same time, there is an increasing interest in blocking certain types of information. For example, users may not wish their children to view pornography or violent imagery. Also, many companies  
30 would like to have a means of preventing the playing of video games (video games) on office computers. While these examples offer scenarios where a user may wish to

block all of a particular type of content, in some cases, a user may wish to block only a portion of a multimedia document and permit the remainder of the document to be displayed, as only that portion may have  
5 offensive or otherwise undesirable material.

One means of blocking undesirable information is through the use of metadata (i.e. structured information about information) that is inserted into a document, on a per document basis, in a manner that is  
10 invisible to the user to classify the document as a whole as belonging to a particular class, such as pornographic material. Current filtering software can then be used to scan the document for metadata and block a full page or other multimedia object containing  
15 certain metadata, but, metadata is often not sufficiently precise or accurate. As a result, the filtering software often blocks content which should not be blocked or fails to block content which should be blocked. It would be advantageous to have a more  
20 precise way of filtering out exactly the information which needs to be filtered and leave the remaining unfiltered information for display.

Computer graphics displays display images using thousands of pixels generally arranged into rows  
25 and columns. The greater the number of pixels on a display of a particular size, the greater the display's resolution. Each pixel shows a small portion of the image and is represented in video memory by a certain number of bits, the number depending on the available  
30 amount of memory and the amount of information required for displaying the pixel. An RGB color graphics system comprises information for color pixels formed by red,

green and blue dots that essentially overlap to form the desired color. These colors are conventionally represented in a 32 bit graphics system using four 8 bit channels: three channels are used to encode information for pixels for each of the three colors, and a fourth channel, known as the alpha channel, provides transparency information for blending the three colors. The alpha channel is usually set to be identical for a group of adjacent pixels that form an object or portion of an object.

As graphics cards evolve to allow for more bits to be allocated per pixel, some of the additional bits have been used to add a virtual third dimension (a z-axis) to an image a *Z-buffer*. The *Z-buffer* is used in 3-D graphics to specify, where there are multiple objects that share an x- and y- coordinate, which objects or portions thereof should be visible and which should be hidden (by being overlaid with another object). Further bits may be added for other various and sundry purposes. It would be advantageous to utilize additional available bits to insert metadata for more precise metering and filtering of information.

#### SUMMARY OF THE INVENTION

It is therefore an object of the present invention to provide a system for providing discretionary viewing control in displaying data. The system comprises a display, comprising a plurality of pixels, for displaying data, and an integrated circuit in connection with the display for processing the data. The data to be processed includes at least a first portion, including payload data, and a second portion, including metadata, that are linked together. The

payload data provides content to each pixel of the plurality of pixels at the display independently and the metadata has a value selected from a predefined set of values and identifies each pixel at the display  
5 independently. The processable pixels at the display are thereby classified according to a particular metadata value selected from the predefined set of values.

It is another object of the present invention  
10 to provide a method for providing discretionary viewing control in displaying data. The method comprises providing a display comprising a plurality of pixels, receiving data, which data includes at least a first portion, including payload data, and a second portion,  
15 including metadata, that are linked together, supplying the received data to an integrated circuit in connection with the display, and processing content for each respective pixel based on an identification of each respective pixel by the metadata. The payload data  
20 provides the content to each pixel of the plurality of pixels at the display independently. The metadata identifies each respective pixel at the display independently by classifying each respective pixel according to a metadata value selected from a predefined  
25 set of values.

It is another object of the present invention to provide a method for metering visibility of an advertisement. The method comprises providing a display with a plurality of pixels and receiving data, which  
30 data includes at least a first portion, including payload data, and a second portion, including metadata, that are linked together. The payload data provides content to each of the plurality of pixels of the display independently, and the metadata identifies each



respective pixel of the display independently by classifying each respective pixel according to a particular metadata value selected from a predefined set of values. The method further comprises supplying the received data to an integrated circuit in connection with the display, processing the content for each respective pixel based on the identification of each respective pixel by the metadata, and periodically metering the number of pixels classified as advertisement by the metadata.

It is another object of the present invention to provide a method for providing an incentive to a player of a game. The method comprises providing a display having a plurality of pixels, and supplying data to an integrated circuit in connection with the display. The supplied data includes at least first and second portions of data that are linked together, the first portion including payload data and the second portion including metadata. The payload data provides content to each of the plurality of pixels of the display independently, and the metadata identifies each respective pixel of the display independently by classifying each respective pixel according to a metadata value selected from a predefined set of values. The method further comprises processing the content for each respective pixel based on the identification of each pixel by the metadata, opening a non-game item in response to a player activation of any of the pixels specified belonging to a non-game class, and awarding a reward to the player upon viewing the non-game item.

It is another object of the present invention to provide a data frame to be processed in an integrated circuit and displayed pixel-wise. The data frame comprises at least first and second portions of data

that are linked together, the first portion including payload data and the second portion including metadata. The payload data provides content to each pixel of a display independently, and the metadata identifies each pixel of the display independently by classifying each pixel according to a metadata value selected from a predefined set of values.

Other objects and features of the present invention will become apparent from the following detailed description considered in conjunction with the accompanying drawings. It is to be understood, however, that the drawings are designed solely for purposes of illustration and not as a definition of the limits of the invention, for which reference should be made to the appended claims. It should be further understood that the drawings are not necessarily drawn to scale and that, unless otherwise indicated, they are merely intended to conceptually illustrate the structures and procedures described herein.

20

#### **BRIEF DESCRIPTION OF THE DRAWINGS**

In the drawings:

FIG. 1 is a diagram of a system architecture for practicing the present invention using a fixed terminal according to one embodiment of the invention;

FIG. 2 is a diagram of a system architecture for practicing the invention using a mobile terminal according to another embodiment of the invention;

FIG. 3 is a schematic diagram of the components of a video signal according to one embodiment of the present invention having multiple channels input to the display;

FIG. 4 is a schematic representation of a display showing multiple windows of data, including a

content channel window in a first position and two advertisements;

FIG. 5 is a schematic representation as shown in FIG. 4 but with the content channel window shifted to  
5 a second position where it blocks from view a portion of one of the advertisements;

FIG. 6 is a screen shot of an image showing seminude male and female animated characters with the male characters pointing guns at each other according to  
10 one embodiment of this invention;

FIG. 7 depicts the screen shot of FIG. 6 showing the male characters partially obscured to obscure the nudity and violent content according to one embodiment of this invention;

15 FIG. 8 depicts the screen shot of FIG. 6 showing the nude portion of the male character more obscured than in FIG. 7 to further obscure the nudity and violent content according to one embodiment of this invention;

20 FIG. 9 depicts the screen shot of FIG. 6 with the nude portion of the female character obscured according to one embodiment of this invention;

FIG. 10 is a printout of a display showing multiple windows, including a web browser window, a video  
25 game window, a partially visible advertisement, and a window displaying a television feed; and

FIG. 11 is a printout of the display of FIG. 10 with an advertisement banner from the web browser window shown in the video game window.

30

#### DETAILED DESCRIPTION OF THE PRESENTLY PREFERRED EMBODIMENTS

To overcome limitations in the prior art described above, and to overcome other limitations that will become apparent upon reading and understanding the

present specification here is described a system and method for providing discretionary viewing control in displaying data pixel-wise and methods to meter.

In accordance with one embodiment of the invention, FIG. 1 shows a simplified drawing of a system for distribution of content having the illustrated components for practicing the present invention using a fixed terminal. The content distribution system includes a host computer 110 having a central processing unit (CPU) 115 for controlling and executing all necessary procedures, a display 120 for displaying graphics, a graphics board 130 or subsystem (integrated circuit) installed internally or externally to host computer 110 to interface between CPU 115 and display 120, and an input device 143 to enter commands, such as to order content for use at host computer 110, and information. Display 120 may be a monochrome display or a color display, such as an RGB display having separate channels for red, green and blue colors, and possibly alpha and/or Z-buffer channels. Graphics board 130 has an on-board memory 140 of a sufficient size to allocate bits on a per pixel basis to the content to be displayed and to metadata. Graphics board 130 also has a counter 145 to count the number of pixels in a given frame with a particular metadata value or to keep a running total or average over multiple frames, a timer 147 to measure the length of time pixels with the particular metadata value are displayed, and a filter application 149, either in hardware or software within graphics board 130 or elsewhere in host computer 110, to filter out certain pixels from being displayed. The graphics engine, which maintains graphics support functions, may be hardware-enabled or enabled in graphics software resident on host

computer 110, as is known to one skilled in the art. Host computer 110 in FIG. 1 is shown as a fixed terminal.

The content distribution system may further provide access from the host computer 110 to a network  
5 170 such as the Internet. The Internet connection may be used in the context of this application for various purposes, including to download a web page from a content provider (which may provide the content ordered by a user over a web server 180) to host computer 110 via network  
10 170 which receives the ordered content from the content provider 180 and forwards it to the display 120. The Internet connection may also be used to play a networked video game.

FIG. 2 shows an alternative system architecture  
15 in which a mobile terminal, such as a mobile telephone, a personal digital assistant (PDA), a laptop computer or another device, wirelessly links to a mobile communications network having capabilities equivalent to host computer 110. Mobile terminal 150 is  
20 bidirectionally linked to mobile network 160 over link 163 and mobile network 160 is in turn, bidirectionally linked to a network 170 such as the Internet via gateway 165. The network 170 is bidirectionally connected to a content provider 180 from whom content may be ordered.  
25 Content provider 180 may comprise a web server from which the content is accessible. The ordered content may be sent from content provider 180 to mobile terminal 150 via mobile network 160 which receives and forwards the content to mobile terminal 150, or, the ordered content  
30 may be sent to a broadcast provider 190 which may broadcast the content over transmitter 195 to mobile terminal 150.

As shown in the schematic representation of FIG. 3, where display 120 is an RGB display having a

plurality of pixels 125, data for each color pixel 125 of a data frame displayed on display 120 is allocated at least 48 bits in the video memory 140, represented by box 200, to represent the content of each pixel 125. Bits 0-39 are "payload data": 8 bits (bits 0-7) of the 48 bits are dedicated to a red channel 202, 8 bits (bits 8-15) to a blue channel 204, 8 bits (bits 16-23) to a green channel 206, 8 bits (bits 24-31) to a Z-buffering channel 208, and 8 bits (bits 32-39) to an alpha channel 210.

The invention is enabled by the allocation of an additional set 212 of bits, which may, for example, be 8 bits (bits 40-47), that are linked to the payload data and are used as "metadata" to identify the type of content provided for that pixel 125. (Each pixel is generally allocated payload data and metadata independently of the other pixels.) The payload data and metadata may be stored and streamed to display 120 as compressed data. While 8 bits is presented as an example, fewer or more than 8 bits can be allocated per pixel for metadata. It is unnecessary to dedicate a certain amount of graphics memory for metadata bits at all times. Rather, applications which use metadata bits may, request from the graphics engine that a certain range of metadata addresses be temporarily allocated while those applications are open.

The metadata designation of the type of content can be used in various ways. For example, as described in more detail below, it may specify that the pixel 125 belongs to an advertisement, belongs to an object for display that contains material such as violence or pornography not suitable for certain users such as children under a certain age, or belongs to a certain element in a video game that is a means of obtaining additional points.

Where metadata 212 identifies that a pixel 125 belongs to an advertisement, an improved scheme ("metric") for billing for advertisements can be devised. This scheme is predicated on the fact that an advertisement is only effective when it is displayed and visible to a user and the premise that the larger the advertisement the more effective the advertisement usually is. Thus, the graphics engine of graphics board 130 scans for metadata 212 and, upon detection, counts the number of pixels 125 in the displayed data frame having metadata 212 of a value indicating that the pixel 125 is part of an advertisement. A record may be maintained of the total number of pixels 125 displayed or an average over time using counter 145. The advertiser is charged using a "pixel x time" metric which multiplies the number of pixels 125 identified by metadata 212 as belonging to an advertisement that are visible on the display screen by the length of time that these pixels 125 are visible, as measured by timer 147, to determine how much the user is to be charged.

For example, in the sample screen 300 shown in FIG. 4, an email 310 is opened and a first advertisement 312 within the email 310 is visible in its entirety. The advertiser is charged for the number of pixels 125 occupied by the advertisement 312 multiplied by the amount of time the advertisement 312 is visible, e.g., 30 seconds. Also shown in FIG. 4 is a second advertisement banner 314 and a window 316 containing a content channel. The user may then decide to move the content channel window 316 to overlay a portion of first advertisement 312, as shown in FIG. 5, for whatever reason, such as to launch another program that will occupy a window to be displayed in the vacated space.

Using the "pixel x time" metric, since only a portion (approximately 5/6) of the advertisement 312 is now visible, the advertiser is charged for the display of the entire advertisement 312 during the time the entire advertisement 312 is displayed based on the "pixel x time" metric and, for the portion of time that the advertisement 312 is only partially visible, the advertiser is only charged for that portion of the advertisement 312 that is visible, based on the number of pixels 125 occupied by the portion of the advertisement 312 that is visible, multiplied by the length of time the pixels are displayed according to one embodiment of the invention. Similarly, if the number of pixels 125 of the advertisement 312 that are visible were changed a third time, the number of pixels 125 displayed times the length of time the pixels 125 are displayed would be added to the first two computations. Thus, there is a summation of the "pixel x time" metric over a total period of time that advertisement 312 is visible. Alternatively, the advertising charge can be based on the average number of pixels 125 of an advertisement that are displayed over the time that the advertisement is displayed. Either the summation or averaging technique can be used to charge for additional advertisements that are displayed, each advertisement 312 being individually metered.

Other ways in which the size of the advertisement 312 that is visible may change include a user scrolling down a web page (not shown) so that only a portion of an advertisement 312 remains visible or shrinking the size of a window 310 in which the advertisement 312 appears so that only a portion of the advertisement 312 appears. Using this metric, if the



advertisement 312 completely disappears from the screen  
the advertiser will not be charged at all.

This metric is more equitable than per-clickthrough and per-impression billing systems and  
5 conforms well with the current WWW practice of charging  
more for a larger banner advertisements. It is also an  
effective means of charging for those web pages that  
change banner advertisements during a fixed period of  
time without a page reload - e.g., advertisers are sold  
10 blocks of "160 x 40 pixels x 30 seconds" and the  
advertisements change after 30 seconds.

Moreover, there are Internet service providers  
who provide free Internet dialup access, but the service  
includes an application that forces an advertising  
15 window or advertising frame around the web browser  
window to be displayed on the screen during the Internet  
session. Because they find the advertisements  
intrusive, enterprising hackers have found ways to  
eliminate that window, and others more simply attempt to  
20 cover the advertisements with another window. The  
"pixel x time" metric provides a method of equitably  
charging advertisers who place these type of  
advertisements only for ads that are seen by the user,  
although this may not be an approach favored by the  
25 service providers.

This metric can also be applied to a new  
advertising scheme that many pundits believe will become  
prevalent in the new realm of digital high definition  
TV: advertising that appears in a banner-ad fashion in  
30 the border areas of television programs. When the  
"pixel x time" metric is combined with a bi-directional  
television delivery network (not shown), advertisers can

have exact information as to what content the television viewers are watching and will more precisely target their ads to the viewers. This more flexible system which provides for more channels of content may allow  
5 artists to create more adventurous content, since they will not have to rely on traditional formats, channels, program lengths, and other established media habits. This system also enables advertising that is more lucrative to the content provider while consuming less  
10 of the visual field of the television for a shorter length of time.

As with advertising, metadata 212 allocated to pixels 125 used to display an object can be used to classify the object as belonging to a particular  
15 category or categories, such as a category for particular information not desired by a user, like conduct that some may find objectionable and wish to block. For example, where the object is a nude person, pixels for that object may incorporate metadata the  
20 value of which reflect that classification. By scanning for and locating metadata 212 that identifies a pixel as containing objectionable content, filter 149, implemented either in hardware or software, can be set by a user, administrator, parent, etc., to filter out  
25 only the located objectionable object with a certain metadata setting so that the pixels 125 classified as belonging to that category are displayed as black or otherwise obscured such as by blurring or scrambling those pixels and only the silhouette of a person is  
30 visible. Moreover, filter 149 can be enabled to filter out or obscure objectionable content at different levels. For example, at one level faint outlines of the objectionable content can be left for viewing and at

another level all of the objectionable content can be obscured. After filtering the image, one can still view an unfiltered portion of the screen. The metadata does not block the red, green, blue, Z-buffer, or alpha channels 202, 204, 206, 208, 210; those channels continue to be fed through the graphics pipeline but the filter can be used to filter those pixels 125 from being displayed. By allowing for several different metadata values for a particular type of objectionable conduct, as described below, filter 149 can be used to distinguish between different categories of objectionable content.

One such application of the invention is in the video game industry, in particular for a video game that virtually displays three dimensional imagery (a "3-D game"). Metadata 212 can be used to filter out by deleting or obscuring (like by scrambling or blurring) certain undesirable portions of a screen, such as nudity, violence, or other objectionable material, without blocking the contents of the entire screen or the metadata 212 classifying pixels 125 as belonging to a game can be used to block the display of the entire game and prevent a user from playing.

FIGS. 6-9 illustrate an example of using the invention to filter out only certain undesirable portions of the screen. FIG. 6 is a screen shot 318 of an uncopyrighted image showing semi-nude male and female animated characters 319, 320. Male character 319 is pointing a gun 321 at another male character 322 who is pointing a gun 323 at character 319. Metadata associated with character 319 is used to indicate nudity and/or violent content, and metadata for character 322

indicates violent content. Filter 149 causes the respective pixels tagged with this metadata to be obscured when a filter setting is selected. One such filtered image is shown in screen shot 318' in FIG. 7 where the pixels for the characters 319, 322 are scrambled but certain outlines of their clothing and guns 321, 323 remain somewhat visible. This filtered shot 318' can be considered as a "PG-rated" version of an originally "R-rated" screen shot 318 (akin to the current movie rating system). A tamer screen shot 318'', which is a "G-rated" version of screen shot 318, is shown in FIG. 8. In this figure, the pixels depicting characters 319, 322 are scrambled more than in FIG. 7 so that the objectionable content is completely obscured. Of course, the violent content can be filtered without filtering the nudity and vice versa. FIG. 9 shows another modified version 318''' of screen shot 318 in which characters 319, 322 are fully visible and character 320 has metadata that indicates nudity. This metadata is detected by filter 149 which scrambles the pixels representing the nude portion of character 320. Alternatively, in FIGS. 6-9, the obscured portions can instead be completely blacked out.

A networked video game, possibly implemented over the Internet 170 and played collaboratively by two or more players, could be supported by advertising. Thus, another application of the invention could be as a mechanism to encourage players of networked video game to view advertisements by offering incentives to those who view the advertisements, as measured by a statistical engine. These incentives may take the form of a reward to the player who views the advertisement. The reward may take the form of issuing to the player

additional "energy", additional time to play the game, bonus points, additional weapons, extra powers, or the like, when a player views the advertisement. If, for example, a player's health in the game is at a low  
5 level, the player could position his avatar, i.e., the game character representing the player in the game (typically an animated character), near an advertisement covering a virtual wall in the video game, thereby causing the advertisement to fill the player's entire  
10 screen. While doing so, the player would be at risk of attack by other players and monsters, but the player's health would be "recharged" by a certain amount. Accordingly, the advertiser accomplishes its objective of having a user view an advertisement. The  
15 advertisement may appear within the video game window or outside that window. The incentive might be increased based on the number of pixels 125 occupied by the advertisement and the time that the advertisement is displayed.

20 For example, in FIG. 10, a printout of a sample computer screen 322 shows a game window 323 opened and an avatar 324 for the player. Also shown is a window 325 partially displaying a web page, a window 326 displaying a television feed that may have its own  
25 metadata, and a partially visible advertisement 328 obscured in part by adjacent overlaid windows 323, 325, 326. When a game character, controlled by a player, is running low on points which are needed to purchase ammunition for the character to destroy opponents, the  
30 player can obtain additional necessary points by highlighting or otherwise selecting an advertisement banner 330 in window 325 (or any other open window) and copying it to game window 323, possibly by drawing

arrow 333, to create another copy 332 of the advertisement 330 (FIG. 11). Advertisement 332 may appear in window 323 in any way, such as a two-dimensional object or as a three-dimensional object within a 3-D game. Advertisement 332 may be inserted in window 323 in another way as well, such as from a command in a pull-down menu to view an advertisement. The metadata bits 212 could also be used in window 326 of FIGS. 10 and 11 to block or blur "objectionable" content in a window, such as objectionable television content in window 323, as described above.

The number of metadata bits 212 allocated and the values that are selected to represent the various available categories into which the pixels 125 are classified may vary. As one example, a 3-D video game might request 8 values from the graphics engine (regardless of the manner in which the graphics engine implemented in hardware and software) with which to encode data regarding a pixel 125 as metadata. To obtain 8 possible values requires 3 metadata bits 212. Any other bits allocated as metadata bits 212 for the purposes of this example would go unused by the present invention. These 8 values could be used to categorize a pixel 125 as belonging to a category, such as belonging to a video game, containing objectionable content, or containing an advertisement, each category of which would be mutually exclusive of one another. In this example, a value 000 would be assigned to classify a pixel 125 as belonging to game content, the value 001 to objectionable game content, and the values 010 to 111 for advertisements, each value from 010 to 111 would designate a pixel as belonging to one of six possible advertisements that could be separately tracked, the advertisements appearing either all in one window or in

multiple open windows. Values 000 and 001 might then be designated as values that a filter could filter out so that a pixel having a metadata value of 000 or 001 would be blackened or blurred. Values 010 to 111 could be  
5 "statistical values" to track the number of pixels for an advertisement shown while viewing a video game for purposes of generating incentives to view the advertisement.

Upon completion of each frame, the graphics  
10 engine returns a statistical value for the number of pixels devoted to each of the advertisers mapped to metadata values of 010 to 111. Rather than being returned after each frame, this statistical value could be returned at less frequent intervals, as well, such as  
15 once per second.

In a windowing environment, multiple different windows might each request a range of values from the operating system, which might, especially in the case of metering advertising, need to be exclusive for each  
20 window for the graphics hardware to be able to meter. Thus, it may be necessary to allocate at least 16 or more bits for metadata. Using 3 bits for each window, 16 bits of metadata would provide metadata for five separate windows.

25 As one alternative to utilizing three bits to categorize the content of pixels as belonging to mutually exclusive categories of advertising, game content, and objectionable content, the metadata bits 212 could instead be used so as to categorize content  
30 represented in a pixel as belonging to more than one category. For example, one may utilize six metadata bits 212, to obtain a field in the form of "VVXXAA", where the bottom two bits "AA" are allocated to advertising, thereby allowing four values (00, 01, 10,

11) to distinguish among four advertisers, the middle two bits XX are allocated to objectionable/adult content (designating no objectionable conduct by the value 00, and providing for 3 levels of objectionable conduct 01, 10, 11), and the top two bits "VV" are allocated to violence (including no violent conduct 00, and 3 levels of violent conduct 01, 10, 11). These bits are "OR"ed together in a boolean operation into a mask to obtain VVXXAA: ----AA | --XX-- | VV---- = VVXXAA. The mask is used by the system to determine which pixels are acceptable to display and which pixels are unacceptable to display. Thus, a pixel from a children's game might be indicated by metadata having a value of "000000", a pixel from a banner ad for an adult web site might be indicated by metadata having a value of "001101" (violence level 0, adult content level 3, Advertisement #1), a second advertisement on the same page with a video game character wearing a revealing costume and holding a gun might be indicated by metadata having a value of "010110" (violence level 1, adult content level 1, Advertisement #2), and the famous photograph of a Vietnamese prisoner being executed point blank by a soldier on a historical web site might be indicated by metadata having a value of "110000" (violence level 3, adult content level 0, no advertising).

The OR'ed mask from the metadata is AND'ed with the OR'ed mask of the users preferences. For example, if the user's preference mask is 111100 (no violent or adult content, advertising untouched), and the metadata for one pixel is 001111 (an ad for, say, a pornographic web site), the result of 111100 & 001111 = 001100. If the result is non-zero, as it is in this case, then the pixel is blocked. In another example, if the users preference mask is 101100 (no strong violent



content, no adult content) and a pixel has data 010000 (say, an ad for a detective story, with a weakly violent image of a hand with a gun), the result is  $101100 \& 010000 = 000000$ , and the pixel can be displayed. In practice, it can get more complicated in situations where binary numbers do not work. Therefore, in certain situations, a "greater than/less than" comparison would be needed instead of a pure boolean operation like an "OR" operation.

10                Metadata bits 212 can be allocated in many other different ways and for other purposes. For example, eight or sixteen metadata bits 212 can be used to further categorize the content of pixels 125, such as identifying additional advertisements, offering  
15 additional levels by which to categorize content as adult-oriented, violent, etc., or utilizing 8 bits for filtering and 8 bits for statistical data. The bits may also be allocated to utilize fewer total metadata bits 212 to accomplish the tasks of metering and filtering of  
20 content. Some of these approaches utilize fewer bits by allocating values for a larger selection space, other than on a per pixel basis. Thus, for example, a set of four or more adjacent pixels 125 might all be designated as having violent content so a single value for all four  
25 or more pixels 125 could record this fact, rather than allocating one or more bits per pixel for this purpose.

Thus, while there have shown and described and pointed out fundamental novel features of the invention as applied to a preferred embodiment thereof, it will be  
30 understood that various omissions and substitutions and changes in the form and details of the devices illustrated, and in their operation, may be made by those skilled in the art without departing from the spirit of the invention. For example, it is expressly

intended that all combinations of those elements and/or method steps which perform substantially the same function in substantially the same way to achieve the same results are within the scope of the invention.

5 Moreover, it should be recognized that structures and/or elements and/or method steps shown and/or described in connection with any disclosed form or embodiment of the invention may be incorporated in any other disclosed or described or suggested form or embodiment as a general  
10 matter of design choice.

CLAIMS

1. A system for providing discretionary viewing control in displaying data, comprising:

a display for displaying data, the display  
5 comprising a plurality of pixels; and

an integrated circuit in connection with said display for processing said data,

said data including at least first and second portions of data that are linked together, the  
10 first portion including payload data and the second portion including metadata,

said payload data providing content to each pixel of the plurality of pixels at the display independently and said metadata has a value selected  
15 from a predefined set of values and identifies each pixel at the display independently;

whereby the processable pixels at the display are classified according to a particular metadata value selected from the predefined set of  
20 values.

2. The system claim 1, wherein the integrated circuit comprises a filter for one of blocking and obscuring the content of each of the plurality of pixels that has a metadata value that exceeds a discretionary  
25 threshold value without preventing the display of the content of the plurality of pixels that does not have a metadata value that exceeds the discretionary threshold value.

3. A method for providing discretionary  
30 viewing control in displaying data, comprising:

providing a display comprising a plurality of pixels;

receiving data;

said received data including at least first and second portions of data that are linked together, the first portion including payload data and  
5 the second portion including metadata,

said payload data providing content to each pixel of the plurality of pixels at the display independently, and said metadata identifying each respective pixel at the display independently, said  
10 identifying comprising classifying each respective pixel according to a metadata value selected from a predefined set of values;

supplying said received data to an integrated circuit in connection with the display; and  
15 processing the content for each respective pixel based on the identification of each respective pixel.

4. The method of claim 3, further comprising one of blocking and obscuring the content of each of the  
20 plurality of pixels that has a metadata value exceeding a discretionary threshold value, and displaying the content of the remaining plurality of pixels that are not blocked or obscured.

5. The method of claim 3, wherein the display  
25 is a display on a wireless terminal, and the step of supplying data to the display comprises supplying said data to the display on the wireless terminal.

6. A method for metering visibility of an advertisement, comprising:  
30 providing a display with a plurality of pixels;

receiving data,

said received data including at least first and second portions of data that are linked together, the first portion including payload data and  
5 the second portion including metadata,

said payload data providing content to each of the plurality of pixels of the display independently, and said metadata identifying each respective pixel of the display independently, said  
10 identifying comprising classifying each respective pixel according to a particular metadata value selected from a predefined set of values;

supplying said received data to an integrated circuit in connection with the display;

15 processing the content for each respective pixel based on the identification of each respective pixel; and

periodically metering the number of pixels classified as advertisement by the metadata.

20 7. The method of claim 6, wherein the metering step comprises determining an advertising fee to charge to the advertiser based on the metering of the displayed portion of the advertisement.

25 8. The method of claim 7, wherein the advertisement comprises a portion that is not displayed, and the method further comprises charging the advertising fee based on the metered number of pixels that display the pixels classified as the advertisement multiplied by the length of time that the pixels classified as the  
30 advertisement are displayed without charging for the portion of the advertisement that is not displayed.

9. A method for providing an incentive to a player of a game, comprising;

providing a display having a plurality of pixels;

5 supplying data to an integrated circuit in connection with the display,

said data including at least first and second portions of data that are linked together, the first portion including payload data and the second  
10 portion including metadata,

said payload data providing content to each of the plurality of pixels of the display independently, and said metadata identifying each respective pixel of the display independently, said  
15 identifying comprising classifying each respective pixel according to a metadata value selected from a predefined set of values;

processing the content for each respective pixel based on the identification of each pixel;

20 opening a non-game item in response to a player activation of any of the pixels specified belonging to a non-game class; and

awarding a reward to the player upon viewing the non-game item.

25 10. The method of claim 9, wherein the non-game item comprises an advertisement.

11. The method of claim 10, wherein the step of awarding the reward comprises increasing the reward awarded based on the total number of the pixels  
30 classified as the advertisement as identified by the metadata.


12. The method of claim 10, wherein the step of awarding the reward comprises increasing the reward awarded based on the length of time the pixels display the advertisement as identified by the metadata.

5           13. The method of claim 9, wherein the game is a game played collaboratively by at least two players on the Internet.

14. A data frame to be processed in an integrated circuit and displayed pixel-wise, comprising:  
10           at least first and second portions of data that are linked together, the first portion including payload data and the second portion including metadata;  
            said payload data providing content to each pixel of a display independently, and said metadata  
15           identifying each pixel of the display independently, said identifying comprising classifying each pixel according to a metadata value selected from a predefined set of values.

15           15. The data frame of claim 14, wherein the content comprises multiple channels of content.

1/10

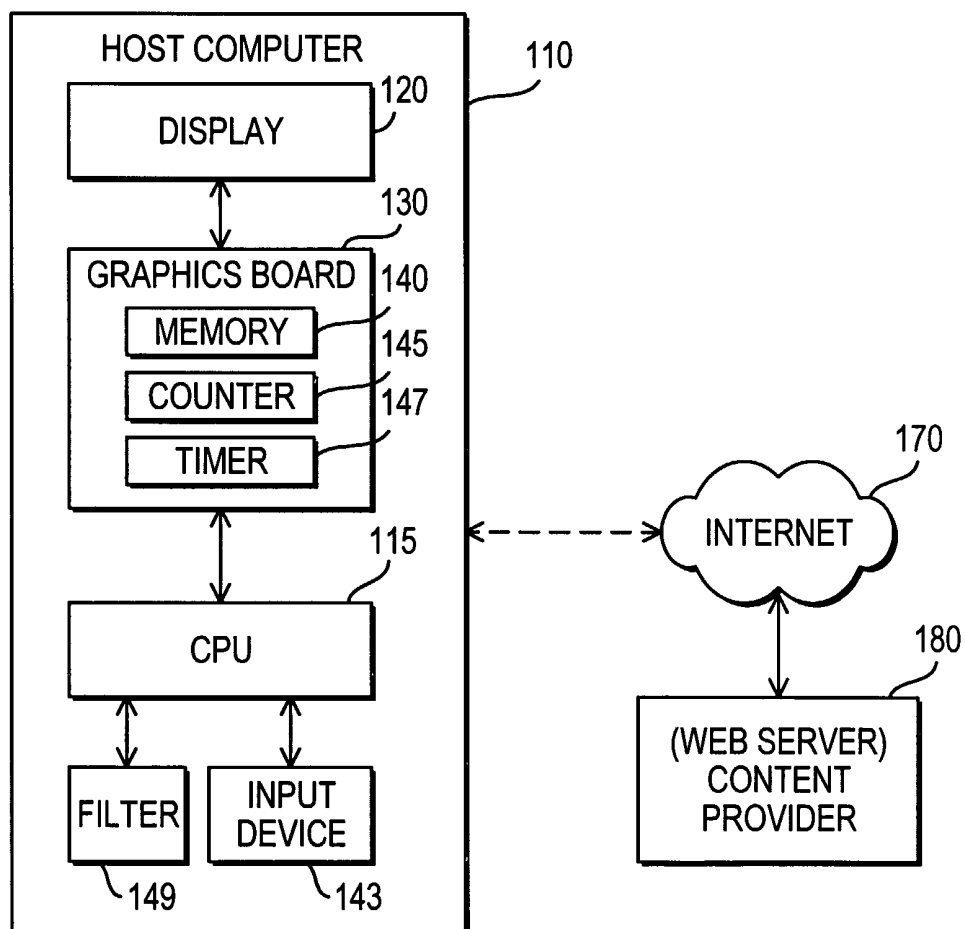*FIG. 1*



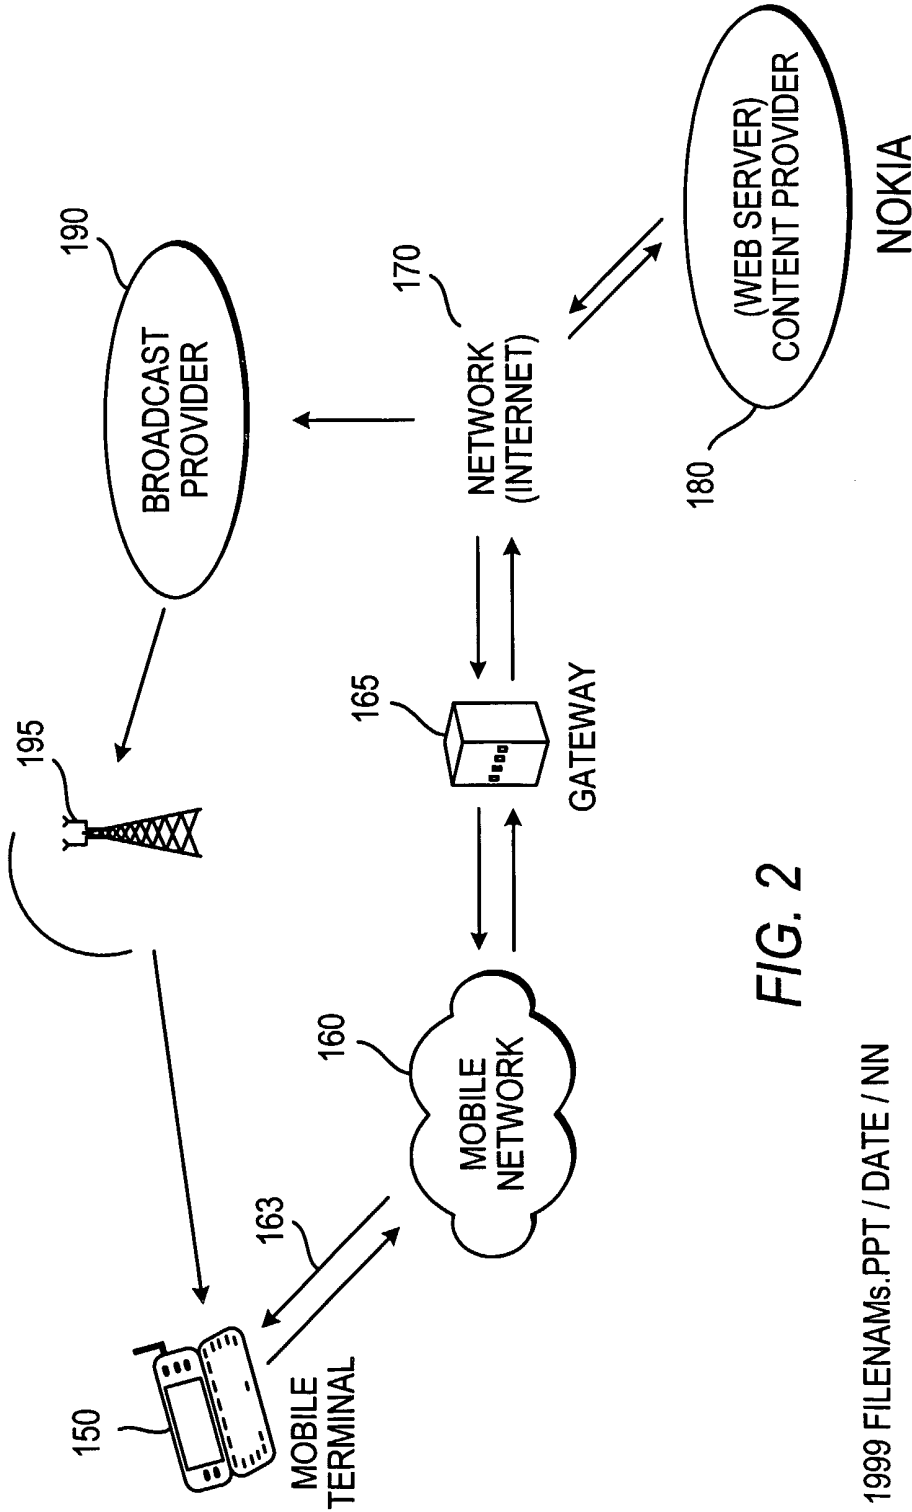


FIG. 2

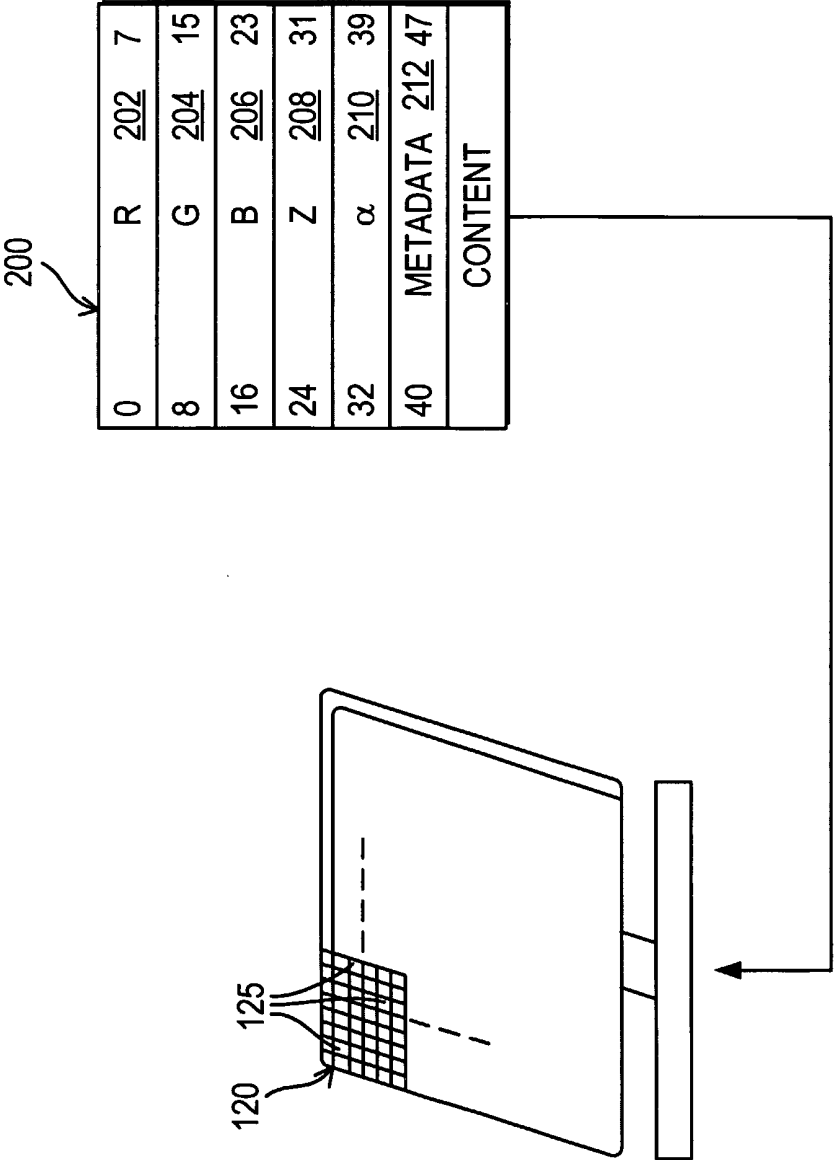


FIG. 3

FIG. 4



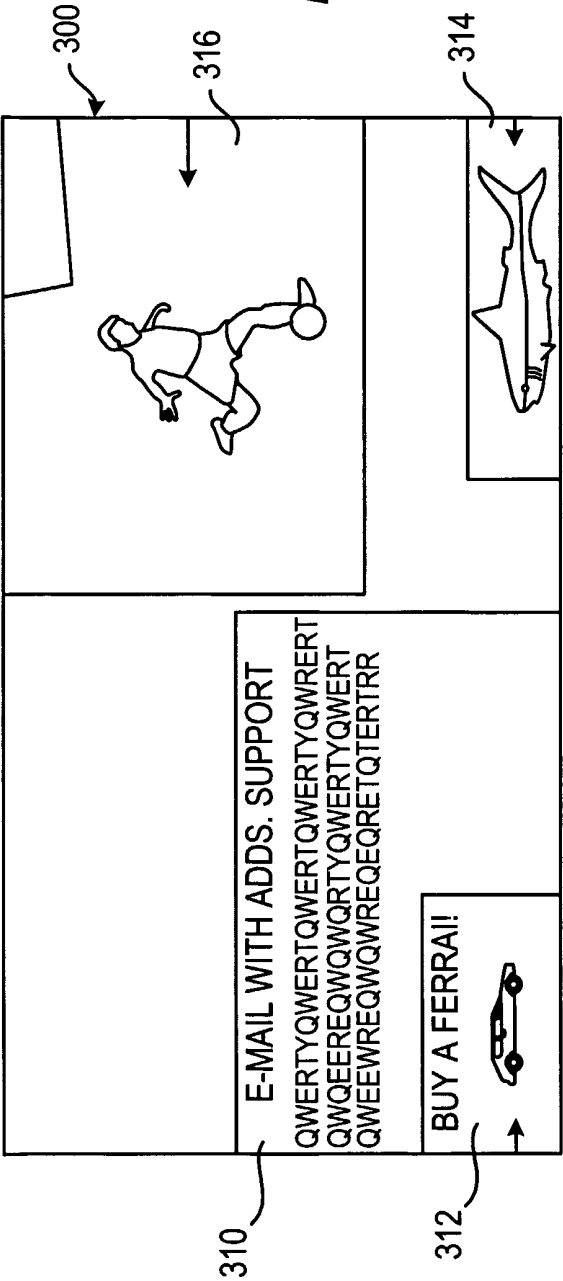



FIG. 5

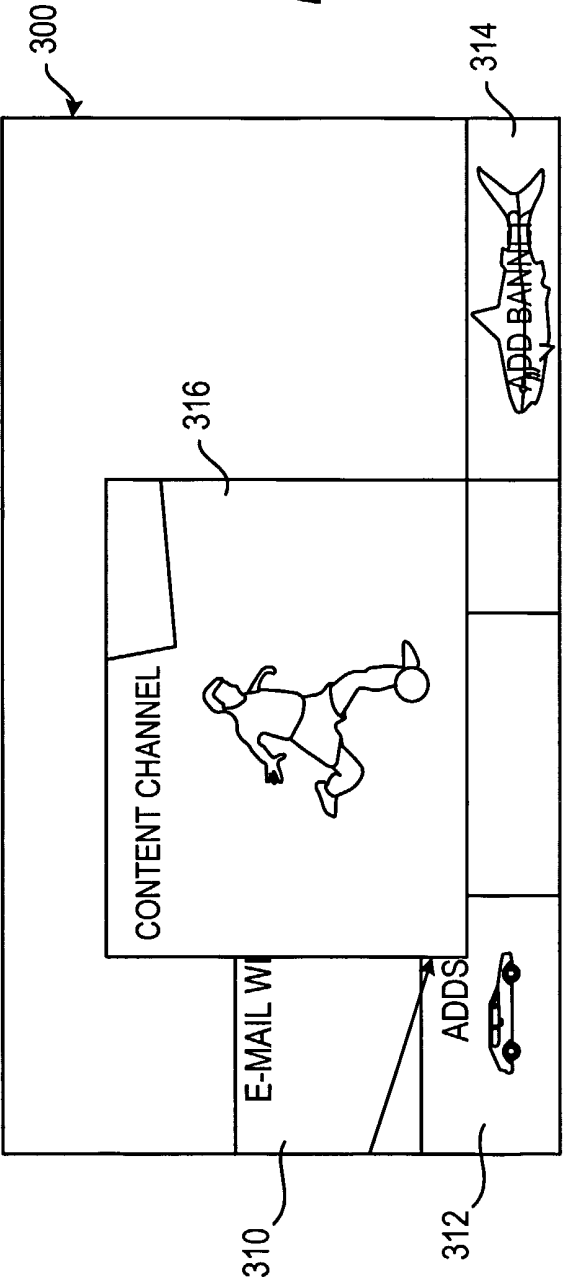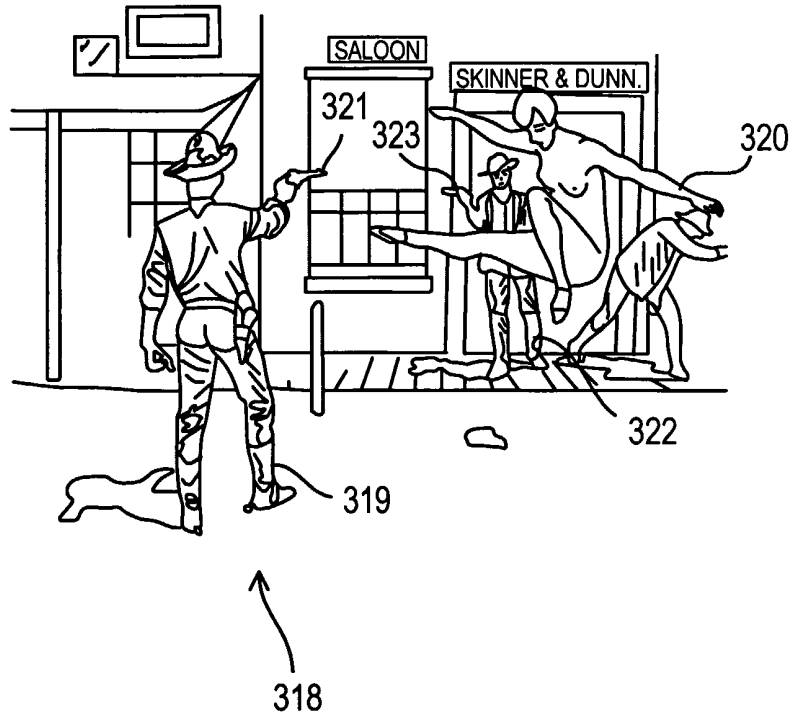


5/10

**FIG. 6**

6/10

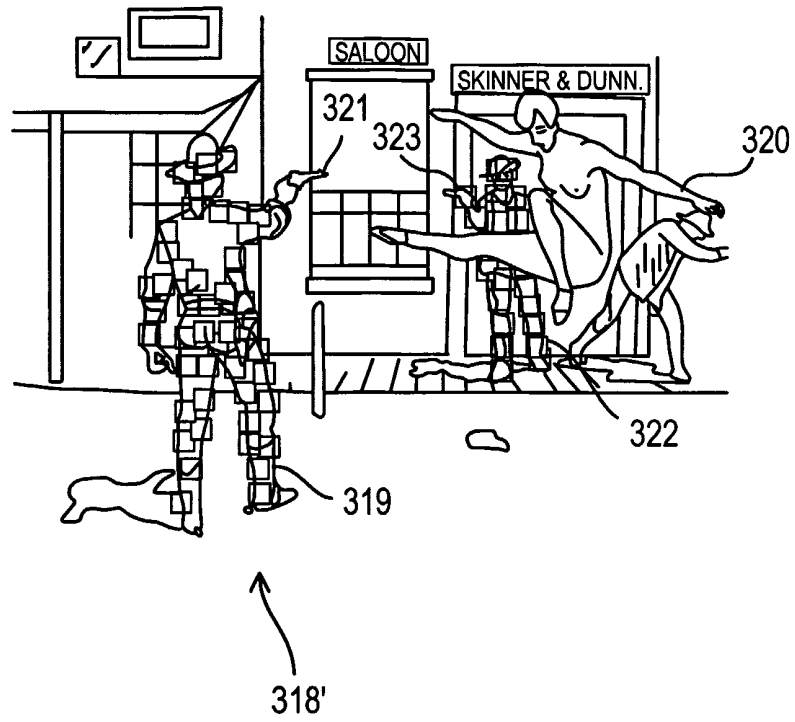**FIG. 7**

7/10

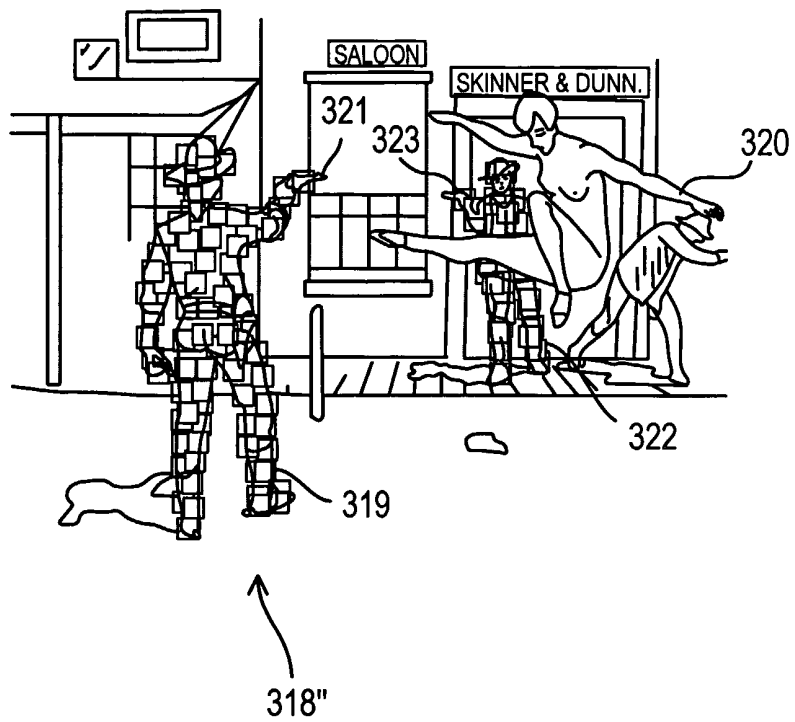*FIG. 8*

8/10

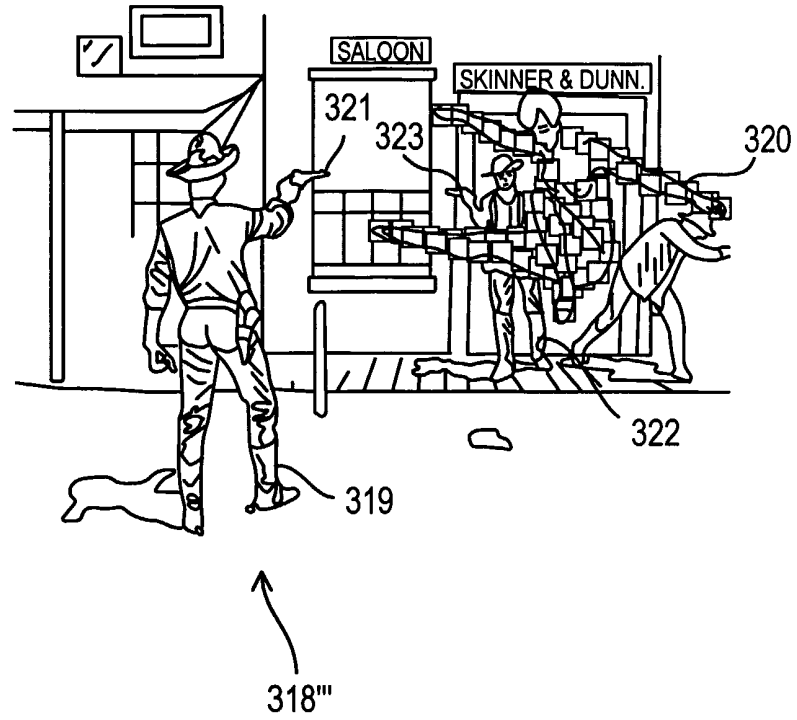


FIG. 9

FIG. 10

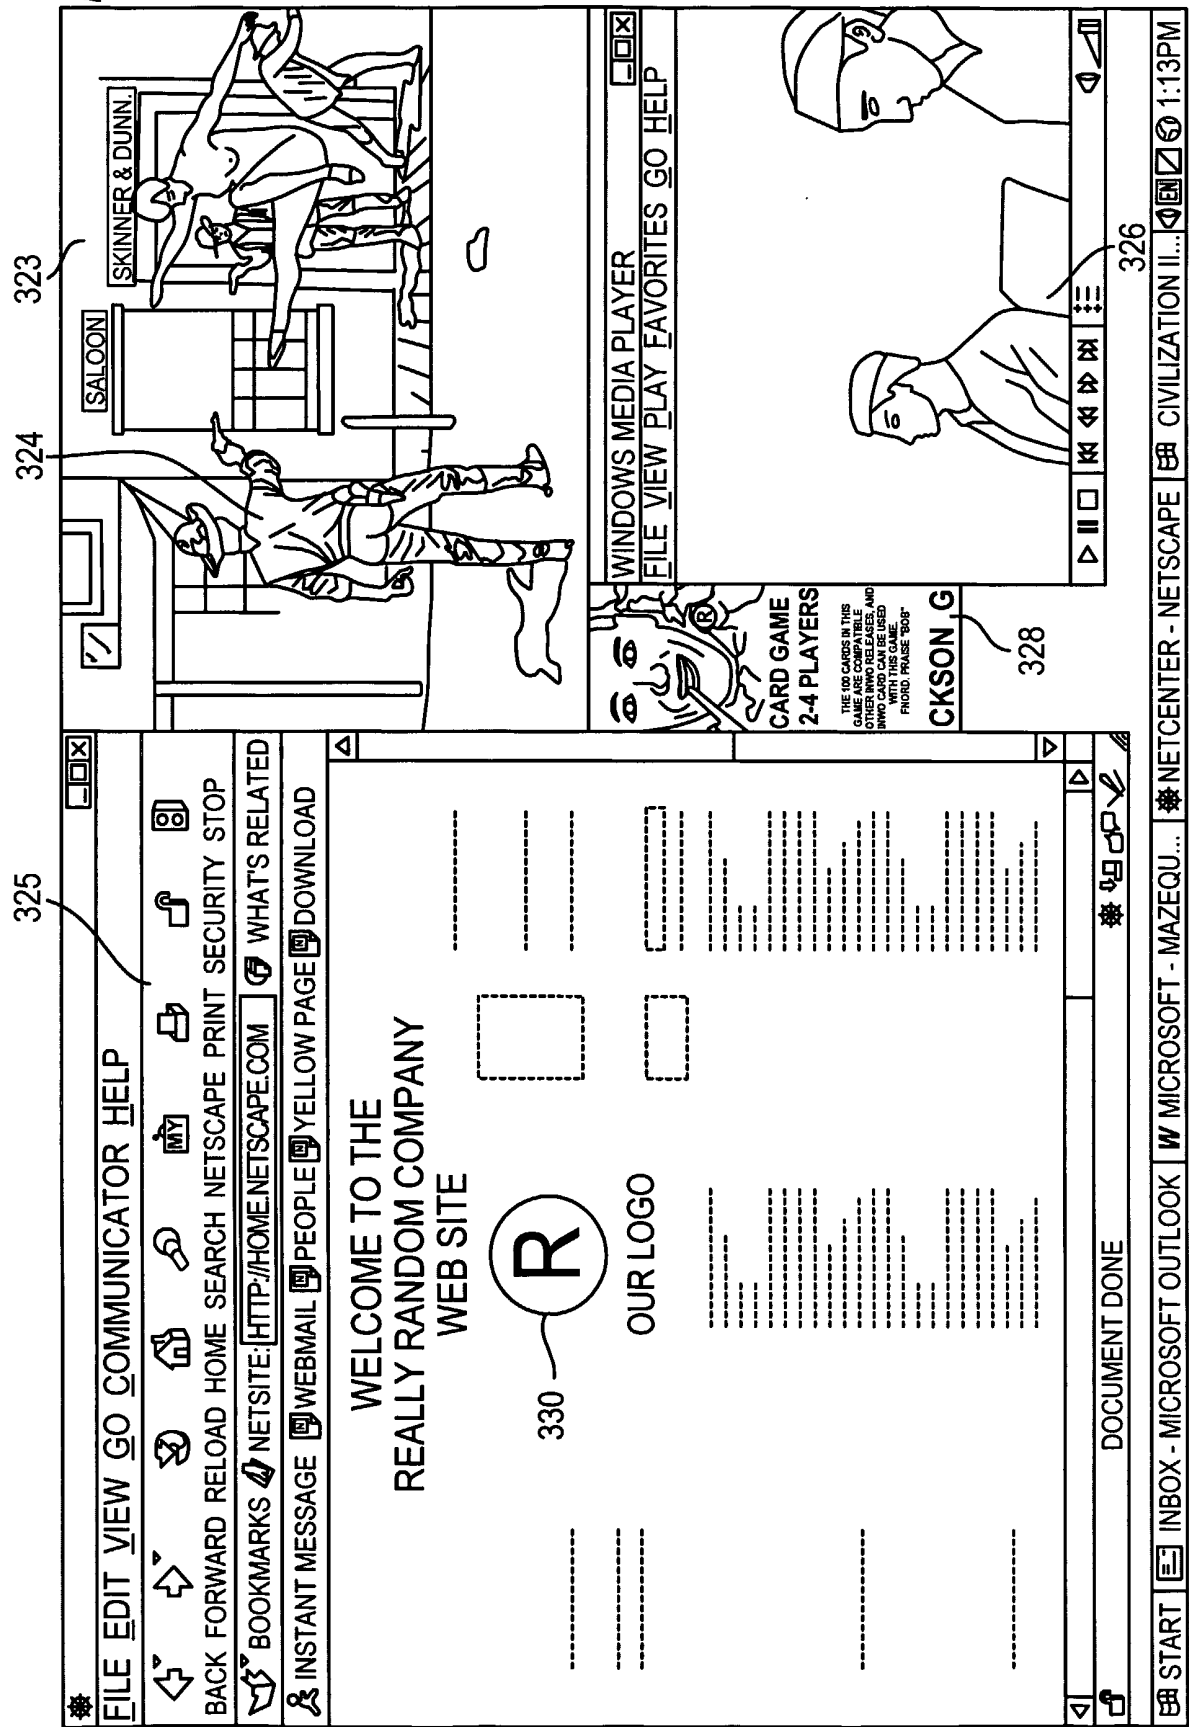




FIG. 11

