




(86) Date de dépôt PCT/PCT Filing Date: 2005/08/08
(87) Date publication PCT/PCT Publication Date: 2006/02/23
(85) Entrée phase nationale/National Entry: 2007/02/12
(86) N° demande PCT/PCT Application No.: US 2005/028183
(87) N° publication PCT/PCT Publication No.: 2006/020591
(30) Priorité/Priority: 2004/08/12 (US10/916,657)

(51) Cl.Int./Int.Cl. *A47J 37/07* (2006.01),
A47J 33/00 (2006.01), *A47J 37/00* (2006.01)
(71) Demandeur/Applicant:
ORIGINAL IDEAS, INC., US
(72) Inventeur/Inventor:
DEMARS, ROBERT A., US
(74) Agent: OYEN WIGGS GREEN & MUTALA LLP

(54) Titre : ETAGERES ESCAMOTABLES POUR BARBECUE
(54) Title: STORABLE SHELVES FOR A BARBECUE

(57) **Abrégé/Abstract:**

A barbecue has a pair of storable shelves mounted on opposite portions of the barbecue housing adjacent the upper open end of the housing. The shelves are rotatable about generally vertical pivot axes so that each can be swung between a first position for use outside the housing and a second position for storage inside the housing. The shelves are positioned, one over the other, for storage inside the housing. when each is in the second position. Swinging movement of each of the shelves between the first and second position is provided by a downwardly extending shaft at an end of a bracket on which the shelf is mounted, which shaft is rotatably received within a mating vertical aperture in a mounting assembly mounted at the inside surface of the barbecue housing. Recesses in the shelf brackets permits the brackets to be positioned over and to nest on the rim of the housing when in the first position of the housing.

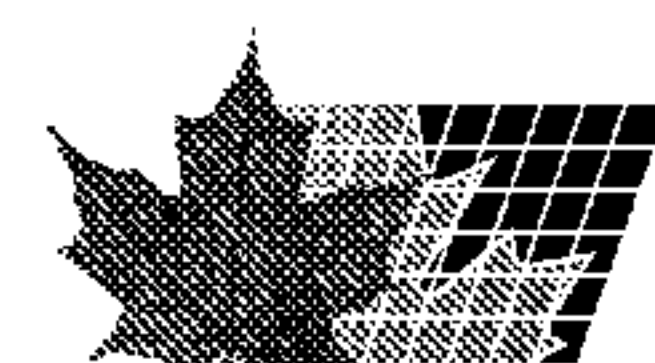

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
23 February 2006 (23.02.2006)

PCT

(10) International Publication Number
WO 2006/020591 A2

(51) International Patent Classification:
F24B 3/00 (2006.01)

(21) International Application Number:
PCT/US2005/028183

(22) International Filing Date: 8 August 2005 (08.08.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
10/916,657 12 August 2004 (12.08.2004) US

(71) Applicant (for all designated States except US): **ORIGINAL IDEAS, INC.** [US/US]; 23548 Calabasas Road, Suite 203, Calabasas, CA 91302 (US).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **DEMARS, Robert, A.** [US/US]; 80-585 Via Talavera, La Quinta, CA 92253 (US).

(74) Agents: **SCHERLACHER, John, P.** et al.; Hogan & Hartson L.L.P., Biltmore Tower, 500 South Grand Avenue, Suite 1900, Los Angeles, CA 90071 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).


Published:

— without international search report and to be republished upon receipt of that report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: STORABLE SHELVES FOR A BARBECUE

(57) Abstract: A barbecue has a pair of storable shelves mounted on opposite portions of the barbecue housing adjacent the upper open end of the housing. The shelves are rotatable about generally vertical pivot axes so that each can be swung between a first position for use outside the housing and a second position for storage inside the housing. The shelves are positioned, one over the other, for storage inside the housing. when each is in the second position. Swinging movement of each of the shelves between the first and second position is provided by a downwardly extending shaft at an end of a bracket on which the shelf is mounted, which shaft is rotatably received within a mating vertical aperture in a mounting assembly mounted at the inside surface of the barbecue housing. Recesses in the shelf brackets permits the brackets to be positioned over and to nest on the rim of the housing when in the first position of the housing.



WO 2006/020591 A2

STORABLE SHELVES FOR A BARBECUE

Background of the Invention

Area of the Art

The present invention relates to cooking appliances such as barbecues,
5 and more particularly to barbecues having one or more shelves associated
therewith.

Description of the Prior Art

It is known in the art to provide a cooking appliance such as a barbecue
having one or more shelves associated therewith. The shelves may be movably
10 attached to the barbecue so that they can be moved into a position of use such
as outside of the barbecue for storage of food and implements thereon, and also
movable into a position for storage of the shelves such as at the inside of the
barbecue. Published U.S. Application No. 2003/0192526 of DeMars shows
various embodiments of a barbecue in which opposite shelves are folded over for
15 storage inside the barbecue and are unfolded to the outside of the barbecue for
use. Published U.S. Application No. 2003/0111070 of DeMars and U.S. Patent
6,606,987 of DeMars have similar disclosures. Published U.S. Application No.
2003/0111070 of DeMars also shows a barbecue with hinging shelves.

Still further examples of barbecues with hinging shelves are provided by
20 published U.S. Application No. 2003/0079737 of Wu and U.S. Patent 6,513,515
of Wu.

Published U.S. Application No. 2002/0050274 of Hamilton et al. describes
a portable stove having opposite hinging shelves that cover the top of the stove
when pivoted to an inner position. U.S. Patent 5,016,607 of Doolittle describes
25 opposite shelves which remain outside of a barbecue and which are hinged and
can be raised and lowered. The hinges have latching mechanisms to latch the
shelves in a raised position. U.S. Patent 4,166,413 of Meszaros also describes a
barbecue having shelves which are raised and lowered. U.S. Patent 2,541,528
of McAvoy describes an arrangement of opposite hinging shelves similar to that
30 in published U.S. Application No. 0050274 of Hamilton.

The various examples of the prior art discussed above describe barbecues having shelves which are hinged or otherwise pivotable about horizontal axes so that they fold to the inside of the barbecue for storage and to the outside of the barbecue for use. However, it may be desirable to provide other

5 configurations and arrangements in which shelves are movable between a position on the inside of the barbecue for storage and a position on the outside of the barbecue for use.

Summary of the Invention

The present invention provides a barbecue having at least one storable
10 shelf rotatable about a generally vertical pivot axis between a storage position inside the housing of the barbecue and a use position at the outside of the barbecue housing. The housing of the barbecue has an open upper end and inner and outer surfaces. A mounting assembly is mounted on the inner surface of the housing adjacent the open upper end and has a generally vertical
15 aperture therein. The at least one shelf includes an elongated shelf bracket having a shaft extending downwardly from an end thereof, with the shaft being rotatably received within the generally vertical aperture in the mounting assembly. A flat, generally disk-shaped shelf is mounted on the elongated shelf bracket. The rotatable receipt of the shaft within the generally vertical
20 aperture enables pivoting movement of the elongated shelf bracket relative to the mounting assembly to swing the shelf between a storage position inside the housing and a use position outside the housing.

The housing has a rim at the open upper end thereof between the inner and outer surfaces. The elongated shelf bracket has a recess therein at the end
25 thereof adjacent the shaft which receives the rim of the housing to seat the shelf bracket on the rim when the shelf is swung into the use position outside the housing. The elongated shaft bracket also has a portion thereof adjacent the recess which rests on and is supported by a handle mounted on the outer surface of the housing when the shelf is in the use position outside the housing.
30 A second recess in the elongated shelf bracket receives the lower edge of a lid

which may be placed over the open upper end of the housing, when the shelf is in the use position outside the housing.

Preferably, the barbecue has a pair of the shelves mounted on opposite portions of the housing. The pair of shelves are positioned, one over the other, for storage inside the housing when each of the shelves is swung into the storage position. When in the use positions, each of the shelves extends outwardly from the opposite sides of the barbecue housing. The barbecue has an opposite pair of the handles which provide support for the elongated support brackets of the shelves in addition to the positioning of the rim within the recesses in the elongated support brackets when the shelves are in the use position outside of the barbecue housing.

Description of the Figures

FIG. 1 is a front sectional view of a barbecue with storable shelves in accordance with the invention.

FIG. 2 is an exploded perspective view of one of the shelf assemblies of the barbecue of FIG. 1.

FIG. 3 is an enlarged sectional view of a portion of FIG. 1 showing the details of the manner in which one of the shelf assemblies is positioned and supported when in the use position outside of the barbecue.

FIG. 4 is a front sectional view similar to the view of FIG. 1 but with the two shelf assemblies positioned in overlapping relation for storage within the barbecue.

Detailed Description of the Invention

FIG. 1 shows a barbecue having storable shelves in accordance with the invention. The barbecue 10 includes a housing 12 mounted at the top of an upright stand 14. The housing has an upper open end 16 having a circular rim 18 between an inside surface 20 and an outside surface 22 of the housing 12. The open upper end 16 may be enclosed by a mating lid 24 which can be placed over the rim 18 of the housing 12.

The barbecue 10 includes a grate 26 positioned at the inside of the housing 12 just below the rim 18. Food to be cooked is placed on the grate 26

and is heated by charcoal containing apparatus 28 positioned below the grate 26. Such details are unimportant to the storable shelves in accordance with the present invention. However, reference is made to co-pending application Serial No. 10/359,804 filed on February 7, 2003 by Alan D. Crawford et al. and
5 entitled "QUICK START BARBECUE", for a detailed example of a barbecue which may be used with the storable shelves in accordance with the present invention.

In accordance with the invention, the barbecue 10 has a pair of opposite shelf assemblies 30 and 32 mounted on the housing 12 at opposite sides thereof.
10 The shelf assemblies 30 and 32 are pivotable about vertical axes, and can be swung between use positions outside of the housing 12 and storage positions within the housing 12. The shelf assemblies 30 and 32 are shown in the use positions outside of the housing 12 in the view of Fig. 1. When in the use positions, the shelf assemblies 30 and 32 extend outwardly from the opposite
15 sides of the housing 12 with a function to receive and support food containers, cooking utensils and other such objects. When the shelf assemblies 30 and 32 are swung to the opposite storage positions, they reside in overlapping relation for storage within the housing 12, as shown in Fig. 4.

Fig. 2 is an exploded perspective view of one of the shelf assemblies 30.
20 The other shelf assembly 32 is of identical configuration. As shown in Fig. 2, the shelf assembly 30 includes an elongated shelf bracket 34 on which is mounted a shelf 36. In the present example, the shelf 36 is of thin, disk-shaped configuration, and is secured to the shelf bracket 34 by a plurality of screws 38 which extend upwardly through holes 40 in the elongated shelf bracket 34 and
25 into the shelf 36.

The elongated shelf bracket 34 has an end 42 which extends by a small amount beyond an adjacent edge 44 of the shelf 36. The end 42 has a generally cylindrical shaft 46 extending downwardly therefrom. The end 42 of the shelf bracket 34 also has a recess 48 therein adjacent the shaft 46.

30 As shown in Figs. 1 and 4, the barbecue 10 is provided with an opposite pair of mounting assemblies 50. The mounting assemblies 50 which are mounted on the inside surface 20 of the housing 12 just below the rim 18 of the

open upper end 16 are each provided with a vertical aperture 52 extending downwardly therethrough. Each of the vertical apertures 52 is of generally cylindrical configuration and receives a shaft 46 of the shelf bracket 34 of one of the shelf assemblies 30 and 32. The shafts 46 are free to rotate within the apertures 52, thereby permitting the shelf assemblies 30 and 32 to undergo swinging motion between use positions outside the barbecue housing 12 and the storage positions inside of the housing 12. The shafts 46 can also undergo vertical movement relative to the apertures 52, permitting the shelf assemblies 30 and 32 to be raised for movement between the storage and use positions as well as for storage in overlapping relationship within the housing 12 as described below.

Fig. 3 is a detailed view of the right hand shelf assembly 32 when in the use position outside of the barbecue housing 12. In this position, the rim 18 of the housing 12 extends into the recess 48 of the elongated shelf bracket 34, enabling the shelf assembly 32 to nest on the rim 18. At the same time, a portion 54 of the shelf bracket 34 rests on a handle 56 attached to the outside surface 22 of the barbecue housing 12, to provide further support for the shelf assembly 32. The left hand shelf assembly 30 functions in similar fashion, and nests on the rim 18 and is supported in part by a handle 58 mounted on the outside surface 22 of the barbecue housing 12 opposite the handle 56.

As shown in FIG. 3 each of the elongated shelf brackets 34 has a recess 60 extending therein from an upper surface thereof adjacent the first recess 48. The recess 60 receives a lip at a lower edge of the lid 24 therein when the shelf is in the use position and the lid 24 is placed over the open upper end 16 of the housing 12.

The opposite shelf assemblies 30 and 32 are placed in the use positions outside of the barbecue housing 12 by lifting and then lowering each shelf assembly 30 and 32 as necessary so that the recess 48 in each shelf bracket 34 is positioned over the rim 18 of the housing 12, and the portion 54 of each is disposed on a respective one of the handles 56 and 58. This position is shown in Fig. 1 as well as in the detailed view of Fig. 3.

Movement of the shelf assemblies 30 and 32 into the housing 12 for storage therein is accomplished by again lifting each of the shelf assemblies 30 and 32 as necessary so that the rim 18 is free of the recess 48 in each of the shelf brackets 34. Each of the shelf assemblies 30 and 32 is then swung
5 inwardly, allowing the shafts 46 to rotate within the vertical apertures 52 in the mounting assemblies 50, until the shelf assemblies 30 and 32 are disposed at the inside of the housing 12. The shelf assemblies 30 and 32 are moved into the storage position at the inside of the housing 12 in succession, with one being moved into the storage position followed by the other being moved into the
10 storage position. In the example of Fig. 4, the right hand shelf assembly 32 is the first to have been moved into the storage position. Where it reaches the interior of the housing 12, the shelf assembly 32 is lowered onto the grate 26. Again, upward and downward movement of the shelf assemblies 30 and 32 as they are swung back and forth in this fashion is permitted by vertical
15 movement of the shafts 46 within the vertical apertures 52. Following disposition of the right hand shelf assembly 32 onto the grate 26, the left hand shelf assembly 30 is raised and swung to the inside of the housing 12 where it is placed on top of the first shelf assembly 32. The order of placement of the shelf assemblies 30 and 32 at the interior of the housing 12 is unimportant, and the
20 left hand shelf assembly 34 can be positioned there first with the right hand shelf assembly 32 being next swung into the interior of the housing 12 for placement on top of the shelf assembly 30.

What is claimed is:

1. A barbecue comprising the combination of a housing having an open upper end and a pair of storable shelves mounted on opposite portions of the housing adjacent the upper open end thereof and rotatable about generally vertical pivot axes, whereby each of the shelves can be swung between a first position for use outside the housing and a second position for storage inside the housing.

2. A barbecue according to claim 1, wherein the pair of shelves are positioned, one over the other, for storage inside the housing when each is in the second position.

3. A barbecue according to claim 1, wherein each of the pair of storable shelves has a shaft extending downwardly therefrom and rotatably received within a generally vertical aperture adjacent the open upper end of the housing.

4. A barbecue according to claim 3, wherein each of the pair of storable shelves comprises a shelf bracket having the shaft extending downwardly at an end thereof and a shelf mounted on the shelf bracket.

5. A barbecue according to claim 3, wherein the barbecue includes mounting assemblies mounted on the housing at the opposite portions thereof and having the generally vertical apertures therein for rotatably receiving the downwardly extending shafts of the pair of storable shelves.

6. A barbecue according to claim 5, wherein the housing has a rim at the upper open end thereof, and each shelf bracket has a recess therein for receiving the rim of the housing to support the shelf bracket when the shelf thereof is in the first position outside the housing.

7. A barbecue according to claim 6, wherein the barbecue has a pair of handles mounted on an outside of the housing, and each shelf bracket is also


supported by one of the pair of handles when the shelf thereof is in the first position outside the housing.

8. A barbecue according to claim 6, wherein the barbecue has a lid for mounting on the rim of the housing to close the open upper end thereof, the lid having a lip extending over the rim of the housing and to the outside of the housing and received within a second recess in each shaft bracket adjacent the first-mentioned recess when the shelf of the shelf bracket is in the first position outside the housing.



9. A barbecue comprising the combination of a housing having an open upper end and having inner and outer surfaces, a mounting assembly mounted on the inner surface of the housing adjacent the open upper end and having a generally vertical aperture therein, an elongated shelf bracket having a shaft extending downwardly from an end thereof, the shaft being rotatably received within the generally vertical aperture in the mounting assembly, and a flat, generally disk-shaped shelf mounted on the elongated shelf bracket, the rotatable receipt of the shaft within the generally vertical aperture enabling pivoting movement of the elongated shelf bracket relative to the mounting assembly to swing the shelf between a storage position inside the housing and a use position outside the housing.

10. A barbecue according to claim 9, wherein the housing has a rim at the open upper end thereof between the inner and outer surfaces and the elongated shelf bracket has a recess therein at the end thereof adjacent the shaft, the recess receiving the rim to seat the shelf bracket on the rim when the shaft is swung to the use position outside the housing.

11. A barbecue according to claim 10, further including a handle mounted on the outer surface of the housing adjacent the open upper end thereof, and wherein the elongated shaft bracket has a portion thereof adjacent the recess which rests on the handle when the shelf is swung to the use position outside the housing.

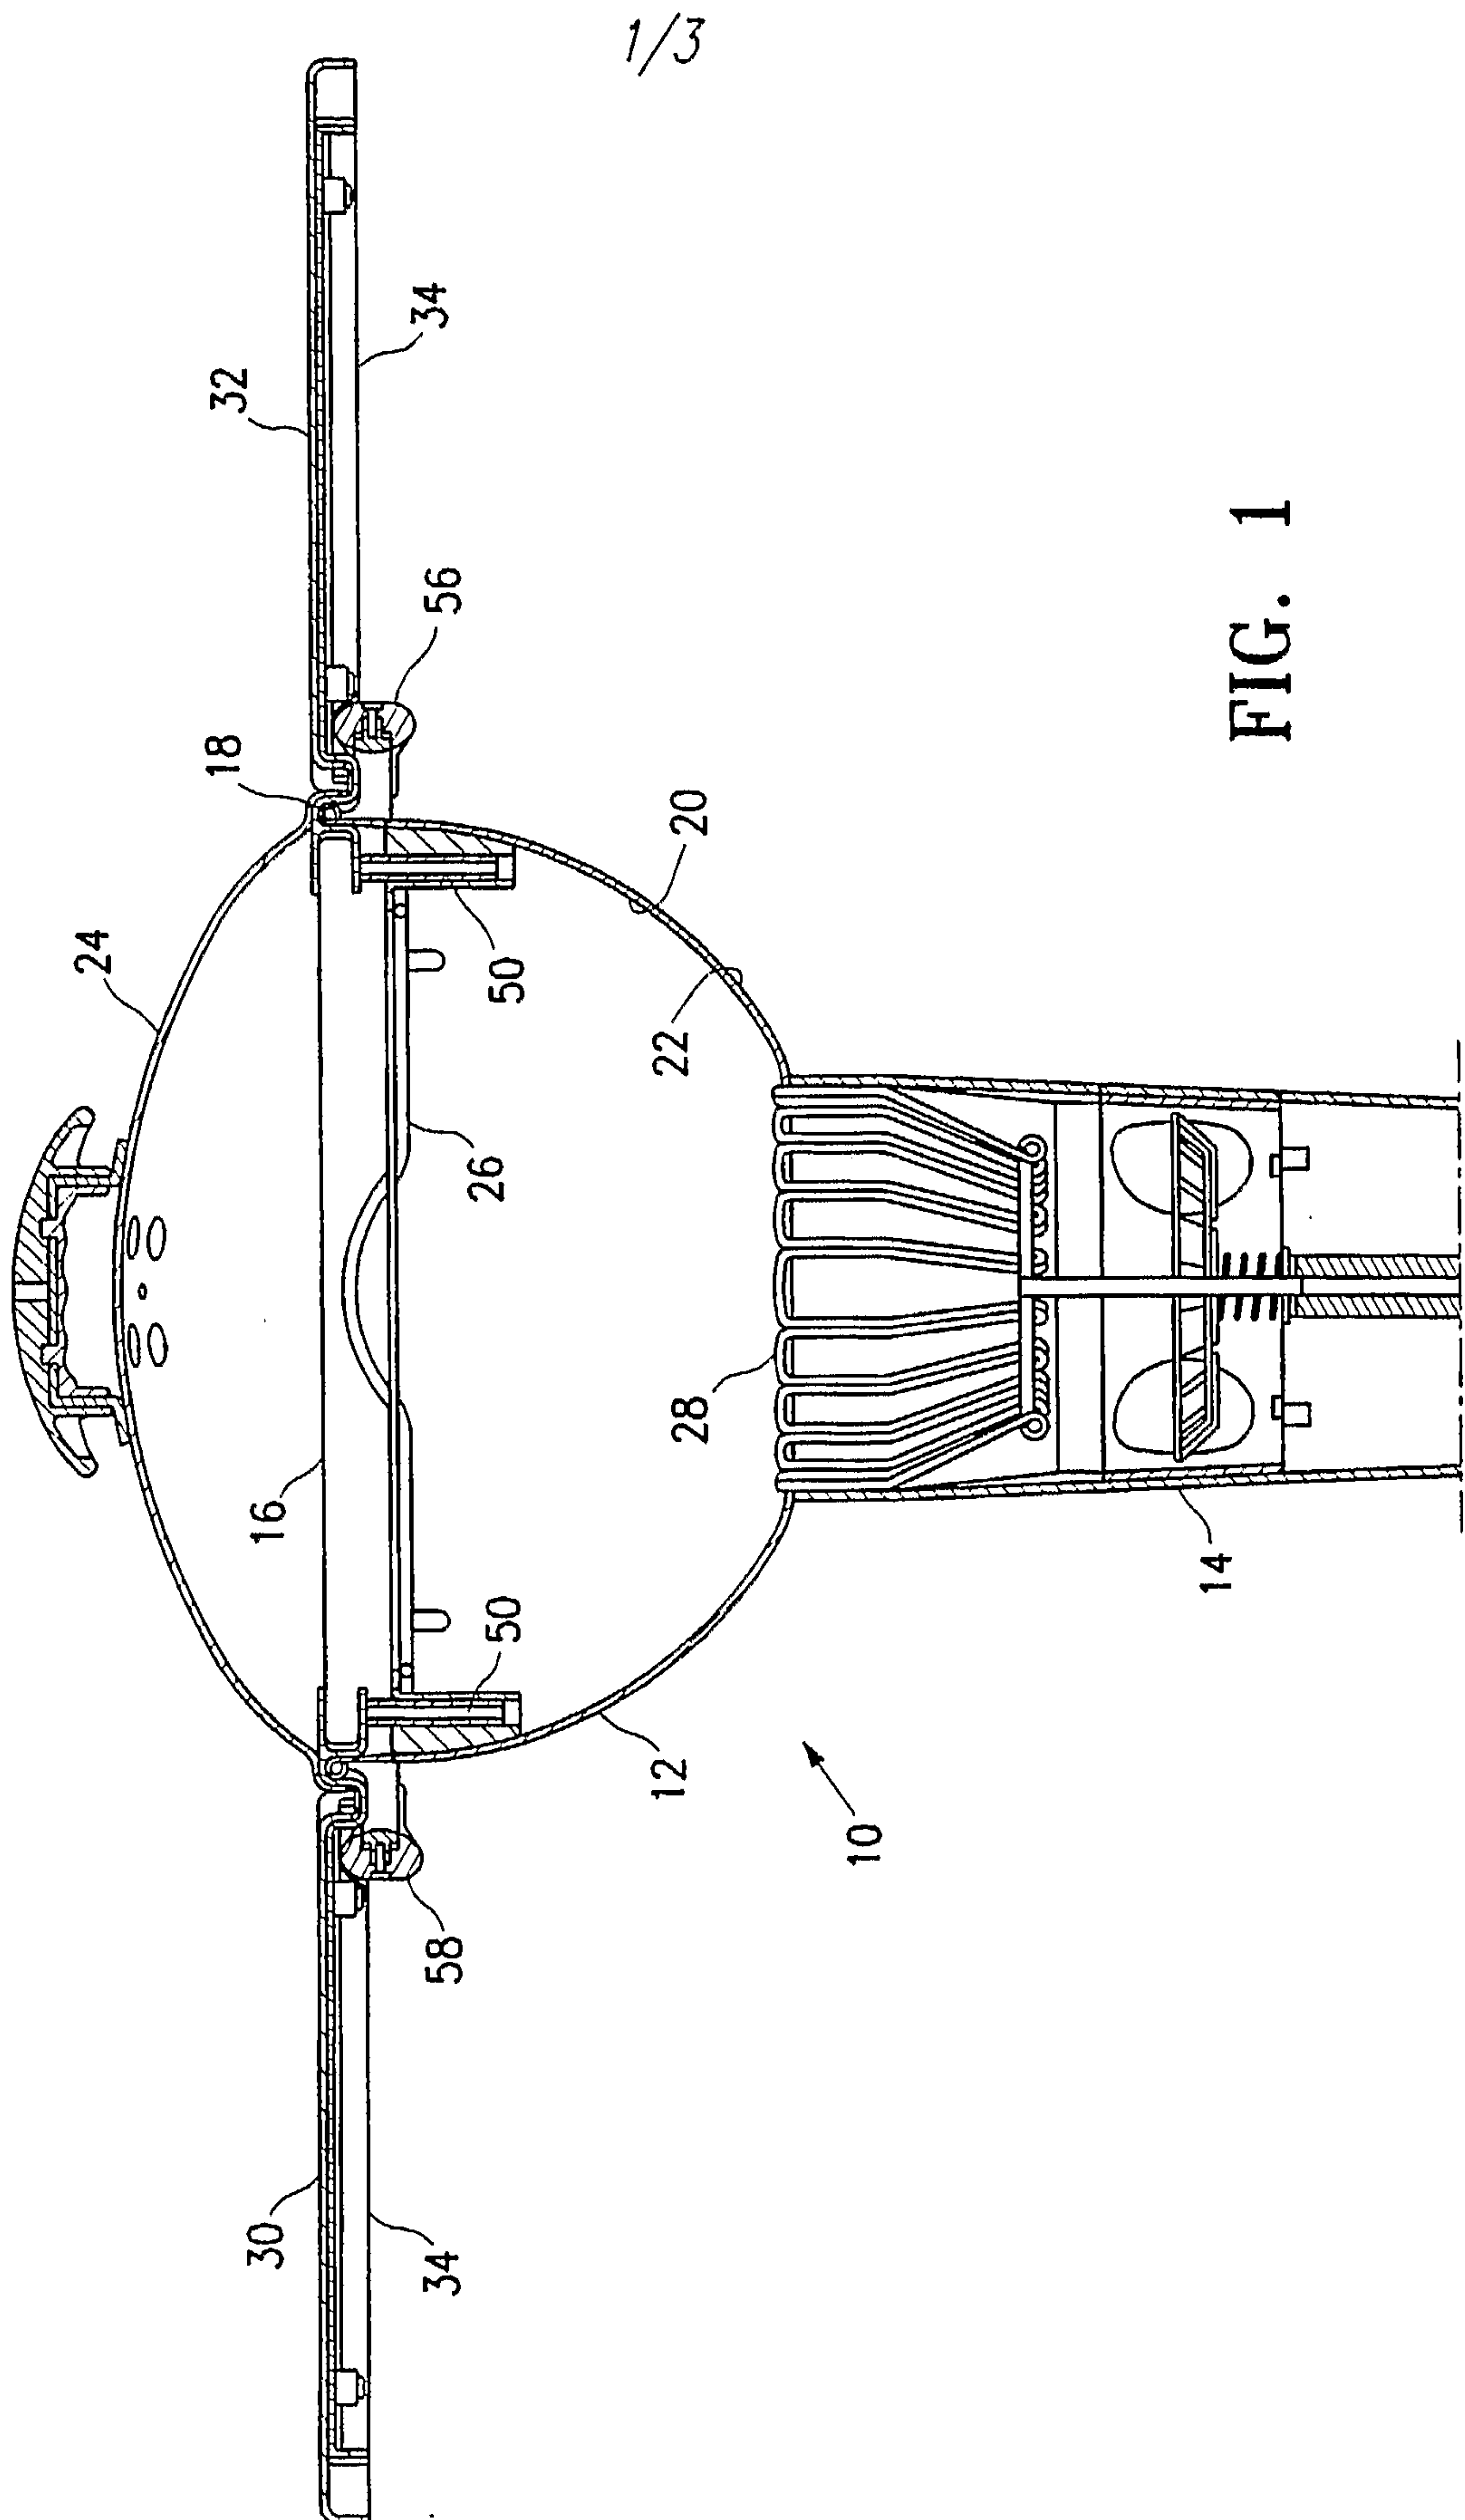

2/3

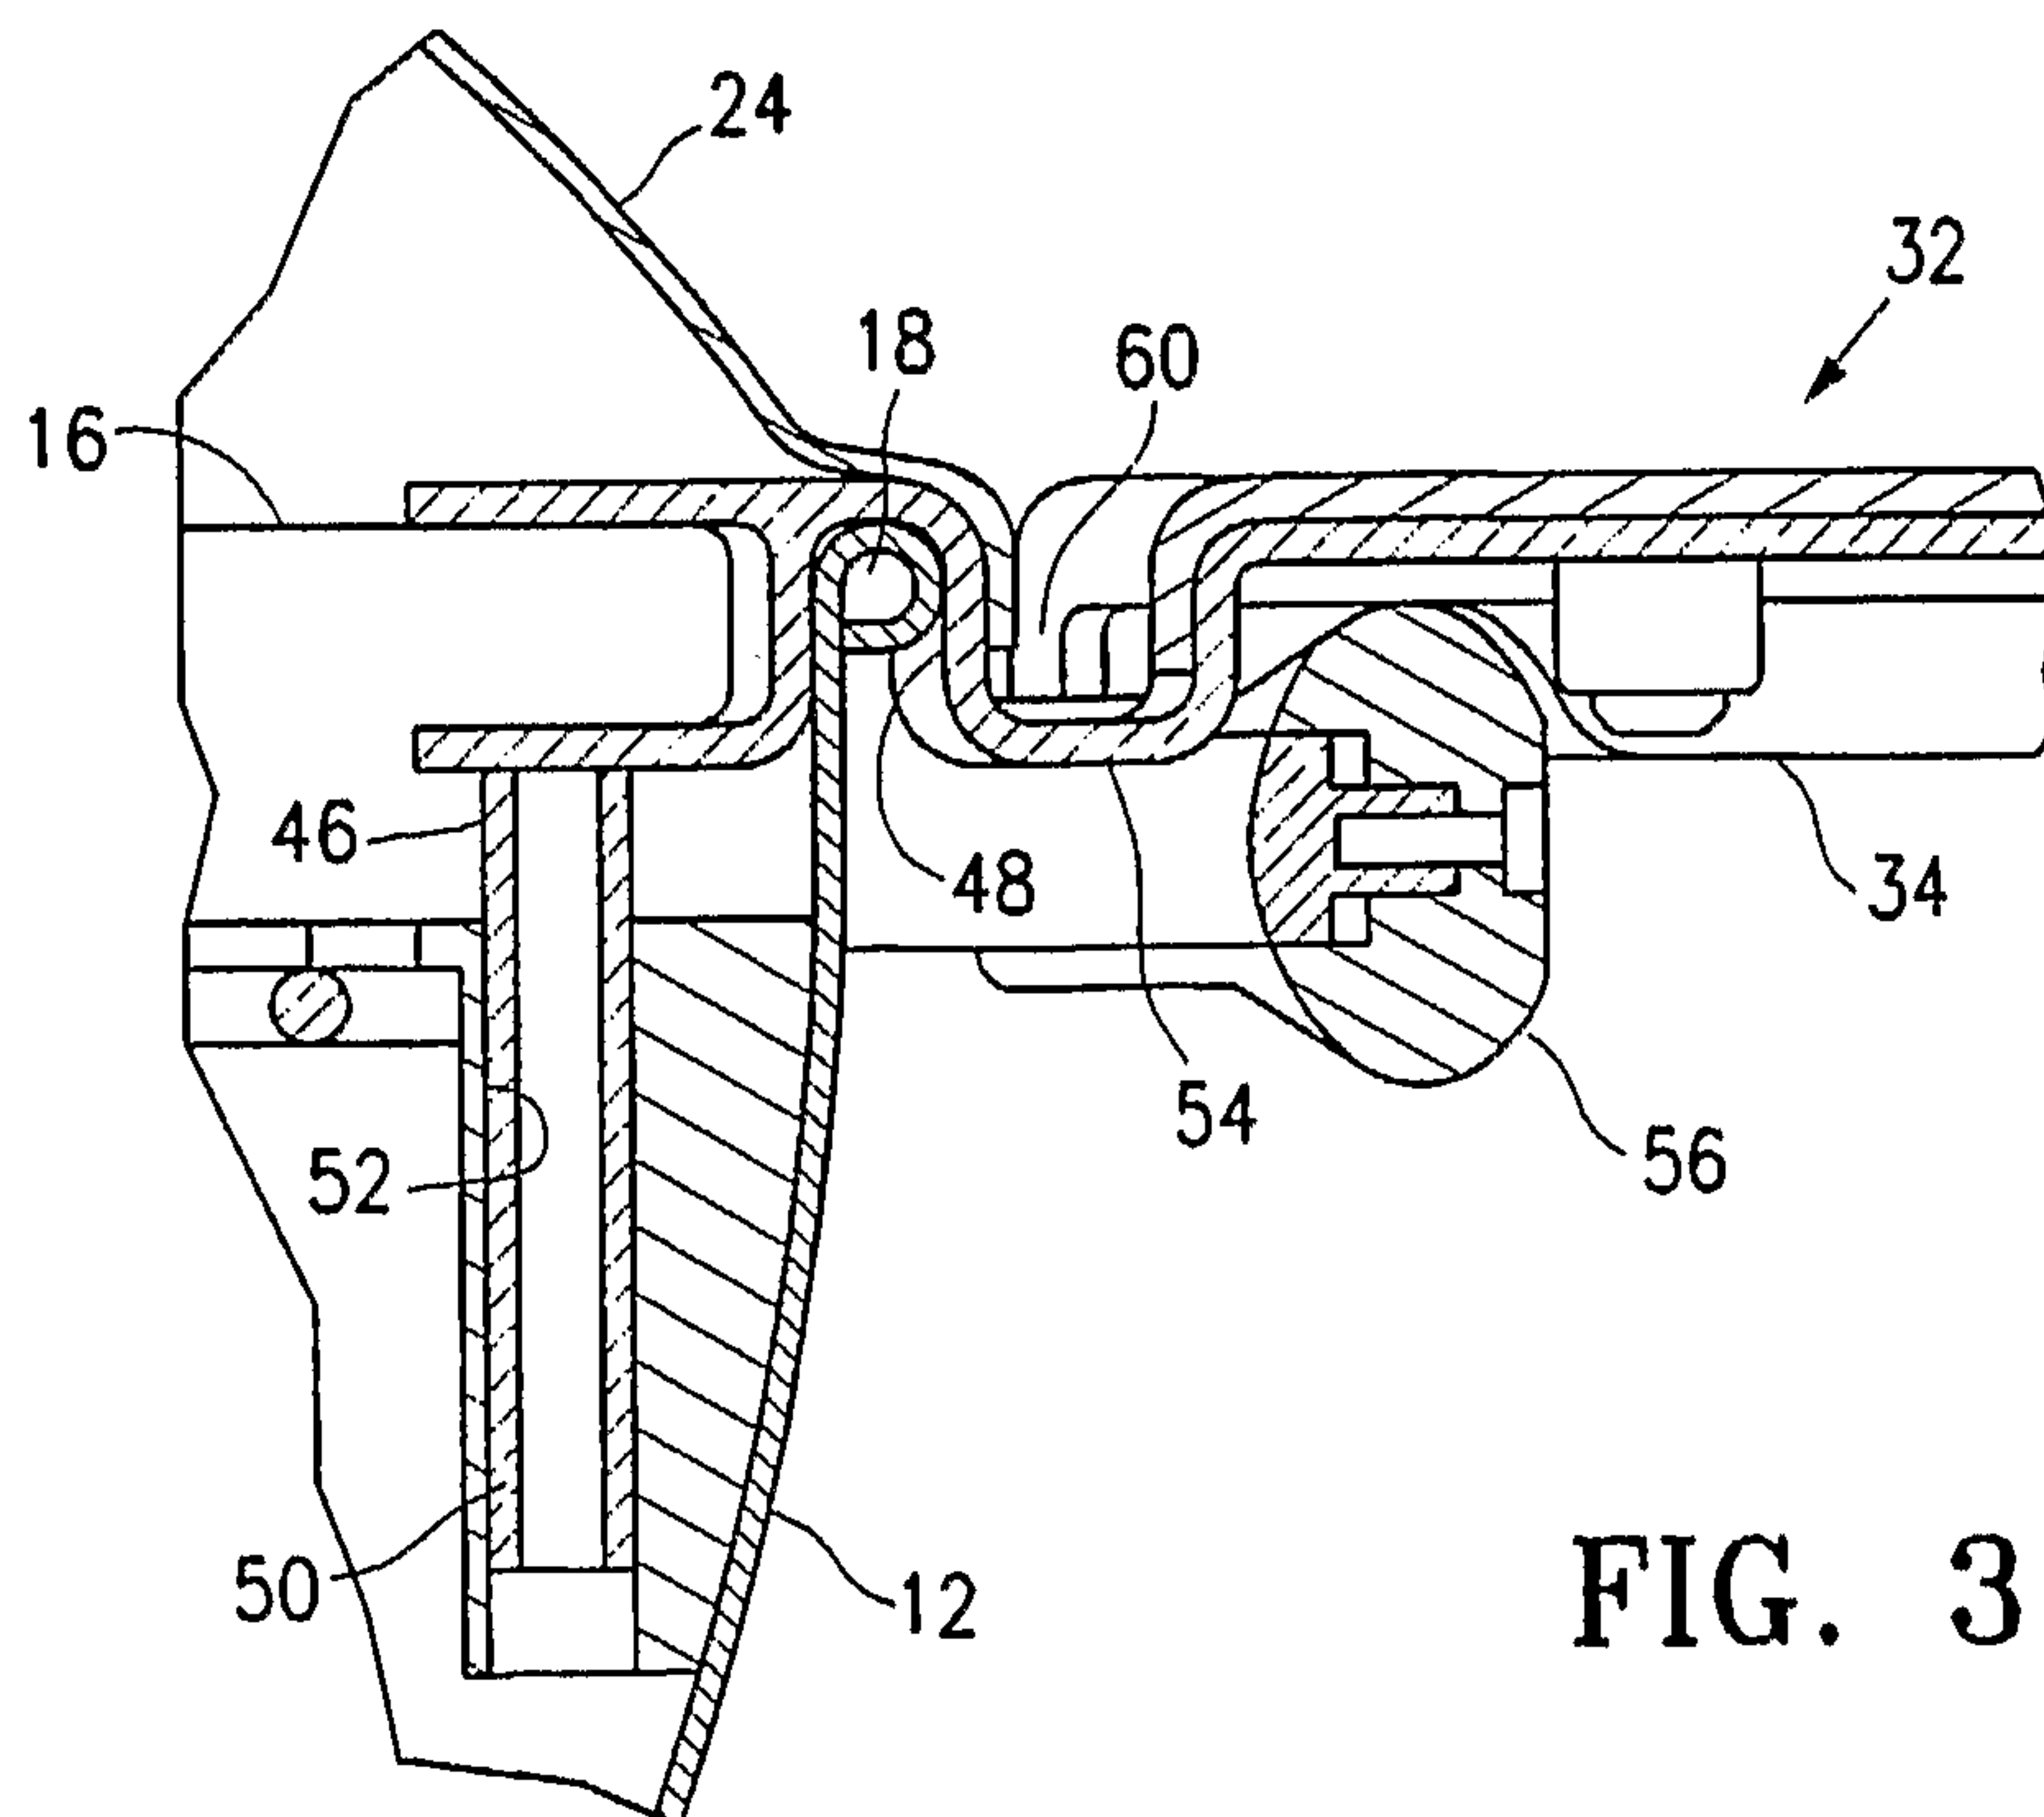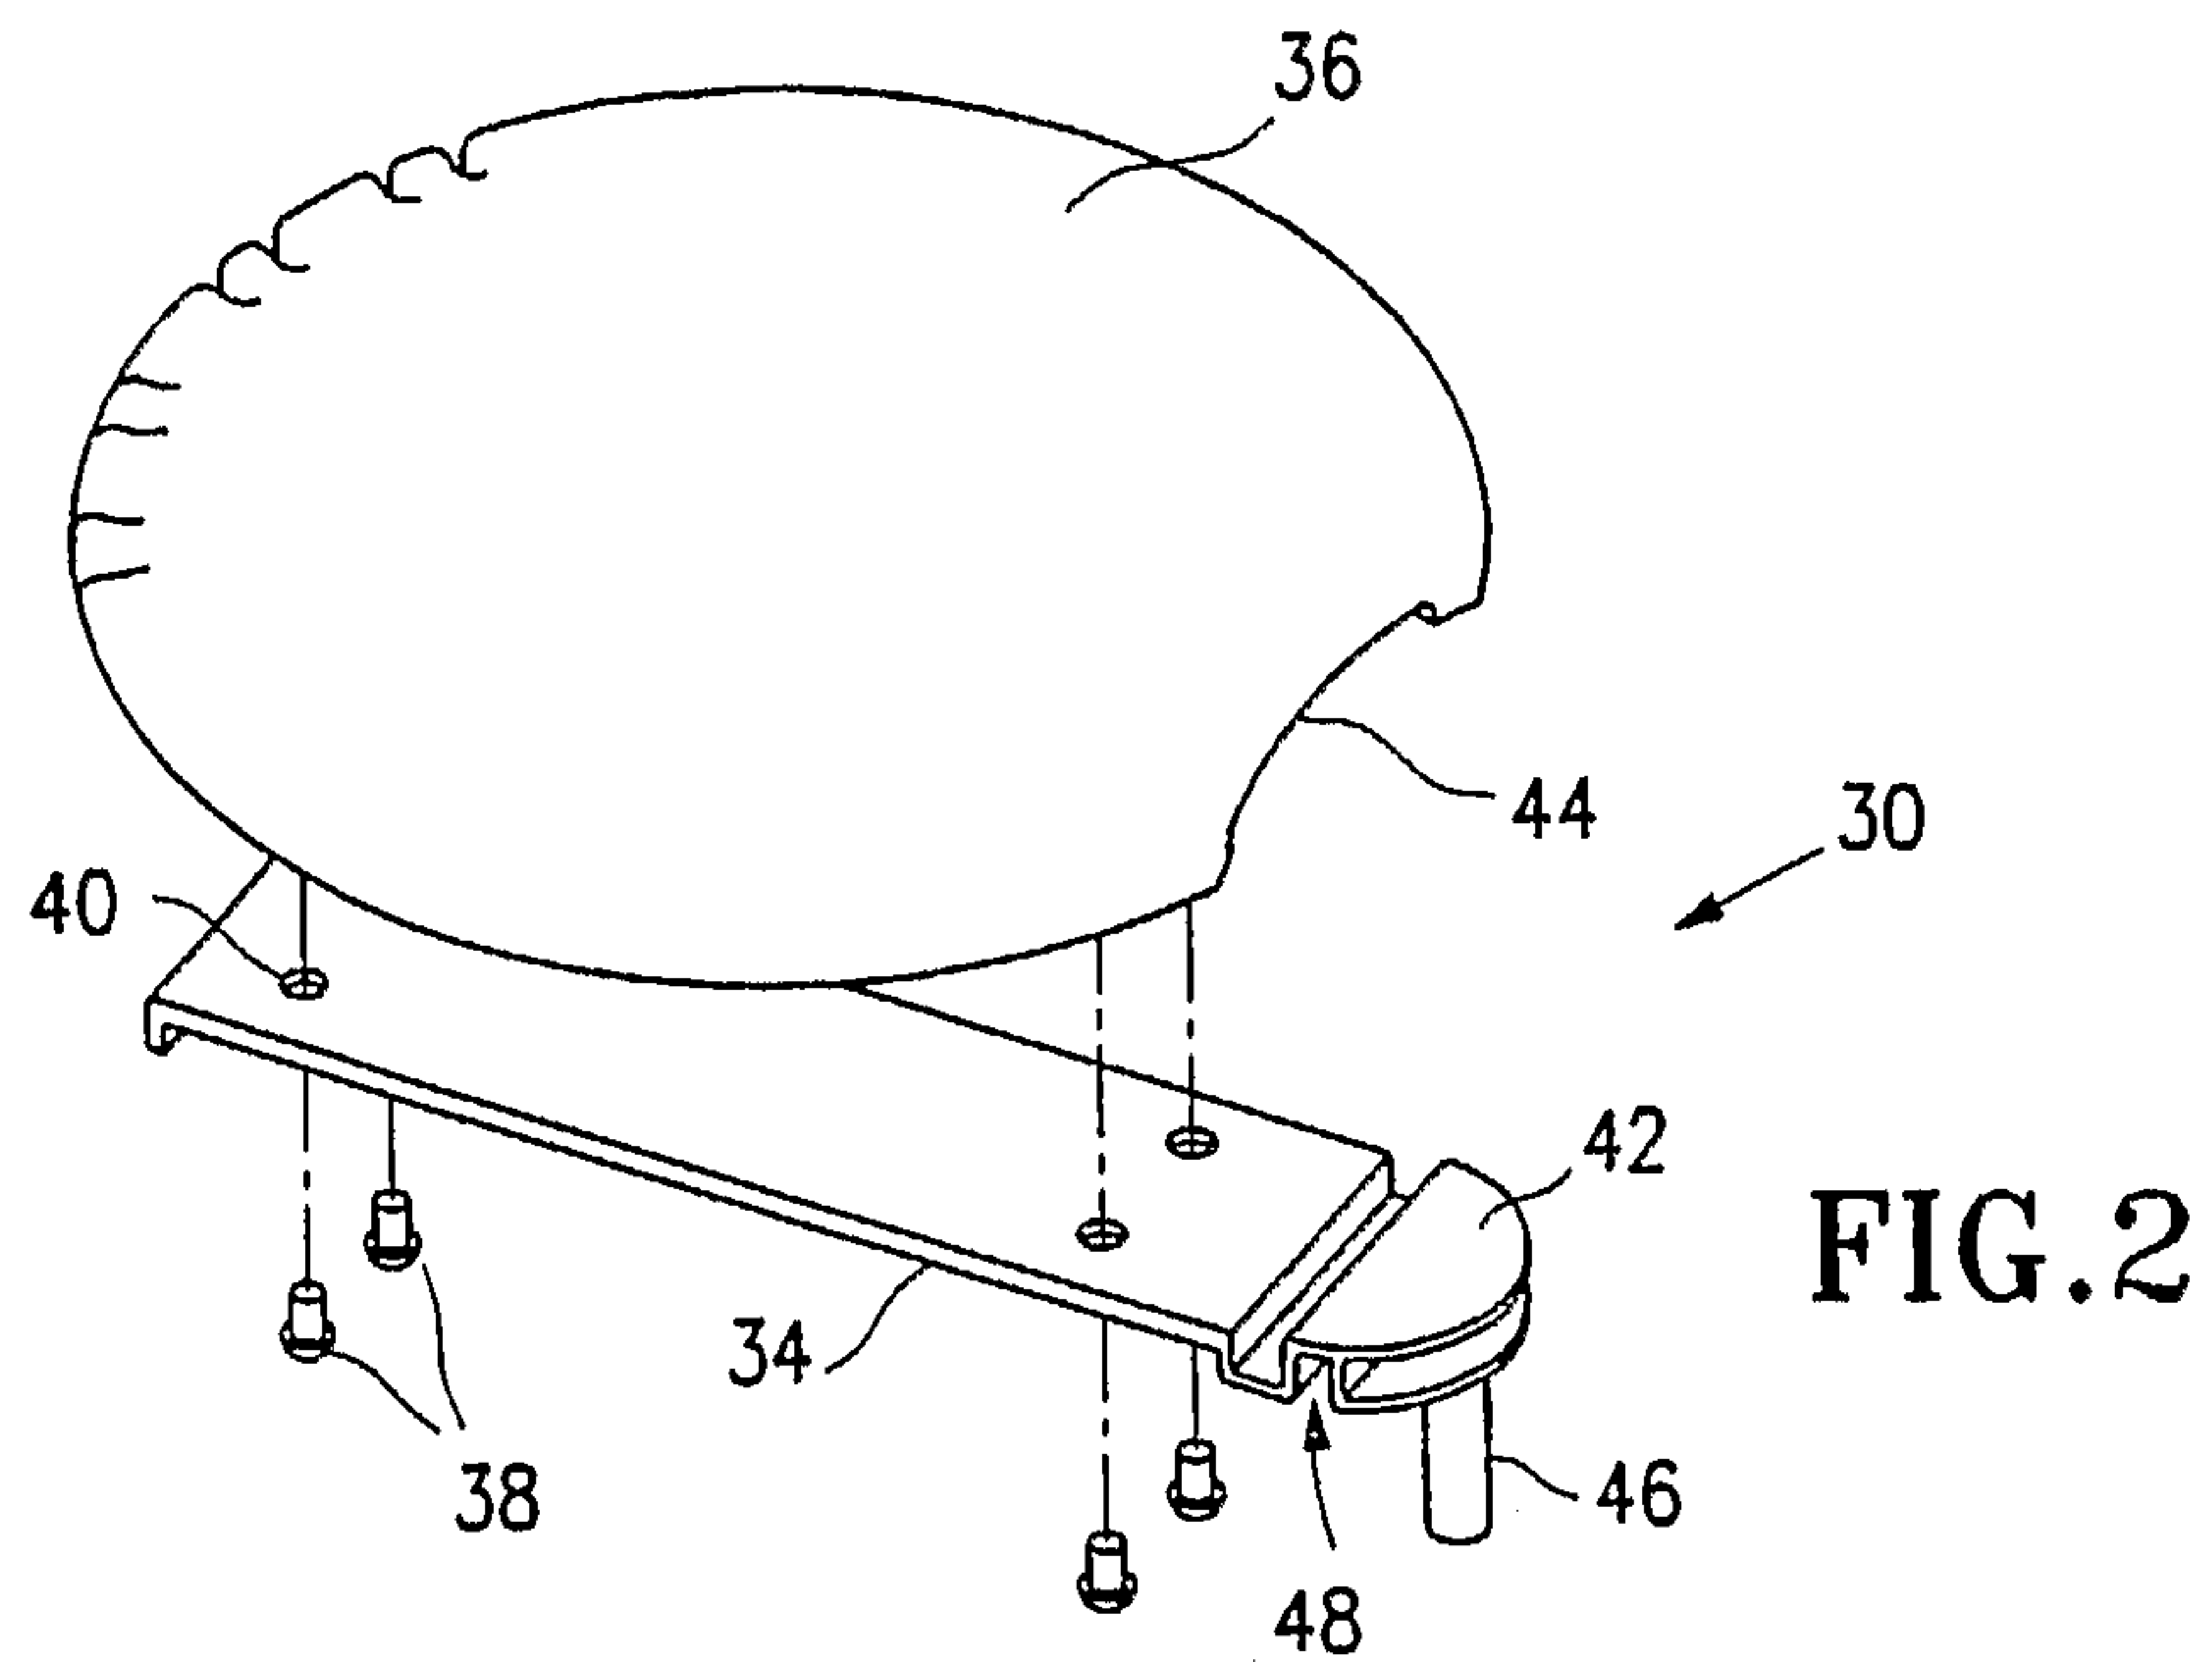

3/3

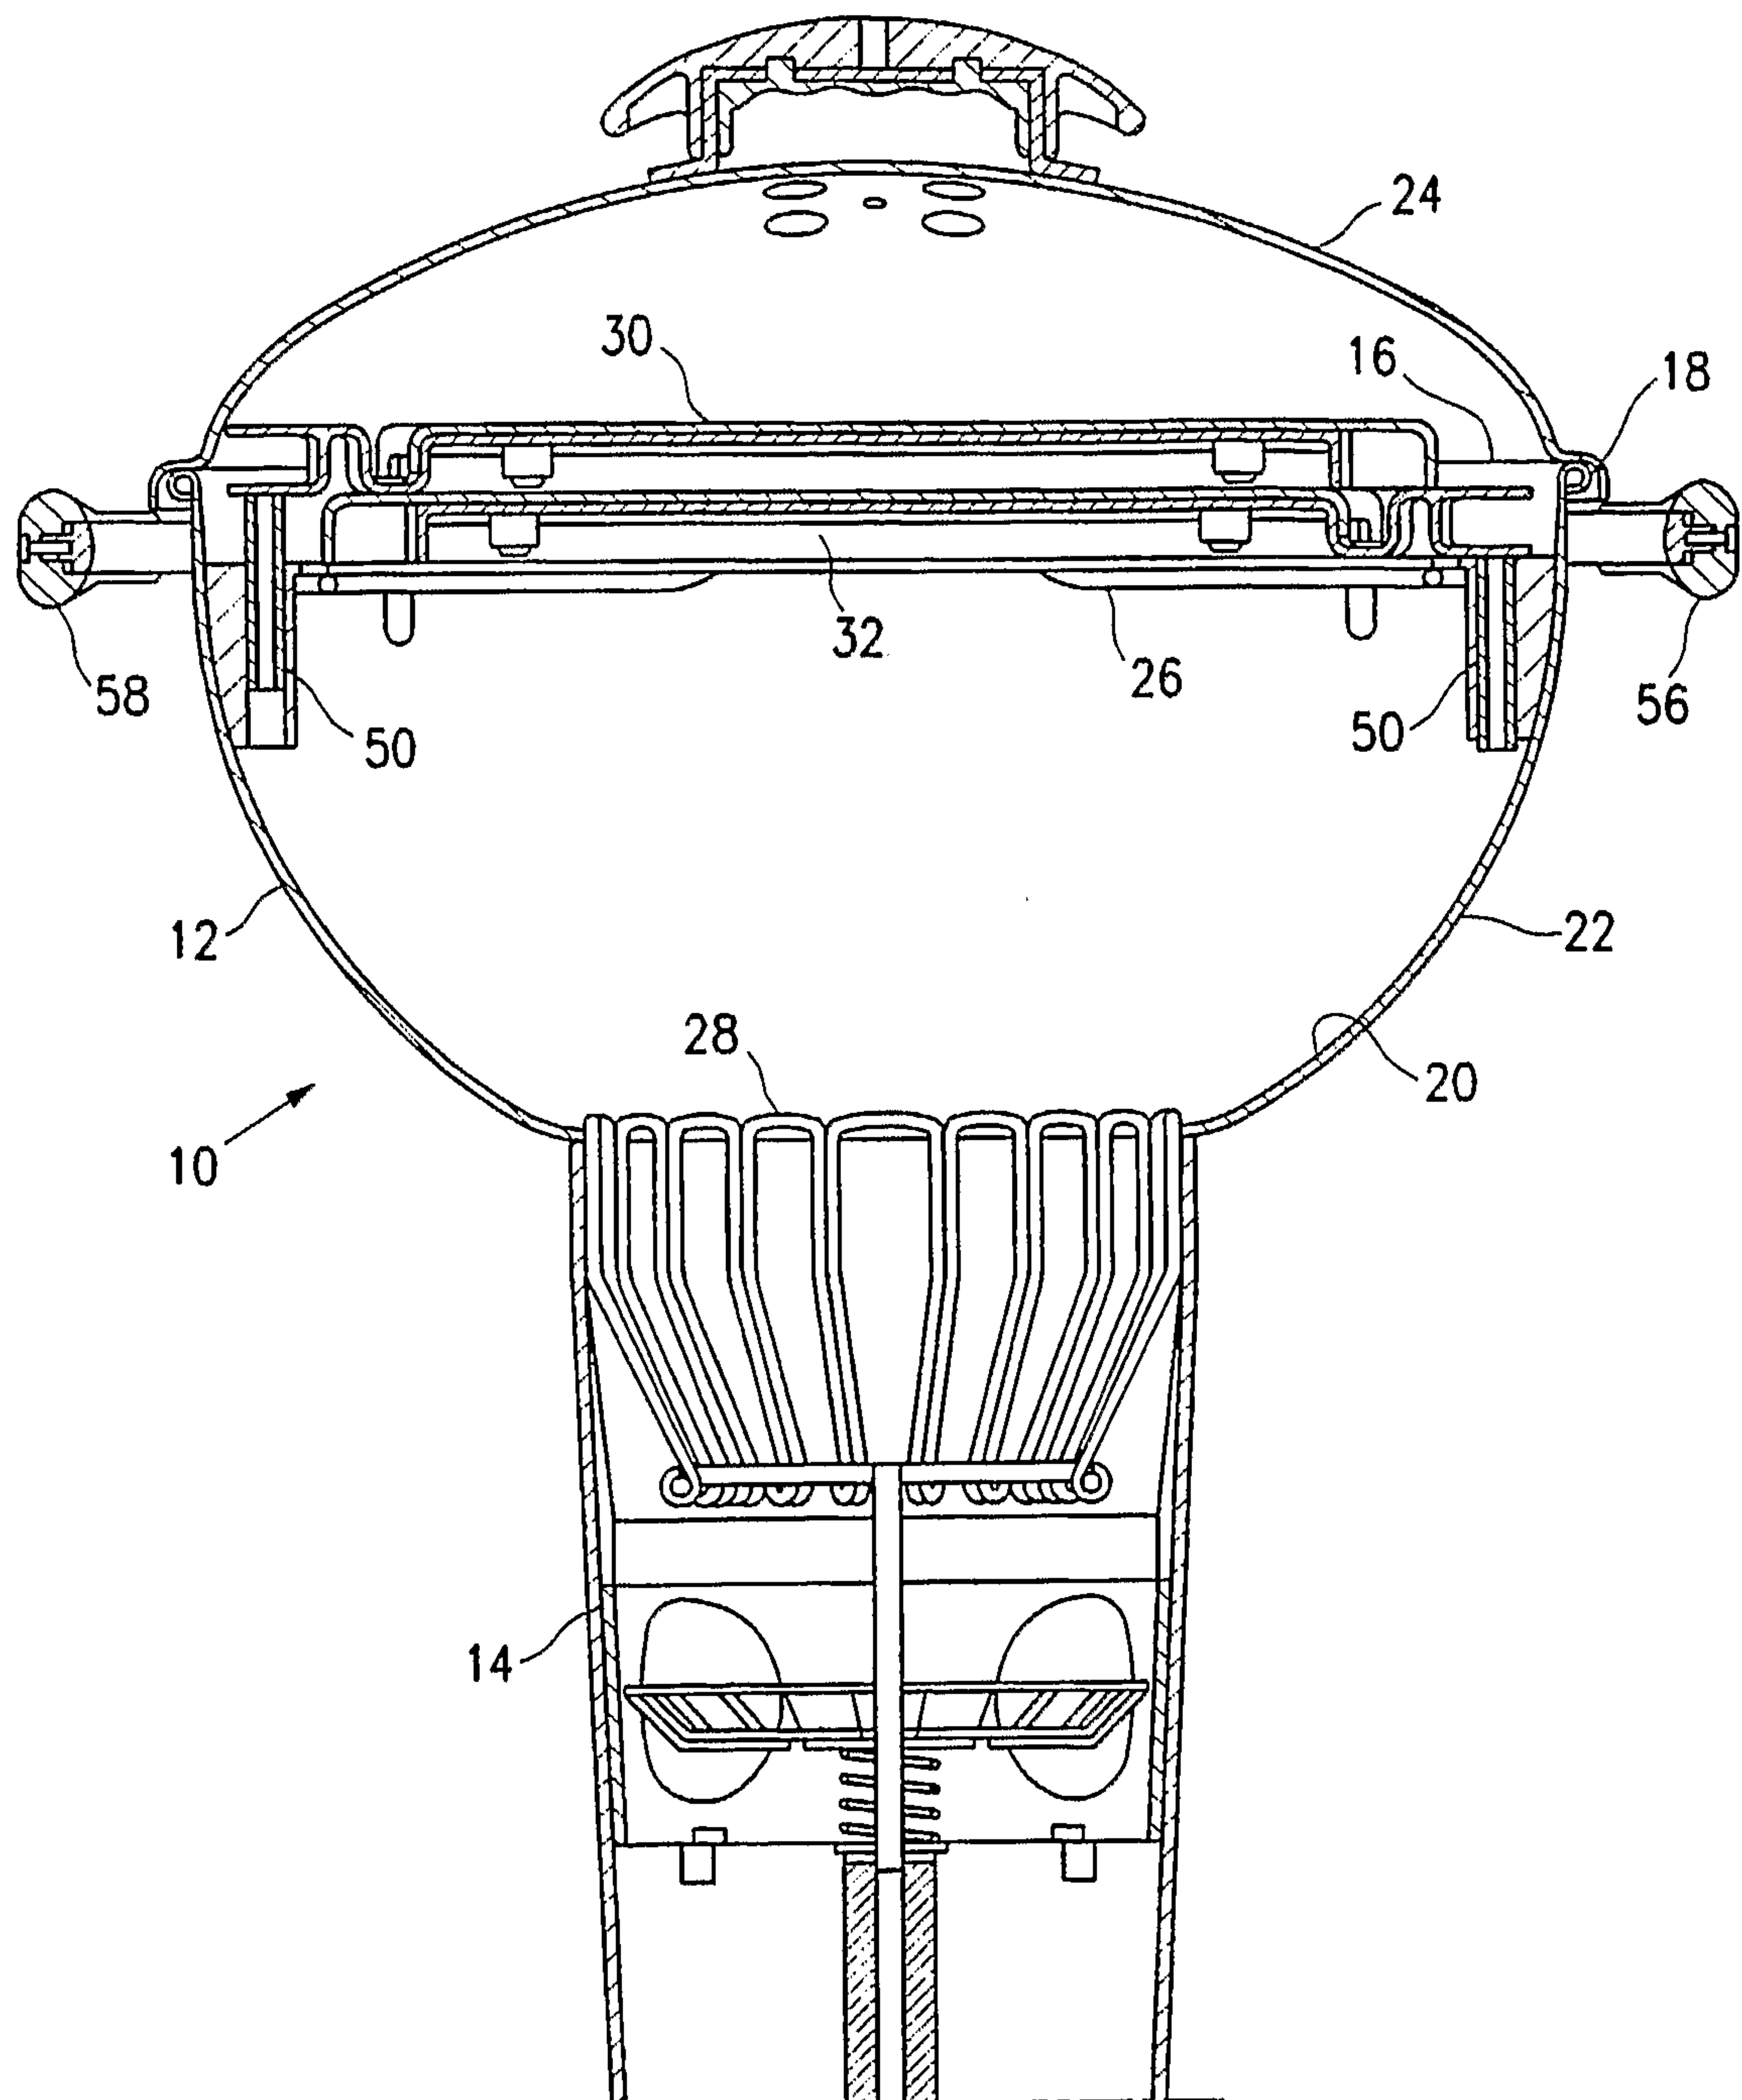


FIG. 4