

(19)



(11)

EP 2 728 813 B1

(12)

EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention
of the grant of the patent:
04.01.2017 Bulletin 2017/01

(51) Int Cl.:
H04L 12/70 ^(2013.01)

(21) Application number: **12191109.3**

(22) Date of filing: **02.11.2012**

(54) Application function dependent policy control

Anwendungsfunktion-abhängiges Policy-Controlling

Commande de politique dépendante de fonction d'application

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

(43) Date of publication of application:
07.05.2014 Bulletin 2014/19

(73) Proprietor: **Telefonaktiebolaget LM Ericsson
(publ)
164 83 Stockholm (SE)**

(72) Inventors:
• **Bodén, Björn
411 20 Göteborg (SE)**
• **Molinero Fernandez, Pablo
28023 Madrid (ES)**

(74) Representative: **Bertsch, Florian Oliver
Kraus & Weisert
Patentanwälte PartGmbH
Thomas-Wimmer-Ring 15
80539 München (DE)**

(56) References cited:
US-A1- 2011 208 853

- **3GPP: "3rd Generation Partnership Project; Technical Specification Group Core Network and Terminals; Policy and Charging Control (PCC) over Gx/Sd reference point (Release 11)", 3GPP DRAFT; 29212-B50_RM, 3RD GENERATION PARTNERSHIP PROJECT (3GPP), MOBILE COMPETENCE CENTRE ; 650, ROUTE DES LUCIOLES ; F-06921 SOPHIA-ANTIPOLIS CEDEX ; FRANCE, 25 June 2012 (2012-06-25), XP050588863, [retrieved on 2012-06-25]**

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 728 813 B1

Description

Technical Field

[0001] The present invention relates to an application function entity configured to control policy rules of a packet based service data flow and to a method for controlling the policy rules by the application function.

Background

[0002] An application function (AF) is an element offering applications that require dynamic policy and charging control. An application function provides a service to the user, in which a packet based service data flow is provided to the user, e.g. the streaming of video and/or audio data packets from a content provider to a subscriber of a mobile communications network. The application function may for example be attached to or part of the 3GPP Policy and Charging (PCC) architecture which is shown in Fig. 1 and is known from 3GPP TS 23.203. The main orchestrator in the PCC architecture is the Policy and Charging Rules Function (PCRF) shown with reference numeral 10 in Fig. 1. A subscriber profile repository, SPR 20, is connected to the PCRF 10 via an Sp interface, the application function 30 communicating with the PCRF via the Rx interface. An online charging system (OCS) 40 is provided and an offline charging system (OFCS) 50. A gateway 60 containing the PCEF (Policy and Charging Enforcement Function) 65 is in communication with the online charging system 40, the offline charging system 50 and the PCRF 10 via the Gy, Gz and Gx interface, respectively, as shown in Fig. 1. A traffic detection function (TDF) 70 is provided and a Bearer Binding and Event Reporting Function (BBERF) 80. Further details about the different functions can be found in the above-mentioned 3GPP TS 23.203. US2011208853 A1 discloses a policy and charging control method for creating by a policy and charging rules function (PCRF), policy and charging control (PCC) rules at establishment of a user plane session associated with a user equipment UE. An application function AF enables the PCRF to obtain application level session information, such as, but not limited to, service requirements, as input for the policy decision process. The PCRF server and the AF may form a unique server or network node and the PCRF may be capable of communicating with a plurality of AFs in a network, and one PCRF may serve and handle the plurality of AFs. For the present invention, the following interfaces between the entities are of interest.

Rx Allows the AF to request the PCRF to modify a user's connection parameters since the AF has detected that the user uses a service that would need these detections. The PCRF can also signal in case the connection for a user changes that the AF earlier has requested to be changed.

Gx Allows the PCRF to configure the PCEF with policy

control and charging rules and allows the PCEF to report to the PCRF when new data flows are detected for a user and also to report accumulated usage of the data flows for a user.

Sd Allows the PCRF to have dynamic control of application detection, compared to the Gx interface where the only detection of predefined applications can be reported by the PCEF. The PCRF instructs the TDF which applications it wants the TDF to detect and the TDF sends notifications when detecting an application.

[0003] By implementing an application function, the application function has to be able to detect user services that then require Rx signaling to be made. In general, three main approaches to enable this detection in the application function can be identified.

[0004] In a first approach, a user equipment (UE) uses a control signaling to the application function. In this approach, data is sent from the UE that is terminated in informing the application function that a service will be used and which will trigger the AF to do Rx signaling. This can be considered as control signaling from the UE, although from a 3GPP perspective, the control signaling will go over the data plane. Still, this data is control signaling as it is not part of the real packet based service data flow, such as the data sent to retrieve a video.

[0005] The second approach is a communication between the application function and the target host, i.e. the content provider. In this approach, the user service is detected in the target host/content provider of the service which then informs the application function that the service has started or is about to start.

[0006] A third approach is that the application function detects a user service with a packet based service data flow by packet inspection. In this approach, the application function is located between the UE and the content provider or target host of the service and can detect that the service started using packet inspection.

[0007] The last approach has the advantage that it does not require awareness of the application function in the user equipment or the target host.

[0008] One problem with the application function in the 3GPP architecture is that the application function often belongs to a different company, organization or department compared to the mobile communications network. For this reason, the Rx interface in the 3GPP architecture between the application function and the PCRF shown in Fig. 1 has limited functionality. No other interfaces between the AF and the network nodes are standardized nor generally expected due to the previous reason. Furthermore, for the same reason it is often not possible to use customization, personalization or adaptation information available in the network node to adjust the application function's behavior to the subscriber profile or the network conditions. To overcome this problem, extensive functionality is needed in the application function for customization, personalization and adaptation needs to be

implemented or functionality limitations are needed.

[0009] As mentioned above, the third approach is based on the fact that the application function detects the service through packet inspection. The packet inspection functionality may reside within the application function or may be located in another node in a mobile communications network. Even if the packet inspection is located within the application function, the packet inspection implementation in the application function may be running on a separate hardware or may be a distinct piece of software that has already been implemented and used in other products. This is based on the fact that there are multiple other users of packet inspection than for the use in the application function and the packet inspection functionality is available as commercial off-the-shelf hardware or software. In the PCC architecture, packet inspection functionality is part of the PCEF and TDF entities and the Gx and Sd interfaces are used to give application events or report events of detected packets and also to configure the packet inspection entity what packets to send the application events to.

[0010] When implementing the application function, according to the third approach using packet inspection, extensive logic is needed in the application function in order to keep track of users and the users' data flows, which policies are used for which users etc. When commercial off-the-shelf software and/or hardware is used for packet inspection, the application function also needs to implement interfaces for communicating with the packet inspection entity. In particular, if the application function used packet inspection functionality usually serving as PCEF or TDF in a mobile communications network, the AF would need to implement the Gx and/or Sd interfaces.

[0011] A solution where the application function could utilize already available functionality, both to support the Gx and/or Sd interfaces and the extensive logic needed to keep track of users and users' data flows would reduce the development costs for the application function.

[0012] Accordingly, a need exists to customize, personalize or adapt the application function behavior on a per session basis or per subscriber basis. Furthermore, a possible solution should not affect the mobile communications network PCRF.

Summary

[0013] This need is met by the features of the independent claims. Further embodiments are described in the dependent claims.

[0014] According to a first aspect, an application function entity is provided as defined in independent claim 1.

[0015] The database can contain the policy rules for the packet based service data flows or subscriber information which the policy server takes into account when determining which policy rules are applied to packet based service data flows.

[0016] It is possible that the application function entity

further contains the traffic detection entity. However, this is not necessarily the case as the traffic detection entity may also be located outside the application function, the policy server only containing the first interface towards the traffic detection entity.

[0017] Furthermore, the traffic detection entity can be a packet inspection entity or any other entity which is able to detect and identify a service data flow.

[0018] The database containing the policy rules of the packet based service data flows may be a subscriber profile repository of the application function, the subscriber profile repository having subscriber dependent subscriber profiles.

[0019] In this embodiment, the policy rules for the packet based service data flow can be determined on a subscriber base. For different subscribers of the mobile communications network, different policies for the application function may be provided. The application function has access to a subscriber profile repository where policy rules can be stored which can be different from the policy rules of the mobile communications network. Furthermore, the policies may be the same for all subscribers. This subscriber profile repository is the application function's repository and is an entity different to the subscriber profile repository of the mobile communications network.

[0020] The application function entity may furthermore comprise an application function logic entity which controls the application function. The policy server may then comprise a second interface towards this application function logic. The application function logic may furthermore contain an interface towards the traffic detection entity, to which the policy server of the application function is connected via the first interface.

[0021] The interface towards the traffic detection entity may be implemented as an Sd or Gx interface. When these interfaces are used, standardized protocols can be used for the communication between the policy server and the traffic detection entity.

[0022] The policy server in the application function may be implemented as a PCRF provided in the application function. In this embodiment, a PCRF would be provided in the mobile communications network, another PCRF being provided in the application function. The PCRF contains all the necessary logic for the policy server. When a PCRF is implemented in the application function, already existing software and hardware components could be used that would significantly decrease the development costs for the application function entity of the invention.

[0023] Furthermore, it is possible that the application function logic entity contains interfaces towards the policy and charging rules function entity of the mobile communication network, which may be implemented as an Rx interface.

Brief description of the drawings

[0024] The invention will be described in further detail

with reference to the accompanying drawings.

Fig. 1 schematically shows the PCC architecture known in the art,

Fig. 2 shows an application function according to an embodiment of the invention,

Fig. 3 shows an application function according to an embodiment of the invention,

Fig. 4 shown an application function according to an embodiment of the invention, and

Fig. 5 shows a flow chart including the steps for applying policy rules by an application function in accordance with an embodiment of the invention.

Detailed description of embodiments

[0025] In the following, the invention will be explained in more detail by referring to exemplary embodiments and to the accompanying drawings.

[0026] In Fig. 2, an application function 100 is shown in the context of a PCC architecture as shown in Fig. 1. The function entities 10-70 shown in Fig. 2 correspond to the entities explained above in connection with Fig. 1. A mobile user entity UE 1 accesses the mobile communications network using the radio access network 5.

[0027] A packet based service data flow provided by a service provider is transmitted from the packet data network 8 via the SGi interface via gateway 60 to the UE 1. For a service complete policy and/or charging rule information is available. The service is provided by a service provider (not shown) in the packet data network. In the embodiments discussed below, the service data flow is forwarded to the subscriber. However, it should be understood that the service data flow can be a flow forwarded to the service provider or can be a bidirectional flow.

[0028] The application function entity 100 comprises a policy server 110. The policy server 110 has its own database containing policy rules or subscriber information which the policy server takes into account when determining which policy rules to apply, or has a connection to such a database. In the embodiment shown in Fig. 2, the database is implemented as a subscriber profile repository 120. The policy server accesses the SPR 120 via interface 113. The subscriber profile repository 120 can be provided within the policy server 110 or may be linked to the policy server 110. The policy server contains a first interface 111 through which a packet inspection entity 140 provided within the application function entity of Fig. 2 can be accessed. The packet inspection entity provides packet inspection functionality and can identify service data flows and the requesting subscriber/UE.

[0029] The packet based service data flow may be provided by a content provider. The application function entity 100 may be provided by the content provider, how-

ever, the application function entity may also be owned by the network operator or by a broker that facilitates the communication between the network operator and the content provider.

[0030] The policy server contains a second interface towards application function logic 130. The application function logic 130 is an entity that controls the application function. One example is an AF that requests higher priority from the network PCRF when certain traffic is detected. Another example is an AF that requests some filtering rules in the PCEF when certain malicious traffic is detected. The policy server can be used for example for fraud prevention (the policy server may hold a list of abusive users who should be restricted from using the AF function).

[0031] The application function logic 130 has an interface 131 to the packet inspection entity, an interface 132, implemented as Rx interface in the example shown, towards the PCRF 10 of the mobile communications network. The application function logic can contain a third interface 133, here the SGi interface, which is the user data interface. The interface of the policy server 112 to the application function logic 130 may be implemented as an Gx interface. However, any other interface may be used.

[0032] As can be seen from Fig. 2, the packet inspection entity 140 is part of the application function node, but may be running on a separate hardware or distinct piece of software.

[0033] The entities shown in Fig. 2 and also those in Fig. 3 and 4 may be implemented by hardware, software or a combination of hardware and software.

[0034] In connection with Fig. 3, a further embodiment is disclosed, wherein the same reference numerals describe the same entities already discussed in connection with Fig. 2.

[0035] An application function entity 200 of Fig. 3 differs from the embodiment of Fig. 2 in that the packet inspection entity is not provided inside the application function, but that the interface 111 of the policy server is directed towards a packet inspection entity 150 located outside the application function.

[0036] In a further embodiment shown in connection with Fig. 4, the packet inspection functionality in the PCEF 65 and/or the packet inspection functionality of the TDF 70 is used.

[0037] In all three embodiments, the policy server 110 may be implemented as a PCRF. In the present context this means that it is a device capable of performing functions of a PCRF, but it is not the same entity as the PCRF 10 in Fig. 1.

[0038] The embodiments shown in connection with Fig. 2 and 4 are advantageously used with the third approach mentioned in the introductory part where the user service is detected by the application function entity, as denoted with reference numerals 100 resp. 300 in Figures 2 and 4, respectively, using packet inspection. However, the present invention can also be used for the other

two approaches mentioned above. For the first two approaches, the three embodiments of Figs. 2-4 may act similarly as no Sd/Gx interface is needed to the PCRF 10.

[0039] In Fig. 5, the steps are shown which make it possible to apply policy and charging rules independently from the policy and charging rules of the mobile communications network. In a step S1, the method starts and in step S2, the data flows between the UE and the packet data network are detected. In step S3, one of the data flows can be identified. The application function can then in step S4 determine the policy for the detected data flow. The policy may be subscriber dependent, but may also only depend on the identified data flow. In this case, all subscribers would have the same policy and/or charging rules. The application function dependent policy and charging rules are then applied in step S5, the method ending in step S6.

[0040] With the claimed invention, the customization, personalization or adaptation of the application function is possible on a per access session basis or even on a per subscriber basis. With the provision of a policy server, such as another PCRF, within the application function, a separate policy rules database, or a database containing subscriber information which the policy server takes into account when determining which policy rules to apply can be provided. A further advantage is that the configuration operation of the PCRF of the mobile communications network is completely decoupled from the configuration and operation of the policy server of the application function. A further advantage can be seen in the fact that existing standards, such as the Gx or Sd interfaces, can be used for the communication between the application function and the policy server so that existing hardware and software components can be used for implementation.

[0041] The PCRF 10 is the entity that has the control of the network nodes (PCEF, TDF, ...). The policy server 100, 200, 300 has the control over the AF, and so it can change the way the AF behaves. The policy server can influence the behaviour of the network PCRF by changing what the AF reports via the Rx i/f. The PCRF 10 may choose to ignore or take into account what the AF says via Rx, i.e., the PCRF 10 is the ultimate decision point for Fig. 2-3. In Fig. 4, the Sd and Gx interfaces towards the policy server are used for reporting purposes (i.e., only to send information from the TDF/PCEF to the policy server), and so the PCRF 10 remains as the ultimate decision point.

[0042] The content provider providing the contents for the packet based service data flow can now decide on the policy and charging rules for the subscriber. The use of the resources within the mobile communications network would still be controlled in the PCRF of the mobile communications network. The policy server controls how the AF behaves (e.g., when it is allowed to report via Rx to the PCRF 10, what it reports via Rx, ...). The policy server does not talk to the PCRF 10 directly, but indirectly via the AF. The PCRF 10 is the ultimate decision point:

The PCRF 10 can choose to ignore what comes from the AF via Rx or it can take different decisions. If the AF requests that a flow should be free of charge, the PCRF 10 can decide not to do it because (for example) the user is roaming.

Claims

1. An application function entity (100, 200, 300) configured to control application function dependent policy rules of a packet based service data flow that is transmitted to a subscriber of a mobile communications network, the application function entity comprising

- a traffic detection entity which detects the packet based service data flows in the mobile communications network,
- a policy server (110) configured to control the application function dependent policy rules of said packet based service data flow, which are customized, personalized or adapted independent from the policy and charging rules of the mobile communication network, the policy server containing a first interface (111) towards the traffic detection entity (140, 150, 65, 70),
- an interface (113) to a database containing information with which policy rules to be applied to packet based service data flows can be determined,
- an application function logic entity (130) configured to control the application function, the policy server further comprising a second interface (112) towards the application function logic entity (130),

wherein the application function logic entity (130) contains an interface (132) towards a policy and charging rules function entity (10) of the mobile communications network, where the policy and charging rules of the mobile communications network are stored,

wherein the policy server (110) is configured to determine, based on the information in the database (120), the policy for said packet based service data flow and configured to apply the policy rules to said packet based service data flow.

2. The application function entity (100, 200, 300) according to claim 1, wherein the traffic detection entity (140) is a packet inspection entity.
3. The application function entity (100, 200, 300) according to any of the preceding claims, wherein the database is a subscriber profile repository (120) of the application function.
4. The application function entity (100, 200, 300) of

claim 3, wherein the subscriber profile repository contains subscriber dependent subscriber profiles and is provided in the application function entity.

5. The application function entity (100, 200, 300) according to claim 1, wherein the application function logic (130) comprises an interface (131, 133) towards the traffic detection entity. 5
6. The application function entity (100, 200, 300) according to any of the preceding claims, wherein the first interface (111) towards the traffic detection entity is implemented as an Sd or Gx interface. 10
7. The application function entity (100, 200, 300) according to any of the preceding claims, wherein the policy server (110) is implemented as a Policy and Charging Rules Function, PCRF, provided in the application function. 15
8. The application function entity (100, 200, 300) according to claim 1, wherein the interface (132) towards the policy and charging rules controller (10) of the mobile communications network is implemented as an Rx interface. 20 25

Patentansprüche

1. Anwendungsfunktionsentität (100, 200, 300), die dafür konfiguriert ist, anwendungsfunktionsabhängige allgemeine Grundregeln eines paketgestützten Dienstdatenflusses zu steuern, der an einen Teilnehmer eines Mobilkommunikationsnetzes gesendet wird, wobei die Anwendungsfunktionsentität Folgendes umfasst: 30
 - eine Datenverkehrsdetektionsentität, die die paketgestützten Dienstdatenflüsse in dem Mobilkommunikationsnetz detektiert, 40
 - einen Richtlinienserver (110), der dafür konfiguriert ist, die anwendungsfunktionsabhängigen allgemeinen Grundregeln des paketgestützten Dienstdatenflusses zu steuern, die unabhängig von den allgemeinen Grund- und Gebührenregeln des Mobilkommunikationsnetzes kustomisiert, personalisiert oder angepasst werden, wobei der Richtlinienserver eine erste Schnittstelle (111) in Richtung der Datenverkehrsdetektionsentität (140, 150, 65, 70) enthält, 45
 - eine Schnittstelle (113) zu einer Datenbank, die Informationen enthält, mit denen allgemeine Grundregeln, die auf paketgestützte Dienstdatenflüsse anzuwenden sind, bestimmt werden können, 50
 - eine Anwendungsfunktionslogikentität (130), die dafür konfiguriert ist, die Anwendungsfunk-

tion zu steuern, wobei der Richtlinienserver des Weiteren eine zweite Schnittstelle (112) in Richtung der Anwendungsfunktionslogikentität (130) umfasst, wobei die Anwendungsfunktionslogikentität (130) eine Schnittstelle (132) in Richtung einer Allgemeinen-Grund- und Gebührenregeln-Funktionsentität (10) des Mobilkommunikationsnetzes enthält, wo die allgemeinen Grund- und Gebührenregeln des Mobilkommunikationsnetzes gespeichert werden,

wobei der Richtlinienserver (110) dafür konfiguriert ist, auf der Basis der Informationen in der Datenbank (120) die Richtlinie für den paketgestützten Dienstdatenfluss zu bestimmen, und dafür konfiguriert ist, die allgemeinen Grundregeln auf den paketgestützten Dienstdatenfluss anzuwenden.

2. Anwendungsfunktionsentität (100, 200, 300) nach Anspruch 1, wobei die Datenverkehrsdetektionsentität (140) eine Paketinspektionsentität ist. 20
3. Anwendungsfunktionsentität (100, 200, 300) nach einem der vorangehenden Ansprüche, wobei die Datenbank einen Teilnehmerprofilrepositorium (120) der Anwendungsfunktion ist. 25
4. Anwendungsfunktionsentität (100, 200, 300) nach Anspruch 3, wobei das Teilnehmerprofilrepositorium teilnehmerabhängige Teilnehmerprofile enthält und in der Anwendungsfunktionsentität angeordnet ist.
5. Anwendungsfunktionsentität (100, 200, 300) nach Anspruch 1, wobei die Anwendungsfunktionslogik (130) eine Schnittstelle (131, 133) in Richtung der Datenverkehrsdetektionsentität umfasst. 35
6. Anwendungsfunktionsentität (100, 200, 300) nach einem der vorangehenden Ansprüche, wobei die erste Schnittstelle (111) in Richtung der Datenverkehrsdetektionsentität als eine Sd- oder Gx-Schnittstelle implementiert ist. 40
7. Anwendungsfunktionsentität (100, 200, 300) nach einem der vorangehenden Ansprüche, wobei der Richtlinienserver (110) als eine Policy and Charging Rules Function (PCRF) implementiert ist, die in der Anwendungsfunktion angeordnet ist. 45
8. Anwendungsfunktionsentität (100, 200, 300) nach Anspruch 1, wobei die Schnittstelle (132) in Richtung der Allgemeinen-Grund- und Gebührenregeln-Steuerereinheit (10) des Mobilkommunikationsnetzes als eine Rx-Schnittstelle implementiert ist. 50 55

Revendications

1. Entité de fonction d'application (100, 200, 300) configurée pour commander des règles de politique dépendant d'une fonction d'application d'un flux de données de service basé sur paquets qui est transmis à un abonné d'un réseau de communication mobile, l'entité de fonction d'application comprenant :
 - une entité de détection de trafic qui détecte les flux de données de service basé sur paquets dans le réseau de communication mobile,
 - un serveur de politique (110) configuré pour commander les règles de politique dépendant d'une fonction d'application dudit flux de données de service basé sur paquets, qui sont sur mesure, personnalisées ou adaptées indépendamment des règles de politique et de facturation du réseau de communication mobile, le serveur de politique contenant une première interface (111) avec l'entité de détection de trafic (140, 150, 65, 70),
 - une interface (113) avec une base de données contenant des informations avec lesquelles des règles de politique à appliquer à des flux de données de service basé sur paquets peuvent être déterminées,
 - une entité de logique de fonction d'application (130) configurée pour commander la fonction d'application, le serveur de politique comprenant en outre une deuxième interface (112) avec l'entité de logique de fonction d'application (130),

dans laquelle l'entité de logique de fonction d'application (130) contient une interface (132) avec une entité de fonction de règles de politique et de facturation (10) du réseau de communication mobile, où les règles de politique et de facturation du réseau de communication mobile sont mémorisées,

dans lequel le serveur de politique (110) est configuré pour déterminer, sur la base des informations dans la base de données (120), la politique pour ledit flux de données de service basé sur paquets, et est configuré pour appliquer les règles de politique au dit flux de données de service basé sur paquets.
2. Entité de fonction d'application (100, 200, 300) selon la revendication 1, dans laquelle l'entité de détection de trafic (140) est une entité d'inspection de paquets.
3. Entité de fonction d'application (100, 200, 300) selon l'une quelconque des revendications précédentes, dans laquelle la base de données est un répertoire de profils d'abonnés (120) de la fonction d'application.
4. Entité de fonction d'application (100, 200, 300) selon la revendication 3, dans laquelle le répertoire de profils d'abonnés contient des profils d'abonnés dépendant d'un abonné et est prévu dans l'entité de fonction d'application.
5. Entité de fonction d'application (100, 200, 300) selon la revendication 1, dans laquelle la logique de fonction d'application (130) comprend une interface (131, 133) avec l'entité de détection de trafic.
6. Entité de fonction d'application (100, 200, 300) selon l'une quelconque des revendications précédentes, dans laquelle la première interface (111) avec l'entité de détection de trafic est mise en oeuvre en tant qu'une interface Sd ou Gx.
7. Entité de fonction d'application (100, 200, 300) selon l'une quelconque des revendications précédentes, dans laquelle le serveur de politique (110) est mis en oeuvre en tant qu'une fonction de règles de politique et de facturation, PCRF, prévue dans la fonction d'application.
8. Entité de fonction d'application (100, 200, 300) selon la revendication 1, dans laquelle l'interface (132) avec l'organe de commande de règles de politique et de facturation (10) du réseau de communication mobile est mise en oeuvre en tant qu'une interface Rx.

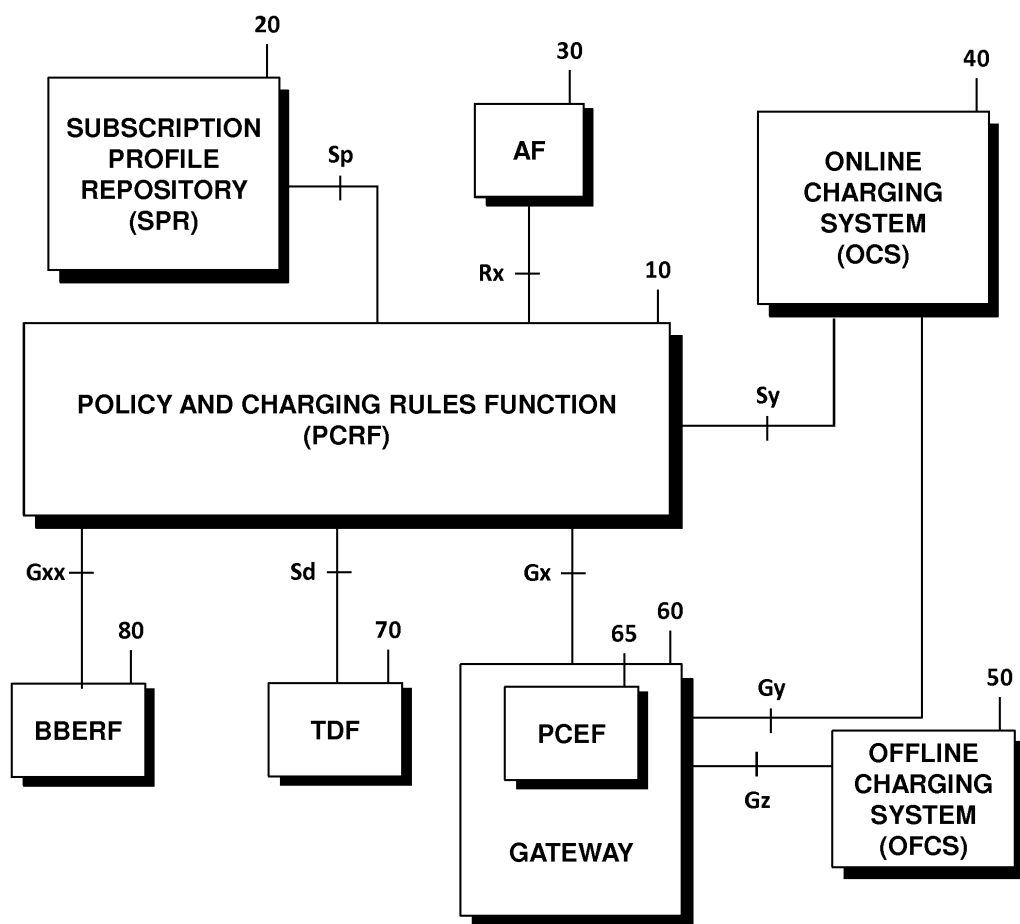


FIG. 1

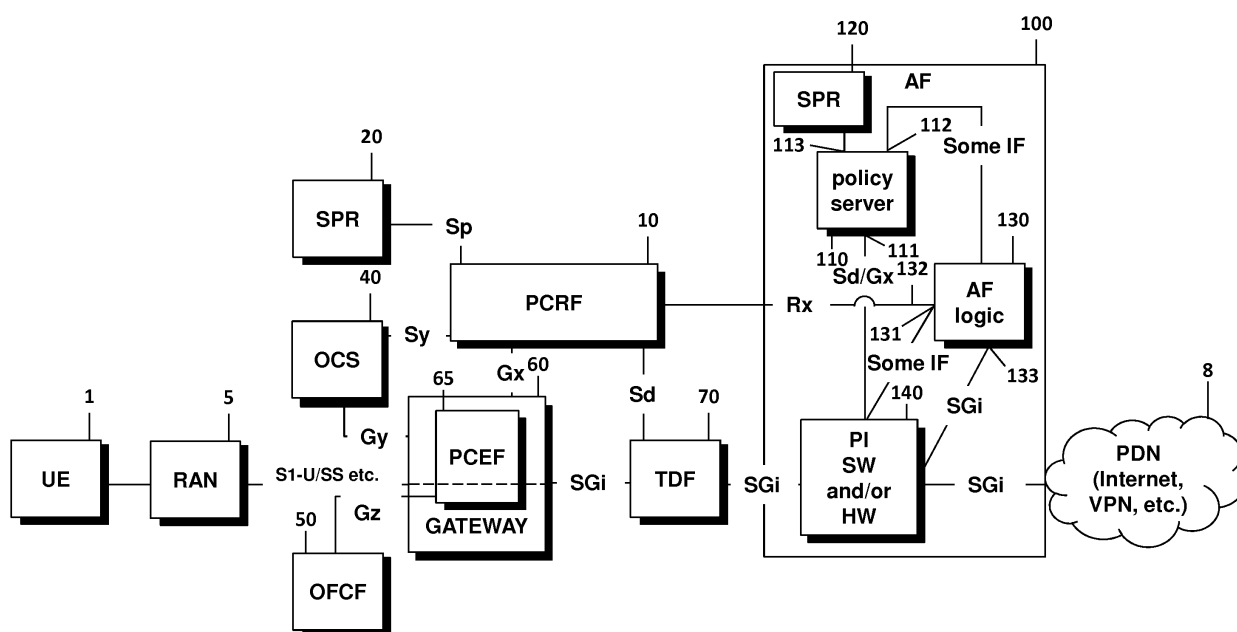


FIG. 2

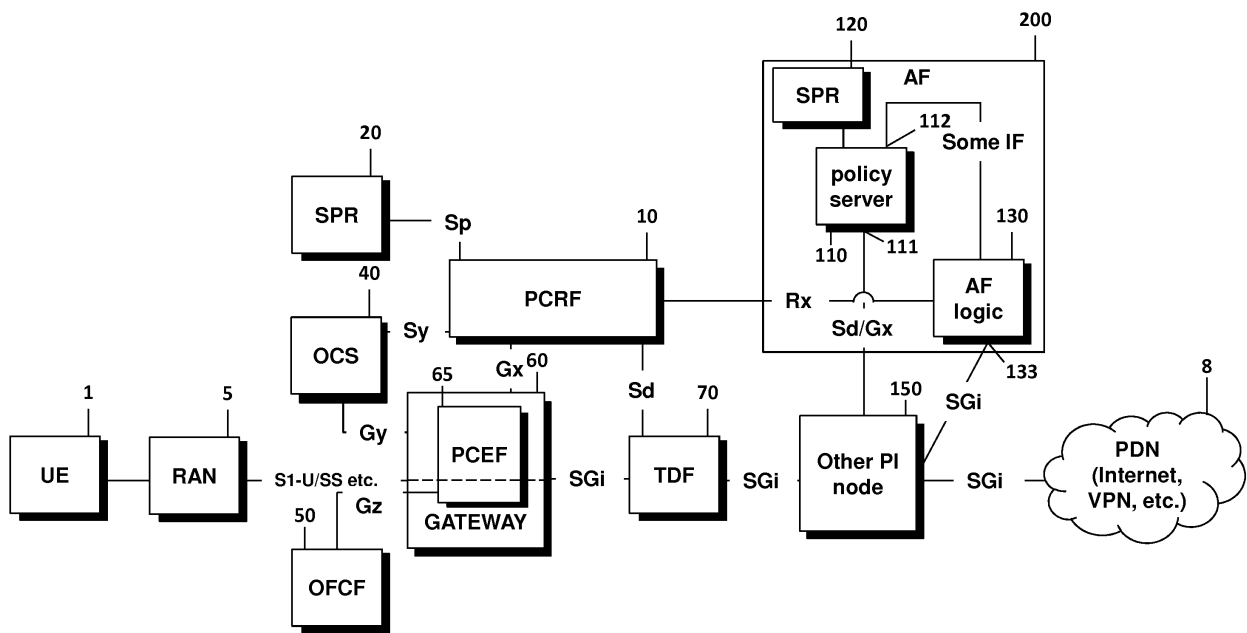


FIG. 3

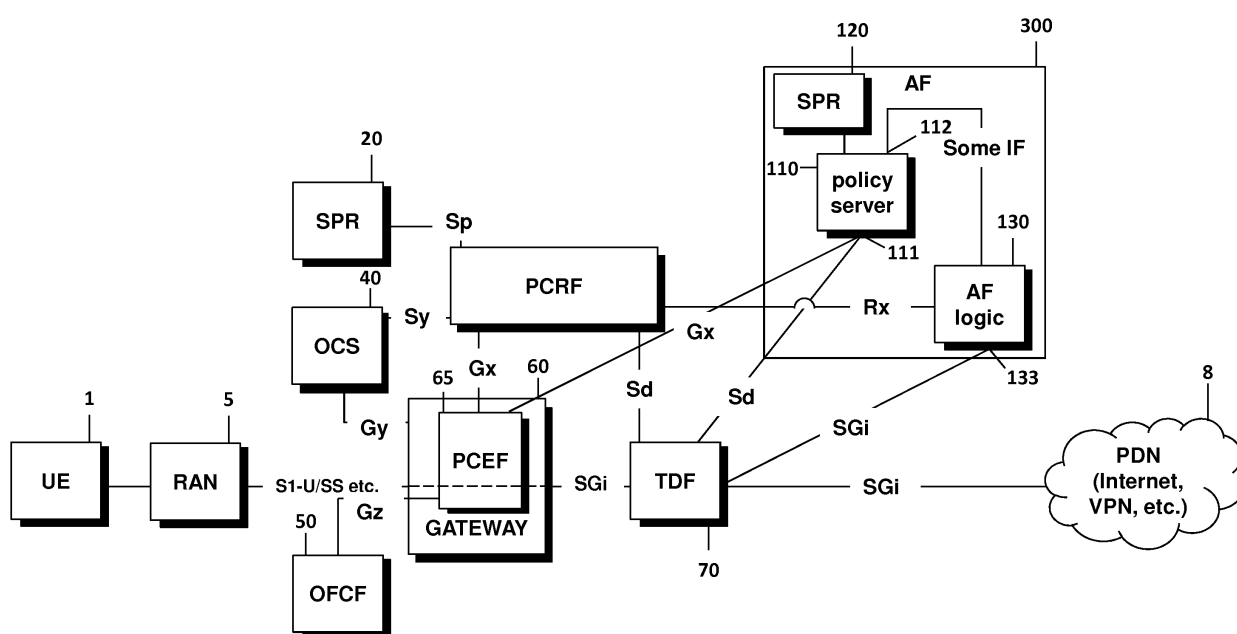


FIG. 4

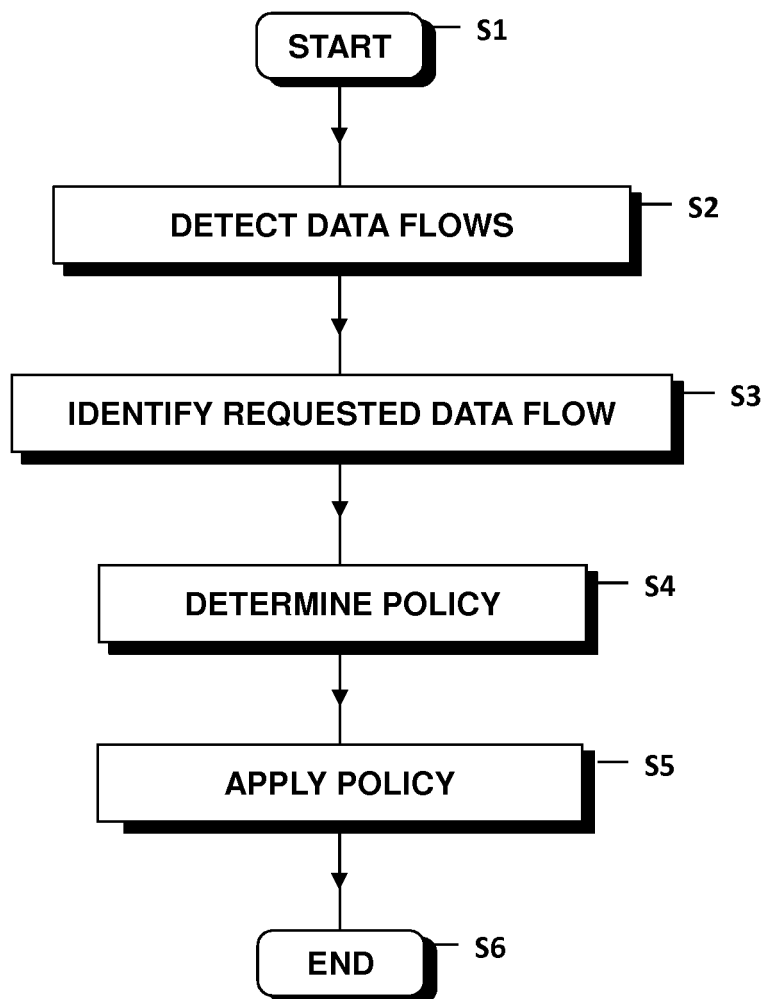


FIG. 5

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- US 2011208853 A1 [0002]