



(22) Date de dépôt/Filing Date: 1992/02/10

(41) Mise à la disp. pub./Open to Public Insp.: 1993/03/21

(45) Date de délivrance/Issue Date: 2002/12/10

(30) Priorité/Priority: 1991/09/20 (763,335) US

(51) Cl.Int.⁵/Int.Cl.⁵ A61F 5/01, A61F 5/00


(72) Inventeur/Inventor:
LAMONT, WILLIAM D., US

(73) Propriétaire/Owner:
LAMONT, WILLIAM D., US

(74) Agent: SMART & BIGGAR


(54) Titre : BOTTES DE PROTECTION

(54) Title: PROTECTIVE BOOT STRUCTURE

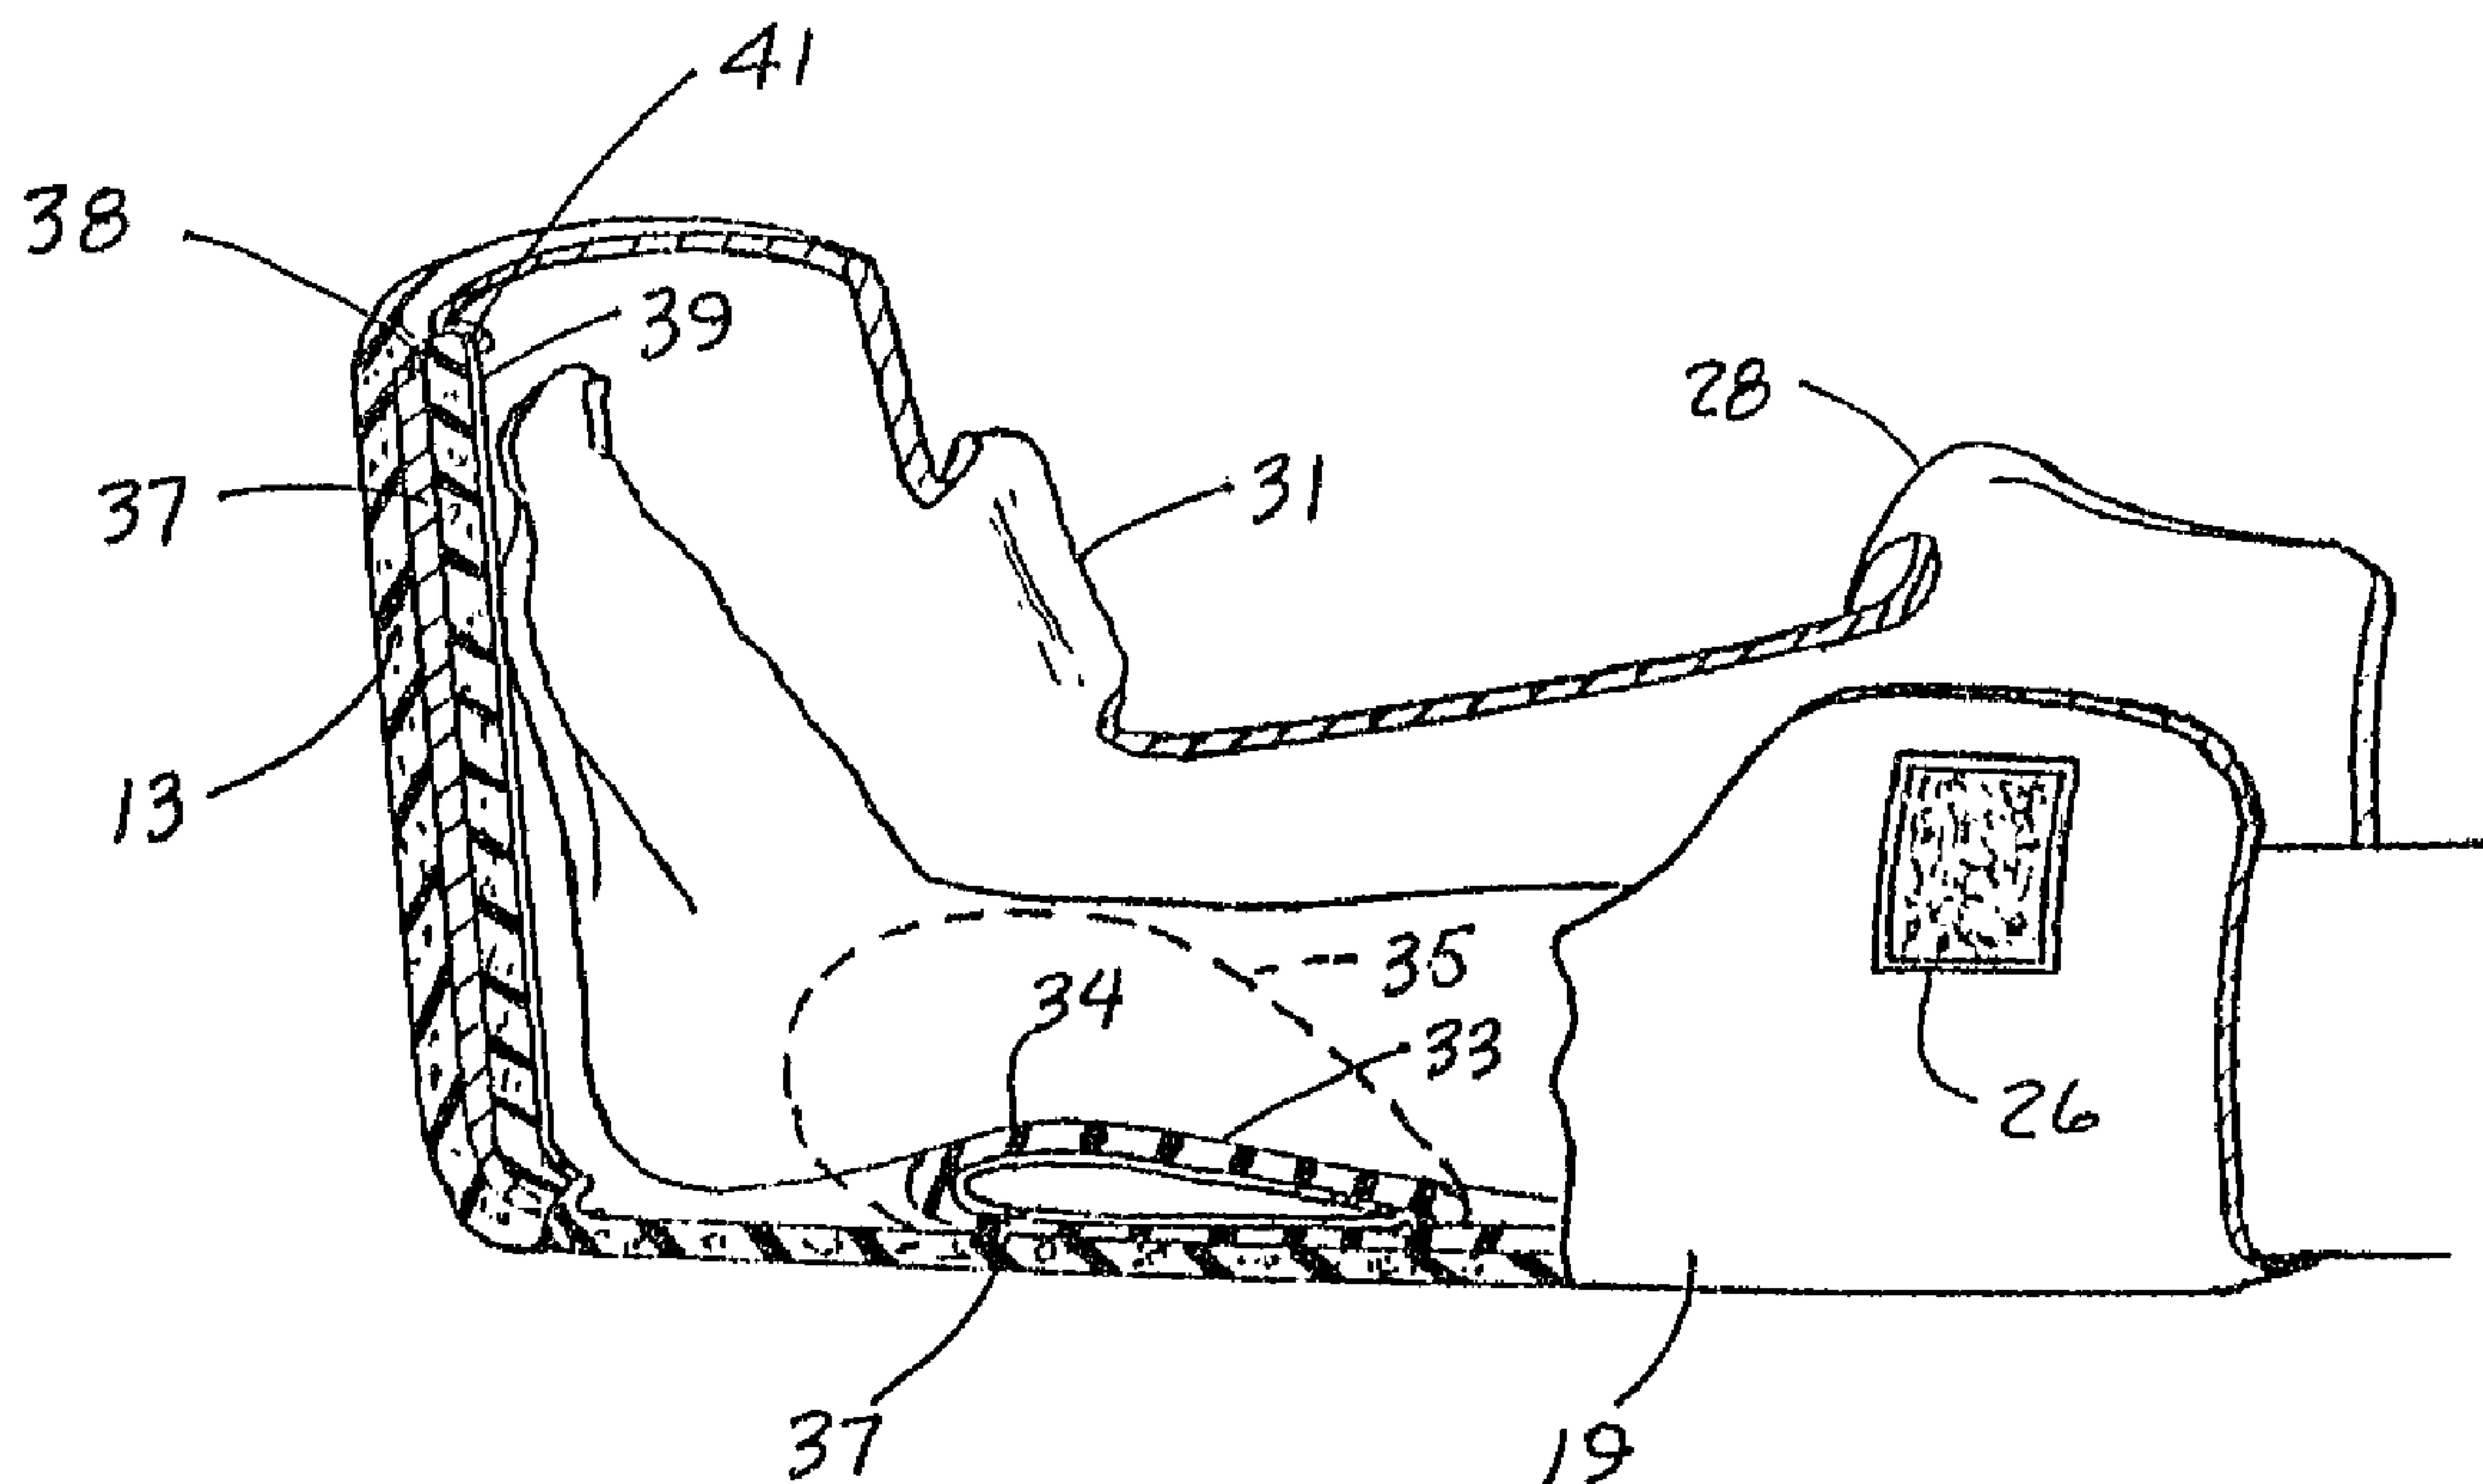

(57) Abrégé/Abstract:

A protective boot for patients with arterial disease. The boot includes a separate fluid-containing cushion which can be attached in a variety of positions on or in the boot to provide support for the patient's foot and leg when bedridden.

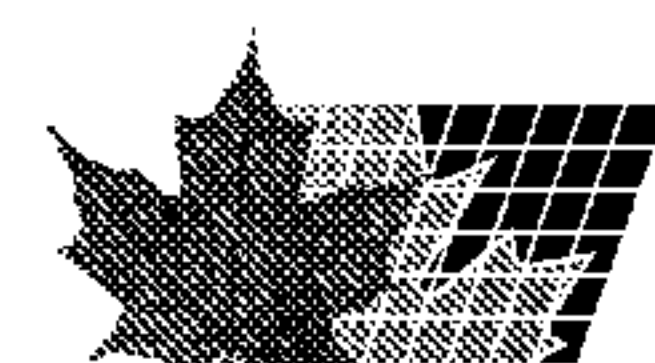

~~X~~
~~14~~

2060910

ABSTRACT

A protective boot for patients with arterial disease.
The boot includes a separate fluid-containing cushion which
can be attached in a variety of positions on or in the boot
to provide support for the patient's foot and leg when bed-
ridden.

PROTECTIVE BOOT STRUCTURE

Background of the Invention

1. Field of the Invention:

This invention relates to a protective boot for the
5 comfort and protection of a patient who, if not entirely
bedfast, must spend so much time there as to be in danger
of incurring decubitus ulcers or other forms of trauma. In
particular, the invention relates to a boot capable of use
both in bed and during a limited amount of ambulation and
10 having a fluid-containing cushion with releasable attach-
ment means to allow it to be positioned on or within the
boot wherever needed to provide support for the patient's
foot and leg. The cushion has an enclosed fluid-filled
core to allow the cushion to conform comfortably to any
15 part of the patient's foot or lower leg that may be pressed
against it while the patient is lying down.

2. Description of Relevant Art:

My prior U.S. patent 4,478,214 describes a soft boot
that is designed to protect a patient's foot from trauma,
20 abrasions, decubitus ulcer formation, moisture accumula-
tion, external pressures, heat loss, etc. during both bed-
ridden and ambulatory conditions. The boot is generally
open at the front, except for an integral closure portion,
and has a rigid liner that extends along the sole to a
25 point beyond the user's toes and is bent up at the front.
The boot has a fluid cushion built into a fixed location in
the lower rear part of the boot to engage the patient's
heel cord and support the back portion of the patient's

leg. Sides of the cushion also extend a short distance along the side of that portion to give added protection and comfort.

5 An ulcer-prevention device shown by Browning in U.S.patent 4,197,845 is made of cloth and is shaped generally like a sock, the toe and heel of which have been removed and which is openable along the front to receive a patient's foot. The front edges have Velcro fasteners to hold them together after the device has been placed on the
10 patient's foot. A fluid-filled cushion is held by straps normally attached to the back of the device behind the user's ankle to support the heel out of contact with the bed. The fluid-filled cushion can, alternatively, be attached to any place on the device to elevate selected
15 parts of the patient's foot so as to prevent those parts from pressing against the bed.

U.S. reissue patent Re. 33,090 to Berguer describes a boot formed of a double layer of laminated material with a foam insert built into a fixed location between the layers
20 at the lower back part of the boot and extending forward slightly along the sides of the boot to support the patient's heel cord. Each layer of the laminated material comprises a sheet of foam material and a flexible cover sheet. In the finished boot, the two foam layers face each other and are enclosed between their respective cover
25 sheets, one of which thus constitutes the outermost part of the boot, while the other constitutes the innermost part. Seams at the toe and around the periphery of the sole are

sewn facing outwardly, which makes it possible that they may come in contact with the patient's other foot.

Other devices to support patients' feet and ankles are described by Streeter in U.S. patent 2,911,657; Holy, Jr. in U.S. patent 3,511,233; Peter in U.S. patent 3,606,884; and Walker in U.S. patent 4,076,022.

Objects and Summary of the Invention

It is an object of this invention to provide an improved medical boot for adjustable, comfortable support and protection for a patient required to spend a substantial part of their time in bed.

Another object is to provide convenient means for easily changing the location and extent of support of the foot and lower leg portion of a patient to prevent the formation of decubitus ulcers and other kinds of discomfort and trauma.

A further object is to provide a medical boot with a removable, padded reinforcing plate that can be easily removed to make ambulation easier for the patient.

A medical boot made in accordance with this invention comprises a substantially boot-shaped main body and a pillow that contains a fluid-containing cushion and is releasably attachable to selected locations on both the internal and external surface of the main body to increase the patient's comfort and to minimize the possibility of forming decubitus ulcers. The main body includes a foot portion and an upper portion that extends above the user's ankle. Both portions, as well as the pillow, are formed

primarily of substantially soft, flexible, compressible, shape-retaining material bonded surface-to-surface to a layer of soft, smooth, non-allergenic cloth, such as moleskin. The pillow has a central recess, in which the fluid-containing cushion is enclosed, and panels on each side of the central part. The panels can either be spread out to cushion sides of the patient's ankle, or one or both panels can be folded over the central part to increase its thickness.

The fluid-containing cushion is typically a soft plastic envelope that can be filled with water or air, and its thickness and firmness as a cushion can be increased by folding one part of the envelope over another part.

The invention will be described in greater detail in connection with the drawings, in which like serial numbers in different figures indicate the same item.

Brief Description of the Drawings

Figure 1 shows a panel of material on which components of the boot of this invention are indicated.

Figure 2 is a cross-sectional view of a fragment of the panel in Figure 1.

Figure 3 is a perspective view of the boot of this invention.

Figure 4 is a side view of the boot in Figure 3 with parts broken away to show the internal structure.

Figure 5 shows a detachable support component for the boot in Figure 3 with parts broken away to reveal the inner structure.

Figure 6 is a front view of a fluid-filled container for use in the support in Figure 5.

Figure 7 is a side view of the container in Figure 6.

Detailed Description of a Preferred Embodiment

5 Figures 1 and 2 show a multi-layer sheet 11 on which outlines of panels 12 and 13 to be used in making boot components are laid out. The sheet 11 consists of a layer 14 of elastomeric, shape-retaining material, such as soft, flexible, compressible open-cored polyurethane foam, or the
10 like, with layers 16 and 17 of ultra-smooth, soft, non-allergenic cloth, such as moleskin, adhesively bonded to the surfaces of the layer 14. For the sake of simplicity of description, the layers 16 and 17 will be referred to hereinafter as moleskin, although it is to be understood
15 that another type of soft cloth or clothlike material may be used instead.

 Figure 3 shows a boot 18, the upper part 19 of which is formed of the panel 12 and the sole of which is formed by the panel 13. One of the layers 16 or 17 of moleskin
20 will form the inner surface of the boot and the other the outer surface, thereby not only eliminating skin irritation of the foot on which the boot is placed but irritation of any other part of the patient's skin with which the outer surface of the boot may come in contact.

25 An overedge binding 21 is stitched around the entire perimeter common perimeter of the panel to strengthen the perimeter against fraying, as well as to provide a sturdy structure at a seam 22 at the front of the toe 23. A

similar overedge binding 24 is formed around the perimeter of the panel 13 where it joins the bottom edge of the upper part. The boot is initially sewn together inside out and is then turned right side out to place the bindings, which can be rather abrasive, on the inside where they cannot rub against the patient's other leg.

The boot has a patch 26 of one form of hook-and-loop material located in the proper position on the upper part 19 to engage a patch 27 of the other form of hook-and-loop material on the surface of a leg strap 28, which is shown in the open position to receive a patient's leg. The patches 26 and 27 may be attached to their respective parts of the boot 18 by any suitable means. In this embodiment, the patch 26 is attached adhesively and the patch 27 is attached by being stitched to the leg strap.

The foot portion 29 of boot has another patch of one form of hook-and-loop material located in the proper position to engage a patch of the other type of hook-and-loop material near the end of the juxtaposed surface of a foot strap 31. This strap is shown in closed position, so that the patch on it not visible, being on the under side and juxtaposed with the patch on the foot portion. However, the location of the patch on the foot strap is shown by a line of stitching 32 by which that patch is attached to the foot strap, and the cooperating patch is attached to the foot portion 29 directly below the foot strap patch.

This invention provides a pillow 33 with a central

portion 34 and side panels 35 and 36, of which only the panel 35 is shown in Figure 3. The central portion of the pillow is centered in the lower, rear, interior surface of the boot 18 in Figure 3, but it is one of the features of this invention that the pillow 33 is releasably attached to the boot and can be moved to any location that makes the patient more comfortable or provides needed support, either on the inner surface, as shown in Figure 3 or on the outer surface.

Figure 4 shows the boot 18 on the foot of a patient in supine position with both the leg and foot straps 28 and 31, respectively, open. The pillow 33 is shown under the heel cord of the patient, as is appropriate to elevate the patient's heel away from the surface of the boot in order to avoid decubitus ulcer formation on the heel. The central part 34 of the pillow is in cross section, and it may be seen that it has an outer covering that consists of two layers of elastomeric, shape-retaining material, such as soft, flexible, compressible open-cored polyurethane foam, or the like between which there is a fluid-containing cushion of relatively soft, easily deformable material, such as polyethylene or the like. The pillow 33 is thus free to conform to the contours of the portion of the patient's leg with which it comes in contact, thereby providing maximum comfort, yet the fluid-containing pillow does not take a set configuration after prolonged pressure, as does the elastomeric material frequently used heretofore in medical boots.

Figure 4 shows the arrangement of the foot portion 29 of the boot 18. This an open-toed design, which allows the patient's foot to be ventilated more easily, and thereby not only keeps the patient more comfortable but also reduces moisture accumulation. In addition, the open-toed design permits easy visual inspection and pulse checks of the patient's foot by medical personnel.

The sole of the boot is shown to have several layers. The outer layer is the panel 13, and its binding 24 is shown to be turned inwardly, as previously described. In addition, a sturdy inner sole is provided to help prevent foot-drop by maintaining normal foot positioning. In this embodiment, the inner sole includes a plate 37 of relatively rigid material, such as cardboard about $\frac{1}{8}$ " thick and a pad 38 of foam material, one surface of which is bonded adhesively to the plate and the other surface of which has a layer 39 of moleskin or the like bonded to it. As in the other parts formed of a sheet of moleskin or the like bonded to a sheet of foam material, the periphery of the pad is defined by overedge stitching 41. The inner sole consisting of the plate 37 and the pad 38 is not attached to the rest of the foot portion 29 except by being fitted in snugly, and it can be easily removed for better ambulation. When the patient is supine, the plate 37, which extends beyond the ends of the patient's toes, protects the patient's foot against pressure from bedclothing. The construction of the boot, with its firm, anti-slip sole, permits secure, comfortable ambulation for

the patient.

5 The fluid-containing pillow 33 is shown in greater detail in Fig. 5, which is a rear view to show a patch of hook material 42. Such material normally engages loop material, but the minute hooks can also lock onto the soft moleskin in which the entire boot 18 is covered. This makes it possible to place the pillow in any location on either the inner surface or the outer surface of the boot, as required to obtain the greatest comfort or provide the necessary support for the patient. In most cases, it is likely that the pillow would be in the position shown in Fig. 4, but if the patient were forced to lie face down, the pillow 33 could be placed on the front portion, for example in the area of the leg strap. It could also be placed on the sides of the boot.

15 The pillow 33 comprises front and rear coverings, each of which consists of a layer 43 of moleskin 44 covering and adhesively joined to a layer 44 of substantially soft, flexible, compressible shape-retaining material 45 defining a main pillow portion 46 and side panels 47 and 48 extending symmetrically from the main pillow portion. The main portion 46 has a lateral dimension bounded by two seams 49 and 50, and the side panels preferably extend outwardly from the main portion 46 in the opposite lateral directions by at least substantially the same distance as the lateral dimension of the main portion. This permits either or both panels 47 and 48 to be folded across the main portion 46 to increase the thickness of the pillow, if

necessary.

5 The main portion defines a central recess in which is placed an easily deformable, fluid-containing, container 50 shown in Figures 6 and 7. This container provides cushion means for obtaining soothing water flotation of the patient's heel and leg, and it also provides ankle bone protection. In addition, it does not take a set as the foam material currently used in some ankle supports is likely to do. The container is made of relatively soft plastic material, such as polyethylene and has a certain normal maximum volume. However, in accordance with this invention, it is not normally filled to its full capacity. This leaves it sufficiently compliant to fit the contours of the patient's foot or ankle or an bandages or other devices thereon. If it is desired to make it thicker, at the expense of making it harder, one end 51 may be folded over before it is placed in the central recess in the pillow 33.

20 The invention has been described in terms of a specific embodiment, but it will be apparent to those skilled in the art that modifications may be made therein without departing from the true scope of the invention.

What is claimed is:

1 1. A medical boot comprising:

2 (a) a substantially boot-shaped main body portion
3 formed primarily of substantially soft, flexible,
4 compressible, shape-retaining material;

5 (b) pillow means comprising:

6 (i) an outer covering of substantially soft,
7 flexible, compressible shape-retaining material defining a
8 main pillow portion with a recess and side panel means
9 extending from the main pillow portion, and

10 (ii) easily deformable, fluid-containing,
11 cushion means within the recess, and

12 (c) releasable attachment means to attach the
13 pillow means to selected locations on the main body
14 portion.

1 2. The medical boot of claim 1 in which the
2 releasable attachment means comprises hook-and-loop means
3 attached to the pillow means.

1 3. The medical boot of claim 2 comprising a
2 plurality of said pillow means.

1 4. The medical boot of claim 1 in which the outer
2 covering of the pillow means comprises a composite layer of
3 soft, flexible, compressible, shape-retaining foam material
4 bonded to a layer of ultra-smooth, soft, non-allergenic
5 cloth.

1 5. The medical boot of claim 4 in which the cloth is
2 moleskin.

1 6. The medical boot of claim 1 in which the recess

2 in the pillow means is centrally located and is defined by
3 longitudinal seams on each side of the main pillow portion
4 and has a predetermined longitudinal dimension, and the
5 side panel means extend laterally outward beyond the seams
6 and comprise lobes extending longitudinally beyond the
7 recess.

1 7. The medical boot of claim 6 in which the side
2 panel means comprise one side panel on each side of the
3 recess, and the lobes are at one longitudinal end of each
4 side panel.

1 8. The medical boot of claim 7 in which the side
2 panels are substantially symmetrical about the main pillow
3 portion.

1 9. The medical boot of claim 1 in which the fluid-
2 containing cushion means comprises a relatively soft,
3 plastic container having a maximum effective volume and
4 contains less than that volume of fluid.

1 10. The medical boot of claim 9 in which one end
2 portion of the plastic container is folded over and
3 attached to the remainder of the plastic container to
4 reduce the effective volume of the container.

1 11. A medical boot having:

2 (a) a foot-receiving part comprising relatively
3 soft, compressible sheet material having inner and outer
4 surfaces;

5 (b) a contiguous leg-receiving part adapted to
6 extend up to at least the lower portion of the calf of a
7 patient and comprising relatively soft, compressible sheet

8 material having inner and outer surfaces;

9 (c) relatively soft sheet means on inner and
10 outer surfaces of both of the parts;

11 and

12 (e) pillow means comprising:




13 (i) layers of relatively soft shape-
14 retaining material defining a central portion having a
15 recess therein and side panels extending laterally from the
16 central portion,

17 (ii) attachment means to attach the pillow
18 to selected parts of the sheet means, and

19 (iii) a flexible, fluid-containing container
20 in the central recess.

1 12. The medical boot of claim 11 in which the central
2 portion of the pillow means has a predetermined lateral
3 width between the side panels, and the side panels extend
4 laterally outward from the central portion by a distance
5 substantially equal to the lateral width of the central
6 portion.

Smart & Biggar
Ottawa, Canada
Patent Agents

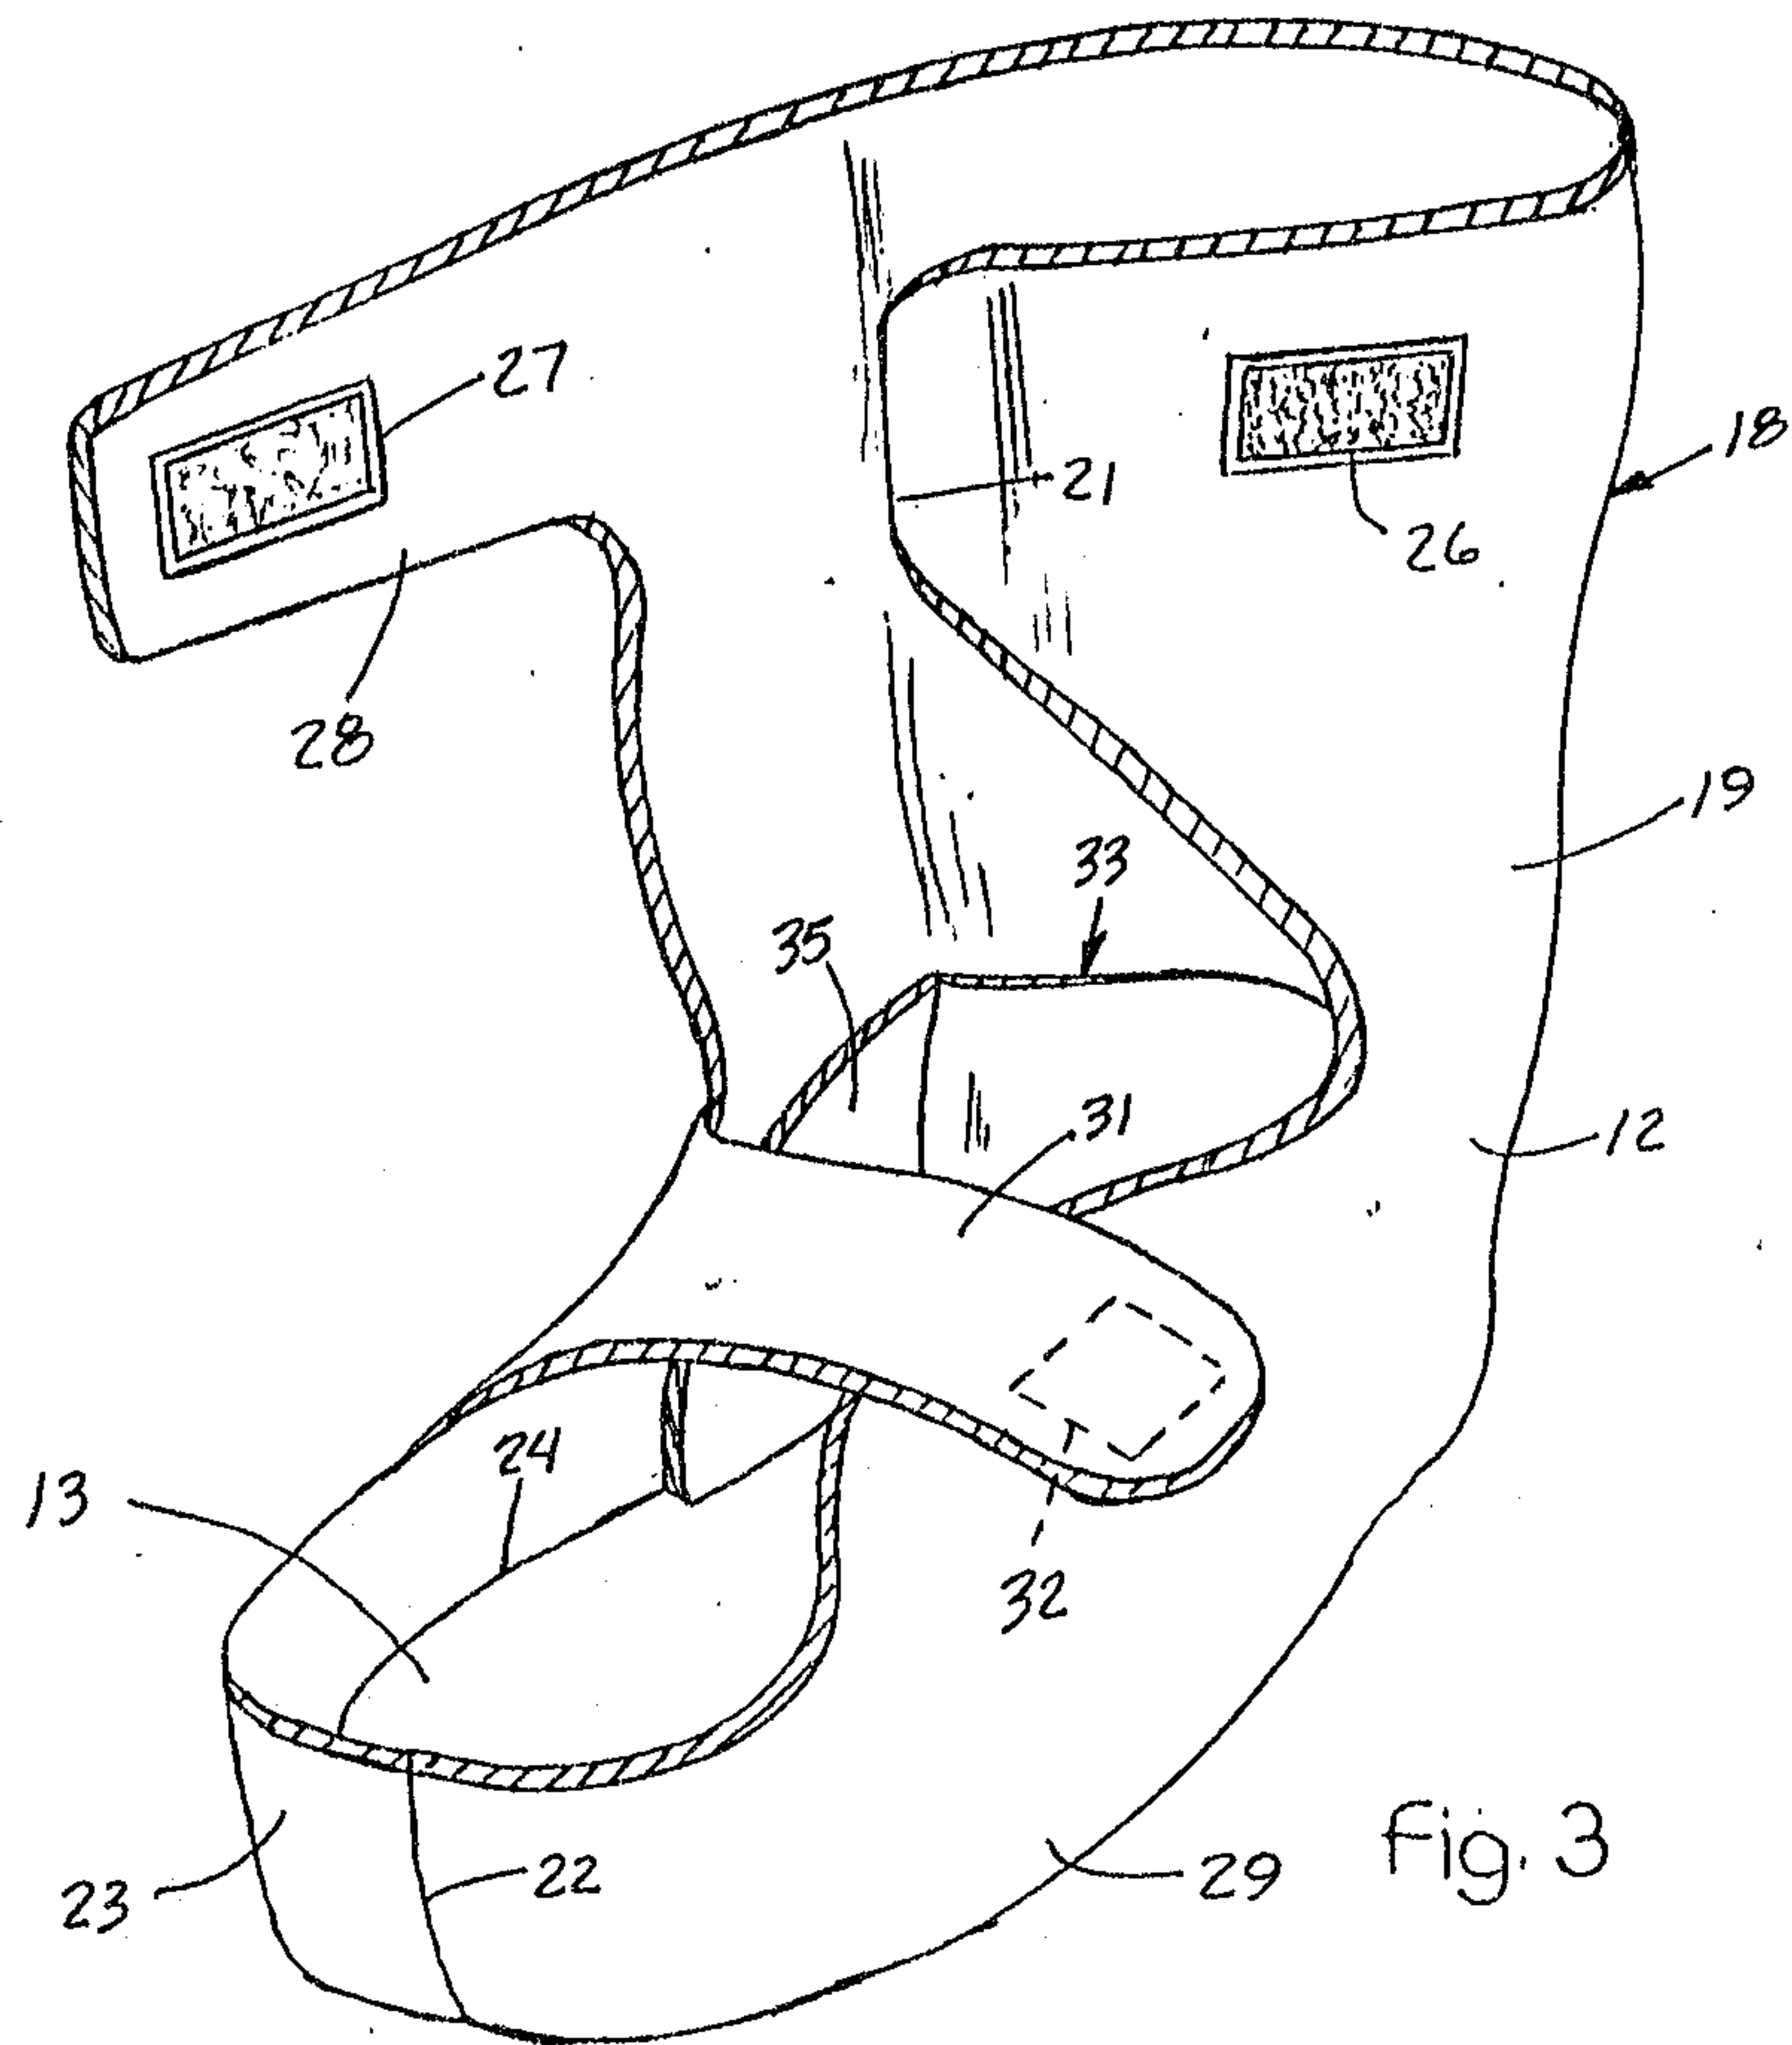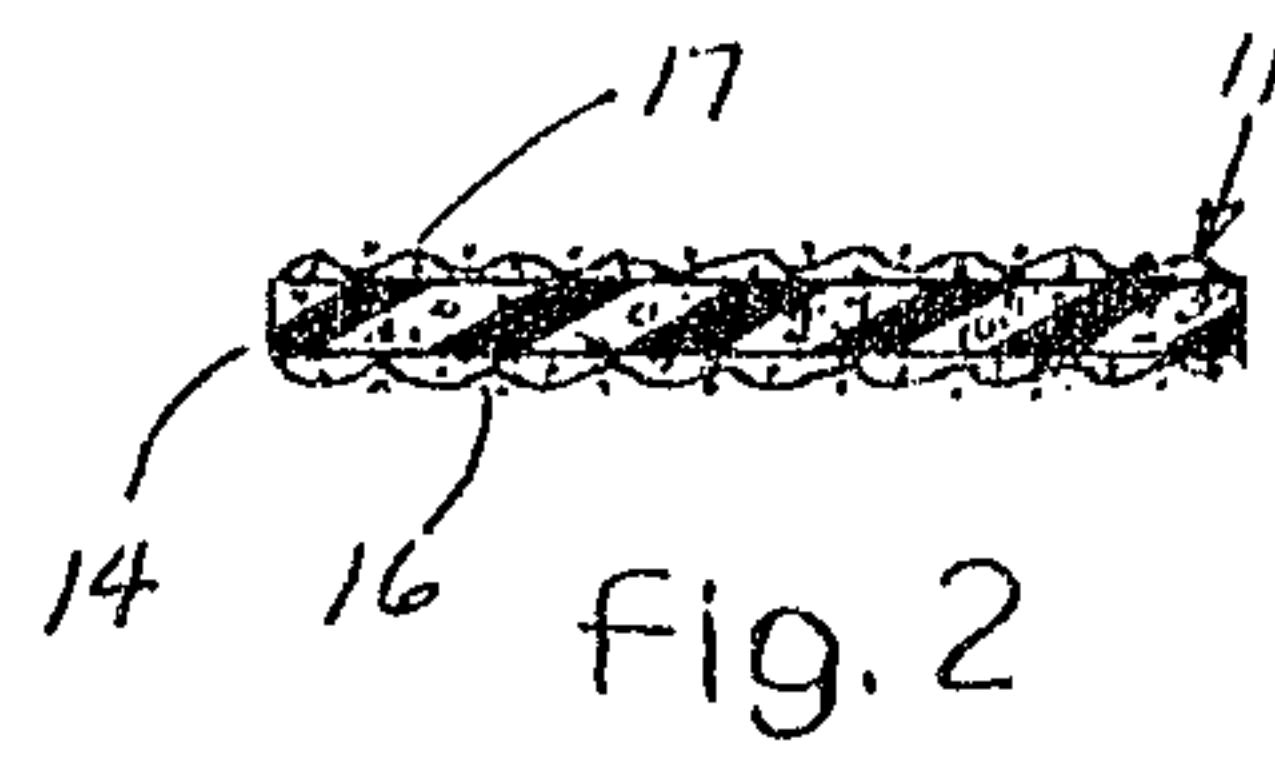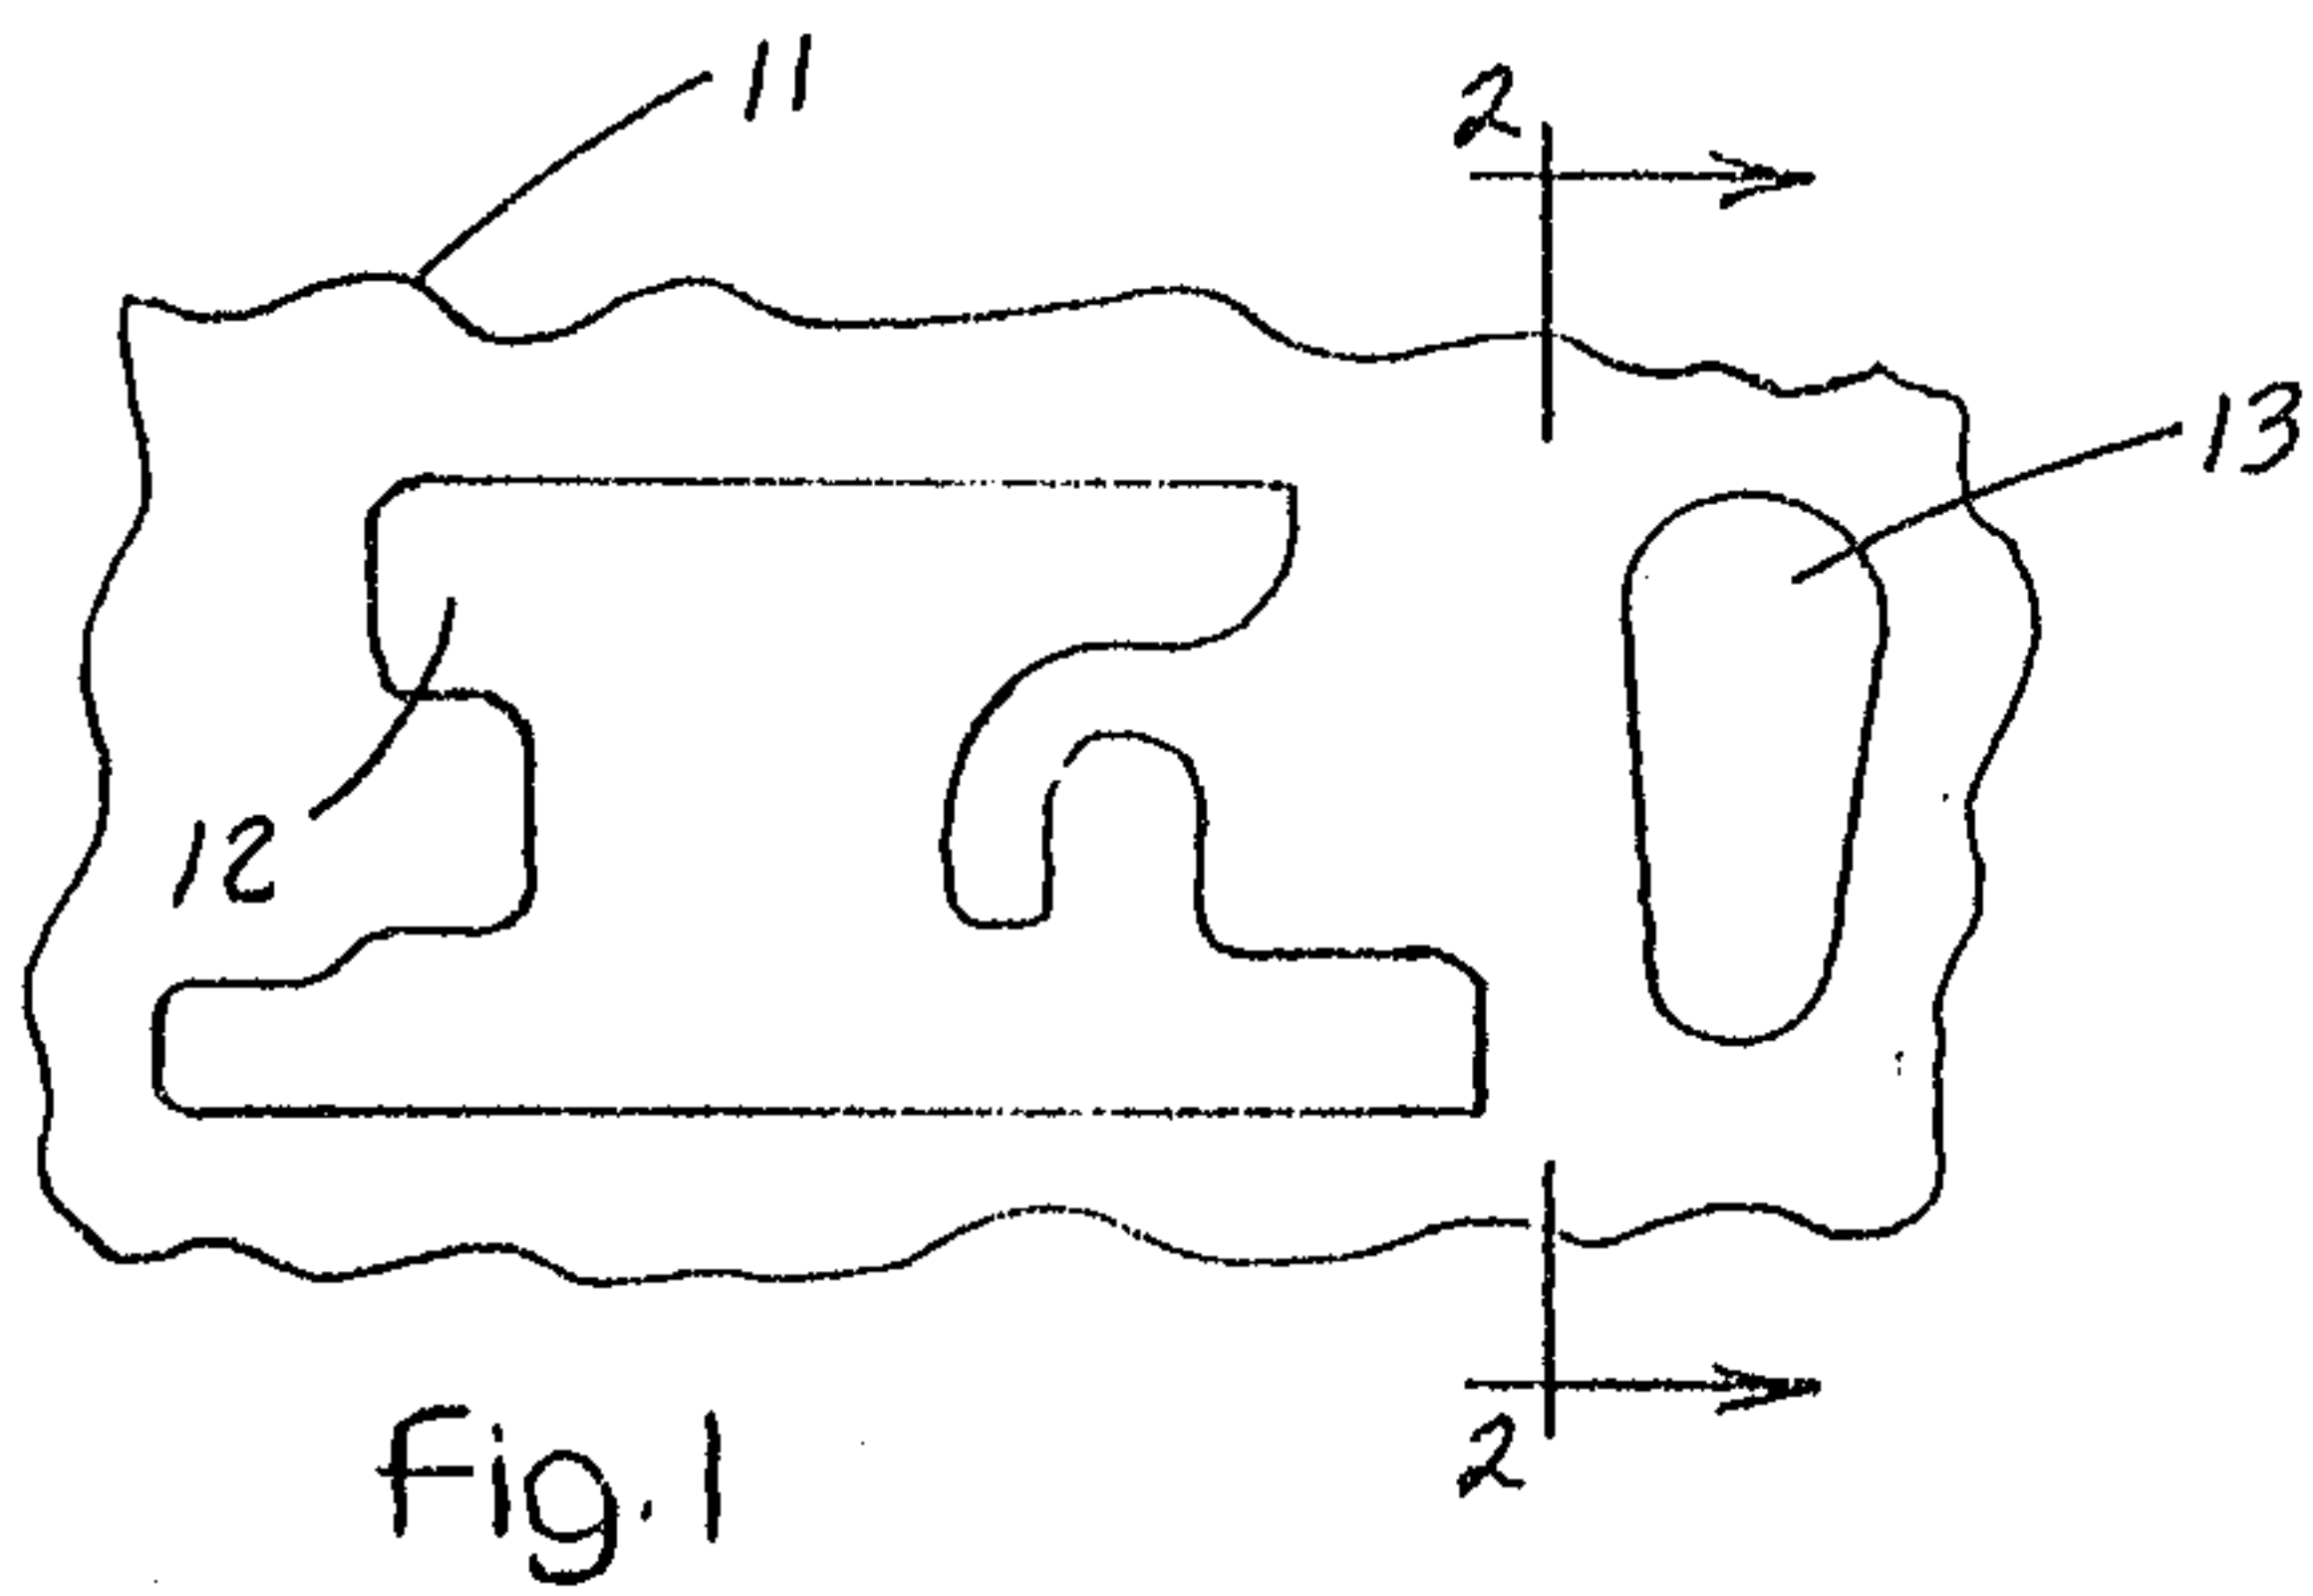

Patent Agents
Smart & Biggar




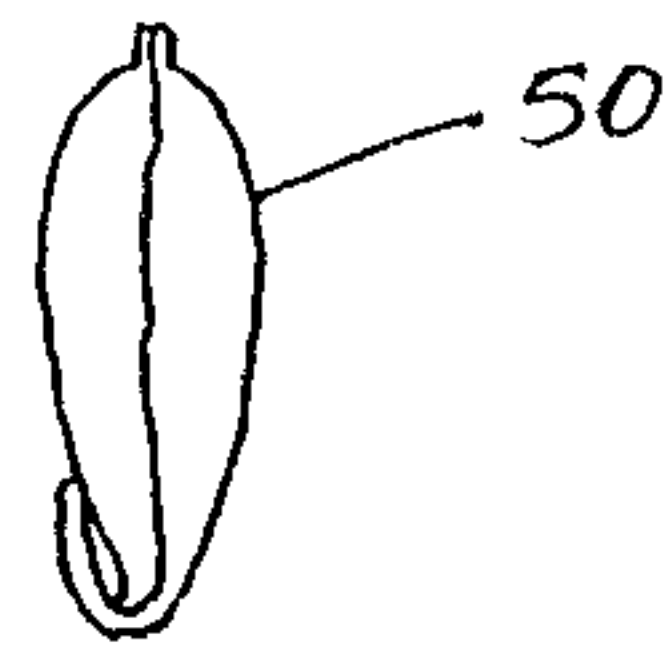


fig. 6

fig. 7

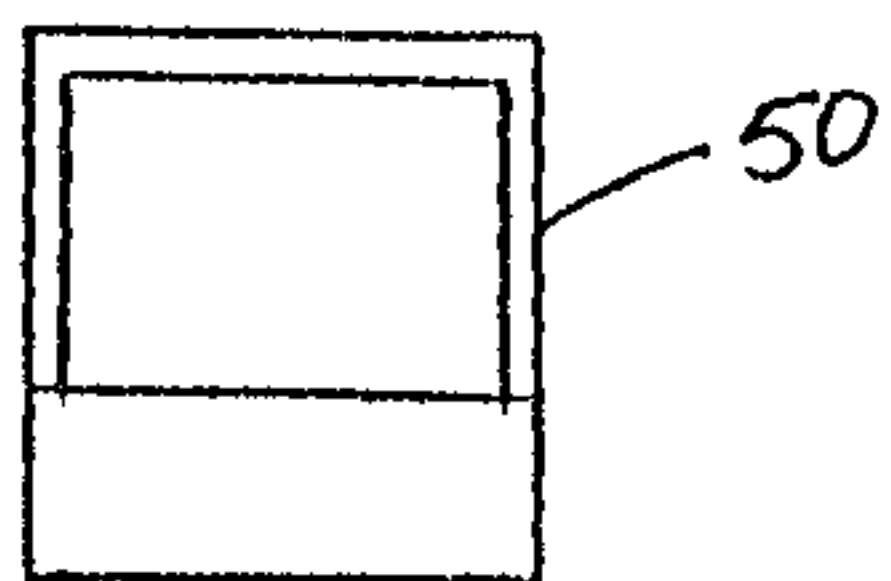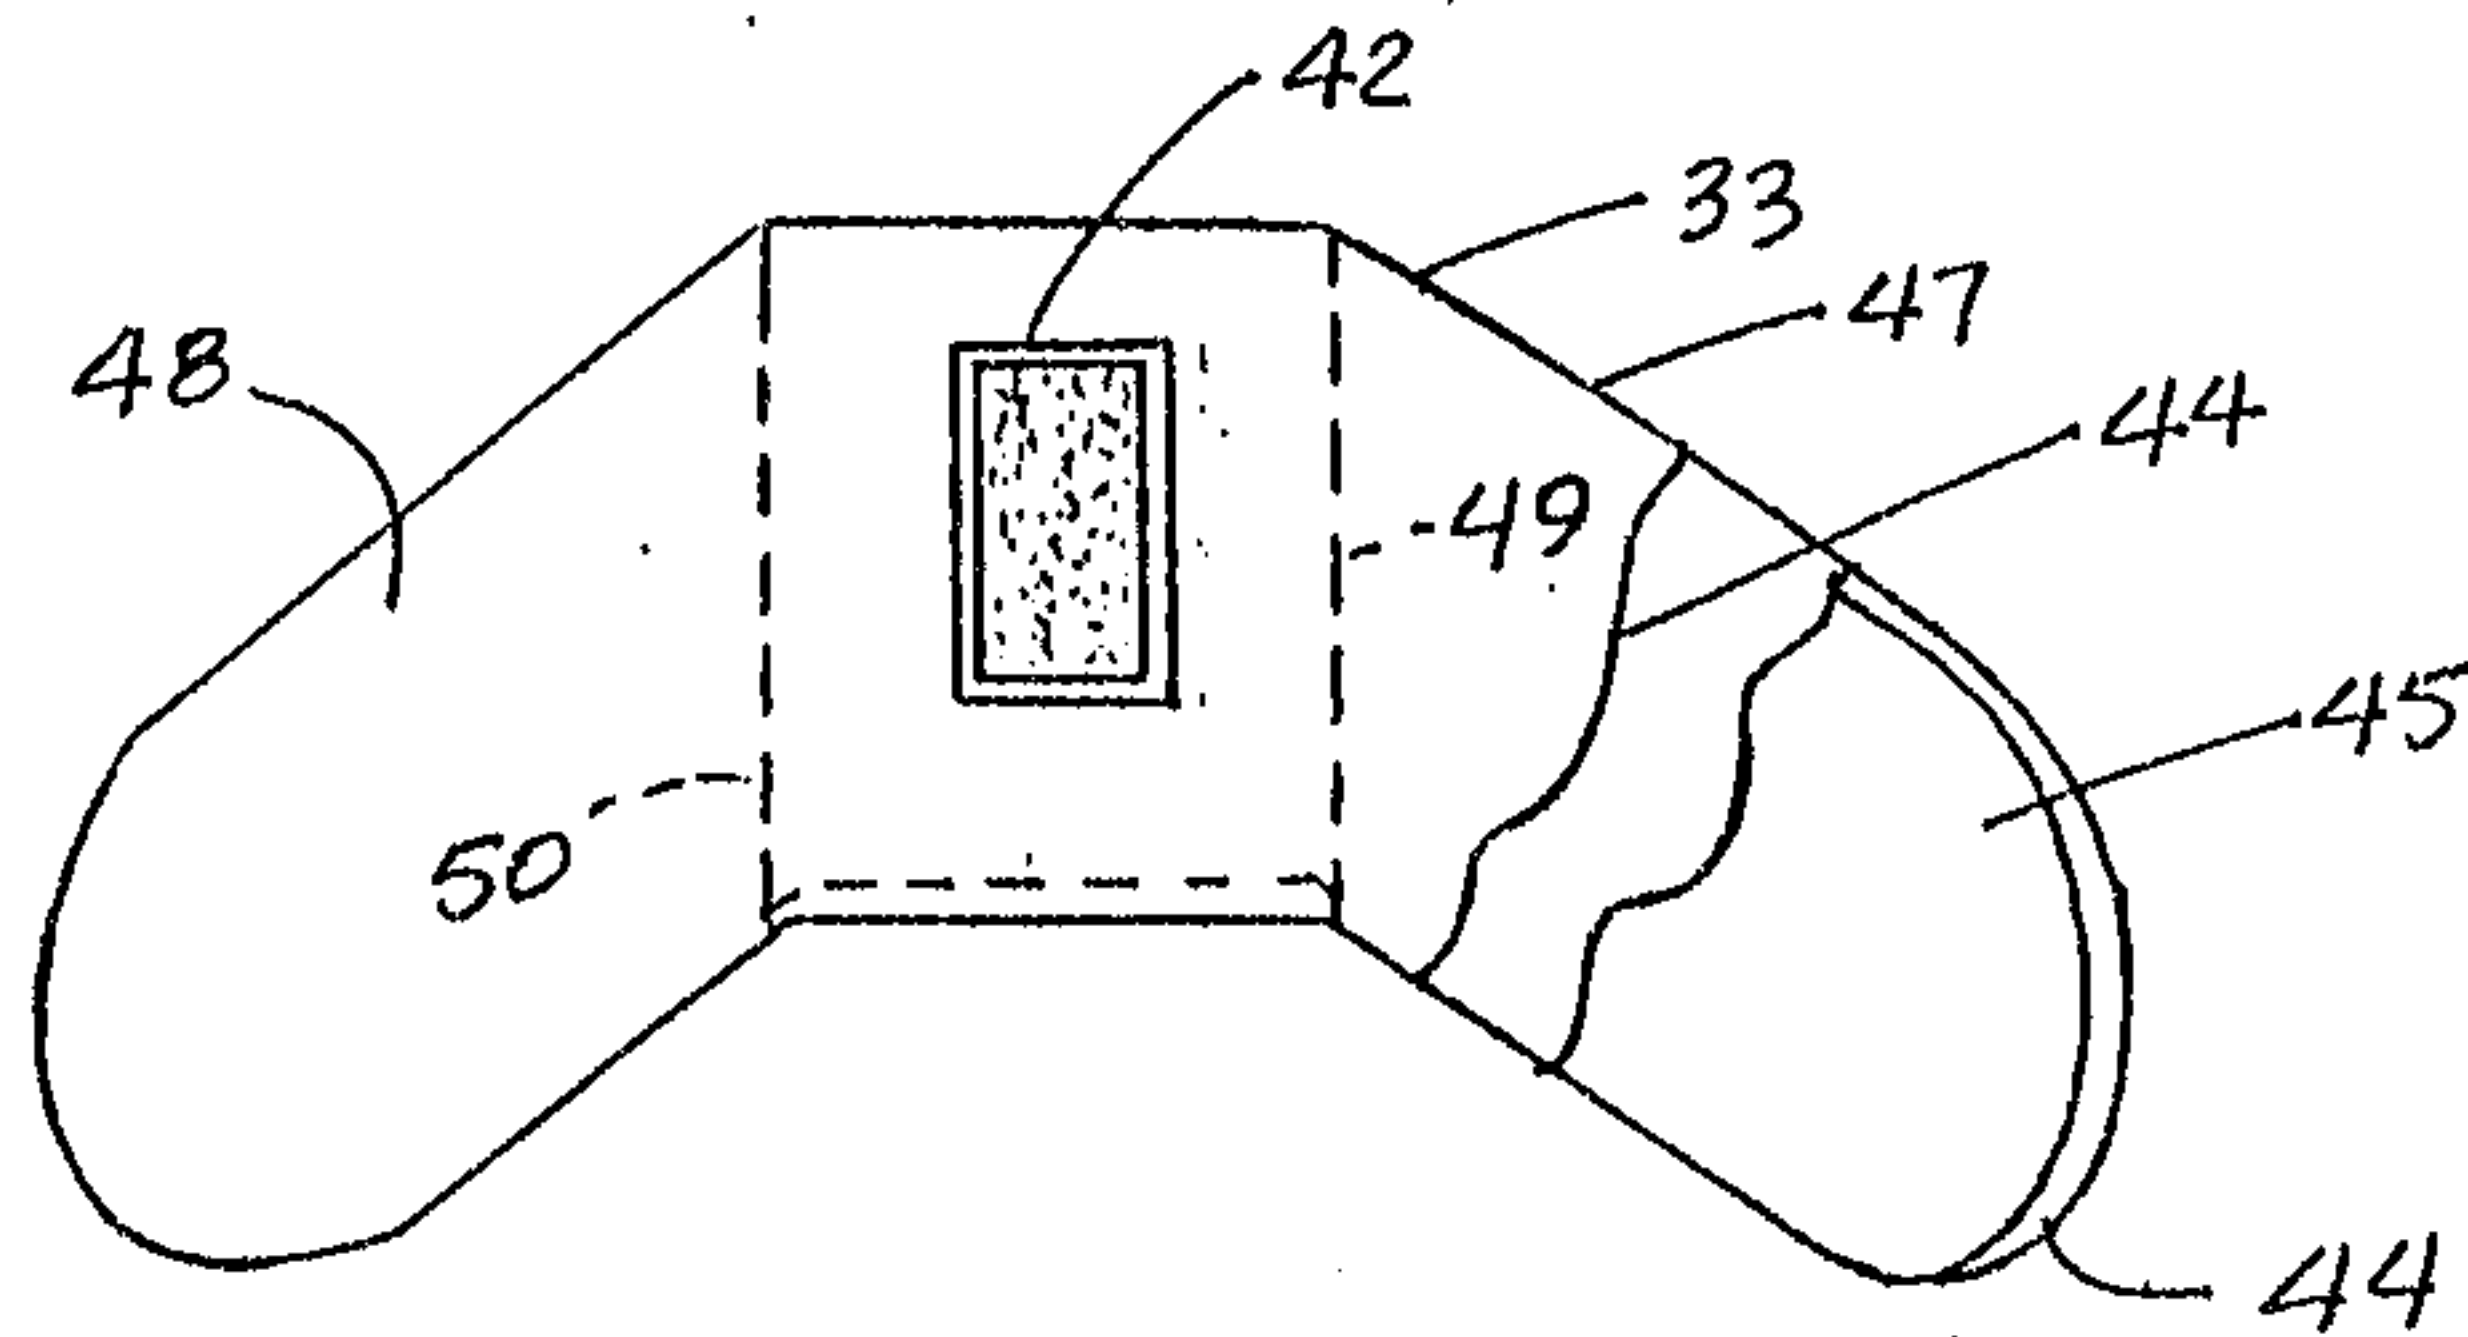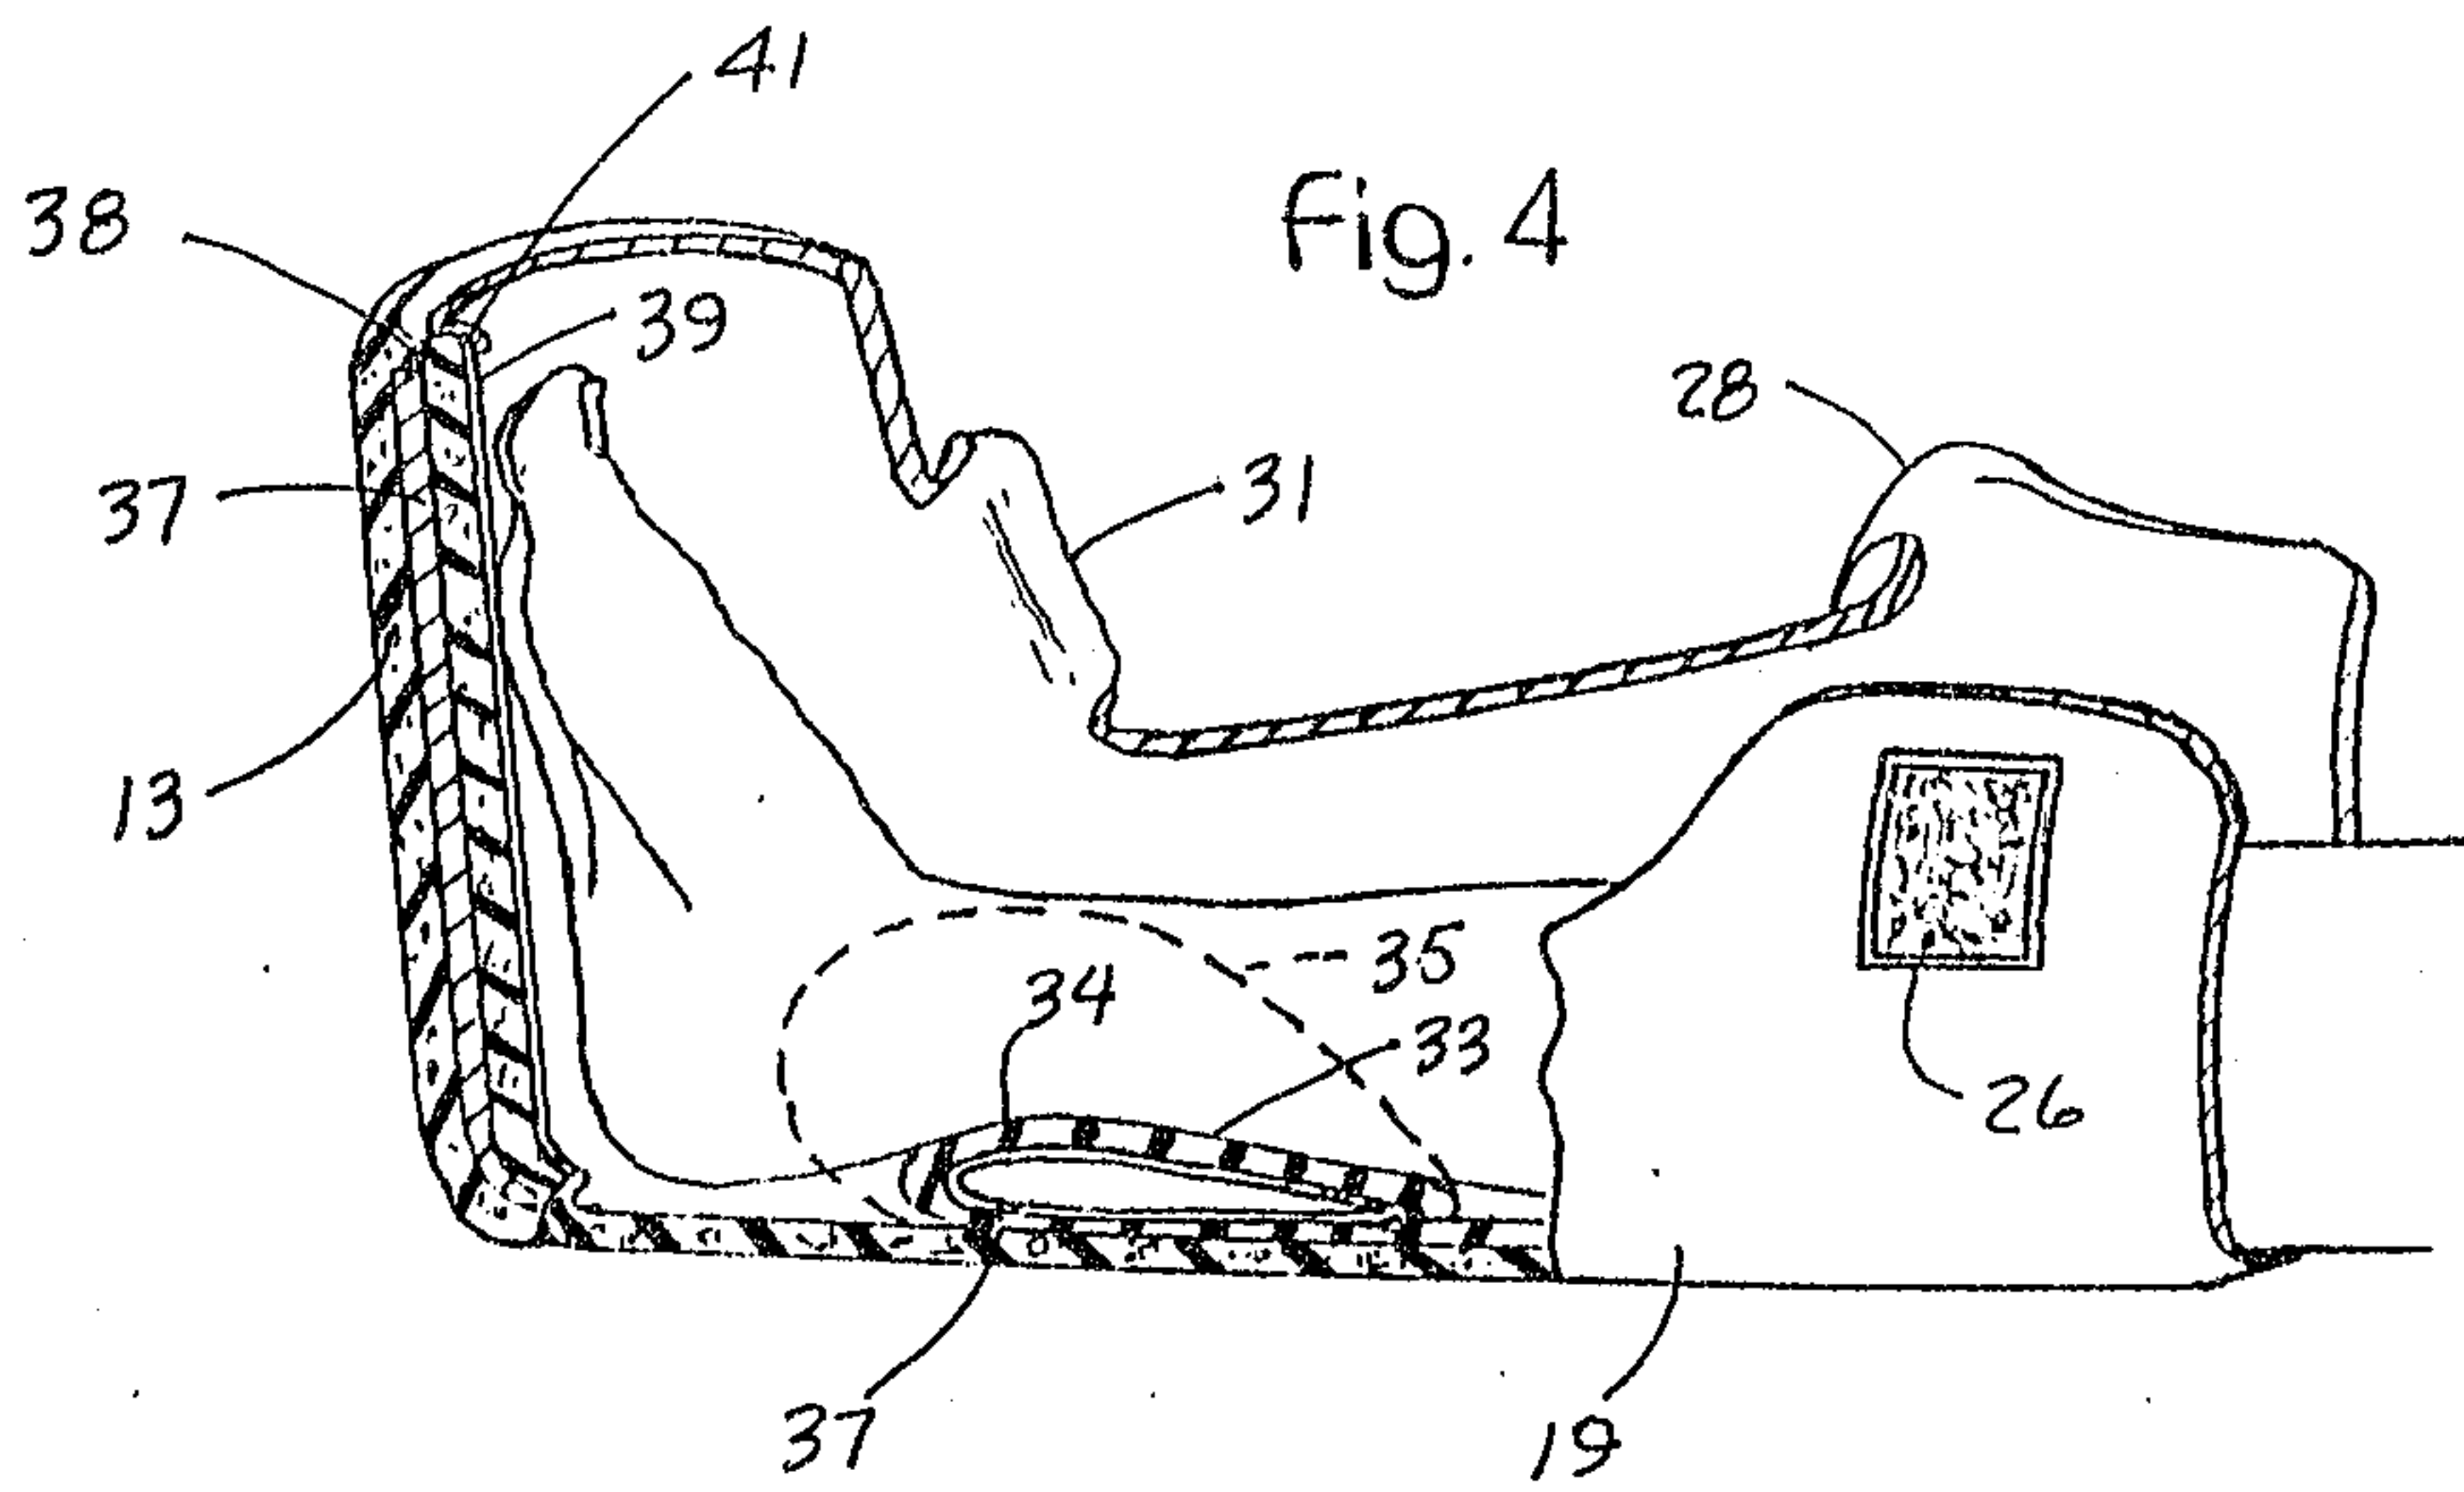