

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
29 December 2005 (29.12.2005)

PCT

(10) International Publication Number
WO 2005/123588 A1

(51) International Patent Classification⁷: **C01C 1/04**,
C01B 3/02, 3/56

(21) International Application Number:
PCT/EP2005/006255

(22) International Filing Date: 10 June 2005 (10.06.2005)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
04014345.5 18 June 2004 (18.06.2004) EP

(71) Applicant (for all designated States except US): **AMMONIA CASALE S.A.** [CH/CH]; Via Giulio Pocobelli 6, CH-6900 Lugano-Besso (CH).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **FILIPPI, Ermanno** [IT/CH]; Strada di Gandria 73, CH-6976 Castagnola (CH).

(74) Agent: **ZARDI, Marco**; M. Zardi & Co. S.A., Via Pioda, 6, CH-6900 Lugano (CH).


(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SM, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IS, IT, LT, LU, MC, NL, PL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— with international search report

[Continued on next page]

(54) Title: PROCESS FOR PRODUCING AMMONIA ON THE BASIS OF NITROGEN AND HYDROGEN OBTAINED FROM NATURAL GAS

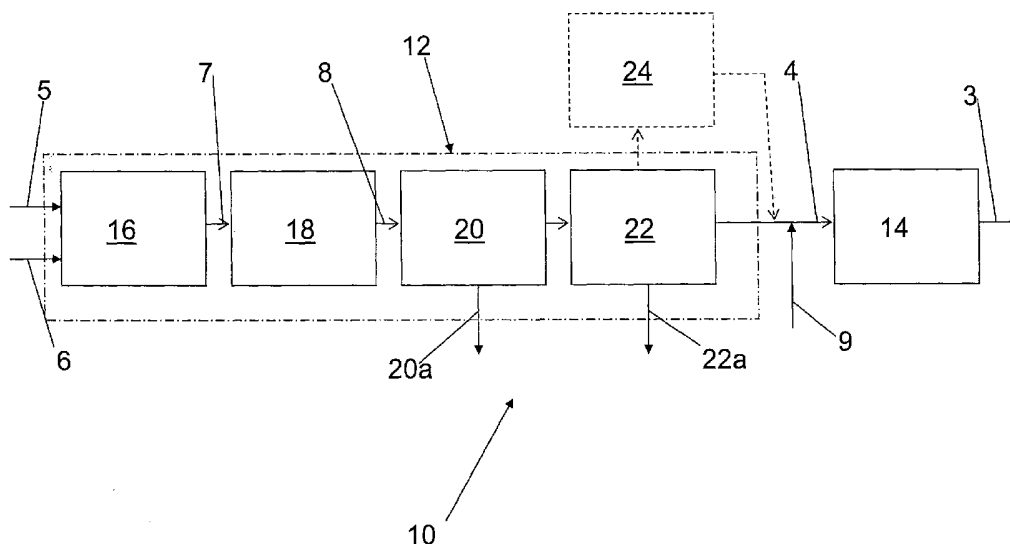

(57) Abstract: In a process for producing ammonia (3) on the basis of a mixture (4) essentially comprising nitrogen and hydrogen obtained from natural gas (5), said natural gas (5) is subjected to a partial oxidation reaction with an oxygenrich gas (6) in presence of steam obtaining a crude synthesis gas (7) comprising hydrogen and carbon monoxide, said crude synthesis gas (7) being treated in at least one catalytic reaction step (shift) to convert part of the carbon monoxide into carbon dioxide obtaining a converted synthesis gas (8) comprising hydrogen, carbon dioxide and carbon monoxide, said converted synthesis gas (8) being subjected to at least one decarbonation step to at least partially remove the carbon dioxide and to at least one purification step to at least partially remove the carbon monoxide.



-
- *before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments*
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.*

Title: "Process for producing ammonia on the basis of nitrogen and hydrogen obtained from natural gas".

DESCRIPTION

Field of application

5 The present invention, in its most general aspect, refers to process for producing ammonia on the basis of nitrogen and hydrogen.

In particular, the invention refers to a process for producing ammonia on the basis of a mixture essentially
10 comprising nitrogen and hydrogen obtained from natural gas, where said natural gas is subjected to a partial oxidation reaction with an oxygen-rich gas in presence of steam obtaining a crude synthesis gas comprising hydrogen and carbon monoxide, said crude synthesis gas being treated in
15 at least one catalytic reaction step (shift) to convert part of the carbon monoxide into carbon dioxide obtaining a converted synthesis gas comprising hydrogen, carbon dioxide and carbon monoxide, said converted synthesis gas being subjected to at least one decarbonation step to at least
20 partially remove the carbon dioxide and to at least one purification step to at least partially remove the carbon monoxide.

The invention also refers to an ammonia production plant that carries out the aforementioned process.

Prior art

As known, for large-scale production of ammonia (in other words for producing, for example, 3000 t per day) from natural gas, there is an ever-increasing requirement to
5 realize a high-yield process, which is easy to carry out and does not require high energy consumption and operating costs.

In order to satisfy the aforementioned requirement, processes are generally used according to which the
10 following succession of operations is provided:

- partial oxidation reaction of the natural gas, obtaining a crude synthesis gas;
- shift reaction, obtaining a converted synthesis gas;
- decarbonation operation to remove the carbon dioxide
15 present in said converted synthesis gas, carried out by a physical solvent suitable for absorbing the carbon dioxide;
- purification operation to remove the carbon monoxide present in said converted synthesis gas, carried out through liquid nitrogen wash;
- 20 - ammonia synthesis from the mixture essentially comprising hydrogen and nitrogen that is obtained after the aforementioned operations.

The decarbonation and purification operations are therefore

respectively intended to remove carbon dioxide and carbon monoxide, up to a concentration of a few parts per million by volume (for example, a value aimed for is a value lower than 10 p.p.m.v. of carbon monoxide).

- 5 Although advantageous from various points of view, the processes for producing ammonia schematically described above do, nevertheless, have recognized drawbacks.

Amongst the drawbacks, one only has to recall the fact that the liquid nitrogen wash operation must take place at very
10 low temperature and consequently requires the use of special materials and suitable heat insulation, which, although known, are nevertheless quite expensive and require all a succession of special care.

Summary of the invention

- 15 The technical problem underlying the present invention is that of devising and providing a process for producing ammonia on the basis of a mixture essentially comprising nitrogen and hydrogen obtained from natural gas, capable of satisfying the requirement outlined above, at the same time
20 overcoming the quoted limitations and/or drawbacks with reference to the prior art in a simple and effective way.

This problem is solved, according to the present invention, by a process for producing ammonia on the basis of a mixture essentially comprising nitrogen and hydrogen

obtained from natural gas, of the aforementioned type and characterized in that for said at least one purification step at least one molecular sieve is used.

Further characteristics and advantages of the process for
5 producing ammonia according to the present invention shall become clearer from the description, made hereafter, of a preferred example embodiment thereof, given for indicating and not limiting purposes, with reference to the attached drawings.

10 Brief description of the drawing

Figure 1 represents a block diagram of a plant that carries out the process for producing ammonia according to the invention.

15 Detailed description of a preferred embodiment of the invention

With reference to figure 1, an ammonia production plant is schematically shown that carries out the process according to the invention and that is totally indicated with 10. Ammonia 3 is produced on the basis of a mixture 4
20 essentially comprising nitrogen and oxygen, in turn obtained from natural gas 5.

The plant 10 comprises a first portion 12 for producing said mixture essentially comprising nitrogen and oxygen and

a second portion 14 for the synthesis of said ammonia 4.

The first portion 12 of the plant 10 comprises a partial oxidation section 16, a section 18 for the catalytic reaction of carbon monoxide into carbon dioxide comprising
5 at least one so-called shift converter, a decarbonation section 20 and a purification section 22.

In particular, in accordance with an aspect of the present invention, such a purification section 22 advantageously comprises at least one molecular sieve apparatus.

10 By the term "molecular sieve" we mean to include all those conventional materials having micropores capable of preferentially adsorbing a predetermined gas contained in a gaseous mixture, including activated carbon. According to the adsorption and release procedure of said predetermined
15 gas, these materials are classified as molecular sieve or activated carbon of the PSA (pressure swing adsorption) and of the TSA (temperature swing adsorption) type.

In the PSA adsorption procedure, the gaseous mixture containing said predetermined gas is made to pass under
20 pressure through the molecular sieve, in such a way to produce the preferential adsorption of the predetermined gas in the micropores. Then, the pressure is reduced so as to obtain a desorption of the predetermined gas together with other gaseous components possibly retained and

consequently regenerate the molecular sieve.

Differently, in the TSA method, the preferential adsorption of the predetermined gas in the micropores is carried out by making the gaseous mixture, containing the predetermined gas to be separated, pass through the aforementioned molecular sieve at a determined temperature, for example at a temperature not greater than 80°C. Then the temperature is increased, for example with a flow of steam, so as to obtain a desorption of the predetermined gas together with other gaseous components possibly retained and consequently regenerate the molecular sieve.

Preferably, according to the present invention, a PSA-type molecular sieve is used.

In a further embodiment of the invention, the purification section 22 can be associated with a methanation section 24 comprising at least one so-called methanator.

The operation of the ammonia production plant 10 is specified hereafter.

The natural gas 5, suitably mixed with steam, is subjected, in the partial oxidation section 16 of the first portion 12 of the plant 10, to a partial oxidation reaction with an oxygen-rich gas 6 obtaining a crude synthesis gas 7 comprising hydrogen and carbon monoxide. As an example, when the partial oxidation section 16 comprises an

autothermal reformer, it is advantageous to operate at a temperature of between 900 and 1300°C, preferably between 900 and 1200°C, and at a pressure of between 40 and 150 bar, preferably between 40 and 100 bar; said oxygen-rich
5 gas 6 has at least 50%, preferably at least 70%, even more preferably at least 90% of oxygen. For example, oxygen-enriched air can be used.

In the shift converter (which carries out a conversion catalytic reaction step), the crude synthesis gas 7 is
10 treated to convert part of the carbon monoxide into carbon dioxide obtaining a converted synthesis gas 8 comprising hydrogen, carbon dioxide and carbon monoxide.

The converted synthesis gas 8 is subjected to at least one decarbonation step, in the section 20, to at least
15 partially remove the carbon dioxide 20a and to at least one purification step, in the apparatus 22, to remove the carbon monoxide 22a up to concentrations compatible with the ammonia synthesis catalyst present in the second portion 14 of the plant 10, for example up to
20 concentrations of less than 10 p.p.m.v..

In the purification apparatus 22 at least one molecular sieve for carbon monoxide is advantageously provided.

In the further embodiment of the invention, the methanation section 24 associated with the purification section 22 is

used to carry out a methanation reaction and consequently to reduce the size of the purification section 22 itself, transforming the carbon monoxide into methane.

After said purification step, a feeding of nitrogen 9 is provided to form said mixture 4, essentially comprising nitrogen and hydrogen according to an optimal stoichiometric ratio for the ammonia synthesis catalyst, said mixture 4 indeed being treated in the second portion 14 of the plant 10, i.e. that for the synthesis of said ammonia 3.

We would like to point out that, for large-scale productions, the partial oxidation section 16 is preferably of the catalytic type, i.e. it comprises autothermal reformers, even if it is not excluded to use non-catalytic partial oxidation apparatuses, which require, on the one hand, higher oxygen consumption and therefore higher energy consumption, but which are constructively simpler. Particularly where the energy cost is low, it may therefore be advantageous to use non-catalytic apparatuses.

From the previous description it can clearly be seen that the process for producing ammonia according to the invention solves the technical problem and offers numerous advantages the first of which is the fact that it avoids the use of all those special materials necessary for the correct treatment of the liquid nitrogen used in the prior

art.

Another major advantage of the invention is that the gas obtained at the end of the purification step is practically pure hydrogen that, in parallel with the ammonia synthesis,
5 can be used for other productions.

Of course, the man skilled in the art can bring numerous modifications and variants to the process for producing ammonia described above in order to satisfy specific and contingent requirements, all of these modifications and
10 variants in any case being covered by the scope of protection of the present invention, as defined by the following claims.

- 10 -

CLAIMS

1. Process for producing ammonia (3) on the basis of a mixture (4) essentially comprising nitrogen and hydrogen obtained from natural gas (5), where said natural gas (5) is subjected to a partial oxidation reaction with an oxygen-rich gas (6) in presence of steam obtaining a crude synthesis gas (7) comprising hydrogen and carbon monoxide, said crude synthesis gas (7) being treated in at least one catalytic reaction step (shift) to convert part of the carbon monoxide into carbon dioxide obtaining a converted synthesis gas (8) comprising hydrogen, carbon dioxide and carbon monoxide, said converted synthesis gas (8) being subjected to at least one decarbonation step to at least partially remove the carbon dioxide (20a) and to at least one purification step to at least partially remove the carbon monoxide (22a), characterized in that for said at least one purification step at least one molecular sieve is used.

2. Process according to claim 1, characterized in that, after said at least one purification step, a feeding of nitrogen (9) is provided to form said mixture (4) essentially comprising nitrogen and oxygen that is treated in a synthesis plant (14) of said ammonia (3).


3. Process according to claim 1, characterized in that said at least one molecular sieve is of the PSA type.

4. Process according to claim 1, characterized in that said at least one purification step is associated with a methanation section (24).

5. Process according to claim 1, characterized in that said partial oxidation reaction is of catalytic type (autothermal reforming).

6. Plant (10) for producing ammonia (3) on the basis of a mixture (4) essentially comprising nitrogen and hydrogen obtained from natural gas (5) in presence of steam, of the type comprising a first portion (12) for producing said mixture (4) essentially comprising nitrogen and hydrogen and a second portion (14) of synthesis of said ammonia (3), said first portion (12) comprising a partial oxidation section (16), a catalytic reaction section (18), a decarbonation section (20) and a purification section (22), characterized in that said purification section (22) comprises at least one molecular sieve apparatus.

7. Plant according to claim 6, characterized in that said purification section (22) is associated with a methanation section (24).

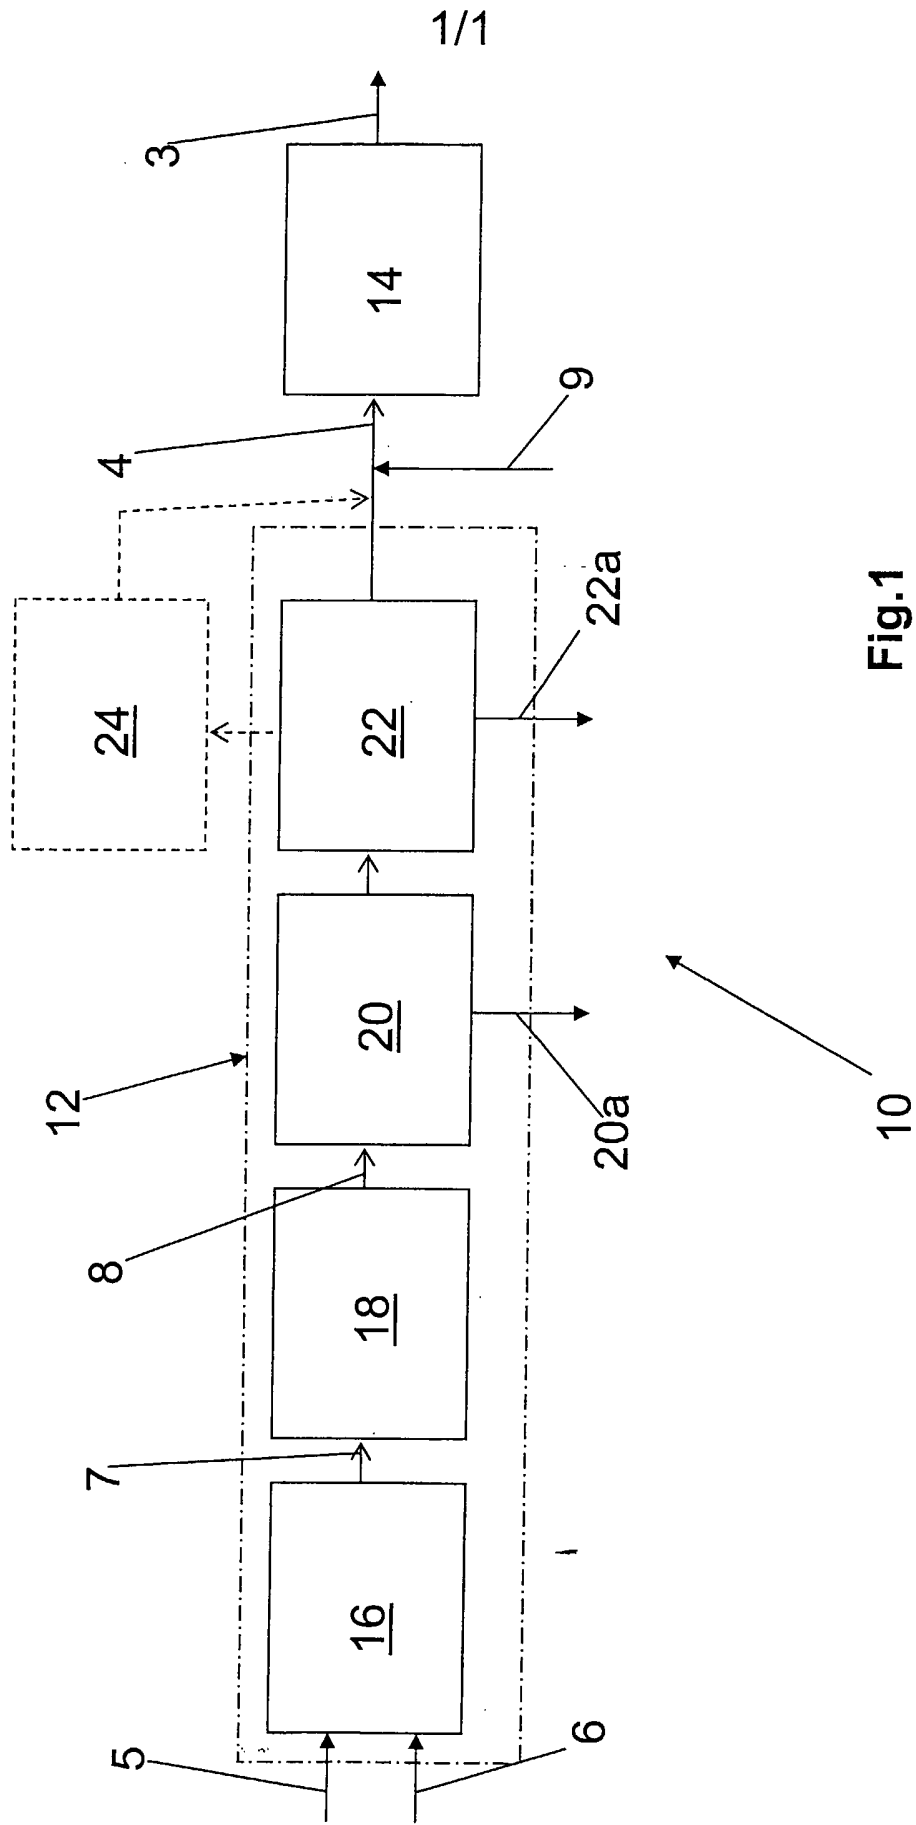

INTERNATIONAL SEARCH REPORT

International Application No
PCT/EP2005/006255

A. CLASSIFICATION OF SUBJECT MATTER C01C1/04 C01B3/02 C01B3/56		
According to International Patent Classification (IPC) or to both national classification and IPC		
B. FIELDS SEARCHED Minimum documentation searched (classification system followed by classification symbols) C01C C01B		
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched		
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal		
C. DOCUMENTS CONSIDERED TO BE RELEVANT		
Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 4 725 380 A (PINTO ALWYN) 16 February 1988 (1988-02-16) column 5, line 7 - line 53; claims -----	1-7
X	US 2002/098132 A1 (VIDALIN KENNETH EBENES) 25 July 2002 (2002-07-25) paragraph '0062!; claims; figures -----	1-3,5,6
A	DE 101 16 152 A (MG TECHNOLOGIES AG) 10 October 2002 (2002-10-10) paragraph '0008! - paragraph '0009!; claims -----	4,6
A	GB 811 749 A (UNION OIL CO) 8 April 1959 (1959-04-08) -----	
A	US 6 086 840 A (RAO ASHOK D ET AL) 11 July 2000 (2000-07-11) -----	
☐ Further documents are listed in the continuation of box C ☒ Patent family members are listed in annex		
* Special categories of cited documents : *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *G* document member of the same patent family		
Date of the actual completion of the international search 25 November 2005		Date of mailing of the international search report 01/12/2005
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer Zalm, W

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/EP2005/006255

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 4725380	A	16-02-1988	NONE	
US 2002098132	A1	25-07-2002	NONE	
DE 10116152	A	10-10-2002	CN 1498190 A WO 02079083 A2 EP 1377518 A2 US 2004161377 A1	19-05-2004 10-10-2002 07-01-2004 19-08-2004
GB 811749	A	08-04-1959	BE 550460 A DE 1075566 B FR 1157862 A	04-06-1958
US 6086840	A	11-07-2000	AU 1826400 A CA 2352576 A1 MX PA01005335 A WO 0030973 A1	13-06-2000 02-06-2000 27-03-2003 02-06-2000