US 20130179461A1

(19) United States

(12) Patent Application Publication

(10) Pub. No.: US 2013/0179461 A1

(43) Pub. Date: Jul. 11, 2013

Sharma et al.

(54) **PROACTIVE MONITORING OF DATABASE SERVERS**

(75) Inventors: **Anant Bondalapati Sharma**, Hyderabad (IN); **Deepak Ranjan Mishra**, Hyderabad (IN); **Surinder Kumar**, Hyderabad (IN)

(73) Assignee: **Bank of America**, Charlotte, NC (US)

(21) Appl. No.: **13/347,134**

(22) Filed: **Jan. 10, 2012**

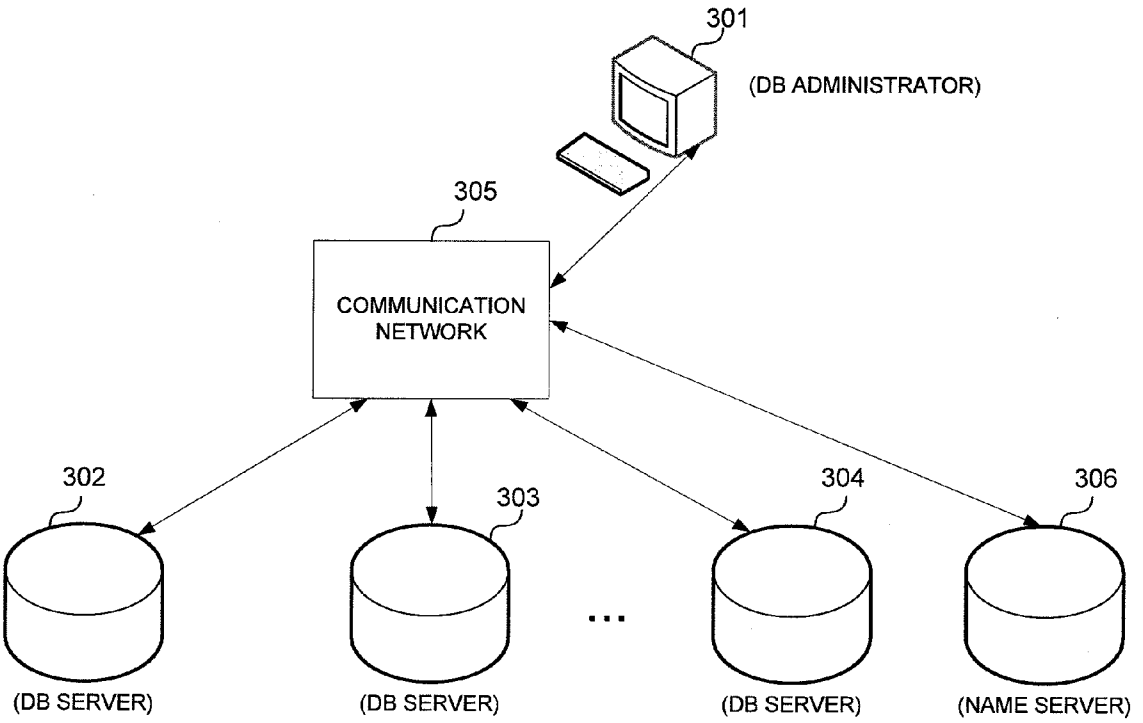
Publication Classification

(51) **Int. Cl.**
G06F 17/30 (2006.01)

(52) **U.S. Cl.**
USPC **707/769**; 707/705; 707/E17.014; 707/E17.005

(57) **ABSTRACT**

A computer system monitors database servers to mitigate server availability risks. The plurality of servers may be proactively monitored to determine database status at each server before an alert is generated. An automated proactive process executes at a user's desktop to monitor database features over a plurality of database servers. Information about the server status is presented in a graphical user interface (GUI) format where status information for all of the database servers is presented in one integrated view in an automated manner. For example, the monitoring process reads a list of SQL instances and then connects to each listed SQL server to query the system catalogs of an SQL server engine. The monitoring process interprets the received information from the SQL servers and updates the GUI. The GUI may be color-coded to indicate the status state of individual SQL features for each monitored SQL server.



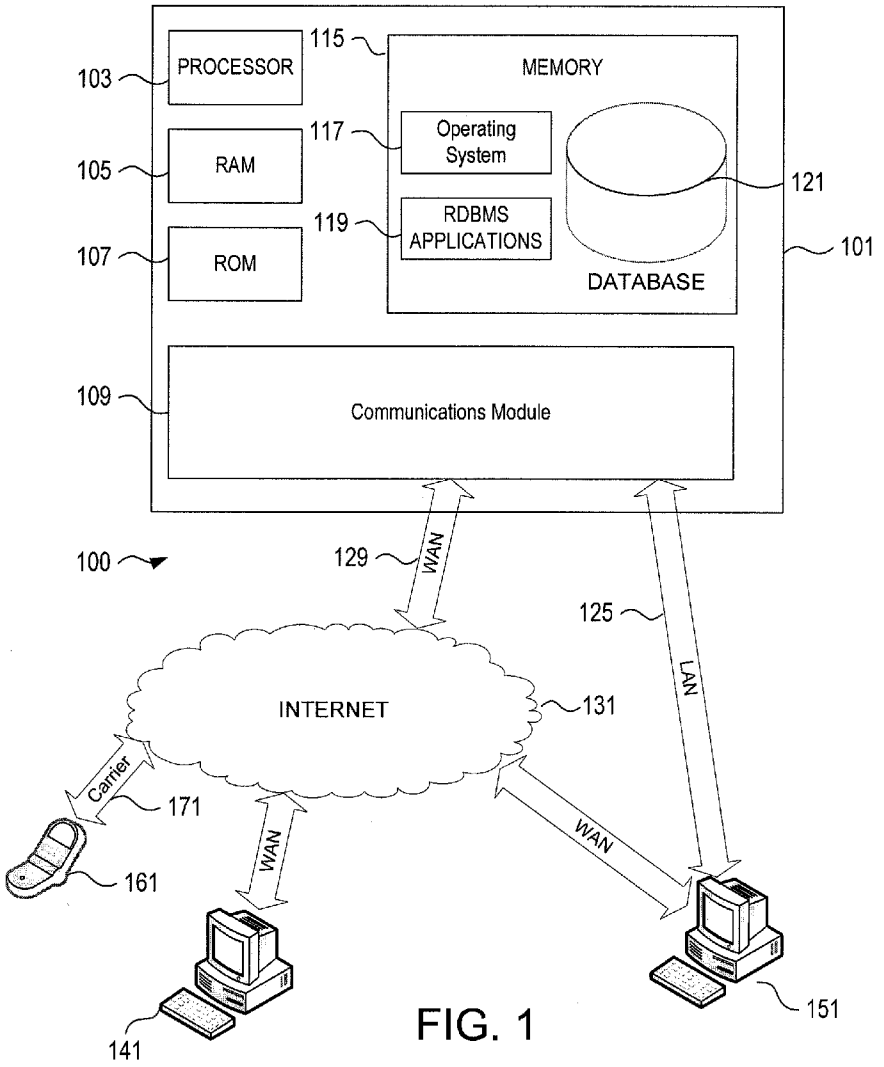

PROCESSOR
103
115
MEMORY
RAM
105
117
Operating System
121
RDBMS APPLICATIONS
119
ROM
107
101
DATABASE
109
Communications Module
100
129
WAN
125
LAN
INTERNET
131
Carrier
171
WAN
WAN
161
141
151

FIG. 1

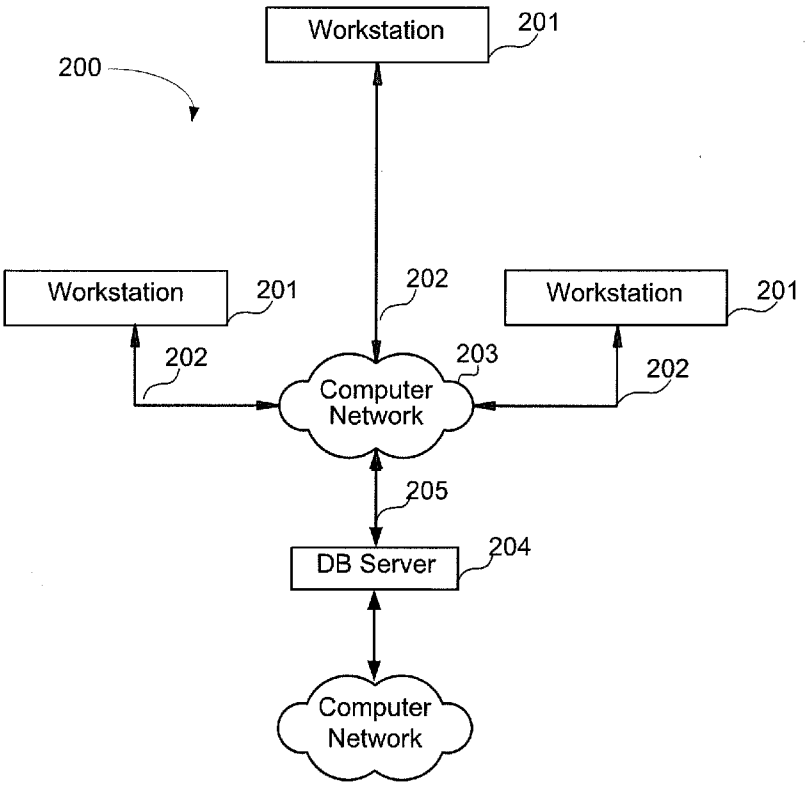

Workstation
201
200
Workstation
201
202
Workstation
201
202
203
202
Computer Network
205
DB Server
204
Computer Network

FIG. 2

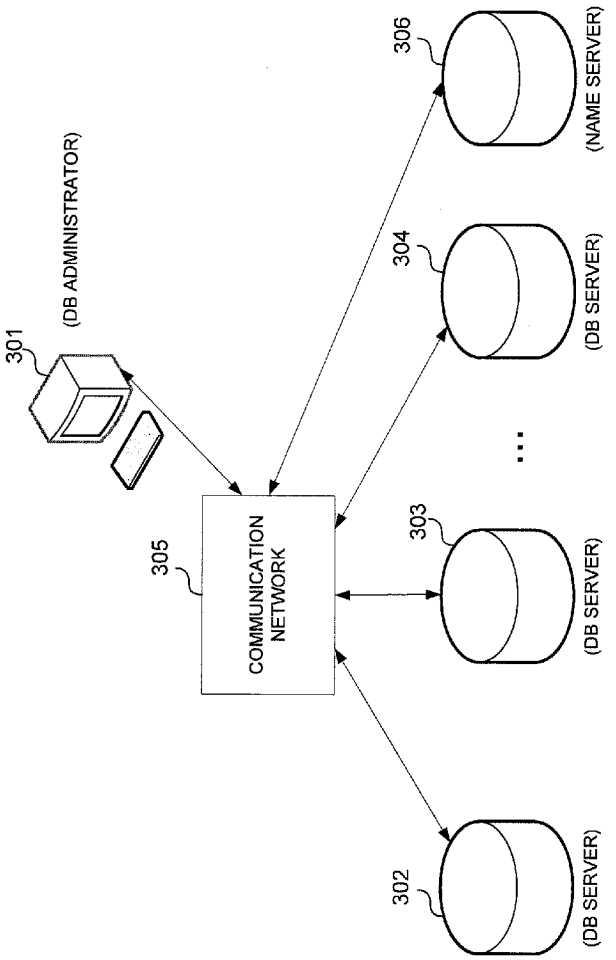

301
(DB ADMINISTRATOR)
305
COMMUNICATION NETWORK
306
(NAME SERVER)
304
(DB SERVER)
303
(DB SERVER)
302
(DB SERVER)

FIG. 3

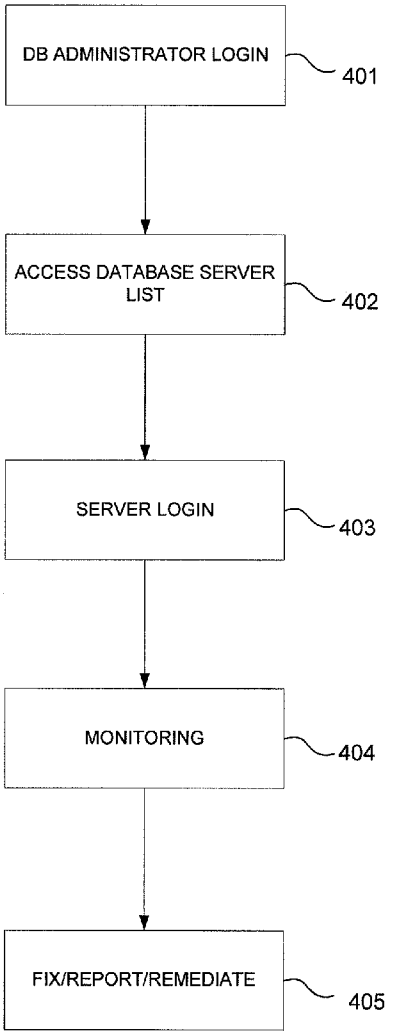

DB ADMINISTRATOR LOGIN
401
ACCESS DATABASE SERVER LIST
402
400
SERVER LOGIN
403
MONITORING
404
FIX/REPORT/REMEDIATE
405

FIG. 4

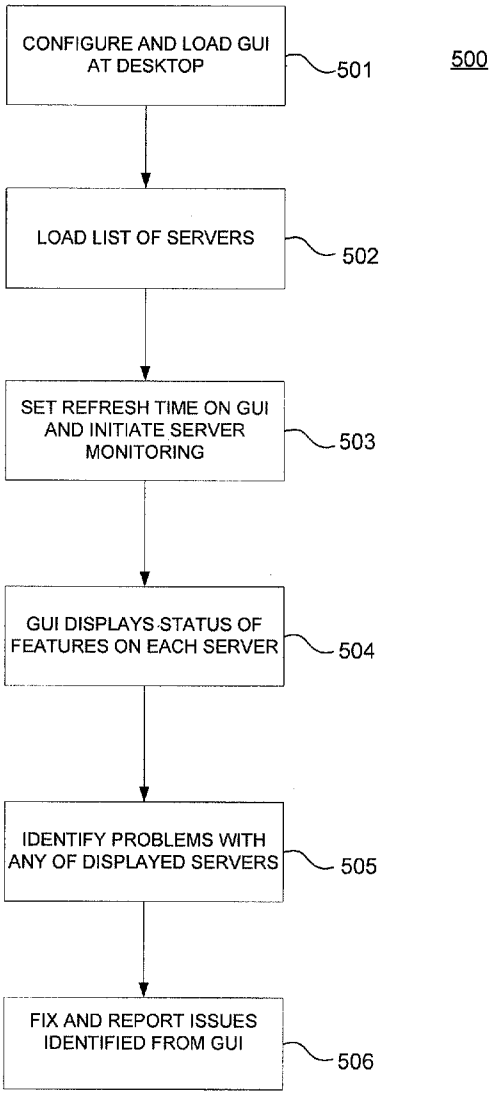

CONFIGURE AND LOAD GUI AT DESKTOP
501
500
LOAD LIST OF SERVERS
502
SET REFRESH TIME ON GUI AND INITIATE SERVER MONITORING
503
GUI DISPLAYS STATUS OF FEATURES ON EACH SERVER
504
IDENTIFY PROBLEMS WITH ANY OF DISPLAYED SERVERS
505
FIX AND REPORT ISSUES IDENTIFIED FROM GUI
506

FIG. 5

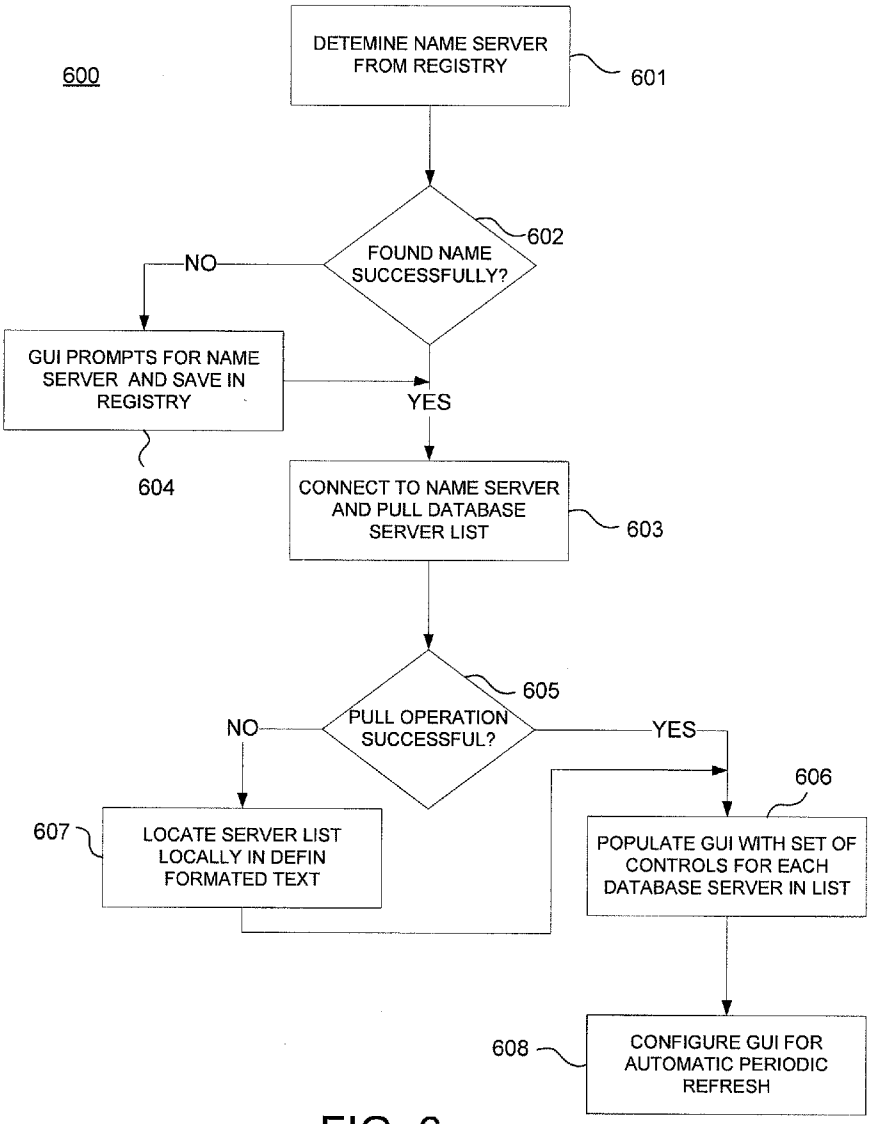

600
DETEMINE NAME SERVER FROM REGISTRY
601
FOUND NAME SUCCESSFULLY?
602
NO
YES
GUI PROMPTS FOR NAME SERVER AND SAVE IN REGISTRY
604
CONNECT TO NAME SERVER AND PULL DATABASE SERVER LIST
603
PULL OPERATION SUCCESSFUL?
605
NO
YES
LOCATE SERVER LIST LOCALLY IN DEFIN FORMATED TEXT
607
POPULATE GUI WITH SET OF CONTROLS FOR EACH DATABASE SERVER IN LIST
606
CONFIGURE GUI FOR AUTOMATIC PERIODIC REFRESH
608

FIG. 6

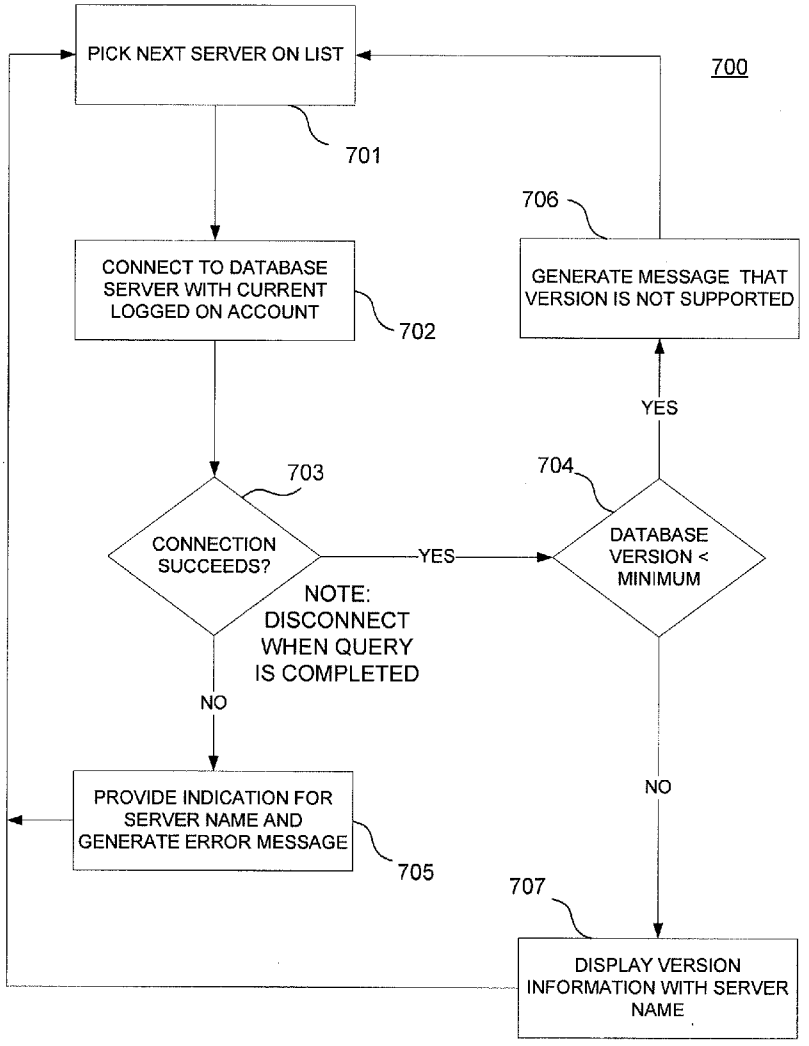

PICK NEXT SERVER ON LIST
700
701
706
CONNECT TO DATABASE SERVER WITH CURRENT LOGGED ON ACCOUNT
702
GENERATE MESSAGE THAT VERSION IS NOT SUPPORTED
YES
703
704
CONNECTION SUCCEEDS?
YES
DATABASE VERSION < MINIMUM
NOTE: DISCONNECT WHEN QUERY IS COMPLETED
NO
NO
PROVIDE INDICATION FOR SERVER NAME AND GENERATE ERROR MESSAGE
705
707
DISPLAY VERSION INFORMATION WITH SERVER NAME

FIG. 7

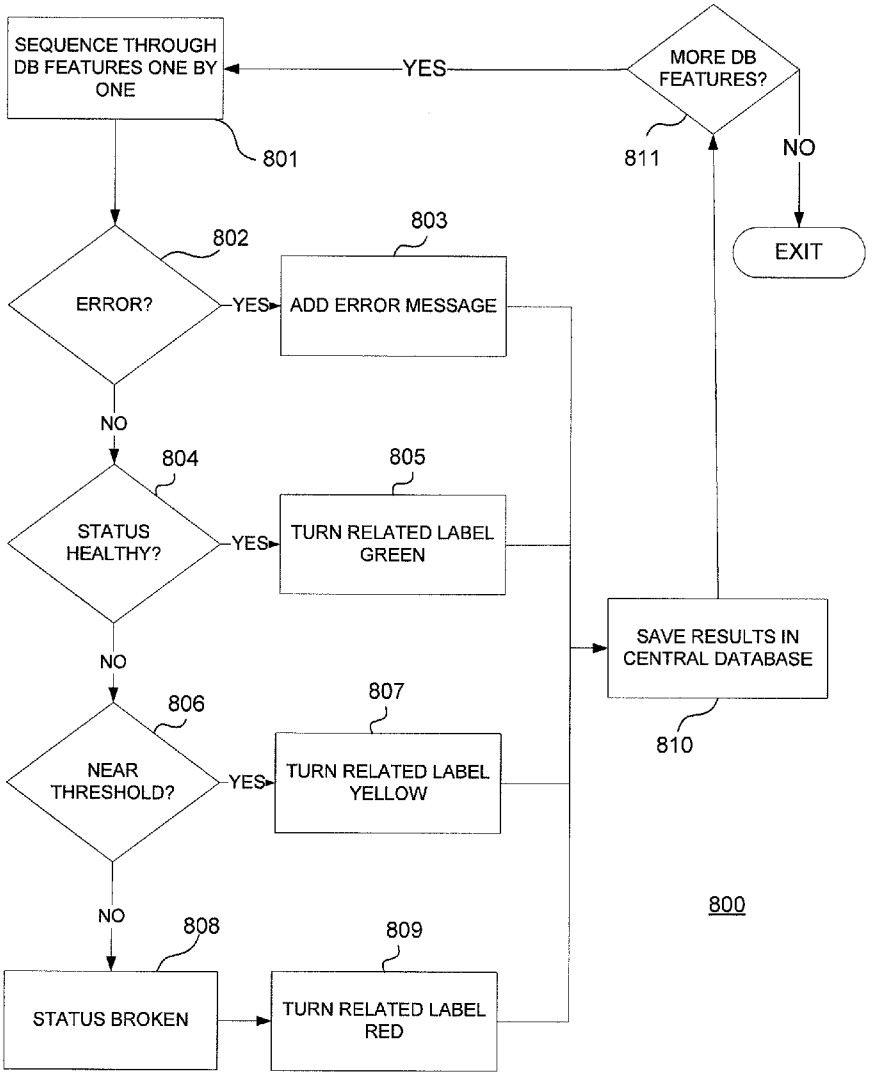

SEQUENCE THROUGH DB FEATURES ONE BY ONE
801
MORE DB FEATURES?
811
YES
NO
EXIT
802
ERROR?
YES
803
ADD ERROR MESSAGE
NO
804
STATUS HEALTHY?
YES
805
TURN RELATED LABEL GREEN
NO
806
NEAR THRESHOLD?
YES
807
TURN RELATED LABEL YELLOW
NO
808
STATUS BROKEN
809
TURN RELATED LABEL RED
SAVE RESULTS IN CENTRAL DATABASE
810
800

FIG. 8

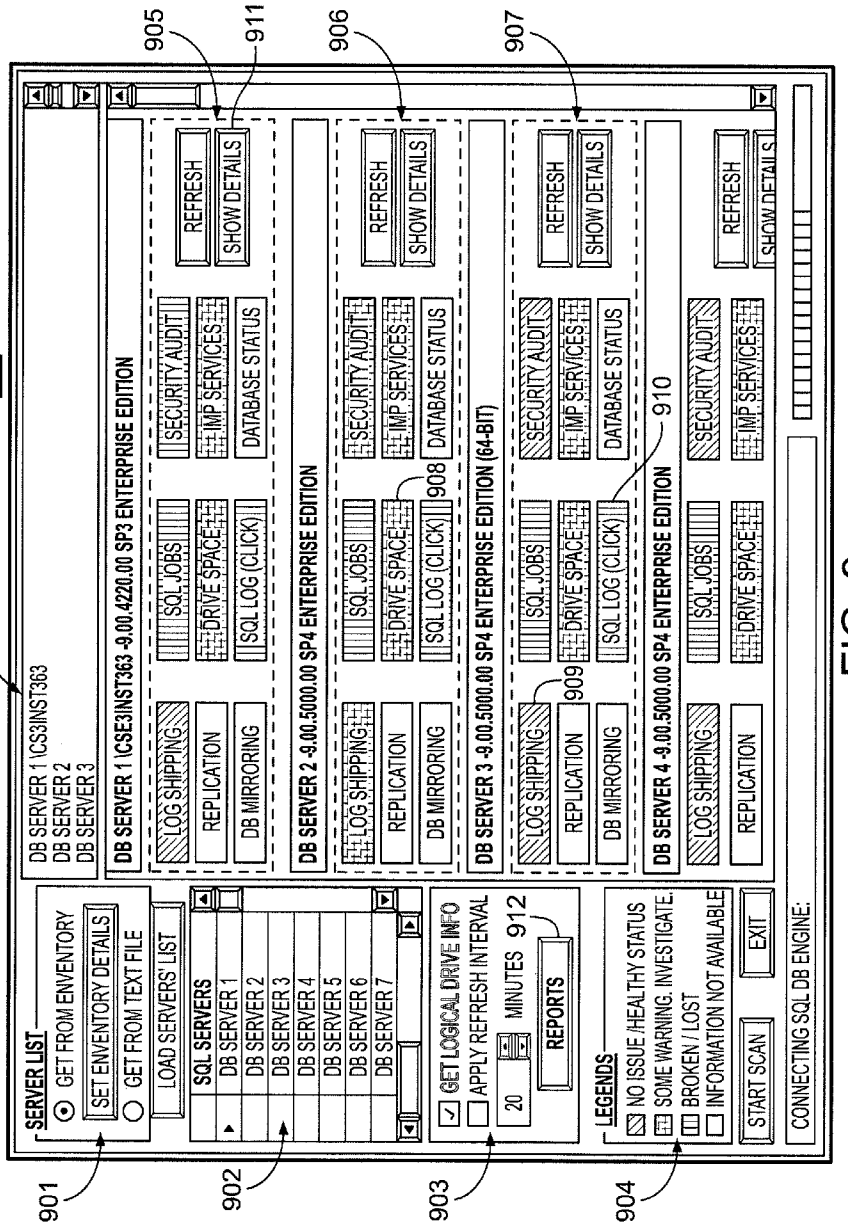

900
913
905
911
906
907
910
908
909
912
901
902
903
904
SERVER LIST
GET FROM ENVENTORY
GET FROM TEXT FILE
SET ENVENTORY DETAILS
LOAD SERVERS' LIST
DB SERVER 1 \CS3\INST363
DB SERVER 2
DB SERVER 3
SQL SERVERS
DB SERVER 1
DB SERVER 2
DB SERVER 3
DB SERVER 4
DB SERVER 5
DB SERVER 6
DB SERVER 7
GET LOGICAL DRIVE INFO
APPLY REFRESH INTERVAL
20
MINUTES
REPORTS
LEGENDS
NO ISSUE /HEALTHY STATUS
SOME WARNING. INVESTIGATE.
BROKEN / LOST
INFORMATION NOT AVAILABLE
START SCAN
EXIT
DB SERVER 1 \CSE3\INST363 -9.00.4220.00 SP3 ENTERPRISE EDITION
DB SERVER 2 -9.00.5000.00 SP4 ENTERPRISE EDITION
DB SERVER 3 -9.00.5000.00 SP4 ENTERPRISE EDITION (64-BIT)
DB SERVER 4 -9.00.5000.00 SP4 ENTERPRISE EDITION
LOG SHIPPING
REPLICATION
DB MIRRORING
SQL JOBS
DRIVE SPACE
SQL LOG (CLICK)
SECURITY AUDIT
IMP SERVICES
DATABASE STATUS
REFRESH
SHOW DETAILS
CONNECTING SQL DB ENGINE:

FIG. 9

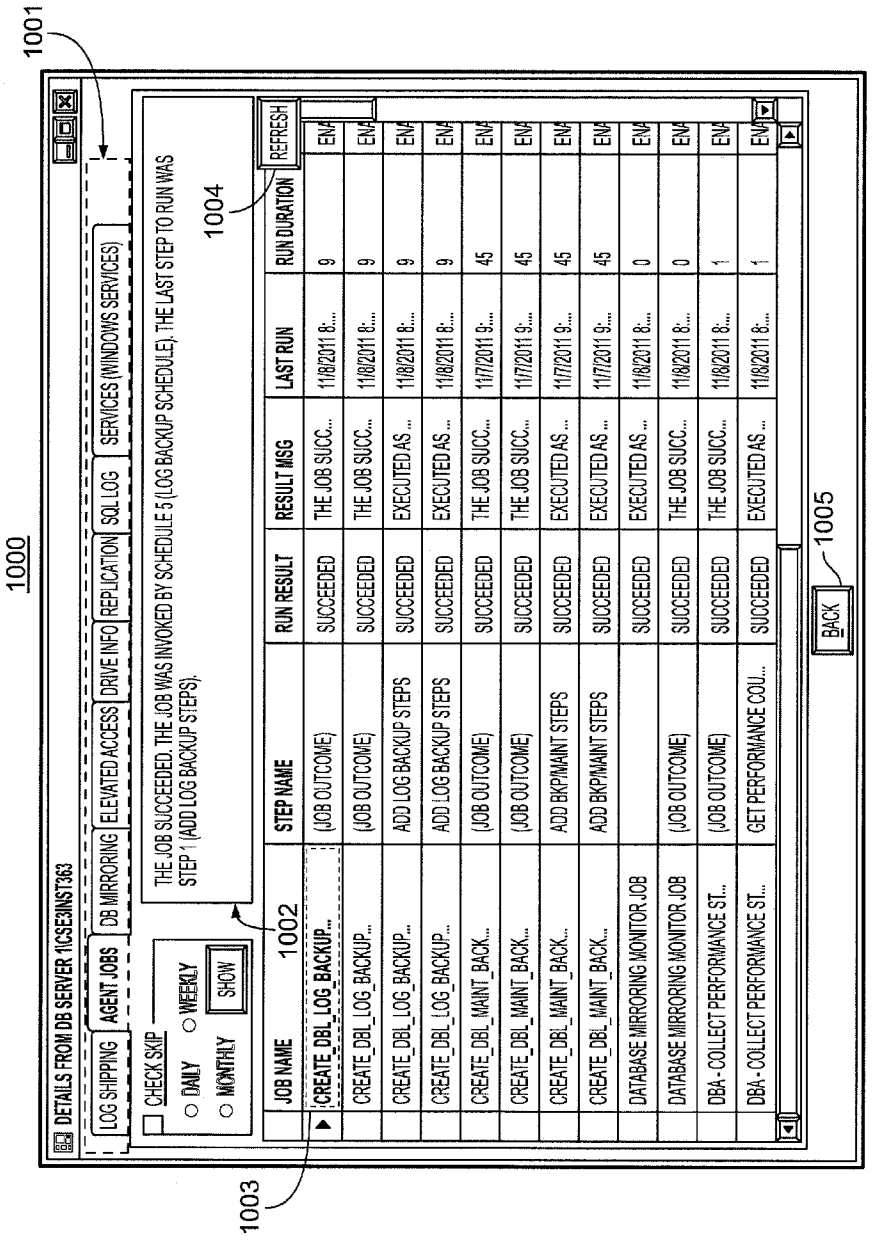

1000
1001
DETAILS FROM DB SERVER 11GSEJNST363
LOG SHIPPING
AGENT JOBS
DB MIRRORING
ELEVATED ACCESS
DRIVE INFO
REPLICATION
SQL LOG
SERVICES (WINDOWS SERVICES)
CHECK SKIP
DAILY
WEEKLY
MONTHLY
SHOW
1003
1002
THE JOB SUCCEEDED. THE JOB WAS INVOKED BY SCHEDULE 5 (LOG BACKUP SCHEDULE). THE LAST STEP TO RUN WAS STEP 1 (ADD LOG BACKUP STEPS).
1004
REFRESH
JOB NAME
STEP NAME
RUN RESULT
RESULT MSG
LAST RUN
RUN DURATION
CREATE_DBL_LOG_BACKUP...
(JOB OUTCOME)
SUCCEEDED
THE JOB SUCC...
11/8/2011 8:...
9
ENA
CREATE_DBL_LOG_BACKUP...
(JOB OUTCOME)
SUCCEEDED
THE JOB SUCC...
11/8/2011 8:...
9
ENA
CREATE_DBL_LOG_BACKUP...
ADD LOG BACKUP STEPS
SUCCEEDED
EXECUTED AS ...
11/8/2011 8:...
9
ENA
CREATE_DBL_LOG_BACKUP...
ADD LOG BACKUP STEPS
SUCCEEDED
EXECUTED AS ...
11/8/2011 8:...
9
ENA
CREATE_DBL_MAINT_BACK...
(JOB OUTCOME)
SUCCEEDED
THE JOB SUCC...
11/7/2011 9:...
45
ENA
CREATE_DBL_MAINT_BACK...
(JOB OUTCOME)
SUCCEEDED
THE JOB SUCC...
11/7/2011 9:...
45
ENA
CREATE_DBL_MAINT_BACK...
ADD BKP/MAINT STEPS
SUCCEEDED
EXECUTED AS ...
11/7/2011 9:...
45
ENA
CREATE_DBL_MAINT_BACK...
ADD BKP/MAINT STEPS
SUCCEEDED
EXECUTED AS ...
11/7/2011 9:...
45
ENA
DATABASE MIRRORING MONITOR JOB
SUCCEEDED
EXECUTED AS ...
11/8/2011 8:...
0
ENA
DATABASE MIRRORING MONITOR JOB
(JOB OUTCOME)
SUCCEEDED
THE JOB SUCC...
11/8/2011 8:...
0
ENA
DBA - COLLECT PERFORMANCE ST...
(JOB OUTCOME)
SUCCEEDED
THE JOB SUCC...
11/8/2011 8:...
1
ENA
DBA - COLLECT PERFORMANCE ST...
GET PERFORMANCE COU...
SUCCEEDED
EXECUTED AS ...
11/8/2011 8:...
1
ENA
BACK
1005

FIG. 10

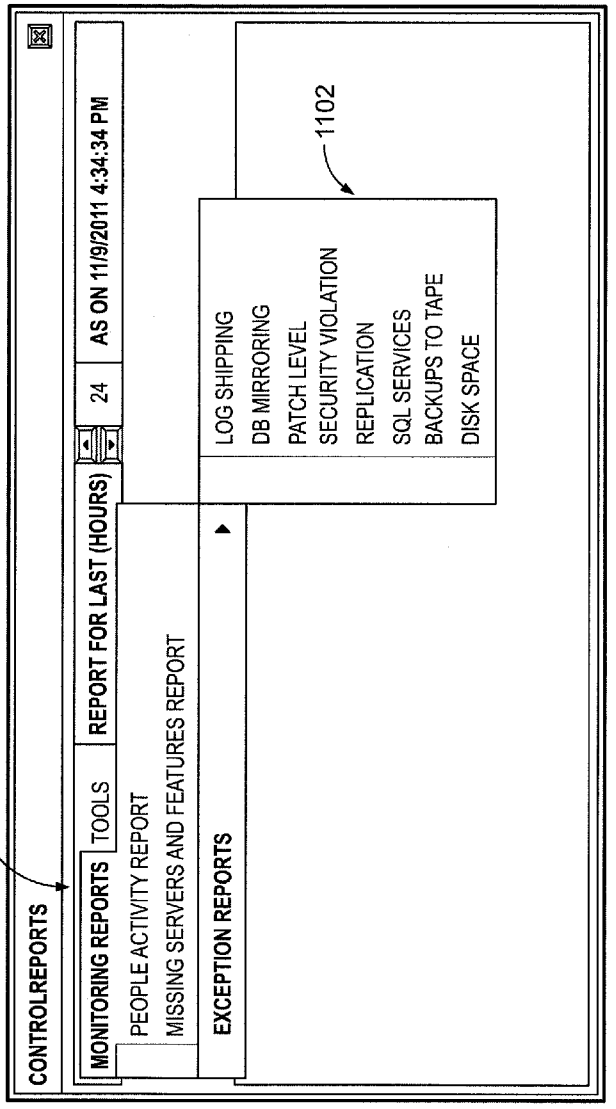

1100
1101
CONTROLREPORTS
MONITORING REPORTS
TOOLS
REPORT FOR LAST (HOURS)
24
AS ON 11/9/2011 4:34:34 PM
PEOPLE ACTIVITY REPORT
MISSING SERVERS AND FEATURES REPORT
EXCEPTION REPORTS
LOG SHIPPING
DB MIRRORING
PATCH LEVEL
SECURITY VIOLATION
REPLICATION
SQL SERVICES
BACKUPS TO TAPE
DISK SPACE
1102

FIG. 11

PROACTIVE MONITORING OF DATABASE SERVERS

FIELD

[0001] Aspects of the embodiments relate to a computer system that processes status information from database servers.

BACKGROUND

[0002] Companies, including financial businesses, manufacturing companies, and service-related businesses, often store and maintain databases in distributed or stand-alone form that are supported by numerous database servers. The database servers may be virtually or physically different and may reside at the same or different physical locations. The number of database servers may be very large, spanning tens, hundreds, or even thousands of physical and/or virtual computing machines. Consequently, a company may assign different database servers to different database administrators so that the each database server can be accessed and maintained in a reasonable manner. However, even with the partitioning of Database Server responsibilities, a database administrator often must expend an inordinate amount of time to adequately monitor assigned database servers on a daily basis.

[0003] With traditional systems, a database administrator is often dependent on status indications such as alerts, notification e-mail, and/or messages generated by monitoring agents executing at database servers. Based on the status indications, the database administrator may then investigate a particular database server for relevant status information by manually logging into an identified database server and performing health checks, one server at a time. The interface provided by a database server is typically not easy to use. In addition, configuring alerting agents on a newly built server often requires a sequence of steps to be performed on the server. Needless to say, the above-described process is very time consuming and cumbersome and does not provide the status information in a timely manner, further reducing the productivity of the database administrator. Moreover, the number of generated status indications is often quite large and many indications may be irrelevant to the proper operation of a database server. Consequently a database administrator may spend a substantial amount of time on a database server that does not need further investigation.

BRIEF SUMMARY

[0004] The following presents a simplified summary in order to provide a basic understanding of some aspects of the disclosure. The summary is not an extensive overview of the disclosure. It is neither intended to identify key or critical elements of the disclosure nor to delineate the scope of the disclosure. The following summary merely presents some concepts of the disclosure in a simplified form as a prelude to the description below.

[0005] Aspects of the disclosure relate to methods, computer-readable media, and apparatuses for monitoring a plurality of database servers to mitigate server availability risks. The plurality of servers may be proactively monitored to determine a database status at each server before an alert is generated and/or before server downtime starts.

[0006] According to one or more aspects, an automated proactive process that executes at a user's (DBA's) desktop, monitors features for a set of databases and servers that are distributed over a plurality of structured query language (SQL) servers. SQL server features may include: Log shipping, DB Mirroring, Replication, SQL Agent Jobs, Security baseline, SQL Server Patch level, Fixed disk free space, Database status and available space, Performance counters, and SQL error log. The automated process typically offers a substantial time savings with respect to traditional systems. According to traditional systems, a user, such as a database administrator, manually examines each of the SQL servers for health checks. It is often not practical to monitor each server over the course of the day with traditional systems. However, with an aspect of the disclosure, information about the SQL Server status is presented in a graphical user interface (GUI) format where status information for all of the listed SQL servers is presented in one integrated view in an automated manner.

[0007] According to one or more additional aspects, an automated monitoring process executes on a user's desktop, such as on a database administrators computer, without any custom executable files being installed on the Database Servers. The user may set the refresh time for updating the GUI and may initiate the monitoring of the SQL servers by the automated process. The monitoring process may read a list of SQL Server Instances from a designated Server detail repository (in form of a Database) of organization or from a flat text input file and then connects to each listed SQL server to query the System Catalogs of the SQL Server engine. Because the monitoring process runs from the user's desktop, configuration demand at the SQL servers side is circumvented. The monitoring process interprets the received information from the SQL servers and updates the GUI. By monitoring and obtaining additional information about SQL features for specified servers through the GUI, the database administrator or any other user may then report and fix detected issues.

[0008] According to one or more aspects, the GUI is color-coded to indicate the status of individual SQL features for each monitored SQL server. The process analyzes each SQL feature one by one, and based on the received status information color codes the feature as presented by the GUI. For example, a healthy status, a near threshold status, and a broken status may be color-coded as green, yellow, and red, respectively.

[0009] According to one or more aspects, the GUI virtually brings a set of database servers on a database administrator's desktop presenting a live and "at a glance" view. Frequent live view of database servers may assist the database administrator to become more familiar with a database server and its behavior. This approach may assist the database administrator to predict certain types of issues before the issues occur.

[0010] Various aspects described herein may be embodied as a method, an apparatus, or as one or more computer-readable media storing computer-executable instructions. Accordingly, those aspects may take the form of an entirely hardware embodiment, an entirely software embodiment, or an embodiment combining software and hardware aspects. Any and/or all of the method steps described herein may be implemented as computer-readable instructions stored on a computer-readable medium, such as a non-transitory computer-readable medium. In addition, various signals representing data or events as described herein may be transferred between a source and a destination in the form of light and/or electromagnetic waves traveling through signal-conducting media such as metal wires, optical fibers, and/or wireless transmission media (e.g., air and/or space).

[0011] Aspects of the disclosure have been described in terms of illustrative embodiments thereof. Numerous other embodiments, modifications, and variations within the scope and spirit of the disclosure will occur to persons of ordinary skill in the art from a review of this disclosure. For example, one of ordinary skill in the art will appreciate that the steps illustrated herein may be performed in other than the recited order, and that one or more steps illustrated may be optional in accordance with aspects of the disclosure.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The present disclosure is illustrated by way of example and not limited in the accompanying figures in which like reference numerals indicate similar elements and in which:

[0013] FIG. **1** illustrates an example of a suitable computing system environment that may be used according to one or more illustrative embodiments.

[0014] FIG. **2** shows an illustrative system for implementing example embodiments according to the present disclosure.

[0015] FIG. **3** shows a system with a plurality of database servers in accordance with an aspect of the disclosure.

[0016] FIG. **4** shows a process for proactively monitoring database servers in accordance with an aspect of the disclosure.

[0017] FIG. **5** shows a process for proactively monitoring database servers through a graphical user interface (GUI) in accordance with an aspect of the disclosure.

[0018] FIG. **6** shows a process for obtaining a list of database servers associated with a Database Administrator (DBA) in accordance with an aspect of the disclosure.

[0019] FIG. **7** shows a process for connecting to a database server in accordance with an aspect of the disclosure.

[0020] FIG. **8** shows a process for obtaining Database Server feature information from a database server in accordance with an aspect of the disclosure.

[0021] FIG. **9** shows a screenshot of a graphical user interface (GUI) for displaying database feature information in accordance with an aspect of the disclosure.

[0022] FIG. **10** shows a screenshot of detailed information for a Database Server feature in accordance with an aspect of the disclosure.

[0023] FIG. **11** shows a screenshot of report information in accordance with an aspect of the disclosure.

DETAILED DESCRIPTION

[0024] In the following description of the various embodiments, reference is made to the accompanying drawings, which form a part hereof, and in which is shown by way of illustration various embodiments in which the disclosure may be practiced. It is to be understood that other embodiments may be utilized and structural and functional modifications may be made without departing from the scope and spirit of the present disclosure.

[0025] In accordance with various aspects of the embodiments, a computer system processes status information from database servers supporting a database type, including a relational database, e.g., structured query language (SQL). The computer system monitors a plurality of database servers to mitigate server availability risks. Database administrators may span many relational database management systems (RDBMS) and may have common areas of interest that are monitored in a daily basis. A user display, e.g., a graphical user interface, may be tailored according to a selected RDBMS product. Moreover, the computer system may support different types of businesses that utilize a database server infrastructure, including financial, information technology (IT), and manufacturing companies.

[0026] Traditional Database monitoring systems often monitor database servers on behalf of a database administrator as a background process on each of the listed Database Servers. Issues regarding the database servers are reported though e-mail and/or short message service (SMS) resulting in significant dependency on the message infrastructure. However, according to various aspects of the embodiments, received status information about the SQL servers will be displayed with a graphical user interface (GUI) and coded by color to indicate the status of individual SQL Server\RDBMS features for each monitored SQL server. The process analyzes each SQL Server\RDBMS feature one by one, and based on the received status information color-codes the feature as presented by the GUI.

[0027] According to various aspects of the embodiments, control reports may be generated. to facilitate proactive monitoring by database administrators.

[0028] DBA Managers can also generate variety of Control report to ensure that the Proactive monitoring is happing in effective way.

[0029] FIG. **1** illustrates an example of a suitable computing system environment **100** that may be used according to one or more illustrative embodiments. The computing system environment **100** is only one example of a suitable computing environment and is not intended to suggest any limitation as to the scope of use or functionality contained in the disclosure. The computing system environment **100** should not be interpreted as having any dependency or requirement relating to any one or combination of components shown in the illustrative computing system environment **100**.

[0030] The disclosure is operational with numerous other general purpose or special purpose computing system environments or configurations. Examples of well known computing systems, environments, and/or configurations that may be suitable for use with the disclosed embodiments include, but are not limited to, personal computers (PCs), server computers, hand-held or laptop devices, multiprocessor systems, microprocessor-based systems, set top boxes, programmable consumer electronics, network PCs, minicomputers, mainframe computers, distributed computing environments that include any of the above systems or devices, and the like.

[0031] With reference to FIG. **1**, the computing system environment **100** may include a computing device **101** wherein the processes discussed herein may be implemented. The computing device **101** may have a processor **103** for controlling overall operation of the computing device **101** and its associated components, including random-access memory (RAM) **105**, read-only memory (ROM) **107**, communications module **109**, and memory **115**. Computing device **101** typically includes a variety of computer readable media. Computer readable media may be any available media that may be accessed by computing device **101** and include both volatile and nonvolatile media, removable and non-removable media. By way of example, and not limitation, computer readable media may comprise a combination of computer storage media and communication media.

[0032] Computer storage media include volatile and non-volatile, removable and non-removable media implemented in any method or technology for storage of information such as computer readable instructions, data structures, program modules or other data. Computer storage media include, but is not limited to, random access memory (RAM), read only memory (ROM), electronically erasable programmable read only memory (EEPROM), flash memory or other memory technology, CD-ROM, digital versatile disks (DVD) or other optical disk storage, magnetic cassettes, magnetic tape, magnetic disk storage or other magnetic storage devices, or any other medium that can be used to store the desired information and that can be accessed by computing device **101**.

[0033] Communication media typically embodies computer readable instructions, data structures, program modules or other data in a modulated data signal such as a carrier wave or other transport mechanism and includes any information delivery media. Modulated data signal includes a signal that has one or more of its characteristics set or changed in such a manner as to encode information in the signal. By way of example, and not limitation, communication media includes wired media such as a wired network or direct-wired connection, and wireless media such as acoustic, RF, infrared and other wireless media.

[0034] Computing system environment **100** may also include optical scanners (not shown). Exemplary usages include scanning and converting paper documents, e.g., correspondence, receipts, etc. to digital files.

[0035] Although not shown, RAM **105** may include one or more are applications representing the application data stored in RAM **105** while the computing device is on and corresponding software applications (e.g., software tasks), are running on the computing device **101**.

[0036] Communications module **109** may include a microphone, keypad, touch screen, and/or stylus through which a user of computing device **101** may provide input, and may also include one or more of a speaker for providing audio output and a video display device for providing textual, audiovisual and/or graphical output.

[0037] Software may be stored within memory **115** and/or storage to provide instructions to processor **103** for enabling computing device **101** to perform various functions. For example, memory **115** may store software used by the computing device **101**, such as an operating system **117**, application programs **119**, and an associated database **121**. Also, some or all of the computer executable instructions for computing device **101** may be embodied in hardware or firmware.

[0038] Computing device **101** may operate in a networked environment supporting connections to one or more remote computing devices, such as computing devices **141**, **151**, and **161**. The computing devices **141**, **151**, and **161** may be personal computing devices or servers that include many or all of the elements described above relative to the computing device **101**. Computing device **161** may be a mobile device communicating over wireless carrier channel **171**.

[0039] The network connections depicted in FIG. **1** include a local area network (LAN) **125** and a wide area network (WAN) **129**, but may also include other networks. When used in a LAN networking environment, computing device **101** may be connected to the LAN **125** through a network interface or adapter in the communications module **109**. When used in a WAN networking environment, the computing device **101** may include a modem in the communications module **109** or other means for establishing communications over the WAN **129**, such as the Internet **131** or other type of computer network. It will be appreciated that the network connections shown are illustrative and other means of establishing a communications link between the computing devices may be used. Various well-known protocols such as TCP/IP, Ethernet, FTP, HTTP and the like may be used, and the system can be operated in a client-server or in Distributed Computing configuration to permit a user to retrieve web pages from a web-based server. Any of various conventional web browsers can be used to display and manipulate data on web pages.

[0040] Additionally, one or more application programs **119** used by the computing device **101**, according to an illustrative embodiment, may include computer executable instructions for invoking user functionality related to communication including, for example, email, short message service (SMS), and voice input and speech recognition applications.

[0041] Embodiments of the disclosure may include forms of computer-readable media. Computer-readable media include any available media that can be accessed by a computing device **101**. Computer-readable media may comprise storage media and communication media and in some examples may be non-transitory. Storage media include volatile and nonvolatile, removable and non-removable media implemented in any method or technology for storage of information such as computer-readable instructions, object code, data structures, program modules, or other data. Communication media include any information delivery media and typically embody data in a modulated data signal such as a carrier wave or other transport mechanism.

[0042] Although not required, various aspects described herein may be embodied as a method, a data processing system, or a computer-readable medium storing computer-executable instructions. For example, a computer-readable medium storing instructions to cause a processor to perform steps of a method in accordance with aspects of the disclosed embodiments is contemplated. For example, aspects of the method steps disclosed herein may be executed on a processor on a computing device **101**. Such a processor may execute computer-executable instructions stored on a computer-readable medium.

[0043] Referring to FIG. **2**, an illustrative system **200** for implementing example embodiments according to the present disclosure is shown. As illustrated, system **200** may include one or more workstation computers **201**. Workstations **201** may be local or remote, and may be connected by one of communications links **202** to computer network **203** that is linked via communications links **205** to server **204**. In system **200**, server **204** may be any suitable server, processor, computer, or data processing device, or combination of the same. Server **204** may be used to process the instructions received from, and the transactions entered into by, one or more participants.

[0044] Computer network **203** may be any suitable computer network including the Internet, an intranet, a wide-area network (WAN), a local-area network (LAN), a wireless network, a digital subscriber line (DSL) network, a frame relay network, an asynchronous transfer mode (ATM) network, a virtual private network (VPN), or any combination of any of the same. Communications links **202** and **205** may be any communications links suitable for communicating between workstations **201** and server **204**, such as network links, dial-up links, wireless links, hard-wired links, etc.

[0045] The steps that follow in the Figures may be implemented by one or more of the components in FIGS. **1** and **2** and/or other components, including other computing devices.

[0046] FIG. **3** shows system **300** with a plurality of database servers **302**, **303**, and **304** in accordance with an aspect of the disclosure. Computer **301** (typically associated with a database administrator) interacts with database servers **302-304** through communication network **305**.

[0047] As will be further discussed, processes (e.g., processes **400**, **500**, **600**, **700**, and/or **800** as shown in FIGS. **4-8**, respectively) are executed on computer **301** (e.g., as shown as computer **101** in FIG. **1** or workstation **201** in FIG. **2**) of the database administrator in order to proactively monitor assigned database servers **302-304**. To facilitate monitoring, the assigned database servers are identified in server information stored at name server **306**. Name server **306** may be integrated with computer **301** to ensure that a database administrator has access only to those database servers that the administrator is authorized.

[0048] Database servers **302-304** may serve different types of databases, including a relational database, e.g., SQL database. With one aspect, different RDBMS technologies may be supported under a multi-generation plan.

[0049] With some embodiments, the processes executing on computer **301** supports a graphical user interface that provides a near real-time view of multiple SQL server instances (e.g., screenshot **900** as shown in FIG. **9**) on a database (DB) administrator's desktop. Because monitoring configuration is not required on a SQL server, the GUI tool may appear to be essentially instantaneous to the DB administrator so that any newly built SQL server can be viewed without having to prepare the server from monitoring stand point.

[0050] With some embodiments, the processes executing on computer **301** provide monitoring that is proactive rather than reactive because the monitoring is not predicated on status indications. Also, the processes may circumvent the need for configurations, agents, or components at database servers **302-304** and for an extra layer of intermediate messaging dependency (e.g., e-mail, alerts, messaging). Also, the processes may use a standard 32-bit Windows® operating system, thus circumventing a complicated monitoring infrastructure that demands an extra skill sets and significant cost with infrastructure dependency.

[0051] FIG. **4** shows high-level process **400** for proactively monitoring database servers at computer **301** in accordance with an aspect of the disclosure. Process **400** may support different types of user interfaces, including a graphical user interface that will be further discussed with FIGS. **5-9**.

[0052] With traditional Database Server monitoring systems, DB administrators manually log into database servers for health checks. For example, a DB administrator may spend approximately 10 minutes on an average on each database server when doing so. For example, with more than 30 to 50 SQL servers assigned, a DB administrator may allocate 5 to 8 hours to this task, thus severely degrading the DB administrator's productivity. Moreover, based on the practicality of the situation, it may be very unlikely that the DB administrator is able to monitor each database server every day.

[0053] At block **401**, a database (DB) administrator logs into computer **301**. At block **402**, computer **301** uses the DB administrator's login identification to pull the database server list from name server **306** for servers assigned to the database administrator. As will be further discussed, name server **306** is identified through a suitable naming format, i.e., IP address, where the server name is contained in registry at computer **301**. With some embodiments, the DB administrator will have status information for database servers that are assigned to that DB administrator, consequently providing better system security and isolation while reducing the work demands on the database administrator.

[0054] At block **403**, computer **301** logs into a particular database server on behalf of the DB administrator at a desired time and establishes a connection to the database server. For example, the database administrator may configure a refresh interval so that assigned database servers are queried during each refresh interval to update the status information. The connection may be established from the desktop of computer **301** rather than an agent running on a database server.

[0055] At block **404**, computer **301** receives status information from database servers **302-304**, interprets the results and color codes database feature information that is displayed in GUI labels accordingly. Looking at the color (e.g., green, yellow, or red) imposed in the GUI labels, the DB administrator may obtain an expeditious view about the status of database servers **302-304**. The DB administrator may then obtain detailed information about database servers features that appear to have a status issue.

[0056] With some embodiments, a DB administrator may obtain status information from a particular database server about SQL features for the assigned database servers. For example, exemplary SQL features may include the following.

[0057] LogShipping—High availability technique that keeps two copies of the database for DR readiness. The copy database should contain same data as its main production database.

[0058] DB Mirroring—Another high availability technique that keeps two copies of the database for disaster recovery (DR) readiness. The copy database should contain the same data as its main production database.

[0059] DB Replication—Maintaining multiple copies of same data across multiple sites (distribute across sites). It also provides high availability for DR readiness. A set of complicated components should be monitored to ensure that all the sites have right and latest data.

[0060] Failover Cluster—Redundant servers form a group and appear as if a single server to applications. Failure of one machine invokes other machine in group to take over the application request that is transparent to client.

[0061] Memory Pressure—Examines server memory utilization and detects possible memory pressure server may run under.

[0062] CPU Pressure—Examines server processor utilization and detects possible CPU bottleneck.

[0063] IO—Examines servers disk subsystem read/write operations to detect possible IO bottleneck.

[0064] Database Status—Examines available free space within database files, readiness to accept transaction, and/or DB configuration per organization standards (file location, mode).

[0065] Free Disk Space—Examines that all the drives on server has >20% free space at least.

[0066] SQL Related Services—Examines that all the required and important SQL related services are running on the SQL server and may also examine Foglight agent status. (Foglight supports application monitoring and is provided by Quest Software®.

[0067] Database Statistics—Examines outdated Statistics to ensure optimum query performance.

[0068] Patch Level—Latest recommended patch level must be ensured to keep the servers up to date, optimum, secure and compliant t within organization.

[0069] User Access Level—Adherence to organization's security guidelines. Proactive detection saves a lot of audit failure while maintains a compliant and secured database servers.

[0070] Database users without any database roles assigned within database.

[0071] Memory configuration—according to recommendation by Microsoft for 32-bit and 64-bit systems.

[0072] SQL Services Service accounts (for a domain account)

[0073] Database file Autogrowth related settings.

[0074] SQL Server scheduled Jobs status (success, failure or hung)—checks if a job missed its defined schedule.

[0075] SQL Server Error Log—reported errors that may cause business outage in due course of time if couldn't be noticed.

[0076] Database Backups sent to Tapes

[0077] Database Backup is NOT too old.

[0078] Detection of a recent Server Reboot and a SQL Recycle—Fatal error may cause automatic frequent reboots.

[0079] At block **405**, the DB administrator uses the status and detailed information provided by monitoring block **404** to remediate and/or report the SQL issue for the corresponding SQL server.

[0080] FIG. **5** shows process **500** for proactively monitoring database servers through a graphical user interface in accordance with an aspect of the disclosure. (An example of the graphical user interface is shown in FIG. **9** showing the status of the assigned database servers.) Process **500** integrates the assigned database servers onto the DB administrator's desktop through the graphical user interface. Consequ ently, the DB administrator may have a near real-time view of the administrator's database servers at a glance on the desktop. By viewing the health of the assigned DB servers in one integrated view, the DB administrator can work more efficiently while all of the assigned database servers multiple times during the day. In addition, by viewing the near real-time status, the DB administrator becomes more familiar with the operating characteristics of the assigned database servers.

[0081] At block **501**, the graphical user interface is configured and loaded onto the desktop of the DB administrator. For example, the DB administrator may select and order some or all of the SQL features as discussed above based on the needs of the administrator.

[0082] At block **502**, similar to block **402**, process **500** pulls the database server list from name server **306** for servers assigned to the database administrator.

[0083] At block **503**, process **500** establishes the refresh time interval for updating the status information on the graphical user interface. For example, referring to FIG. **9**, the DB administrator may set the refresh time by entering the desired time (e.g., **20** minutes) at region **903**. With some embodiments, setting the refresh time may be optional for the database administrator. For example, the refresh time may be set to a default value.

[0084] At block **504**, the graphical user interface displays the status for the database features for each of the assigned database servers. For example, referring to FIG. **9**, labels for SQL features Log Shipping, SQL Jobs, Security Audit, Replication, Drive Space, Imp Services, DB Mirroring, SQL Log, and Database Status are color coded to convey the status of the corresponding database feature for the each of the assigned database servers. With some embodiments, computer **301** establishes a connection to a database server, obtains status information about the database features, and closes the connection after completing each features scan on the Database Server. The database administrator may further obtain a detailed view of the database features for a database server.

[0085] Based on the indicated health of the database features, the DB administrator may identify problems with any of the assigned database servers. For example, referring to FIG. **9**, feature labels shown in red may be indicative of the need for further investigation. In such a case, the DB administrator may obtain detailed information (e.g., as shown in FIG. **10**) and generate reports at block **506**. After identifying the issue and conducting a root cause analysis, the DB administrator may use a preferable way to further fix the issue.

[0086] With some embodiments, multiple instances of the GUI may be executed in parallel on same desktop with smaller sets of Database Server List for a quicker scan with a large number of DB servers. Also, the frequency for auto refresh should be set based on the maximum time taken to scan a particular set of DB servers.

[0087] With some embodiments, the DB administrator may interact with the GUI (i.e., trying to scroll the view) while it is in middle of scanning a list of servers. The GUI may pause the scanning while DB administrator holds the mouse pressed. The moment DB administrator releases, the GUI resumes.

[0088] FIG. **6** shows process **600** for obtaining a list of database servers corresponding to blocks **402** and **502** as shown in FIGS. **4** and **5**, respectively.

[0089] At block **601**, computer **301** determines the identification of name server **306** from a registry typically located at computer **301**. Name server **306** is typically where an organization maintains a mapping of assigned DB servers to database administrators. If computer **301** successfully finds the identification (e.g., URL of the name server) at block **602**, computer **301** connects to name server **306**. If not, computer **301** prompts the user to identify the "Name Server" at block **604**.

[0090] At block **603**, computer **301** pulls the list of database servers assigned to the DB administrator. Having the list stored at a company's centralized repository, e.g., name server **306**, may facilitate maintaining assignment of database servers for a plurality of DB administrators. Consequently, server responsibilities can be easily changed among the DB administrators and new DB servers can be added. With some embodiments, the list only includes only database servers that the DB administrator is authorized to access for security reasons. If the pull operation is successful at block **605**, the graphical user interface is populated with a display region (e.g., regions **905-907** as shown in FIG. **9**) for each database server in the list at block **606**. The graphical user interface can be then configured for automatic period refresh at block **608** based on the desired refresh interval. As required, the DB administrator may initiate one time monitoring. With some embodiments, a database administrator may choose not to set automatic refreshing but may choose to initiate a scan as and when required.

[0091] If the pull operation is not successful, computer **301** may be able to locate the server list in a text file stored locally on computer **301** at block **607**. With some embodiments, the

database administrator has an option to locate the text file to obtain the database server names.

[0092] FIG. **7** shows process **700** for connecting to a database server in accordance with an aspect of the disclosure. At block **701**, computer **301** determines the next database server on the list (as obtained by process **600**) and connects to the database server on behalf of the DB administrator at block **702**. If the connection is successful at block **703**, computer **301** checks the database version of the database server at block **704**. If the version is less than a minimum level, a message may be displayed on the graphical user interface indicating so at block **706**. Otherwise, the version may be displayed on the graphical user interface at block **707**. Displayed information may include a patch level, edition, and/or indication whether the version is for 32 or 64 bit configurations. If the connection is not successful, an error message may be generated on the graphical user interface at block **705**.

[0093] After completion of block **705** process **700** is repeated for the next database server on the list. On reaching to block **707**, process **800** is performed before repeating process **700** for traversing the Server list until the end of the list is reached.

[0094] FIG. **8** shows process **800** for obtaining database feature information from a database server in accordance with an aspect of the disclosure. Process **800** may be repeated for each refresh interval by computer **301** connecting to a database server and obtaining status information from the database server. When the information has been received, computer **301** terminates the connection and repeats the process for the next database server on the list.

[0095] When the connection has been established to a database server, status information for each database feature is obtained from the database server at block **801**. For example, computer **301** may query the database server for a system catalog of a SQL server engine. The system catalog is a repository of the server's internal information that the server uses for its own operations. For example, the system catalog may comprise a set of multiple objects in which different objects contain information related to different features.

[0096] Based on the health of a feature as determined by an analysis of the received status information, computer **301** color codes feature label in the graphical user interface for the feature at blocks **802-809**. For example, referring to FIG. **9**, Log Shipping, Drive Space, and Security Audit for server CRPCONMSQYY are color coded green, yellow, and red to indicate status states of healthy, warning, and broken, respectively. With some embodiments, if a feature is not found as configured, the corresponding label turns to gray as "disabled" for the associated DB Server. At block **803**, when an error is detected, there is no change to the color of the related label. According to another aspect of the embodiments, the received status information from the DB servers may be compared to status criteria, where the criteria and threshold values may be configurable.

[0097] Status information for the feature is saved in a memory at block **810**. If there are more database features to review, as determined at block **811**, blocks **801-810** can be repeated. When all of the database features has been processed, process **800** can be repeated for the next database server in the server list.

[0098] Referring to FIG. **9**, a DB administrator can specify the source of the server list at region **901**. As previously discussed, the server list is typically obtained from a centralized repository (designated Enventory in screenshot **900**) or may be obtained from a text file that is locally located at computer **301**. The list of database servers is then displayed in region **902**. Status information for the database features is displayed for each of the database servers in a corresponding region (e.g., **905-907**). As previously discussed, feature labels may be color coded (as per the legend in region **904**) to indicate the status state of the corresponding feature. For example, label **908** is shown in yellow to indicate that one of the disk drives has less than 20% of free space. Label **909** is shown in green because no issues have been detected for this server for Logshipping. Label **910** is shown in red because at least one critical error has been reported in the SQL Server error log in last 24 hours. As will be discussed, screenshots **1000** and **1100** may be displayed by computer **301** when the DB administrator selects items **911** and **912**, respectively. Region **913** displays a collection of operation errors and/or exceptions encountered by the monitoring GUI while examining the SQL Servers in the list shown in region **902**.

[0099] FIG. **10** shows screenshot **1000** of detailed information for the database feature agent jobs for a selected database server CRPCONMSQYY\CSE3INST36. Detailed information about different features may be selected from the Tab Pages shown in region **1001**. Region **1002** displays the detailed output for Job Step **1003**. Region **1002** dynamically changes the text color based on the failure or success of the selected Job Step. The DB administrator may refresh the current view with the latest status information by selecting item **1004**. Selection of region **1005** closes the detailed view and takes the DBA to the main "at a glance" screen.

[0100] FIG. **11** shows screenshot **1100** of report information in accordance with an aspect of the disclosure. Screenshot **1100** may be initiated through screen shot **900** at item **912**.

[0101] Monitoring reports may be selected through region **1101**. For example, a list of the DB administrators with the last activity date and time or a list of features and servers that could not be monitored may be displayed. Also, exception reports may be displayed for a selected feature at region **1102**. An exemption report typically contains information similar to what is presented in the detailed view of screenshot **1000**. A custom report may be designed and included based on reporting requirements.

[0102] Aspects of the embodiments have been described in terms of illustrative embodiments thereof. Numerous other embodiments, modifications and variations within the scope and spirit of the appended claims will occur to persons of ordinary skill in the art from a review of this disclosure. For example, one of ordinary skill in the art will appreciate that the steps illustrated in the illustrative figures may be performed in other than the recited order, and that one or more steps illustrated may be optional in accordance with aspects of the embodiments. They may determine that the requirements should be applied to third party service providers (e.g., those that maintain records on behalf of the company).

We claim:

1. An apparatus comprising:

at least one memory; and

at least one processor coupled to the at least one memory and configured to perform, based on instructions stored in the at least one memory:

obtaining a server list of a plurality of database servers that is associated with a user;

configuring a display for displaying database feature information for each of the plurality of database servers;

automatically obtaining the database feature information for a first database server on the server list;

incorporating the database feature information into a display for the first database server; and

repeating the automatically obtaining and the incorporating for a second database server in the server list.

2. The apparatus of claim **1**, wherein the first database server comprises a structured query language (SQL) server.

3. The apparatus of claim **2**, wherein the at least one processor is further configured to perform:

querying a system catalog of a SQL server engine for the database feature information.

4. The apparatus of claim **1**, wherein the automatically obtaining comprises:

obtaining first feature information for a first database feature from the first database server; and

in response to receiving the first feature information, obtaining second feature information for a second database feature from the first database server.

5. The apparatus of claim **1**, wherein the at least one processor is further configured to perform:

automatically obtaining updated database feature information for the first database server during a subsequent time interval; and

updating the display with the updated database feature information.

6. The apparatus of claim **1**, wherein the display displays a graphical user interface (GUI).

7. The apparatus of claim **6**, wherein the at least one processor is further configured to perform:

coding a status indicator with a selected color for a first database feature on the first database server, wherein the selected color is indicative of a status state.

8. The apparatus of **7**, wherein the at least one processor is further configured to perform:

repeating the color coding for another database feature on the first database server.

9. The apparatus of claim **8**, wherein the at least one processor is further configured to perform:

repeating the color coding for the second database server.

10. The apparatus of claim **1**, wherein the obtaining the server list comprises:

attempting to obtain the list from a name server; and

when the attempt is unsuccessful, locating the server list in a text file.

11. The apparatus of claim **1**, wherein the at least one processor is further configured to perform:

receiving an indicator for one of a plurality of database features; and

presenting detailed information about said one of the plurality of database features.

12. The apparatus of claim **1**, wherein the at least one processor is further configured to perform:

receiving a selection for a subset of database features from a plurality of database features; and

presenting database feature information only for the subset of database features.

13. The apparatus of claim **12**, wherein the at least one processor is further configured to perform:

ordering the subset of database features on the display based on input information.

14. The apparatus of claim **7**, wherein the at least one processor is further configured to perform:

obtaining at least one status criterion for the first database feature;

determining the status state for the first database feature from the at least one status criterion and the database feature information; and

based on the determined status state, displaying a label on the display for the first database feature with the selected color.

15. A computer-assisted method for processing data, the method comprising:

obtaining a server list of a plurality of relational database servers that is associated with a user;

configuring a graphical user interface (GUI) for displaying database feature information for each of the plurality of database servers;

automatically obtaining the database feature information for a first relational database server;

incorporating the database feature information into the display for the first relational database server; and

repeating the automatically obtaining and the incorporating for a second relational database server from the server list.

16. The method of claim **15**, wherein the first relational database server supports a structured query language (SQL) database.

17. The method of claim **16** further comprising:

querying a system catalog of a SQL server.

18. The method of claim **16**, wherein the automatically obtaining comprises:

obtaining first feature information for a first SQL feature from the first SQL database server; and

in response to receiving the first feature information, obtaining second feature information for a second SQL feature from the first SQL database server.

19. The method of claim **16** further comprising:

automatically obtaining updated database feature information for the first SQL database server during a refresh time interval; and

updating the GUI with the updated database feature information.

20. The method of claim **16**, further comprising:

color coding a status indicator of the GUI for a first database feature for the first SQL database server.

21. The method of claim **15**, further comprising:

receiving an indicator for one of a plurality of database features; and

presenting detailed information about said one of the plurality of database features.

22. The method of claim **15** further comprising:

receiving a selection for a subset of database features from a plurality of database features; and

presenting database feature information on the GUI only for the subset of database features.

23. The method of claim **22** further comprising:

ordering the subset of database features on the GUI based on user input information.

24. A non-transitory computer-readable storage medium storing computer-executable instructions that, when executed, cause a processor at least to perform operations comprising:

obtaining a server list of a plurality of structured query language (SQL) database servers that is associated with a user;

configuring a graphical user interface (GUI) for displaying database feature information for each of the plurality of SQL database servers;

querying at least one system catalog of a SQL server engine for the database information;

based on the querying, obtaining the database feature information for a first SQL database server; and

repeating the automatically obtaining and the incorporating for a second SQL database server from the server list.

25. The non-transitory computer-readable storage medium of claim **24**, wherein the computer-executable instructions, when executed, cause the processor to perform:

obtaining first feature information for a first SQL feature from the first SQL database server; and

in response to receiving the first feature information, obtaining second feature information for a second SQL feature from the first SQL database server.

26. The non-transitory computer-readable storage medium of claim **24**, wherein the computer-executable instructions, when executed, cause the processor to perform:

color coding a status indicator of the GUI for a first database feature for the first SQL database server.

27. The non-transitory computer-readable storage medium of claim **24**, wherein the computer-executable instructions, when executed, cause the processor to perform:

repeating the color coding for a plurality of SQL database features and the plurality of SQL database servers.

28. The apparatus of claim **1**, wherein the at least one processor is further configured to perform:

determining a feature list to be monitored based on a type of relational database management system (RDBMS) being monitored.

29. The method of claim **15**, wherein an instance of the GUI interacts only with one type of relational database management system (RDBMS).

* * * * *