




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification <sup>6</sup> : <b>G06F 12/14, 12/02</b></p>	<p><b>A1</b></p>	<p>(11) International Publication Number: <b>WO 00/05653</b> (43) International Publication Date: 3 February 2000 (03.02.00)</p>
<p>(21) International Application Number: PCT/US99/16592 (22) International Filing Date: 22 July 1999 (22.07.99) (30) Priority Data: 09/121,254 23 July 1998 (23.07.98) US (71) Applicant: STORAGE TECHNOLOGY CORPORATION [US/US]; 2270 South 88th Street, MS-4309, Louisville, CO 80028-4309 (US). (72) Inventors: BLENDERMANN, Stephen, H.; 1489 Johnson Court, Boulder, CO 80303 (US). SUTTON, Alan, R.; 3991 75th Street, Boulder, CO 80301 (US). (74) Agents: SMITH, Ralph, E. et al.; Brooks &amp; Kushman, 1000 Town Center, 22nd floor, Southfield, MI 48075 (US).</p>		<p>(81) Designated States: JP, European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).  <b>Published</b> <i>With international search report.</i></p>

(54) Title: METHOD FOR REUTILIZATION OF DATA SPACE

(57) Abstract

A method for selectively controlling reutilization of data space in a virtual tape system is provided that stores (100) data volume files in a disk buffer, and analyzes (102) the files to determine whether the user has designated the corresponding data for immediate deletion at an associated expiration date. If the data has been designated (104), identifying and mapping information are marked to indicate that the corresponding data can be immediately deleted at the expiration date. Otherwise, the virtual volume is stored (106) using a default policy which prevents the virtual tape control system from reusing the tape and disk space occupied by the virtual volume after scratching until that particular virtual volume name is actually reused by the user. Thus, a user can selectively protect data past an original expiration date, while minimizing the impact to the overall efficiency in space management otherwise provided by the virtual tape system.

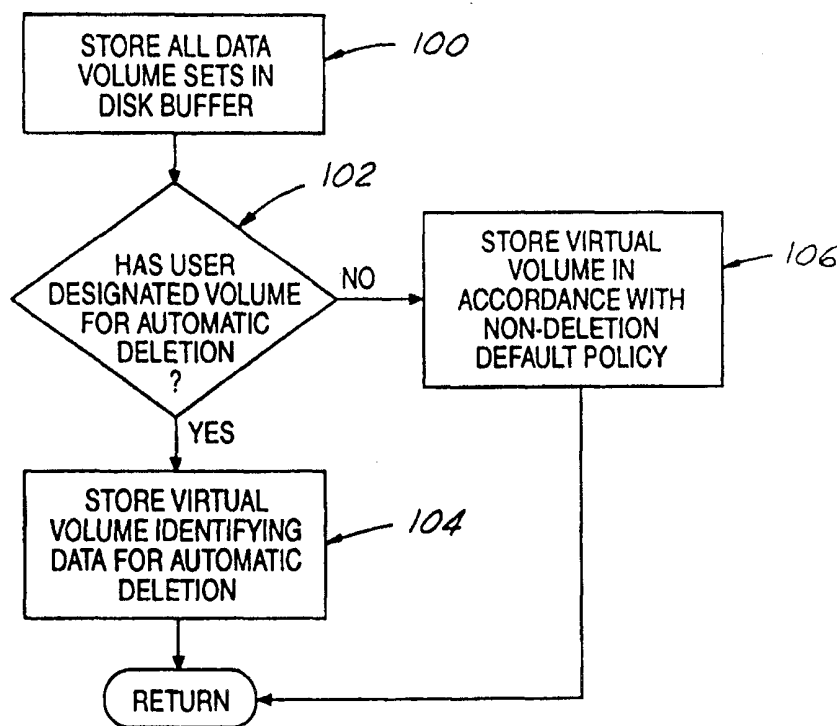

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece			TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	NZ	New Zealand		
CM	Cameroon			PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

## METHOD FOR REUTILIZATION OF DATA SPACE

### Technical Field

5                   The present invention relates generally to a virtual tape data storage arrangement, and more particularly to an improved method for selectively controlling reutilization of space occupied by expired data.

### 10                   Background Art

                  Generally, automated cartridge systems (ACS) provide a mechanism by which multiple users in a data processing system can have common access to multiple data storage subsystems such as magnetic tape cartridge  
15                   devices. In conventional tape systems, data files generated by remote user computer systems for storage on a particular tape cartridge include a predetermined expiration date in the file meta data which is used as a control mechanism by which a tape management subsystem  
20                   can determine whether a particular space on a tape can be rewritten with new data. However, in conventional tape systems, expired data from a "scratched" tape volume is not actually deleted from the tape until a user actually writes new data to the tape. In other

-2-

words, conventional tape systems conveniently provide a "safety net" for users who decide they still wish to be able to retrieve data from storage even though the data may be past the original expiration date.

5                   Because conventional tape systems have proven to be quite inefficient in data storage space utilization, a virtual tape system has been developed which significantly improves storage space utilization and control by incorporating the advantages of an  
10 intermediate disk buffer as part of a tape emulation arrangement. Such an arrangement is taught in commonly owned copending U.S. patent application serial no. 09/110,217, filed on July, 6, 1998.

15                   More specifically, in the referenced virtual tape system, a disk buffer is connected between remote users and the tape storage devices and arranged to appear to users as though it were a physical tape device. All data volumes are initially stored in the disk buffer, and subsequently written to a physical tape  
20 device using predetermined protocols which limit the occurrence of unusable dead spaces on the tapes while also improving the ability to reclaim any fragmented space which does occur. In such a virtual tape system, a user reads and writes only to the disk buffer, but  
25 believes they are reading and writing to an actual physical tape device.

-3-

While efficiency in space management and utilization are significantly improved with the virtual tape system, users also lose the above-noted safety net feature inherently provided by conventional tape systems. More specifically, to achieve higher efficiency, the virtual tape system operates to automatically reutilize any tape and disk buffer space occupied by expired data without user action, i.e., a user does not have exclusive monopoly of a particular tape like in a conventional tape system because the tape can be reused any time a new data volume is received into the disk buffer. Emulating the safety net feature in the virtual tape system would involve prohibiting the reuse of any tape space until a user reuses a corresponding virtual tape volume name for the data volume stored in the space irrespective of whether the corresponding data has expired.

However, such an arrangement reintroduces significant inefficiency in storage space utilization and reclamation, thereby defeating a main advantage of the virtual tape system. As a result, a need exists for an improved method of controlling reutilization of data space in a virtual tape system which can provide a safety net for users while also minimizing the impact of such a feature on efficiency of data storage space utilization and management.

### Disclosure of the Invention

It is therefore an object of the present invention to provide an improved method for controlling reutilization of data space in a virtual tape system which allows a user to control whether space occupied by expired data can be automatically reused by a tape management system.

It is another object of the present invention to provide a method for controlling reutilization of data space in a virtual tape system which allows selective reuse of physical storage space occupied by a scratched virtual volume without waiting until a user actually reuses the virtual volume.

In accordance with these and other objects, the present invention provides a method for controlling reutilization of data space in a virtual tape system which allows a user to designate whether a particular data volume can be automatically deleted at the time of expiration without waiting for the user to actually reuse the virtual volume.

In accordance with one aspect of the present invention, a method is provided for selectively controlling reutilization of data space in a virtual tape system which includes selectively designating by a

-5-

remote user whether a particular data volume file can be automatically deleted by the virtual tape system without any further action by the user after a predetermined expiration date for the data volume file has elapsed, 5 detecting whether a data volume file has been designated by the user for automatic deletion, and prohibiting deletion from the virtual tape system of the stored data corresponding to a data volume based on whether the data volume file was designated by the user for automatic 10 deletion. In accordance with another aspect, a predetermined grace period can be provided before automatic deletion is performed.

With such an arrangement, the present invention can allow a user to selectively "protect" data 15 past an original expiration date, while also allowing automatic reutilization of storage space for data which has not been specifically protected by the user.

These and other objects, features, and advantages of the present invention will be readily 20 apparent from the following detailed description of the best mode for carrying out the invention when taken in connection with the accompanying drawings.

### **Brief Description of the Drawings**

Figure 1 is a block diagram illustrating a virtual tape system utilizing selective deletion of data corresponding to a scratched virtual volume in accordance with the present invention;

5

Figure 2 is a flowchart showing the overall process of the present invention; and

Figure 3 is a flowchart showing verification and deletion of designated data from a scratch virtual volume.

10

### **Best Mode for Carrying Out The Invention**

The overall method of the present invention will now be described in connection with Figs. 1-3. More specifically, a virtual tape system 10 includes a virtual tape control system 12 having a suitable control processor (not shown) for routing all data volume files received from remote users to a disk buffer 14. Virtual tape control system 12 is arranged to transfer data from disk buffer 14 to one or more multiple volume cartridges (MVC) 16 as virtual tape volumes (VTV). A map matching the MVC location with corresponding VTV names and all corresponding file meta data is maintained by the virtual tape control system 12. An external tape management system (TMS) 18 provides overall management

15

20

-7-

of the use of virtual tapes used by virtual tape system  
10.

In accordance with the present invention,  
users can selectively tag or encode any desired data  
5 volume file to indicate that the tape and/or disk buffer  
space occupied by the corresponding virtual volume can  
be automatically reused either immediately after the  
expiration date or a predetermined period of time after  
the expiration date, i.e., a data deletion "grace  
10 period." Otherwise, if the user does not expressly  
designate a data volume file, virtual tape control  
system 12 will be prohibited from deleting and reusing  
the space of an expired virtual volume until a user  
reuses the VTV name for a new file of data.

15 This process is summarized in the flow charts  
of Figs. 2 and 3. As denoted at block 100, all data  
volume files are stored in the disk buffer, and analyzed  
at block 102 to determine whether or not the user has  
designated the corresponding data for immediate deletion  
20 at the expiration date, or alternatively after a  
predetermined or user defined grace period. At block  
104, if the data has been designated, the appropriate  
identifying and mapping information are marked to  
indicate that the corresponding data can be immediately  
25 deleted at either the expiration date or the end of the  
predetermined grace period. Otherwise, at block 106 the

-8-

virtual volume is stored in accordance with a default policy which will not allow the virtual tape control system to reuse the tape and disk space occupied by the virtual volume after scratching until that particular  
5 virtual volume name is actually reused by the user.

The flowchart of Fig. 3 illustrates an example of automatic deletion of data from a scratch VTV in accordance with the present invention. A VTV which has been selected for scratch at block 108 is analyzed at  
10 block 110 to determine whether the VTV has been designated for automatic deletion. If automatic deletion has been identified, the data is deleted from the disk buffer at block 112 (if the data is disk buffer resident), and the MVC map is updated at block 114 to  
15 reflect the deletion of the data from the VTV and the space on the physical tape occupied by the virtual volume can be reused. After updating of the MVC map, or if the data had not been identified for automatic deletion at block 110, the virtual volume is marked as  
20 scratch at block 116 and therefore reusable. However, the VTV marked for scratch will still contain the data until the VTV is actually reused if the data was not deleted at block 112 or the MVC map was not updated at block 114.

25 While the present invention has been described as requiring the user to designate whether the data can

be automatically deleted to allow bypassing of the default policy of prohibiting such automatic deletion in the absence of a designation, it will be appreciated that the reverse arrangement could be implemented if  
5 desired, i.e., the default policy could allow immediate scratched data deletion if an appropriate designation was not made by the user.

Thus, the present invention advantageously provides a method for selectively controlling  
10 reutilization of data space in a virtual tape system which allows a user to designate whether a particular scratched data volume can be automatically deleted without any further user action. In this manner, the data deletion safety net provided by conventional tape  
15 systems is effectively incorporated into a virtual tape system while also minimizing the impact of such a safety net feature on the overall efficiency in space management provided by the virtual tape system.

While the best mode for carrying out the  
20 invention has been described in detail, those familiar with the art to which this invention relates will recognize various alternative designs and embodiments for practicing the invention as defined by the following claims.

**What Is Claimed Is:**

1. A method for selectively controlling reutilization of data space in a virtual tape system comprising:

5 a remote user selectively designating whether a particular data volume file can be automatically deleted by the virtual tape system without any further action by the user after a predetermined expiration date for the data volume file has elapsed;

10 detecting if a received data volume file has been designated by the user; and

prohibiting automatic deletion of the received data volume file from the virtual tape system based on whether the data volume file was designated by the user.

15 2. The method of claim 1 wherein the user selectively tags a particular data volume file before originally transferring to the virtual tape system to indicate that the data volume file is not to be automatically deleted.

20 3. The method of claim 1 wherein if a user has not designated a particular data volume file for protection from automatic deletion, determining that the expiration date has passed, and marking the space on a data storage media occupied by the data corresponding to

-11-

the data volume file to indicate the space can be automatically reused when desired.

4. The method of claim 1 wherein if automatic deletion has been designated, deleting a  
5 particular data volume space only after predetermined period of time has passed after the data volume file expiration date.

5. The method of claim 4 further comprising  
determining that the predetermined period of time has  
10 passed, and marking the space on a data storage media occupied by the data corresponding to the data volume file to indicate the space can be automatically reused when desired.

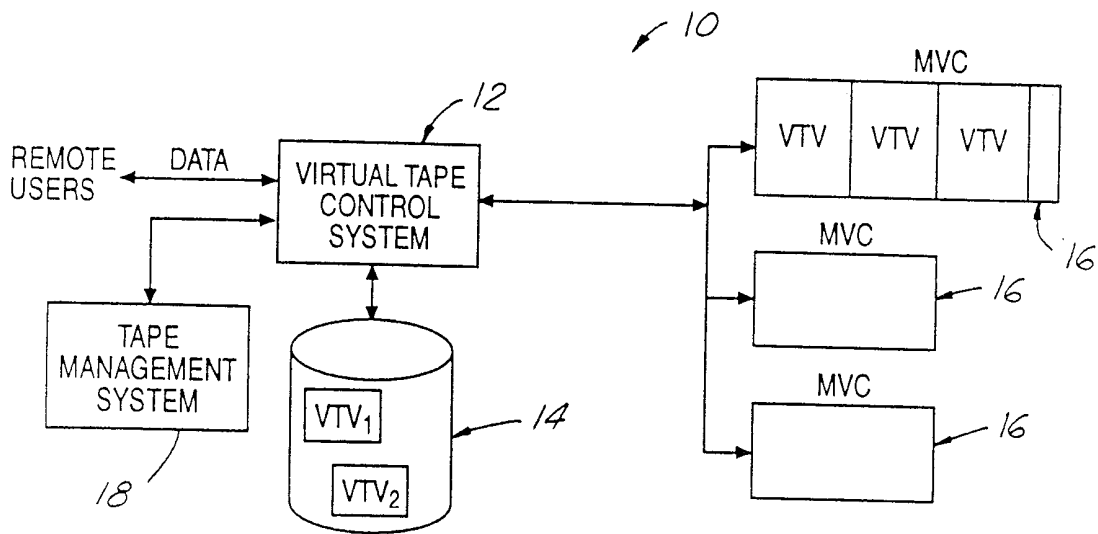


FIG. 1

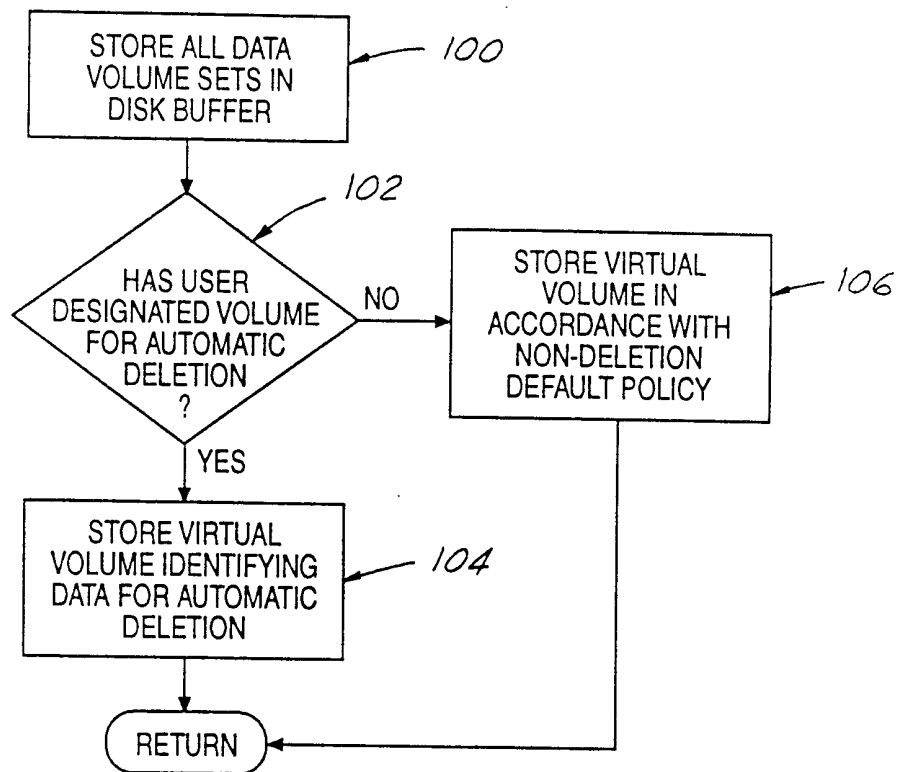


FIG. 2

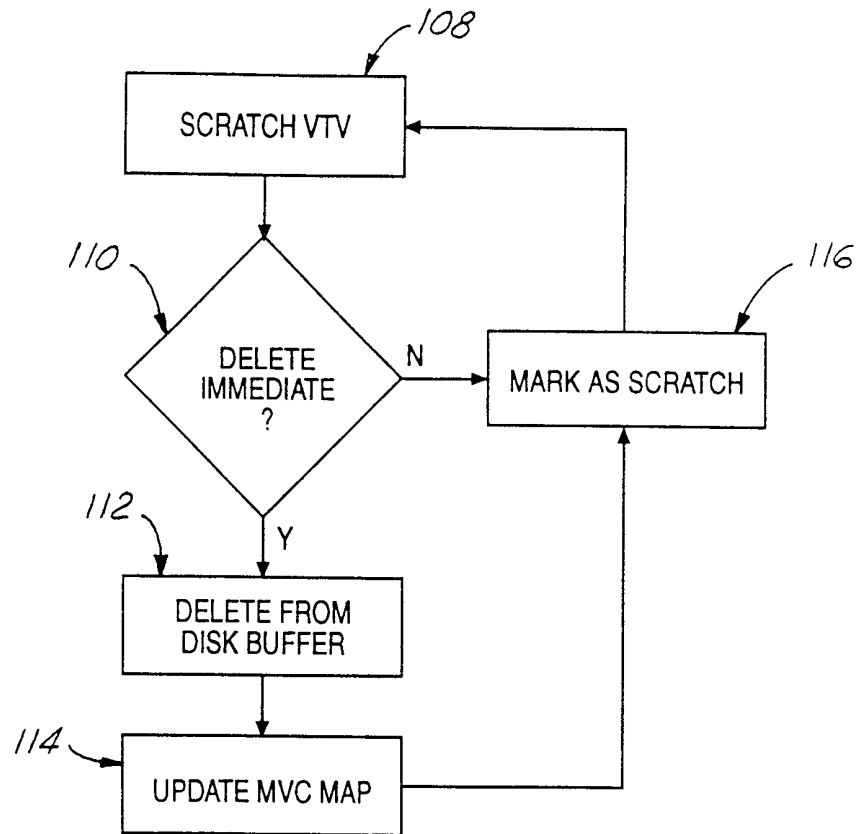


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No.  
PCT/US99/16592

**A. CLASSIFICATION OF SUBJECT MATTER**  
IPC(6) :G06F 12/14, 12/02  
US CL :711/111  
According to International Patent Classification (IPC) or to both national classification and IPC

**B. FIELDS SEARCHED**  
Minimum documentation searched (classification system followed by classification symbols)  
U.S. : 711/111, 112; 360/60; 380/3, 4; 707/ 205, 206

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)  
APS, Internet


**C. DOCUMENTS CONSIDERED TO BE RELEVANT**

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	US 5,265,159 A (KUNG) 23 November 1993, figure 1.	1-5
X	DFSMS/MVS V1R2 Access Method Services for VSAM, [Online] <a href="http://www.s390.ibm.com/bookmgr-cgi/bookmgr.cmd/BOOKS/DGT1V402/CCONTENTS?SHELF=EZ239701">http://www.s390.ibm.com/bookmgr-cgi/bookmgr.cmd/BOOKS/DGT1V402/CCONTENTS?SHELF=EZ239701</a> , October 1995, section 3.14.	1-5

Further documents are listed in the continuation of Box C.  See patent family annex.

* Special categories of cited documents:	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
*A* document defining the general state of the art which is not considered to be of particular relevance	*X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
*B* earlier document published on or after the international filing date	*Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
*L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	* & * document member of the same patent family
*O* document referring to an oral disclosure, use, exhibition or other means	
*P* document published prior to the international filing date but later than the priority date claimed	

Date of the actual completion of the international search 31 AUGUST 1999	Date of mailing of the international search report 20 OCT 1999
---	---

Name and mailing address of the ISA/US Commissioner of Patents and Trademarks Box PCT Washington, D.C. 20231 Facsimile No. (703) 305-3230	Authorized officer YAMIR ENCARNACION  Telephone No. (703) 308-5466
---	---