



- (51) International Patent Classification:
G06K 9/46 (2006.01)
- (21) International Application Number:
PCT/IL2015/050576
- (22) International Filing Date:
7 June 2015 (07.06.2015)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
233208 18 June 2014 (18.06.2014) IL
- (71) Applicant: TRAX TECHNOLOGY SOLUTIONS PTE. LTD. [SG/SG]; 28 Bukit Pasoh Road, Singapore 089842 (SG).
- (72) Inventors; and
- (71) Applicants (for US only): COHEN, Daniel Shimon [IL/IL]; 5/5 Elimelech Rimlat Street, 4373015 Ra'anana (IL). ADATO, Yair [IL/IL]; Moshav Tomer, 9068000 Tomer (IL). POMERANZ, Dolev [IL/IL]; 14 Szold street, 4440308 Kefar Saba (IL).
- (74) Agent: STERN, Guillaume; Reinhold Cohn and Partners, P.O. Box 13239, 69710 Tel-Aviv (IL).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AO, AT, AU, AZ, BA, BB, BG, BH, BN, BR, BW, BY,

BZ, CA, CH, CL, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IR, IS, JP, KE, KG, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PA, PE, PG, PH, PL, PT, QA, RO, RS, RU, RW, SA, SC, SD, SE, SG, SK, SL, SM, ST, SV, SY, TH, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LR, LS, MW, MZ, NA, RW, SD, SL, ST, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, RU, TJ, TM), European (AL, AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HR, HU, IE, IS, IT, LT, LU, LV, MC, MK, MT, NL, NO, PL, PT, RO, RS, SE, SI, SK, SM, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, KM, ML, MR, NE, SN, TD, TG).

Declarations under Rule 4.17:

— of inventorship (Rule 4.17(iv))

Published:

— with international search report (Art. 21(3))

— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments (Rule 48.2(h))

(54) Title: A METHOD AND A SYSTEM FOR OBJECT RECOGNITION


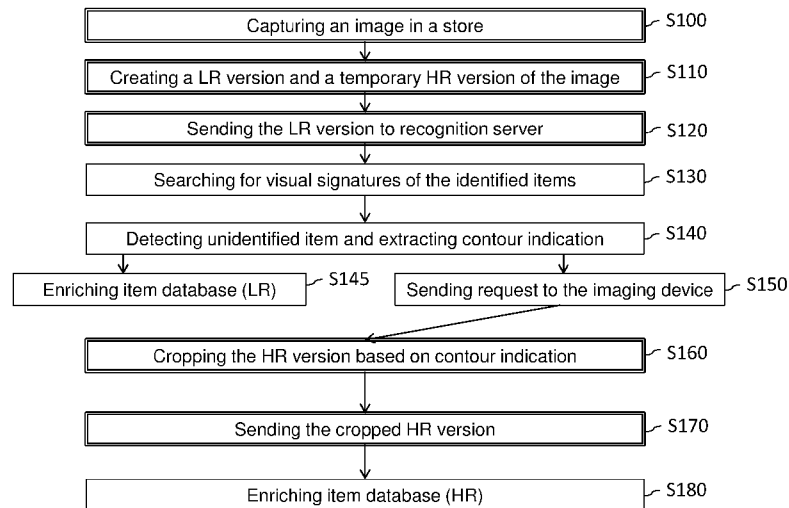


FIG. 3

(57) Abstract: The present disclosure provides a method of image processing comprising: obtaining by an imaging device a low resolution version and a high resolution version of a retail image, the high resolution version of the retail image being a temporary file to be erased automatically after a predetermined time period; transmitting to a server the low resolution version of the retail image; upon receipt of a request from the server, the request including data representative of a contour of an unidentified item in the low resolution version of the retail image, cropping a high resolution item image from the high resolution version of the retail image, the high resolution item image corresponding to the contour of the unidentified item; and transmitting the high resolution item image to the server thereby enabling updating an item database.



- 1 -

A METHOD AND A SYSTEM FOR OBJECT RECOGNITION

TECHNOLOGICAL FIELD

5 The present disclosure relates generally to the field of image processing. More particularly, the present disclosure relates to a method and system of image processing useful for improving object recognition in a retail environment.

BACKGROUND

10 Object recognition relates to the task of identifying objects in an image or video sequence with a computer system. Generally, the computer system stores a set of one or more template images corresponding to a set of known products and analyzes an input image to check whether the known products can be detected in the input image.

 Object recognition in a retail environment presents specific challenges. Particularly, objects in a retail environment have high variability because products' appearance attributes (e.g. size, color, amount of products in a package) are often modified by manufacturers in order to fit various requirements, such as special discounts for holidays, or for targeted customers. Furthermore, new products are regularly introduced in the market.

20 This increases difficulty for current object recognition systems.

GENERAL DESCRIPTION

 In the present application, the following terms and their derivatives may be understood in light of the below explanations:

25 **Imaging device**

 An imaging device may be an apparatus capable of acquiring pictures of a scene. In the following, the imaging device may comprise an image sensor, memory, a display communicatively coupled to the memory and a processing unit communicatively coupled to the memory, display and image sensor wherein the memory includes instructions for causing the processing unit to perform an image processing method. It

30

- 2 -

should be understood that the term imaging device encompasses different types of cameras such as standard digital cameras, electronic handheld devices including imaging sensors, etc. Furthermore, in the following, it is understood that the images processed may preferably be "retail images" e.g. images acquired in a retail store of a retail unit such as a shelving unit displaying retail items.

Template image

The term "template image" may refer to an image representing an item (product), the image being acquired in standard conditions i.e. the acquisition parameters (i.e. lighting, resolution, etc.) being set to predetermined values. The template images may be used for building a recognition process which enables distinguishing a given item among a set of predetermined items. In order to do so, the template images are preferably high resolution images, typically of about 4 megapixels. Furthermore, template images can be composed of a plurality of lower resolution template images. In certain embodiments, a template image exclusively represents the object i.e. no other objects are contained in the template image. In certain embodiments, a ratio between an actual size of the object and a pixel size of the imaged object is associated to the template image i.e. a template image is also characterized by a level of magnification. This may enable to link a size of a patch, extracted from a template image, with an absolute size.

Item signature

The term item signature may refer to a series of one or more patches distinguishing a template image of a given item from a set of template images associated with a predetermined set of items. The item signature (also referred to as "visual signature") of a given item may be built from the template image associated with the given item, taking into account the template images associated with the other items in the set of related items. A visual signature may comprise one or more patches hierarchically ordered with a spatial model. A visual signature may comprise a series of detectors, wherein each detector enables to detect a corresponding patch of the series of patches and the spatial model. The spatial model may define a relative positioning of at least some of the patches (and preferably each patch). For a given patch, the relative positioning may be expressed either with respect to a higher level patch or with respect to the primary patch. At least some of the patches (and preferably each patch) of the visual signature may also be associated with a property or discriminative condition. The

- 3 -

visual signature forms a part model of an item which enables distinguishing the item from a set of related items (e.g. items belonging to the same class). The visual signature of an object is built while taking into account the other items of the set of related items. The visual signature definition is notably explained in Israeli patent application
5 IL229806 assigned to the Applicant of the present application, the content of which is hereby incorporated by reference, at least with respect to the parts relating to the visual signature creation method.

The present disclosure provides a method of image processing comprising:
10 obtaining by an imaging device a low resolution version and a high resolution version of a retail image, the high resolution version of the retail image being a temporary file to be erased automatically after a predetermined time period; transmitting to a server the low resolution version of the retail image; upon receipt of a request from the server, the request including data representative of a contour of an unidentified item in the low
15 resolution version of the retail image, cropping a high resolution item image from the high resolution version of the retail image, the high resolution item image corresponding to the contour of the unidentified item; and transmitting the high resolution item image to the server thereby enabling updating an item database.

In some embodiments, the data representative of the contour comprise a position
20 and size of the unidentified item in the low resolution version of the retail image and/or in the high resolution version of the retail image.

In some embodiments, the high resolution version of the retail image is an image as captured by the imaging device or a compressed version of said image.

In some embodiments, the method further comprises erasing the high resolution
25 version of the retail image from the imaging device after the high resolution item image has been transmitted.

In some embodiments, when the request from the server is received by the imaging device after the predetermined time period, the method further comprising displaying to the user an invitation to acquire another image of the unidentified item.

30 In some embodiments, the invitation is based on the data representative of the contour of the unidentified item in the low resolution version of the retail image.

In some embodiments, the server comprises an item database associating identified items with visual signatures distinguishing said identified items, the method

- 4 -

further comprising searching of the visual signatures by the server in the low resolution version of the retail image.

In some embodiments, the unidentified item in the low resolution version of the retail image does not correspond to any of the identified items in the item database.

5 In some embodiments, the method further comprises searching of the visual signatures by the server in the high resolution item image so as to check that the unidentified item cannot be recognized.

In some embodiments, the method further comprises: cropping by the server of the low resolution version of the retail image to form a basic item image around a contour of the unidentified item; storing the basic item image in the item database; and
10 updating the visual signatures of the identified items using said basic item image.

In some embodiments, the basic item image is replaced by the high resolution item image in the item database after the high resolution item image is transmitted by the imaging device.

15 In some embodiments, the unidentified item is detected by searching by the server for a high level identifier within the low resolution version of the retail image and further comprising associating the unidentified item with said high level identifier in the item database if said high level identifier is recognized in the low resolution retail image.

20 In some embodiments, the high level identifier is selected among a set of high level identifiers configured to distinguish a set of expected trademarks.

In another aspect, the present disclosure provides a handheld imaging device comprising: memory; an image sensor; a display communicatively coupled to the memory; and a processing unit communicatively coupled to the memory, display and
25 image sensor, wherein the memory includes instructions for causing the processing unit to perform an image processing method comprising: obtaining a low resolution version and a high resolution version of a retail image, the high resolution version of the retail image being a temporary file to be erased automatically after a predetermined time period; transmitting to a server the low resolution version of the retail image; upon
30 receipt of a request from the server, the request including data representative of a contour of an unidentified item in the low resolution version of the retail image, cropping a high resolution item image from the high resolution version of the retail image, the high resolution item image corresponding to the contour of the unidentified

- 5 -

item; and transmitting the high resolution item image to the server thereby enabling updating an item database.

In another aspect, the present disclosure provides a computer program product implemented on a non-transitory computer usable medium having computer readable
5 program code embodied therein to cause the computer to perform an image processing method comprising: forming a low resolution version and a high resolution version of a retail image, the high resolution version of the retail image being a temporary file to be erased automatically after a predetermined time period; transmitting to a server the low resolution version of the retail image; upon receipt of a request from the server, the
10 request including data representative of a contour of an unidentified item in the low resolution version of the retail image, cropping a high resolution item image from the high resolution version of the retail image, the high resolution item image corresponding to the contour of the unidentified item; transmitting the high resolution item image to the server thereby enabling updating an item database.

15 In another aspect, the present disclosure provides an image processing system comprising an imaging device and a server configured for performing the method previously described.

In another aspect, the present disclosure provides a data processing apparatus comprising: a receiver module configured for receiving a low resolution version of a
20 retail image from an imaging device; an item database configured for storing a set of visual signatures associated with a set of predetermined identified items; a recognition module configured for: searching the visual signatures in the low resolution version of the retail image to recognize the identified items in the low resolution image; and detecting an unidentified item in the low resolution version of the retail image; a
25 transmitter module configured for sending a request to the imaging device, the request including data representative of a contour of the unidentified item in the low resolution version of the retail image; wherein the receiver module is further configured for receiving from the imaging device, in response to the request, a high resolution item image derived from a high resolution temporary version of the retail image stored in the
30 imaging device, said high resolution item image enabling updating the item database.

In some embodiments, the data processing apparatus further comprises a classifying module configured for updating the visual signatures using template images of the identified items and the high resolution item image.

- 6 -

In some embodiments, an unidentified item is detected by partially recognizing a stored visual signature.

In some embodiments, the recognition module is further configured for searching the visual signatures in the received high resolution item image so as to check
5 that the unidentified item cannot be recognized.

BRIEF DESCRIPTION OF THE DRAWINGS

In order to better understand the subject matter that is disclosed herein and to exemplify how it may be carried out in practice, embodiments will now be described,
10 by way of non-limiting example only, with reference to the accompanying drawings, in which:

Fig. 1 illustrates schematically an imaging device according to embodiments of the present disclosure.

Fig. 2 illustrates functional elements collaborating according to embodiments of
15 the present disclosure.

Fig. 3 illustrates steps of an image processing method according to embodiments of the present disclosure.

DETAILED DESCRIPTION OF EMBODIMENTS

Described herein are some examples of systems and methods useful for item
20 recognition.

In the following description, numerous specific details are set forth in order to provide a thorough understanding of the subject matter. However, it will be understood by those skilled in the art that some examples of the subject matter may be practiced without these specific details. In other instances, well-known methods, procedures and
25 components have not been described in detail so as not to obscure the description.

As used herein, the phrase "for example," "such as", "for instance" and variants thereof describe non-limiting examples of the subject matter.

Reference in the specification to "one example", "some examples", "another example", "other examples", "one instance", "some instances", "another instance", "other
30 instances", "one case", "some cases", "another case", "other cases" or variants thereof means that a particular described feature, structure or characteristic is included in at

- 7 -

least one example of the subject matter, but the appearance of the same term does not necessarily refer to the same example.

It should be appreciated that certain features, structures and/or characteristics disclosed herein, which are, for clarity, described in the context of separate examples, may also be provided in combination in a single example. Conversely, various features, structures and/or characteristics disclosed herein, which are, for brevity, described in the context of a single example, may also be provided separately or in any suitable sub-combination.

Unless specifically stated otherwise, as apparent from the following discussions, it is appreciated that throughout the specification discussions utilizing terms such as "generating", "determining", "providing", "receiving", "using", "transmitting", "communicating", "performing", "forming", "analyzing" or the like, may refer to the action(s) and/or process(es) of any combination of software, hardware and/or firmware. For example, these terms may refer in some cases to the action(s) and/or process(es) of a programmable machine, that manipulates and/or transforms data represented as physical, such as electronic quantities, within the programmable machine's registers and/or memories into other data similarly represented as physical quantities within the programmable machine's memories, registers and/or other such information storage, transmission and/or display element(s).

Fig. 1 illustrates a simplified functional block diagram of an imaging device **1** according to embodiments of the present disclosure. The device **1** may be a handheld electronic device and may include a display **10**, a processor **12**, an imaging sensor **14** and memory **16**. The processor **12** may be any suitable programmable control device and may control the operation of many functions, such as the generation and/or processing of an image, as well as other functions performed by the electronic device. The processor **12** may drive the display (display screen) **10** and may receive user inputs from a user interface. The display screen **10** may be a touch screen capable of receiving user inputs. The memory **16** may store software for implementing various functions of the electronic device including software for implementing the image processing method according to the present disclosure. The memory **16** may also store media such as images and video files. The memory **16** may include one or more storage mediums tangibly recording image data and program instructions, including for example a hard-drive, permanent memory and semi permanent memory or cache memory. Program

- 8 -

instructions may comprise a software implementation encoded in any desired language. The imaging sensor **14** may be a camera with a predetermined field of view. The camera may either be used in video mode, in which a stream of images is acquired upon command of the user, or in photographic mode, in which a single image is acquired upon command of the user.

Fig. 2 illustrates generally a high level functional diagram of elements capable of implementing embodiments of the method described in the present disclosure. More particularly, **Fig. 2** shows an imaging device **1** imaging a retail unit **5** and communicating with a recognition server **2**. The retail unit **5** may be configured to display retail items. The retail unit **5** may be for example a shelving unit and the retail items may be of any kind, for example bottles, cans, boxes, etc. Preferably, the retail items may be rigid objects. The imaging device **1** may be configured to create a low resolution version and a high resolution version of the retail image. The retail image may be representative of a flank of the shelving unit and may contain images of one or more of the retail items. The low resolution version and the high resolution version of the retail image may result from compressing an image acquired by the imaging device **1**. For example, the compression type may be a JPEG compression. The high resolution version of the retail image may be configured to be a temporary file which is erased automatically after a predetermined time period has elapsed from the creation of said high resolution version. Typically, the predetermined time period may be of less than an hour, for example between 1 and 10 minutes, or between 1 and 3 minutes, or in another example, 5 minutes. Further, the imaging device **1** may be configured to communicate with the recognition server **2**. The imaging device **1** may be configured to transmit the low resolution version of the retail image to the recognition server **2** using a communication data link, for example a wireless communication data link such as a 3G or a Wifi connection. The imaging device **1** may further be configured to transmit at least a part of the high resolution version of the retail image to the recognition server **2** (and/or to a classifying server **4** as described below) if, before the predetermined time period has elapsed, a request from the recognition server **2** is received by the imaging device **1**. The request may include data representative of a contour of an unidentified item in the low resolution version of the retail image. The imaging device **1** may be configured for cropping the high resolution version of the retail image according to said data in order to restrict the transmission to a region of interest in the high resolution

- 9 -

version of the retail image, said region of interest corresponding to the unidentified item area (item area) within said high resolution version of the retail image. The cropping of the high resolution version of the retail image may thereby provide a high resolution item image (or high resolution clip).

5 The recognition server **2** may be configured to have access to an item database **3** which may store visual signatures of a set of predetermined items. The item database **3** may also store a set of high level identifiers configured to distinguish expected trademarks (brands, logos, labels, designs, etc.). This further enables the recognition server **2** to recognize said expected trademarks on items which do not belong to the
10 predetermined set of items associated with the set of stored visual signatures. The visual signatures may form a classifier of the predetermined items and may be created based on a set of template images associated with the set of items. The server **2** may be capable of accessing the item database **3** for using the visual signatures so as to run a recognition process on the transmitted low resolution version of the retail image. The
15 item database **3** may store the visual signatures associated with the set of predetermined items and may also store the template images associated with said items. In some embodiments, a low resolution template image (or a basic item image, as explained in more details below) may be stored and the item database may include a low resolution visual signature defined based on said low resolution template image.

20 It is noted that the item database **3** and the recognition server **2** may in certain embodiments be implemented on a single hardware or by a single software module. A classifying server **4** may carry out a method of defining one or more visual signatures associated with one or more products belonging to the predetermined set of products (a classifier). The classifying server **4** and the recognition server **2** may also be
25 implemented on a single hardware or by a single software module. The recognition server **2** may carry out a method of object recognition on the images acquired by the imaging device **1** based on the visual signatures defined by the classifying server **4** and store on the item database **3**. The recognition server **2** may therefore be configured to retrieve the defined visual signatures from the item database **3**, as illustrated by the
30 arrow showing communication between the recognition server **2** and the item database **3**. The recognition server **2** may further be configured to receive at least one image derived from the imaging device **1**, as illustrated by the arrow showing communication between the recognition server **2** and the imaging device **1**.

- 10 -

The recognition server **2** may be configured to recognize any number of items related to the pre-defined visual signatures on the transmitted low resolution version of the retail image. Moreover, any number of instances of the same item could be detected in said version. The recognition server **2** may basically search if any of the one or more
5 visual signatures can be detected in the captured image. In some embodiments, the recognition process may be executed in parallel using several computational units. Further, any search for inferior level patches could be parallelized and each top level patch and corresponding inferior level patches could be searched in parallel.

The classifying server **4** may be configured to define one or more visual
10 signatures given in input of a set of template images associated with a predetermined set of items. As defined above, each visual signature may include a series of parts associated with their corresponding detectors and a spatial model. Preferably, after the visual signatures are defined, each detector of the visual signatures should be trained by applying techniques from the field of machine vision. The method of defining the visual
15 signatures may be performed offline i.e. preliminarily to the image(s) acquisition or to the image(s) transmission. As described hereinafter, the method of defining one or more visual signatures is an iterative process (or alternatively, a recursive process). It may lead for each one of the products to a series of patches hierarchically ordered. Each patch from this series of patches may be associated with a detector configured for
20 detecting the patch. The algorithm used in each detector may be adjusted according to the patch to be detected. Furthermore, each patch is associated with a relative position with respect to a higher patch in the series. The series of patches may also be associated with a spatial model defining a relative positioning of the patches. It is noted that generally, the relative position of an inferior level patch can be given with respect to
25 any higher level patch. Preferably, the relative position is given with respect to the directly higher level patch or with respect to the top level patch. The visual signature associated with a product may be specific to this product and enable to distinguish the product among the set of predetermined products that may share similar appearance (i.e. related products).

30 As explained in more detail below with reference to **Figs. 3-4**, the present disclosure notably proposes a way of enriching the item database **3** when an unidentified item is detected in an image. Generally, a low resolution version of a retail image is sufficient for identifying accurately the items contained in said images using

- 11 -

the recognition process based on the visual signatures. However, definition of the visual signatures is improved when performed on high resolution images. Therefore, the present disclosure proposes an automatic method which enables updating the visual signatures of the item database **3** while limiting the amount of data to be communicated
5 by and stored on the imaging device **1**. It is understood that since a visual signature enables to distinguish an item among a set of predetermined items, enriching the set of predetermined items with one or more additional items may modify the definition of the visual signature and therefore require the visual signature to be updated taking into account said additional item.

10 **Fig. 3** is a flow chart illustrating steps of a method according to embodiments of the present disclosure. The method described below may be implemented by an imaging device collaborating with a remote server as previously described. The server may include a recognition server, a classifying server and an item database. The recognition server may perform an online (real-time) recognition process and the classifying server
15 may perform an offline classifying process. In **Fig. 3**, steps which may be performed on the server side are represented by simple blocks while steps which may be performed at the imaging device side are represented by blocks surrounded by a double border.

In step **S100**, a retail image may be captured using the imaging device. For example, the retail image may be acquired in a store, in front of a shelving unit
20 displaying retail items such as soda bottles.

In step **S110**, a low resolution version and a high resolution version of the retail image may be created by the imaging device. The high resolution version of the retail image may be created as a temporary image which is erased automatically after a predetermined time period has elapsed from its creation. In some embodiments, the low
25 resolution version may weigh no more than 500kb. In some embodiments, the high resolution version may weigh no more than 4Mb. In some embodiments, the high resolution version may in fact be the retail image as acquired by the imaging device and an automatic deletion by the device may be programmed.

In a further step **S120**, the low resolution version of the retail image may be
30 transmitted to the recognition server.

In a further step **S130**, the recognition server may carry out a recognition process on the low resolution version of the retail image. The recognition server may search if any of the one or more visual signatures stored on the item database can be

- 12 -

detected in the captured image. There are several options for the recognition server to search for visual signatures in the images. In some embodiments, for each visual signature, the recognition server may search sequentially in the whole image for each patch of the visual signature. Thereafter, identification of a visual signature in the image
5 may be decided based on the relative position of the detected patches by comparing with the relative positions of the inferior level patches in said visual signature. In some embodiments, for each visual signature, the recognition server may be configured to search, in the whole image, only the primary patch. Using the detector associated with said primary patch, one may derive scale and orientation indications to each candidate
10 of product. Thereafter, for the subsequent patches, given these indications and the relative position indication associated with subsequent patches from the visual signature, the recognition server may be configured to search for inferior level patches in restricted regions of interest (ROI) of the low resolution version of the retail image.

In step **S140**, an unidentified item may be detected. The unidentified item may
15 include some recognizable features but may not exactly match any of the visual signatures stored on the item database. In some embodiments, the unidentified item may be detected by detecting a high level identifier and by the unidentified item not fully matching any of the stored visual signatures. In some embodiments, an unidentified item may be detected by a partial recognition of one or more patches of a visual
20 signature. For example, high level identifiers may be additionally searched in the low resolution version of the retail image. The high level identifiers may be stored in the item database and may enable to recognize expected trademarks. This may enable to associate the unidentified item with a known trademark (high level identifier). Furthermore, a contour of the unidentified item may be roughly determined using a size
25 and optionally an orientation of said one or more detected patches or high level identifier. In some embodiments, an unidentified item may be detected manually by a user reviewing the low resolution version of the retail image. A low resolution item image may also be gathered for training the recognition process.

As shown in step **S145**, the item database may be enriched at this stage. A basic
30 item image may be defined based on the contour of the unidentified item in the low resolution version of the retail image. The basic item image may include a cropping of the low resolution version of the retail image including the unidentified item. For example, the contour indication may comprise a position and size information about the

- 13 -

unidentified item in the low resolution version of the retail image. In some embodiments, the basic item image may be processed by the classifying server in order to define a visual signature corresponding to the unidentified item and/or the already existing visual signatures corresponding to the predetermined set of items may be updated using said low resolution (basic) item image. However, as explained above, a quality of the visual signature may be improved by retrieving a higher resolution image of the unidentified item.

Therefore, in step **S150**, a request may be transmitted to the imaging device by the server. The request may cause the imaging device to transmit back to the server at least part of the high resolution version of the retail image, if the request is received before the predetermined time period expires. The request may include data indicative of the contour of the unidentified item in the low resolution version of the retail image. In some embodiments, when the request is sent after the predetermined time period has elapsed, an invitation may be displayed on the imaging device for inviting the user to acquire another image of the unidentified item. The invitation may include the basic item image previously defined, based on the low resolution version of the retail image and on the contour indication received in the request.

In step **S160**, upon receipt of the request from the server, the high resolution version of the retail image may be cropped based on the transmitted contour indication so as to isolate the unidentified item area from the high resolution version of the retail image, thereby defining a high resolution item image. The item area may correspond to the contour of the unidentified item and include the unidentified item.

In step **S170**, the high resolution (HR) item image may be transmitted to the server (directly to the classifying server or through the recognition server). Following the HR item image being transmitted, the high resolution version of the retail image may be deleted.

In step **S180**, the item database may be enriched using the HR item image. For example, the HR item image may be processed by the classifying server in order to define a visual signature corresponding to the unidentified item and/or the already existing visual signatures corresponding to the predetermined set of items may be updated. Furthermore, high level identifiers may be searched in the HR item image so as to associate the HR item image with a known high level identifier (brand/trademark for example). The basic item image may be replaced by the HR item image in the item

- 14 -

database. In some embodiments, the recognition process may be run on the HR item image to try to recognize the stored visual signatures on the HR item image. Indeed, the low resolution version of the retail image may not provide a sufficient quality for distinguishing an item belonging to the predetermined set of items while the high resolution item image may provide such a sufficient quality. In this case, the enrichment
5 of the item database may be optional and the method may directly enable to improve the recognition rate by providing selectively a high resolution image to the recognition server if an item remains unidentified after the recognition process is run on the low resolution version of the retail image. While certain features of the invention have been
10 illustrated and described herein, many modifications, substitutions, changes, and equivalents will now occur to those of ordinary skill in the art. It is, therefore, to be understood that the appended claims are intended to cover all such modifications and changes as fall within the true spirit of the invention.

It will be appreciated that the embodiments described above are cited by way of
15 example, and various features thereof and combinations of these features can be varied and modified.

While various embodiments have been shown and described, it will be understood that there is no intent to limit the invention by such disclosure, but rather, it is intended to cover all modifications and alternate constructions falling within the
20 scope of the invention, as defined in the appended claims.

It will also be understood that the system according to the presently disclosed subject matter can be implemented, at least partly, as a suitably programmed computer. Likewise, the presently disclosed subject matter contemplates a computer program being readable by a computer for executing the disclosed method. The presently
25 disclosed subject matter further contemplates a machine-readable memory tangibly embodying a program of instructions executable by the machine for executing the disclosed method.

CLAIMS:

1. A method of image processing comprising:
 - (a) obtaining by an imaging device a low resolution version and a high resolution version of a retail image, the high resolution version of the retail image being a temporary file to be erased automatically after a predetermined time period;
 - (b) transmitting to a server the low resolution version of the retail image;
 - (c) upon receipt of a request from the server, the request including data representative of a contour of an unidentified item in the low resolution version of the retail image, cropping a high resolution item image from the high resolution version of the retail image, the high resolution item image corresponding to the contour of the unidentified item; and
 - (d) transmitting the high resolution item image to the server thereby enabling updating an item database.
2. The method according to claim 1, wherein the data representative of the contour comprise a position and size of the unidentified item in the low resolution version of the retail image and/or in the high resolution version of the retail image.
3. The method according to any of claims 1 and 2, wherein the high resolution version of the retail image is an image as captured by the imaging device or a compressed version of said image.
4. The method according to any of the preceding claims, comprising erasing the high resolution version of the retail image from the imaging device after the high resolution item image has been transmitted.
5. The method according to any of the preceding claims, wherein when the request from the server is received by the imaging device after the predetermined time period, the method further comprising displaying to the user an invitation to acquire another image of the unidentified item.

- 16 -

6. The method according to claim 5, wherein the invitation is based on the data representative of the contour of the unidentified item in the low resolution version of the retail image.
- 5 7. The method according to any of the preceding claims, wherein the server comprises an item database associating identified items with visual signatures distinguishing said identified items, the method further comprising searching of the visual signatures by the server in the low resolution version of the retail image.
- 10 8. The method according to claim 7, wherein the unidentified item in the low resolution version of the retail image does not correspond to any of the identified items in the item database.
9. The method according to claim 7 and 8, further comprising searching of the
15 visual signatures by the server in the high resolution item image so as to check that the unidentified item cannot be recognized.
10. The method according to any of the preceding claims, further comprising:
- cropping by the server of the low resolution version of the retail image to form a
20 basic item image around a contour of the unidentified item;
 - storing the basic item image in the item database; and
 - updating the visual signatures of the identified items using said basic item image.
- 25 11. The method according to claim 10, wherein the basic item image is replaced by the high resolution item image in the item database after the high resolution item image is transmitted by the imaging device.
- 30 12. The method according to any of the preceding claims, wherein the unidentified item is detected by searching by the server for a high level identifier within the low resolution version of the retail image and further comprising associating the unidentified item with said high level identifier in the item database if said high level identifier is recognized in the low resolution retail image.

13. The method according to claim 12, wherein the high level identifier is selected among a set of high level identifiers configured to distinguish a set of expected trademarks.
- 5
14. A handheld imaging device comprising:
- (a) memory;
 - (b) an image sensor;
 - (c) a display communicatively coupled to the memory; and
 - 10 (d) a processing unit communicatively coupled to the memory, display and image sensor, wherein the memory includes instructions for causing the processing unit to perform an image processing method comprising:
 - obtaining a low resolution version and a high resolution version of a retail image, the high resolution version of the retail image being a temporary file to be erased automatically after a predetermined time period;
 - transmitting to a server the low resolution version of the retail image;
 - upon receipt of a request from the server, the request including data representative of a contour of an unidentified item in the low resolution version of the retail image, cropping a high resolution item image from the high resolution version of the retail image, the high resolution item image corresponding to the contour of the unidentified item; and
 - 20 - transmitting the high resolution item image to the server thereby enabling updating an item database.
- 25 15. A computer program product implemented on a non-transitory computer usable medium having computer readable program code embodied therein to cause the computer to perform an image processing method comprising:
- (a) forming a low resolution version and a high resolution version of a retail image, the high resolution version of the retail image being a temporary file to be erased automatically after a predetermined time period;
 - 30 (b) transmitting to a server the low resolution version of the retail image;
 - (c) upon receipt of a request from the server, the request including data representative of a contour of an unidentified item in the low resolution

- 18 -

version of the retail image, cropping a high resolution item image from the high resolution version of the retail image, the high resolution item image corresponding to the contour of the unidentified item;

- (d) transmitting the high resolution item image to the server thereby enabling updating an item database.

5

16. An image processing system comprising an imaging device and a server configured for performing the method according to any of claims 1-13.

10 17. A data processing apparatus comprising:

(a) a receiver module configured for receiving a low resolution version of a retail image from an imaging device;

(b) an item database configured for storing a set of visual signatures associated with a set of predetermined identified items;

15 (c) a recognition module configured for:

i) searching the visual signatures in the low resolution version of the retail image to recognize the identified items in the low resolution image; and

ii) detecting an unidentified item in the low resolution version of the retail image;

20

(d) a transmitter module configured for sending a request to the imaging device, the request including data representative of a contour of the unidentified item in the low resolution version of the retail image;

wherein the receiver module is further configured for receiving from the imaging device, in response to the request, a high resolution item image derived from a high resolution temporary version of the retail image stored in the imaging device, said high resolution item image enabling updating the item database.

25

18. The data processing apparatus according to claim 17, further comprising a classifying module configured for updating the visual signatures using template images of the identified items and the high resolution item image.

30

- 19 -

19. The data processing apparatus according to any of claims 17 and 18, wherein an unidentified item is detected by partially recognizing a stored visual signature.

20. The data processing apparatus according to any of claims 17 to 19, wherein the
5 recognition module is further configured for searching the visual signatures in the received high resolution item image so as to check that the unidentified item cannot be recognized.

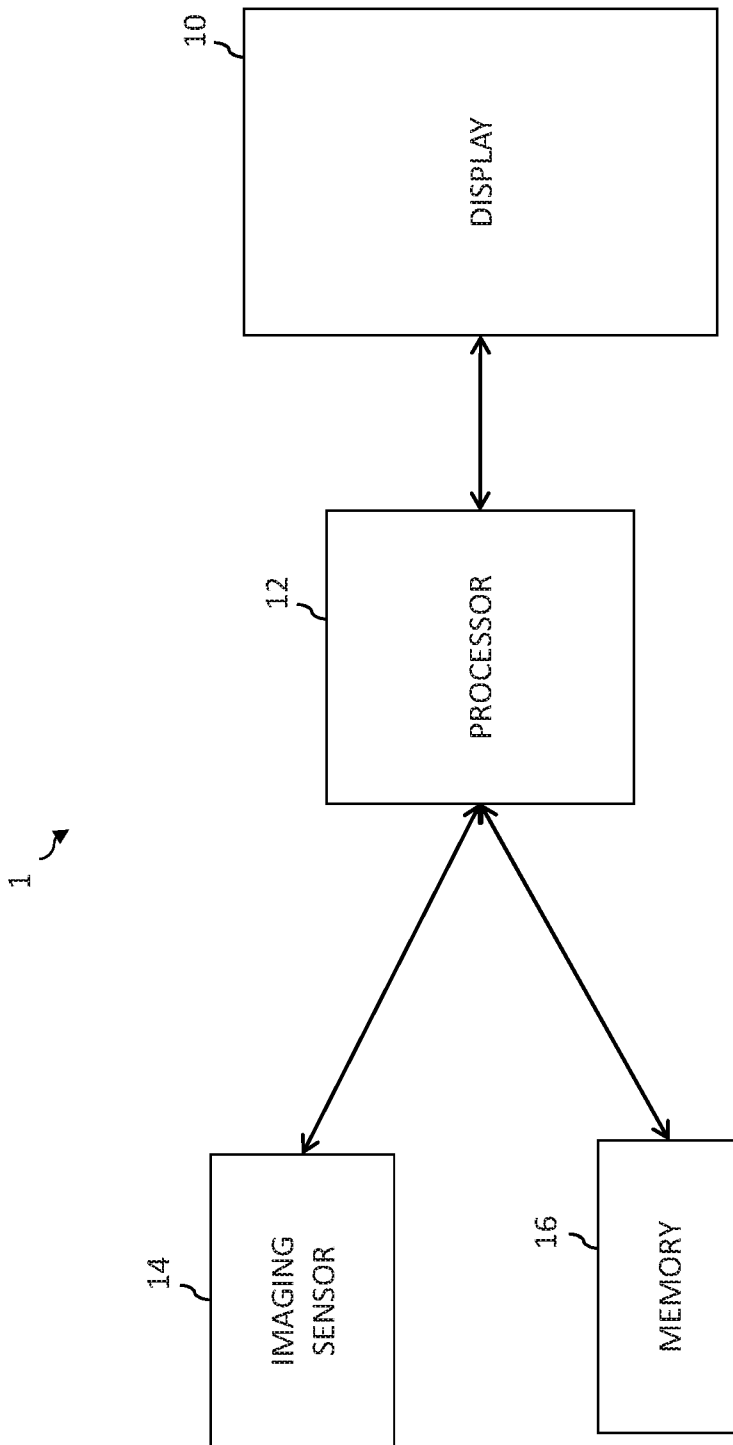


FIG. 1

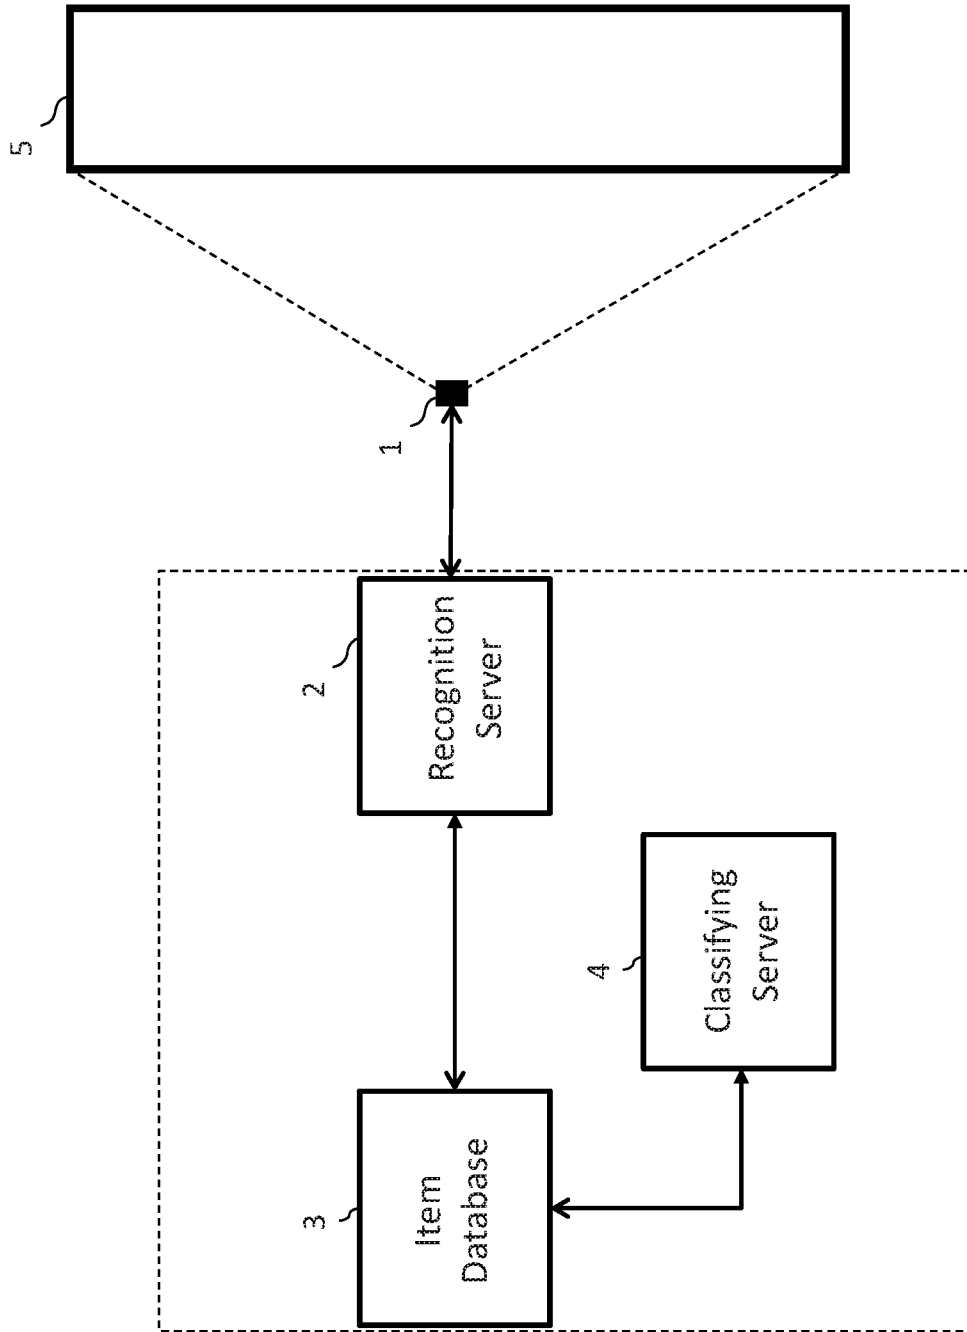


FIG. 2

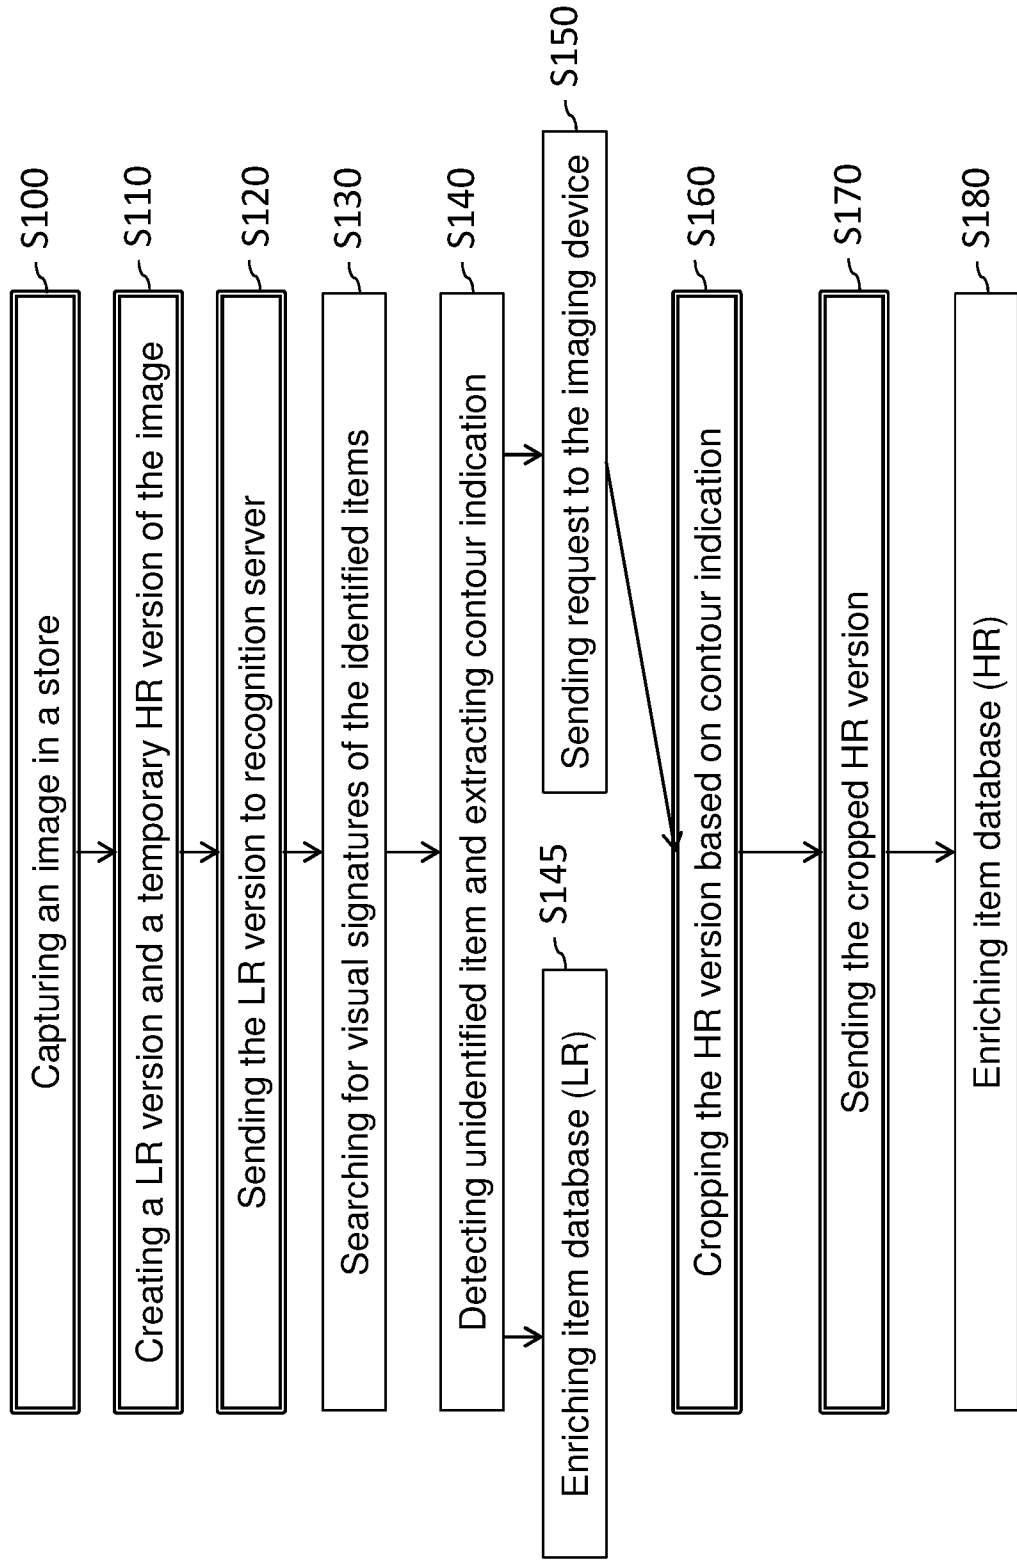


FIG. 3

INTERNATIONAL SEARCH REPORT

International application No.

PCT/IL2015/050576

<p>A. CLASSIFICATION OF SUBJECT MATTER IPC (2015.01) G06K 9/46</p> <p>According to International Patent Classification (IPC) or to both national classification and IPC</p>																	
<p>B. FIELDS SEARCHED</p> <p>Minimum documentation searched (classification system followed by classification symbols) IPC (2015.01) G06K 9/46</p> <p>Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched</p> <p>Electronic data base consulted during the international search (name of data base and, where practicable, search terms used) Databases consulted: USPTO, THOMSON INNOVATION</p>																	
<p>C. DOCUMENTS CONSIDERED TO BE RELEVANT</p> <table border="1"> <thead> <tr> <th>Category*</th> <th>Citation of document, with indication, where appropriate, of the relevant passages</th> <th>Relevant to claim No.</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>US 2014009382 A1 WISTRON CORP [TW] 09 Jan 2014 (2014/01/09) paragraphs [0045], [0049], [0055], [0057]</td> <td>1-20</td> </tr> <tr> <td>A</td> <td>US 2011173100 A1 BONCYK WAYNE C [US] 14 Jul 2011 (2011/07/14) the whole document</td> <td>1-20</td> </tr> <tr> <td>A</td> <td>US 2012051652 A1 LEE JI HYO [KR] 01 Mar 2012 (2012/03/01) the whole document</td> <td>1-20</td> </tr> <tr> <td>A</td> <td>US 2012243739 A1 FUKUCHI MASAKI [JP] 27 Sep 2012 (2012/09/27) the whole document</td> <td>1-20</td> </tr> </tbody> </table>			Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.	A	US 2014009382 A1 WISTRON CORP [TW] 09 Jan 2014 (2014/01/09) paragraphs [0045], [0049], [0055], [0057]	1-20	A	US 2011173100 A1 BONCYK WAYNE C [US] 14 Jul 2011 (2011/07/14) the whole document	1-20	A	US 2012051652 A1 LEE JI HYO [KR] 01 Mar 2012 (2012/03/01) the whole document	1-20	A	US 2012243739 A1 FUKUCHI MASAKI [JP] 27 Sep 2012 (2012/09/27) the whole document	1-20
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.															
A	US 2014009382 A1 WISTRON CORP [TW] 09 Jan 2014 (2014/01/09) paragraphs [0045], [0049], [0055], [0057]	1-20															
A	US 2011173100 A1 BONCYK WAYNE C [US] 14 Jul 2011 (2011/07/14) the whole document	1-20															
A	US 2012051652 A1 LEE JI HYO [KR] 01 Mar 2012 (2012/03/01) the whole document	1-20															
A	US 2012243739 A1 FUKUCHI MASAKI [JP] 27 Sep 2012 (2012/09/27) the whole document	1-20															
<p><input type="checkbox"/> Further documents are listed in the continuation of Box C. <input checked="" type="checkbox"/> See patent family annex.</p>																	
<p>* Special categories of cited documents:</p> <table border="0"> <tr> <td>“A” document defining the general state of the art which is not considered to be of particular relevance</td> <td>“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</td> </tr> <tr> <td>“E” earlier application or patent but published on or after the international filing date</td> <td>“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone</td> </tr> <tr> <td>“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</td> <td>“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art</td> </tr> <tr> <td>“O” document referring to an oral disclosure, use, exhibition or other means</td> <td>“&” document member of the same patent family</td> </tr> <tr> <td>“P” document published prior to the international filing date but later than the priority date claimed</td> <td></td> </tr> </table>			“A” document defining the general state of the art which is not considered to be of particular relevance	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention	“E” earlier application or patent but published on or after the international filing date	“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone	“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art	“O” document referring to an oral disclosure, use, exhibition or other means	“&” document member of the same patent family	“P” document published prior to the international filing date but later than the priority date claimed						
“A” document defining the general state of the art which is not considered to be of particular relevance	“T” later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention																
“E” earlier application or patent but published on or after the international filing date	“X” document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone																
“L” document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)	“Y” document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art																
“O” document referring to an oral disclosure, use, exhibition or other means	“&” document member of the same patent family																
“P” document published prior to the international filing date but later than the priority date claimed																	
<p>Date of the actual completion of the international search 12 Oct 2015</p>		<p>Date of mailing of the international search report 14 Oct 2015</p>															
<p>Name and mailing address of the ISA: Israel Patent Office Technology Park, Bldg.5, Malcha, Jerusalem, 9695101, Israel Facsimile No. 972-2-5651616</p>		<p>Authorized officer MOSKOVICH Elad Telephone No. 972-2-5651607</p>															

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No. PCT/IL2015/050576
--

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
US 2014009382 A1	09 Jan 2014	US 2014009382 A1	09 Jan 2014
		US 8948493 B2	03 Feb 2015
		CN 103530597 A	22 Jan 2014
		TW 201403490 A	16 Jan 2014
		TW 1464692 B	11 Dec 2014
<hr/>			
US 2011173100 A1	14 Jul 2011	US 2011173100 A1	14 Jul 2011
		US 8218874 B2	10 Jul 2012
		BR PI0614864 A2	19 Apr 2011
		BR PI0615283 A2	17 May 2011
		CA 2619497 A1	22 Feb 2007
		CA 2621191 A1	08 Mar 2007
		CA 2621191 C	18 Dec 2012
		CN 101273368 A	24 Sep 2008
		CN 101288077 A	15 Oct 2008
		EP 1442417 A1	04 Aug 2004
		EP 1442417 A4	13 Jun 2007
		EP 1814060 A2	01 Aug 2007
		EP 1814060 A3	10 Dec 2008
		EP 1915709 A2	30 Apr 2008
		EP 1915709 A4	10 Sep 2008
		EP 1929430 A2	11 Jun 2008
		EP 1929430 A4	29 Jun 2011
		EP 2764899 A2	13 Aug 2014
		EP 2764899 A3	10 Dec 2014
		JP 2009509363 A	05 Mar 2009
		JP 4890552 B2	07 Mar 2012
		JP 2012043447 A	01 Mar 2012
		JP 5427859 B2	26 Feb 2014
		JP 2005509219 A	07 Apr 2005
		JP 2007200275 A	09 Aug 2007

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IL2015/050576

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
		JP 2008090838 A	17 Apr 2008
		JP 2009505288 A	05 Feb 2009
		JP 2012133790 A	12 Jul 2012
		JP 2012194984 A	11 Oct 2012
		JP 2014241151 A	25 Dec 2014
		JP 2015007992 A	15 Jan 2015
		KR 20080042148 A	14 May 2008
		KR 101019569 B1	08 Mar 2011
		KR 20080033538 A	16 Apr 2008
		US 2002090132 A1	11 Jul 2002
		US 7016532 B2	21 Mar 2006
		US 2006110034 A1	25 May 2006
		US 7403652 B2	22 Jul 2008
		US 2004208372 A1	21 Oct 2004
		US 7477780 B2	13 Jan 2009
		US 2008094417 A1	24 Apr 2008
		US 7564469 B2	21 Jul 2009
		US 2006181605 A1	17 Aug 2006
		US 7565008 B2	21 Jul 2009
		US 2006002607 A1	05 Jan 2006
		US 7680324 B2	16 Mar 2010
		US 2010011058 A1	14 Jan 2010
		US 7881529 B2	01 Feb 2011
		US 2009141986 A1	04 Jun 2009
		US 7899243 B2	01 Mar 2011
		US 2010034468 A1	11 Feb 2010
		US 7899252 B2	01 Mar 2011
		US 2007104348 A1	10 May 2007
		US 8130242 B2	06 Mar 2012
		US 2011150292 A1	23 Jun 2011
		US 8218873 B2	10 Jul 2012

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IL2015/050576

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
	US 2011268317	A1	03 Nov 2011
	US 8224077	B2	17 Jul 2012
	US 2011211760	A1	01 Sep 2011
	US 8224078	B2	17 Jul 2012
	US 2011258057	A1	20 Oct 2011
	US 8224079	B2	17 Jul 2012
	US 2012002872	A1	05 Jan 2012
	US 8326031	B2	04 Dec 2012
	US 2011295742	A1	01 Dec 2011
	US 8326038	B2	04 Dec 2012
	US 2011292204	A1	01 Dec 2011
	US 8331679	B2	11 Dec 2012
	US 2011255744	A1	20 Oct 2011
	US 8335351	B2	18 Dec 2012
	US 2012207352	A1	16 Aug 2012
	US 8437544	B2	07 May 2013
	US 2012250942	A1	04 Oct 2012
	US 8457395	B2	04 Jun 2013
	US 2011228126	A1	22 Sep 2011
	US 8463030	B2	11 Jun 2013
	US 2012296754	A1	22 Nov 2012
	US 8463031	B2	11 Jun 2013
	US 2011317873	A1	29 Dec 2011
	US 8467600	B2	18 Jun 2013
	US 2012294488	A1	22 Nov 2012
	US 8467602	B2	18 Jun 2013
	US 2012163722	A1	28 Jun 2012
	US 8478036	B2	02 Jul 2013
	US 2012269396	A1	25 Oct 2012
	US 8478037	B2	02 Jul 2013
	US 2012195468	A1	02 Aug 2012

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IL2015/050576

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
		US 8478047 B2	02 Jul 2013
		US 2011295714 A1	01 Dec 2011
		US 8483484 B2	09 Jul 2013
		US 2012163667 A1	28 Jun 2012
		US 8488880 B2	16 Jul 2013
		US 2012219187 A1	30 Aug 2012
		US 8494264 B2	23 Jul 2013
		US 2012230543 A1	13 Sep 2012
		US 8494271 B2	23 Jul 2013
		US 2012195467 A1	02 Aug 2012
		US 8498484 B2	30 Jul 2013
		US 2011295829 A1	01 Dec 2011
		US 8503787 B2	06 Aug 2013
		US 2013094708 A1	18 Apr 2013
		US 8520897 B2	27 Aug 2013
		US 2012263351 A1	18 Oct 2012
		US 8520942 B2	27 Aug 2013
		US 2013097043 A1	18 Apr 2013
		US 8548245 B2	01 Oct 2013
		US 2013030961 A1	31 Jan 2013
		US 8548278 B2	01 Oct 2013
		US 2013034267 A1	07 Feb 2013
		US 8582817 B2	12 Nov 2013
		US 2013083207 A1	04 Apr 2013
		US 8588527 B2	19 Nov 2013
		US 2010017722 A1	21 Jan 2010
		US 8633946 B2	21 Jan 2014
		US 2013121532 A1	16 May 2013
		US 8712193 B2	29 Apr 2014
		US 2013170702 A1	04 Jul 2013
		US 8718410 B2	06 May 2014

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IL2015/050576

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
	US 2013279754	A1	24 Oct 2013
	US 8774463	B2	08 Jul 2014
	US 2013230210	A1	05 Sep 2013
	US 8792750	B2	29 Jul 2014
	US 2013336533	A1	19 Dec 2013
	US 8798322	B2	05 Aug 2014
	US 2013232076	A1	05 Sep 2013
	US 8798368	B2	05 Aug 2014
	US 2011170747	A1	14 Jul 2011
	US 8817045	B2	26 Aug 2014
	US 2013336530	A1	19 Dec 2013
	US 8824738	B2	02 Sep 2014
	US 2013268407	A1	10 Oct 2013
	US 8837868	B2	16 Sep 2014
	US 2013311503	A1	21 Nov 2013
	US 8842941	B2	23 Sep 2014
	US 2013246256	A1	19 Sep 2013
	US 8849069	B2	30 Sep 2014
	US 2013274013	A1	17 Oct 2013
	US 8855423	B2	07 Oct 2014
	US 2013238412	A1	12 Sep 2013
	US 8861859	B2	14 Oct 2014
	US 2013229536	A1	05 Sep 2013
	US 8867839	B2	21 Oct 2014
	US 2013266183	A1	10 Oct 2013
	US 8873891	B2	28 Oct 2014
	US 2013332317	A1	12 Dec 2013
	US 8885982	B2	11 Nov 2014
	US 2014032330	A1	30 Jan 2014
	US 8885983	B2	11 Nov 2014
	US 2013316800	A1	28 Nov 2013

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IL2015/050576

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
		US 8923563 B2	30 Dec 2014
		US 2013265435 A1	10 Oct 2013
		US 8938096 B2	20 Jan 2015
		US 2014003668 A1	02 Jan 2014
		US 8948459 B2	03 Feb 2015
		US 2014023234 A1	23 Jan 2014
		US 8948460 B2	03 Feb 2015
		US 2014147006 A1	29 May 2014
		US 8948544 B2	03 Feb 2015
		US 2014012705 A1	09 Jan 2014
		US 9014512 B2	21 Apr 2015
		US 2014043500 A1	13 Feb 2014
		US 9014513 B2	21 Apr 2015
		US 2014147053 A1	29 May 2014
		US 9014514 B2	21 Apr 2015
		US 2014152855 A1	05 Jun 2014
		US 9014515 B2	21 Apr 2015
		US 2014177918 A1	26 Jun 2014
		US 9014516 B2	21 Apr 2015
		US 2014211996 A1	31 Jul 2014
		US 9020305 B2	28 Apr 2015
		US 2013276004 A1	17 Oct 2013
		US 9025813 B2	05 May 2015
		US 2014177921 A1	26 Jun 2014
		US 9025814 B2	05 May 2015
		US 2014177920 A1	26 Jun 2014
		US 9031278 B2	12 May 2015
		US 2014133712 A1	15 May 2014
		US 9031290 B2	12 May 2015
		US 2014177922 A1	26 Jun 2014
		US 9036862 B2	19 May 2015

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IL2015/050576

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
		US 2014101690 A1	10 Apr 2014
		US 9036947 B2	19 May 2015
		US 2014059580 A1	27 Feb 2014
		US 9036948 B2	19 May 2015
		US 2014064561 A1	06 Mar 2014
		US 9036949 B2	19 May 2015
		US 2014328513 A1	06 Nov 2014
		US 9046930 B2	02 Jun 2015
		US 2014363086 A1	11 Dec 2014
		US 9076077 B2	07 Jul 2015
		US 2014330677 A1	06 Nov 2014
		US 9087240 B2	21 Jul 2015
		US 2013272574 A1	17 Oct 2013
		US 9087270 B2	21 Jul 2015
		US 2014177916 A1	26 Jun 2014
		US 9104916 B2	11 Aug 2015
		US 2015003747 A1	01 Jan 2015
		US 9110925 B2	18 Aug 2015
		US 2014340532 A1	20 Nov 2014
		US 9116920 B2	25 Aug 2015
		US 2014149154 A1	29 May 2014
		US 9135355 B2	15 Sep 2015
		US 2015063712 A1	05 Mar 2015
		US 9141714 B2	22 Sep 2015
		US 2015063644 A1	05 Mar 2015
		US 9148562 B2	29 Sep 2015
		US 2014172575 A1	19 Jun 2014
		US 9152864 B2	06 Oct 2015
		US 2014331184 A1	06 Nov 2014
		US 9154694 B2	06 Oct 2015
		US 2015063645 A1	05 Mar 2015

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IL2015/050576

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
		US 9154695 B2	06 Oct 2015
		US 2007088285 A1	19 Apr 2007
		US 2011300507 A1	08 Dec 2011
		US 2012154438 A1	21 Jun 2012
		US 2013265400 A1	10 Oct 2013
		US 2014055492 A1	27 Feb 2014
		US 2014055493 A1	27 Feb 2014
		US 2014059437 A1	27 Feb 2014
		US 2014081747 A1	20 Mar 2014
		US 2014098993 A1	10 Apr 2014
		US 2014132632 A1	15 May 2014
		US 2014173493 A1	19 Jun 2014
		US 2014223022 A1	07 Aug 2014
		US 2014229306 A1	14 Aug 2014
		US 2014355894 A1	04 Dec 2014
		US 2014361075 A1	11 Dec 2014
		US 2014363092 A1	11 Dec 2014
		US 2014368431 A1	18 Dec 2014
		US 2014368674 A1	18 Dec 2014
		US 2014368691 A1	18 Dec 2014
		US 2015066936 A1	05 Mar 2015
		US 2015199384 A1	16 Jul 2015
		US 2015199851 A1	16 Jul 2015
		US 2015205868 A1	23 Jul 2015
		US 2015254279 A1	10 Sep 2015
		WO 03041000 A1	15 May 2003
		WO 2007021996 A2	22 Feb 2007
		WO 2007021996 A3	25 Oct 2007
		WO 2007021996 B1	21 Dec 2007
		WO 2007027738 A2	08 Mar 2007
		WO 2007027738 A3	20 Sep 2007

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/IL2015/050576

Patent document cited search report	Publication date	Patent family member(s)	Publication Date
		WO 2007033077 A2	22 Mar 2007
		WO 2007033077 A3	07 May 2009
		WO 2007089533 A2	09 Aug 2007
		WO 2007089533 A3	10 Jan 2008
<hr/>			
US 2012051652 A1	01 Mar 2012	US 2012051652 A1	01 Mar 2012
		US 8731326 B2	20 May 2014
		EP 2423850 A2	29 Feb 2012
		KR 20120020711 A	08 Mar 2012
<hr/>			
US 2012243739 A1	27 Sep 2012	US 2012243739 A1	27 Sep 2012
		US 8977055 B2	10 Mar 2015
		CN 102750554 A	24 Oct 2012
		JP 2012203668 A	22 Oct 2012
<hr/>			