




(86) Date de dépôt PCT/PCT Filing Date: 2000/03/24
(87) Date publication PCT/PCT Publication Date: 2001/03/22
(45) Date de délivrance/Issue Date: 2006/05/23
(85) Entrée phase nationale/National Entry: 2002/02/18
(86) N° demande PCT/PCT Application No.: US 2000/007987
(87) N° publication PCT/PCT Publication No.: 2001/020431
(30) Priorité/Priority: 1999/08/16 (US60/149,621)

(51) Cl.Int./Int.Cl. *H04L 9/32* (2006.01),
H04L 9/30 (2006.01), *G07C 13/00* (2006.01),
G06F 21/00 (2006.01)
(72) Inventeur/Inventor:
NEFF, C. ANDREW, US
(73) Propriétaire/Owner:
DATEGRITY CORPORATION, US
(74) Agent: OYEN WIGGS GREEN & MUTALA LLP

(54) Titre : PROCEDE, ARTICLE ET APPAREIL POUR ENREGISTRER DES PERSONNES INSCRITES, PAR
EXEMPLE, POUR DES ELECTIONS
(54) Title: METHOD, ARTICLE AND APPARATUS FOR REGISTERING REGISTRANTS, SUCH AS VOTER
REGISTRANTS

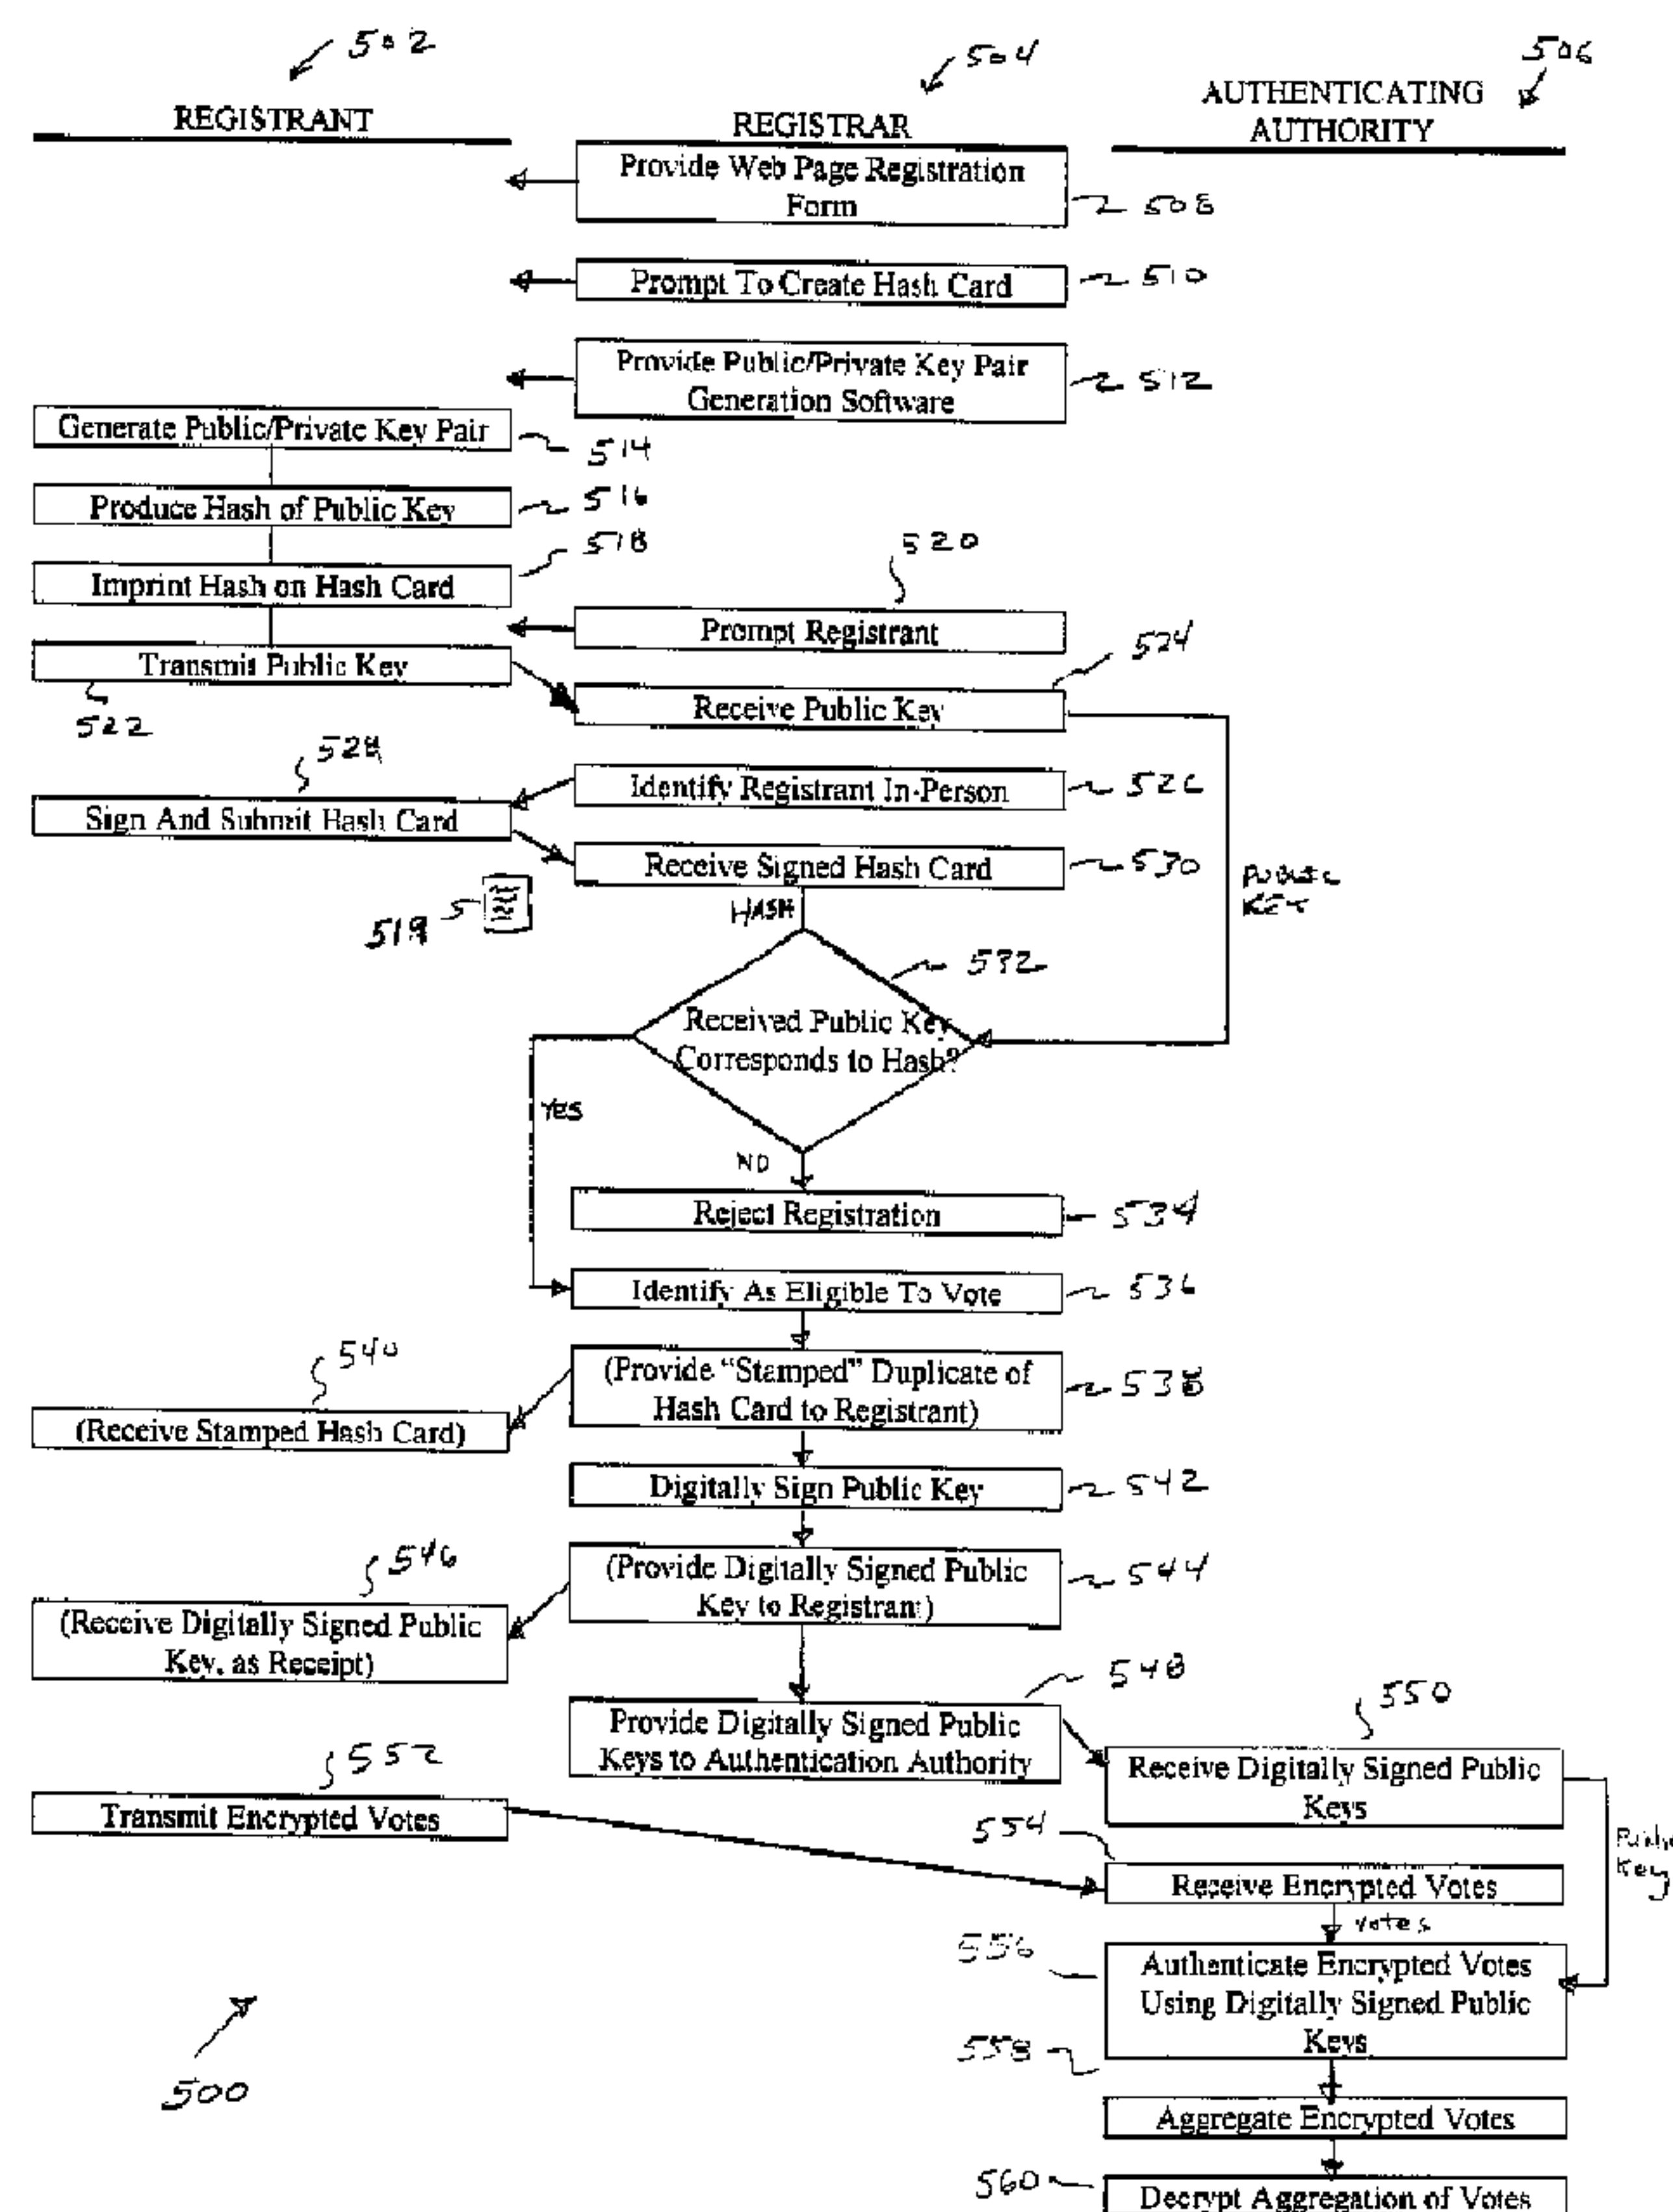

(57) Abrégé/Abstract:

A registrant submits a public key of a public/private key pair and identifying information to a registrar. The registrar determines whether the registrant is eligible based on the provided identifying information. The registrar digitally signs the public keys of eligible



(57) Abrégé(suite)/Abstract(continued):

registrants and forwards the signed public keys to an authenticating authority. Alternatively, the registrant produces a hash card including a hash of the registrant's public key and signs and submits the hash card to the registrar via a courier. The registrant then submits its public key, the registrar electronically. If the hash corresponds to the submitted public key, the registrar digitally signs the public key and forwards the digitally signed public key to an authenticating authority. Alternatively, the registrar identifies a registrant in-person, and provides the registrant with a private key in a secure manner, then forwards a digitally signed public key to the authenticating authority. Alternatively, the registrant produces a hash card including a hash of its public key and signs and submits the hash card to the registrar in-person. The registrant then electronically submits the public key to a registrar. The registrar digitally signs the public key if the hash corresponds to the electronically submitted public key. The registrar forwards the digitally signed public key to an authenticating authority for use in authenticating the source of the encrypted information submitted by the registrant.

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
22 March 2001 (22.03.2001)

PCT

(10) International Publication Number
WO 01/20431 A2

(51) International Patent Classification⁷: **G06F 1/00**

[US/US]; 3048 164th Place NE, Bellevue, WA 98008-2023 (US).

(21) International Application Number: PCT/US00/07987

(22) International Filing Date: 24 March 2000 (24.03.2000)

(74) Agents: **ABRAMONTE, Frank et al.**; Perkins Coie LLP, Suite 4800, 1201 Third Avenue, Seattle, WA 98101-3099 (US).

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/149,621 16 August 1999 (16.08.1999) US

(81) Designated States (*national*): AE, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZA, ZW.

(71) Applicant (*for all designated States except US*): **VOTE-HERE, INC.** [US/US]; Suite 250, 3101 Northup Way, Bellevue, WA 98004 (US).


(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **NEFF, C., Andrew**

(84) Designated States (*regional*): ARIPO patent (GH, GM, KE, LS, MW, SD, SL, SZ, TZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU,

[Continued on next page]

(54) Title: METHOD, ARTICLE AND APPARATUS FOR REGISTERING REGISTRANTS, SUCH AS VOTER REGISTRANTS

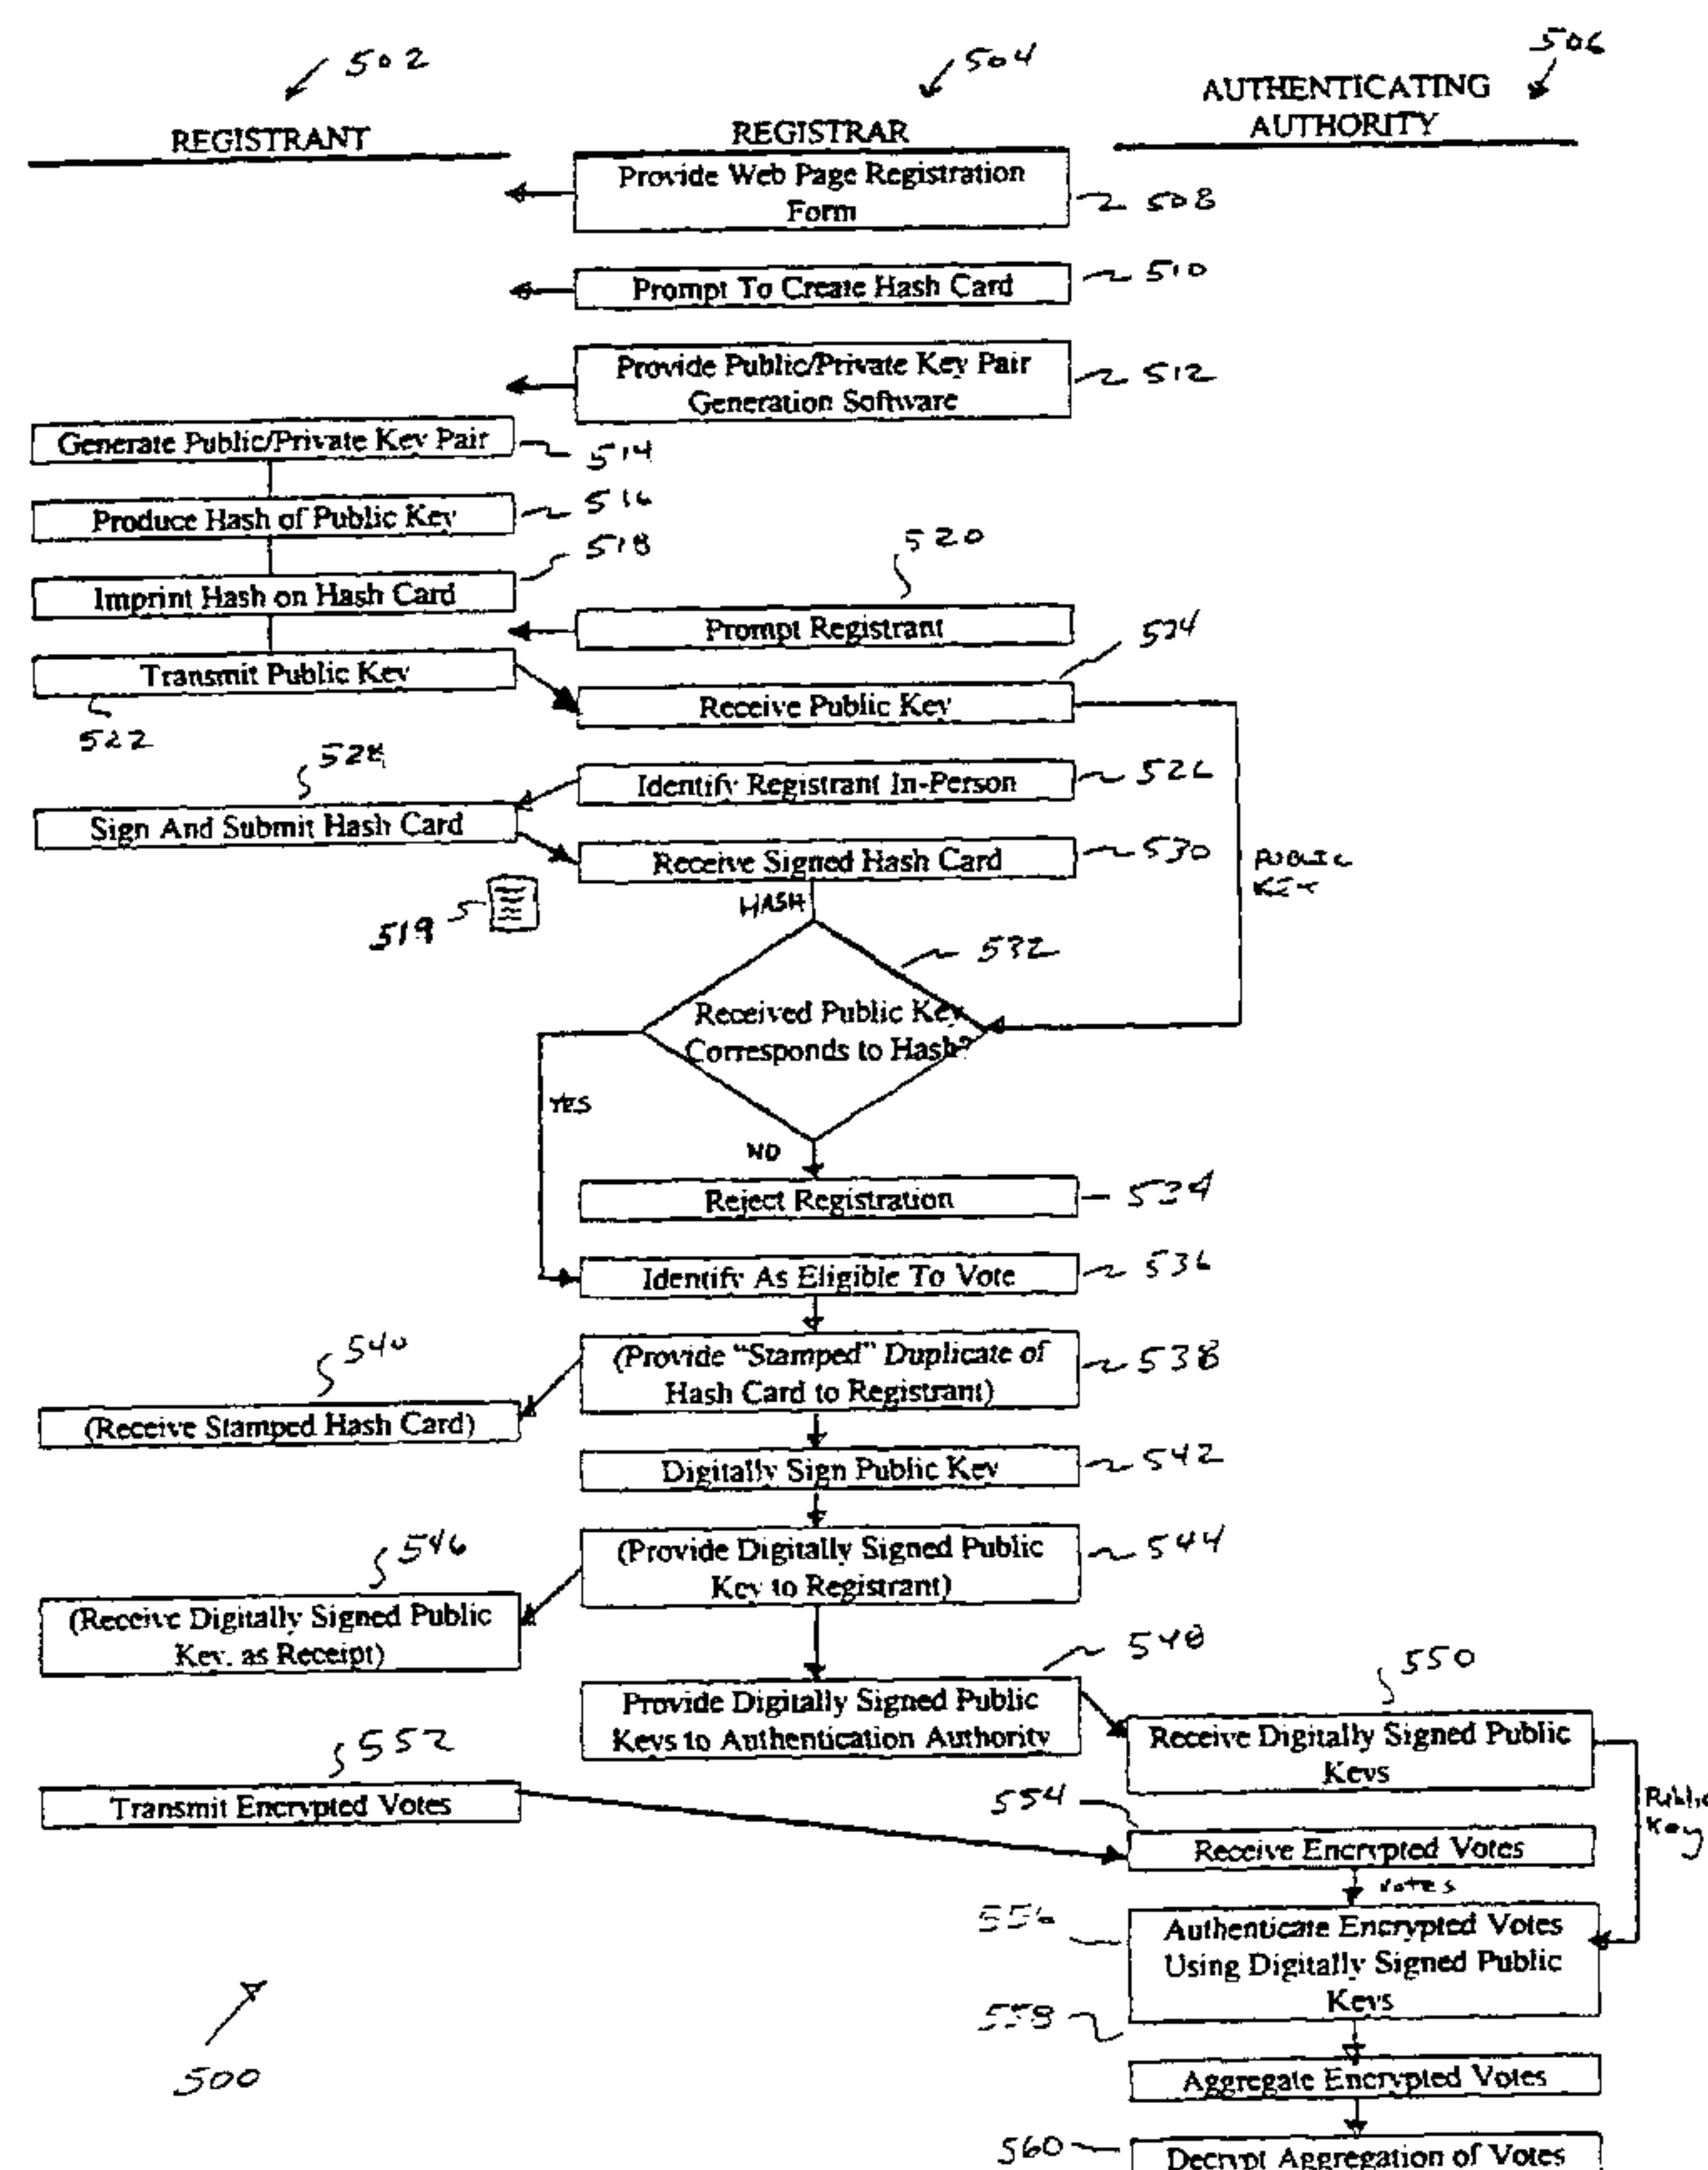

[Continued on next page]

WO 01/20431 A2

WO 01/20431 A2

MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *Without international search report and to be republished upon receipt of that report.*

(57) Abstract: A registrant submits a public key of a public/private key pair and identifying information to a registrar. The registrar determines whether the registrant is eligible based on the provided identifying information. The registrar digitally signs the public keys of eligible registrants and forwards the signed public keys to an authenticating authority. Alternatively, the registrant produces a hash card including a hash of the registrant's public key and signs and submits the hash card to the registrar via a courier. The registrant then submits its public key, the registrar electronically. If the hash corresponds to the submitted public key, the registrar digitally signs the public key and forwards the digitally signed public key to an authenticating authority. Alternatively, the registrar identifies a registrant in-person, and provides the registrant with a private key in a secure manner, then forwards a digitally signed public key to the authenticating authority. Alternatively, the registrant produces a hash card including a hash of its public key and signs and submits the hash card to the registrar in-person. The registrant then electronically submits the public key to a registrar. The registrar digitally signs the public key if the hash corresponds to the electronically submitted public key. The registrar forwards the digitally signed public key to an authenticating authority for use in authenticating the source of the encrypted information submitted by the registrant.

METHOD, ARTICLE AND APPARATUS FOR REGISTERING REGISTRANTS, SUCH AS VOTER REGISTRANTS

TECHNICAL FIELD

This invention is generally related to registering registrants
5 such as voter or polling registrants, and more particularly to the use of
public/private key encryption during the registration process.

BACKGROUND OF THE INVENTION

The Internet is increasingly being used to conduct a variety of
activities, including research, communication or document exchange, and
10 “electronic commerce,” in part, because it facilitates electronic
communications with large databases, between individuals, and between
vendors and purchasers. The Internet comprises a vast number of
computers and computer networks interconnected through communication
channels. One individual can use a personal computer to connect via the
15 Internet to another’s computer. Although many of today’s commercial
transactions could be performed electronically, the acceptance and wide-
spread use of electronic commerce depends, in large part, upon the ease-of-
use of conducting such electronic commerce or other activities and on the
verifiability of the transaction. For example, if electronic commerce can be
20 easily conducted, then even the novice computer user will choose to engage
in such activities. Therefore, it is important that techniques be developed to
facilitate conducting such activities electronically.

The Internet facilitates conducting activities electronically, in
part, because it uses standardized techniques for exchanging information.
25 Many standards have been established for exchanging information over the
Internet, such as electronic mail, Gopher, and the World Wide Web
(“WWW”). The WWW service allows a server computer system (*i.e.*, web

server or web site) to send graphical web pages of information to a remote client computer system. The remote client computer system can then display the web pages. Each resource (*e.g.*, computer or web page) of the WWW is uniquely identifiable by a Uniform Resource Locator ("URL").

5 To view a specific web page, a client computer system specifies the URL for that web page in a request (*e.g.*, a HyperText Transfer Protocol ("HTTP") request). The request is forwarded to the web server that supports that web page. When that web server receives the request, it sends the requested web page to the client computer system. When the client
10 computer system receives the web page, it typically displays the web page using a browser. A browser is typically a special-purpose application program for requesting and displaying web pages.

Currently, web pages are often defined using HyperText Markup Language ("HTML") although other standards are on the horizon.
15 HTML provides a standard set of tags that defines how a web page is to be displayed. When a user makes a request to the browser to display a web page, the browser sends the request to the server computer system to transfer to the client computer system an HTML document that defines the web page. When the requested HTML document is received by the client
20 computer system, the browser displays the web page as defined by the HTML document. The HTML document contains various tags that control the display of text, graphics, controls, and other features. The HTML document may contain URLs of other web pages available on that server computer system or on other server computer systems.

25 The World Wide Web portion of the Internet is especially conducive to conducting electronic commerce, and a host of other activities that individuals have previously performed manually or over the phone. One activity that has been difficult to transfer to the Internet or Word Wide Web has been voting. An electronic voting scheme must ensure the privacy
30 of each voter, as well as provide security to prevent voting fraud. Voter registration has traditionally provided some measure of protection against

voter fraud. Typically, conventional voting schemes employ a two step process. First, the voter registers, providing the voter's signature to a registrar. Second, the voter signs in at the polls, or signs an envelope enclosing a ballot, allowing the voter's signature to later be compared to the signature of the registrant. As with many electronic commerce techniques, an electronic voting scheme must be easy for voters to use and access and subject to strict verification requirements. To date, the inventors are unaware of any system that fulfills these requirements.

SUMMARY OF THE INVENTION

Under one aspect of the invention, a registrant submits a public key of a public/private key pair and identifying information to a registrar. The registrar determines whether the registrant is eligible based on the provided identifying information. The registrar digitally signs the public keys of eligible registrants and forwards the signed public keys to an authenticating authority for use in authenticating the source of the encrypted voting information or electronic ballots submitted by the registrant.

Under another aspect of the invention, a registrant produces a hash card including a hash of a public key of the registrant's public/private key pair. The registrant physically signs and submits the hash card to a registrar via a communications channel such as a common courier. The registrant then submits its public key to the registrar electronically. If the hash corresponds to the submitted public key, the registrar digitally signs the public key and forwards the digitally signed public key to an authenticating authority for use in authenticating the source of the encrypted voting information or electronic ballots submitted by the registrant.

Under a further aspect of the invention, a registrar identifies a registrant in-person, and provides the registrant with a private key of a public/private key pair in a secure manner, such as on removable media.

The registrar forwards the digitally signed public key to an authenticating authority for use in authenticating the source of the encrypted voting information or electronic ballots submitted by the registrant.

Under yet another aspect of the invention, a registrant produces a hash card including a hash of a public key of the registrant's public/private key pair. The registrant signs and submits the hash card to the registrar in-person. The registrant electronically submits the public key to a registrar. The registrar digitally signs the public key if the hash corresponds to the electronically submitted public key. The registrar forwards the digitally signed public key to an authenticating authority for use in authenticating the source of the encrypted voting information or electronic ballots submitted by the registrant.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings, identical reference numbers identify similar elements or acts. The sizes and relative positions of elements in the drawings are not necessarily drawn to scale. For example, the shapes of various elements and angles are not drawn to scale, and some of these elements are arbitrarily enlarged and positioned to improve drawing legibility. Further, the particular shapes of the elements as drawn, are not intended to convey any information regarding the actual shape of the particular elements, and have been solely selected for ease of recognition in the drawings.

Figure 1 is a block diagram illustrating an environment for use with an embodiment of the invention.

Figure 2 is a flow diagram of a first method of registering registrants where a registrant electronically submits identifying information and a public key of a public/private key pair to a registrar who determines a registrant's eligibility based on matches and duplication in identifying data.

Figure 3 is a flow diagram of a second method of registering registrants where a registrant transmits a hash of a public key and signature

to the registrar via courier, and transmits a public key electronically to the registrar.

Figure 4 is a flow diagram of a third method of registering registrants where a registrar verifies an identity of a registrant in-person and
5 produces a public/private key pair for the verified registrant.

Figure 5 is a flow diagram of a fourth method of registering registrants where a registrant electronically submits a public key to a registrar, and submits a hash of a public key and signature to the registrar in-person.

10 DETAILED DESCRIPTION

In the following description, certain specific details are set forth in order to provide a through understanding of various embodiments of the invention. However, one skilled in the art will understand that the invention may be practiced without these details. In other instances, well-
15 known structures associated with computers, networks and internet servers and clients have not been shown or described in detail to avoid unnecessarily obscuring descriptions of the embodiments of the invention.

Unless the context requires otherwise, throughout the specification and claims which follow, the word “comprise” and variations thereof, such as, “comprises” and “comprising” are to be construed in an
20 open, inclusive sense, that is as “including, but not limited to.”

The headings provided herein are for convenience only and do not interpret the scope of meaning of the claimed invention.

Voter Authentication Background

25 For ease of presentation, the discussion herein employs the specific example of voter registration in illustrating the more general concept of public/private key encryption applied to practical registration systems. In the illustrated examples, a registrant corresponds to a voter, a registrar corresponds to an organization conducting the election (e.g.,

municipality, state, county, association, club) and/or its employees and agents, and an authenticating authority corresponds to the entity that collects and tallies the votes. It is noted at the outset that the authenticating authority can be a third party individual, organization or other entity.

5 Alternatively, the authenticating authority can be the registrar or a component of the registrar. While the illustrated examples employ election based scenarios, the registration systems are applicable in other contexts, such as for polling, licensing, and conducting lotteries or contests. Thus, the embodiments selected for illustration should not be considered as
10 limiting.

The registration systems illustrated herein provide each eligible registrant a method of obtaining a public/private key pair which meets predefined format and security specifications of the registrar and/or authenticating authority. In addition, it requires that the public key of each
15 eligible registrant be distributed to the organization administering the registration (*i.e.*, "registrar"), and that the organization has maintained a record of each eligible registrant's public key. The registrar or authenticating authority can provide software that allows each voter to generate a public/private key pair on his own computer, hence maintaining
20 a high level of security and privacy. The public key can be distributed to the authenticating authority by almost any means since it is intended to be "public." Since the public/private key pair generation software is universally available, the protocols setout herein must be implemented to protect the organization (*e.g.*, governing body) from accepting and
25 recording public keys for prospective registrants that have been generated by some illegitimate source. Under these circumstances, the masquerader has, for these purposes, assumed the identity of someone else. Without these protocols, the organization can only assure that votes credited to a person on their list of eligible voters are counted in the final tally, but
30 cannot ensure that the source of each vote is, in fact, the voter to whom it is credited.

The task of properly identifying the prospective registrant and recording the public key of each prospective voter registrant is called the registration process. Each organization or governing body must complete this process at least once for each of its eligible registrants (*e.g.*, voters).

5 Moreover, except under special circumstances, for example, when an eligible voter has lost his private key, or feels that it has been compromised, the registration process need be completed only once for each eligible voter. (Subsequent elections can reuse the same key pairs.) Four methods or protocols of conducting the registration process are presented herein, in
10 order to let each organization strike a balance between security and convenience which it feels best suits its needs. They are presented in Figures 2-5, in order of increasing security and decreasing convenience, respectively.

It is further noted that the protocols described below all
15 assume that the voter generates the public/private key pair using a verified program distributed by the registrar and/or authenticating authority. The problem of assuring use of a verified program is the considered the Key Generator Distribution Problem, which can be addressed by distributing the public/private key pair generation software on secure media.

20 Environment

Figure 1 and the following discussion provide a brief, general description of a suitable computing environment in which aspects of the invention can be implemented. Although not required, embodiments of the invention will be described in the general context of computer-executable
25 instructions, such as routines executed by a general-purpose computer, such as a personal computer or web server. Those skilled in the relevant art will appreciate that aspects of the invention (such as for small elections) can be practiced with other computer system configurations, including Internet appliances, hand-held devices, multiprocessor systems, microprocessor-
30 based or programmable consumer electronics, network PCs, mini

computers, cell phones, mainframe computers, and the like. Aspects of the invention can be embodied in a special purpose computer or data processor that is specifically programmed, configured or constructed to perform one or more of the computer-executable instructions explained herein. The
5 invention can also be practiced in distributed computing environments where tasks or modules are performed by remote processing devices, which are linked through a communications network, such as a Local Area Network (LAN), Wide Area Network (WAN), and the Internet. In a distributed computing environment, program modules or sub-routines may
10 be located in both local and remote memory storage devices. Thus, the invention is not limited to the World Wide Web or the Internet.

Unless described otherwise, the construction and operation of the various blocks shown in Figure 1 are of conventional design. As a result, such blocks need not be described in further detail herein, as they
15 will be readily understood by those skilled in the relevant art.

Referring to Figure 1, a suitable environment of system 100 includes one or more voter or client computers 102, each of which includes a browser program module 104 that permits the computer to access and exchange data with the Internet, including web sites within the World Wide
20 Web portion 106 of the Internet. The voter computers 102 may include one or more central processing units or other logic processing circuitry, memory, input devices (*e.g.*, keyboards and pointing devices), output devices (*e.g.*, display devices and printers), and storage devices (*e.g.*, fixed, floppy, and optical disk drives), all well known but not shown in Figure 1.
25 The voter computers 102 may also include other program modules, such as an operating system, one or more application programs (*e.g.*, word processing or spread sheet applications), and the like. Additionally, the voter computers can include a public/private key pair generation program module 105. As shown in Figure 1, there are N number of voter computers
30 102, representing voters 1, 2, 3 . . . N .

An authenticating authority's server computer system 108, coupled to the Internet or World Wide Web ("Web") 106, performs much or all of the ballot collection, storing and other processes. A database 110, coupled to the server computer 108, stores much of the web pages and data
5 (including ballots) exchanged between the voter computers 102, one or more voting poll computers 112 and the server computer 108. The voting poll computer 112 is a personal computer, server computer, mini-computer, or the like, positioned at a public voting location to permit members of the public, or voters who may not have ready access to computers coupled to
10 the Internet 106, to electronically vote under the system described herein. Thus, the voter computers 102 may be positioned at individual voter's homes, where one or more voting poll computers 112 are located publicly or otherwise accessible to voters during a public election. The voting poll computer 112 may include a local area network (LAN) having one server
15 computer and several client computers or voter terminals coupled thereto via the LAN to thereby permit several voters to vote simultaneously or in parallel.

The authenticating authority's server computer 108 includes a server engine 120, a web page management component 122, a database
20 management component 124, as well as other components. The server engine 120 performs, in addition to standard functionality, performs one or more electronic voting protocols. Thus, the server engine 120 may perform all necessary ballot transmission to authorized voters, ballot collection, verifying ballots (*e.g.*, checking digital signatures and passing verification
25 of included proofs of validity in ballots), vote aggregation, ballot decryption and/or vote tabulation.

The web page component 122 handles creation and display or routing of web pages such as an electronic ballot box web page. Voters and users access the server computer 108 by means of a URL associated
30 therewith, such as <http://www.votehere.net>, or a URL associated with the election, such as a URL for a municipality. The municipality may host or

operate the server computer system 108 directly as the authenticating authority, or automatically forward such received electronic ballots to a third party vote authenticating authority who may operate the server computer system. The URL, or any link or address noted herein, can be
5 any resource locator.

The web page management process 122 and server computer 108 may have secure sections or pages that may only be accessed by authorized people, such as authorized voters or system administrators. The server computer 108 may employ a secure socket layer ("SSL") and tokens
10 or cookies to authenticate such users. Indeed, for small elections, or those where the probability of fraud is low (or results of fraud are relatively inconsequential), the system 100 may employ such simple network security measures for gathering and storing votes as explained below, rather than employing complex electronic encrypted ballots, as described in the above-
15 noted patent application. Methods of authenticating users (such as through the use of passwords), establishing secure transmission connections, and providing secure servers and web pages are known to those skilled in the relevant art.

One or more registrar's server computer systems 114 are also
20 coupled to the authenticating authority's server computer system 108 and the voter or client computers 102 via the Internet 106. The registrar's server computer system 114 performs much or all of the registration process, verifying and registering registrants (*e.g.*, voters), digitally signing the registrant's public keys and passing the digitally signed public keys of
25 eligible registrants to the authenticating authority's server computer system 108. A database 115, coupled to the registrar's server computer system 114, stores many of the web pages and data exchanged between the registrar's server computer 114, the voter computers 102 and the authenticating authority's server computer 108.

30 The registrar's server computer 114 includes a server engine 130, a web page management component 132, a database management

component 134, as well as other components. The server engine 130 may perform, in addition to standard functionality, one or more registration protocols, such as the registration protocols described herein.

5 The web page component 132 handles creation and display or routing of web pages such as an electronic ballot box web page. Voters and users access the registrar's server computer 114 by means of a URL associated therewith, such as <http://www.votehere.net>, or a URL associated with the election, such as a URL for a municipality. The municipality may host or operate the registrar's server computer system 114 directly as the authenticating authority, or automatically forward such received electronic
10 ballots to a third party authenticating authority who may operate the server computer system. The URL, or any link or address noted herein, can be any resource locator.

The web page management process 132 and registrar's server
15 computer 114 may have secure sections or pages that may only be accessed by authorized people, such as authorized voters or system administrators. The registrar's server computer 114 may employ a secure socket layer ("SSL") and tokens or cookies to authenticate such users.

Under an alternative embodiment, the system 100 may be
20 used in the context of a private election, such as the election of corporate officers or board members. Under this embodiment, the voter computers 102 may be laptops or desktop computers of shareholders, and the voting poll computer 112 can be one or more computers positioned within the company (e.g., in the lobby) of the company performing the election. Thus, shareholders may visit the company to access the voting poll computer 112
25 to register and/or cast their votes. Under another alternative embodiment, the system 100 may be used in the context of a market survey or an opinion poll where the entity commissioning the survey or poll desires the data to be collected from a particular demographic segment of the public. The registration process can ensure the demographic requirement is satisfied
30 while maintaining the anonymity of the respondents. Under yet an

alternative embodiment, the system 100 may be used in the context of a lottery or contest by controlling registration for the lottery or contest. The registration process can ensure that contestants meet certain eligibility criteria such as age or residency requirements, while maintaining
5 anonymity. In yet a further alternative embodiment, the system 100 can be used in a licensing context, for example, licensing individuals, cars, boats or other items.

Remote Electronic Registration

Figure 2 shows a method of remote electronic registration
10 200. The method is more convenient for the registrant than the other illustrated methods, but can be less secure. In Figures 2-5, the flow sequence is generally from the top of the page to the bottom of the page, although the order of many steps are interchangeable. Each column 202-
206, 302-306, 402-406, 502-506 of the Figures 2-5 sets out the acts of one
15 of the participants, although in many cases the acts of the registrar and the authenticating authority can be performed by the other. Where reference is made to the registrar and authenticating authority, such references shall include the acts of its employees, contractors, agents and systems such as programmed computers and databases.

20 In step 208, a registrar 204 provides a registration form web page to a registrant 202 over the World Wide Web. Alternatively, the registration form web page may be provided by the authenticating authority 206.

In step 210, the authenticating authority 206 provides
25 public/private key pair generation software to the registrant 202. The authenticating authority 206 can provide the software at the registrant's 202 request, for example in response to a selection of a link on the registration form web page. Alternatively, the registrar 204 can provide the public/private key pair generation software. Maintaining the software on
30 the registrant's 202 own computer provides an enhanced degree of security,

since the registrant 202 is ensured that no one else possesses the private key. In some cases, the download of the public/private key pair generation software may be unnecessary, for example where the registrant 202 already possesses suitable software or already has a public/private key pair
5 conforming to the specifications of the authenticating authority 206 and/or registrar 204. It is noted that in some instances step 210 can precede step 208.

In step 212, the registrant 202 generates a public/private key pair. The registrant 202 can employ the public/private key pair generation
10 software downloaded in step 210, or can use conforming previously downloaded public/private key pair generation software. Alternatively, the registrant 202 can employ a previously generated public/private key pair that conforms to the specifications of the authenticating authority 206 or registrar 204. Public/private key pair encryption is known to those skilled
15 in the art of encryption and, in the interest of brevity, the details of such techniques will not be discussed.

In step 214, the registrant 202 submits identifying information and the public key of the public/private key pair to the registrar 204. The identifying information can comprise any data of a predetermined format,
20 but typically will include the registrant's 202 name and address. The address can be a postal address, e-mail address and/or some other address. For example, Universities may prefer e-mail addresses, while municipalities may prefer common street addresses. The identifying information can also include a unique identifier, such as a social security
25 number or other universally assigned identifier.

In step 216, the registrar 204 receives the public key and identifying information. In step 218, the registrar 204 determines if the registrant 202 is eligible based on the submitted identifying information. For example, the registrar 204 can determine whether the submitted name
30 matches a known address for the registrant 202. The registrar 204 can also determine whether the name and address match a known name and address

for the registrant 202, for example from prior voting rolls, and/or telephone and address directories. The registrar 204 can also determine whether the name and address are duplicates of prior registered names and addresses. These determinations can detect attempts at voter fraud, although it may not
5 be immediately apparent whether the current registrant 202 or the previous registrant is attempting to commit the fraud. Thus, the method of Figure 2 provides some level of security during the registration process.

If the registrant 202 is not eligible, the registrar 204 rejects the registration in step 220, and can take further steps to identify the source
10 of the attempted fraud. If the registrant 202 is eligible, the registrar 204 digitally signs the public key of the registrant 202 in step 222. Digital signatures are known to those skilled in the art of encryption and, in the interest of brevity, will not be further discussed.

In optional step 224, the registrar 204 can provide the
15 digitally signed public key to the registrant 202 to serve as a receipt of the registration. (Optional steps are noted in Figures 2-5 by the parentheses surrounding the step label.) In step 226, the registrar 204 provides the digitally signed public key to the authenticating authority 206. It is noted that the order of steps 224 and 226 can be varied as desired. Typically, the
20 registrar 204 will supply the authenticating authority 206 with a collection of all of the digitally signed public keys at the end of a registration period, but can also supply the digitally signed public keys on an individual basis as they are created. In step 228, the authenticating authority 206 receives the digitally signed public key from the registrar 204.

25 In step 230, the registrant 202 transmits an encrypted vote to the authenticating authority 206, which receives the encrypted vote from the registrant 202 in step 232. In some cases it is possible to perform steps 230 and 232 prior to step 228. However, the order depicted in Figure 2 can permit the authenticating authority 206 to refuse to receive votes from
30 registrants for which a digitally signed public key has not previously been received.

In step 234, the authenticating authority 206 authenticates the source of the encrypted vote using the public key of the registrant 202 which was digitally signed by the registrar. The authentication validates the registrant's digital signature on the encrypted vote. Thus, the protocol
5 authenticates the encrypted vote using the public key of the registrant 202, which itself was authenticated using the digital signature of the registrar 204. The authenticating authority 206 can authenticate each vote as the encrypted vote is received, or can delay authenticating the votes until a voting period ends and all the encrypted votes have been received. In step
10 236, the authenticating authority 206 aggregates the encrypted votes, and decrypts the aggregation of encrypted votes in step 238.

Post/Courier Registration

Figure 3 shows a method of registration employing a courier such as a postal carrier or other common carrier. This method is generally
15 more secure than the method of Figure 2, but can also be less convenient for the registrant.

In step 308, a registrar 304 provides a registration form web page to a registrant over the World Wide Web, and in step 210 an authenticating authority 306 provides public/private key pair generation
20 software to the registrant. As generally discussed above, the order of steps 308 and 310, as well as the roles of the registrar 304 and the authenticating authority 306 can vary to suit the particular circumstances. In step 312, the registrant generates a public/private key pair, or employs an existing public/private key pair that conforms to the registrar's 304 or authenticating
25 authority's 306 specifications. In step 314, the registrant generates a hash of the public key. Hashing functions are generally known in the computer arts and will not be discussed further in the interest of brevity.

In step 316, the registrant transfers the hash of the public key to a hash card 317. The hash card 317 is formed on a blank of tangible
30 medium capable of carrying the hash of the public key, as well as a

signature of the registrant. For example, the hash card 317 can be formed on a blank of paper, poster-board, or card-board. The hash card 317 can alternatively employ some destruction-resistant material, such as TYVEK (registered trademark of E.I. DuPont deNemours and Company). The
5 registrant can create or obtain the hash card 317 in a variety of fashions. For example, the registrant can print a hash card 317 using a trusted printer on standard paper. The registrant can obtain a hash card blank from publicly available sources such as driver's license bureau, post office, shop and/or supermarket. The registrant can be sent a hash card blank through
10 the mails. The hash card blank can contain some pre-printed material or can be printed entirely by the registrant. The hash of the public key can be transferred to the hash card blank through printing, writing, magnetic encoding or other form of imprinting.

In step 318, the registrant applies the registrant's written
15 signature to the hash card blank, thus providing a way to identify the registrant 302 at a later date. In step 320, the registrant 302 transmits the completed hash card 317 to the registrar 304 via a third party courier, such as through the mails or by some other common carrier involving hand-delivery. The use of a third party courier provides convenience to the
20 registrant 302, but reduces the security of the overall system slightly. In step 322, the registrar 304 receives the hash card 317 from the registrant 302. In step 324, the registrar 304 enters the hash of the public key into an electronic database, completing a first phase of the registration process.

In an optional step 326, the registrar 304 can grant the
25 registrant 302 access to a second phase of the registration process via a second phase web registration page. Alternatively, the registrant 302 can automatically have access to the second phase of the registration process. In step 328, the registrar 304 provides the second phase web page registration form to the registrant 302. In step 330, the registrant 302
30 submits the public key to the registrar 304 via the second phase web page registration form, the registrar 304 receiving the public key from the

registrant 302 in step 332. In step 334, the registrar 304 determines whether the received hash of the public key corresponds to the received public key. The registrar 304 can create a hash of the received public key in making the determination.

5 If the received public key does not correspond to the hash of the public key, the registrar 304 rejects the registration in step 336, and can take further steps to identify the source of the attempted fraud. If the received public key does correspond to the hash of the public key, the registrar 304 digitally signs the public key of the registrant 302 in step 338.
10 In step 340, the registrar 304 provides the digitally signed public key to the authenticating authority 306, which receives the digitally signed public key in step 342. Again, the registrar 304 may transfer the digitally signed keys in one or more groups. In optional step 344, the registrar 304 also provides the digitally signed public key to the registrant 302, as a receipt of the
15 registration process. This permits the registrant 302 or a third party to later verify an election result. The registrant 302 receives the digitally signed public key in step 348.

 In step 348, the registrant 302 transmits an encrypted vote to the authenticating authority 306, that receives the encrypted vote in step
20 350. In step 352, the authenticating authority 306 authenticates the source of the encrypted vote using the public key of the registrant 302 which was digitally signed by the registrar. The authentication validates the registrant's digital signature on the encrypted vote. Thus, the protocol authenticates the encrypted vote using the public key of the registrant 302,
25 which itself was authenticated using the digital signature of the registrar 304. The authenticating authority 306 can authenticate each vote as the encrypted vote is received, or can delay authenticating the votes until a voting period ends and all the encrypted votes have been received. In step 354, the authenticating authority 306 aggregates the encrypted votes, and
30 decrypts the aggregation of encrypted votes in step 356.

Trusted Registrar In Person Registration

Figure 4 shows a method of registration employing the registrar 404 to produce the public/private key pair. If the registrant 402 trusts the registrar 404, this method provides more security than the method of Figure 3, but can be less convenient than the previously discussed methods.

In step 408, the registrar 404 identifies the registrant 402 in-person. The registrar 404 may rely on a form of photo identification, for example a drivers license, passport or national identification card. The registrar 404 can also rely on a signature, fingerprint, or the fact that the registrar 404 recognizes the registrant 402 as the individual who the registrant 402 claims to be. The registrar 404 may set up offices in a relevant geographic region to make the process convenient for the registrant 402. The registrar 404 may use existing facilities such as post offices, schools, driver's license bureaus, shops and/or supermarkets.

In step 408, the registrar 404 generates a public/private key pair for the identified registrant 402. The public/private key pair may be generated after the registrant 402 has been identified, or may be generated before the identification. In step 412, the registrar 404 digitally signs the public key generated for the identified registrant 402. In step 414, the registrar 404 provides the private key of the public/private key pair to the registrant 402. In optional step 416, the registrar 404 provides the digitally signed public key to the registrant 402 as a receipt of the registration process. As discussed above, the digitally signed public key can later be used to verify the integrity of the election process. The registrar 404 can give the registrant 402 the private key and digitally signed public key on removable computer-readable media or via some secure channel. This helps ensure that the private key remains private. In step 418, the registrant 402 receives the removable media containing the private key and the digitally signed public key.

In step 420, the registrar 404 provides the digitally signed public key to the authenticating authority 406, which receives the digitally signed public key in step 422. In step 424, the registrant 402 transmits an encrypted vote to the authenticating authority 406, which receives the encrypted vote in step 426. In step 428, the authenticating authority 406 authenticates the source of the encrypted vote using the public key of the registrant 402 which was digitally signed by the registrar. The authentication validates the registrant's digital signature on the encrypted vote. Thus, the protocol authenticates the encrypted vote using the public key of the registrant 402, which itself was authenticated using the digital signature of the registrar 404. The authenticating authority 406 can authenticate each vote as the encrypted vote is received, or can delay authenticating the votes until a voting period ends and all the encrypted votes have been received. In step 430, the authenticating authority 406 aggregates the encrypted votes, and decrypts the aggregation of encrypted votes in step 432.

In Private, In Person Registration

Figure 5 shows a method of registration employing in-person identification and a registrant 502 generated public/private key pair. This is the most secure of the illustrated methods, but comes at the cost of convenience.

In step 508, the registrar 404 provides a web page registration form to the registrant 502. In optional step 510, the registrar 404 prompts the registrant 502 to create a hash card 519. In step 512, the registrar 404 can provide public/private key pair generation software to the registrant 502 if the registrant 502 does not already possess such software or a suitable public/private key pair. In step 514, the registrant 502 generates a public/private key pair using the key pair generation software. As discussed above, the order of the steps and the roles of the registrar 504 and the authenticating authority 506 can vary. In step 516, the registrant 502

produces a hash of the public key. In step 518, the registrant 502 imprints the hash of the public key on the hash card blank, as explained above in reference to the method of Figure 3.

In step 520, the registrar 404 prompts the registrant 502 to
5 transmit the public key. In step 522 the registrant 502 electronically transmits the public key, the registrar 404 receiving the public key in step 524. It is noted that steps 520, 522 and 524 can occur before steps 516 and 518. In step 526, the registrar 404 identifies the registrant 502 in-person, employing similar means as those describe above in reference to the
10 method of Figure 4. After the registrar 404 identifies the registrant 502, the registrant 502 signs the hash card 519 in writing and submits the hash card 519 to the registrar 404 in step 528. The registrar 404 receives the signed hash card 519 in step 530 and determines in step 532 whether the hash on the hash card 519 corresponds to the public key electronically submitted by
15 the registrant 502.

In step 534, the registrar 404 rejects the registration if the hash of the public key does not correspond to the electronically submitted public key. In step 536, the registrar 404 identifies the registrant 502 as eligible if the hash of the public key corresponds to the electronically
20 submitted public key. In optional step 538, the registrar 404 transmits an officially stamped or otherwise acknowledged copy of the hash card to the registrant 502 as proof of the registration process, the registrant 502 receiving the copy of the hash card in step 540. In step 542, the registrar 404 digitally signs the public key of the eligible registrant 502. In optional
25 step 544, the registrar 404 transmits the digitally signed public key to the registrant 502 as a further receipt, which the registrant 502 receives in step 546. It is noted that steps 542, 544 and 546 can occur before steps 538 and 540.

In step 548, the registrar 404 transmits the digitally signed
30 public key to the authenticating authority 506, which is received by the authenticating authority 506 in step 550. In step 552, the registrant 502

transmits an encrypted vote to the authenticating authority 506 which receives the encrypted vote in step 554. In step 556, the authenticating authority 506 authenticates the source of the encrypted vote using the public key of the registrant 502 which was digitally signed by the registrar.

5 The authentication validates the registrant's digital signature on the encrypted vote. Thus, the protocol authenticates the encrypted vote using the public key of the registrant 502, which itself was authenticated using the digital signature of the registrar 504. The authenticating authority 506 can authenticate each vote as the encrypted vote is received, or can delay

10 authenticating the votes until a voting period ends and all the encrypted votes have been received. In step 558, the authenticating authority 506 aggregates the encrypted votes, and decrypts the aggregation of encrypted votes in step 560.

Although specific embodiments of and examples for

15 practicing the invention are described herein for illustrative purposes, various equivalent modifications can be made without departing from the spirit and scope of the invention, as will be recognized by those skilled in the relevant art. The teachings provided herein of the invention can be applied to other registration systems, not necessarily the exemplary voter

20 registration protocols and structures generally described above.

The various embodiments described above can be combined to provide further embodiments. Aspects of the invention can be modified, if necessary, to employ systems, circuits and concepts of the various patents, applications and publications to provide yet further embodiments

25 of the invention.

These and other changes can be made to the invention in light of the above-detailed description. In general, in the following claims, the terms used should not be construed to limit the invention to the specific embodiments disclosed in the specification and the claims, but should be

30 construed to include all registration that operated in accordance with the claims to register registrants. Accordingly, the invention is not limited by

the disclosure, but instead its scope is to be determined entirely by the following claims.

CLAIMS

1 1. A method of registration, comprising:
2 receiving a hash of a public key and a written signature of each of a plurality
3 of registrants through a first channel of communications that includes hand-delivery;
4 receiving a public key and associated identifying information of at least some
5 of the plurality of registrants through a second channel of communications, different from
6 the first channel of communications that excludes hand-delivery;
7 for each of the plurality of registrants, digitally signing the public key if the
8 hash of the public key of the registrant received through the first channel of
9 communications corresponds to the public key of the registrant received through the second
10 channel of communications; and
11 providing the digitally signed public keys to an authenticating authority.

1 2. The method of claim 1, further comprising:
2 rejecting the registrant if the hash of the public key of the registrant received
3 through the first channel of communications does not correspond to the public key of the
4 registrant received through the second channel of communications.

1 3. The method of claim 1 wherein receiving a hash of a public key and a
2 written signature through a first channel of communications includes receiving a written
3 message via a courier.

1 4. The method of claim 1 wherein receiving a public key and associated
2 identifying information through a second channel of communications includes detecting a
3 signal carried in at least one of an electrical, a magnetic, and an electro-magnetic carrier.

1 5. The method of claim 1 wherein the hash of the public key and the
2 written signature of the registrants received through the first channel of communications are
3 non-electronic.

1 6. The method of claim 1, further comprising:
2 providing each of the registrants a copy of the respective digitally signed
3 public key.

1 7. The method of claim 1, further comprising:
2 creating a hash of the public key received through the second channel of
3 communications for comparison to the hash of the public key received through the first
4 channel of communications.

1 8. The method of claim 1, further comprising:
2 enabling the registrants to submit the public key and associated identifying
3 information through the second channel of communications only after receiving the hash of
4 the public key and written signature through the first channel of communications.

1 9. The method of claim 1, further comprising:
2 preventing the registrants from submitting the public key and associated
3 identifying information through the second channel of communications until after the hash
4 of the public key and written signature are received through the first channel of
5 communications.

1 10. The method of claim 1, further comprising:
2 entering the hash of the public key received through the first channel of
3 communications into an electronic database.

1 11. A computer program product for registering voter registrants, the
2 computer program product comprising a computer-readable medium having a computer-

3 readable program code means embodied in the medium for carrying out a number of steps
4 on a data processing system, said steps comprising:

5 for each of a plurality of voter registrants, electronically receiving a hash of a
6 public key that was transmitted by the registrant through a first channel of communications
7 including hand-delivery;

8 for each of a number of said plurality of voter registrants, electronically
9 receiving a public key and associated identifying information that was transmitted by the
10 voter registrant through a second channel of communications excluding hand-delivery;

11 for each of a number of said plurality of voter registrants, digitally signing the
12 respective public key of the registrant if the hash of the public key received from the voter
13 registrant corresponds to the public key received from the voter registrant; and

14 providing the digitally signed public keys to an authenticating authority.

1 12. The computer program product of claim 11 wherein said steps further
2 comprise:

3 creating a hash of the public key received through the second channel of
4 communications for comparison to the hash of the public key received through the first
5 channel of communications.

1 13. A voter registration computer system, comprising:

2 a public key hash input subsystem that for each of a plurality of voter
3 registrants, electronically receives a hash of a public key that was transmitted by the voter
4 registrant through a first channel of communications including hand-delivery;

5 a public key input subsystem that, for each of at least some of the plurality of
6 voter registrants, electronically receives a public key and associated identifying information
7 transmitted by the voter registrant through a second channel of communications excluding
8 hand-delivery;

9 a digital signature subsystem that, for each of a number of the voter
10 registrants, digitally signs the respective public key of the voter registrant if the hash of the
11 public key received from the voter registrant corresponds to the public key received from
12 the voter registrant; and

13 a digitally signed public key output subsystem that provides the digitally
14 signed public keys to an authenticating authority.

1 14. The voter registration computer system of claim 13, further
2 comprising:

3 a hashing subsystem that creates a hash of the public key received through the
4 second channel of communications for comparison to the hash of the public key received
5 through the first channel of communications.

1 15. A method of voter registration, comprising:
2 receiving a plurality of digitally signed public keys from a registrar, where
3 each of the digitally signed public keys belongs to a respective one of a plurality of voter
4 registrants that submitted a hash of the public key through a first channel of
5 communications including hand-delivery and that submitted the public key corresponding
6 to the hash through a second channel of communications excluding hand-delivery; and
7 authenticating a number of public key encrypted votes received from at least
8 some of the plurality of voter registrants using the received digitally signed public keys.

1 16. The method of claim 15 wherein the public key encrypted votes are
2 digitally signed by the respective voter registrants.

1 17. A computer program product for registering voter registrants, the
2 computer program product comprising a computer-readable medium having a computer-
3 readable program code means embodied in the medium for carrying out a number of steps
4 on a data processing system, said steps comprising:

5 receiving a plurality of digitally signed public keys from a registrar, where
6 each of the digitally signed public keys belongs to a respective one of a plurality of voter
7 registrants that submitted a hash of the public key through a first channel of
8 communications including hand-delivery and that submitted the public key corresponding
9 to the hash through a second channel of communications excluding hand-delivery; and

10 authenticating a number of public key encrypted votes received from at least
11 some of the plurality of voter registrants using the received digitally signed public keys.

1 18. The computer program product of claim 17 wherein the public key
2 encrypted votes are digitally signed by the respective voter registrants.

1 19. A voter registration computer system, comprising:
2 an input subsystem that receives a plurality of digitally signed public keys
3 from a registrar, where each of the digitally signed public keys belongs to a respective one
4 of a plurality of voter registrants that submitted a hash of the public key through a first
5 channel of communications including hand-delivery and that submitted the public key
6 corresponding to the hash through a second channel of communications excluding hand-
7 delivery; and
8 an authentication subsystem that authenticates a number of public key
9 encrypted votes received from at least some of the plurality of voter registrants using the
10 received digitally signed public keys.

1 20. The voter registration computer system of claim 19 wherein the public
2 key encrypted votes are digitally signed by the respective voter registrants.

1 21. A method of registration, comprising:
2 receiving a respective public key for each of a plurality of registrants;
3 for each of at least some of the plurality of registrants, verifying an identity of
4 the registrant in-person;
5 for each of the verified registrants, receiving a signature of the registrant on a
6 respective hash card including a written hash of the public key of the registrant;
7 for each of the verified registrants, digitally signing the public key received
8 from the registrant if the hash on the hash card corresponds to the public key received from
9 the registrant; and
10 providing the digitally signed public keys to an authenticating authority.

1 22. The method of claim 21, further comprising:
2 providing an acknowledged duplicate of the respective hash card to each of
3 the verified registrants.

1 23. The method of claim 21, further comprising:
2 providing a copy of the respective digitally signed public key to each of the
3 verified registrants.

1 24. The method of claim 21, further comprising:
2 rejecting the registrant if the hash on the hash card does not correspond to the
3 public key received from the registrant.

1 25. The method of claim 21, further comprising:
2 providing a form for creating the hash card to at least some of the registrants.

1 26. The method of claim 21, further comprising:
2 providing a copy of public/private key pair generation software to at least
3 some of the registrants.

1 27. The method of claim 21, further comprising:
2 prompting the registrants to generate the hash card; and
3 prompting the registrants to transmit the public key.

1 28. The method of claim 21 wherein identifying the registrant in-person
2 includes at least one of comparing the registrant to a picture identification and comparing a
3 signature of the registrant to a signature of the picture identification.

1 29. A computer program product for registering voter registrants, the
2 computer program product comprising a computer-readable medium having a computer-

3 readable program code means embodied in the medium for carrying out a number of steps
4 on a data processing system, said steps comprising:
5 receiving a respective public key for each of a plurality of registrants;
6 for a number of said plurality of registrants, receiving an indication that an
7 identity of the registrant has been verified in-person;
8 for at least a number of said verified registrants, digitally signing the public
9 key received from the registrant if a public key hash submitted by the registrant on a hash
10 card including a written signature of the registrant corresponds to the public key received
11 from the registrant; and
12 providing the digitally signed public keys to an authenticating authority.

1 30. The computer program product of claim 29 wherein said steps further
2 comprise:
3 automatically producing an acknowledged duplicate of the respective hash
4 card for each of the verified registrants.

1 31. The computer program product of claim 29 wherein said steps further
2 comprise:
3 rejecting the registrant if the hash on the hash card does not correspond to the
4 public key received from the registrant.

1 32. The computer program product of claim 29 wherein said steps further
2 comprise:
3 automatically providing a web page form for creating the hash card to at least
4 some of the registrants.

1 33. A registration computer system, comprising:
2 a public key input subsystem that receives a respective public key for each of
3 a plurality of registrants;

4 a tracking subsystem that, for each of at least some of the plurality of
 5 registrants, receives an indication that an identity of the registrant has been verified in-
 6 person;

7 a digital signature subsystem that, for at least a number of the registrants
 8 indicated as having identities verified in-person, digitally signs the public key received
 9 from the registrant if a public key hash submitted by the registrant on a hash card including
 10 a written signature of the registrant corresponds to the public key received from the
 11 registrant; and

12 a digital signed public key output subsystem that provides the digitally signed
 13 public keys to an authenticating authority.

1 34. A method of voter registration, comprising:

2 receiving a plurality of digitally signed public keys from a registrar, where
 3 each of the digitally signed public keys belongs to a respective one of a plurality of voter
 4 registrants that have had their identity verified in-person by the registrar and that have
 5 submitted a hash card to the registrar including a written signature and a public key hash
 6 corresponding a public key electronically submitted to the registrar by the registrant; and

7 authenticating a number of public key encrypted votes received from at least
 8 some of the plurality of voter registrants using the received digitally signed public keys.

1 35. A method of registration, comprising:

2 for each of a plurality of registrants, verifying an identity of the registrant in
 3 person;

4 for at least some of the plurality of registrants, producing a public/private key
 5 pair;

6 for each of a number of the voter registrants that have had their respective
 7 identities verified in person, digitally signing the public key of the respective produced
 8 public/private key pair;

9 providing the private key of the respective produced public/private key pair to
 10 each of the registrants that have had their respective identities verified in-person; and

11 providing the digitally signed public keys to an authenticating authority.

1 36. A method of registration, comprising:
2 receiving a plurality of digitally signed public keys from a registrar, where
3 each of the digitally signed public keys belongs to a respective one of a plurality of voter
4 registrants that have had their respective identities verified by the registrar in-person; and
5 authenticating a number of public key encrypted votes received from at least
6 some of the plurality of voter registrants using the received digitally signed public keys.

1 37. A method of registration, comprising:
2 electronically receiving a public key and associated identifying data from
3 each of a plurality of registrants over at least one communications channel;
4 digitally signing each of the received public keys of the registrants whose
5 identifying data is not the same as the identifying data of the other registrants; and
6 providing the digitally signed public keys to an authenticating authority.

1 38. The method of claim 37 wherein digitally signing each of the received
2 public keys of the registrants whose identifying data is not the same as the identifying data
3 of the other registrants includes comparing the identifying data of at least one of the
4 registrants to the identifying data of at least another one of the registrants.

1 39. The method of claim 37 wherein electronically receiving a public key
2 and associated identifying data includes receiving at least one of a registrant name, a
3 registrant address and a unique registrant identifier.

1 40. A method of voter registration, comprising:
2 receiving a plurality of digitally signed public keys from a registrar, where
3 each of the digitally signed public keys belongs to a respective one of a plurality of voter
4 registrants having different identifying data from the other voter registrants; and
5 authenticating a number of public key encrypted votes received from at least
6 some of the plurality of voter registrants using the received digitally signed public keys.



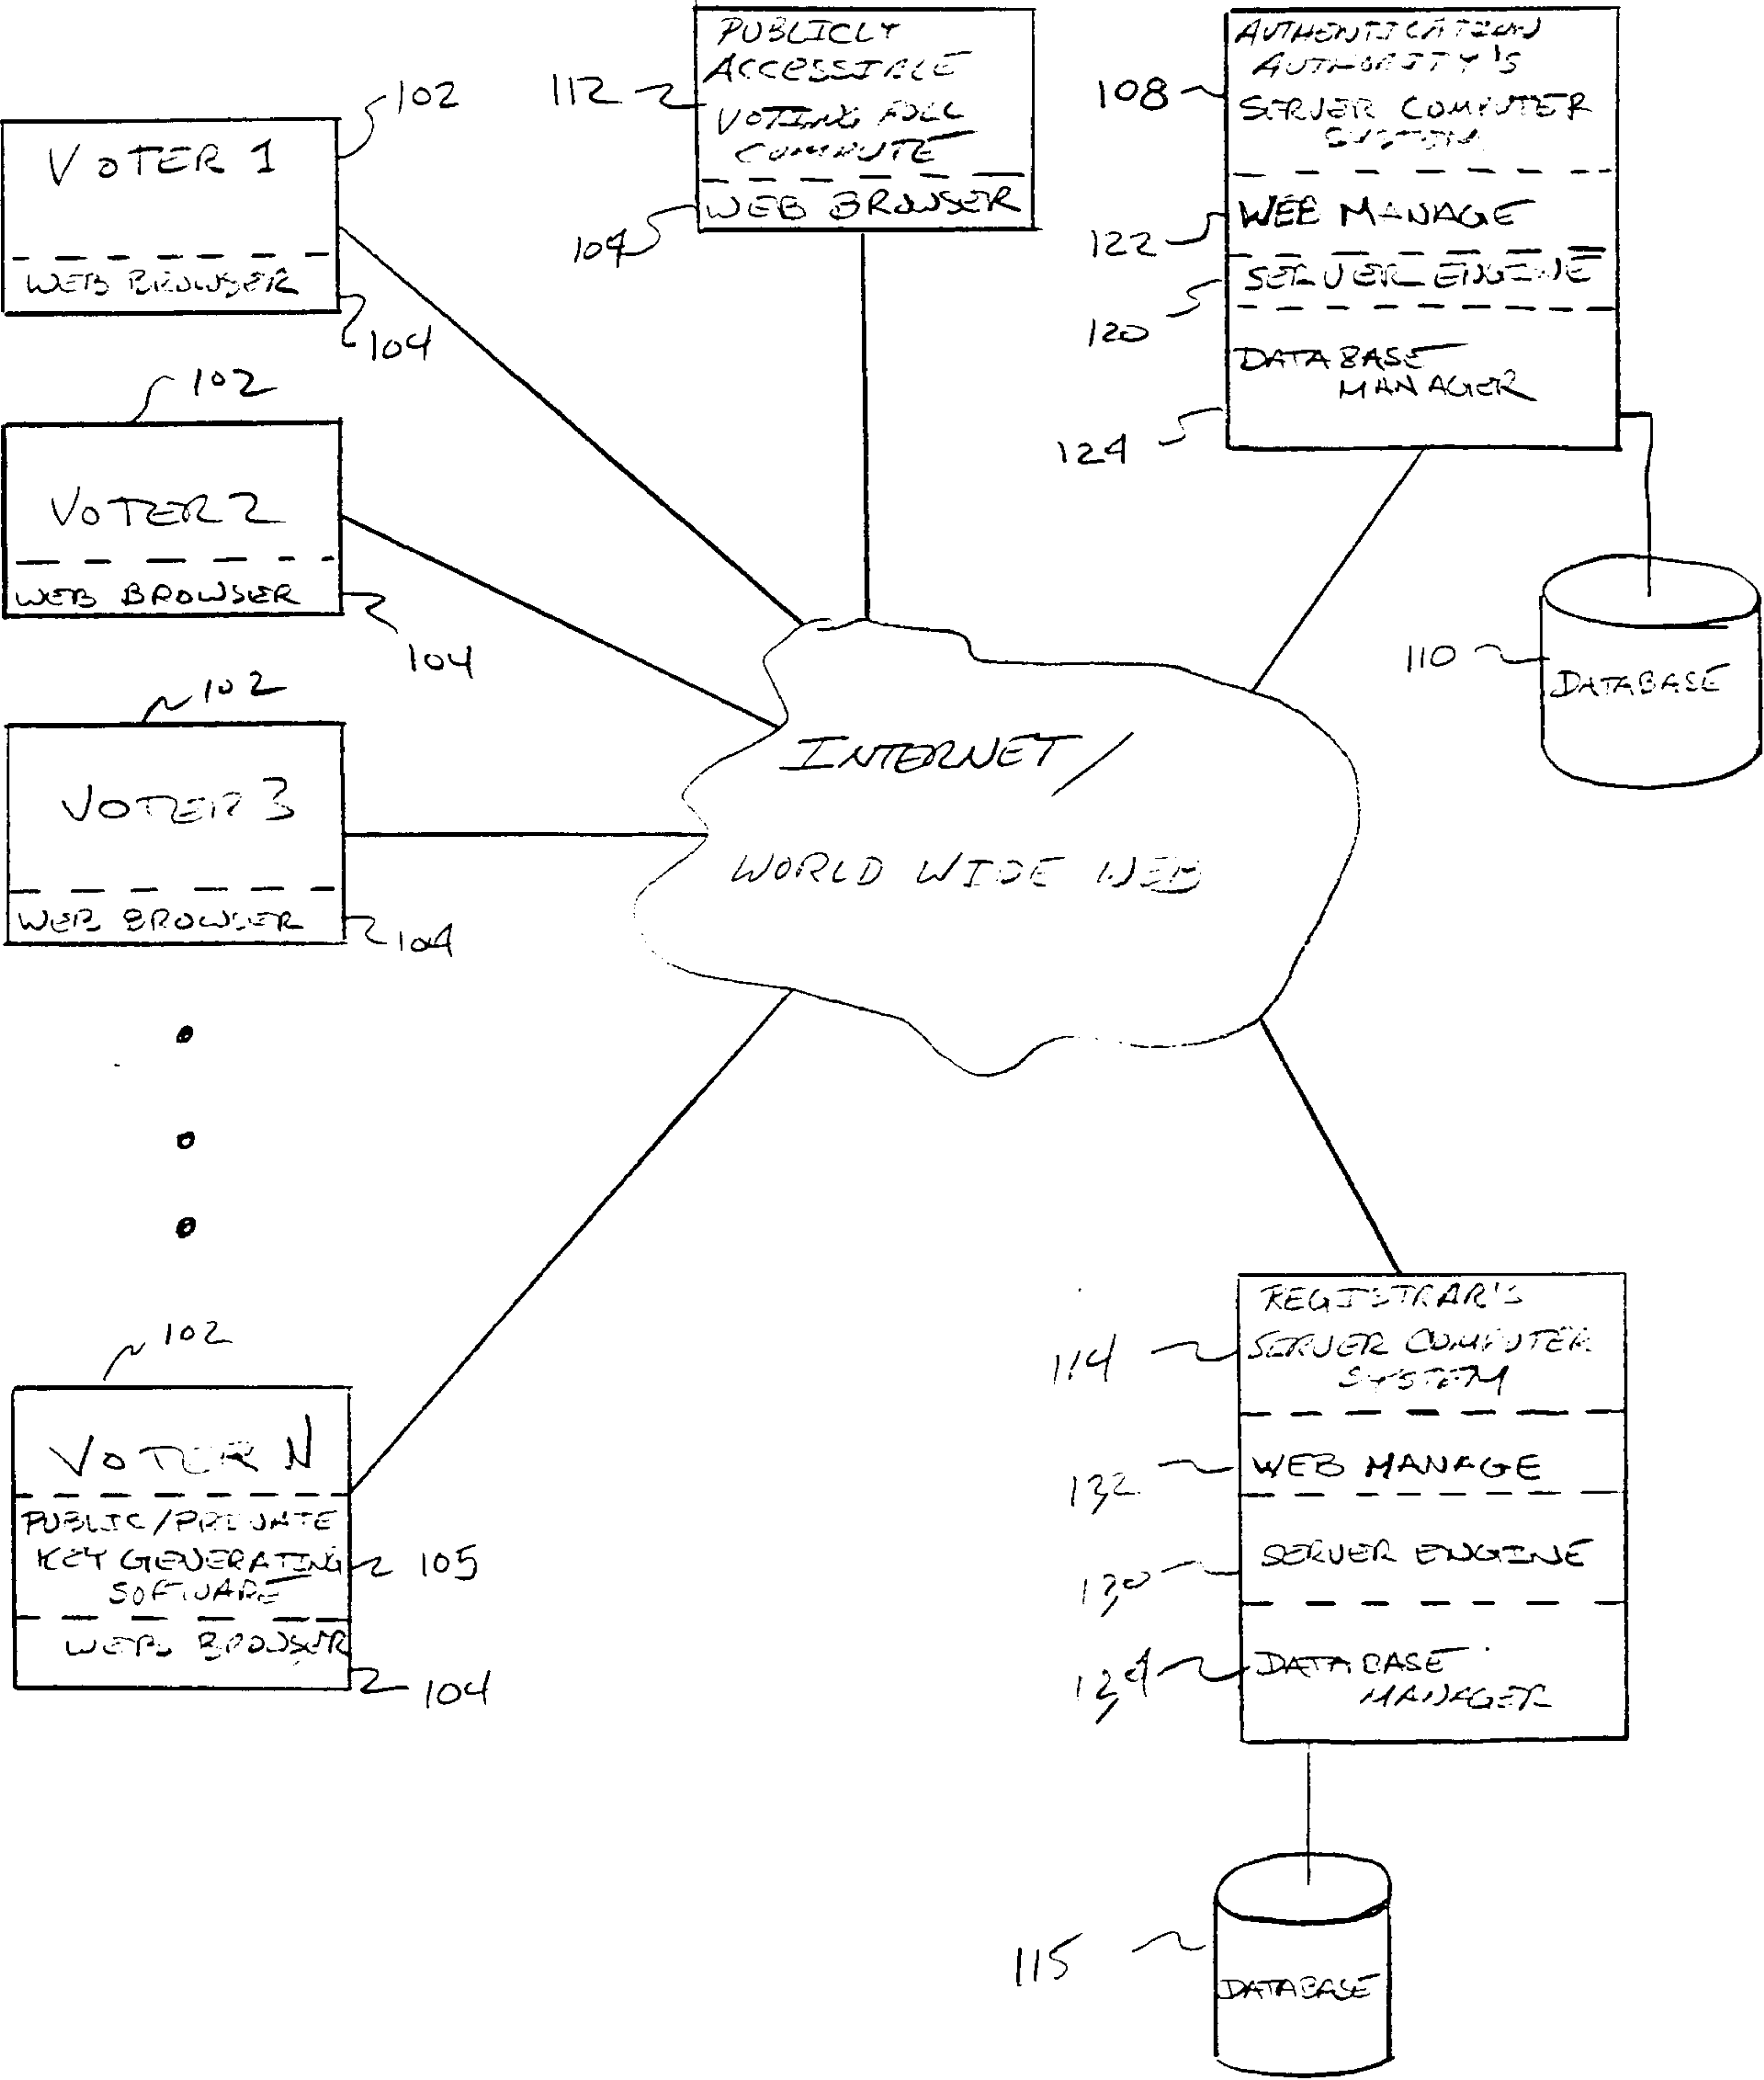


FIG. 1

2 / 5

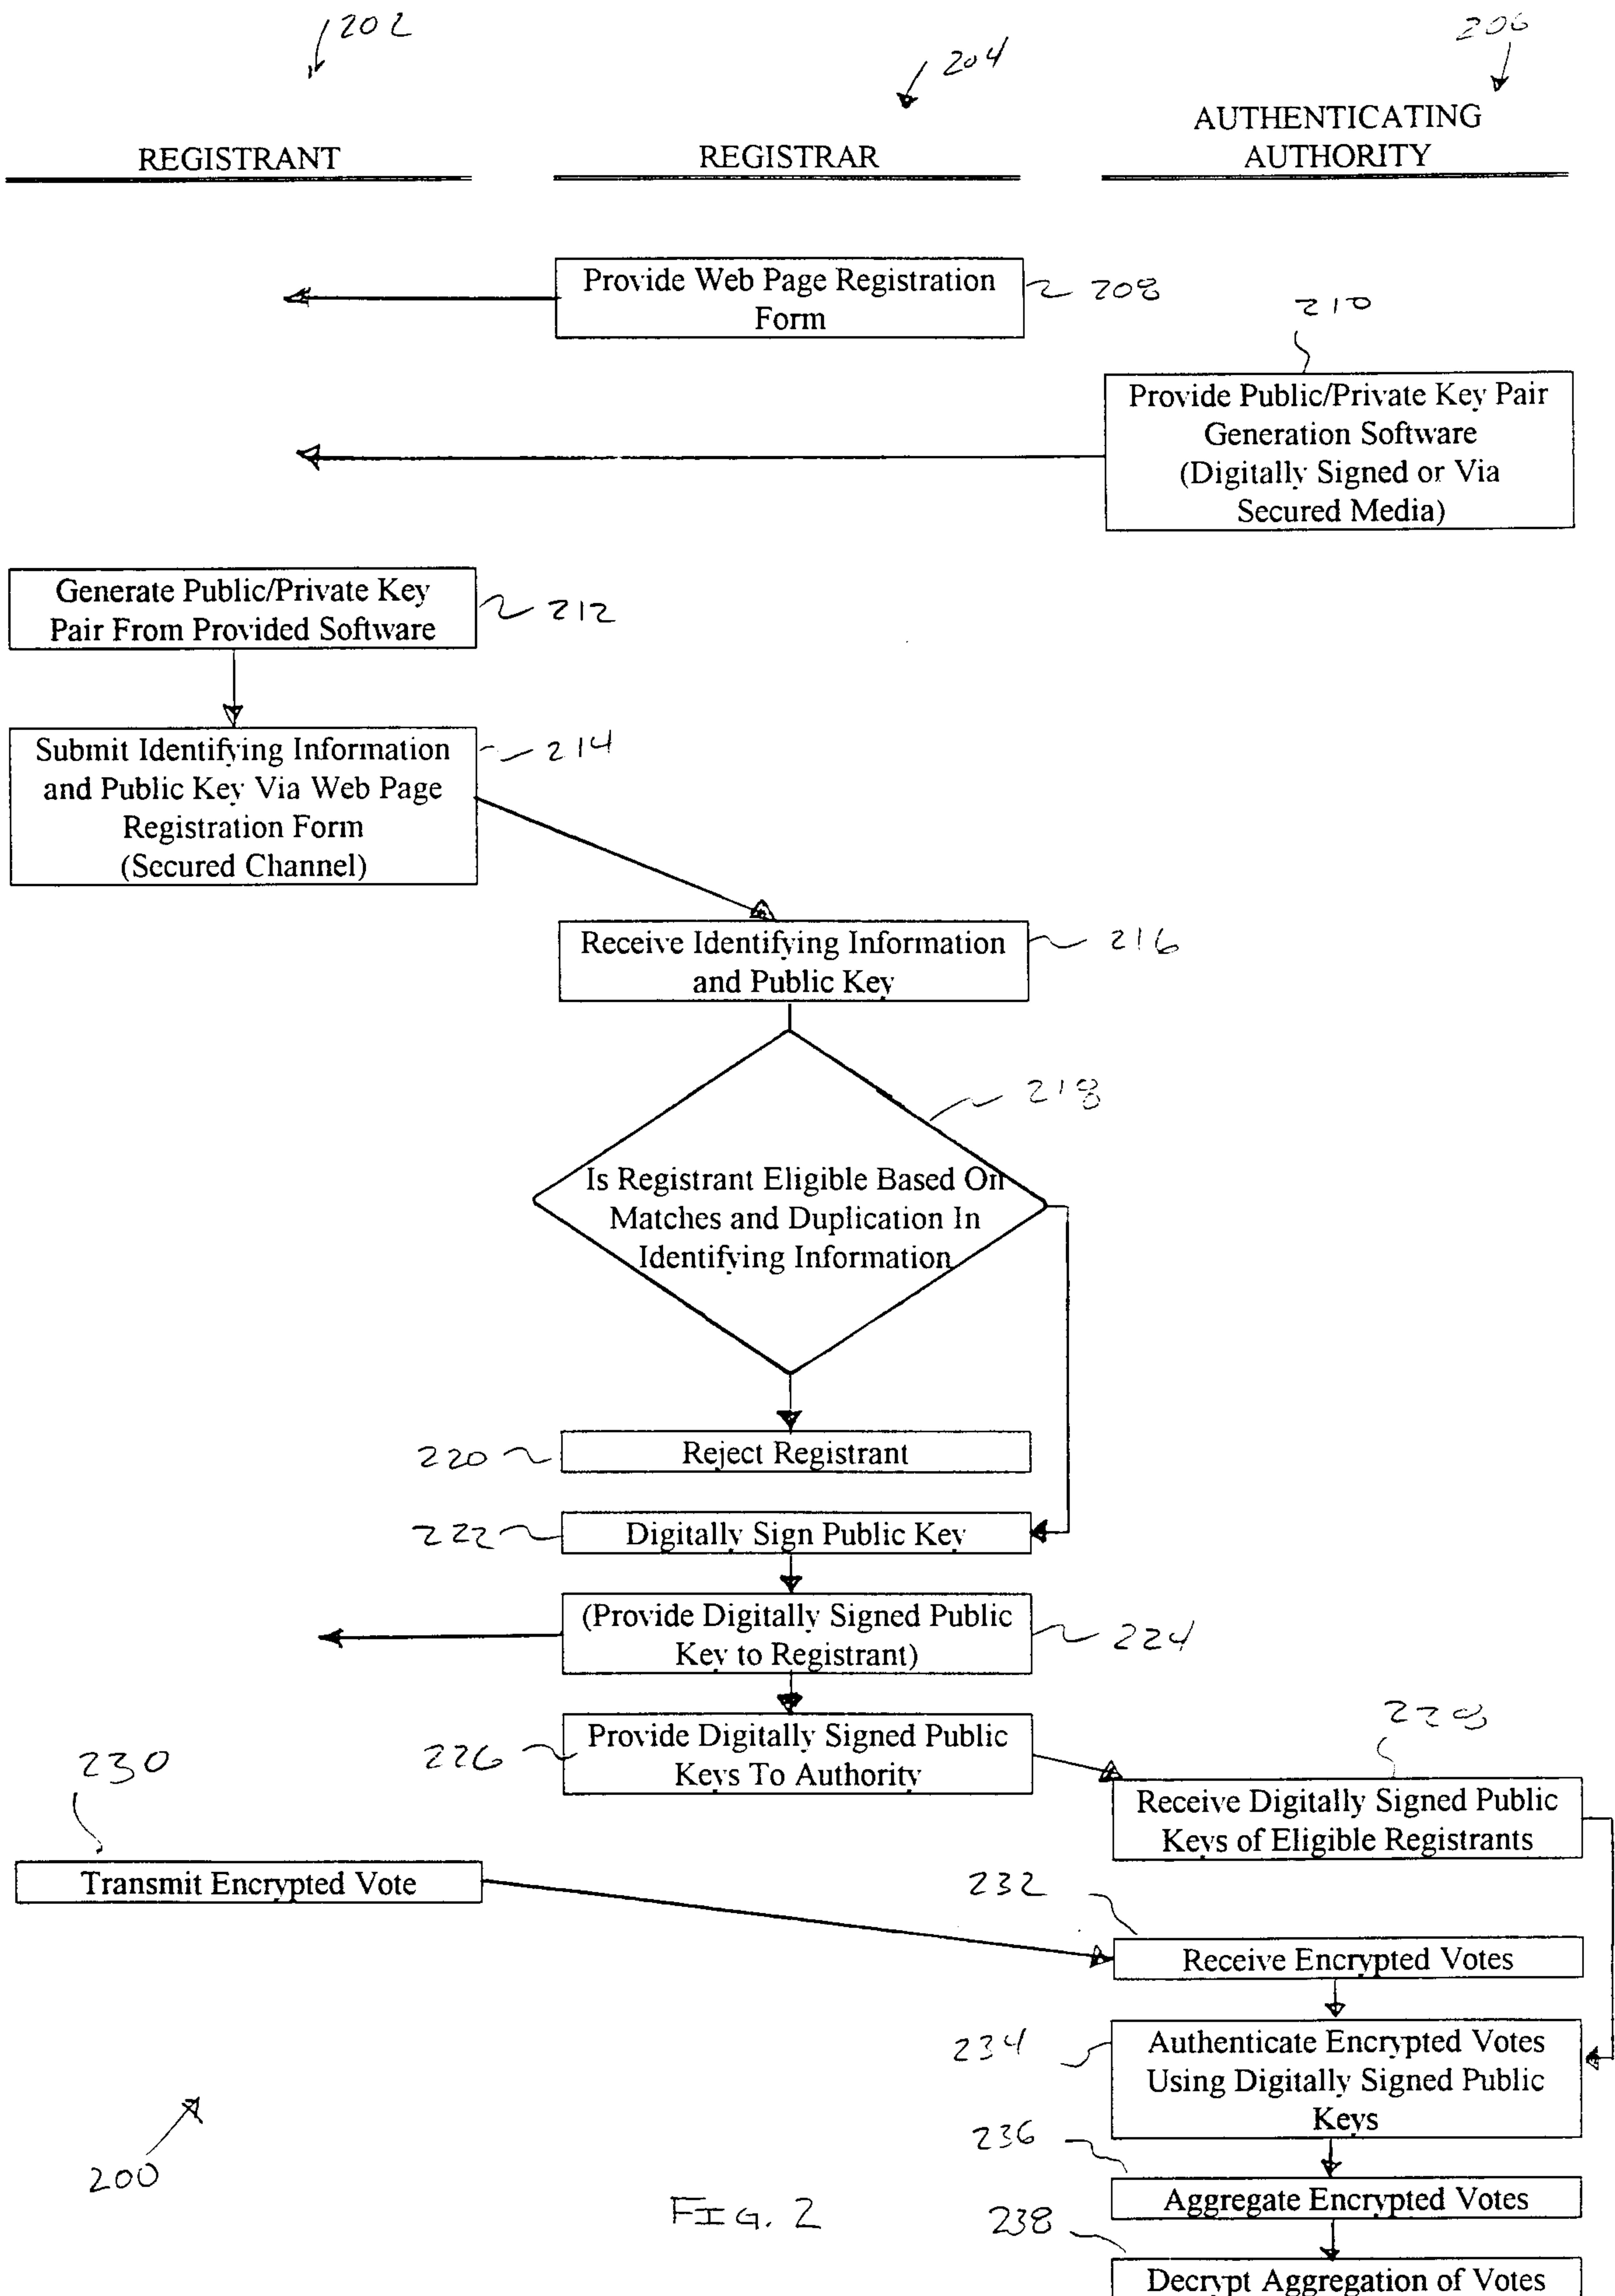

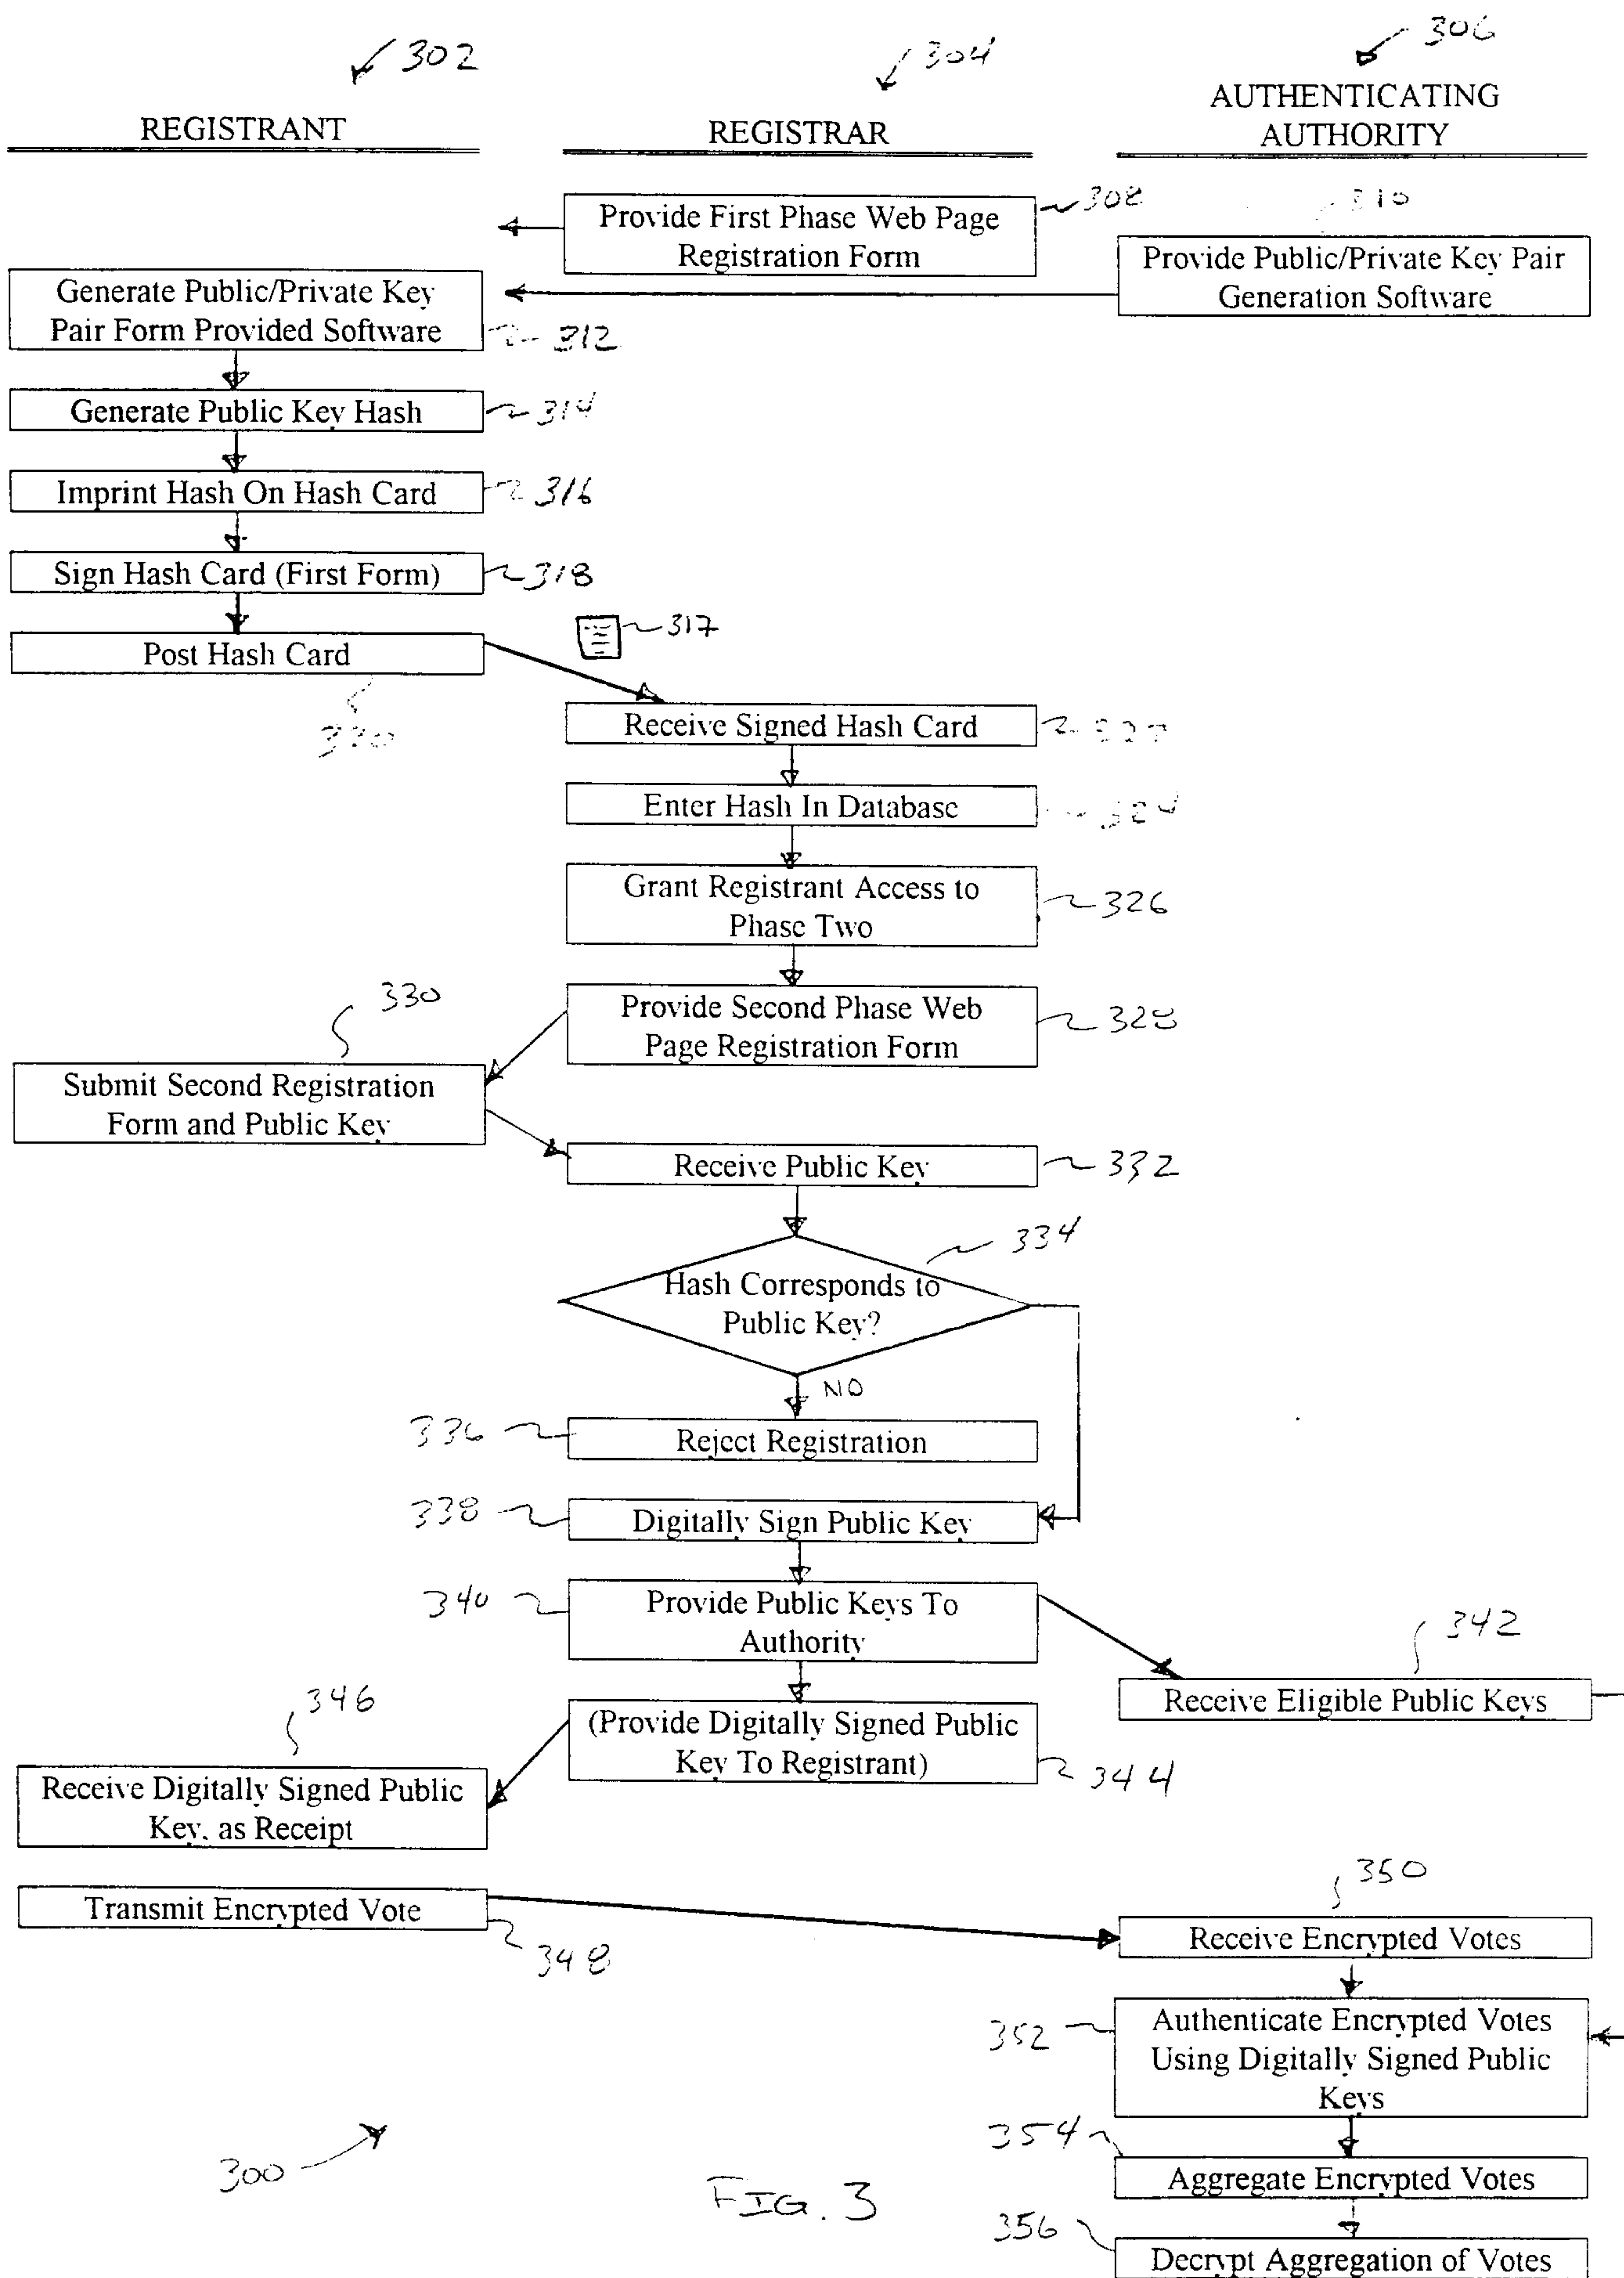

4 / 5

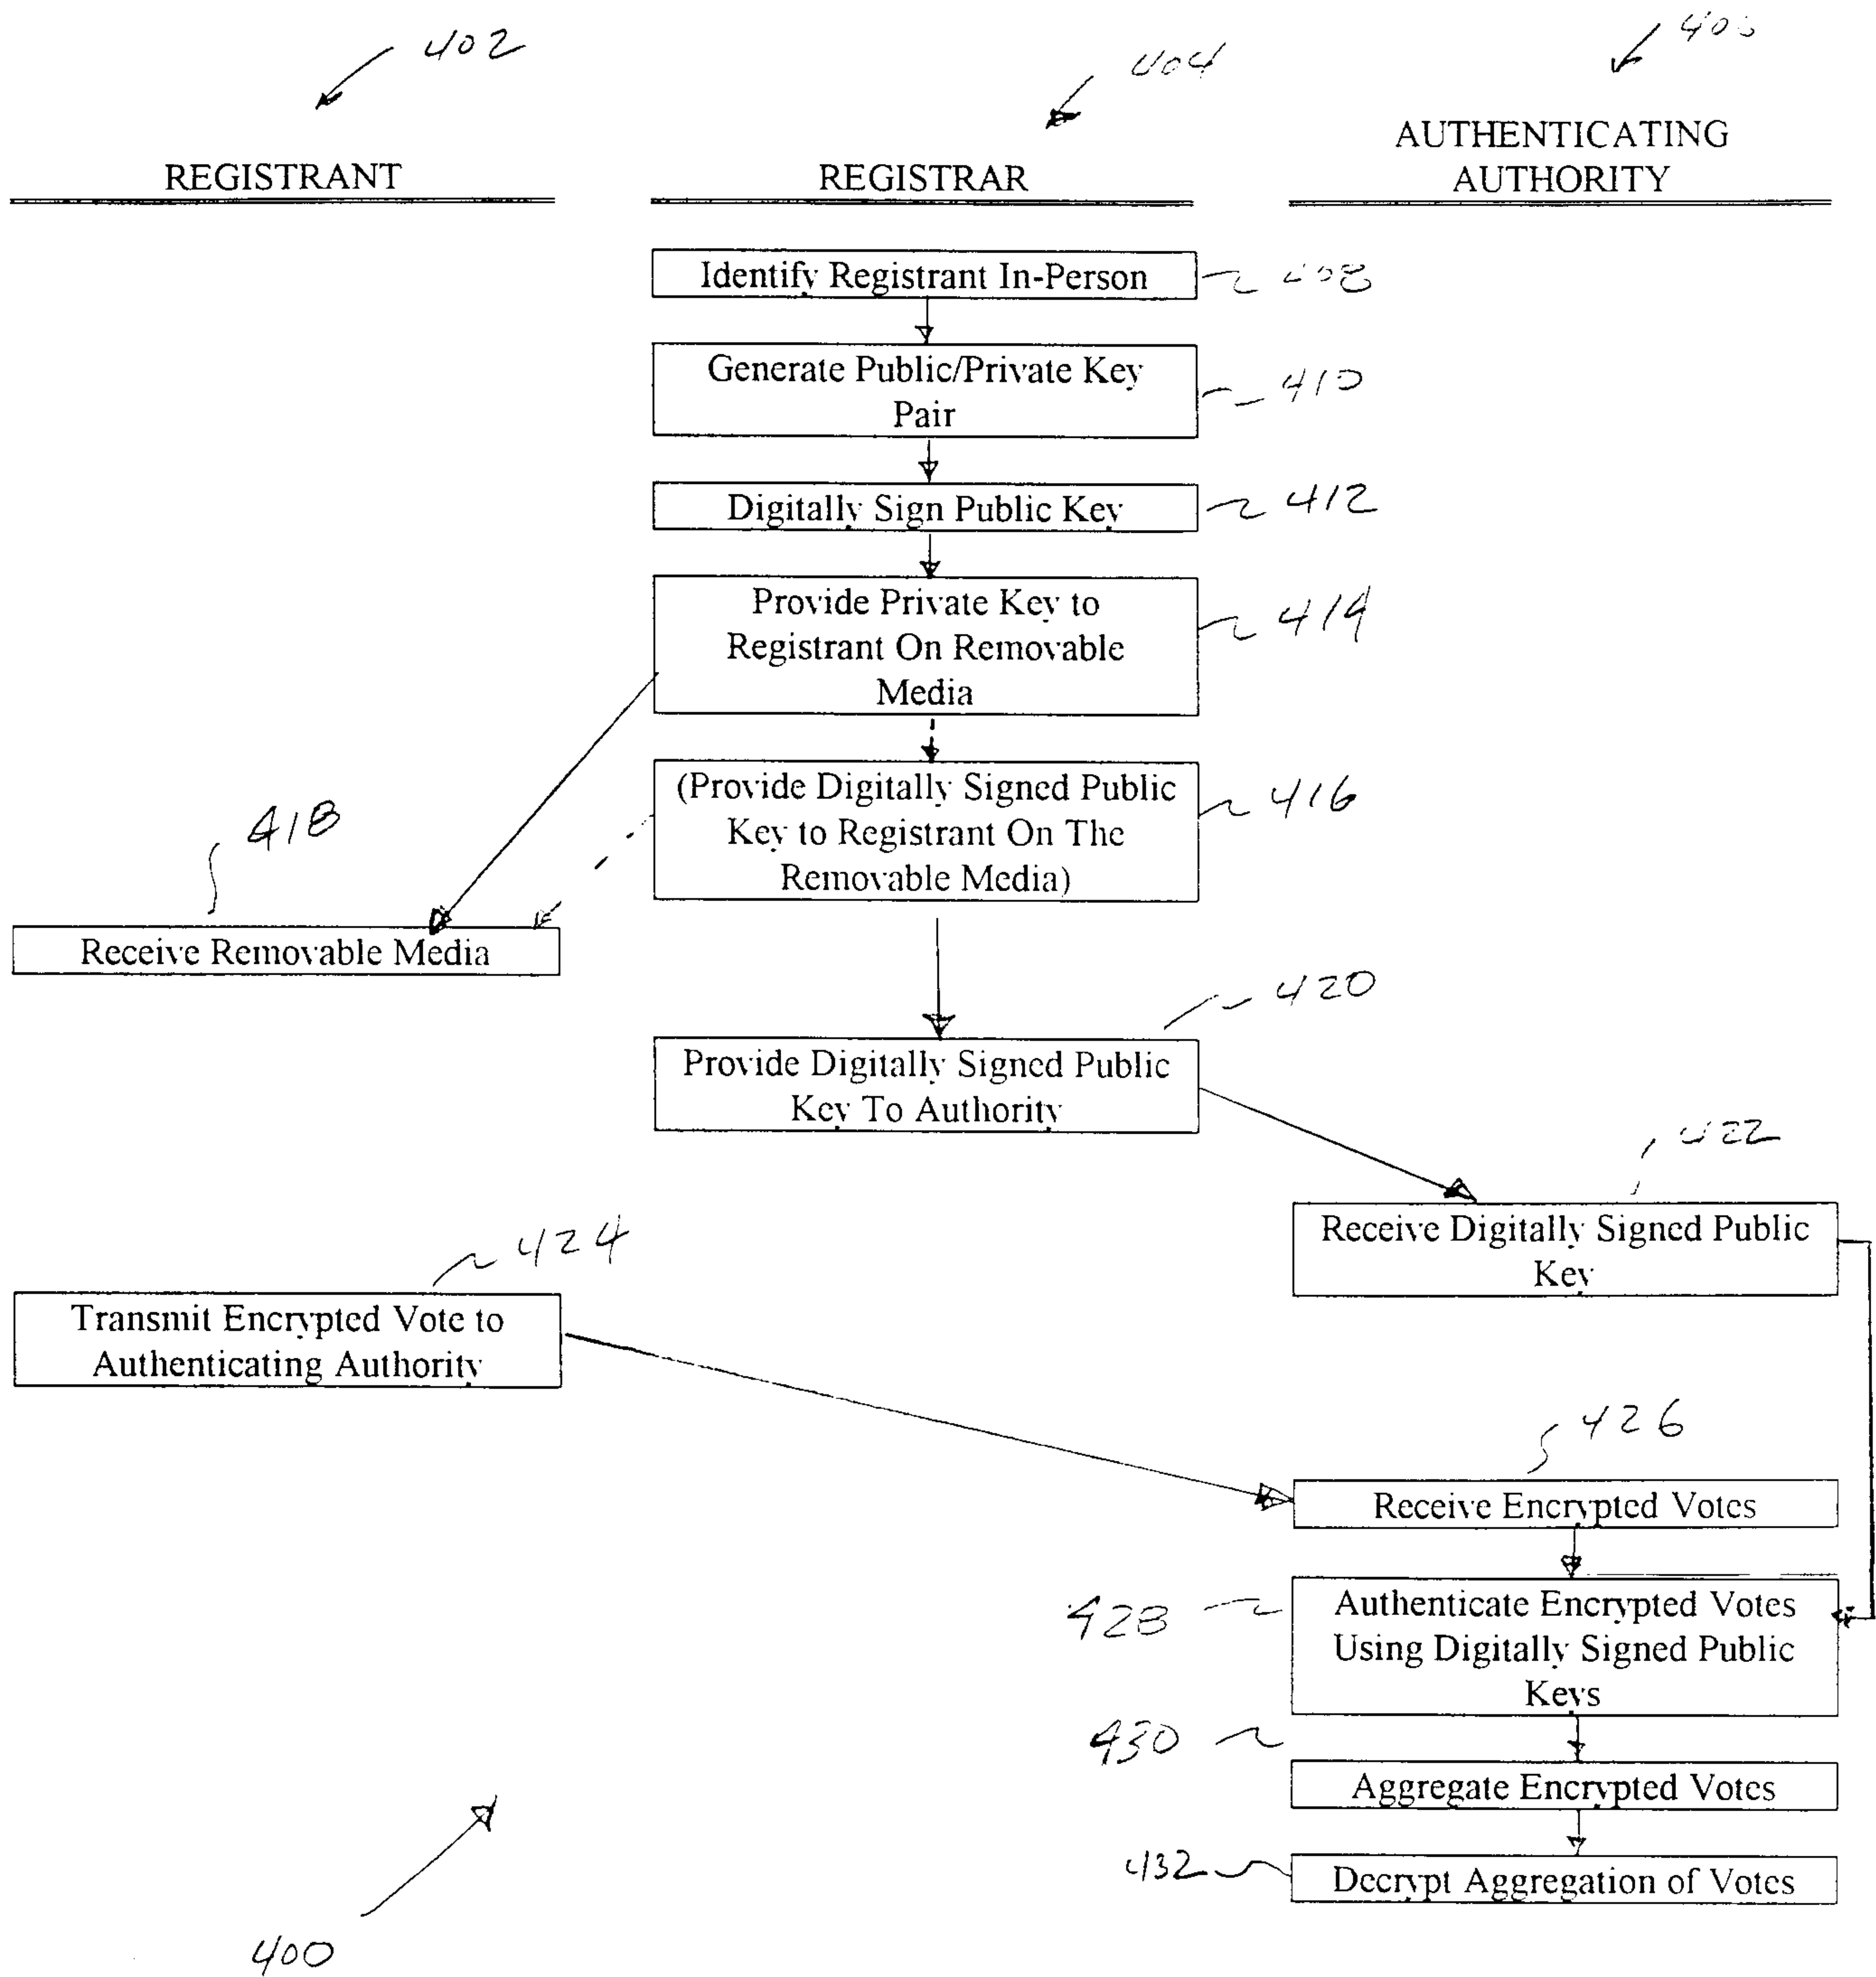


FIG. 4

