



(11) **EP 2 097 326 B1**

(12) **EUROPEAN PATENT SPECIFICATION**

(45) Date of publication and mention
of the grant of the patent:
12.01.2011 Bulletin 2011/02

(51) Int Cl.:
B65D 5/42 (2006.01) C11D 17/04 (2006.01)

(21) Application number: **07822288.2**

(86) International application number:
PCT/EP2007/061974

(22) Date of filing: **07.11.2007**

(87) International publication number:
WO 2008/064978 (05.06.2008 Gazette 2008/23)

(54) **FABRIC SHADING GUIDE**

STOFFNUANCIERLEITFADEN

DISPOSITIF DE CONTRÔLE DES NUANCES D'UN TISSU

(84) Designated Contracting States:
**AT BE BG CH CY CZ DE DK EE ES FI FR GB GR
HU IE IS IT LI LT LU LV MC MT NL PL PT RO SE
SI SK TR**

(30) Priority: **01.12.2006 EP 06125222**
29.06.2007 GB 0712554

(43) Date of publication of application:
09.09.2009 Bulletin 2009/37

(73) Proprietors:
• **Unilever PLC**
London
EC4Y 0DY (GB)
Designated Contracting States:
CY GB IE MT
• **Unilever N.V.**
3013 AL Rotterdam (NL)
Designated Contracting States:
**AT BE BG CH CZ DE DK EE ES FI FR GR HU IS IT
LI LT LU LV MC NL PL PT RO SE SI SK TR**

(72) Inventors:
• **BATCHELOR, Stephen Norman**
Bebington, Wirral Merseyside CH63 3JW (GB)
• **MAWHINNEY, Sara Louise**
Victoria 3754, (AU)
• **MENILO, Hugo Sorbo**
Mumbai 400 099 (IN)
• **ROCHA, Douglas Mesquita**
Bebington, Wirral Merseyside CH63 3JW (GB)
• **WARD, Carol Wendy**
Bebington, Wirral Merseyside CH63 3JW (GB)

(74) Representative: **Hardy, Susan Margaret**
Unilever Patent Group
Colworth House
Sharnbrook
Bedford, MK44 1LQ (GB)

(56) References cited:
EP-A2- 1 516 918 WO-A-01/32097
US-A1- 2005 059 571 US-A1- 2006 123 556

Note: Within nine months of the publication of the mention of the grant of the European patent in the European Patent Bulletin, any person may give notice to the European Patent Office of opposition to that patent, in accordance with the Implementing Regulations. Notice of opposition shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

EP 2 097 326 B1

Description

[0001] The present invention concerns a fabric whiteness guide for monitoring whiteness of a fabric.

[0002] In many circumstances, whiteness is extremely valuable to consumer. Indeed, for some garments (e.g. expensive white suit shirts, uniforms) off-whites are perceived as unacceptable. In these cases, reduced whiteness may even result in the garment being discarded by the consumer. Repeated wash-wear cycles can reduce the whiteness of a garment.

[0003] The ability of washing powders to maintain/rejuvenate whiteness may be increased by the use of shading dyes.

[0004] WO132097-A1 discloses a tooth shade guide device and package combination comprising a device frangibly attached to the package.

[0005] U.S 2005 059 571 - A1 discloses a stain removal kit including a stain removal guide to provide a stain removal regime based on a stain and fabric classification.

[0006] An objective is to provide a device and method for in-home consumer monitoring of the changes in whiteness of fabric and evaluation of the whiteness benefits of a laundry composition.

[0007] Accordingly, in a first aspect, the present invention provides a fabric whiteness guide according to claim 1.

[0008] The fabric whiteness guide allows in-home consumer monitoring of the change in whiteness of a fabric by matching the shade of the fabric with the whiteness shade displayed visually on the scale, without the need for complicated equipment or training.

[0009] The scale(s) may display a whiteness range varying progressively from low whiteness at one end of the scale to high whiteness at the other end of the scale.

[0010] A whiteness scale(s) may be defined in terms of $L^*a^*b^*$ values (the CIE LAB colour space, (CIE 1976 $L^* a^* b^*$), where L^* is the lightness value, a^* is the red-green value and b^* is the yellow-blue value.

[0011] The variation in whiteness on the scale, may be due to a combination of a change in lightness (L^*) and colouration (a^* and/or b^*).

[0012] The highest whiteness may be defined as L^*_{max} , a^*_{max} , b^*_{max} (UV-included) such that:

L^*_{max} is in the range 85-100, preferably 91-98

a^*_{max} is in the range -3 to +5, preferably -0.5 to + 1.5

b^*_{max} is in the range +5 to -15, preferably -2 to -12.

and the minimum whiteness values as L^*_{min} , a^*_{min} , b^*_{min} such that

$$\Delta L^* = L^*_{max} - L^*_{min},$$

where ΔL^* is 3 to 20 units preferably 5 to 10 units, reflecting a greying of the cloth

$$\Delta a^* = a^*_{max} - a^*_{min},$$

where Δa^* is +/- 0 to 5 units, preferably +/- 0 to 2 units

$$\Delta b^* = b^*_{max} - b^*_{min},$$

where Δb^* is -3 to -20 units preferably -5 to -12 units, reflecting a change in yellowness of the cloth.

[0013] The a^* values may be constant or at least within +/- 1 unit, to restrict the scale to focus on blue-yellow colouration rather than red-green.

[0014] The intervening whiteness values may be between the above extremes. The intervening whiteness values may be equally distributed. Alternatively, the L^* and b^* and a^* values may be lowered in alternate steps.

[0015] The scale(s) may be configured for monitoring changes in whiteness due to an increase or decrease in one particular colour (e.g. yellow). Accordingly, the b^* values may vary in either the positive or negative with the a^* values and/or L^* values maintained constant or constant at least within +/- 1 unit.

[0016] The scale may be configured for monitoring changes in whiteness due only to the change in lightness ('greyness') of a fabric. Accordingly, the L^* values may be varied and the a^* values and b^* values maintained constant to within ± 1 unit. The a^* may be maintained at zero or at least close to zero (within ± 1.0 and preferably within ± 0.3 of zero). The b^* values may be maintained constant at a value (to within ± 1 unit) which is less than 2 and preferably less than

[0017] The absolute b^* values may be raised above the level of the a^* values due to the incorporation of fluorescers which improve the perceived appearance of the whiteness guide itself.

[0018] There may be multiple scales each showing different changes in one or more in different colours and lightness, so the consumer can select the appropriate scale according to the a particular colouration/greyness of the white fabric to undergo the measuring. In this way the consumer can identify and appreciate the cause of a decrease in whiteness, by matching the fabric with the correct scale.

[0019] The whiteness scale may be continuous (where whiteness increases gradually) across the scale or it may be stepped. In the case of a stepped scale, this will comprise a plurality of discrete portions, wherein the progression from one portion of the scale to another portion, involves a step-change in whiteness.

[0020] In the case of a stepped scale the total colour difference between adjacent shades is preferably such that the shade of one portion of the scale is easily and quickly distinguished by the naked eye from the shade of an adjacent portion. This means that quick, in-home testing can be done by the busy consumer, without the need for laboratory conditions or equipment. However, at the same time it is preferred that the scale is focussed on subtle changes in whiteness within a restricted range of high whiteness values.

[0021] Accordingly, the difference in whiteness between adjacent portions may be defined such that the colour of each portion has Lab values: L_n^* , a_n^* , b_n^* , defined by :

$$L_n^* = L_{\max}^* - \frac{(n-1)}{(N-1)} \Delta L^*$$

$$a_n^* = a_{\max}^* - \frac{(n-1)}{(N-1)} \Delta a^*$$

$$b_n^* = b_{\max}^* - \frac{(n-1)}{(N-1)} \Delta b^*$$

where the highest whiteness has $n=1$, there are N discrete shades of whites in the scale and the shades decrease in whiteness in equal steps (± 0.3 units) along the 3 axes.

[0022] Preferably, the total colour difference represented as the ΔE value (corresponding to the positive square root of $[(L_n^* - L_{n-1}^*)^2 + (a_n^* - a_{n-1}^*)^2 + (b_n^* - b_{n-1}^*)^2]$ is preferably greater than or equal to 0.5, and more preferably 0.5 to 2.0, (UV-included).

[0023] The values of L^* and b^* may vary alternately on the scale, such L^* only changes when n is an even number and b^* when n is an odd number.

[0024] The values of L^* and b^* may vary alternately on the scale, such b^* only changes when n is an even number and L^* when n is an odd number.

[0025] The L^* value may decrease linearly whereas the b^* values decrease for even values of n .

[0026] The b^* value may decrease linearly with each value of n , whereas the L^* values are only decreased for even values of n .

[0027] The portions may have a uniform shade of white. A uniformly shaded portion is easier for the consumer to match with the fabric.

[0028] By "continuous", it is meant that the change in whiteness appears (to the naked eye) continuous along the scale or scales. A continuous scale(s) may however, include demarcation by visual indicia e.g. lines, so as to divide up the scale into multiple portions. This makes it easier for the consumer to remember, without recording, roughly where the whiteness of the fabric falls on the scale.

[0029] The scale or scales may be labelled with directional visual indicia to direct the user to hold the product in a

predetermined orientation. The higher whiteness values may be on one side i.e., the right or left of the user (when facing the product).

[0030] The portions of the scale or scales may be labelled with numbers, names, logos etc. applied by e.g. printing to ease monitoring.

[0031] The portions of the scale or scales may be arranged in a single, straight row. Alternatively, the portions may be arranged in multiple rows. The row or rows may be straight or curved.

[0032] Preferably the portions are of equal size and shape. This is advantageous in that no portion/s is/are given undue preference due to size. This affords more accurate comparison between the whiteness of the portions and the fabric based on whiteness.

[0033] The portions are 0.5 to 4 cm, and may be greater than 2 cm in length / diameter. By length/diameter it is meant the greatest length/diameter of a shape e.g. this will be the diameter of a circle, the greater diameter of an ellipse, the length of a side of a square, and the length of the longer side of a rectangle.

[0034] The whiteness scale is preferably a rectangle and is preferably 1-4cm, and may be greater than 2 cm by 10-12 cm.

[0035] The guide may comprise apertures corresponding with the scale, whereby the fabric can be viewed through the apertures to identify the level of whiteness according to the scale.

[0036] If the guide includes apertures, it is preferred that the length or diameter of the portions are at least 1.3 times, more preferably two times the length or diameter of the apertures. Preferably the portions are at least 1 cm in diameter and more preferably at least 3cm. This allows a large area of the guide to surround the aperture for matching with the fabric to be tested.

[0037] The apertures may correspond with the portions, and there may be one aperture per portion. Alternatively there may be more than one aperture per portion so that the whiteness of the fabric is viewed through multiple apertures, which may be in a pattern or grid. The aperture or apertures may be entirely enclosed within the perimeter of the or each portion.

[0038] Alternatively or additionally, one or more of the apertures may be in the form of a shape which is cut into the perimeter of the portion i.e. so that it is not enclosed by the perimeter, but itself forms part of the perimeter.

[0039] The aperture may have a curved perimeter. It may be circular or elliptical. A curved perimeter is advantageous as it can make judging the shade easier for the human eye.

[0040] The aperture may have an undulating perimeter, and the undulations may be such that the shape has multiple (2-dimensional) protrusions.

[0041] Alternatively the shape may be angular, such as star shaped.

[0042] Visually interesting shapes such as undulating and star shapes provide visual stimulæ for the consumer, to attract the consumer to do the testing and also providing visual stimulæ during testing.

[0043] The whiteness scale may have 3-20 portions, preferably 8-14 portions. A more complicated scale offers greater accuracy however excessively complicated scales will put off many consumers. Surprisingly a very simple scale increases the frequency of use of the device for first time users, and monitoring becomes more habitual. There may be a choice of scales, a first scale having 3-20 portions and at least one other scale having a lower number, such as half, than the first scale.

[0044] The scale may have less than 10 portions. This is advantageous for whiteness guides focussed on a restricted range of whiteness, as described above. This is the optimum range which provides portions which are easily visually distinguished by the consumer.

[0045] The guide may be a planar member. By planar, it is meant less than 2mm thick, preferably less than 1 mm. This has the advantage that the surface carrying the scale is not distanced (by thickness) from the fabric substrate during measuring, which allows for more accurate comparisons.

[0046] Preferably the guide is sufficiently flexible so it can flex to lie against a flexible substrate such as fabric. This has the advantage that the guide can be easily flexed to conform to the shape of a garment to carry out the whiteness comparison.

[0047] Alternatively the guide is integral with the packaging, e.g. printed on the side of the pack. This reduces packaging material, prevents the guide being accidentally lost and also the consumer is reminded to use the guide each time they dose from the pack.

[0048] The scale may be initially integral with a part of the packaging but detachable there from e.g by cutting or by the use of weakened linkages such as one or more areas/lines of perforations, thinning etc.

[0049] The integral shading guide may be internal or external of the pack. The guide may comprise an extension of the package wall or flap, so that removal of the guide by the consumer for use, does not comprise the pack structure.

[0050] The shading guide may be provided adjacent or as part of a closure system which must be opened by the consumer to gain initial access. This draws the device to the consumer's attention and reduces the likelihood that it becomes lost as might happen in the case of loose packed guides.

[0051] The closure mechanism might incorporate one or more seals which are torn opened on first opening. The guide may be adhered or adjacent to one or more of such seals. There may be multiple seals for closure of the pack before

sale, and such multiple seals may present pockets, enclosures or recesses. The guide may be at least partially enclosed in such recesses so that on opening the guide is revealed to the consumer.

[0052] In a second aspect, the invention provides a method of consumer-measuring of the whiteness of a fabric, the method including the step of comparing the fabric with a scale of whiteness of the first aspect of the invention including any optional, advantageous features as described above.

[0053] The step of comparing may take place after washing with a laundry composition. Alternatively or additionally, it may also take place before washing. This allows the consumer to evaluate the efficacy of the washing process to improve whiteness. The step of comparing may take place before and/or after consecutive washes, for evaluation of the progressive improvement in whiteness of a particular washing composition. The guide can confirm the maintenance of whiteness due to a particular washing composition.

[0054] The invention also allows the consumer to compare the different washing compositions or brands of compositions or other conditions such as temperature of the wash. The step of comparing may take place after other events which affect washing, for instance drying of washed fabrics outside, in sunlight etc.

[0055] In a third aspect, the invention provides a package containing a laundry composition in combination with a fabric whiteness guide of the first aspect, including any optional advantageous features as described above, and preferably together with instructions for use of said fabric whiteness guide to measure the whiteness of a fabric according to the method of the second aspect including any optional, advantageous features as described above.

[0056] The provision of a whiteness guide together with the washing powder enables the consumer to effectively monitor the effectiveness of the powder and appreciate the benefit of whiteness agents added to the washing powder. Thus the consumer is given more control over the evaluation of different products and different washing and also drying conditions.

[0057] The guide may be perfumed, and the perfume of the guide may be the same as or correspond with the perfume of the laundry composition.

[0058] The detergent powder may contain an agent for improving or maintaining whiteness. The agent may comprise one or more dyes for increasing perceived whiteness.

[0059] Preferably the dye, or dyes together, has/have a peak absorption wavelength on the substrate fabric of 540 nm to 650 nm, and further preferably from 570 nm to 630 nm.

[0060] Dyes that are substantive to fabrics may be used.

[0061] The dyes may be a direct dye so as to be substantive to cotton or they may be disperse and solvent dyes which are substantive to synthetic fibres e.g., polyester and nylon. The composition may contain a mixture of dye so as to be substantive to both fibres.

[0062] The laundry composition may contain predominately anionic surfactants. In this case dyes containing acid groups are preferred. For use in products which contain predominantly cationic surfactants, dyes containing basic groups are preferred. This is to prevent precipitation between the dye and surfactant.

[0063] Suitable dyes for use in products containing predominately anionic surfactants include those listed in the Colour Index as Direct Violet Dyes Direct Blue dyes, Acid Blue and Acid Violet dyes.


[0064] Dyes which may be metabolised to carcinogenic amines should not be used. For example dyes which when reduced release benzidine, 3,3'-dimethoxybenzidine, 3,3'-dimethylbenzidine or 3,3'-dichlorobenzidine should not be used.

[0065] The laundry composition may contain predominately cationic surfactants. Suitable dyes here include those listed in the Colour Index as Basic Blue and Basic Violet Dyes.

[0066] The dyes may comprise one or more hydrophobic dyes selected from benzodifuranes, methine, triphenylmethanes, naphthalimides, pyrazole, naphthoquinone, anthraquinone and mono-azo or di-azo dyes. Hydrophobic dyes are dyes which do not contain any charged water solubilising group. Hydrophobic dyes may be selected from the groups of disperse and solvent dyes. Blue and violet anthraquinone and mono-azo dye are preferred.

[0067] Preferred dyes include solvent violet 13, disperse violet 27 disperse violet 26, disperse violet 28, disperse violet 63 and disperse violet 77

[0068] The shading dye(s) may be a direct violet dye. These are particularly useful for cotton containing fabrics Preferred are dyes are selected from the group comprising bis-azo direct violet dyes of the formula:

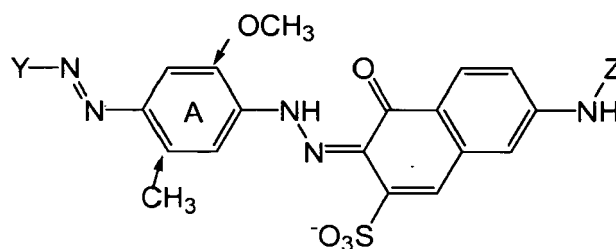

where Z is H or phenyl, the A ring is preferably substituted by a methyl and methoxy group at the positions indicated by arrows, the A ring may also be a naphthyl ring, the Y group is a phenyl or naphthyl ring, which may be substituted by sulphonate groups and may be mono or disubstituted by methyl groups.

[0069] The shading dye(s) may comprise the dyes direct violet 7, direct violet 9, direct violet 11, direct violet 26, direct violet 31, direct violet 35, direct violet 40, direct violet 41, direct violet 51, and direct violet 99.

[0070] Cu containing direct dyes such as direct violet 66 may also be used.

[0071] The shading dye(s) may comprise acid dyes for shading cotton and may be selected from acid blue 98, acid violet 17, acid violet 50, acid black 1, acid red 51, acid red 17 acid blue 29. One preferred acid shading dye is acid blue 98.

[0072] The shading dye may comprise a photobleach covalently linked to another blue or violet chromophore.

[0073] The shading dye may comprise a reactive dye covalently linked to a polymer or a solid particle.

[0074] The shading dye may comprise a dye adsorbed onto a solid particle, such as a clay.

[0075] For ease of incorporation into laundry products it is preferred if the shading dye is supplied in a liquid form.

[0076] The level of dye in the laundry composition may be in the range from 0.000001 wt % to 0.01 wt % preferably in the range from 0.0001 to 0.01, and preferably 0.0002 to 0.005 wt%.

[0077] The composition may comprise a fluorescent agent (optical brightener). Fluorescent agents are available commercially. The fluorescent agent may be supplied and used in the form of their alkali metal salts, for example, the sodium salts. The total amount of the fluorescent agent or agents used in the composition may be generally from 0.005 to 2 wt %, preferably 0.01 to 0.1 wt %.

[0078] Preferred classes of fluorescer are: Di-styryl biphenyl compounds, e.g. Tinopal (Trade Mark) CBS-X, Di-amine stilbene di-sulphonic acid compounds, e.g. Tinopal DMS pure Xtra and Blankophor (Trade Mark) HRH, and Pyrazoline compounds, e.g. Blankophor SN. Preferred fluorescers are: sodium 2 (4-styryl-3-sulfophenyl)-2H-naphthol[1,2-d]triazole, disodium 4,4'-bis{[(4-anilino-6-(N methyl-N-2 hydroxyethyl) amino 1,3,5-triazin-2-yl)]aminostilbene-2-2'} disulfonate, disodium 4,4'-bis{[(4-anilino-6-morpholino-1,3,5-triazin-2-yl)]amino} stilbene-2-2' disulfonate, and disodium 4,4'-bis(2-sulfostyryl)biphenyl.

[0079] The laundry composition and whiteness guide may include a common shading dye or fluorescer, as described above.

[0080] The present invention relates to compositions which are used to treat laundry items such as clothes. Such compositions are preferably laundry detergent compositions used for washing (especially particulate detergents, liquid detergents, laundry bars, pastes, gels or tablets), laundry fabric conditioners used for softening fabrics, pretreatment products, post-treatment products, tumble dryer products, ironing products etc. Preferably they are laundry treatment products which are applied in an aqueous environment.

[0081] Various non-limiting embodiments of the invention will now be more particularly described with reference to the following figures in which:

Figure 1 shows a packaged laundry composition according to embodiments of the invention where the package is a carton;

Figure 2 shows a packaged laundry composition according to embodiments of the invention where the package is a flexible bag; and

Figure 3 shows a whiteness guide with apertures according to further embodiments of the invention including a loose or removable whiteness guide.

[0082] Referring now to figure 1, a paperboard carton 1 is shown, having scale 3 printed thereon.

[0083] The container is preferably formed from paperboard or cardboard, but may include layers of metal or plastic materials for barrier purposes, etc.

[0084] The scale consists of five 3 x 3cm² square portions, numbered 1,2,3,4,5 from left to right. The portions have

EP 2 097 326 B1

the following LAB values measured using a reflectometer with UV included:

	L*	a*	b*
1	93.0	0.5	-3
2	92.0	0.5	-2
3	91.0	0.5	-1
4	90.0	0.5	0
5	89.0	0.5	+1

[0085] The carton contains granular laundry composition A or B or C or D (as described below).

[0086] In a further embodiment, the carton is as described above, except that the scale consists of five 2 x 2cm² square portions. The boxes had the following L*,a*,b* values measured using a reflectometer with UV included:

	L*	a*	b*
1	95.0	0.5	-6
2	93.0	0.5	-4
3	91.0	0.5	-2
4	89.0	0.5	0
5	87.0	0.5	+2

[0087] The carton contains 1kg of composition A or B or C or D.

[0088] Referring now to figure 2, a flexible plastic bag 5 is shown. The bag 5 has a whiteness scale printed onto the outside. The scale consists of five 2 x 2cm² square portions, numbered 1,2,3,4,5 from left to right. The portions have the following L*,a*,b* values measured using a reflectometer with UV included:

	L*	a*	b*
1	90.0	0.5	-4
2	88.0	0.5	-2
3	86.0	0.5	0
4	84.0	0.5	+2
5	82.0	0.5	+4

[0089] The pack contains 1kg of laundry composition A or B or C or D.

[0090] A further embodiment comprises the plastic pack as described above in reference to figure 2 except that the portions have the following LAB values measured using a reflectometer with UV included:

	L*	a*	b*
1	90.0	0.5	-4
2	88.0	0.5	-4
3	88.0	0.5	-2
4	86.0	0.5	-2
5	86.0	0.5	0

[0091] The pack contains a laundry composition A or B or C or D.

[0092] In further embodiments, the above packages are provided with whiteness scales printed onto a cardboard strip. The strip is provided loose within or removable from the package so that it can be retrieved on first opening by the

EP 2 097 326 B1

consumer. The portions may be 3 x 3 cm.

[0093] In further embodiments, the above cardboard strip 7 is 20 cm long and 6 cm wide. At the top of the card 7 in a space 2 cm long and the width of the card, a tradename is printed (not shown). The rest of the card is equally divided into boxes of 3 x 3 cm, so that there are 12 boxes in total. The whiteness of the boxes are as follows:

	L*	a*	b*
1	92.5	0.5	-7
2	92.0	0.5	-6.2
3	91.5	0.5	-5.4
4	91.0	0.5	-4.6
5	90.5	0.5	-3.8
6	90.0	0.5	-3.0
7	89.5	0.5	-2.2
8	89.0	0.5	-1.4
9	88.5	0.5	-0.6
10	88.0	0.5	+0.2
11	87.5	0.5	+1.0
12	87.0	0.5	+1.8

[0094] A circular hole 11 of 1cm radius is cut into the centre of each portion.

[0095] The circular hole 11 allows the consumer to view the fabric within an window surrounded by an area of the whiteness shade of the scale. The size of the hole 11 relative to the size of the portion is selected so that there is sufficient area of the whiteness shade to enable quick, accurate matching of the fabric with the whiteness shade.

[0096] In one embodiment, the portions are arranged in a single row. In a further embodiment, the portions are in two rows (shown at dotted line B).

Exemplary Laundry Formulations A,B,C,D

[0097]

Formulation	A	B	C	D
NaLAS	15	20	10	12
NI(7EO)	-	-	-	8
Na tripolyphosphate	7	15	-	-
Soap	-	-	-	1
Zeolite A24	-	-	-	17
Sodium silicate	5	4	5	1
Sodium carbonate	23	20	30	20
Sodium sulphate	40	30	40	20
Carboxymethylcellulose	0.2	0.3	-	0.5
Percarbonate	2	3	-	10
TAED	0.5	0.8	-	4
Protease	0.005	0.01	-	0.005
Amylase	0.001	0.003	-	-
Cellulase	-	0.003	-	-

(continued)

Formulation	A	B	C	D
Fluorescer	0.1	0.15	0.05	0.3
Direct Violet 9	0.0006	0.0008		0.0004
Direct Violet 99	-	-	0.0004	-
Solvent Violet 13	-	0.02	0	0.01
Sulfonated Zn Pthalocyanine photobleach	0.002	0.004	-	-
Water/impurities/minors	remainder	remainder	remainder	remainder

[0098] Enzyme levels are given as percent pure enzyme. Levels of direct violet 9, direct violet 99, solvent violet 13 and Sulfonated Zn Pthalocyanine photobleach are given as pure dye. NI(7EO) refers to $R-(OCH_2CH_2)_nOH$, where R is an alkyl chain of C12 to C15, and n is 7.

[0099] The formulations are prepared by adding direct violet 9, direct violet 99 and the Sulfonated Zn Pthalocyanine photobleach into the slurry which is then spray dried. Alternatively, the dyes and photobleach may be added via post-dosed $MgSO_4$ granules.

[0100] The solvent violet 13 was dissolved in non-ionic surfactant (7EO) and granulated onto zeolite, to give a granule containing 0.2wt% dye. This was post-dosed to the formulation.

Claims

1. A laundry package and fabric whiteness guide comprising at least one visual scale of whiteness, wherein the guide is integral with a part of the package, **characterised in that** the guide comprises a plurality of discrete portions and said portions are 0.5-4cm in length or diameter.
2. A laundry package and fabric whiteness guide according to claim 1 wherein the guide is initially integral with a part of the package but is detachable therefrom.
3. A laundry package and fabric whiteness guide according to claim 1 wherein the guide is detachable by lines/areas of weakness.
4. A laundry package and fabric whiteness guide according to any preceding claim wherein the guide comprises an extension of a package wall or flap.
5. A laundry package and fabric whiteness guide according to any preceding claim wherein the guide is provided adjacent or as part of a closure system which must be opened by the consumer to gain initial access.
6. A laundry package and fabric whiteness guide according to any preceding claim wherein the guide is adhered or adjacent to one or more seals of the packaging.
7. A laundry package and fabric whiteness guide according to any preceding claim wherein the guide is at least partially enclosed on initially opening by recesses defined at least partially by packaging closure seals, wherein said packaging closure seals are torn on initial opening of the package.
8. A laundry package and fabric whiteness guide according to any preceding claim wherein the whiteness scale(s) has maximum whiteness defined as L^*_{max} a^*_{max} b^*_{max} (UV included) such that L^*_{max} is in the range 85-100.
 a^*_{max} is in the range -3 to +5.
 b^*_{max} is in the range +5 to -15.
9. A laundry package and fabric whiteness guide according to any preceding claim wherein the whiteness scale has minimum whiteness values as L^*_{min} , a^*_{min} , b^*_{min} such that $\Delta L^* = L^*_{max} - L^*_{min}$ where ΔL^* is 3 to 20 units, reflecting a greying of the cloth $\Delta a^* = a^*_{max} - a^*_{min}$ where Δa^* is +/- 0 to 5 units $\Delta b^* = b^*_{max} - b^*_{min}$, where Δb^* is -3 to -15 units reflecting a change in yellowness of the cloth.

10. A laundry package and fabric whiteness guide according to any preceding claim wherein progression from one portion to another involves a step-change in whiteness.
- 5 11. A laundry package and fabric whiteness guide according to any preceding claim wherein each of the portions has a uniform shade of whiteness.
- 10 12. A laundry package and fabric whiteness guide according to any preceding claim wherein the total colour difference ΔE value (corresponding to the positive square root of $[(L^*_n - L^*_{n-1})^2 + (a^*_n - a^*_{n-1})^2 + (b^*_n - b^*_{n-1})^2]$ between adjacent portions is greater than or equal to 0.5
13. A laundry package and fabric whiteness guide according to any preceding claim including apertures corresponding with the scale.
- 15 14. A laundry package and fabric whiteness guide according to claim 13 wherein the apertures correspond with the portions.
- 15 15. A laundry package and fabric whiteness guide according to claim 14 wherein the length or diameters of the portions are at least 1.3 times the length or diameter of the apertures.
- 20 16. A laundry package and whiteness guide according to any preceding claim wherein said package contains a laundry composition.
- 25 17. A laundry package and fabric whiteness guide according to claim 16 wherein the laundry composition contains an agent for improving or maintaining whiteness.
- 25 18. A laundry package and fabric whiteness guide according to claim 17 wherein the agent for improving or maintaining whiteness comprises one or more dyes for increasing perceived whiteness.
- 30 19. A laundry package and fabric whiteness guide according to claim 18 wherein the dye or dyes together has/have a peak absorption wavelength on the substrate fabric of 540 nm to 650 nm.
- 30 20. A method of consumer-measuring and/or monitoring of the whiteness of a fabric, the method including the step of comparing the fabric with a scale of whiteness of the guide of any preceding claim.
- 35 21. A laundry package and fabric whiteness guide according to any of claims 1-19 further including instructions for use of said fabric whiteness guide to measure the whiteness of a fabric according to the method of claim 20.

Patentansprüche

- 40 1. Waschmittelpackung und Gewebeweißgrad-Leitfaden, umfassend wenigstens eine visuelle Skala des Weißgrads, wobei der Leitfaden Bestandteil der Packung ist, **dadurch gekennzeichnet, dass** der Leitfaden eine Vielzahl getrennter Bereiche umfasst und die Bereiche 0,5 bis 4 cm in der Länge oder im Durchmesser sind.
- 45 2. Waschmittelpackung und Gewebeweißgrad-Leitfaden nach Anspruch 1, wobei der Leitfaden beim anfänglichen Öffnen integraler Bestandteil der Packung ist, aber davon ablösbar ist.
3. Waschmittelpackung und Gewebeweißgrad-Leitfaden nach Anspruch 1, wobei der Leitfaden durch geschwächte Linien/Bereiche ablösbar ist.
- 50 4. Waschmittelpackung und Gewebeweißgrad-Leitfaden nach einem vorangehenden Anspruch, wobei der Leitfaden eine Verlängerung einer Packungswand oder einer Packungsklappe umfasst.
- 55 5. Waschmittelpackung und Gewebeweißgrad-Leitfaden nach einem vorangehenden Anspruch, wobei der Leitfaden benachbart zu einem Schließsystem oder als Teil eines Schließsystems angebracht ist, welches vom Verbraucher geöffnet werden muss, um einen anfänglichen Zugang zu erreichen.
6. Waschmittelpackung und Gewebeweißgrad-Leitfaden nach einem vorangehenden Anspruch, wobei der Leitfaden

an eine oder mehrere Versiegelung(en) der Verpackung angeklebt ist oder an eine oder mehrere Versiegelung(en) der Verpackung angrenzt.

- 5 7. Waschmittelpackung und Gewebeweißgrad-Leitfaden nach einem vorangehenden Anspruch, wobei der Leitfaden wenigstens teilweise beim anfänglichen Öffnen durch Aussparungen eingeschlossen ist, die wenigstens teilweise durch Verpackungsverschluss-Versiegelungen definiert sind, wobei die Verpackungsverschluss-Versiegelungen beim anfänglichen Öffnen der Packung gezogen werden.
- 10 8. Waschmittelpackung und Gewebeweißgrad-Leitfaden nach einem vorangehenden Anspruch, wobei die Weißgradskala (Weißgradskalen) einen maximalen Weißgrad hat (haben), der definiert ist als $L^*_{\max}$ $a^*_{\max}$ $b^*_{\max}$ (UV eingeschlossen), so dass
 $L^*_{\max}$ im Bereich von 85-100 ist,
 $a^*_{\max}$ im Bereich von -3 bis +5 ist,
 $b^*_{\max}$ im Bereich von +5 bis -15 ist.
- 15 9. Waschmittelpackung und Gewebeweißgrad-Leitfaden nach einem vorangehenden Anspruch, wobei die Weißgradskala Minimum-Weißgrad-Werte als $L^*_{\min}$, $a^*_{\min}$, $b^*_{\min}$ hat, so dass
 $\Delta L^* = L^*_{\max} - L^*_{\min}$, wobei ΔL^* 3 bis 20 Einheiten ist,
was eine Vergrauung des Stoffs widerspiegelt,
20 $\Delta a^* = a^*_{\max} - a^*_{\min}$, wobei Δa^* +/- 0 bis 5 Einheiten ist,
 $\Delta b^* = b^*_{\max} - b^*_{\min}$, wobei Δb^* -3 bis -15 Einheiten ist,
was eine Änderung bei der Vergilbung des Stoffs widerspiegelt.
- 25 10. Waschmittelpackung und Gewebeweißgrad-Leitfaden nach einem vorangehenden Anspruch, wobei das Fortschreiten von einem Bereich zu einem anderen Bereich eine Stufenänderung im Weißgrad involviert.
11. Waschmittelpackung und Gewebeweißgrad-Leitfaden nach einem vorangehenden Anspruch, wobei jeder der Bereiche eine einheitliche Nuancierung des Weißgrads hat.
- 30 12. Waschmittelpackung und Gewebeweißgrad-Leitfaden nach einem vorangehenden Anspruch, wobei der Gesamtfarbdifferenzwert ΔE (entsprechend der positiven Quadratwurzel von $[(L^*_n - L^*_{n-1})^2 + (a^*_n - a^*_{n-1})^2 + (b^*_n - b^*_{n-1})^2]$ zwischen benachbarten Bereichen größer als oder gleich 0,5 ist.
- 35 13. Waschmittelpackung und Gewebeweißgrad-Leitfaden nach einem vorangehenden Anspruch, umfassend Öffnungen, die der Skala entsprechen.
14. Waschmittelpackung und Gewebeweißgrad-Leitfaden nach Anspruch 13, wobei die Öffnungen den Bereichen entsprechen.
- 40 15. Waschmittelpackung und Gewebeweißgrad-Leitfaden nach Anspruch 14, wobei die Länge oder die Durchmesser der Bereiche wenigstens das 1,3-fache der Länge oder des Durchmessers der Öffnungen sind.
16. Waschmittelpackung und Weißgrad-Leitfaden nach einem vorangehenden Anspruch, wobei die Packung eine Waschmittelzusammensetzung enthält.
- 45 17. Waschmittelpackung und Gewebeweißgrad-Leitfaden nach Anspruch 16, wobei die Waschmittelzusammensetzung ein Mittel zur Verbesserung oder zur Erhaltung des Weißgrads enthält.
- 50 18. Waschmittelpackung und Gewebeweißgrad-Leitfaden nach Anspruch 17, wobei das Mittel zur Verbesserung oder Aufrechterhaltung des Weißgrads einen Farbstoff oder mehrere Farbstoffe zur Erhöhung des wahrgenommenen Weißgrads umfasst.
- 55 19. Waschmittelpackung und Gewebeweißgrad-Leitfaden nach Anspruch 18, wobei der Farbstoff oder die Farbstoffe zusammen eine Peak-Absorptionswellenlänge auf dem Substratgewebe von 540 nm bis 650 nm hat/haben.
20. Verfahren zum Messen und/oder Überwachen des Weißgrads eines Gewebes durch einen Verbraucher, wobei das Verfahren den Schritt des Vergleichens des Gewebes mit einer Weißgradskala des Leitfadens nach einem vorangehenden Anspruch umfasst.

21. Waschmittelpackung und Gewebeweißgrad-Leitfaden nach einem der Ansprüche 1-19, außerdem umfassend Anweisungen zur Verwendung des Gewebeweißgrad-Leitfadens, um den Weißgrad eines Gewebes nach dem Verfahren nach Anspruch 20 zu messen.

5

Revendications

1. Emballage de produit de lessive et guide de blancheur de tissu comprenant au moins une échelle visuelle de blancheur, dans lequel le guide fait partie intégrante d'une section de l'emballage, **caractérisé en ce que** le guide comprend une pluralité de parties discrètes et lesdites parties font 0,5 à 4 cm de long ou de diamètre.
2. Emballage de produit de lessive et guide de blancheur de tissu selon la revendication 1, dans lequel le guide fait initialement partie intégrante d'une section de l'emballage mais peut être détaché de celle-ci.
3. Emballage de produit de lessive et guide de blancheur de tissu selon la revendication 1, dans lequel le guide est détachable par lignes/zones, de faiblesse.
4. Emballage de produit de lessive et guide de blancheur de tissu selon l'une quelconque des revendications précédentes, dans lequel le guide comprend un prolongement d'une paroi ou d'un rabat de l'emballage.
5. Emballage de produit de lessive et guide de blancheur de tissu selon l'une quelconque des revendications précédentes, dans lequel le guide est placé adjacent à un système de fermeture, ou bien fait partie de ce système, qui doit être ouvert par le consommateur pour accéder initialement au produit.
6. Emballage de produit de lessive et guide de blancheur de tissu selon l'une quelconque des revendications précédentes, dans lequel le guide est collé, ou adjacent, à un joint de l'emballage ou plus.
7. Emballage de produit de lessive et guide de blancheur de tissu selon l'une quelconque des revendications précédentes, dans lequel le guide est au moins partiellement maintenu scellé, lors de l'ouverture initiale, par des renforcements définis au moins partiellement par des joints de fermeture de l'emballage, dans lequel lesdits joints de fermeture de l'emballage sont rompus lors de l'ouverture initiale de l'emballage.
8. Emballage de produit de lessive et guide de blancheur de tissu selon l'une quelconque des revendications précédentes, dans lequel la ou les échelles de blancheur ont une blancheur maximum définie de la façon suivants :
 $L^*_{\max}$ $a^*_{\max}$ $b^*_{\max}$ (UV inclus), de telle sorte que :
 $L^*_{\max}$ se situe dans la plage de 85 à 100 ;
 $a^*_{\max}$ se situe dans la plage de -3 à +5 ;
 $b^*_{\max}$ se situe dans la plage de +5 à -15.
9. Emballage de produit de lessive et guide de blancheur de tissu selon l'une quelconque des revendications précédentes, dans lequel l'échelle de blancheur a des valeurs de blancheur minimum définies de la façon suivante : $L^*_{\min}$, $a^*_{\min}$, $b^*_{\min}$, de telle sorte que :
 $\Delta L^* = L^*_{\max} - L^*_{\min}$, où ΔL^* correspond à 3 à 20 unités réfléchissant une grisaille du tissu ;
 $\Delta a^* = a^*_{\max} - a^*_{\min}$, où Δa^* correspond à +/- 0 à 5 unités ;
 $\Delta b^* = b^*_{\max} - b^*_{\min}$, où Δb^* correspond à -3 à -15 unités réfléchissant un changement dans le jaunissement du tissu.
10. Emballage de produit de lessive et guide de blancheur de tissu selon l'une quelconque des revendications précédentes, dans lequel une progression d'une partie à une autre implique un changement progressif de la blancheur.
11. Emballage de produit de lessive et guide de blancheur de tissu selon l'une quelconque des revendications précédentes, dans lequel chacune des parties a une teinte de blancheur uniforme.
12. Emballage de produit de lessive et guide de blancheur de tissu selon l'une quelconque des revendications précédentes, dans lequel la valeur de différence totale de couleur ΔE (qui correspond à la racine carrée positive de

$[(L_n^* - L_{n-1}^*)^2 + (a_n^* - a_{n-1}^*)^2 + (b_n^* - b_{n-1}^*)^2]$ entre des parties adjacentes est supérieure ou égale à 0,5.

13. Emballage de produit de lessive et guide de blancheur de tissu selon l'une quelconque des revendications précédentes comprenant des ouvertures correspondant à l'échelle.

5

14. Emballage de produit de lessive et guide de blancheur de tissu selon la revendication 13, dans lequel les ouvertures correspondent aux parties.

10

15. Emballage de produit de lessive et guide de blancheur de tissu selon la revendication 14, dans lequel la longueur ou le diamètre des parties font au moins 1,3 fois la longueur ou le diamètre des ouvertures.

16. Emballage de produit de lessive et guide de blancheur de tissu selon l'une quelconque des revendications précédentes, dans lequel ledit emballage contient une composition de produit de lessive.

15

17. Emballage de produit de lessive et guide de blancheur de tissu selon la revendication 16, dans lequel la composition de produit de lessive contient un agent apte à améliorer ou à conserver la blancheur.

18. Emballage de produit de lessive et guide de blancheur de tissu selon la revendication 17, dans lequel l'agent apte à améliorer ou à conserver la blancheur comprend un colorant ou plus pour augmenter une blancheur perçue.

20

19. Emballage de produit de lessive et guide de blancheur de tissu selon la revendication 18, dans lequel le ou les colorants ont, ensemble, une longueur d'onde d'absorption de crête de 540 nm à 650 nm sur le tissu servant de substrat.

25

20. Procédé de mesure et/ou de contrôle de la blancheur d'un tissu par un consommateur, le procédé comprenant l'étape consistant à comparer le tissu à une échelle de blancheur du guide selon l'une quelconque des revendications précédentes.

30

21. Emballage de produit de lessive et guide de blancheur de tissu selon l'une quelconque des revendications 1 à 19, comprenant par ailleurs des instructions pour utiliser ledit guide de blancheur de tissu de sorte à mesurer la blancheur d'un tissu selon le procédé de la revendication 20.

35

40

45

50

55

Fig.1.

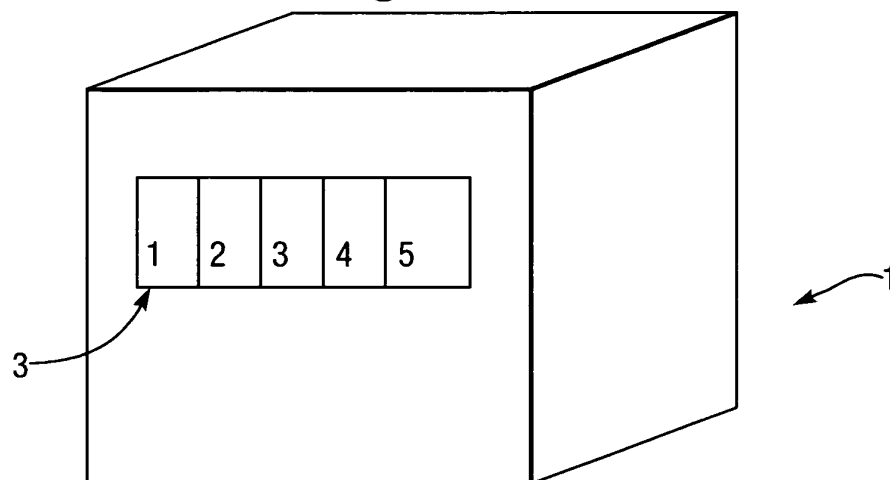


Fig.2.


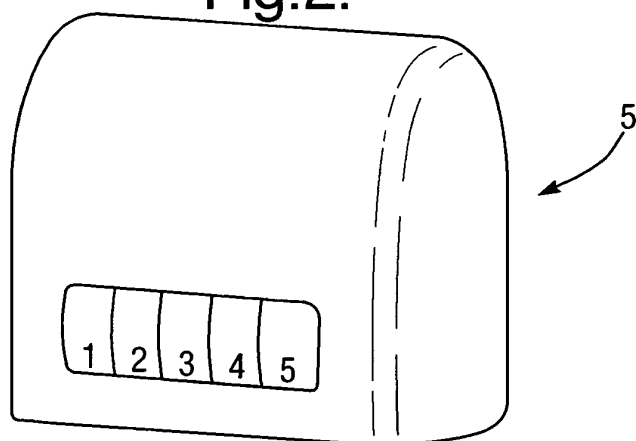


Fig.3.

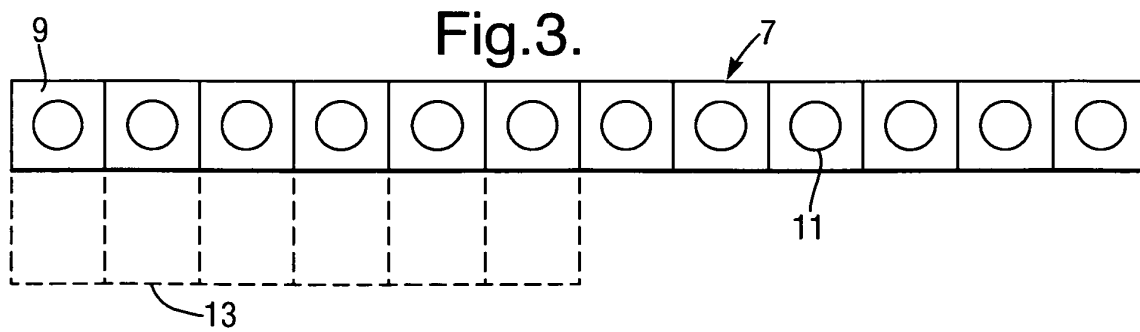

REFERENCES CITED IN THE DESCRIPTION

This list of references cited by the applicant is for the reader's convenience only. It does not form part of the European patent document. Even though great care has been taken in compiling the references, errors or omissions cannot be excluded and the EPO disclaims all liability in this regard.

Patent documents cited in the description

- WO 132097 A1 [0004]
- US 2005059571 A1 [0005]