

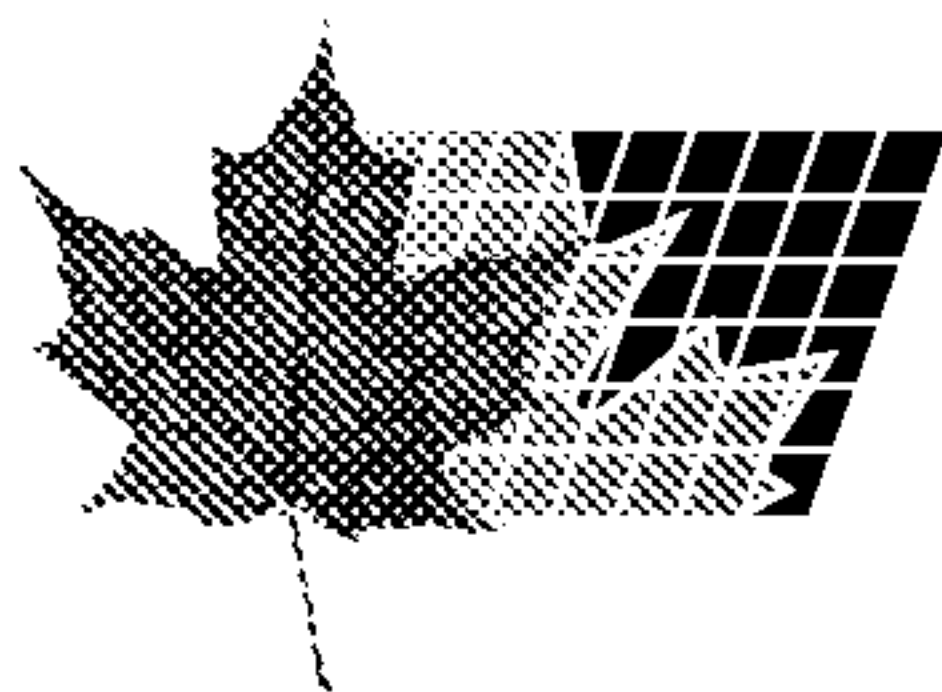


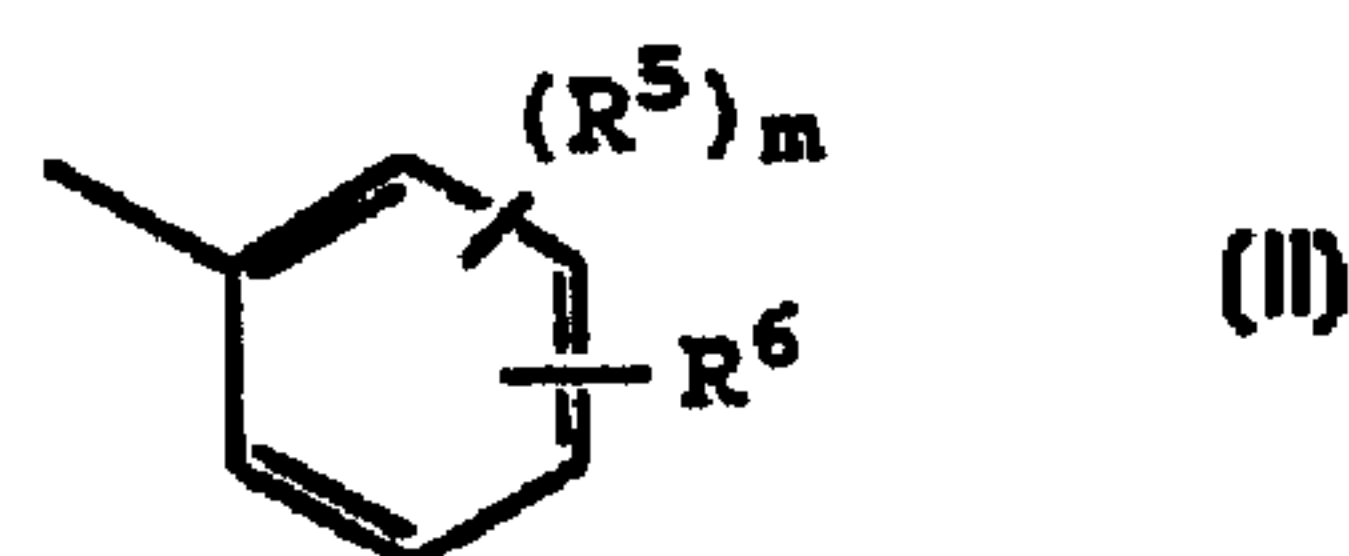


(72) EZQUERRA-CARRERA, JESUS, ES
(72) GRUBER, JOSEPH MICHAEL, US
(72) HAMDOUCHI, CHAFIQ HAMDOUCHI, ES
(72) HOLMES, RICHARD ELMER, US
(72) SPITZER, WAYNE ALFRED, US
(71) ELI LILLY AND COMPANY, US
(51) Int.Cl.⁶ A61K 31/44, C07D 471/04
(54) **COMPOSES ANTI-VIRAUX**
(54) **ANTI-VIRAL COMPOUNDS**

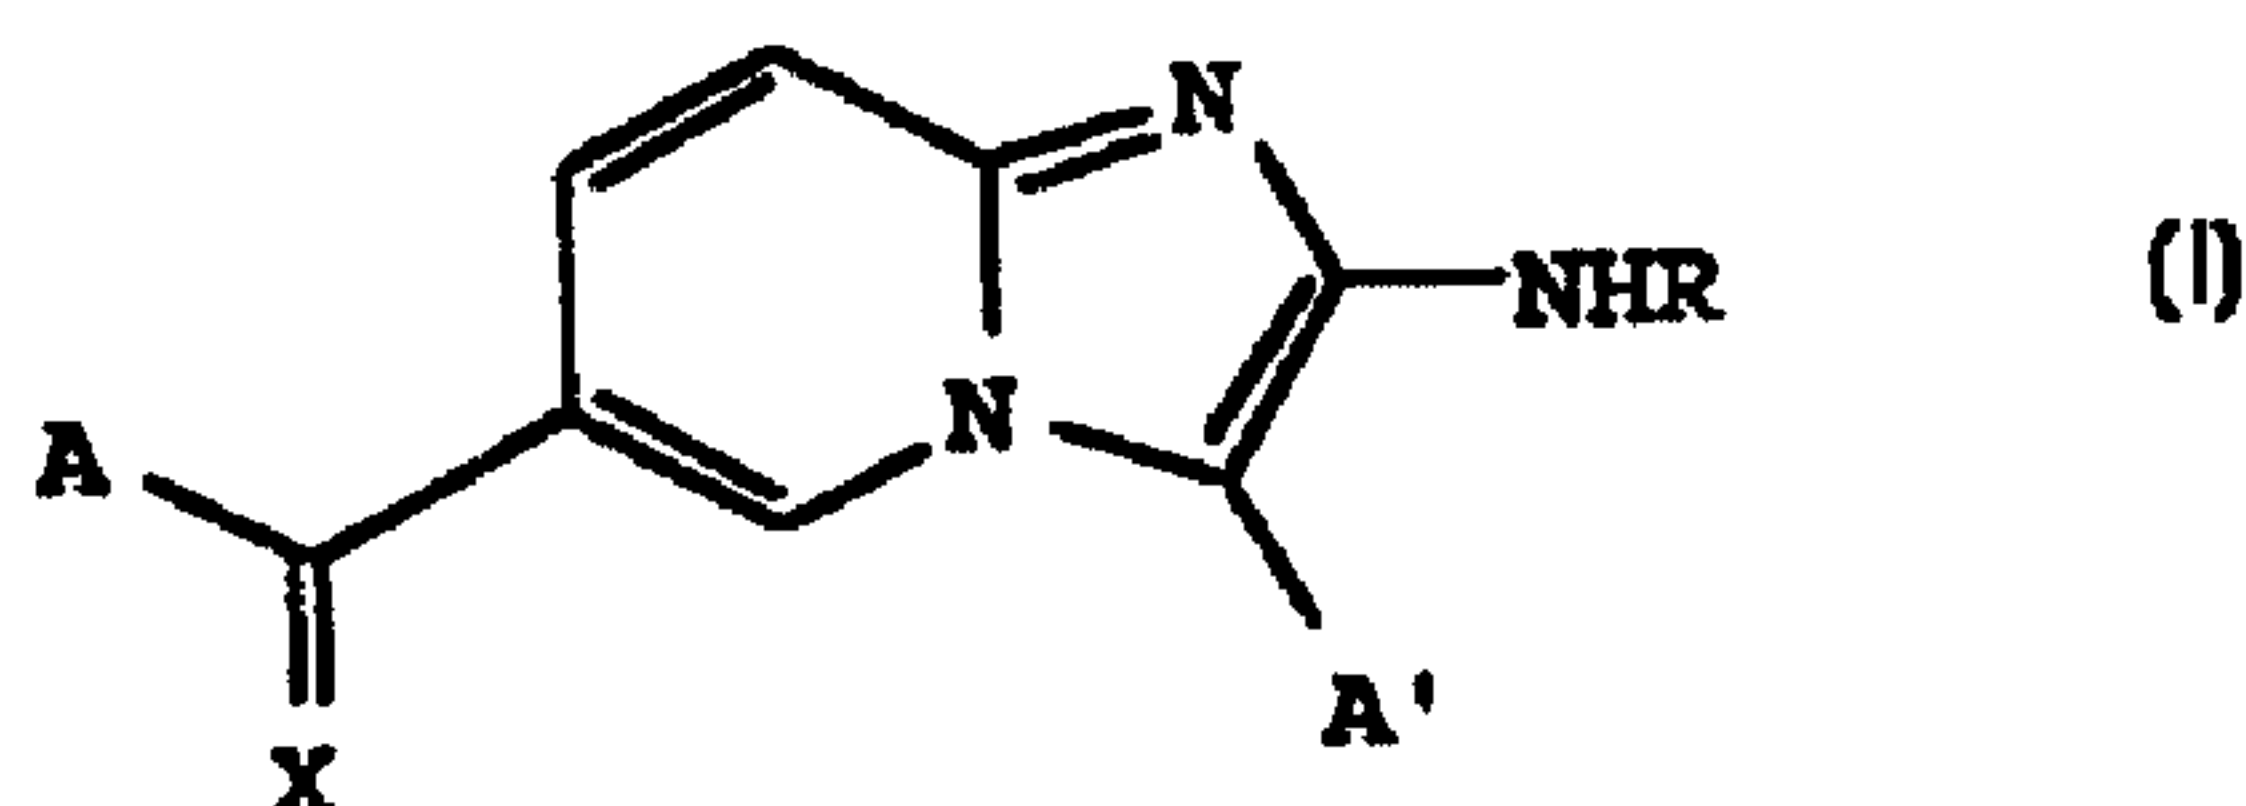

(57) L'invention concerne des composés de formule (I), qui inhibent la prolifération des picornavirus, des virus de l'hépatite, des entérovirus, des cardiovirus, des poliovirus, des virus Cocksackie des types A et B, de l'échovirus et du Mengovirus. Dans ladite formule (I), A représente phényle, pyridyle, phényle substitué, pyridyle substitué, ou benzyle; R représente hydrogène, COR⁴, ou COCF₃; X représente N-OH, O ou CHR¹; R¹ représente hydrogène, halo, CN, alkyle C₁-C₄, -C≡CH, CO(alkyleC₁-C₄), CO₂(alkyleC₁-C₄), ou CONR²R³; R² et R³ représentent indépendamment hydrogène ou alkyle

(57) The present invention relates to compounds of Formula (I), which inhibit the growth of picornaviruses, Hepatitis viruses, enteroviruses, cardioviruses, polioviruses, coxsackieviruses of the A and B groups, echo virus and Mingo virus. In said Formula, A is phenyl, pyridyl, substituted phenyl, substituted pyridyl, or benzyl; R is hydrogen, COR⁴, or COCF₃; X is N-OH, O, or CHR¹; R¹ is hydrogen, halo, CN, C₁-C₄ alkyl, -C≡CH, CO(C₁-C₄ alkyl), CO₂(C₁-C₄ alkyl), or CONR²R³; R² and R³ are independently hydrogen or C₁-C₄ alkyl; A' is hydrogen, halo, C₁-C₆ alkyl, benzyl,



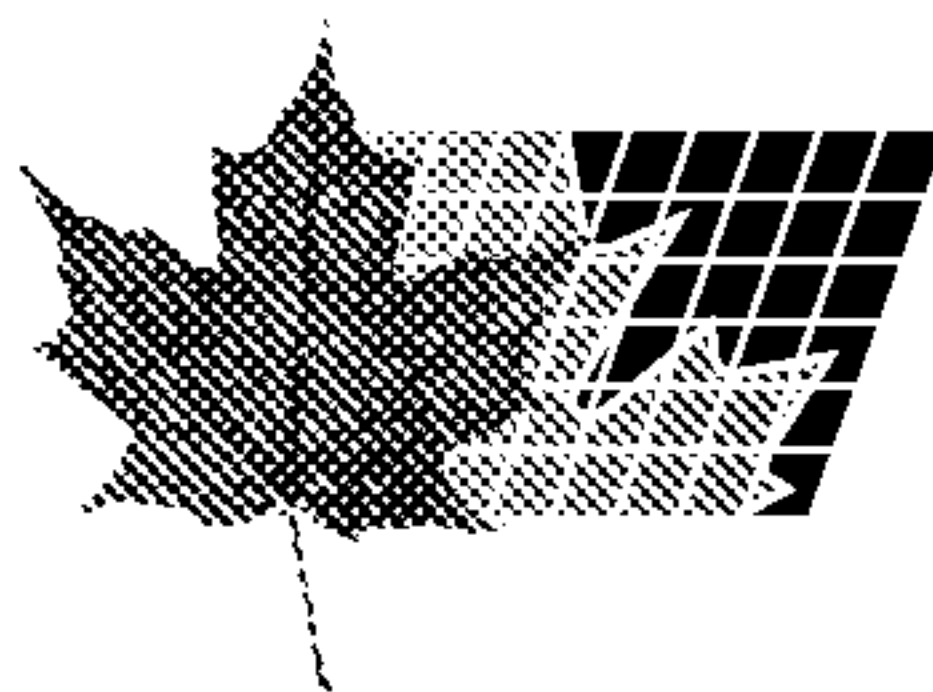

(21) (A1) **2,332,403**
(86) 1998/05/20
(87) 1999/11/25

C_1-C_4 ; A' représente hydrogène, halo, alkyle C_1-C_6 , benzyle, naphthyle, thiényle, furyle, pyridyle, pyrrollyle, COR^4 , $S(O)_nR^4$ ou un groupe de formule (II); R^4 représente alkyle C_1-C_6 , phényle, ou phényle substitué; n vaut 0, 1 ou 2; R^5 représente séparément à chaque apparition hydrogène ou halo; m vaut 1, 2, 3 ou 4; et R^6 représente hydrogène, halo, CF_3 , OH , CO_2H , NH_2 , NO_2 , $CONHOCH_3$, alkyle C_1-C_4 , ou $CO_2(alkyleC_1-C_4)$, alcoxy C_1-C_4 ; ou des sels desdits composés, acceptables au plan pharmaceutiques.

naphthyl, thienyl, furyl, pyridyl, pyrrollyl, COR^4 , $S(O)_nR^4$, or a group of formula (II); R^4 is C_1-C_6 alkyl, phenyl, or substituted phenyl; n is 0, 1, or 2; R^5 is independently at each occurrence hydrogen or halo; m is 1, 2, 3, or 4; and R^6 is hydrogen, halo, CF_3 , OH , CO_2H , NH_2 , NO_2 , $CONHOCH_3$, C_1-C_4 alkyl, or $CO_2(C_1-C_4$ alkyl), C_1-C_4 alkoxy; or pharmaceutically acceptable salts thereof.




**PCT**WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61K 31/44, C07D 471/04	A1	(11) International Publication Number: WO 99/59587 (43) International Publication Date: 25 November 1999 (25.11.99)
(21) International Application Number: PCT/US98/10299 (22) International Filing Date: 20 May 1998 (20.05.98) (71) Applicant (for all designated States except US): ELI LILLY AND COMPANY [US/US]; Lilly Corporate Center, Indianapolis, IN 46285 (US). (72) Inventors; and (75) Inventors/Applicants (for US only): EZ-QUERRA-CARRERA, Jesus [ES/ES]; Modesto Lafuente, 46, 2-F, E-28003 Madrid (ES). GRUBER, Joseph, Michael [US/US]; 8949 Sunglow Court, Indianapolis, IN 46231 (US). HAMDOUCHI, Chafiq, Hamdouchi [ES/ES]; Urb. Montecalderon, Calle Tarrega, E-19170 El Casar de Talamanca (ES). HOLMES, Richard, Elmer [US/US]; 4848 Laurel Circle, Indianapolis, IN 46226 (US). SPITZER, Wayne, Alfred [US/US]; 5501 Moller Road, Indianapolis, IN 46254 (US). (74) Agents: SKELTON, Jeffrey, J. et al.; Eli Lilly and Company, Lilly Corporate Center, Indianapolis, IN 46285 (US).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i>

(54) Title: ANTI-VIRAL COMPOUNDS

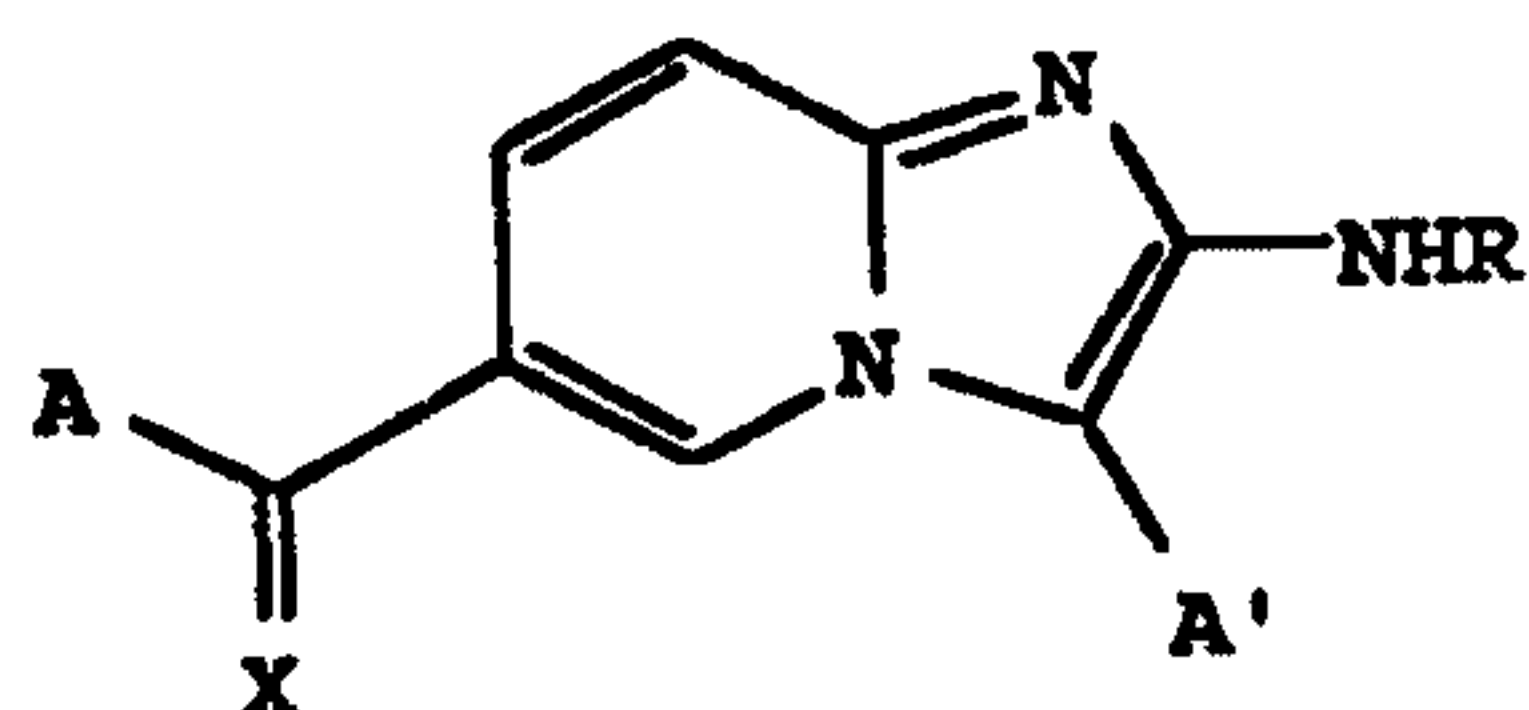

(I)

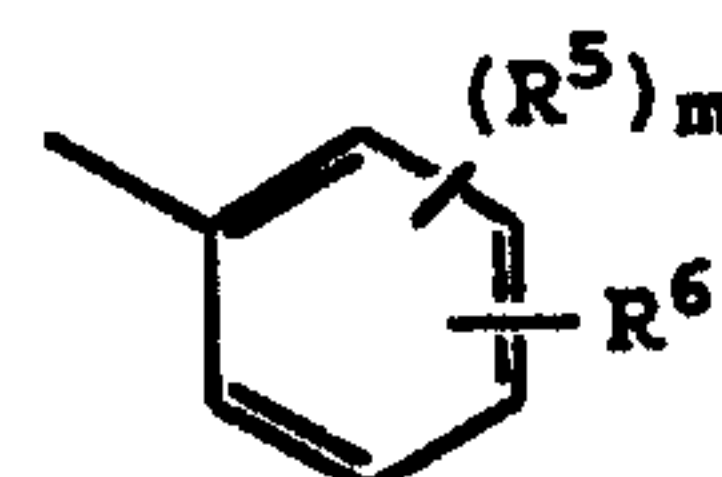

(II)

(57) Abstract

The present invention relates to compounds of Formula (I), which inhibit the growth of picornaviruses, Hepatitis viruses, enteroviruses, cardioviruses, polioviruses, coxsackieviruses of the A and B groups, echo virus and Mengo virus. In said Formula, A is phenyl, pyridyl, substituted phenyl, substituted pyridyl, or benzyl; R is hydrogen, COR⁴, or COCF₃; X is N-OH, O, or CHR¹; R¹ is hydrogen, halo, CN, C₁-C₄ alkyl, -C≡CH, CO(C₁-C₄ alkyl), CO₂(C₁-C₄ alkyl), or CONR²R³; R² and R³ are independently hydrogen or C₁-C₄ alkyl; A' is hydrogen, halo, C₁-C₆ alkyl, benzyl, naphthyl, thienyl, furyl, pyridyl, pyrrolyl, COR⁴, S(O)_nR⁴, or a group of formula (II); R⁴ is C₁-C₆ alkyl, phenyl, or substituted phenyl; n is 0, 1, or 2; R⁵ is independently at each occurrence hydrogen or halo; m is 1, 2, 3, or 4; and R⁶ is hydrogen, halo, CF₃, OH, CO₂H, NH₂, NO₂, CONHOCH₃, C₁-C₄ alkyl, or CO₂(C₁-C₄ alkyl), C₁-C₄ alkoxy; or pharmaceutically acceptable salts thereof.

ANTI-VIRAL COMPOUNDS**Field of the Invention**

The present invention relates to anti-viral
5 compounds and their use in the fields of pharmaceutical
and medicinal chemistry.

Background of the Invention

The incidence of viral upper respiratory disease,
10 the common cold, is immense. It has been estimated that
nearly a billion cases annually appear in the United
States alone. Rhinovirus, a member of the picornaviridae
family, is the major cause of the common cold in humans.
Since more than 110 strains of rhinovirus have been
15 identified, the development of a comprehensive rhinovirus
vaccine is not practical. Accordingly, chemotherapy
appears to be a more desirable approach. Another member
of the picornavirus family is the enterovirus, which
includes approximately eighty human pathogens. Many of
20 these enteroviruses cause cold-like symptoms; others can
cause more serious diseases such as polio,
conjunctivitis, aseptic meningitis and myocarditis.

Illness related to rhinovirus infection is evidenced
by nasal discharge and obstruction. Furthermore, it has
25 been implicated in otitis media, predisposes the
development of bronchitis, exacerbates sinusitis, and has
been implicated in the precipitation of asthmatic
disease. Although it is considered by many to be a mere
nuisance, its frequent occurrence in otherwise healthy
30 individuals and the resulting economic importance has
made rhinovirus infection the subject of extensive
investigation.

The ability of chemical compounds to suppress the
growth of viruses *in vitro* may be readily demonstrated
35 using a virus plaque suppression test or a cytopathic
effect test (CPE). Cf Siminoff, Applied Microbiology,
9(1), 66 (1961). Although a number of chemical compounds
that inhibit picornaviruses have been identified, many


- 2 -

are unacceptable due to 1) limited spectrum of activity,
 2) undesirable side effects or 3) inability to prevent
 infection or illness in animals or humans. See Textbook
of Human Virology, edited by Robert B. Belshe, chapter
 5 16, "Rhinoviruses," Roland A. Levandowski, 391-405
 (1985). Thus, despite the recognized therapeutic
 potential associated with a rhinovirus inhibitor and the
 research efforts expended thus far, a viable therapeutic
 agent has not yet emerged. For example, antiviral
 10 benzimidazole compounds have been disclosed in U.S. Pat.
 Ser. Nos. 4,008,243, 4,018,790, 4,118,573, 4,118,742 and
 4,174,454.

Accordingly, the present invention provides novel
 pyridoimidazole compounds which inhibit the growth of
 15 picornaviruses, such as rhinoviruses (bovine and human)
 and the like; enteroviruses, such as polioviruses and the
 like; coxsackieviruses of the A and B groups, or echo
 virus; cardioviruses, such as encephalomyocarditis virus
 (EMC) and the like; aphthoviruses, such as foot and mouth
 20 disease virus and the like; and Hepatitis viruses, such
 as Hepatitis C virus, and the like.

Summary of the Invention

The present invention provides compounds of
 25 Formula (I):

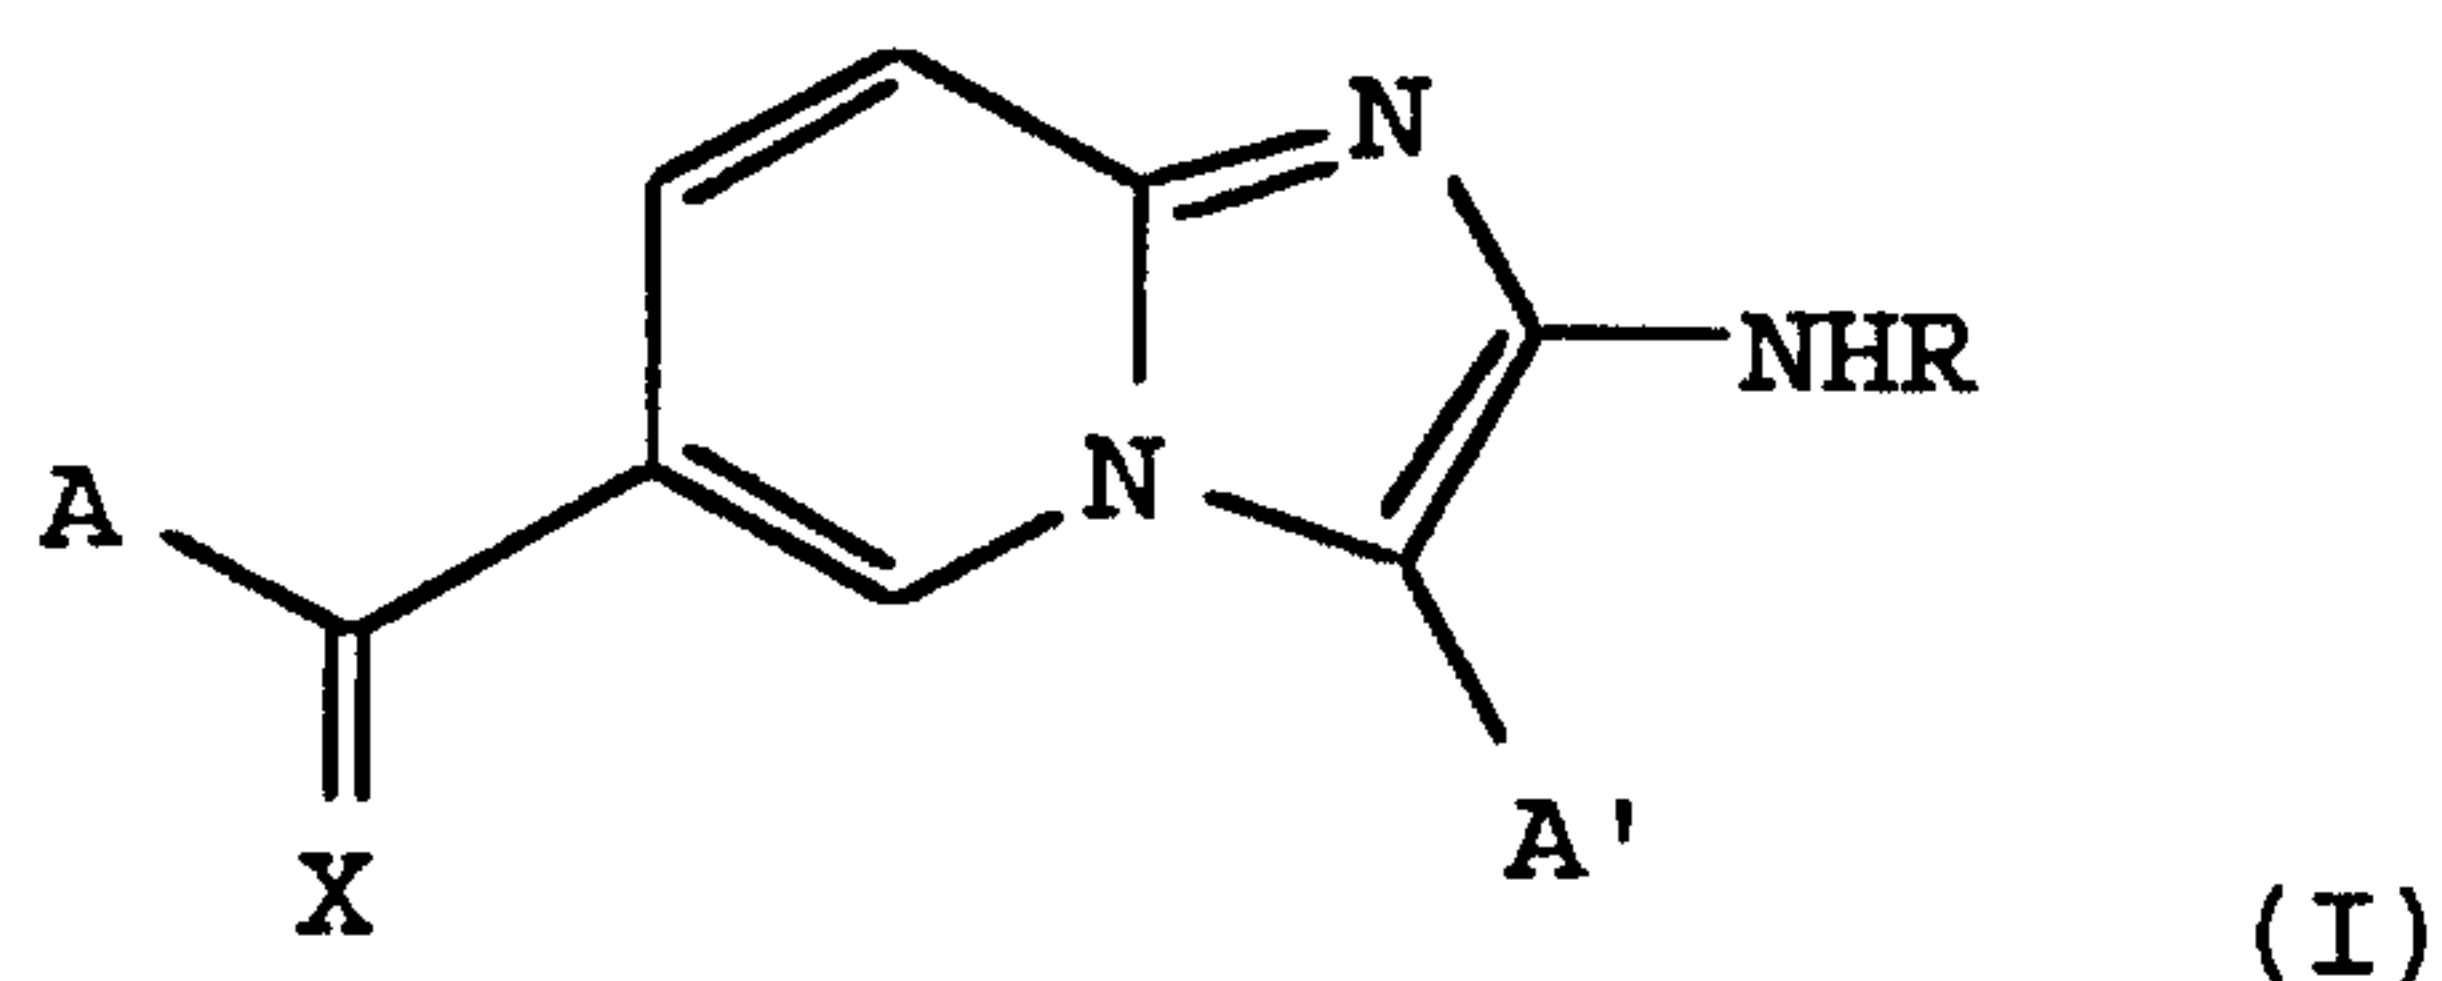


wherein:

- A is phenyl, pyridyl, substituted phenyl,
 30 substituted pyridyl, or benzyl;
- R is hydrogen, COR⁴, or COCF₃;
- X is N-OH, O, or CHR¹;

R^1 is hydrogen, halo, CN, C_1 - C_4 alkyl, $-C\equiv CH$,
 $CO(C_1-C_4 \text{ alkyl})$, $CO_2(C_1-C_4 \text{ alkyl})$, or $CONR^2R^3$;

R^2 and R^3 are independently hydrogen or C_1 - C_4 alkyl;

A' is hydrogen, halo, C_1 - C_6 alkyl, benzyl, naphthyl,
 5 thienyl, furyl, pyridyl, pyrrollyl, COR^4 , $S(O)_nR^4$, or a
 group of the formula

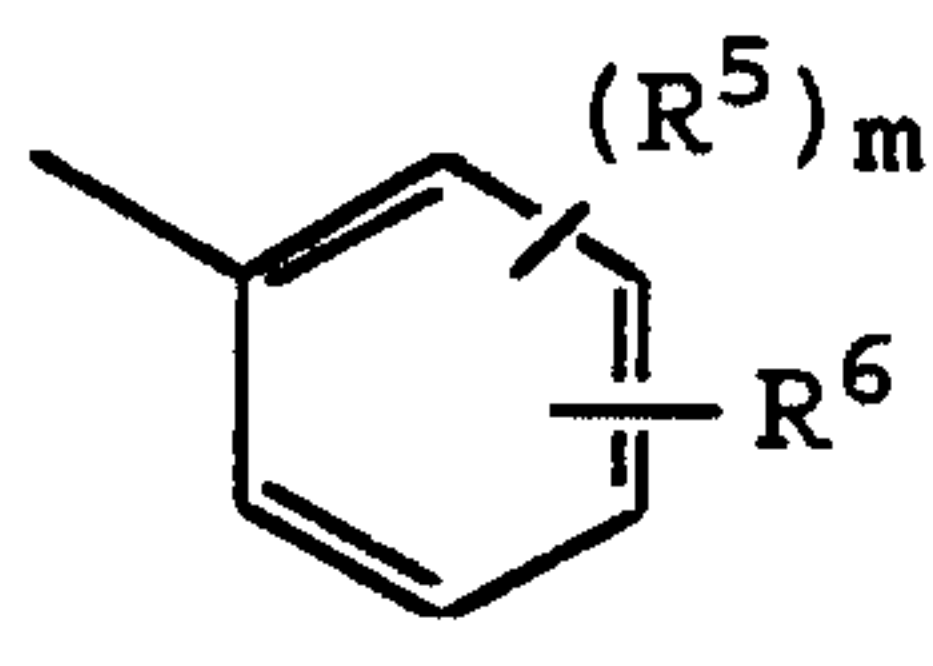

R^4 is C_1 - C_6 alkyl, phenyl, or substituted phenyl;

n is 0, 1, or 2;

10 R^5 is independently at each occurrence hydrogen or
 halo;

m is 1, 2, 3, or 4; and

R^6 is hydrogen, halo, CF_3 , OH, CO_2H , NH_2 , NO_2 ,
 $CONHOCH_3$, C_1 - C_4 alkyl, or $CO_2(C_1-C_4 \text{ alkyl})$, C_1 - C_4 alkoxy,
 15 or pharmaceutically acceptable salts thereof.

The present invention also provides pharmaceutical
 formulations comprising a compound of the present
 invention, or a pharmaceutically acceptable salt thereof,
 20 in combination with a pharmaceutically acceptable
 carrier, diluent or excipient thereof.

The present invention also provides a method for
 inhibiting a picornavirus comprising administering to a
 host in need thereof, an effective amount of a compound
 25 of Formula I, or a pharmaceutically acceptable salt
 thereof.

The present invention also provides a method for
 inhibiting a Hepatitis C virus comprising administering
 to a host in need thereof, an effective amount of a
 30 compound of Formula I, or a pharmaceutically acceptable
 salt thereof.

The present invention also provides for the use of
 compounds of Formula (I) for inhibiting a picornavirus, a
 rhinovirus, or a Hepatitis virus.

Detailed Description of the Invention

The present invention relates to compounds of formula (I), as described above, that are useful as
5 antiviral agents.

All temperatures stated herein are in degrees Celsius (°C). All units of measurement employed herein are in weight units except for liquids which are in volume units.

10 The term "C₁-C₆ alkyl", as used herein, represents a straight or branched alkyl chain having from one to six carbon atoms. Typical C₁-C₆ alkyl groups include, but are not intended to be limited to; methyl, ethyl, propyl, isopropyl, butyl, isobutyl, sec-butyl, t-butyl, pentyl,
15 neo-pentyl, hexyl, and the like. The term "C₁-C₆ alkyl" includes within its definition the term "C₁-C₄ alkyl", and includes within its definition cycloalkyl groups wherein the alkylgroup is formed into a ring.

The term "halo" represents chloro, fluoro, bromo, or
20 iodo.

The term "substituted phenyl", when used herein, represents a phenyl ring substituted with 1, 2 or 3 substituents independently selected from the group consisting of; halo, C₁-C₄ alkyl, C₁-C₆ alkoxy, or
25 trifluoromethyl.

The term "substituted pyridyl", when used herein, represents a pyridyl ring substituted with 1, 2 or 3 substituents independently selected from the group consisting of; halo, C₁-C₄ alkyl, C₁-C₆ alkoxy, or
30 trifluoromethyl.

As mentioned above, the invention includes the pharmaceutically acceptable salts of the compounds defined by Formula (I). Although generally neutral, a compound of this invention can possess a sufficiently
35 acidic, a sufficiently basic, or both functional groups, and accordingly react with any of a number of inorganic bases, and inorganic acids and organic acids, to form a pharmaceutically acceptable salt.

The term "pharmaceutically acceptable salt" as used herein, refers to salts of the compounds of formula I which are substantially non-toxic to living organisms. Typical pharmaceutically acceptable salts include those
5 salts prepared by reaction of the compounds of the present invention with a mineral or organic acid or an inorganic base. Such salts are known as acid addition and base addition salts.

Acids commonly employed to form acid addition salts
10 include, but are not intended to be limited to, inorganic acids such as; hydrochloric acid, hydrobromic acid, hydroiodic acid, sulfuric acid, phosphoric acid, and the like; and organic acids such as; *p*-toluenesulfonic acid, methanesulfonic acid, oxalic acid, *p*-bromophenylsulfonic
15 acid, carbonic acid, succinic acid, citric acid, benzoic acid, acetic acid, and the like.

Examples of such pharmaceutically acceptable salts include, but are not intended to be limited to; sulfate, pyrosulfate, bisulfate, sulfite, bisulfite, phosphate,
20 monohydrogenphosphate, dihydrogenphosphate, metaphosphate, pyrophosphate, chloride, bromide, iodide, acetate, propionate, decanoate, caprylate, acrylate, formate, isobutyrate, caproate, heptanoate, propiolate, oxalate, malonate, succinate, suberate, sebacate,
25 fumarate, maleate, butyne-1,4-dioate, hexyne-1,6-dioate, benzoate, chlorobenzoate, methylbenzoate, dinitrobenzoate, hydroxybenzoate, methoxybenzoate, phthalate, sulfonate, xylenesulfonate, phenylacetate, phenylpropionate, phenylbutyrate, citrate, lactate, γ -
30 hydroxybutyrate, glycollate, tartrate, methanesulfonate, propanesulfonate, naphthalene-1-sulfonate, naphthalene-2-sulfonate, mandelate, and the like. Preferred pharmaceutically acceptable acid addition salts are those formed with mineral acids such as hydrochloric acid and
35 hydrobromic acid, and those formed with organic acids such as maleic acid and methanesulfonic acid.

Base addition salts include, but are not intended to be limited to, those derived from inorganic bases, such

-6-

as ammonium or alkali or alkaline earth metal hydroxides, carbonates, bicarbonates, and the like. Such bases useful in preparing the salts of this invention thus include sodium hydroxide, potassium hydroxide, ammonium
5 hydroxide, potassium carbonate, sodium carbonate, sodium bicarbonate, potassium bicarbonate, calcium hydroxide, calcium carbonate, and the like. The potassium and sodium salt forms are particularly preferred.

It should be recognized that the particular
10 counterion forming a part of any salt of this invention is not of a critical nature, so long as the salt as a whole is pharmacologically acceptable and as long as the counterion does not contribute undesired qualities to the salt as a whole.


15 The pharmaceutically acceptable salts of the invention are typically formed by reacting a compound of Formula (I) with an equimolar or excess amount of acid or base. The reactants are generally combined in a neutral solvent such as diethyl ether, benzene, and the like, for
20 acid addition salts, or water, alcohols, and the like for base addition salts. The salts normally precipitate out of solution within about one hour to about ten days, and can be isolated by filtration or other conventional methods.

25 The compounds of the present invention can occur in either the cis or trans configuration, wherein, cis refers to those compounds where the substituent on the alkene moiety is cis to the ring designated "A" and trans refers to those compounds where the substituent on the
30 alkene moiety is trans to the ring designated "A". Both isomers and mixtures thereof are included within the scope of the present invention.


The following lettered paragraphs represent preferred embodiments of the present invention, however,
35 it is to be understood that the present invention is not limited to such embodiments and that other embodiments are contemplated. Preferred compounds of Formula (I) are those wherein:

- 7 -

- a) A is phenyl, pyridyl, substituted phenyl, or substituted pyridyl;
- b) A is phenyl or substituted phenyl;
- c) A is difluorophenyl or fluorophenyl;
- 5 d) A is pyridyl, substituted phenyl, or substituted pyridyl;
- e) R is hydrogen
- f) R is COCF₃;
- g) X is NOH;
- 10 h) X is CHR¹;
- i) R¹ is CONR²R³, CO₂(C₁-C₄ alkyl), or CN;
- j) R¹ is CONR²R³;
- k) R¹ is CO₂(C₁-C₄ alkyl);
- l) R² and R³ are independently methyl or hydrogen;
- 15 m) A' is C₁-C₆ alkyl, naphthyl, thienyl, COR⁴, S(O)_nR⁴, or a group of the formula

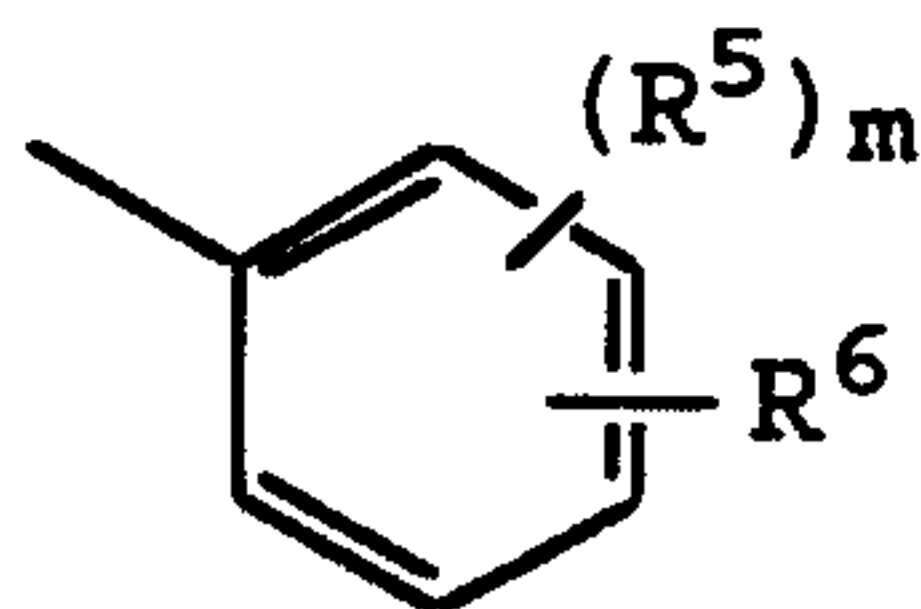


- n) A' is C₁-C₆ alkyl, COR⁴, S(O)_nR⁴, or a group of the formula

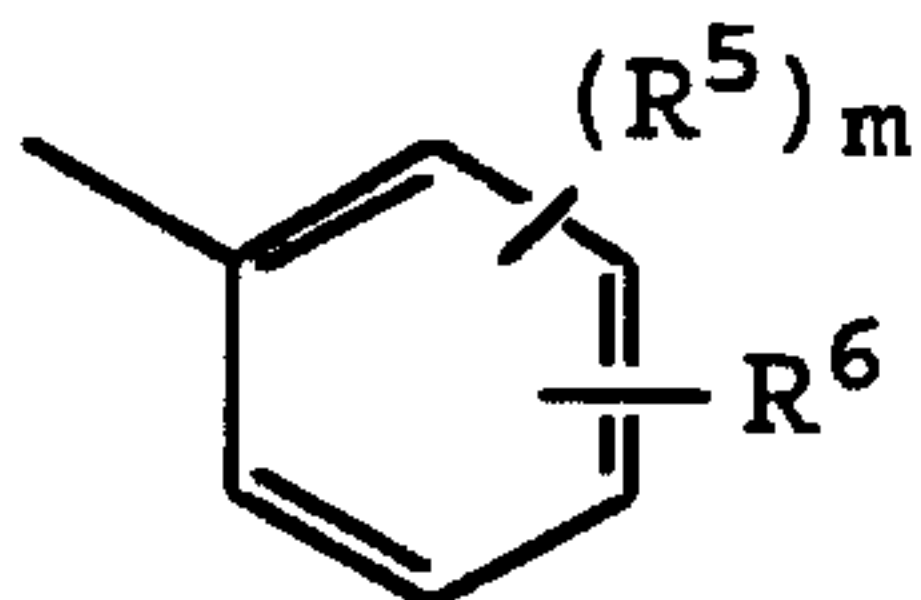

20

- o) A' is a group of the formula

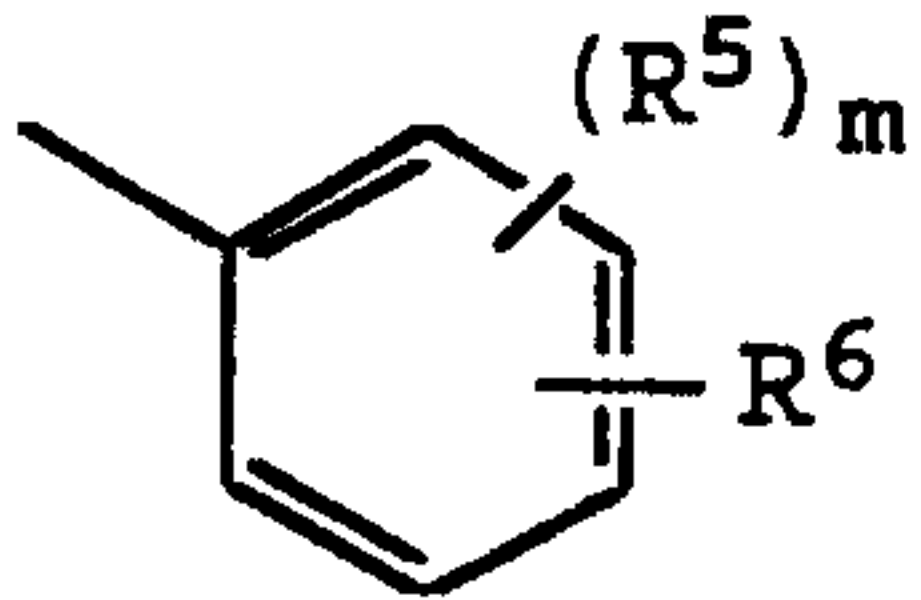

25

- p) A' is C₁-C₆ alkyl, COR⁴, or S(O)_nR⁴;
- q) A' is COR⁴, or S(O)_nR⁴;
- r) R⁵ is fluoro and m is 5;
- s) m is 1, 2, 3, or 5.
- t) R₆ is CF₃, OH, CO₂H, NH₂, NO₂, CONHOCH₃, C₁-C₄ alkyl, C₁-C₄ alkoxy;


- u) R₆ is CF₃, OH, CONHOCH₃, C₁-C₄ alkyl, C₁-C₄ alkoxy; and
 v) R₆ is CF₃, OH, C₁-C₄ alkyl, C₁-C₄ alkoxy.


5

SCHEMES

The compounds of formula (I) can be prepared by synthetic methods known in the art and by methods disclosed herein. The compounds of formula (I) wherein A' is; hydrogen, C₁-C₆ alkyl, naphthyl, thienyl, furyl,

10

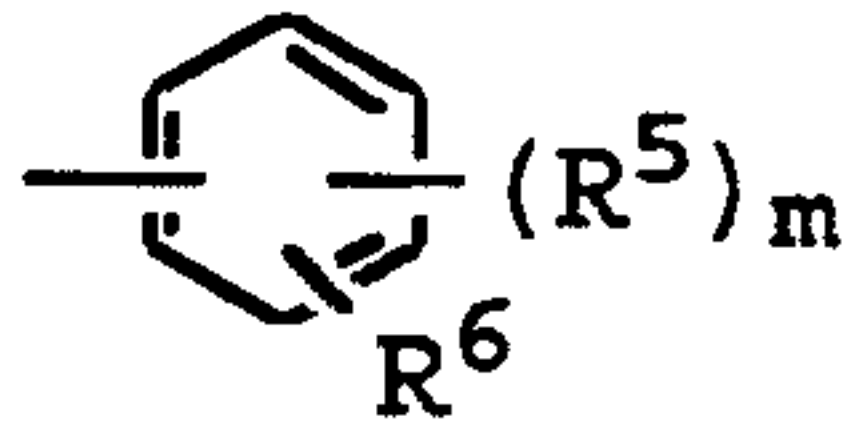
pyridyl, pyrrollyl, or a group of the formula , can be prepared according to Scheme I shown below.

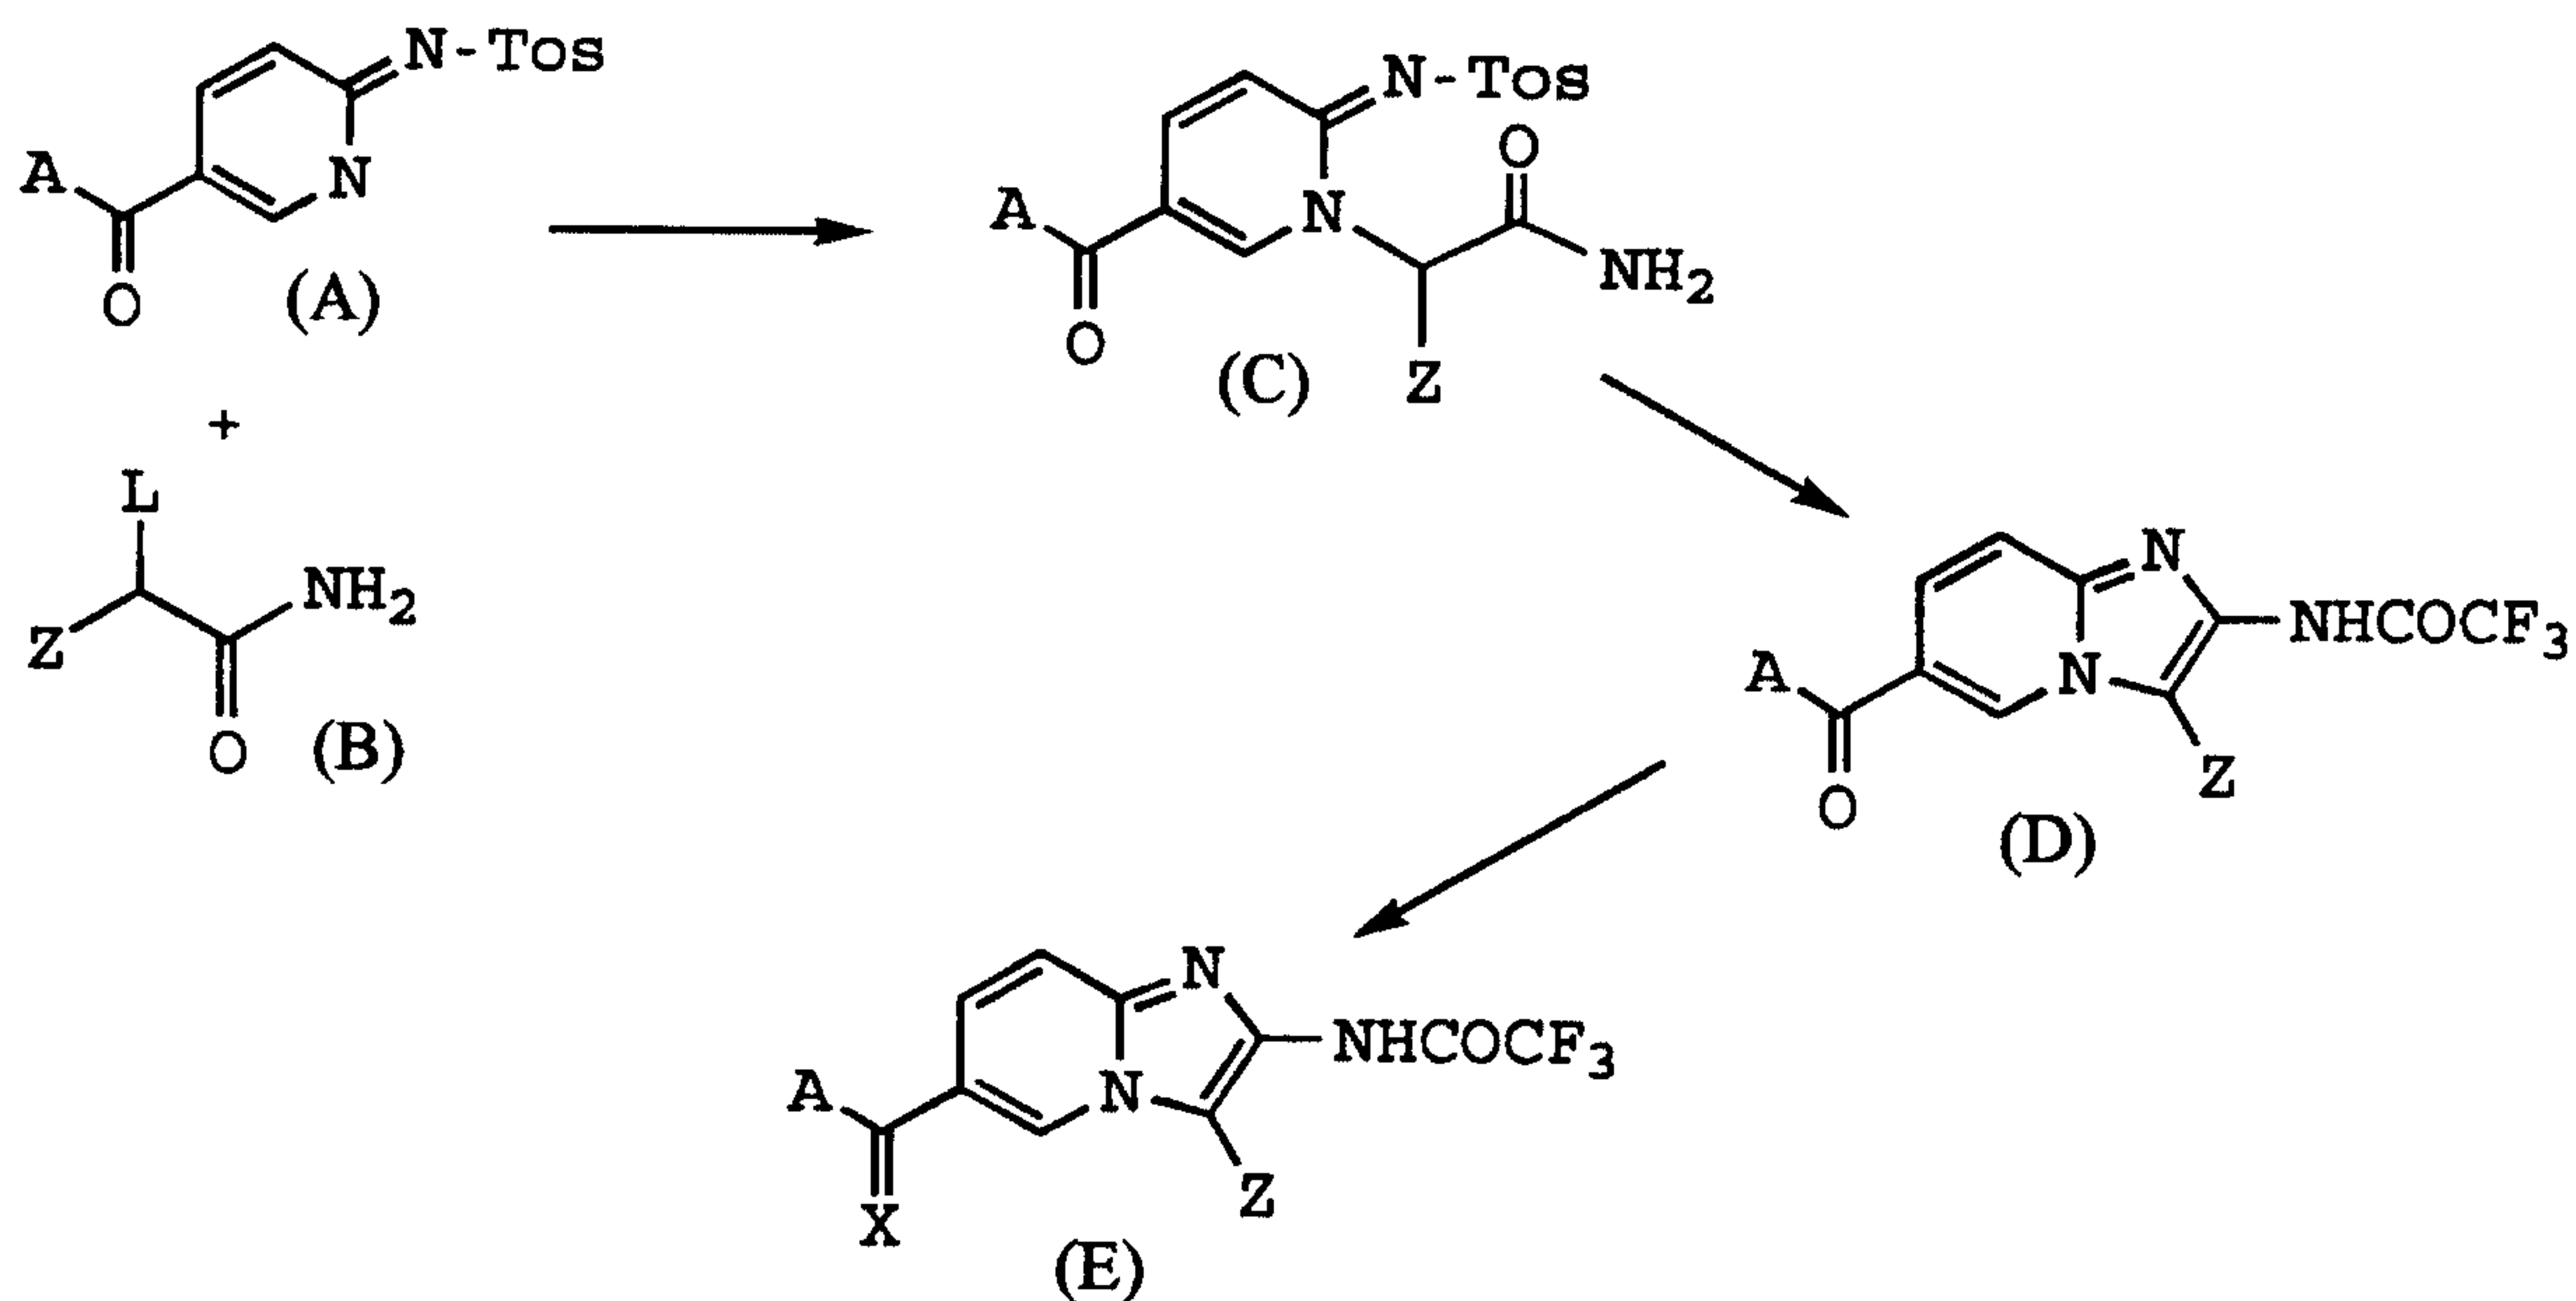Scheme I

15


L represents a leaving group selected from the group consisting of: halo, O-triflate, O-mesylate, O-tosylate, and the like.

Z represents hydrogen, C₁-C₆ alkyl, naphthyl, thienyl, furyl, pyridyl, pyrrollyl, or a group of the

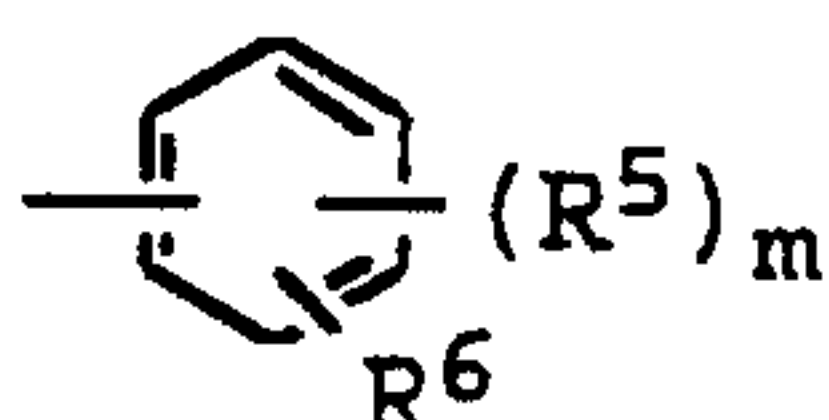formula .

Compounds of Formula (A) can be prepared by synthetic methods known in the art and by methods disclosed herein. For example, compounds of Formula (A) can be prepared according to Scheme II shown below.

5

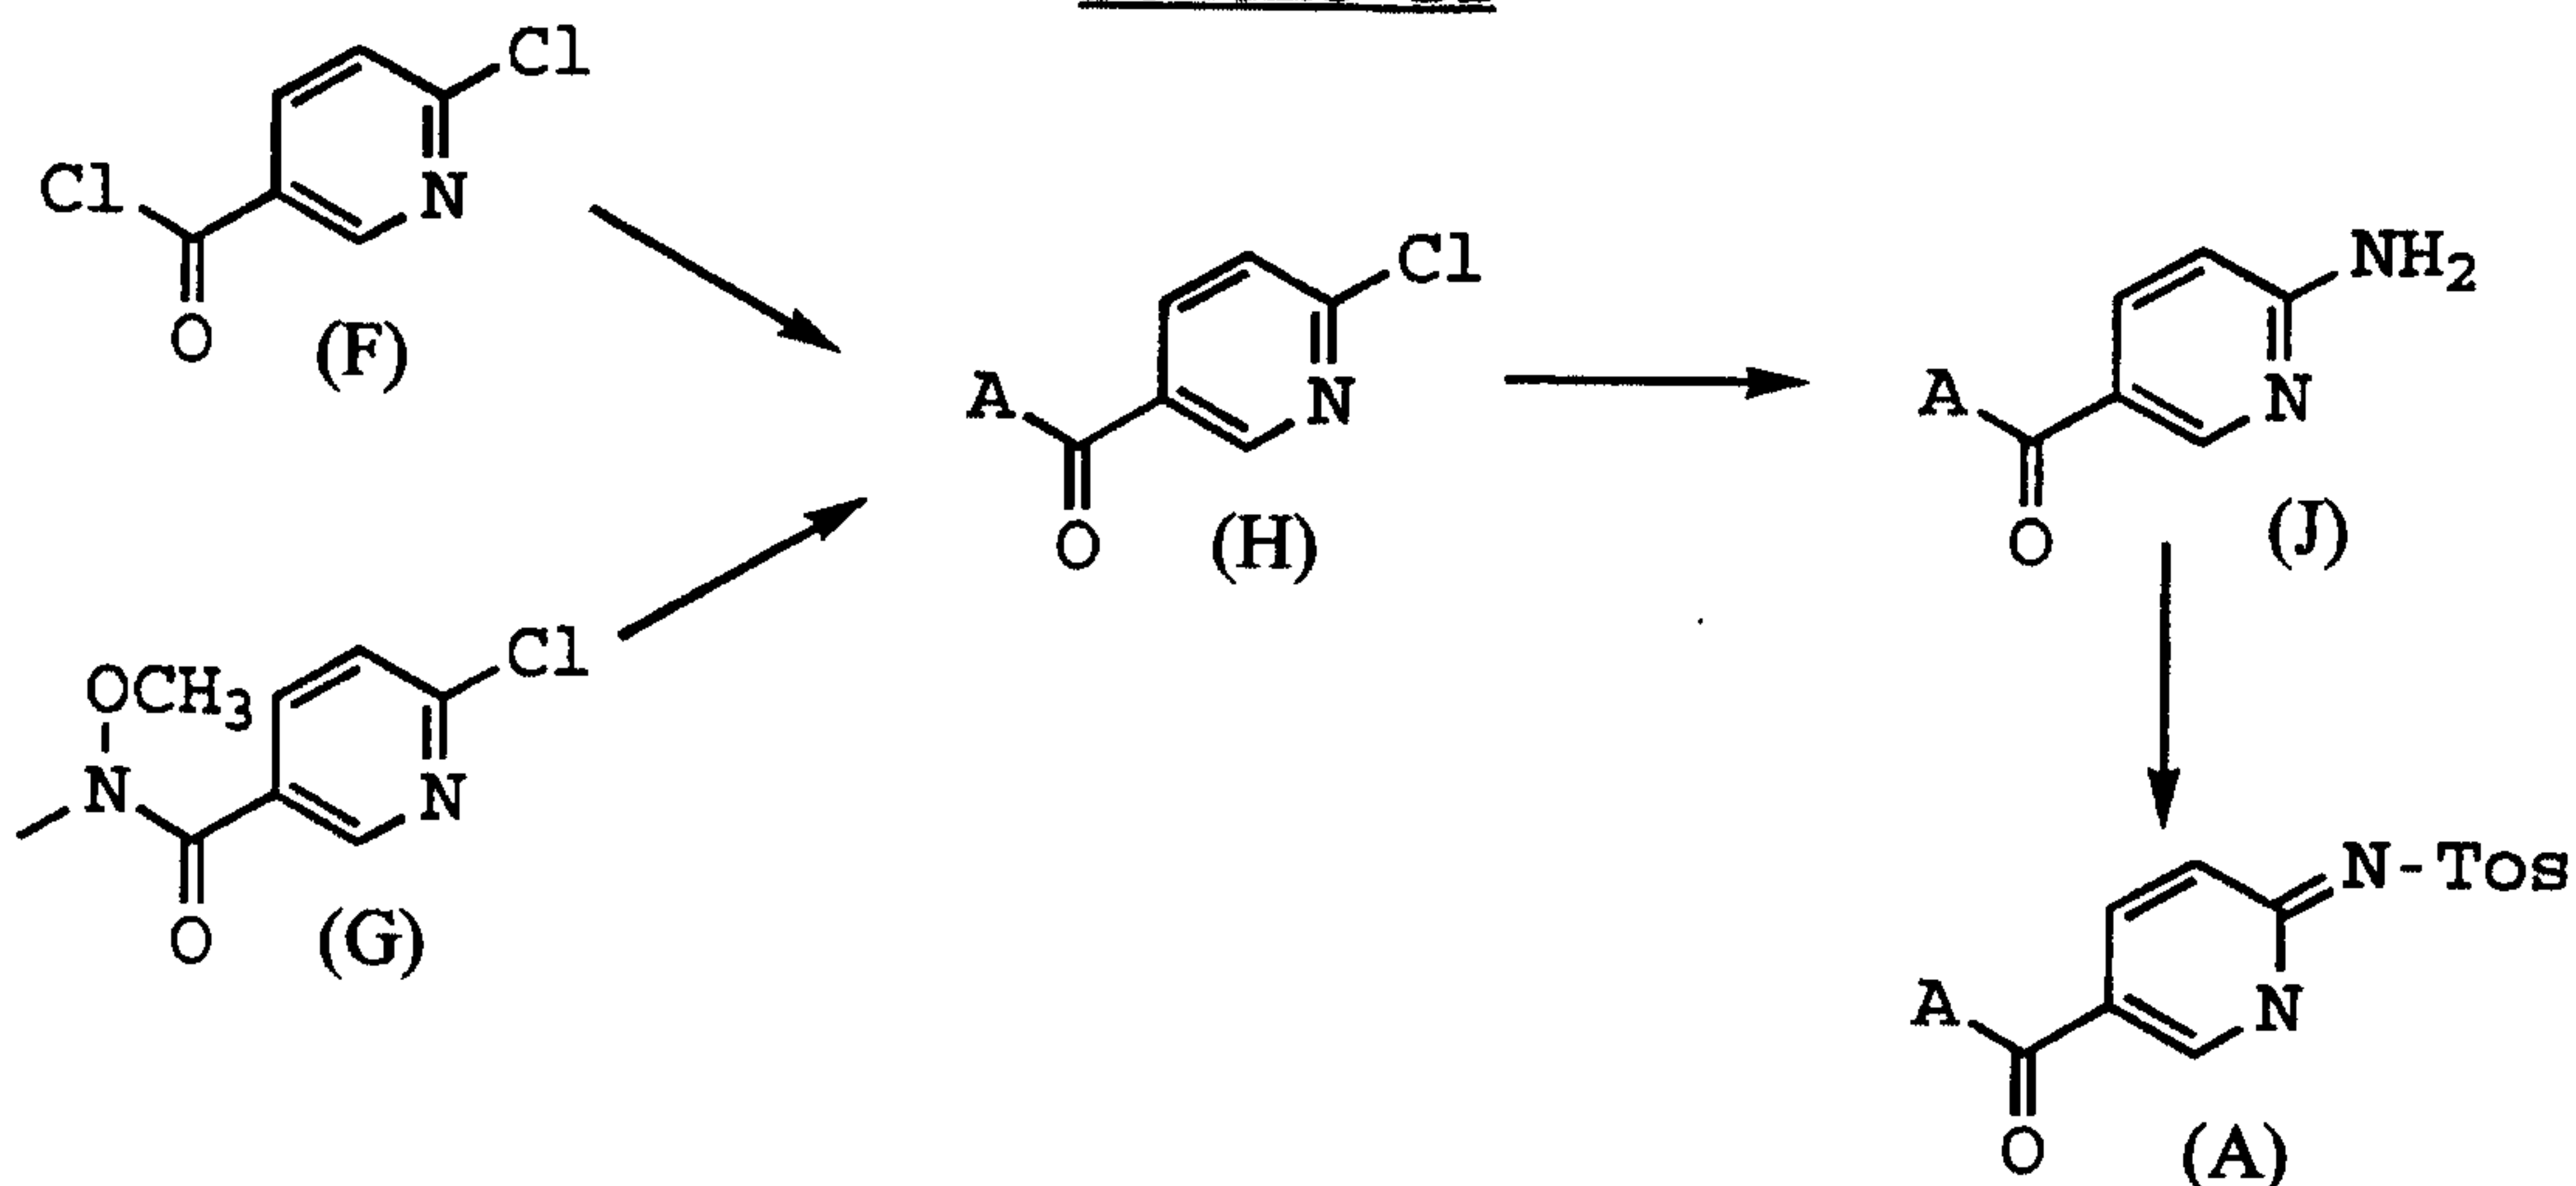Scheme II

An appropriately substituted aryl group can be acylated under Friedel-Crafts conditions, in the presence of a Lewis Acid, with an appropriately substituted acid anhydride, carboxylic acid, or acid chloride to form the compounds of Formula (H). (See e.g.; Friedel-Crafts and Related Reactions, Ed. G.A., Olah, J. Wiley and Sons, N.Y., chapters 31,32 (1964)) Suitable Lewis acid catalysts include, but are not limited to, trifluoroacetic anhydride/phosphoric acid, trifluoromethanesulfonic acid, iron(III) chloride, zinc chloride, copper triflate (CuOTf), phosphorous oxychloride, trifluoroacetic acid, aluminum trichloride, and the like. Aluminum trichloride is the preferred Lewis acid. Suitable solvents include, but are not limited to, methylene chloride, acetonitrile, 1,2-dichloroethane, nitromethane, lower alcohols, acetonitrile, dimethylsulfoxide, and the like. The reaction is preferably run "neat" using the substituted aryl group as the preferred solvent. The substituted aryl group is generally employed in a substantial molar excess. For example, an approximately 3 to 10 molar excess, relative to the 6-chloronicotinoylchloride, is

generally employed. A molar excess of about 3.8 is typically preferred. The reaction is preferably carried out at about 80°C.

Alternatively, compounds of formula (H) can be prepared by reacting a compound of formula (G) with an aryl anion by methods well known in the art. The Weinreb amide of formula (G) can be prepared from the corresponding 1-chloro-5-nicotinic acid by methods well known in the art. Likewise, the acyl anions utilized to prepare the compounds of formula (H) are well known in the art and can be prepared by methods described in the art. For example, an appropriately substituted bromo or iodo aryl group can be subjected to metal-halogen exchange conditions to afford the metal aryl anion by methods well known in the art and disclosed herein. See Organic Reactions, vol. 6, pg. 339, (1951) for a general discussion of metal-halogen exchange conditions. Suitable solvents include, but are not limited to, toluene, dimethylformamide, methylene chloride, diethyl ether, acetonitrile, tetrahydrofuran, and the like. Tetrahydrofuran is the preferred solvent. Suitable sources of metal include, but are not limited to, molecular lithium, alkyl lithiums, and the like including especially t-butyl lithium. N-Butyl lithium is a preferred source of metal. The metal is generally employed in a slight molar excess. For example, approximately a 1 to 1.1 molar excess is generally employed. A 1.03 molar excess is typically preferred. The reaction is preferably carried out at about -78°C for approximately 15 minutes.


Compounds of formula (H) can be aminated with ammonia under high pressures to yield compounds of formula (J). A compound of Formula (H) is dissolved in a suitable solvent, liquid ammonia added, and the reaction sealed in a vessel resistant to elevated pressures. Suitable solvents include, but are not limited to, toluene, lower alcohols, acetonitrile, ethyl ether, tetrahydrofuran, dimethylformamide, chloroform,

methylenedichloride, and the like. Ethanol is the preferred solvent. The reaction is preferably carried out at about 145°C for approximately 16 hours.

The compounds of formula (A) can be prepared by procedures well known in the art. For example, a compound of formula (J) can be tosylated in an inert solvent by addition of a base and tosyl chloride. Suitable solvents include, but are not limited to, tetrahydrofuran, lower alcohols, ethyl acetate, methylene chloride, acetonitrile, chloroform, and the like. Suitable bases include triethylamine, sodium bicarbonate, sodium hydroxide, imidazole, and the like. Pyridine is the preferred base and solvent. The tosyl chloride is generally employed in a slight molar excess. For example, approximately a 1 to 2 molar excess, relative to the compound of formula (J), is generally employed. A 1.1 molar excess is typically preferred. The reaction is preferably carried out at about 90°C for approximately 16 hours.

Compounds of formula (B) can be prepared by synthetic methods known in the art and by methods disclosed herein. For example, compounds of formula (B), wherein L is bromide, can be prepared according to Scheme III shown below.

25

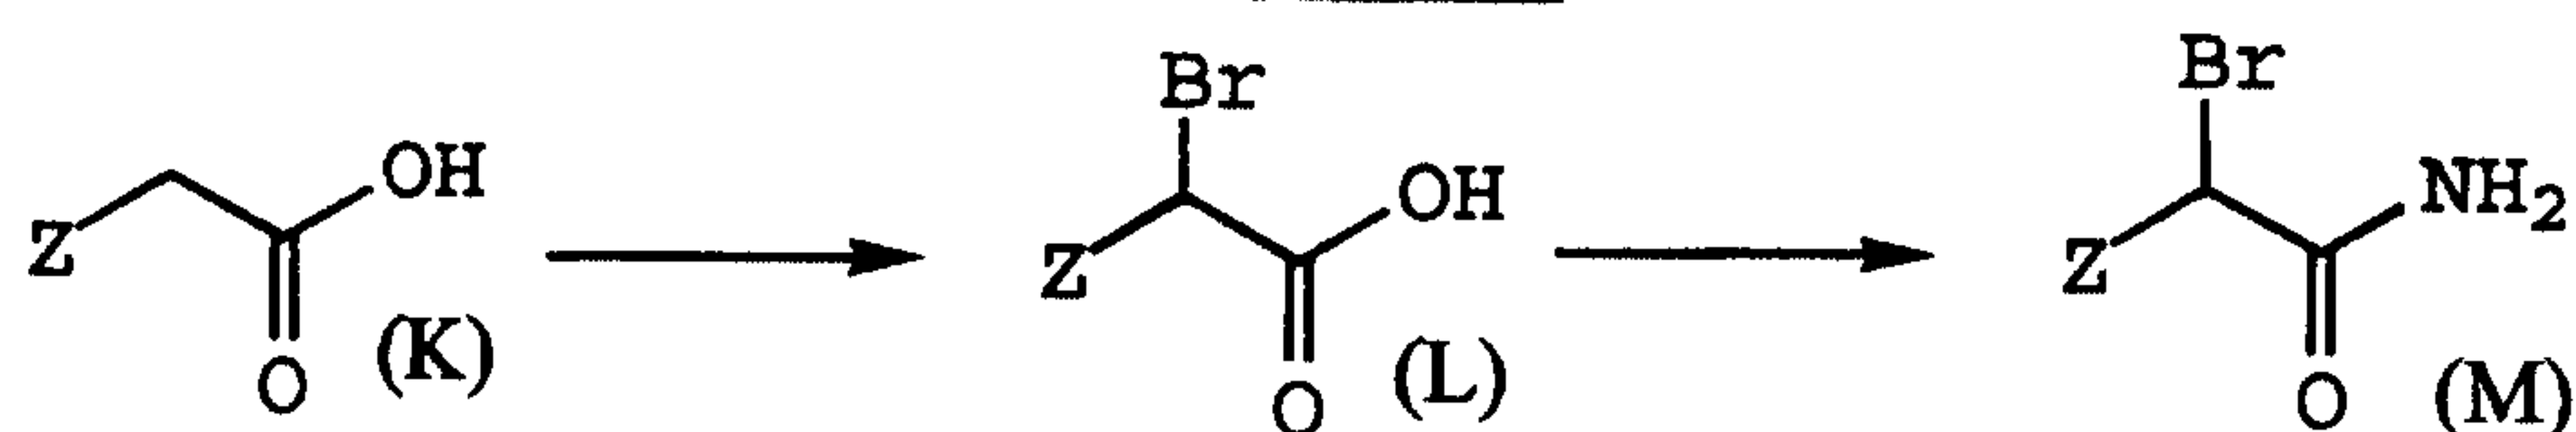Scheme III

An appropriately substituted acetic acid of formula (K) is brominated in an appropriate solvent in the presence of a radical initiator to afford compounds of formula (L). Suitable brominating agents include, but are not limited to, molecular bromine, N-Bromosuccinimide, and the like. N-Bromosuccinimide is the preferred brominating agent. Suitable solvents include, but are not limited to, diethyl ether, tetrahydrofuran, methylene chloride, chloroform,


-12-

acetonitrile, benzene, dimethylsulfoxide, carbon tetrachloride, and the like. Carbon tetrachloride is the preferred solvent. Suitable radical initiators include, but are not limited to, phosphorous trichloride, molecular phosphorous, benzoylperoxide, UV radiation, and the like. Preferred initiators are benzoylperoxide and UV radiation. The brominating reagent is generally employed in a stoichiometric amount. For example, 1 equivalent, relative to the compound of formula (K), is generally employed and is typically preferred. The initiator is generally employed in a catalytic amount. For example, an approximately 0.1 to 1 mole percent, relative to the compound of formula (K), is generally employed. A 0.4 mole percentage is typically preferred. The reaction is preferably carried out at about 77°C for approximately 5 hours.

Compounds of formula (M) can be prepared by amidation of compounds of formula (L) by procedures known in the art. For example, the transformation can be carried out by dissolving or suspending the compound of formula (L) in an appropriate solvent and then adding a nucleophilic source of chlorine to afford the corresponding acid chlorides, which can then be amidated *in situ* with gaseous ammonia. Suitable solvents include, but are not limited to, alkanes, dimethylformamide, lower alcohols, ethyl acetate, methylene chloride, tetrahydrofuran, diethyl ether, acetonitrile, chloroform, and the like. Dimethylformamide, methylene chloride, hexanes and toluene are the preferred solvents. Suitable chlorinating agents include, but are not limited to, thionyl chloride, phosphorous pentachloride, bis(trichloromethyl)carbonate, allyl chloroformate, phosphorous trichloride, triphosgene, oxalyl chloride, and the like. Oxalyl chloride is the preferred chlorinating agent. The chlorinating agent is generally employed in a slight molar excess. For example, approximately a 1 to 2 molar excess, relative to the compound of formula (L), is generally employed. A 1.6

molar excess is typically preferred. The ammonia is generally employed in a substantial molar excess. For example, ammonia gas is preferably bubbled through the reaction mixture for approximately one hour delivering an unspecified amount of ammonia. The reaction is preferably carried out at about 0°C when adding the chlorinating agent and then for approximately 3 hours at about 22°C before adding the gaseous ammonia over approximately 1 hour at about 22°C.

Additionally, compounds of Formula (B), wherein L is O-tosylate, can be prepared according to Scheme IV shown below.

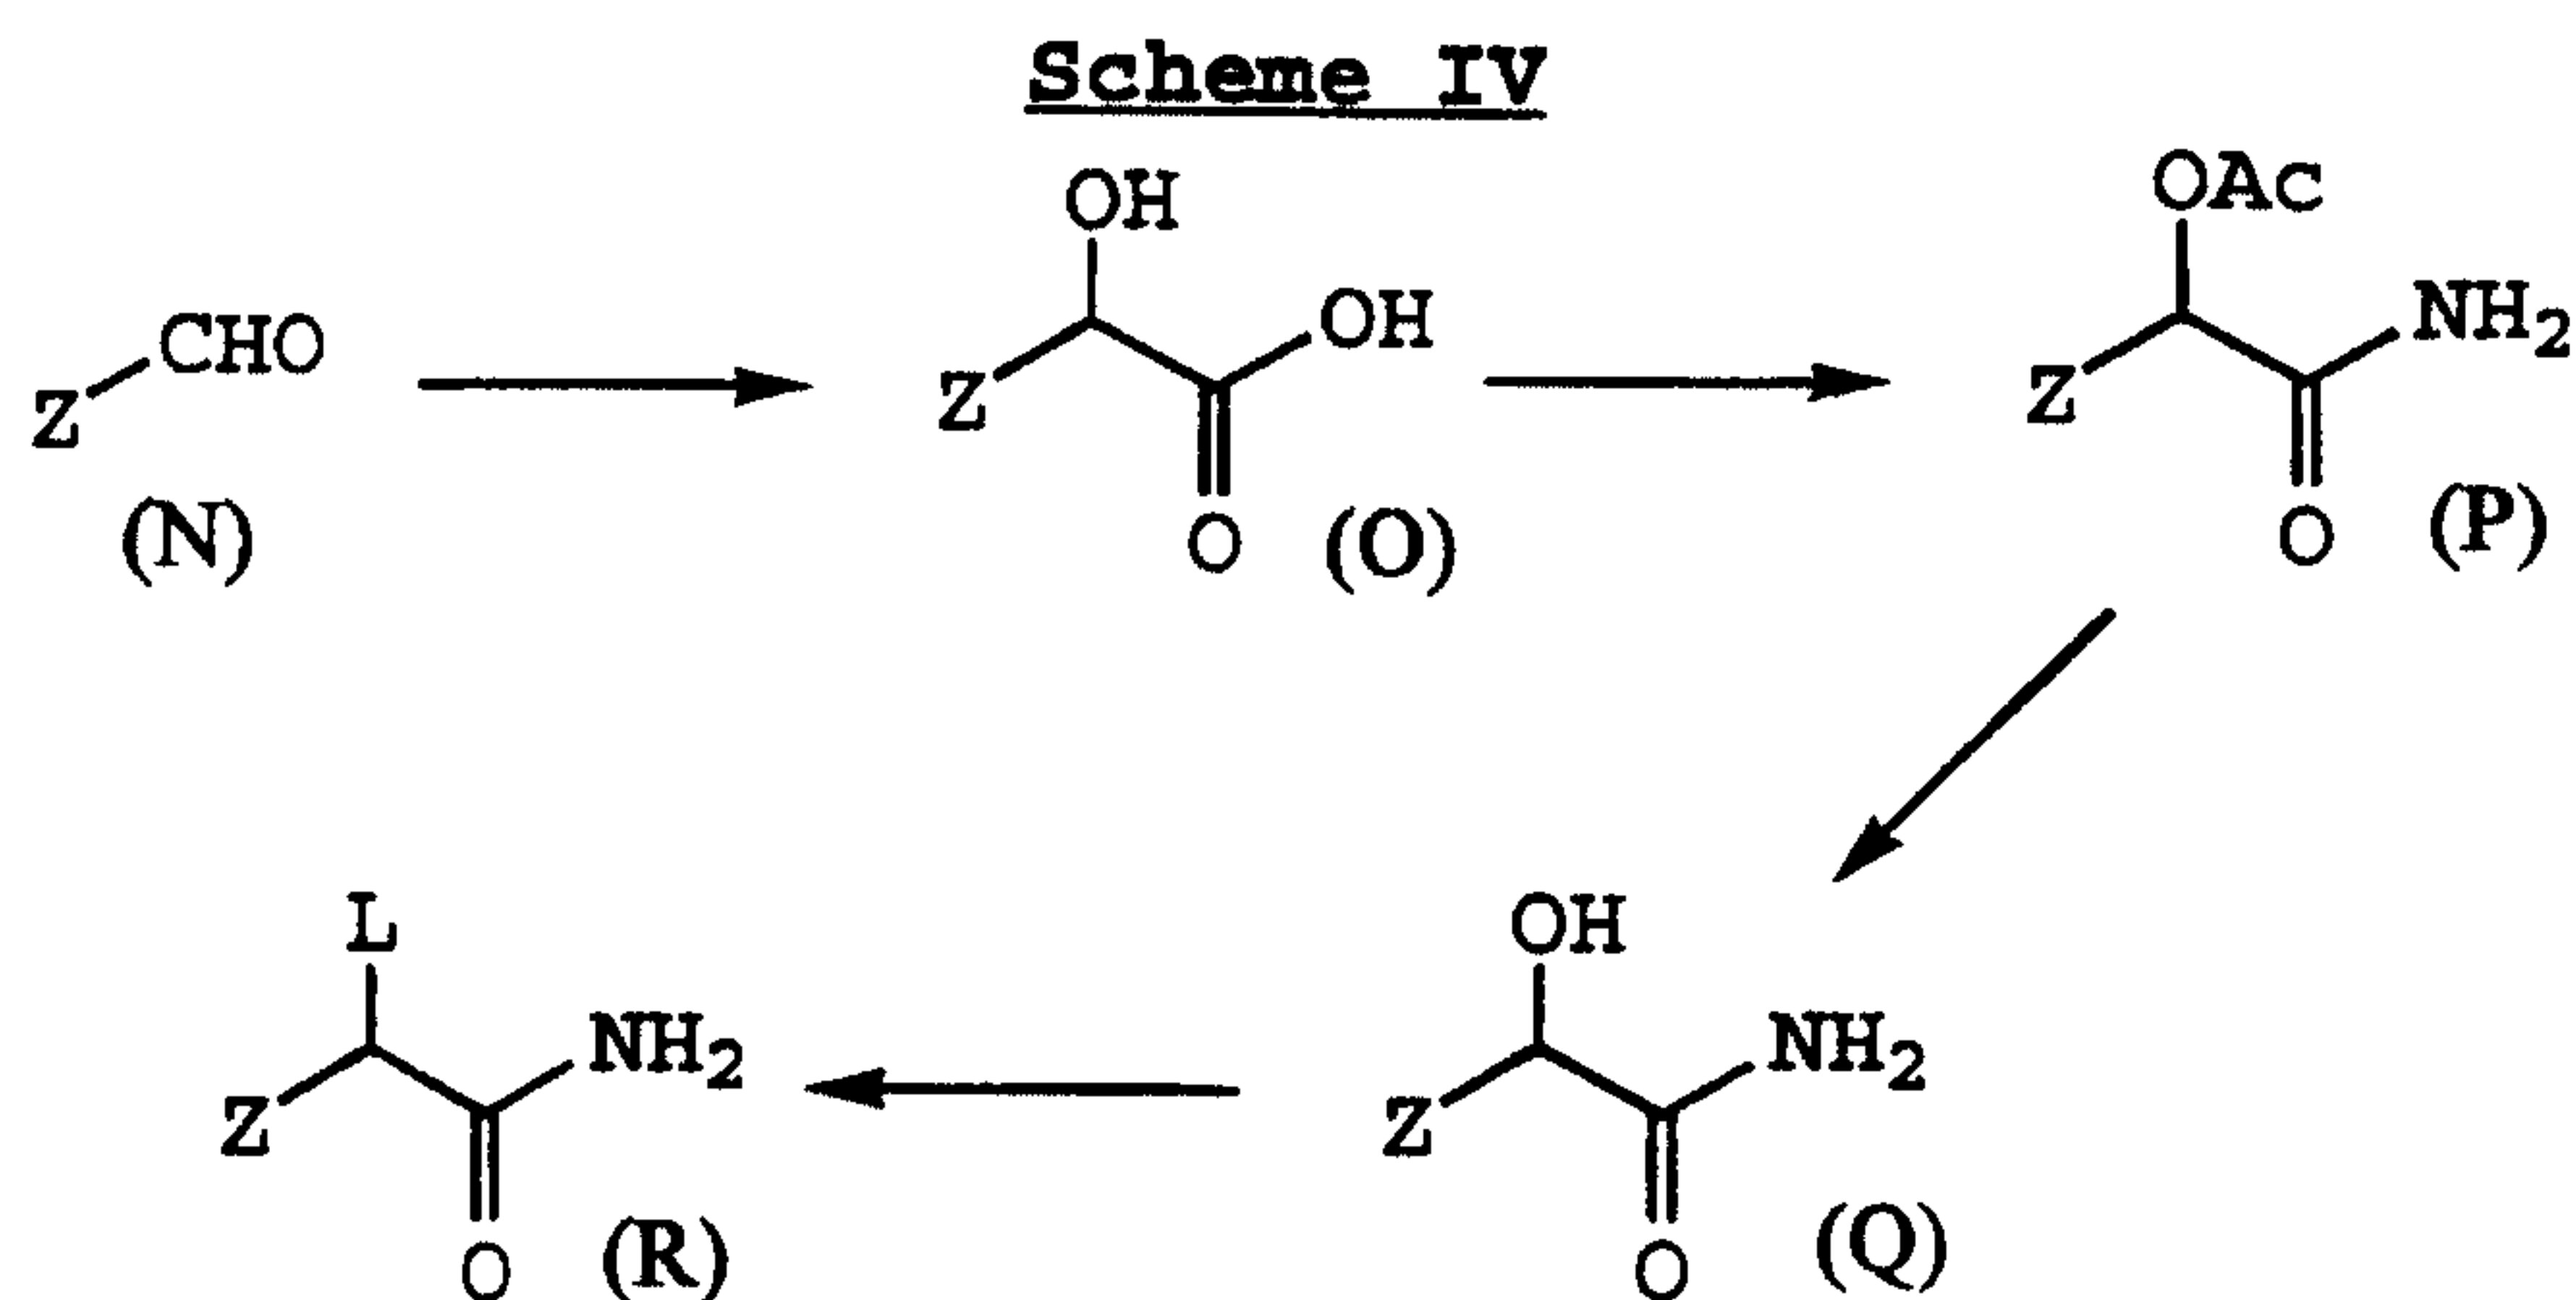

The compounds of formula (O) can be prepared from appropriately substituted aldehydes by methods known in the art. For example, a compound of formula (N) is mixed with the acyl anion equivalent of a carboxylate, such as trimethylsilyl cyanide, to afford, upon hydrolysis, the compounds of formula (O). Suitable solvents include, but are not limited to, lower alcohols, ethyl acetate, methylene chloride, acetonitrile, chloroform, and the like. The reaction is preferably run "neat" when either the aldehyde or acyl anion equivalent is a liquid. The acyl anion equivalent is generally employed in a stoichiometric ratio. For example, 1 equivalent of acyl anion, relative to the benzaldehyde, is generally employed and is typically preferred. The reaction is preferably carried out at about 25°C for approximately 72

hours after addition of the acylanion equivalent and then at about 100°C for approximantely 18 hours to yield compounds of formula (O).

5 The compounds of Formula (P) can be prepared from compounds of Formula (O) by methods well known in the art. Acetylation of hydroxyacids is described throughout the art. For example, see Greene T.W., Protective Groups in Organic Synthesis, John Wiley & Sons (1981).

10 Compounds of formula (Q) can be prepared by amidation of compounds of Formula (P) by procedures well known in the art and disclosed herein. The amidation is substantially analogous to the method utilized to prepare compounds of formula (M) from compounds of formula (L).

15 The compounds of Formula (Q) can be prepared by removal of the acetyl protecting group in compounds of Formula (P) by methods well known in the art. For example, see Greene T.W., Protective Groups in Organic Synthesis, John Wiley & Sons (1981).

20 The compounds of Formula (R) which have an alcohol moiety converted to a leaving group are prepared by procedures well known in the art. For example, see Stang, et. al., Synthesis, pp. 85-1266 (1982).

25 Compounds of Formula (C) can be prepared by methods known in the art and by methods disclosed herein. For example, a compound of Formula (A) is combined with a compound of Formula (B) to afford the compounds of Formula (C). Suitable solvents include, but are not limited to, toluene, tetrahydrofuran, methylene chloride, diethyl ether, acetonitrile, and the like.

30 Dimethylformamide is typically the preferred solvent. Suitable bases include, but are not limited to, cesium fluoride, cesium carbonate, hindered alkyl amines, and the like, including especially diisopropylethyl amine. Sodium hydride is typically the preferred base. The base
35 is generally employed in a slight molar excess. For example, approximately a 1 to 1.25 molar excess, relative to the compound of Formula (A), is generally employed. A 1.1 molar excess is typically preferred. The compound of

-15-

Formula (B) is generally employed in a slight molar excess. For example, approximately a 1 to 1.1 molar excess, relative to the compound of Formula (A), is generally employed. A 1.05 molar excess is typically preferred. The deprotonation is preferably carried out at room temperature for approximately 1.5 hours. After addition of the compound of Formula (B), the reaction is typically preferably carried out at room temperature for about 7 days.

Compounds of Formula (D) can be prepared by methods known in the art and by methods disclosed herein. For example, a compound of formula (C) can be cyclized by dissolving a compound of formula (C) in a suitable solvent and adding trifluoroacetic anhydride to afford the compounds of Formula (D). Suitable solvents include, but are not limited to, toluene, dimethylformamide, tetrahydrofuran, diethyl ether, acetonitrile, and the like. Methylenechloride is typically the preferred solvent. The trifluoroacetic anhydride is generally employed in a substantial molar excess. For example, approximately a 5 to 20 molar excess, relative to the compound of Formula (C), is generally employed. A 12.4 molar excess is typically preferred. The reaction is typically preferably carried out at about the reflux temperature of methylene chloride (40°C) for approximately 3 hours.

Compounds of Formula (E) can be prepared by methods known in the art and by methods disclosed herein.

The compounds of Formula (E), wherein X is CHR^1 and R^1 is CONH_2 , $\text{CO}(\text{C}_1\text{-C}_4 \text{ alkyl})$, CONR^2R^3 , or $\text{CO}_2(\text{C}_1\text{-C}_4 \text{ alkyl})$ can be prepared from compounds of formula (D) by procedures known in the art as well as procedures disclosed herein. For example, an appropriately substituted Horner-Emmons reagent (see Organic Reactions, 1977 Volume 25, pg. 73.) is deprotonated with a strong base in an aprotic solvent and a compound of Formula (D) added to afford compounds of Formula (E). Suitable strong bases include, but are not limited to, alkyl

-16-

lithiums, lithium diisopropylamine, lithium bistrimethylsilylamide, and the like. Potassium t-butoxide is the preferred base. Suitable solvents include, but are not limited to, diethyl ether, tetrahydrofuran, methylene chloride, chloroform, dimethylsulfoxide, and the like. Dimethylformamide and tetrahydrofuran are the preferred solvents. The Horner-Emmons reagent is generally employed in a slight molar excess. For example, from about a 1 to 2 molar excess, relative to the compound of formula (D), is common. A 1.1 molar excess is typically preferred. The reaction is preferably carried out at about 0°C when adding the compound of Formula (A), and then at about 25°C for approximately 1 hour.

The compounds of Formula (E), wherein X is NOH, can be prepared from compounds of Formula (D) by procedures known in the art as well as procedures disclosed herein. For example, compounds of Formula (D) can be dissolved or suspended in an appropriate solvent and hydroxylamine added to afford the compounds of Formula (E). Suitable solvents include, but are not limited to, lower alcohols, ethyl acetate, methylene chloride, chloroform, and the like. Methanol or pyridine is the preferred solvent. The hydroxylamine is generally employed in a substantial molar excess. For example, from about a 3 to 10 molar excess, relative to the compound of Formula (E), is common. A 5.0 molar excess is typically preferred. The reaction is preferably carried out at about 25°C for approximately 24 hours.

The compounds of Formula (E), wherein X is CHR^1 , and R^1 is H, or CN; can be prepared from compounds of Formula (D) by procedures known in the art as well as procedures disclosed herein. For example, an appropriately substituted Peterson Olefination Reagent (see Organic Reactions, 1990, volume 38, pg. 1.) can be dissolved in a suitable solvent and deprotonated with a strong base. A compound of Formula (D) can then added to the product. Suitable strong bases include, but are not

-17-

limited to, potassium t-butoxide, alkyl lithiums, lithium diisopropylamine, lithium bistrimethylsilylamide, and the like. N-Butyl lithium is the preferred base. Suitable solvents include, but are not limited to, diethyl ether, methylene chloride, chloroform, dimethylformamide, dimethylsulfoxide, and the like. Tetrahydrofuran is the preferred solvent. The Peterson Reagent is generally employed in a substantial molar excess. For example, from about a 3 to 10 molar excess, relative to the compound of Formula (D), is common. A 5.0 molar excess is typically preferred. The reaction is preferably carried out at about -78°C when deprotonating the Peterson Reagent and when adding the compound of Formula (D), and then at about 25°C for approximately 24 hours.


The compounds of Formula (E), wherein X is CHR^1 and R^1 is halo, can be prepared from compounds of Formula (E), wherein X is CH_2 , by procedures known in the art as well as procedures disclosed herein. For example, a compound of Formula (E), wherein X is CH_2 , can be dissolved in a suitable solvent and an appropriate halogenating agent added to form the product. Suitable solvents include, but are not limited to, methylene chloride, tetrahydrofuran, chloroform, acetonitrile, acetic acid, and the like. Tetrahydrofuran and carbon tetrachloride are the preferred solvents. Suitable halogenating agents include, but are not limited to, benzene seleninyl chloride/aluminum chloride, thionyl chloride, molecular bromine, CsSO_4F , NFTh , and the like. The halogenating reagent is generally employed in a slight molar excess. For example, from about a 1 to 2 molar excess, relative to the starting material. A 1.1 molar excess is typically preferred. The reaction is preferably carried out at about -10°C when adding the halogenating agent and then at about 22°C for approximately 1 hour.

A skilled artisan would appreciate that the ratio of cis/trans products isolated by the schemes disclosed herein can vary widely, from completely cis or trans to

equally proportions of both, depending upon the starting materials employed and the reaction conditions utilized.

Compounds of formula (I) wherein A' is COR⁵ can be prepared according procedures shown in Scheme V outlined below.

Scheme V

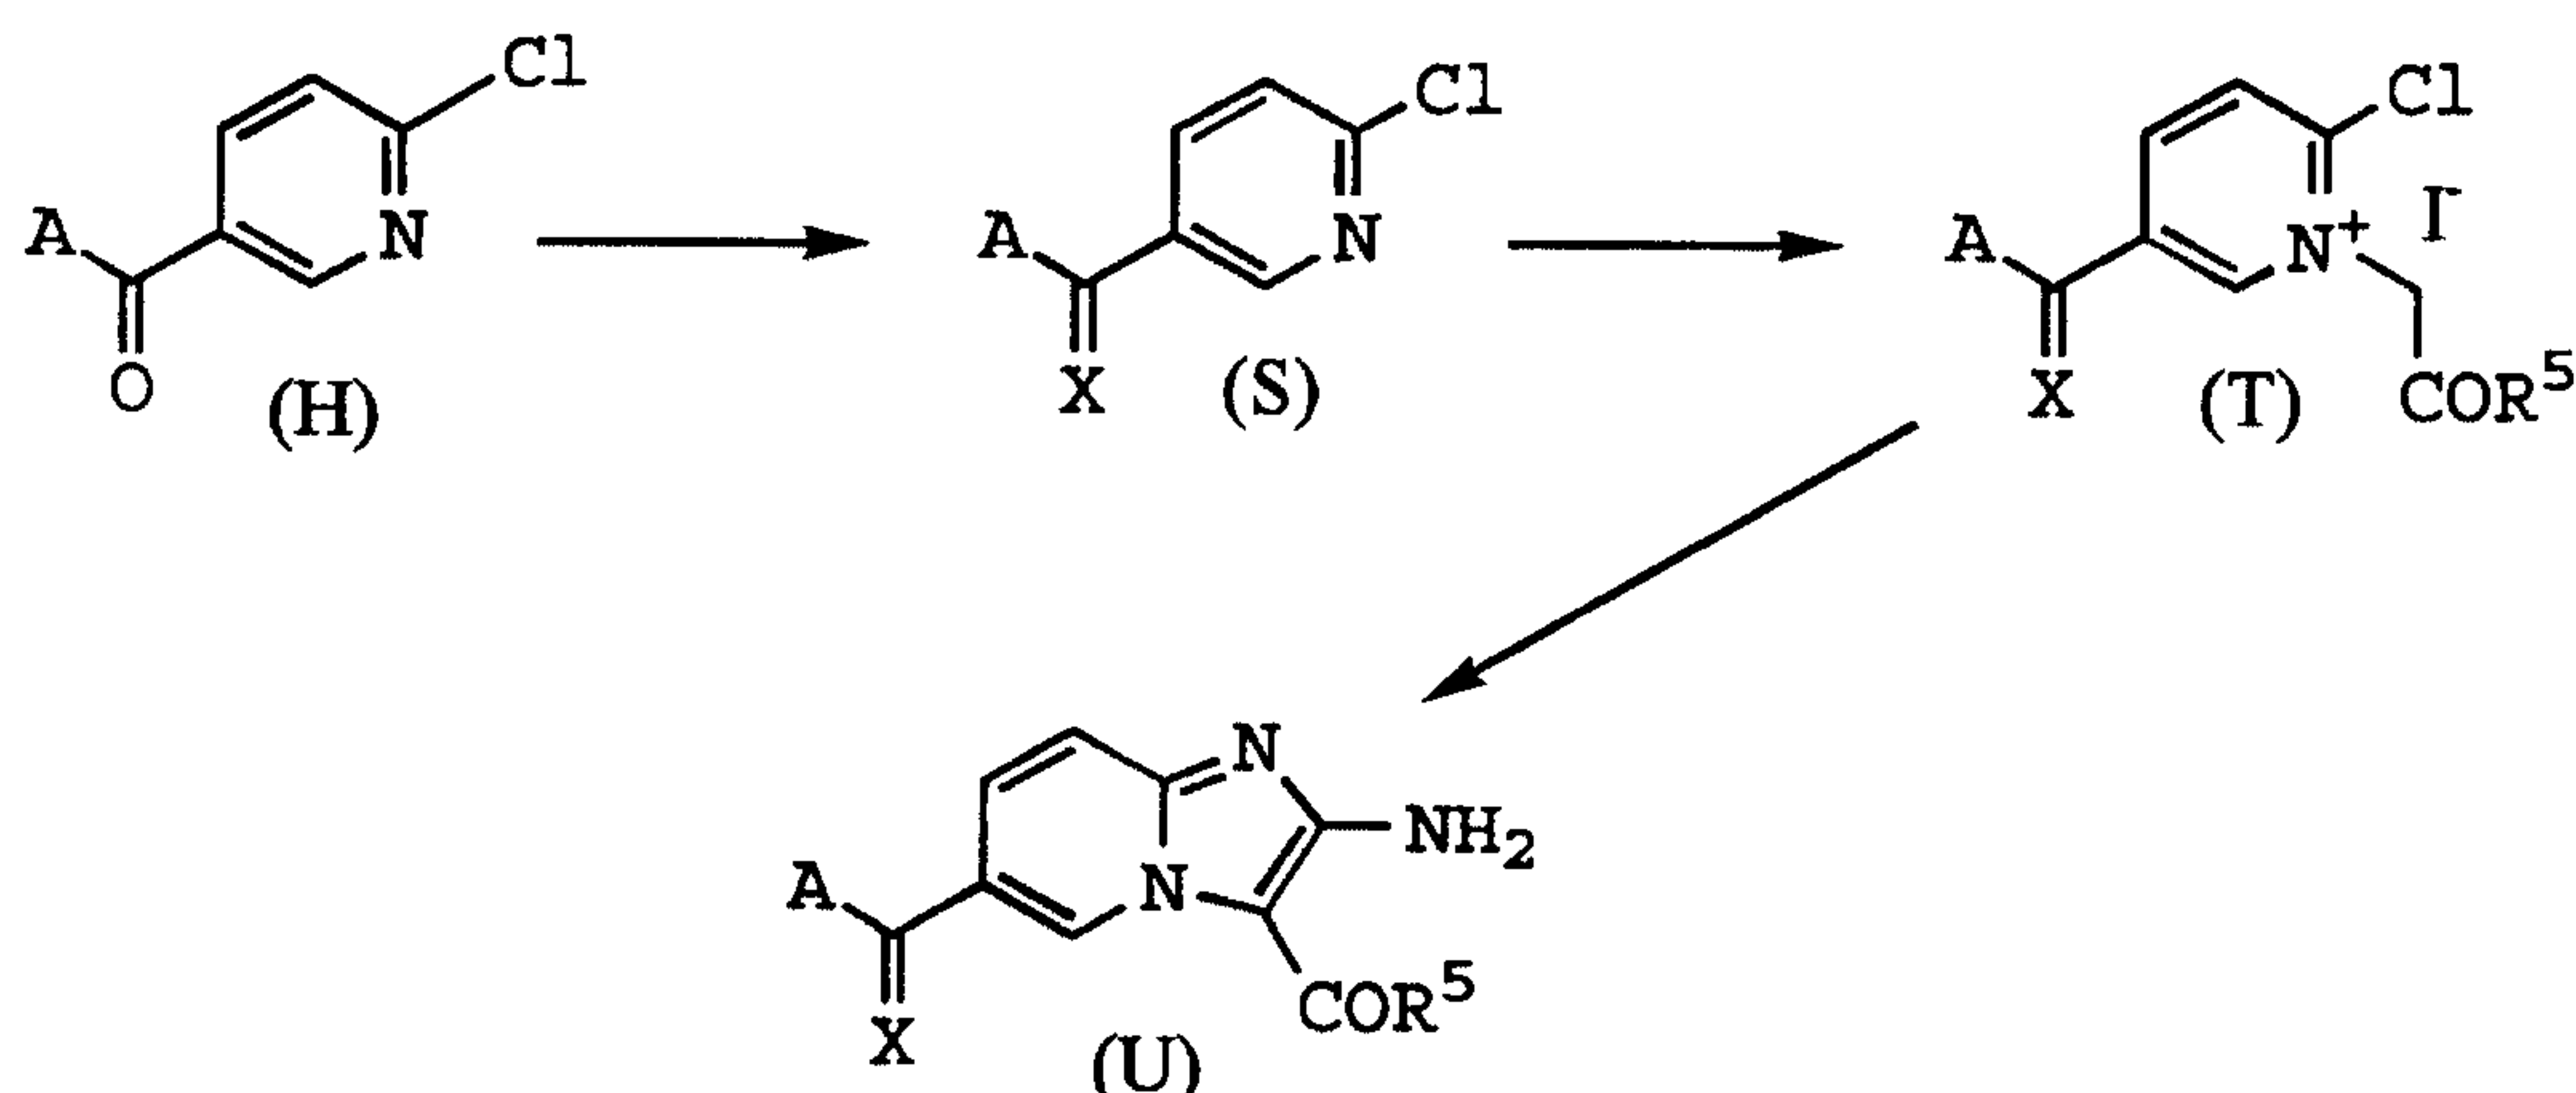

Compounds of Formula (S) can be prepared by methods known in the art and disclosed herein. For example, compounds of Formula (H) can be converted to compounds of Formula (S) in a manner substantially analogous to the conversion of compounds of Formula (D) to those of Formula (E) described herein.

Compounds of Formula (T) can be prepared by methods known in the art and disclosed herein. For example, a compound of Formula (S) and a compound of the formula BrCH₂COR⁵ can be dissolved in an appropriate solvent in the presence of iodide anion to afford the compounds of formula (T). Suitable solvents include, but are not limited to, toluene, dimethylformamide, methylene chloride, tetrahydrofuran, diethyl ether, acetonitrile, and the like. Acetonitrile is the preferred solvent. Suitable sources of iodide anion include, but are not limited to, iodide salts such as sodium, potassium, and ammonium iodide, and the like. Sodium iodide is the preferred source of iodide anion. The compound of the formula BrCH₂COR⁵ is generally employed in a substantial molar excess. For example, approximately a 2 to 10 molar


excess, relative to the compound of Formula (S), is generally employed. A 3.7 molar excess is typically preferred. The iodide anion is generally employed in a substantial molar excess. For example, approximately 2 to 10 molar excess, relative to the compound of Formula (S), is generally employed. A 3.8 molar excess is typically preferred. The reaction is preferably carried out at about the reflux temperature of the solvent for approximately 40 hours.

Compounds of Formula (U) can be prepared by methods known in the art and disclosed herein. For example, a compound of Formula (T), aminonitrile, and a base can be combined and dissolved in an appropriate solvent to afford the compounds of formula (U). Suitable solvents include, but are not limited to, toluene, dimethylformamide, methylene chloride, tetrahydrofuran, diethyl ether, acetonitrile, and the like. Acetonitrile is the preferred solvent. Suitable bases include, but are not limited to, carbonates, hydroxides, and the like. Potassium carbonate is the preferred base. The aminonitrile is generally employed in a slight molar excess. For example, approximately a 1 to 1.05 molar excess, relative to the compound of Formula (T), is generally employed. A 1.02 molar excess is typically preferred. The base is generally employed in a substantial molar excess. For example, approximately a 2 to 5 molar excess, relative to the compound of Formula (T), is generally employed. A 3.05 molar excess is typically preferred. The reaction is typically preferably carried out at about the reflux temperature of the solvent for approximately 14 hours.

Compounds of formula (I) wherein A' is $S(O)_nR^5$ can be prepared according procedures shown in Scheme VI outlined below.

Scheme VI

- 20 -

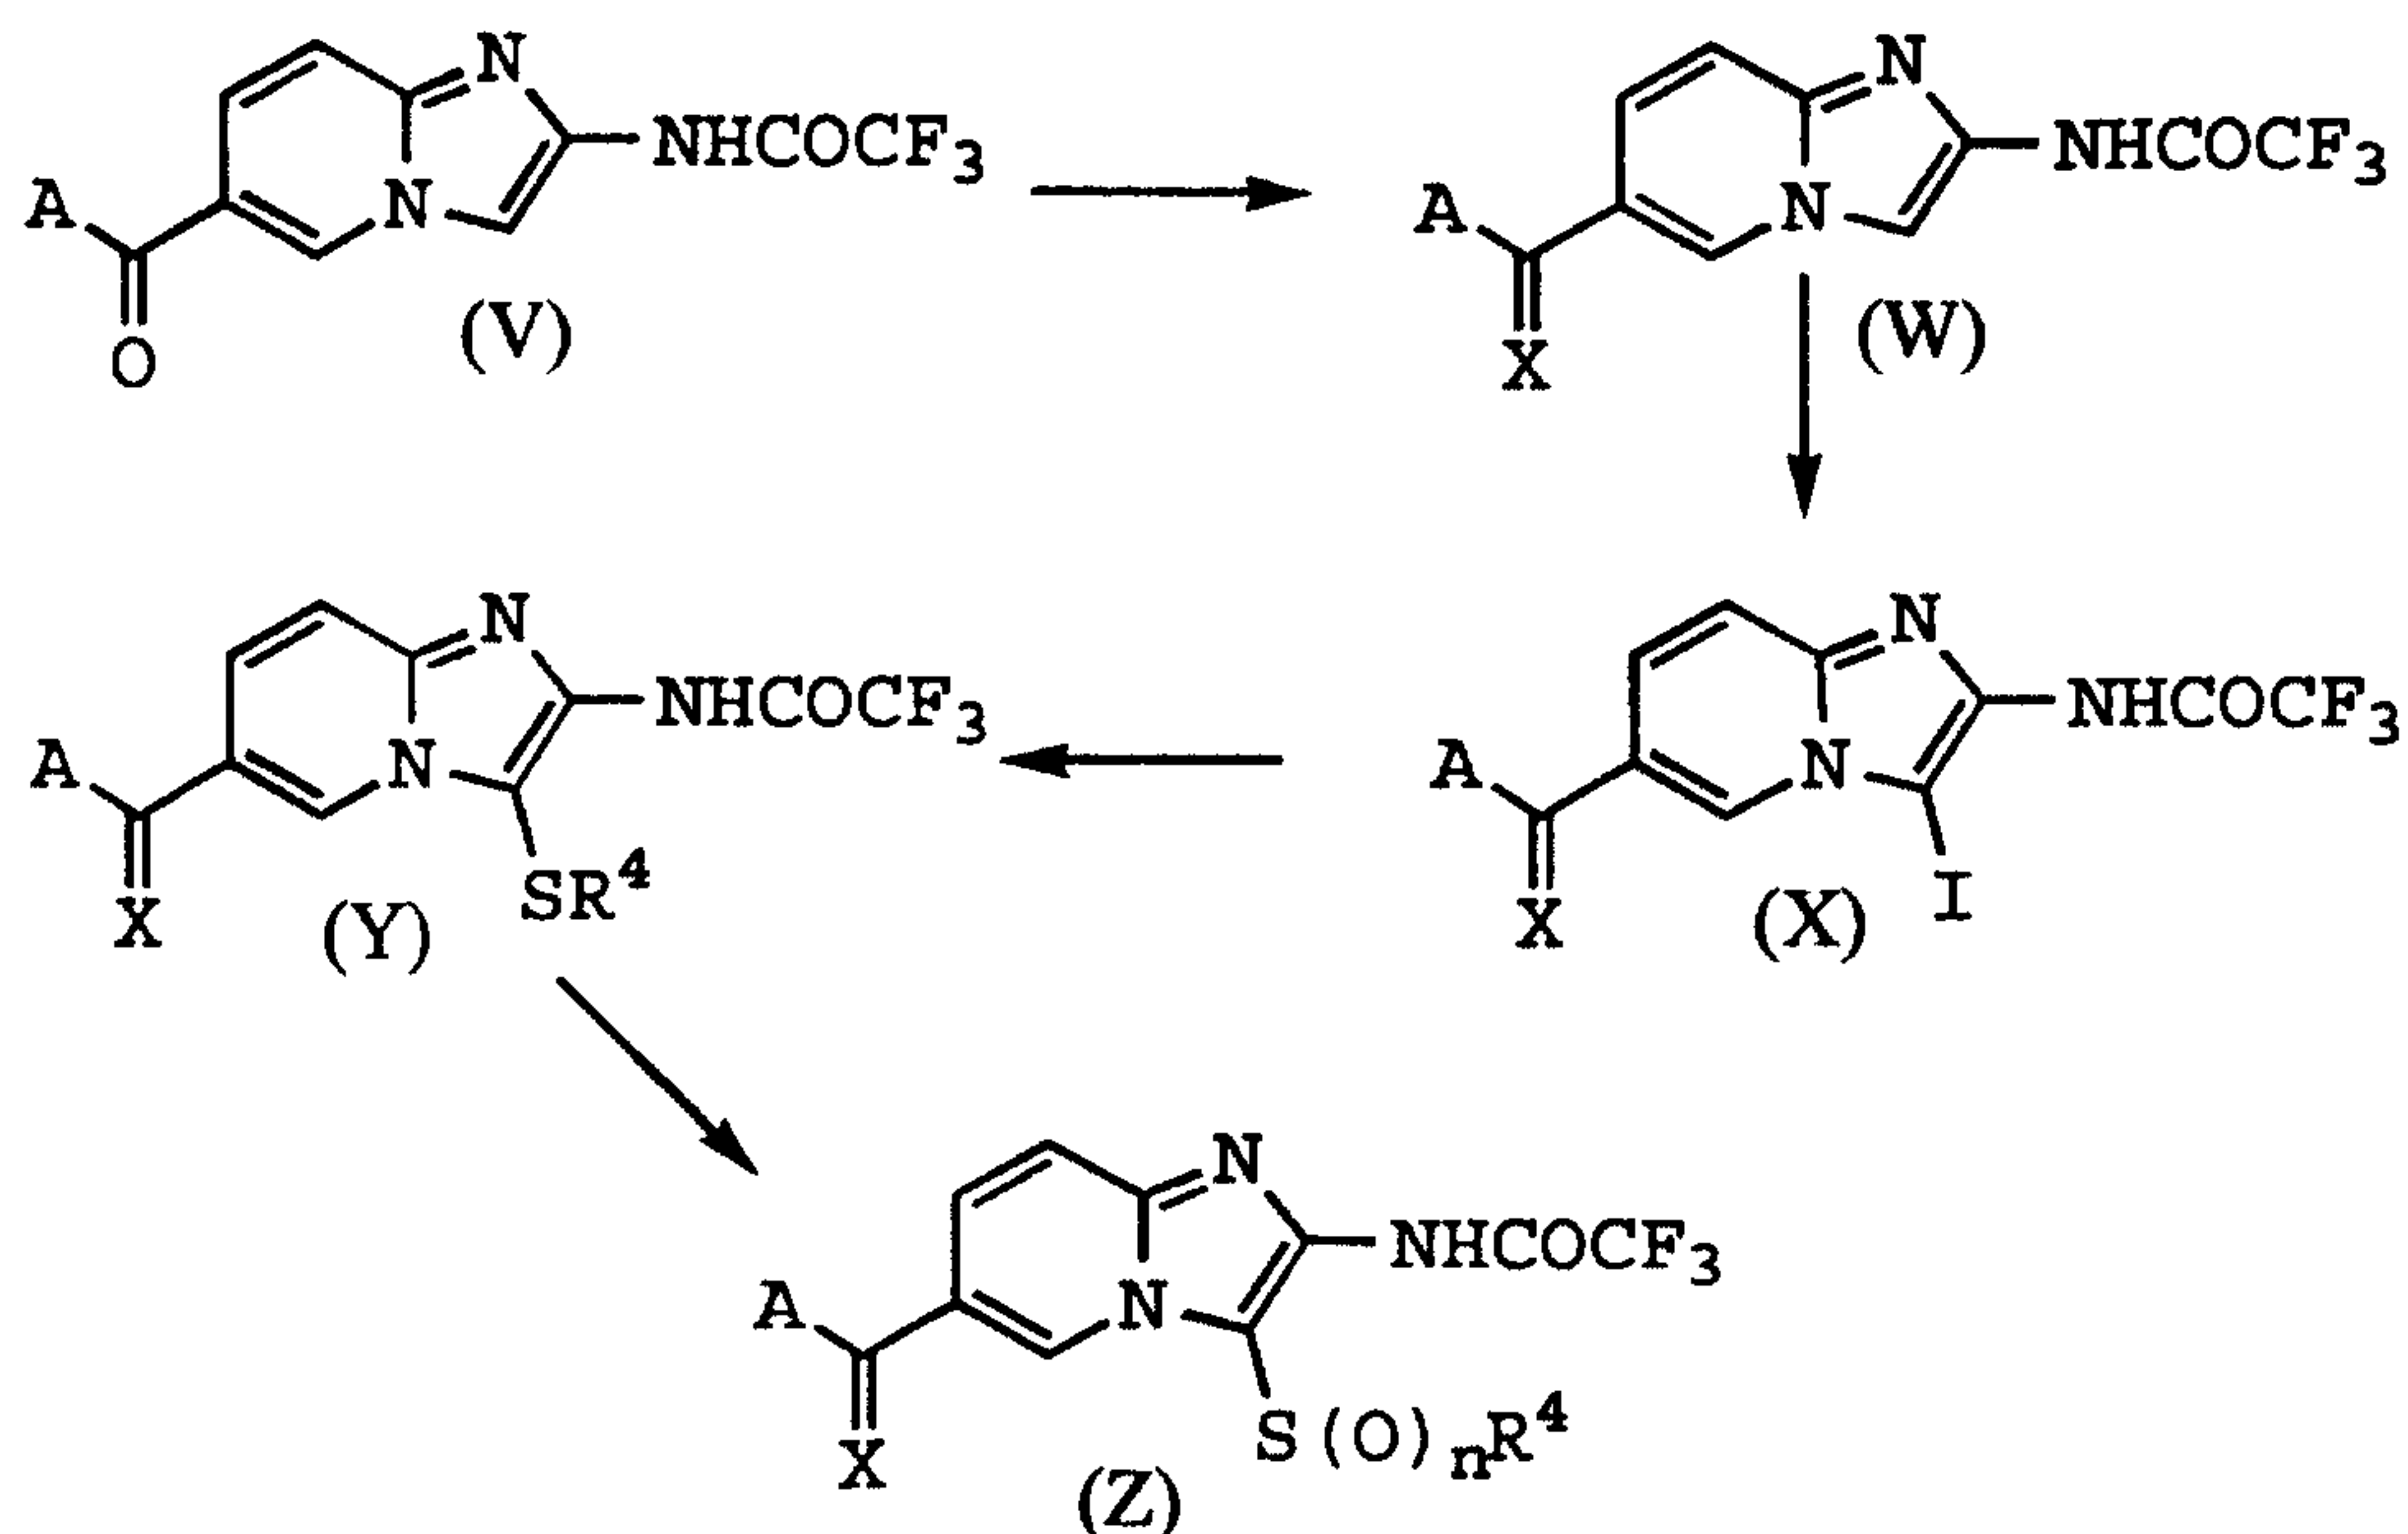

Compounds of Formula (W) can be prepared by methods known in the art and disclosed herein. For example, compounds of Formula (V) can be converted to compounds of Formula (W) in a manner substantially analogous to the conversion of compounds of Formula (D) to those of Formula (E) described previously within.

Compounds of Formula (X) can be prepared by methods known in the art and disclosed herein. For example, compounds of Formula (W) can be dissolved in a suitable solvent and an iodinating reagent added to form the compounds of Formula (X). Suitable solvents include, but are not limited to, toluene, dimethylformamide, methylene chloride, tetrahydrofuran, diethyl ether, acetonitrile, and the like. Acetonitrile is the preferred solvent. Suitable iodinating reagents include, but are not limited to, molecular iodine, N-iodosuccinimide, and the like. N-iodosuccinimide is the preferred iodinating reagent. The iodinating reagent is generally and preferably employed in a stoichiometric or equimolar amount relative to the compound of Formula (W). The reaction is preferably carried out at about 0°C for approximately 15 minutes.

Compounds of Formula (Y) can be prepared by methods known in the art and disclosed within. For example, appropriately substituted sulfides can be reacted with an

-21-

imidazopyridyl anion or anion equivalent by methods well known in the art. Suitable sulfides include but are not limited to, symmetrical sulfides, unsymmetrical disulfides, and thiol-sulfonates. The thiol sulfonates can be prepared from the generally commercially available disulfides by methods well known in the art and taught in *J. Am. Chem. Soc.* 1977, 4405.

Compounds of Formula (Y) can be prepared from compounds of Formula (X) by methods well known in the art and methods disclosed herein. For example, a metal-halogen exchange reaction with a compound of Formula (X), substantially analogous to that described previously in the preparation of compounds of Formula (H), followed by the addition of an appropriately substituted sulfide. The skilled artisan will recognize that in contrast to the preparation of the phenyl anion, which is used to form compounds of Formula (H), where there are no acidic protons, the analogous compounds of Formula (X) have one acidic proton and therefore should be deprotonated with a base before attempting the metal-halogen exchange reaction. Suitable bases include, but are not limited to, molecular lithium, alkyl lithiums, lithium amines such as lithium diisopropyl amine, lithium hydride and the like. Phenyl lithium is the preferred base. T-Butyl lithium is the preferred metal source. Suitable solvents include, but are not limited to, toluene, dimethylformamide, methylene chloride, acetonitrile, diethyl ether, tetrahydrofuran, and the like. Tetrahydrofuran is the preferred solvent. The base is generally employed in a slight to substantial molar excess. For example, approximately 1.5 to 3 molar excess relative to the compound of Formula (X) is generally employed. A 2.2 molar excess is typically preferred. The metal is generally employed in a slight to substantial molar excess. For example, approximately 1.5 to 3 molar excess relative to the compound of Formula (X) is generally employed. A 2.5 molar excess is typically preferred. The reaction is preferably carried out at

-22-

about -78°C for approximately 3 minutes after the addition of the base, for approximately 10 minutes after the addition of the metal source, and for approximately 30 minutes after addition of the sulfide.

5 Alternatively, compounds of Formula (Y), can be prepared from an imidazopyridyl anion equivalent, prepared from compounds of Formula (X) under Ullmann like coupling conditions. See Synthesis, 9-21, (1974) for a review of the Ullmann reaction. For example, a compound
10 of the Formula (X) can be dissolved in a suitable solvent, a copper source is added, followed by an appropriately substituted sulfide. Suitable solvents include, but are not limited to, toluene, dimethylformamide, methylene chloride, acetonitrile,
15 diethyl ether, tetrahydrofuran, pyridine, and the like. Pyridine is the preferred solvent. Suitable sources of copper include, but are not limited to, molecular copper, copper(I)oxide, and the like. Copper bronze or powdered copper is the preferred source. The copper is generally
20 employed in a slight to substantial molar excess. For example, approximately 1.2 to 3 molar excess relative to the compound of Formula (X) is generally employed. A 1.5 molar excess is typically preferred. The sulfide is generally employed in a slight molar deficiency. For
25 example, approximately a 50 to 95 molar percent, relative to the compound of Formula (X), is generally employed. A 78 molar percent is typically preferred. The reaction is preferably carried out at about 100°C for approximately 80 hours.

30 As another alternative, compounds of formula (Y) can be prepared from compounds of formula (X) by the use of a palladium catalyzed cross coupling reaction between a compound of the Formula (X) and an appropriately substituted trimethyl-thio-tin, i.e. $R^4S-Sn(Alkyl)_3$. See
35 for example Synth.Commun, 22, (5), p. 683, (1992).

Compounds of Formula (Z) can be prepared by oxidation of compounds of Formula (Y) by procedures well

known in the art and disclosed herein. For a general review of the oxidation of sulfides to sulfones, see Comprehensive Organic Synthesis, Volume 7, Ch. 6.2, pg. 762, Pergamon Press, Inc. New York, (1991).

5 The skilled artisan will recognize that it may become advantageous, although not necessary, to remove the trifluoroacetyl protecting group, found in the above schemes, at various points in the syntheses of the compounds of the present invention. The removal of this
10 protecting group can be accomplished by methods well known in the art and disclosed herein. For example, the trifluoroacetyl group can be removed by dissolving compounds of Formula (D), (E), (V), (W), (X), (Y), or (Z) in an appropriate solvent then adding a base to afford
15 the corresponding deprotected products. Appropriate bases include, but are not limited to, hydroxides, carbonates, amines, and the like. The preferred base is diisopropylethylamine. Alternatively, the protecting group can be hydrolyzed on a silica gel support. See
20 also Greene T.W., Protective Groups in Organic Synthesis, John Wiley & Sons (1981).

 In general, the reactions of Schemes I-VI are substantially complete in about 15 minutes to 72 hours when conducted at a temperature range of from about -78°C
25 to the reflux temperature of the reaction mixture. A skilled artisan would appreciate that the rate of a reaction generally increases with an increase in temperature. It is often advantageous, although not necessary, however, to conduct reactions at a slower rate
30 to better control the number and quantity of side products generated. The choice of reaction solvent is not critical so long as the solvent employed is inert to the ongoing reaction and the reactants are sufficiently solubilized to effect the desired reaction. Once a
35 reaction is complete, the intermediate compound may be isolated, if desired, by procedures known in the art. For example, the compound may be crystallized and then collected by filtration, or the reaction solvent may be

-24-

removed by extraction, evaporation, or decantation. The intermediate may be further purified, if desired by common techniques such as recrystallization or chromatography over solid supports such as silica gel or alumina. The compounds of Formula A-Z are preferably isolated before use in subsequent reactions.

Preparations and Examples

The following Preparations and Examples further illustrate specific aspects of the present invention. It is to be understood, however, that these examples are included for illustrative purposes only and are not intended to limit the scope of the invention in any respect and should not be so construed.

The compounds employed as initial starting materials in the synthesis of the compounds of this invention are known in the art, and, to the extent not commercially available are readily synthesized by standard procedures commonly employed in the art.

It will be understood by those skilled in the art that in performing the processes described above it may be desirable to introduce chemical protecting groups into the reactants in order to prevent secondary reactions from taking place. For example, any amine, alcohol, alkylamine or carboxy groups which may be present on the reactants may be protected using any standard protecting group which does not adversely affect the remainder of the molecule's ability to react in the manner desired. The various protective groups may then be removed simultaneously or successively using methods known in the art.

The cis and trans forms of the compounds of the present invention can be separated using column chromatography, for example reverse phase HPLC. The compounds may be eluted from the column using an appropriate ratio of acetonitrile and water or methanol and water.

In the following Preparations and Examples, the terms melting point, nuclear magnetic resonance spectra, electron impact mass spectra, field desorption mass spectra, fast atom bombardment mass spectra, high resolution mass spectra, infrared spectra, ultraviolet spectra, elemental analysis, high performance liquid chromatography, thin layer chromatography, nitrogen, water, ethyl acetate, ethyl ether, dichloromethane, dimethylformamide, chloroform, methanol, ethanol, acetonitrile, tetrahydrofuran, sodium hydroxide, potassium hydroxide, sodium bicarbonate, sulfuric acid, hydrobromic acid, hydrochloric acid, ammonium hydroxide, sodium sulfite, sodium hydrosulfite, sodium nitrite, sodium sulfate, saturated sodium chloride, sodium bromide, ammonium chloride, magnesium sulfate, sodium acetate, and room temperature are abbreviated "m.p.", "NMR", "EIMS", "MS(FD)", "MS(FAB)", "MS(HR)", "IR", "UV", "Analysis", "HPLC", and "TLC", "N₂", "H₂O", "EtOAc", "E₂O", "CH₂Cl₂", "DMF", "CHCl₃", "MeOH", "EtOH", "CH₃CN", "THF", "NaOH", "KOH", "NaHCO₃", "H₂SO₄", "HBr", "HCl", "NH₄OH", "Na₂SO₃", "NaHSO₃", "NaNO₂", "Na₂SO₄", "brine", "NaBr", "NH₄Cl", "MgSO₄", "NaOAc", and "RT" respectively. The values reported for MS(FD) correspond to mass numbers unless otherwise indicated. In addition, the absorption maxima listed for the IR spectra are only those of interest and not all of the maxima observed.

The NMR spectra were obtained on a Brüker Corp. 270 MHz instrument or on a General Electric QE-300 300 MHz instrument. The chemical shifts are expressed in delta (δ) values (parts per million downfield from tetramethylsilane). The MS(FD) spectra were taken on a Varian-MAT 731 Spectrometer using carbon dendrite emitters. EIMS spectra were obtained on a CEC 21-110 instrument from Consolidated Electrodynamics Corporation. IR spectra were obtained on a Perkin-Elmer 281 instrument. UV spectra were obtained on a Cary 118 instrument. TLC was carried out on E. Merck silica gel plates. Melting points are uncorrected.

-26-

In conjunction with the NMR spectra, the following abbreviations are used: "s" is singlet, "d" is doublet, "dd" is doublet of doublets, "t" is triplet, "q" is quartet, "m" is multiplet, "dm" is a doublet of
5 multiplets and "br.s", "br.d", "br.t", and "br.m" are broad singlet, doublet, triplet, and multiplet respectively. "J" indicates the coupling constant in Hertz (Hz). Unless otherwise noted, NMR data refers to the free base of the subject compound.

10 When used within the preparations, the terms "MS", "Analysis", "IR", "UV", and "NMR" indicate that the corresponding mass spectrum, elemental analysis, infrared spectrum, ultraviolet spectrum, and nuclear magnetic resonance spectrum were consistent with the desired
15 product.

Preparation 1

2-Chloro-5-benzoylpyridine

Aluminum chloride (100 g, 0.730 mol) was suspended in 200 ml benzene under N₂. A solution of 6-
20 chloronicotinoyl chloride (53 g, 0.30 mol) in 100 ml benzene was added to the rapidly stirring suspension then refluxed overnight. The reaction was cooled to RT, 1 L EtOAc was added, and the pH was adjusted to 8.5 with 5N NaOH. Aluminum salts precipitated and were filtered
25 away. The filtrate was washed with H₂O, dried over Na₂SO₄, and concentrated in vacuo. The resulting tan solid was recrystallized from 3:2 Et₂O:hexanes yielding 54.6 g (83%) of product as tan crystals. EA, MS(FD).

Preparation 2

30 2-Chloro-5-(4-fluorobenzoyl)pyridine

The fluorobenzene (150 ml, 1.60 mmol) and 6-chloronicotinoyl chloride (17.7 g, 100 mmol) were converted to product in a manner substantially analogous to Preparation 1 to yield 15.2 g. (66.1%). EA, MS(FD),
35 NMR.

Preparation 3

2-amino-5-benzoylpyridine

-27-

The 2-chloro-5-benzoylpyridine (100 g, 0.460 mol) was dissolved in 500 ml of 3A EtOH and 400 ml of anhydrous ammonia, placed in a bomb, then heated at 145°C for 16 hours. The solvents were removed in vacuo and the remaining tan solid was recrystallized from EtOH/H₂O yielding 77.4 g (85%) of product as a tan solid. EA, MS (FD).


Preparation 4

2-amino-5-(4-fluorobenzoyl)pyridine

The 2-chloro-5-(4-fluorobenzoyl)pyridine (59.1 g, 251 mmol) was converted to product in a manner substantially analogous to Preparation 3 to yield 35.4 g. (65.3%). EA, MS (FD).

Preparation 5

1,2-Dihydro-2-toluenesulfonimido-5-benzoylpyridine

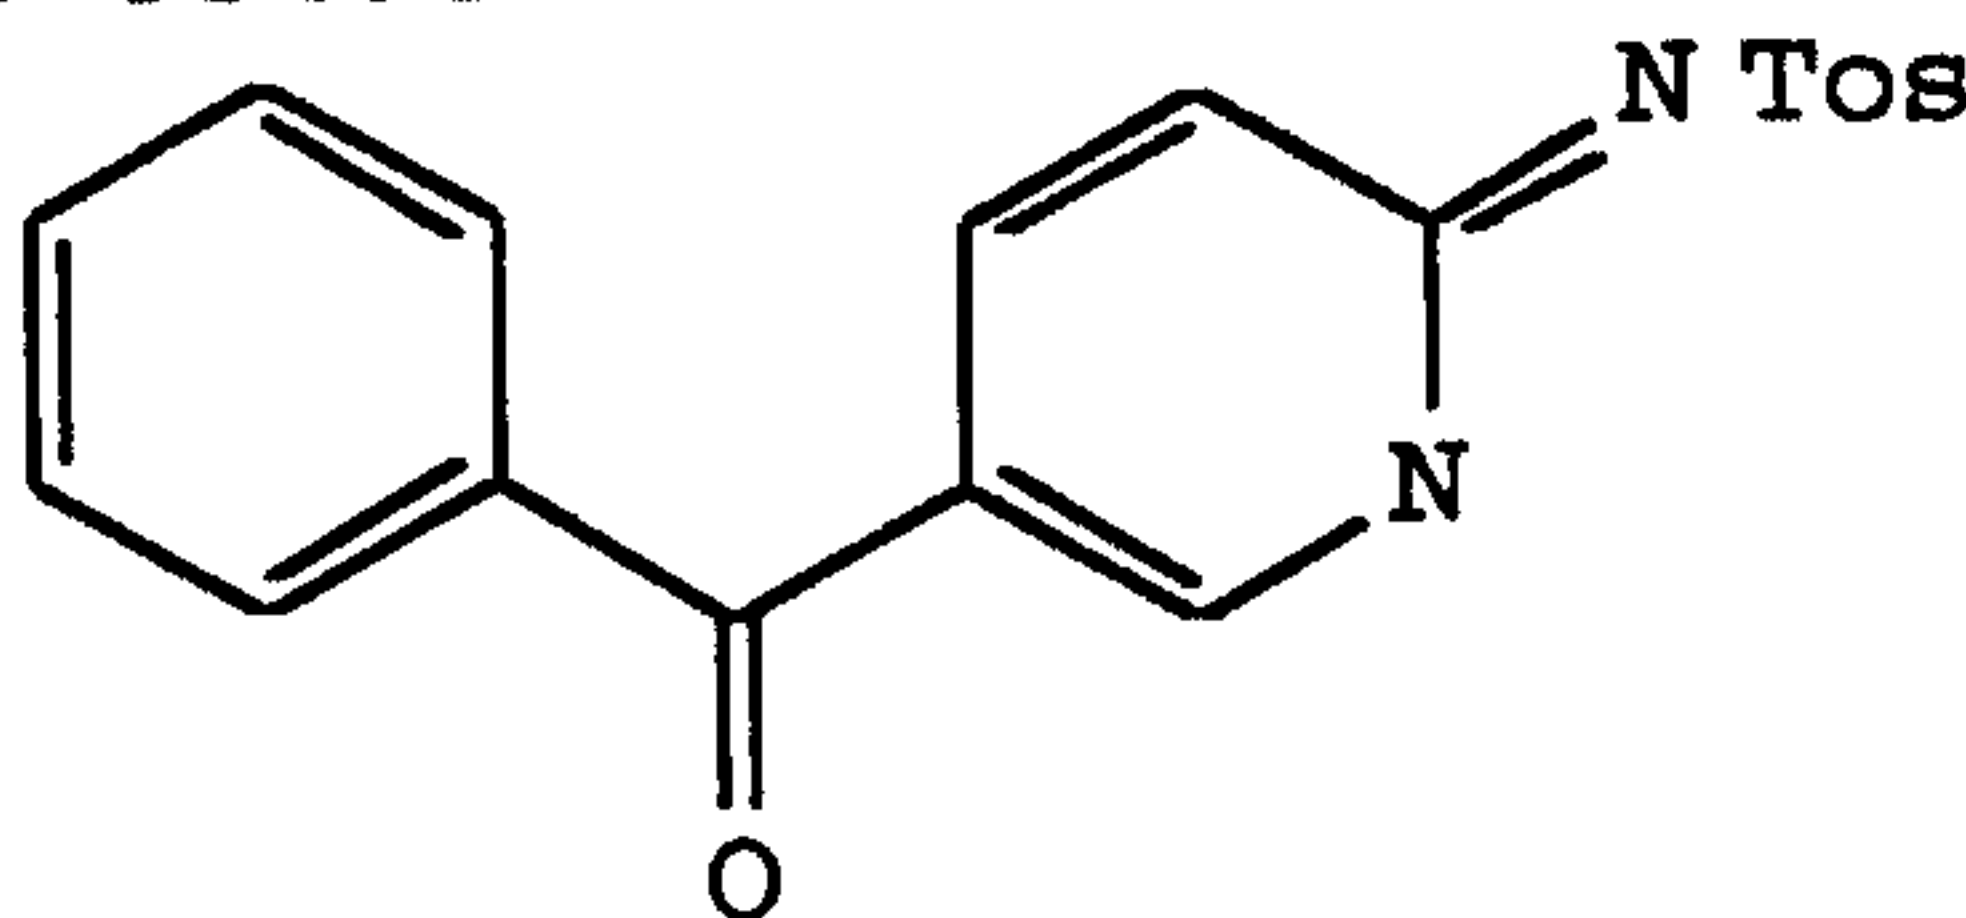

The 2-amino-5-benzoylpyridine (77.44 g, 0.390 mol) and p-toluenesulfonyl chloride (82.03 g, 0.43 mol) were combined in 300 ml of pyridine and heated to 90°C under N₂ for 16 hours. The pyridine was removed in vacuo and the solids stirred in 1.5 L of H₂O for 1 hour. The solids were filtered away and recrystallized from EtOAc yielding 118.7 g (86%) of product as off-white crystals. EA, MS (FD).

25

Preparation 6


1,2-Dihydro-2-toluenesulfonimido-5-(4-fluorobenzoyl)pyridine

The 2-amino-5-(4-fluorobenzoyl)pyridine (35.0 g, 162 mmol) was converted to product in a manner substantially analogous to Preparation 5 to yield 47.7 g. (79.6%). MS (FD), NMR.

Preparation 7

α -Bromo-(4-fluorophenyl)acetic acid

-28-

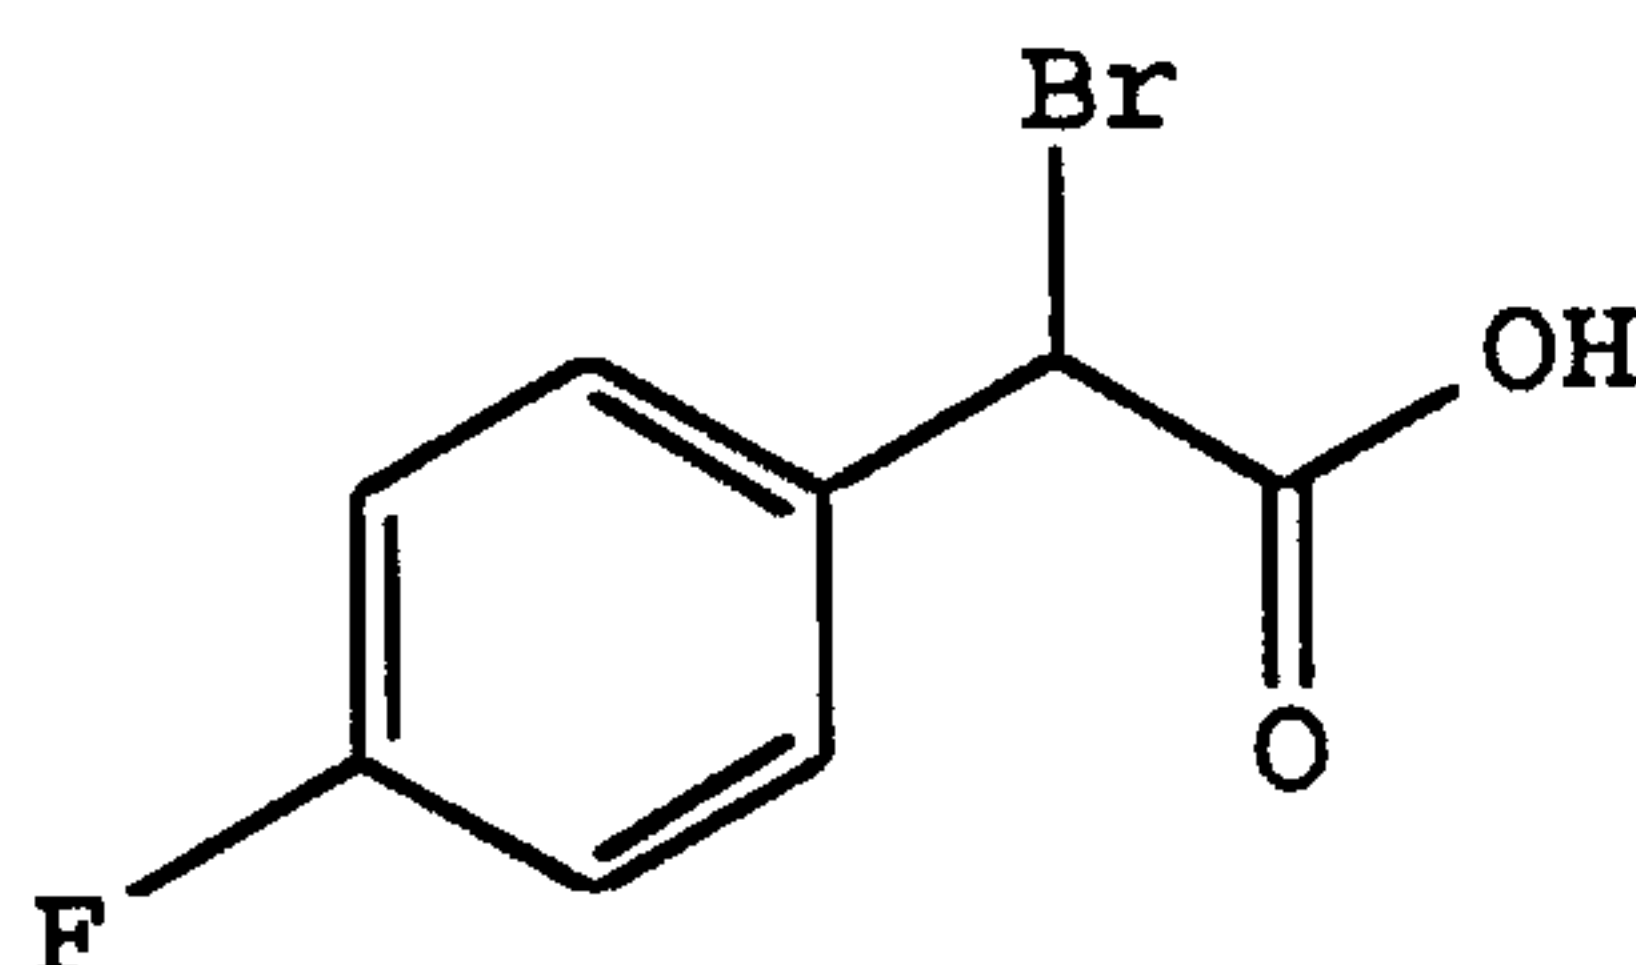

The 4-fluorophenylacetic acid (20 g, 0.13 mol), benzoyl peroxide (130 mg, 0.540 mmol), and N-bromosuccinimide (23.1 g, 0.130 mol) were combined in 500 ml carbon tetrachloride under N₂ and refluxed under UV irradiation (GE sunlamp) for 5 hours. The reaction was cooled to RT and the succinimide filtered away. The carbon tetrachloride was removed *in vacuo* and the remaining oil recrystallized from hexanes yielding 26.2 g (87%) of product as a light yellow solid. EA, MS(FD).

Preparation 8

α -Bromo-(4-methoxyphenyl)acetic acid

The 4-methoxyphenylacetic acid (25.0 g, 150 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 36.6 g. (100%). MS(FD), NMR.

Preparation 9

α -Bromo-(naph-2-yl)acetic acid

The (naph-2-yl)acetic acid (37.2 g, 200 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 34.5 g. (65%). MS(FD), NMR.

Preparation 10

α -Bromo-naphthylacetic acid

The naphthylacetic acid (37.2 g, 200 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 32.4 g. (60.8%). MS(FD), NMR.

Preparation 11

α -Bromo-(2-fluorophenyl)acetic acid

The (2-fluorophenyl)acetic acid (19.9 g, 129 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 24.0 g. (79.9%).

Preparation 12

α -Bromo-(3-fluorophenyl)acetic acid

The (3-fluorophenyl)acetic acid (20.0 g, 130 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 24.3 g. (80.0%).

5 Preparation 13

α -Bromo-(2,4-difluorophenyl)acetic acid

The 2,4-difluorophenylacetic acid (21.3 g, 124 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 24.8 g. (79.5%).

10 NMR.

Preparation 14

α -Bromo-(3,5-difluorophenyl)acetic acid

The (3,5-difluorophenyl)acetic acid (20.4 g, 118 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 21.0 g. (70.9%).
15 NMR.

Preparation 15

α -Bromo-(2,5-difluorophenyl)acetic acid

The (2,5-difluorophenyl)acetic acid (20.5 g, 119 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 27.3 g. (91.0%).
20 NMR.

Preparation 16

α -Bromo-(3-trifluoromethylphenyl)acetic acid

25 The (3-trifluoromethylphenyl)acetic acid (20 g, 90 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 27.7 g. (100%).
NMR.

Preparation 17

30 α -Bromo-(4-bromophenyl)acetic acid

The (4-bromophenyl)acetic acid (25.8 g, 120 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 30.2 g. (85.7%).
NMR.

35 Preparation 18

α -Bromo-(2,3,4-trifluorophenyl)acetic acid

-30-

The (2,3,4-trifluorophenyl)acetic acid (9.55 g, 50.3 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 13.5 g. (100%).
NMR.

5

Preparation 19

α -Bromo-(3,4-difluorophenyl)acetic acid

The (3,4-difluorophenyl)acetic acid (15.2 g, 88.2 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 22.2 g. (100%).

10 NMR.

Preparation 20

α -Bromo-(3,4-dichlorophenyl)acetic acid

The (3,4-dichlorophenyl)acetic acid (25.0 g, 122 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 34.6 g. (100%).
NMR.

Preparation 21

α -Bromo-(2,4,5-trifluorophenyl)acetic acid

The (2,4,5-trifluorophenyl)acetic acid (9.56 g, 50.3 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 13.6 g. (100%).
NMR.

Preparation 22

25

α -Bromo-(2-chlorophenyl)acetic acid

The (2-chlorophenyl)acetic acid (25.3 g, 148 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 22.8 g. (62.0%).
MS(FD), NMR.

30

Preparation 23

α -Bromo-(3-chlorophenyl)acetic acid

The (3-chlorophenyl)acetic acid (20.9 g, 123 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 30.5 g. (100%).

35 NMR.

Preparation 24

α -Bromo-(4-chlorophenyl)acetic acid

The (4-chlorophenyl)acetic acid (25.0 g, 147 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 21.7 g. (60.0%).
NMR.

5 Preparation 25

α -Bromo- (4-trifluoromethoxyphenyl)acetic acid

The (4-trifluoromethoxyphenyl)acetic acid (9.91 g, 45.1 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 13.5 g. (100%). NMR.

Preparation 26

α -Bromo- (3-trifluoromethoxyphenyl)acetic acid

The (3-trifluoromethoxyphenyl)acetic acid (9.75 g, 44.3 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 13.3 g. (100%). NMR.

Preparation 27

α -Bromo- (2-fluoro-4-trifluoromethylphenyl)acetic acid

The (2-fluoro-4-trifluoromethylphenyl)acetic acid
20 (9.56 g, 43.1 mmol) was converted to product in a manner
substantially analogous to Preparation 7 to yield 13.0 g.
(100%). NMR.

Preparation 28

α -Bromo- (2-methoxyphenyl)acetic acid

25 The (2-methoxyphenyl)acetic acid (25.0 g, 150 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 26.5 g. (72%). MS(FD), NMR.

Preparation 29

30 α -Bromo- (4-nitrophenyl)acetic acid

The (4-nitrophenyl)acetic acid (25.5 g, 141 mmol) was converted to product in a manner substantially analogous to Preparation 7 to yield 36.6 g. (100%).
NMR.

35 Preparation 30

α -Bromo- (3-thienyl)acetic acid

The (thiophen-3-yl)mandelic acid (8.60 g, 54.4 mmol) was dissolved in 100 ml of 30% HBr in acetic acid. The

-32-

solution was stirred for 18 hours at RT. The clear black solution was poured onto 2.5 L of ice water and immediately extracted with Et₂O (4 x 400 ml). The ether was dried over Na₂SO₄ and treated with decolorizing carbon. The Et₂O was evaporated and the residue was azeotroped with toluene to remove residual acetic acid. The crude solid product was recrystallized from hexanes to yield 9.07 g. (75%). EA, MS(FD).


Preparation 31

10 α-Bromo-benzylacetic acid

To a solution of L-phenylalanine (55.0 g, 330 mmol) and NaBr (130 g, 1.09 mol) dissolved in 550 ml of 3N H₂SO₄ cooled to 0°C, was added slowly NaNO₂ (32.0 g, 469 mmol) keeping the temperature of the reaction between 0 and 5°C. The stirring was continued at about 0°C for 1 hour and then for 1.5 hours at RT. The mixture was extracted with Et₂O (4 x 300 ml). The Et₂O was washed with brine (2 x 500 ml), dried over MgSO₄, and then removed *in vacuo*. The residue was recrystallized from 50 ml of cyclohexane to give the phenylalanine starting material as crystals. The solids were filtered and the filtrate was concentrated in *vacuo* to yield 64 g of crude product to be used without further purification. (84.7%).

25 Preparation 32

α-Bromo-(4-fluorophenyl)acetamide

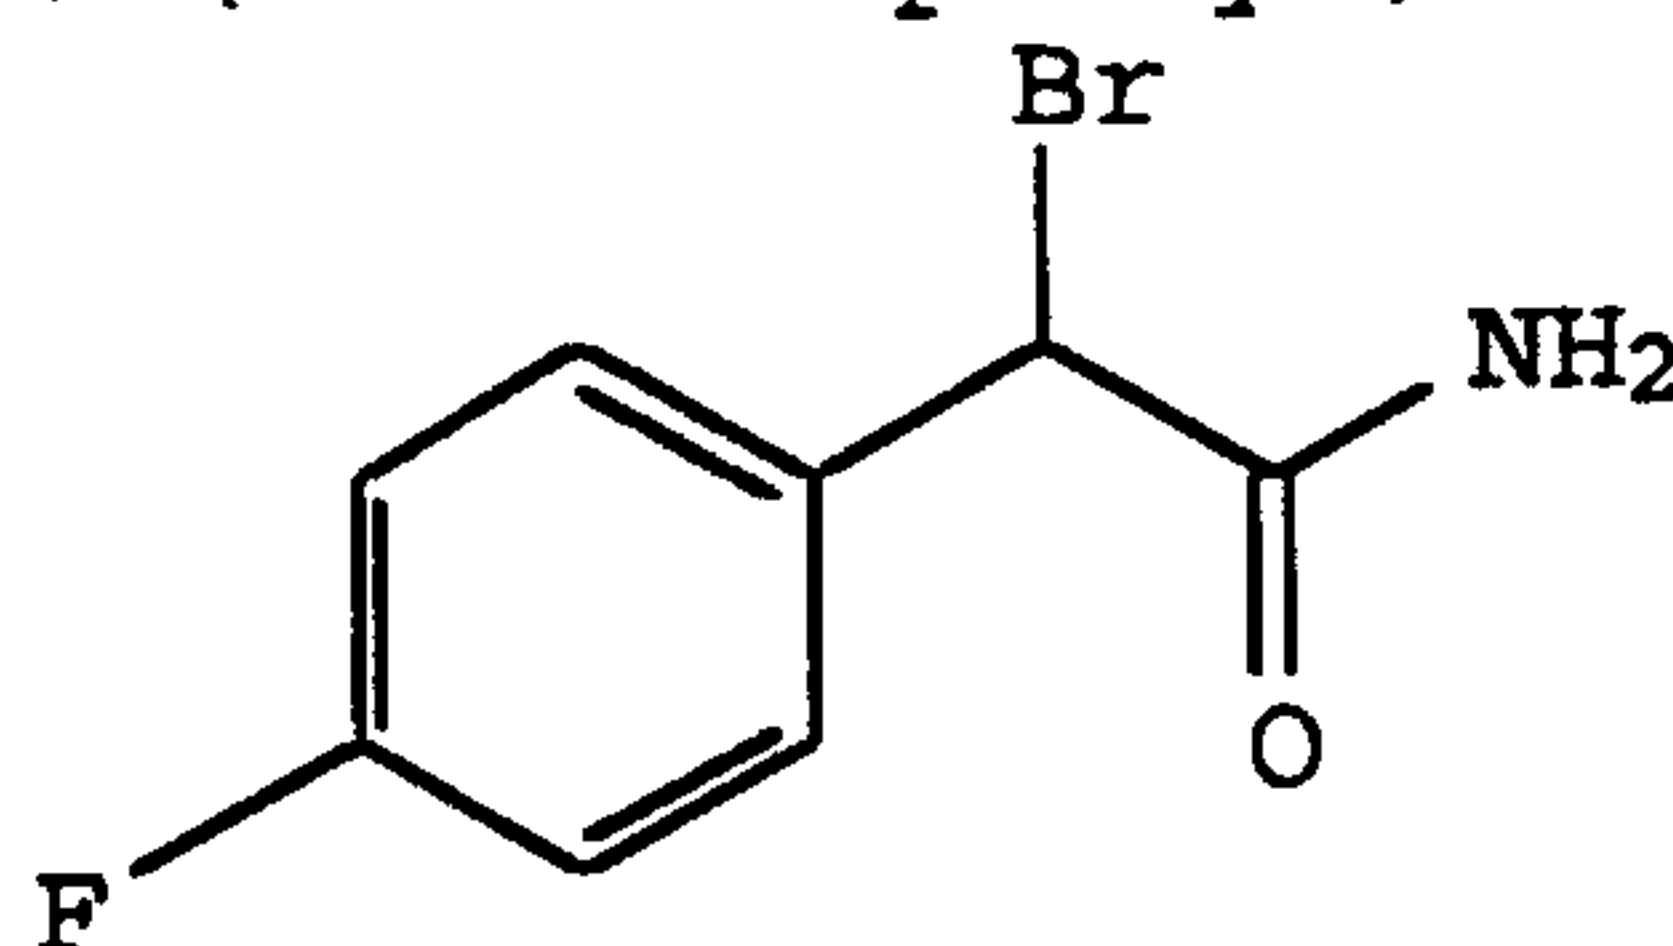

The α-bromo-(4-fluorophenyl)acetic acid (26.1 g, 112 mmol), in 175 ml of dry CH₂Cl₂, and 3 drops of DMF were cooled in an ice bath under N₂. Oxalyl chloride (25.0 g, 224 mmol) in 25 ml of dry CH₂Cl₂ was added dropwise over 25 minutes. The ice bath was removed and the reaction stirred for 3 hours. The solvent was removed *in vacuo* then azeotroped with toluene (3 x 25 ml). The remaining

-33-

oil was dissolved in 300 ml of toluene and 300 ml hexanes and stirred vigorously with a mechanical stirrer. Ammonia gas was then blown through a gas dispersion tube over the top of this solution for 1 hour. The resulting solid was filtered and the solvents removed *in vacuo*. The solid was dissolved in EtOAc/H₂O and the organic layer washed with 1N HCl, saturated NaHCO₃, brine, then dried over Na₂SO₄. The Na₂SO₄ was filtered and the EtOAc was removed *in vacuo*. The remaining solid was recrystallized from EtOAc/hexanes yielding 19.6 g (75%) of the desired product. MS(FD), NMR.

Preparation 33

α -Bromo-(4-methoxyphenyl)acetamide

The α -bromo-(4-methoxyphenyl)acetic acid (36.6 g, 150 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 13.5 g. (37%). MS(FD), NMR.

Preparation 34

α -Bromo-(naph-2-yl)phenylacetamide

The α -bromo-(naph-2-yl)acetic acid (34.5 g, 130 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 11.5 g. (33.5%). EA, MS(FD).

Preparation 35

α -Bromo-naphthylacetamide

The α -bromo-naphthylacetic acid (32.4 g, 122 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 14.6 g. (46%). MS(FD), NMR.

Preparation 36

α -Bromo-(2-fluorophenyl)acetamide

The α -bromo-(2-fluorophenyl)acetic acid (24.0 g, 103 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 14.0 g. (60%). MS(FD), NMR.

Preparation 37

α -Bromo-(3-fluorophenyl)acetamide

The α -bromo-(3-fluorophenyl)acetic acid (24.3 g, 104 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 16.3 g. (67.0%). MS(FD), NMR.

5

Preparation 38

α -Bromo-(2,4-difluorophenyl)acetamide

The α -bromo-(2,4-difluorophenyl)acetic acid (23.3 g, 93.0 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 7.88 g. (34.3%). NMR.

10

Preparation 39

α -Bromo-(3,5-difluorophenyl)acetamide

The α -bromo-(3,5-difluorophenyl)acetic acid (21.0 g, 83.8 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 14.4 g. (68.7%). NMR.

15

Preparation 40

α -Bromo-(2,5-difluorophenyl)acetamide

The α -bromo-(2,5-difluorophenyl)acetic acid (27.3 g, 109 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 18.5 g. (68.0%). MS(FD), NMR.

20

Preparation 41

α -Bromo-(3-trifluoromethylphenyl)acetamide

The α -bromo-(3-trifluoromethylphenyl)acetic acid (27.7 g, 98.0 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 14.2 g. (51.4%). MS(FD), NMR.

25

Preparation 42

α -Bromo-(4-bromophenyl)acetamide

The α -bromo-(4-bromophenyl)acetic acid (30.2 g, 103 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 23.5 g. (78.1%). MS(FD), NMR.

30

35

Preparation 43

α -Bromo-(2,3,4-trifluorophenyl)acetamide

The α -bromo-(2,3,4-trifluorophenyl)acetic acid (13.5 g, 50.3 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 10.2 g. (75.7%). MS(FD), NMR.

5 Preparation 44

α -Bromo- (3,4-difluorophenyl) acetamide

The α -bromo-(3,4-difluorophenyl)acetic acid (22.2 g, 88.0 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 7.88 g. (35.7%). MS(FD), NMR.

Preparation 45

α -Bromo- (3,4-dichlorophenyl) acetamide

The α -bromo-(3,4-dichlorophenyl)acetic acid (34.6 g, 122 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 11.8 g. (34.2%). MS(FD), NMR.

Preparation 46

α -Bromo- (2,4,5-trifluorophenyl) acetamide

The α -bromo-(2,4,5-trifluorophenyl)acetic acid (13.6 g, 50.3 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 7.34 g. (54.4%). NMR.

Preparation 47

α -Bromo- (2-chlorophenyl) acetamide

25 The α -bromo-(2-chlororophenyl)acetic acid (22.8 g, 91.7 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 17.5 g. (77%). MS(FD), NMR.

Preparation 48

30 α -Bromo- (3-chlorophenyl) acetamide

The α -bromo-(2-chlororophenyl)acetic acid (30.5 g, 123 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 17.8 g. (59%). MS(FD), NMR.

35 Preparation 49

α -Bromo- (4-chlorophenyl) acetamide

The α -bromo-(4-chlororophenyl)acetic acid (21.7 g, 86.9 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 15.7 g. (73%). MS(FD), NMR.

5 Preparation 50

α -Bromo- (4-trifluoromethoxyphenyl) acetamide

The α -bromo-(4-trifluoromethoxyphenyl)acetic acid (13.5 g, 45.1 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 11.1 g. (83%). MS(FD), NMR.

Preparation 51

α -Bromo- (3-trifluoromethoxyphenyl) acetamide

The α -bromo-(3-trifluoromethoxyphenyl)acetic acid (13.3 g, 44.3 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 9.43 g. (71%). MS(FD), NMR.

Preparation 52

α -Bromo- (2-fluoro-4-trifluoromethylphenyl) acetamide

The α -bromo-(2-fluoro-4-trifluoromethylphenyl)acetic
20 acid (13.0 g, 43.1 mmol) was converted to product in a
manner substantially analogous to Preparation 32 to yield
11.1 g. (86%). MS(FD), NMR.

Preparation 53

α -Bromo-phenylacetamide

25 The α -bromo-phenylacetic acid (21.5 g, 100 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 16.8 g. (78%). NMR.

Preparation 54

α -Bromo- (thiophen-3-yl) acetamide

30 The α -bromo(thiophen-3-yl)acetic acid (9.07 g, 41.0 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 6.50 g. (72.0%). MS, MP.

Preparation 55

35 α -Bromo- (2-methoxyphenyl) acetamide


The α -bromo-(2-methoxyphenyl)acetic acid (26.5 g, 108 mmol) was converted to product in a manner

-37-

substantially analogous to Preparation 32 to yield 21.6 g. (82.0%). NMR.

Preparation 56

α -Bromo-isobutylacetamide

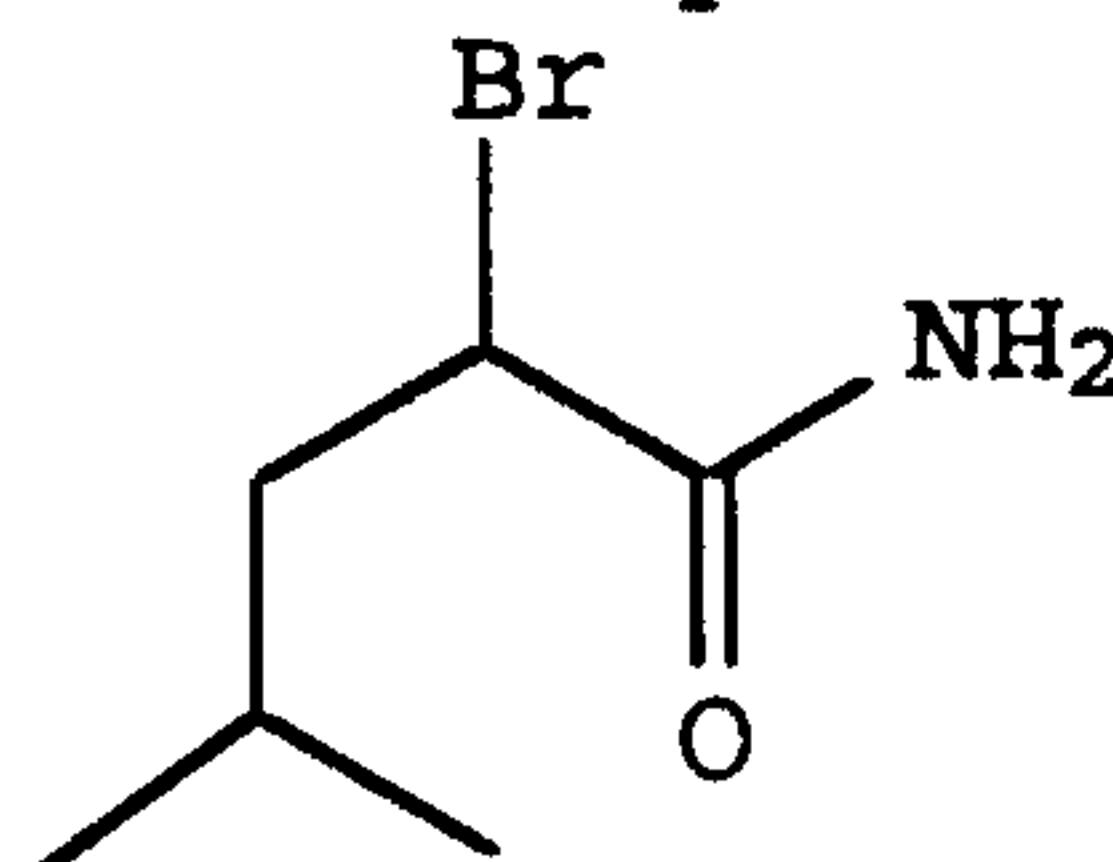

5

The α -bromo-(4-methyl)pentanoic acid (35.0 g, 179 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 20.9 g. (60.1%). EA, MS(EI).

10

Preparation 57

α -Bromo-benzylacetamide

The α -bromo-benzylacetic acid (64.0 g, 279 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 22.5 g. (35.4%). EA, MS(FD).

15

Preparation 58


α -Bromo-(4-nitrophenyl)acetamide

The α -bromo-(4-nitrophenyl)acetic acid (36.6 g, 141 mmol) was converted to product in a manner substantially analogous to Preparation 32 to yield 19.3 g. (52.9%).

20 NMR.

Preparation 59

2,6-Difluoromandelic acid

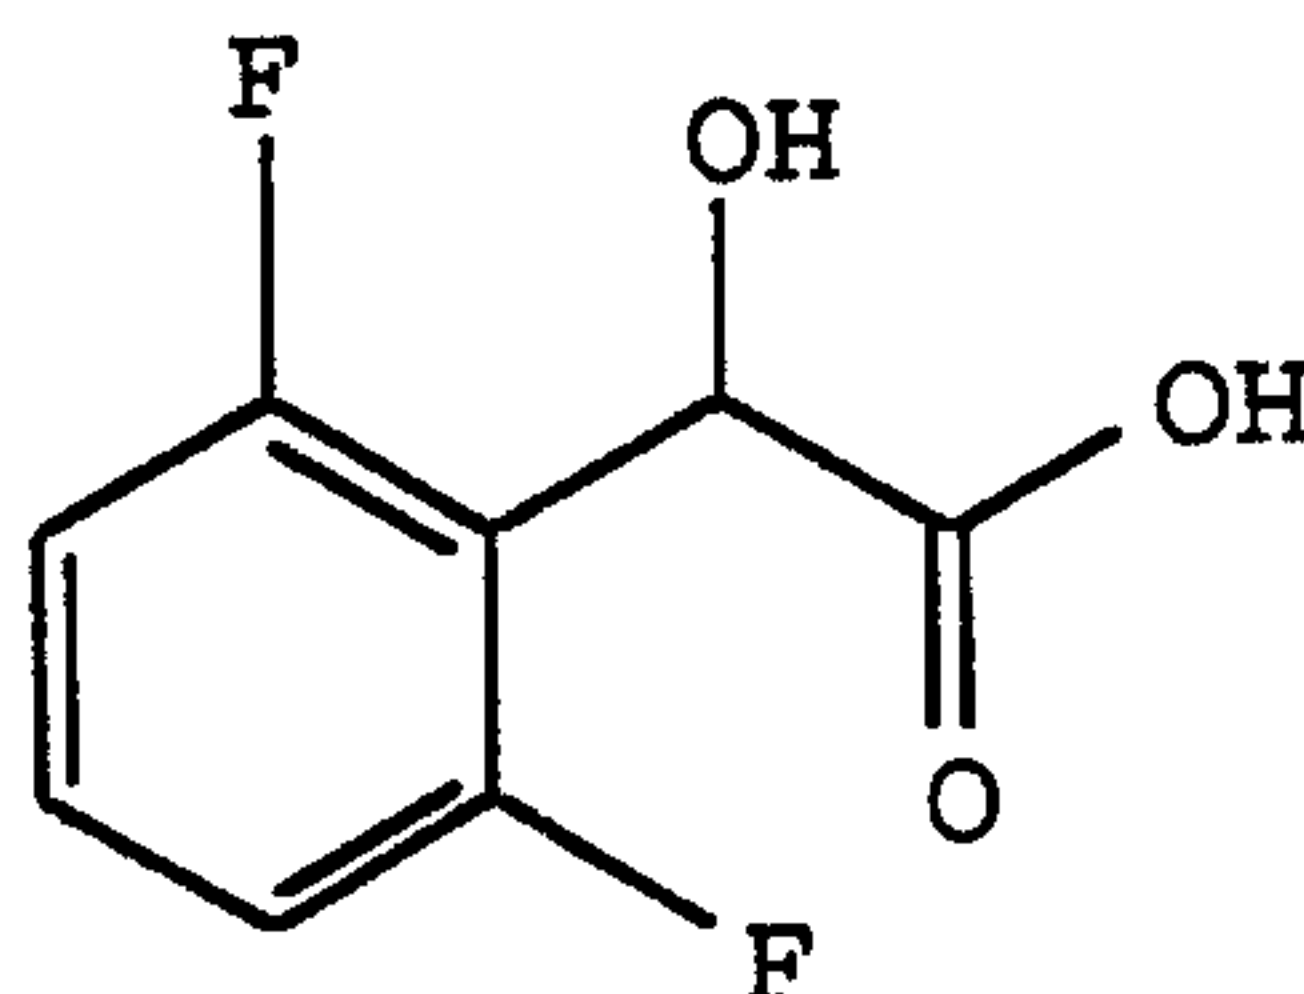

The 2,6-difluorobenzaldehyde (25.0 g, 176 mmol) and zinc iodide (5.0 mg, 0.02 mmol) were placed in a flame-dried 250 ml 3-necked round bottom flask under N₂. Trimethylsilyl cyanide (17.45 g, 176.0 mmol) was added dropwise over 20 minutes and the reaction was allowed to stir for 72 hours. 9N HCl (200 ml) was added and the solution was refluxed overnight. The reaction was cooled

30

- 38 -

to RT and extracted with Et₂O. The Et₂O was extracted with saturated NaHCO₃ then acidified to pH 1 with 5N HCl. The acidic solution was extracted with Et₂O and the organic layer dried over Na₂SO₄. The Na₂SO₄ was filtered and the Et₂O removed *in vacuo* leaving a white solid which was recrystallized from CHCl₃ yielding 23.6 g (71%) of product as a white solid. NMR, MS, IR, EA.

Preparation 60

2,3,4,5,6-Pentafluoromandelic acid

10 The 2,3,4,5,6-pentafluorobenzaldehyde (49.4 g, 252 mmol) was converted to product in a manner substantially analogous to Preparation 59 to yield 52.3 g. (86.0%). EA, MS (FD).

Preparation 61

15 2-Trifluoromethylmandelic acid

The 2-trifluoromethylbenzaldehyde (43.9 g, 252 mmol) was converted to product in a manner substantially analogous to Preparation 59 to yield 39.1 g. (70.5%). EA, MS (FD).

20 Preparation 62

Thiophen-3-ylmandelic acid

The thiophen-3-ylcarboxaldehyde (28.3 g, 252 mmol) was converted to product in a manner substantially analogous to Preparation 59 to yield 13.4 g. (33.8%). EA, MS (FD).

Preparation 63

2-Trifluoromethyl-4-fluoromandelic acid

The 2-trifluoromethyl-4-fluorobenzaldehyde (48.4 g, 252 mmol) was converted to product in a manner substantially analogous to Preparation 59 to yield 50.1 g. (84%). EA, MS (FD).

Preparation 64


2-Fluoro-6-trifluoromethylmandelic acid

35 The 2-fluoro-6-trifluoromethylbenzaldehyde (48.4 g, 252 mmol) was converted to product in a manner substantially analogous to Preparation 59 to yield 49.7 g. (84%). EA, MS (FD).

Preparation 65

4-Carboxymandelic acid

The 4-cyanobenzaldehyde (33.0 g, 252 mmol) was converted to product in a manner substantially analogous to Preparation 59 to yield 27.0 g. (54.6%). MS(FD), NMR.

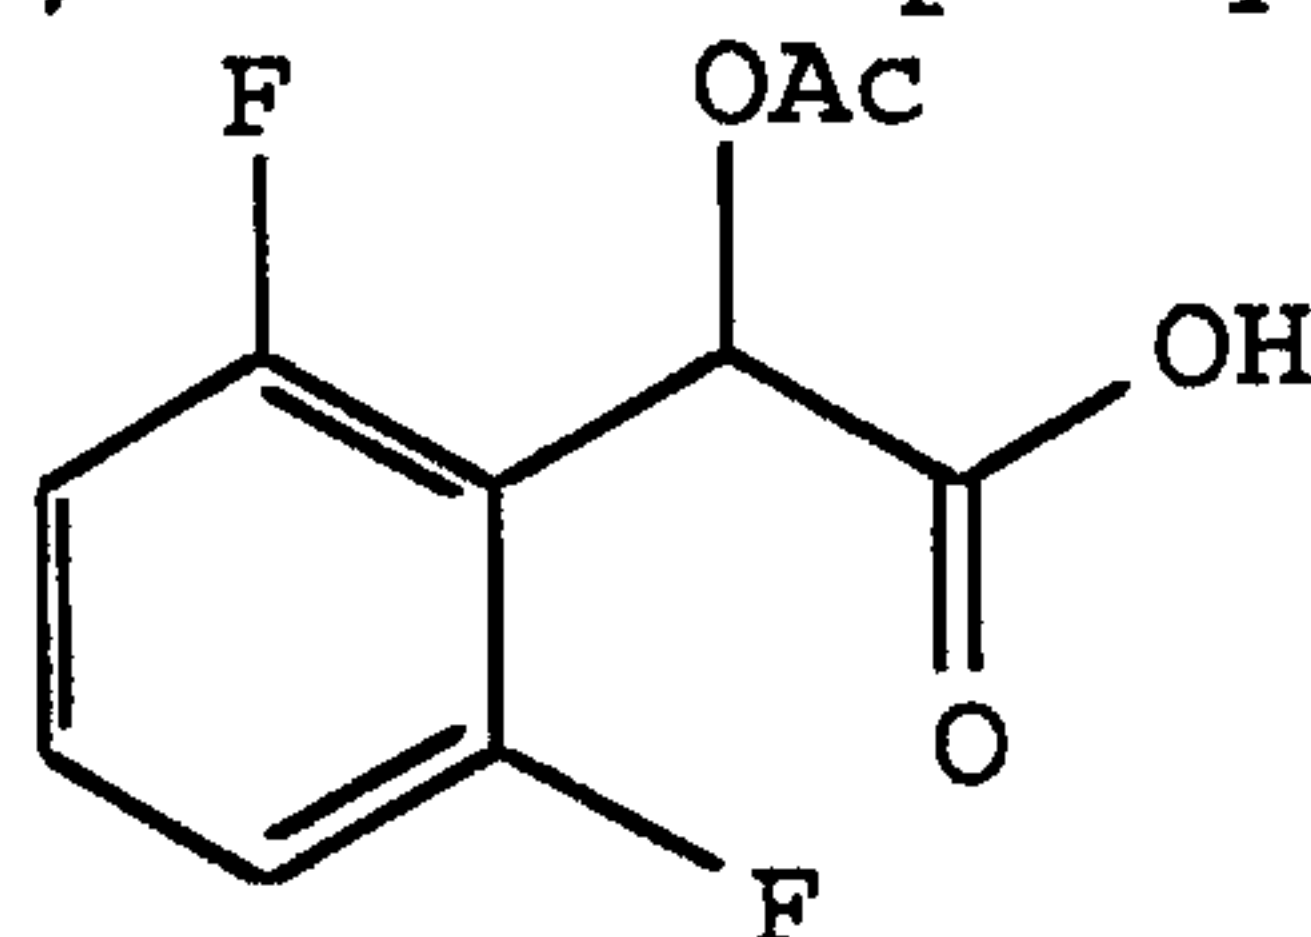Preparation 66 α -O-acetyl-(2,6-difluorophenyl)acetic acid

30% HBr in acetic acid (150 ml) was added to 2,6-difluoromandelic acid (16.9 g, 89.9 mmol) in 50 ml of acetic acid and stirred overnight. The reaction was poured onto 1.5 L of ice water and stirred for 1 hour. The aqueous solution was extracted with Et₂O and the organic layer dried over Na₂SO₄. The Na₂SO₄ was filtered and the Et₂O removed in vacuo leaving a white solid which was recrystallized from Et₂O/hexanes yielding 18.54 (90%) of product as a white solid. EA, MS(FD).

Preparation 67 α -O-acetyl-(2,3,4,5,6-pentafluorophenyl)acetic acid

The 2,3,4,5,6-pentafluoromandelic acid (70.5 g, 291 mmol) was converted to product in a manner substantially analogous to Preparation 66 to yield 82.8 g. (100%). EA, MS(FD).

25

Preparation 68 α -O-acetyl-(2-trifluoromethylphenyl)acetic acid

The 2-trifluoromethylmandelic acid (19.8 g, 90.0 mmol) was converted to product in a manner substantially analogous to Preparation 66 to yield 20.8 g. (88.0%).

30 EA, MS(FD).

Preparation 69 α -O-acetyl-(2-trifluoromethyl-4-fluorophenyl)acetic acid

The 2-trifluoromethyl-4-fluoromandelic acid (49.4 g, 208 mmol) was converted to product in a manner

substantially analogous to Preparation 66 to yield 58.1 g. (100%). EA, MS(FD).

Preparation 70

5 α -O-acetyl-(2-fluoro-6-trifluoromethylphenyl)acetic acid
The 2-fluoro-6-trifluoromethylmandelic acid (48.4 g, 252 mmol) was converted to product in a manner substantially analogous to Preparation 66 to yield 50.1 g. (84%). EA, MS(FD).

Preparation 71

10 α -O-acetyl-(4-trifluoromethylphenyl)acetic acid
The 4-trifluoromethylmandelic acid (19.8 g, 89.9 mmol) was converted to product in a manner substantially analogous to Preparation 66 to yield 20.3 g. (86%). MS(FD), NMR.

15 Preparation 72

α -O-acetyl-(4-carboxyphenyl)acetic acid
The 4-carboxymandelic acid (27.0 g, 138 mmol) was converted to product in a manner substantially analogous to Preparation 66 to yield 27.5 g. (83.9%). MS(FD),
20 NMR.

Preparation 73

α -O-acetyl-(2,6-difluorophenyl)acetamide
The α -o-acetyl-(2,6-difluorophenyl)acetic acid (18.5 g, 80.4 mmol), in 200 ml of dry CH_2Cl_2 , and 3 drops DMF
25 were cooled in an ice bath under N_2 . Oxalyl chloride (50.0 g, 448 mmol) in 50 ml dry CH_2Cl_2 was added dropwise over 25 minutes. The ice bath was removed and the reaction was allowed to stir for 3 hours. The solvent was removed in vacuo then azeotroped with toluene (3 x 25
30 ml). The remaining oil was dissolved in 100 ml of toluene and 700 ml of hexanes and stirred vigorously with a mechanical stirrer. Ammonia gas was then blown through a gas dispersion tube over the top of this solution for 1 hour. The resulting solid was filtered and solvents
35 removed in vacuo. The solid was dissolved in EtOAc/ H_2O and the organic layer washed with 1N HCl, saturated NaHCO_3 , brine, then dried over Na_2SO_4 . The Na_2SO_4 was filtered and the EtOAc removed in vacuo. The remaining

solid was recrystallized from EtOAc/hexanes yielding 16.7 g (90%) of the desired product.

Preparation 74

5 α -O-acetyl-(2,3,4,5,6-pentafluorophenyl)acetamide
The α -o-acetyl-(2,3,4,5,6-pentafluorophenyl)acetic acid (106 g, 373 mmol) was converted to product in a manner substantially analogous to Preparation 73 to yield 94.0 g. (89%). EA, MS(FD).

Preparation 75

10 α -O-acetyl-(2-trifluoromethylphenyl)acetamide
The α -o-acetyl-(2-trifluoromethylphenyl)acetic acid (20.8 g, 79.4 mmol) was converted to product in a manner substantially analogous to Preparation 73 to yield 18.8 g. (90.7%). EA, MS(FD).

Preparation 76

15 α -O-acetyl-(2-trifluoromethyl-4-fluorophenyl)acetamide
The α -o-acetyl-(2-trifluoromethyl-4-fluorophenyl)acetic acid (58.1 g, 208 mmol) was converted to product in a manner substantially analogous to Preparation 73 to yield 52.4 g. (90.0%). EA, MS(FD).

Preparation 77

20 α -O-acetyl-(2-fluoro-6-trifluoromethylphenyl)acetamide
The α -o-acetyl-(2-fluoro-4-trifluoromethylphenyl)acetic acid (53.4 g, 191 mmol) was converted to product in a manner substantially analogous to Preparation 73 to yield 47.9 g. (90%). EA, MS(FD).

Preparation 78

25 α -O-acetyl-(4-trifluoromethylphenyl)acetamide
The α -o-acetyl-(4-trifluoromethylphenyl)acetic acid (20.3 g, 77.3 mmol) was converted to product in a manner substantially analogous to Preparation 73 to yield 18.8 g. (93%).

Preparation 79

30 Methyl-(α -hydroxy-4-carbomethoxybenzyl)acetate
The α -O-acetyl-(4-carboxyphenyl)acetic acid (23.2 g, 97.3 mmol) was suspended in 300 ml of CH₂Cl₂ and 3 drops of DMF was added while the reaction stirred under N₂ in

-42-

an ice bath. Oxalyl chloride (50.0 g, 448 mmol) in 50 ml of dry CH₂Cl₂ was added dropwise over 20 minutes. The ice bath was removed and the reaction stirred at RT for about 5 hours (until all solids in solution). The solvents were removed and the residue and 200 ml of MeOH were placed in an addition funnel and stirred overnight. The solvents were then removed and the residue taken up in EtOAc. The EtOAc was washed with NaHCO₃ (3 x 100 ml), brine, and then dried over NaSO₄. The EtOAc was removed in vacuo to give 22 g of an oil. (100%). EA, MS(FD).

Preparation 80

α -Hydroxy-(2,6-difluorophenyl)acetamide

The α -O-acetyl-(2,6-difluorophenyl)acetamide (16.7 g, 73.0 mmol) was dissolved in 125 ml of methanol and 35 ml of diisopropylethylamine then refluxed for 3 hours. The solvents were removed in vacuo and the remaining solid was recrystallized from EtOAc/hexanes yielding 11.42 g (84%) of product as a white solid. EA, MS(FD).

Preparation 81

α -Hydroxy-(2,3,4,5,6-pentafluorophenyl)acetamide

The α -O-acetyl-(2,3,4,5,6-pentafluorophenyl)acetamide (83.0 g, 293 mmol) was converted to product in a manner substantially analogous to Preparation 80 to yield 66.6 g. (94%). EA, MS(FD).

Preparation 82

α -Hydroxy-(2-trifluoromethylphenyl)acetamide

The α -O-acetyl-(2-trifluoromethylphenyl)acetamide (18.4 g, 70.6 mmol) was converted to product in a manner substantially analogous to Preparation 80 to yield 14.3 g. (92.4%). MS(FD), NMR.

Preparation 83

α -Hydroxy-(2-trifluoromethyl-4-fluorophenyl)acetamide

The α -O-acetyl-(2-trifluoromethyl-4-fluorophenyl)acetamide (50.4 g, 181 mmol) was converted to product in a manner substantially analogous to Preparation 80 to yield 40.9 g. (95%). EA, MS(FD).

Preparation 84

α -Hydroxy-(2-fluoro-6-trifluoromethylphenyl)acetamide

The α -O-acetyl-(2-fluoromethyl-6-trifluoromethylphenyl)acetamide (44.6 g, 160 mmol) was converted to product in a manner substantially analogous to Preparation 80 to yield 32.1 g. (85%). EA, MS(FD).

5 Preparation 85

α -Hydroxy-(4-trifluoromethylphenyl)acetamide

The α -O-acetyl-(4-trifluoromethylphenyl)acetamide (18.8 g, 65.3 mmol) was converted to product in a manner substantially analogous to Preparation 80 to yield 13.8 g. (96.1%). EA, MS(FD).


Preparation 86

α -Hydroxy-(4-carbomethoxyphenyl)acetamide

Freshly prepared ammonia in methanol (300 ml) was added to methyl-(α -hydroxy-4-carbomethoxybenzyl)acetate (21.8 g, 97.3 mmol) and stirred overnight. The solvents were removed *in vacuo* and the residue recrystallized from CH_2Cl_2 to give 17.5 g of product. (85.7%). EA, MS(FD).

Preparation 87

α -O-toluenesulfonylimido-(2,6-difluorophenyl)acetamide

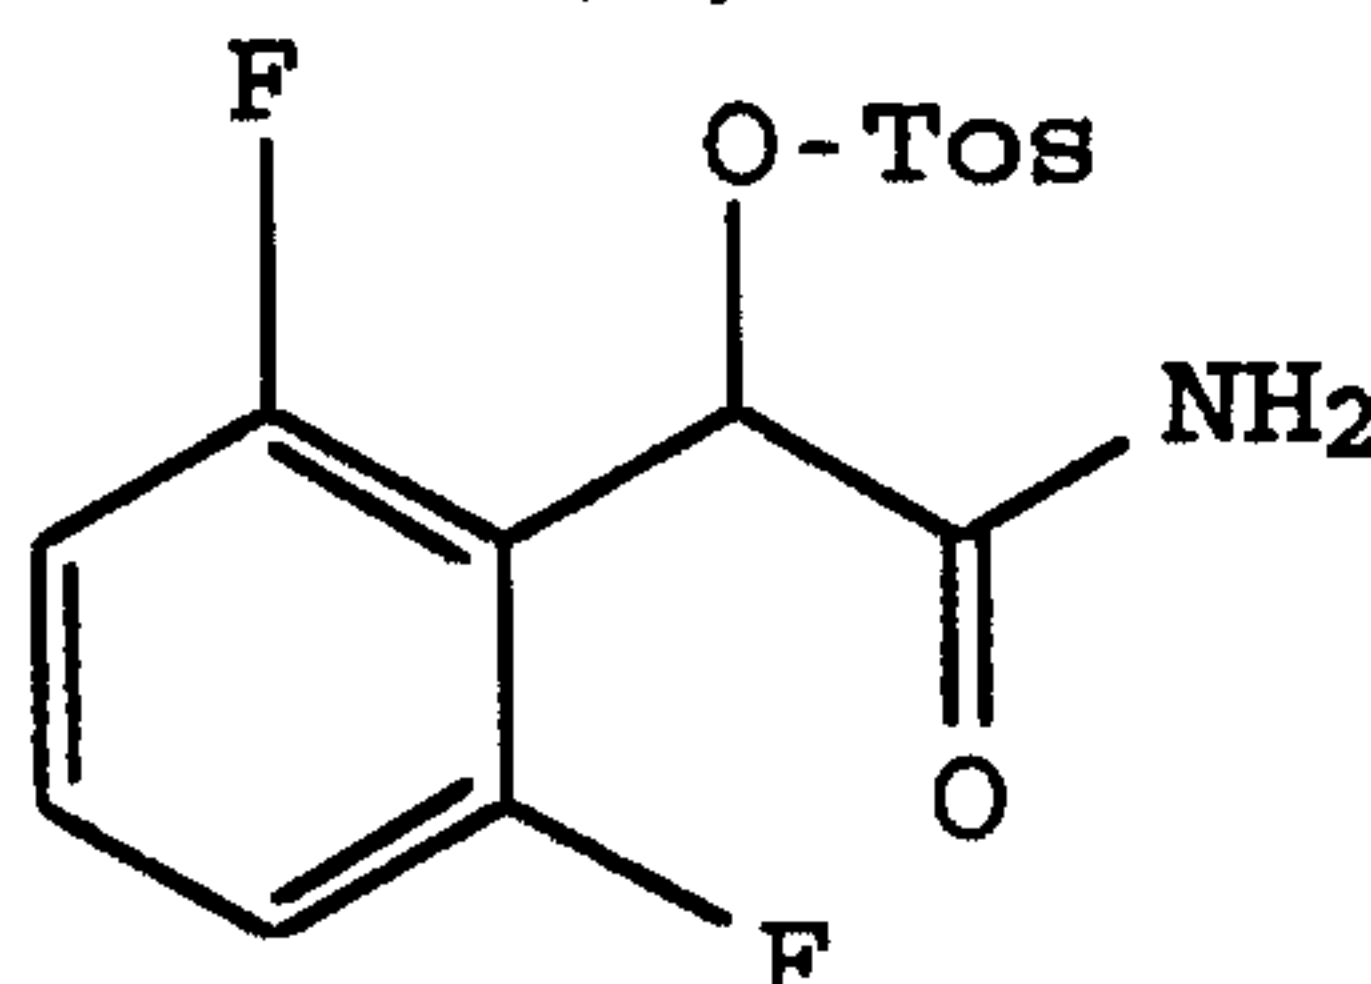

20 The α -hydroxy-(2,6-difluorophenyl)acetamide (9.80 g, 52.4 mmol), 4-dimethylaminopyridine (500 mg, 4.10 mmol), and diisopropylethylamine (10.04 ml, 57.6 mmol) were combined in 300 ml of dry CH_2Cl_2 under N_2 . The p-toluenesulfonyl chloride (11.0 g, 57.6 mmol) was added and the reaction was stirred overnight. The solvents were removed *in vacuo* and the remaining solids dissolved in EtOAc. The EtOAc was washed with 1N HCl, saturated NaHCO_3 , brine, then dried over Na_2SO_4 . The Na_2SO_4 was filtered and the EtOAc removed *in vacuo* leaving a white solid. The solids were recrystallized from EtOAc/hexanes yielding 15.8 g (88%) of the desired product as a white powder. EA, MS(FD).

- 44 -

Preparation 88

α -O-toluenesulfonylimido- (2,3,4,5,6-pentafluorophenyl)acetamide

The α -hydroxy- (2,3,4,5,6-pentafluorophenyl)acetamide
5 (12.1 g, 50.0 mmol) was converted to product in a manner substantially analogous to Preparation 87 to yield 18.3 g. (92%). EA, MS(FD).

Preparation 89

10 α -O-toluenesulfonylimido- (2-trifluoromethylphenyl)acetamide

The α -hydroxy- (2-trifluoromethylphenyl)acetamide (14.3 g, 65.2 mmol) was converted to product in a manner substantially analogous to Preparation 87 to yield 21.0 g. (86%). EA, MS(FD).

15 Preparation 90

α -O-toluenesulfonylimido- (2-trifluoromethyl-4-fluorophenyl)acetamide

The α -hydroxy- (2-trifluoromethyl-4-fluorophenyl)acetamide (11.9 g, 50.0 mmol) was converted
20 to product in a manner substantially analogous to Preparation 87 to yield 17.0 g. (87%). EA, MS(FD).

Preparation 91

α -O-toluenesulfonylimido- (2-fluoro-6-trifluoromethylphenyl)acetamide

25 The α -hydroxy- (2-fluoro-4-trifluoromethylphenyl)acetamide (11.9 g, 50.0 mmol) was converted to product in a manner substantially analogous to Preparation 87 to yield 17.8 g. (91%). EA, MS(FD).

Preparation 92

30 α -O-toluenesulfonylimido- (4-trifluoromethylphenyl)acetamide

The α -hydroxy- (4-trifluoromethylphenyl)acetamide (9.35 g, 42.7 mmol) was converted to product in a manner substantially analogous to Preparation 87 to yield 12.7
35 g. (80%). EA, MS(FD).

Preparation 93


α -O-toluenesulfonylimido- (4-carbomethoxyphenyl)acetamide

The α -hydroxy-(4-carbomethoxyphenyl)acetamide (10.5 g, 50.0 mmol) was converted to product in a manner substantially analogous to Preparation 87 to yield 14.6 g. (80.2%). EA, MS(FD).

5

Preparation 94

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2,4-difluorophenyl]-carbamoylmethyl)-pyridine

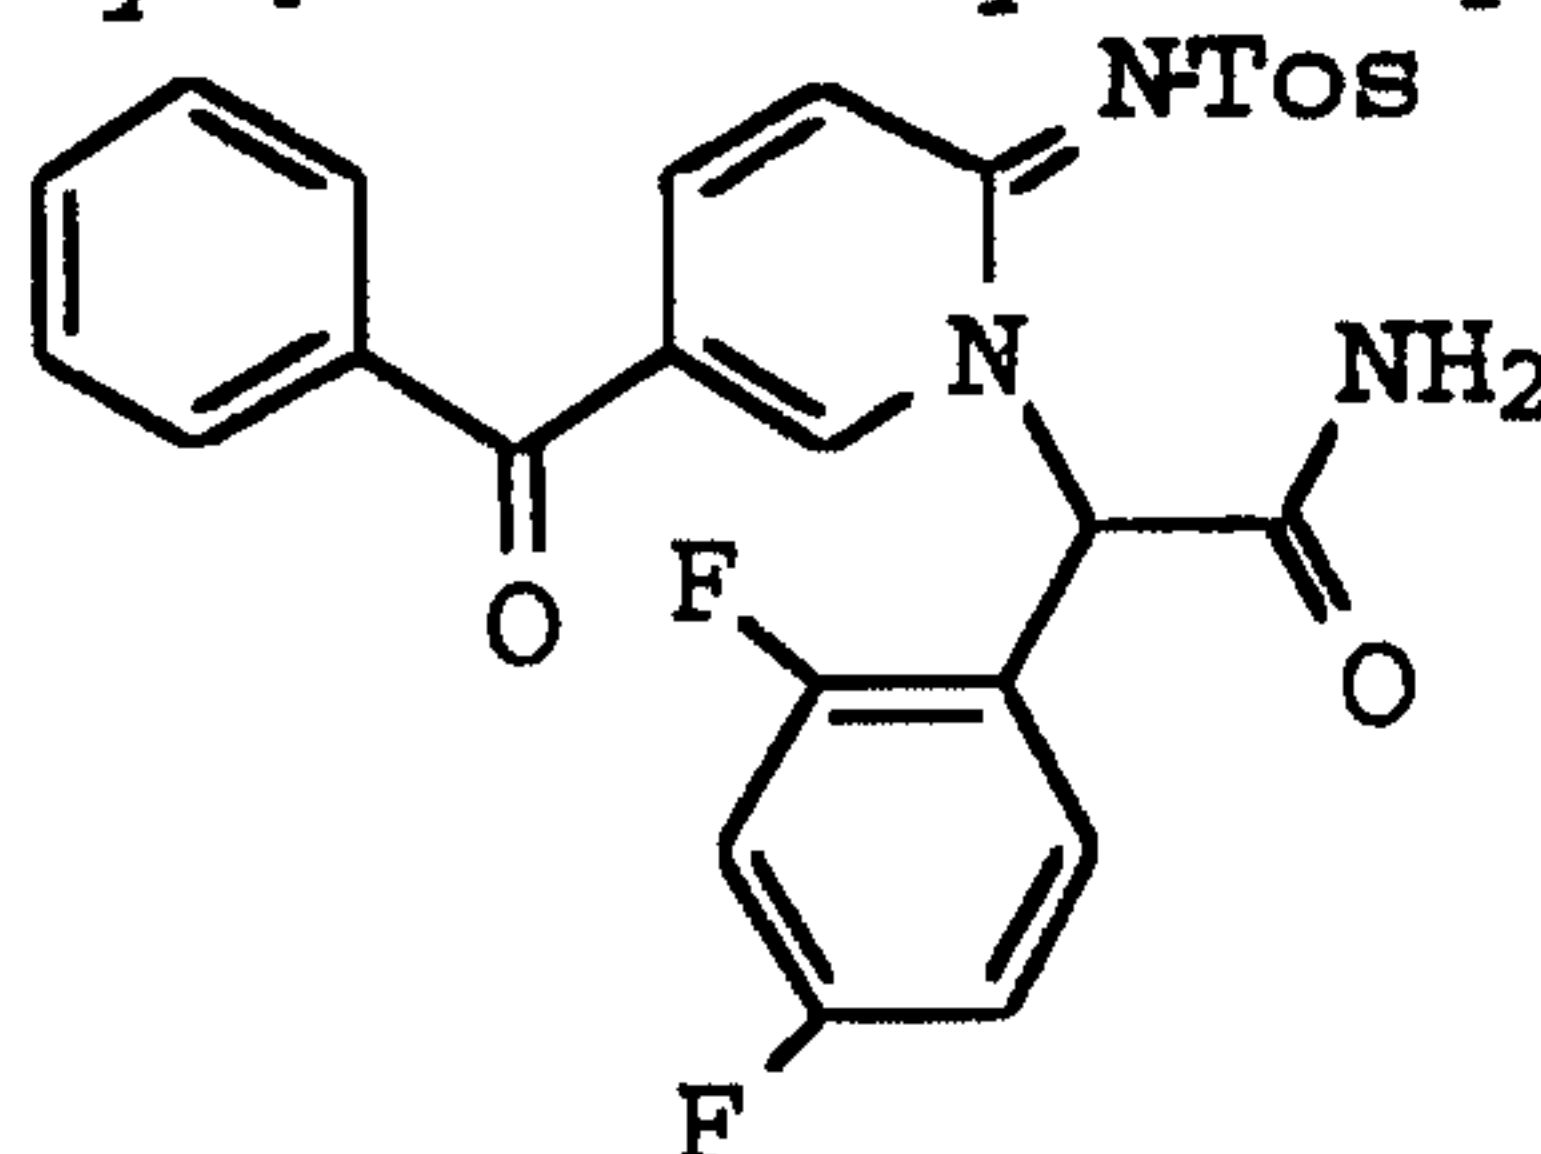

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (10.6 g, 30.0 mmol) was dissolved in 75 ml of DMF and stirred in a flame dried flask under N₂. Sodium hydride (1.32 g, 33.0 mmol) was added and the solution stirred for 1.5 hours. The α -bromo-(2,4-difluorophenyl)acetamide (7.88 g, 31.5 mmol) was then added and the solution was allowed to stir at RT for 7 days. The reaction was worked up by pouring the solution onto 2.5 L of H₂O and stirring for 1 hour. The resulting precipitate was collected by filtration. The filter cake was recrystallized from EtOAc/hexane to yield 13.2 g. (84%). EA, MS(FD).

20

Preparation 95

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[4-fluorophenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (27.1 g, 77.0 mmol) and α -bromo-(4-fluorophenyl)acetamide (19.6 g, 84.5 mmol) were converted to product in a manner substantially analogous to Preparation 94 to yield 35.0 g. (90.4%). EA, MS(FD).

25

Preparation 96

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[4-methoxyphenyl]-carbamoylmethyl)-pyridine

30

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (10.6 g, 30.0 mmol) and α -bromo-(4-

-46-

methoxyphenyl)acetamide (8.05 g, 33.0 mmol) were converted to product in a manner substantially analogous to Preparation 94, except cesium fluoride was employed instead of sodium hydride and sodium iodide (4.50 g, 30.0 mmol) was added, to yield 6.32 g. (41.0%). EA, MS(FD).

Preparation 97

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[naphth-2-yl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (18.5 g, 52.7 mmol) and α -bromo-(naphth-2-yl)acetamide (14.6 g, 55.3 mmol) were converted to product in a manner substantially analogous to Preparation 94 to yield 15.0 g. (53.3%). EA, MS(FD).

Preparation 98

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-naphthyl-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (14.6 g, 41.5 mmol) and α -bromo-(naphth-1-yl)acetamide (11.5 g, 43.6 mmol) were converted to product in a manner substantially analogous to Preparation 94 to yield 14.3 g. (64%). EA, MS(FD).

Preparation 99

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2-fluorophenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (12.3 g, 35.1 mmol) and α -bromo-(2-fluorophenyl)acetamide (8.54 g, 36.8 mmol) were converted to product in a manner substantially analogous to Preparation 94 to yield 16.5 g. (93.6%). EA, MS(FD).

Preparation 100

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[3-fluorophenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (23.6 g, 66.9 mmol) and α -bromo-(3-fluorophenyl)acetamide (16.3 g, 70.3 mmol) were converted to product in a manner substantially analogous to Preparation 94 to yield 29.8 g. (88.5%). EA, MS(FD).

Preparation 101

- 47 -

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[3,5-difluorophenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (10.6 g, 30.0 mmol) and α -bromo-(3,5-difluorophenyl)acetamide (7.88 g, 31.5 mmol) were converted to product in a manner substantially analogous to Preparation 94 to yield 14.2 g. (91.0%). EA, MS(FD).

Preparation 102

10 1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2,5-difluorophenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (10.6 g, 30.0 mmol) and α -bromo-(2,5-difluorophenyl)acetamide (7.88 g, 31.5 mmol) were converted to product in a manner substantially analogous to Preparation 94 to yield 15.3 g. (98%). EA, MS(FD).

Preparation 103

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[3-trifluoromethylphenyl]-carbamoylmethyl)-pyridine

20 The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (10.6 g, 30.0) and α -bromo-(3-trifluoromethylphenyl)acetamide (8.88 g, 31.5 mmol) were converted to product in a manner substantially analogous to Preparation 94 to yield 12.7 g. (76%). EA, MS(FD).

25 Preparation 104

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[4-bromophenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (10.6 g, 30.0) and α -bromo-(4-bromophenyl)acetamide (9.23 g, 31.5 mmol) were converted to product in a manner substantially analogous to Preparation 94 to yield 13.7 g. (81%). EA, MS(FD).

Preparation 105

35 1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2,3,4-trifluorophenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (10.6 g, 30.0 mmol) and α -bromo-(2,3,4-trifluorophenyl)acetamide (8.44 g, 31.5 mmol) were

converted to product in a manner substantially analogous to Preparation 94 to yield 11.3 g. (70%).

Preparation 106

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[3,4-
5 difluorophenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine
(10.6 g, 30.0 mmol) and α -bromo-(3,4-
difluorophenyl)acetamide (7.88 g, 31.5 mmol) were
converted to product in a manner substantially analogous
10 to Preparation 94 to yield 9.53 g. (61%). EA, MS(FD).

Preparation 107

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[3,4-
dichlorophenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine
15 (10.6 g, 30.0 mmol) and α -bromo-(3,4-
dichlorophenyl)acetamide (9.00 g, 31.5 mmol) were
converted to product in a manner substantially analogous
to Preparation 94 to yield 13.8 g. (83%). EA, MS(FD).

Preparation 108

20 1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2,4,5-
trifluorophenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine
(9.18 g, 26.1 mmol) and α -bromo-(2,4,5-
trifluorophenyl)acetamide (7.34 g, 27.4 mmol) were
25 converted to product in a manner substantially analogous
to Preparation 94 to yield 11.6 g. (83%). MS(FAB), NMR.

Preparation 109

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2-
chlorophenyl]-carbamoylmethyl)-pyridine

30 The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine
(10.6 g, 30.0 mmol) and α -bromo-2-chlorophenylacetamide
(7.83 g, 31.5 mmol) were converted to product in a manner
substantially analogous to Preparation 94 to yield 10.4
g. (69%). EA, MS(FD).

35

Preparation 110

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[3-
chlorophenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (10.6 g, 30.0 mmol) and α -bromo-(3-chlorophenyl)acetamide (7.83 g, 31.5 mmol) were converted to product in a manner substantially analogous to Preparation 94 to yield 13.4 g. (77%). EA, MS(FD).

Preparation 111

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[4-chlorophenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (10.6 g, 30.0 mmol) and α -bromo-(4-chlorophenyl)acetamide (7.81 g, 31.5 mmol) were converted to product in a manner substantially analogous to Preparation 94 to yield 13.8 g. (88%). EA, MS(FD).

Preparation 112

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[4-trifluoromethoxyphenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (10.6 g, 30.0 mmol) and α -bromo-(4-trifluoromethoxyphenyl)acetamide (9.83 g, 33.0 mmol) were converted to product in a manner substantially analogous to Preparation 94, except cesium fluoride was employed instead of sodium hydride, to yield 13.2 g. (77%). EA, MS(FD).

Preparation 113

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[3-trifluoromethoxyphenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (10.6 g, 30.0 mmol) and α -bromo-(3-trifluoromethoxyphenyl)acetamide (9.43 g, 31.6 mmol) were converted to product in a manner substantially analogous to Preparation 94 to yield 12.5 g. (73%). EA, MS(FD).

Preparation 114

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2-fluoro-4-trifluoromethylphenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (7.04 g, 20.0 mmol) and α -bromo-(2-fluoro-4-trifluoromethylphenyl)acetamide (6.50 g, 21.7 mmol) were

converted to product in a manner substantially analogous to Preparation 94 to yield 10.1 g. (88%). EA, MS(FD).

Preparation 115

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-phenyl-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (10.6 g, 30.0 mmol) and α -bromo-phenylacetamide (6.74 g, 31.5 mmol) were converted to product in a manner substantially analogous to Preparation 94, except cesium fluoride was employed instead of sodium hydride, to yield 13.3 g. (91%). EA, MS(FD).

Preparation 116

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[4-trifluoromethylphenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (10.0 g, 28.5 mmol) and α -O-toluenesulfonylimido-(4-trifluoromethylphenyl)acetamide (11.1 g, 29.9 mmol) were converted to product in a manner substantially analogous to Preparation 94 to yield 13.9 g. (88%). EA, MS(FD).

Preparation 117

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2-fluoro-6-trifluoromethylphenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (10.6 g, 30.0 mmol) and α -O-toluenesulfonylimido-(2-trifluoromethyl-6-fluorophenyl)acetamide (12.9 g, 33.0 mmol) were converted to product in a manner substantially analogous to Preparation 94, except that diisopropylethylamine was employed instead of sodium hydride and the reaction was conducted between 90 and 100°C, to yield 2.90 g. (16.9%). MS(FD), NMR.

Preparation 118

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2,3,4,5,6-pentafluorophenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (5.28 g, 15.0 mmol) and α -O-toluenesulfonylimido-(2,3,4,5,6-pentafluorophenyl)acetamide (5.93 g, 15.0 mmol) were converted to product in a manner substantially analogous to Preparation 94, except that cesium carbonate

-51-

was employed instead of sodium hydride and the reaction was conducted at 60°C, to yield 5.07 g. (59%). EA, MS(FD).

Preparation 119

5 1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2,6-difluorophenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (10.6 g, 30.0 mmol) and α -O-toluenesulfonylimido-(2,6-difluorophenyl)acetamide (10.7 g, 31.5 mmol) were
10 converted to product in a manner substantially analogous to Preparation 94 except that the reaction was run at 60°C to yield 7.44 g. (48%). EA, MS(FD).

Preparation 120

15 1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2-trifluoromethylphenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (10.6 g, 30.0 mmol) and α -O-toluenesulfonylimido-(2-trifluoromethylphenyl)acetamide (11.8 g, 31.5 mmol) were converted to product in a manner substantially analogous
20 to Preparation 94 except that the reaction was run at 70°C to yield 7.37 g. (44.4%). EA, MS(FD).

Preparation 121

25 1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[thiophen-3-yl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (9.90 g, 28.1 mmol) and α -O-toluenesulfonylimido-(thiophen-3-yl)acetamide (6.50 g, 29.6 mmol) were converted to product in a manner substantially analogous
to Preparation 94 to yield 11.3 g. (81.7%). EA, MS(FD).

30 Preparation 122

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2-trifluoromethyl-4-fluorophenyl]-carbamoylmethyl)-pyridine
The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (10.6 g, 30.0 mmol) and α -O-toluenesulfonylimido-(2-trifluoromethyl-6-fluorophenyl)acetamide (12.9 g, 33.0
35 mmol) were converted to product in a manner substantially analogous to Preparation 94, except that diisopropylethylamine was employed instead of sodium

hydride and the reaction was conducted between 50 and 60°C, to yield 14.5 g. (84%). EA, MS(FD).

Preparation 123

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-benzyl-
5 carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (10.6 g, 30.0 mmol) and α -bromo-benzylacetamide (7.52 g, 33.0 mmol) were converted to product in a manner substantially analogous to Preparation 94 to yield 802
10 mg. (5.36%). MS(FD), NMR.

Preparation 124

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-
isobutyl-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine
15 (7.04 g, 20.0 mmol) and α -bromo-isobutylacetamide (8.54 g, 44.0 mmol) were converted to product in a manner substantially analogous to Preparation 94, except that cesium carbonate was employed instead of sodium hydride, to yield 3.35 g. (36.0%). EA, MS(FD).

20 Preparation 125

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2-
methoxyphenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine
25 (10.6 g, 30.0 mmol) and α -O-toluenesulfonylimido-(2-methoxyphenyl)acetamide (7.69 g, 31.5 mmol) were converted to product in a manner substantially analogous to Preparation 94 to yield 10.4 g. (68%). EA, MS(FD).

Preparation 126

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[4-
30 carbomethoxyphenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (12.0 g, 34.2 mmol) and α -O-toluenesulfonylimido-(4-carbomethoxyphenyl)acetamide (13.0 g, 35.9 mmol) were converted to product in a manner substantially analogous
35 to Preparation 94 to yield 15.5 g. (83%). EA, MS(FD).

Preparation 127

1,2-Dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[4-
nitrophenyl]-carbamoylmethyl)-pyridine

- 53 -

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (10.6 g, 30.0 mmol) and α -bromo-(4-nitrophenyl)acetamide (8.55 g, 33.0 mmol) were converted to product in a manner substantially analogous to Preparation 94 to yield 15.3 g. (96.2%). MS(FD), NMR.

Preparation 128

1,2-Dihydro-2-toluenesulfonylimido-5-(4-fluorobenzoyl)-N-(1-[4-fluorophenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-(4-fluorobenzoyl)pyridine (7.40 g, 20.0 mmol) and α -bromo-(4-fluorophenyl)acetamide (5.10 g, 22.0 mmol) were converted to product in a manner substantially analogous to Preparation 94 to yield 9.15 g. (88%). EA, MS(FD).

Preparation 129

1,2-Dihydro-2-toluenesulfonylimido-5-(4-fluorobenzoyl)-N-(1-[2-fluoro-4-trifluoromethylphenyl]-carbamoylmethyl)-pyridine

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoylpyridine (7.40 g, 20.0 mmol) and α -bromo-(2-fluoro-4-trifluoromethylphenyl)acetamide (8.60 g, 22.0 mmol) were converted to product in a manner substantially analogous to Preparation 94, except diisopropylethylamine was employed instead of sodium hydride, to yield 8.95 g. (76%). EA, MS(FD).

Preparation 130


2-Amino-5-carbomethoxy-pyridine

The 6-aminonicotinic acid (50.0 g, 0.362 mol) was dissolved in 3.5 L of MeOH under N₂ and chilled to 0°C. Hydrogen chloride gas was bubbled through the solution for 45 minutes with the temperature of the solution maintained between 0-15°C. The reaction was then heated to 65°C for 4 hours. The MeOH was removed *in vacuo* and the residue taken up in 400 ml of H₂O. The pH was adjusted to about 6.3 with saturated NaHCO₃ to produce a precipitate. The precipitate was filtered and washed with H₂O. The filter cake was dried *in vacuo* at 80°C to give 48.9 g of product. (88.7%). EA, MS(FD).

Preparation 131

- 54 -


2-toluenesulfonylimido-5-carbomethoxy

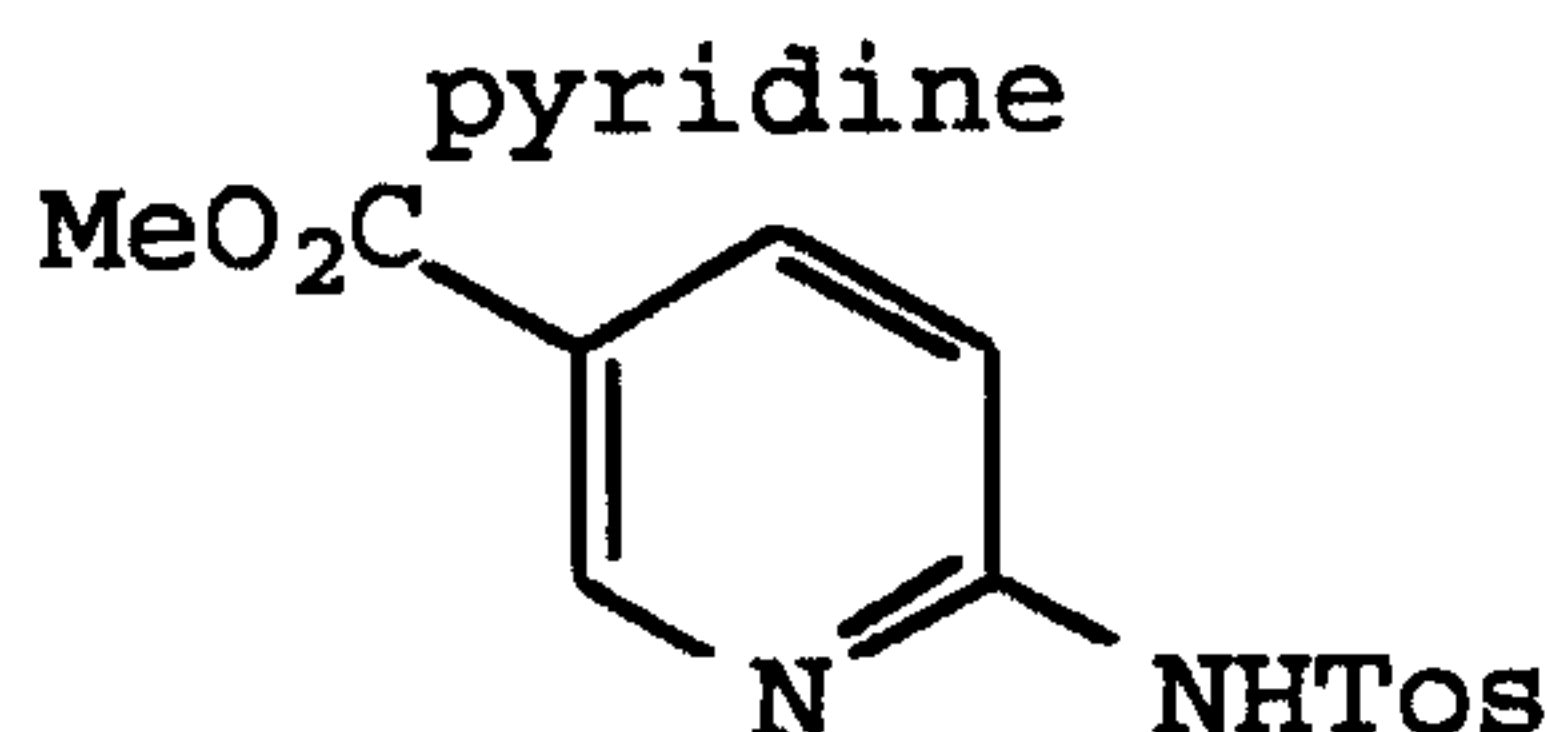

The 2-amino-5-carbomethoxy-pyridine (48.9 g, 0.321 mol) was dissolved in 400 ml of pyridine under N₂. p-Toluenesulfonic acid (73.5 g, 0.386 mol) was added and the solution heated to about 77.5°C for 16 hours. The volume was reduced by 3/4 *in vacuo* and 3.5 L of H₂O was added. The resulting precipitate was filtered, washed with H₂O, and air dried to give 78.4 g of product. (79.7%). MS(FD), NMR.

Preparation 132

1,2-Dihydro-2-toluenesulfonylimido-5-carbomethoxy-(1-phenyl-carbamoylmethyl)pyridine

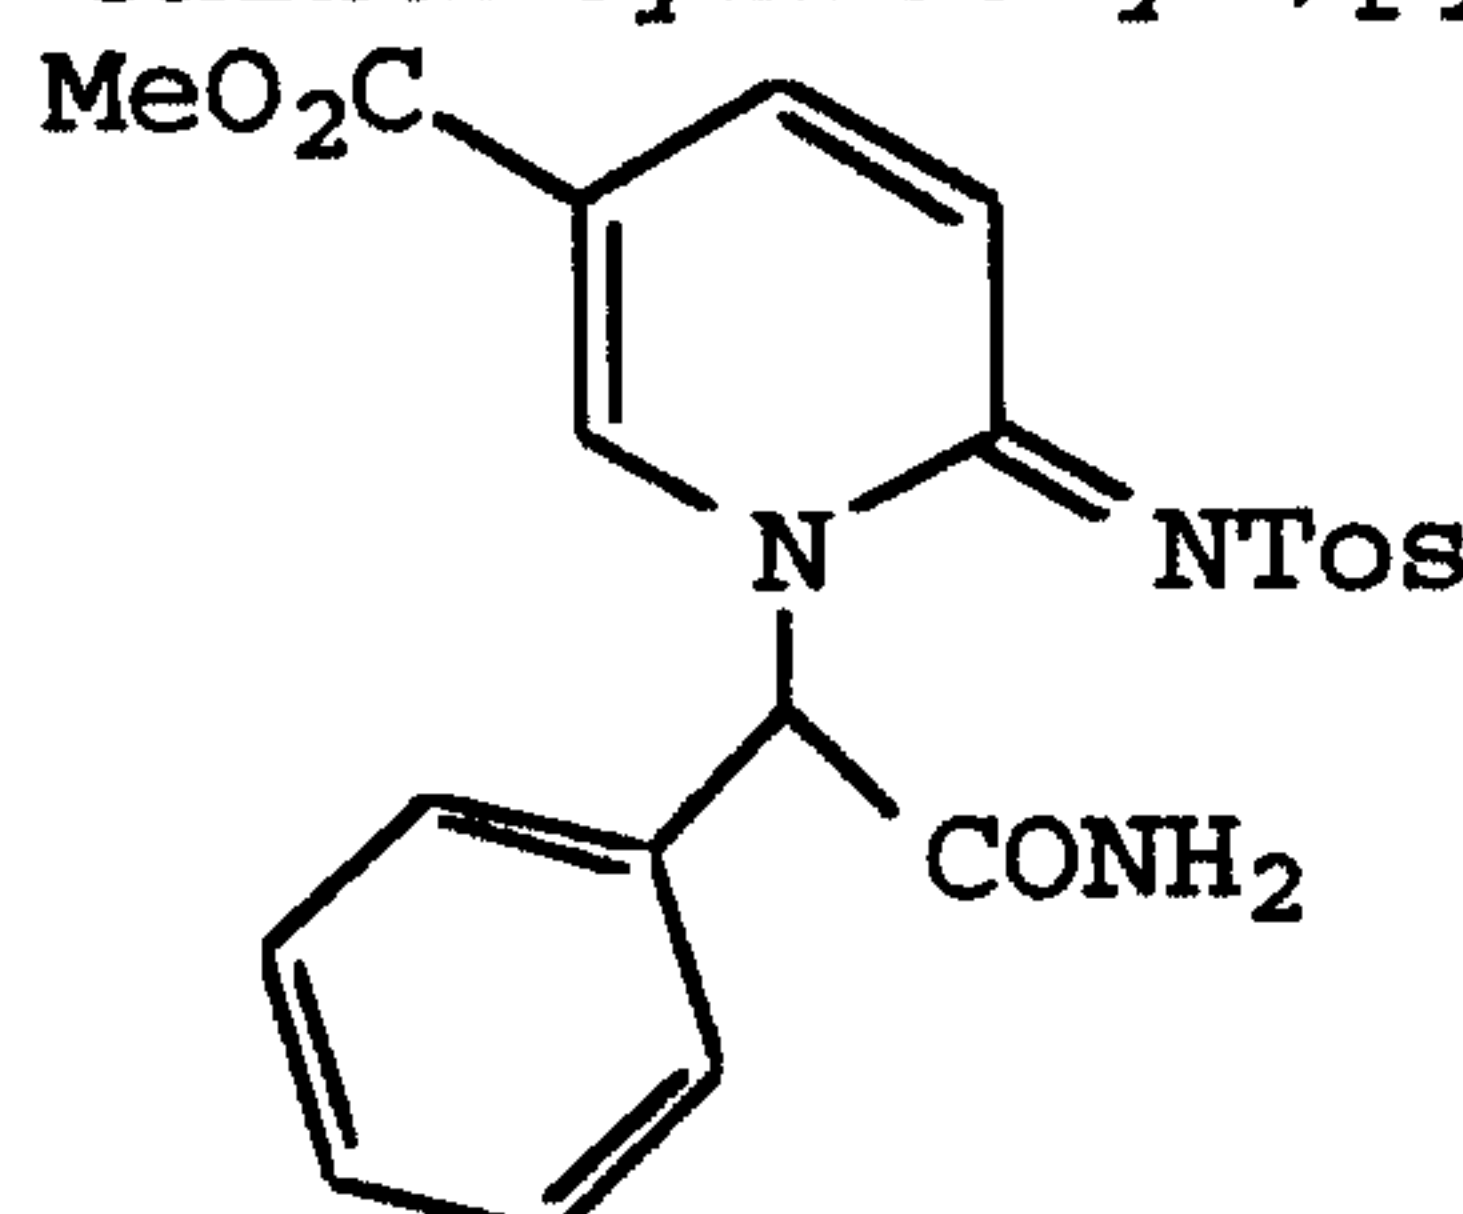


The 2-toluenesulfonylimido-5-methoxycarbonylpyridine (73.4 g, 0.240 mol) was suspended in 465 ml of DMF under N₂. Sodium hydride (60%, 10.1 g, 0.253 mol) was added in two portions. When the reactants were all in solution, (about 45 minutes) α-bromophenylacetamide (53.8 g, 0.252 mol) was added and the solution was allowed to stir for 64 hours. The volume was reduced by 2/3 *in vacuo* and the mixture was poured into 3 L of H₂O and the mixture stirred for 2 hours. The precipitate was filtered and washed with H₂O. The filter cake was dried *in vacuo* at 60°C to give 103.4 g of product. (98.2%). MS(FD), NMR.

Preparation 133

2-Trifluoroacetamido-3-phenyl-6-(carbomethoxy)imidazo[1,2-a]pyridine


- 55 -

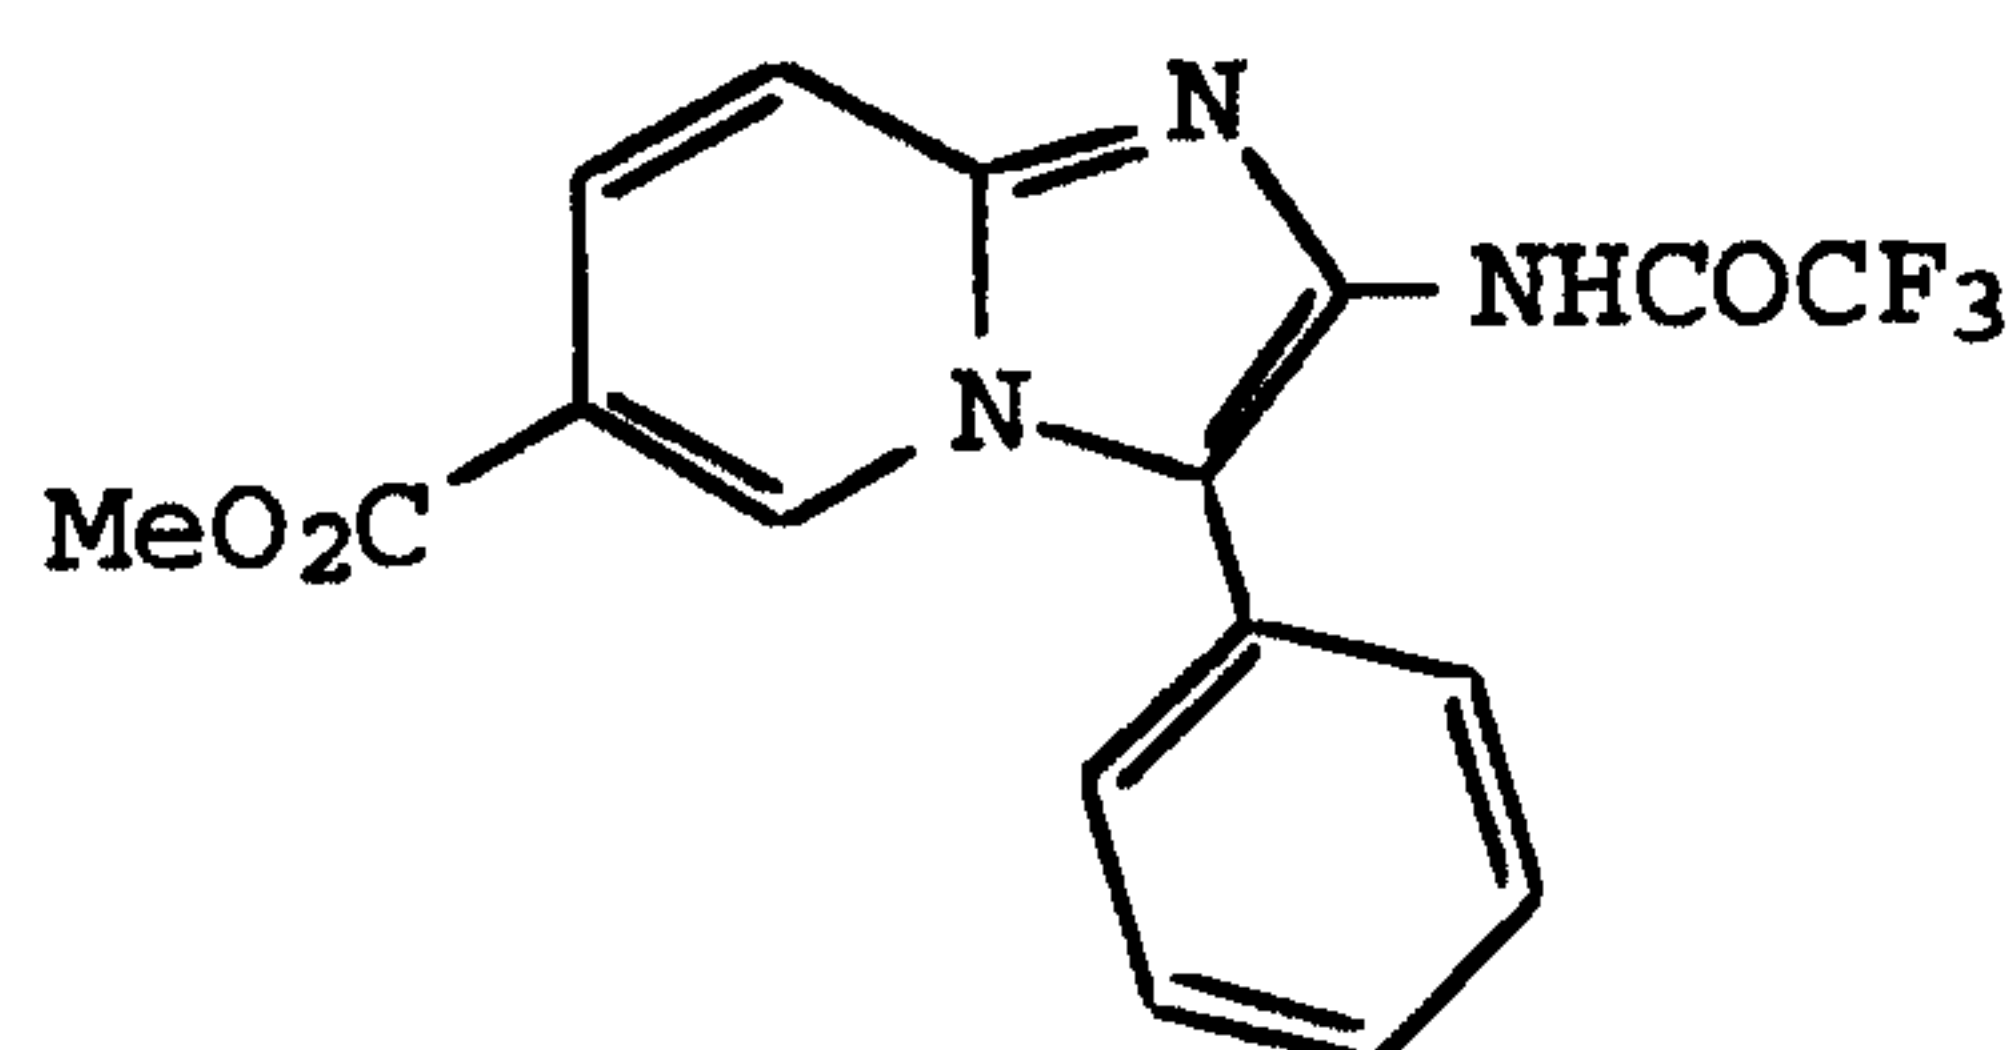

The 1,2-dihydro-2-(4-methoxyphenyl)-5-phenyl-1H-imidazo-
 (1-phenyl-carbamoylmethyl)pyridine (103.3 g, 0.235 mol),
 trifluoroacetic anhydride (286 ml, 2.03 mol), and 573 ml
 5 of CH₂Cl₂ were combined under N₂ and heated to reflux.
 The solution was refluxed for 6 hours before
 concentrating *in vacuo*. The residue was dissolved in 1.5
 L of CH₂Cl₂ and washed with saturated NaHCO₃ (3 x 500
 ml), brine (2 x 500 ml), dried over Na₂SO₄, and filtered.
 10 The mother liquor was concentrated *in vacuo*, the residue
 taken up in 250 ml of hot EtOAc, and the product
 precipitated with 700 ml of hexanes. The precipitating
 mixture was placed in the freezer for 18 hours, then
 filtered, washed with hexane, and dried *in vacuo* at 40°C
 15 to give 75.3 g of product. (quant. yeild). NMR.

Preparation 134

2-Amino-3-phenyl-6-(carbomethoxy)imidazo[1,2-a]pyridine

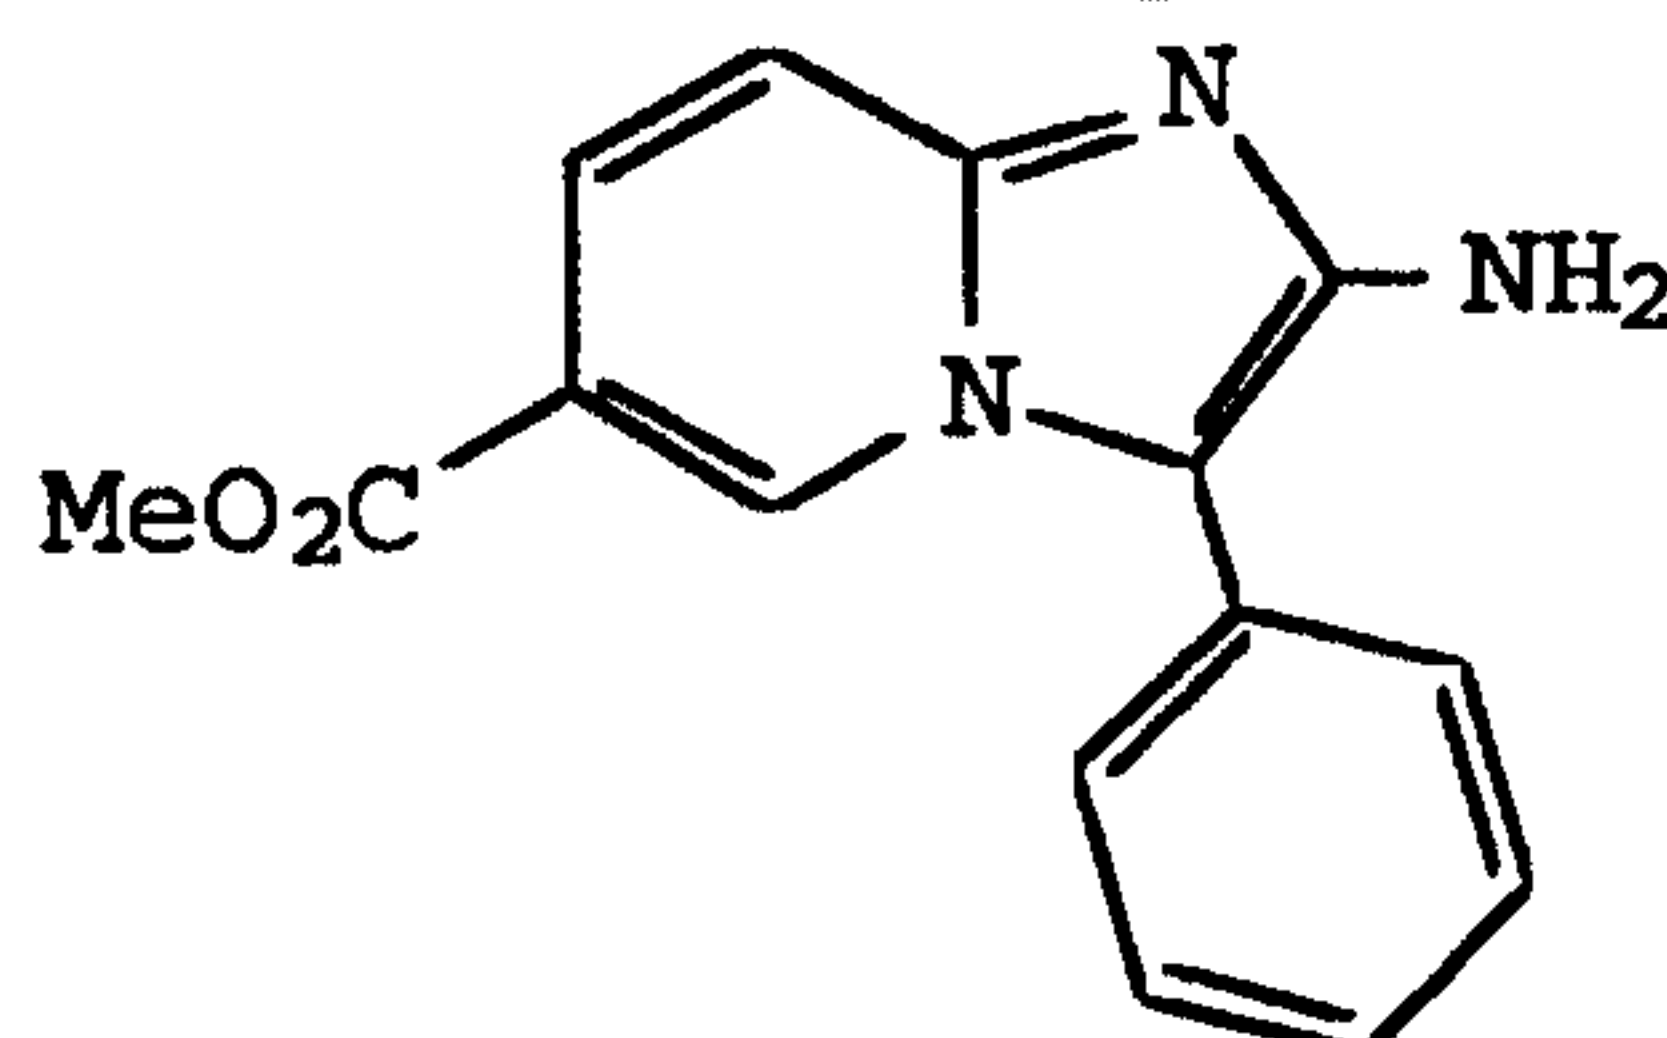

The 2-trifluoroacetamido-3-phenyl-6-
 20 (carbomethoxy)imidazo-[1,2-a]-pyridine (136 g, 0.440 mol)
 was dissolved in 845 ml of MeOH. The
 diisopropylethylamine (280 ml, 1.61 mol) was added over
 15 minutes. The reaction was heated slowly to reflux and
 stirred for 68 hours. The reaction was cooled to 0°C and
 25 the precipitate filtered. The filter cake was washed
 with cold MeOH and air dried to give 84.0 g of product.
 (71.4%). EA, MS(FD).


Preparation 135

-56-

2-Amino-3-phenyl-6-(carboxy)imidazo[1,2-a]pyridine
 The 2-amino-3-phenyl-6-(carbomethoxy)imidazo-[1,2-a]-
 pyridine (83.9 g, 0.314 mol), lithium hydroxide
 monohydrate (65.9 g, 1.57 mol), 1113 ml of THF, and 371
 5 ml of H₂O were combined and stirred for 18 hours at RT.
 The reaction was concentrated *in vacuo* and the residue
 taken up in 5 L of H₂O. The pH was adjusted to 5 with 5N
 HCl. The resulting precipitate was filtered and air
 dried for 72 hours to give 80.5 g of product. (quant.
 10 yeild). NMR, MS(FD).

Preparation 136

2-Amino-3-phenyl-6-(N-methyl-N-methoxycarbamoyl)imidazo[1,2-a]pyridine

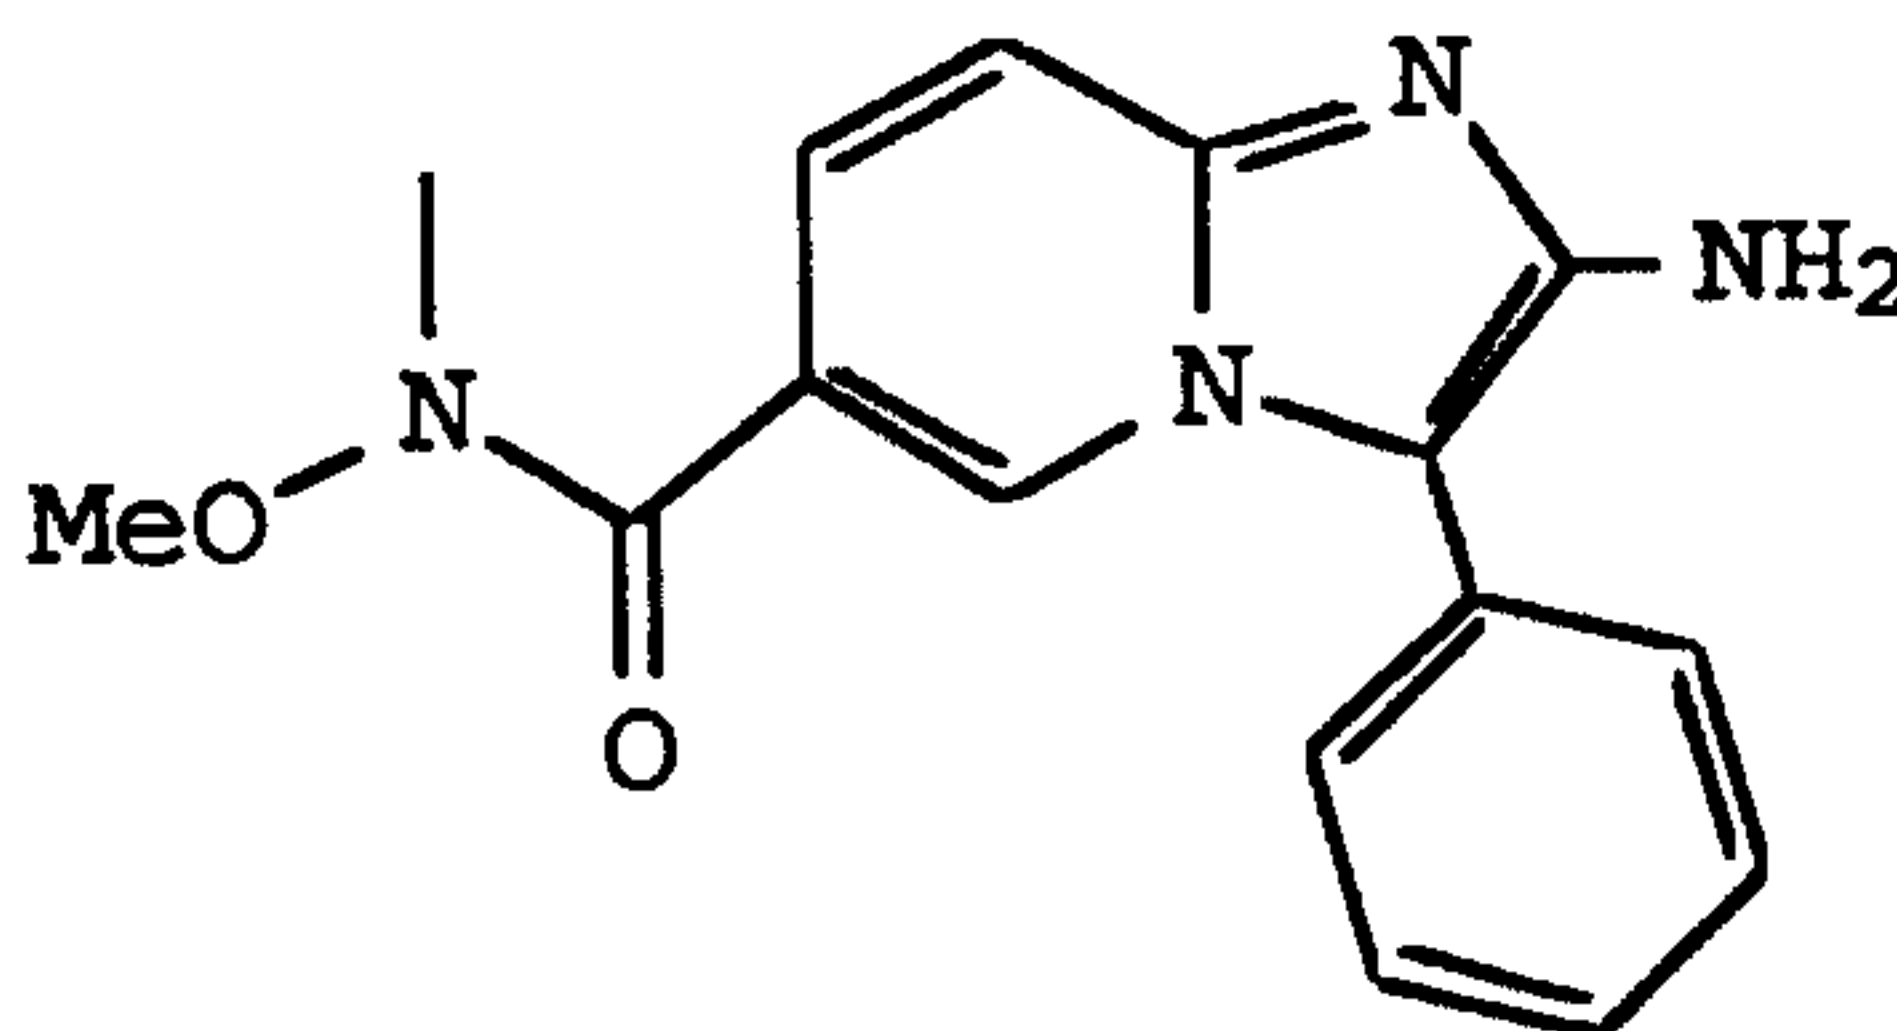

15 The 2-amino-3-phenyl-6-(carboxy)imidazo-[1,2-a]-pyridine
 (80.4 g, 0.317 mol) and N,O-dimethylhydroxylamine
 hydrochloride (92.8 g, 0.951 mol) were dissolved in 500
 ml DMF under N₂. The diisopropylethylamine (123 g, 0.951
 mol) was added and the mixture stirred for 30 minutes at
 20 RT. The 1-(3-dimethylaminopropyl)-3-ethylcarbodiimide
 hydrochloride (122 g, 0.634 mol) was added and allowed to
 stir for 19 hours at RT. The DMF was removed *in vacuo*
 and the residue was poured onto 4 L of H₂O. The aqueous
 layer was extracted with CH₂Cl₂ (3 x 500 ml) and the
 25 organic extracts were washed with brine, dried over
 Na₂SO₄, filtered, and concentrated *in vacuo*. The residue
 was taken up in 400 ml of EtOAc and stirred for 1 hour at
 RT to form the precipitate. The precipitate was filtered
 and washed with cold EtOAc. The filter cake was dried in
 30 *vacuo* at 40°C to yield 55.5 g of product. (59.2%).
 MS(FD), NMR.

Preparation 137

2-Iodopyridine

-57-

A mixture of 2-bromopyridine (48.0 g, 303 mmol) and 240 ml of a 47% hydroiodic acid solution were refluxed for 8 hours and then stirred at RT for 3.5 days. The reaction mixture was poured onto aqueous NaOH (240 ml of 40% NaOH and 250 g of ice). The mixture was extracted with Et₂O (3 x 200 ml) and the ether was washed with 100 ml of brine, dried over Na₂SO₄, filtered, and concentrated in vacuo. The residue was distilled in vacuo twice collecting fractions between 83 and 88°C to yield 18.6 g of product. (30%). EA, MS(FD).


Preparation 138

4-Iodopyridine

The 4-bromopyridinehydrochloride (50.0 g, 257 mmol) was converted to product in a manner substantially analogous to Preparation 137 to yield 32.9 g. (62.4%). MS(FD), NMR.

Preparation 139


N-(3-phenyl-6-[N-methyl-N-carbamoyl]imidazo[1,2-a]pyridin-2-yl)-2,2,5,5-tetramethyl-1-aza-2,5-disilacyclopentane

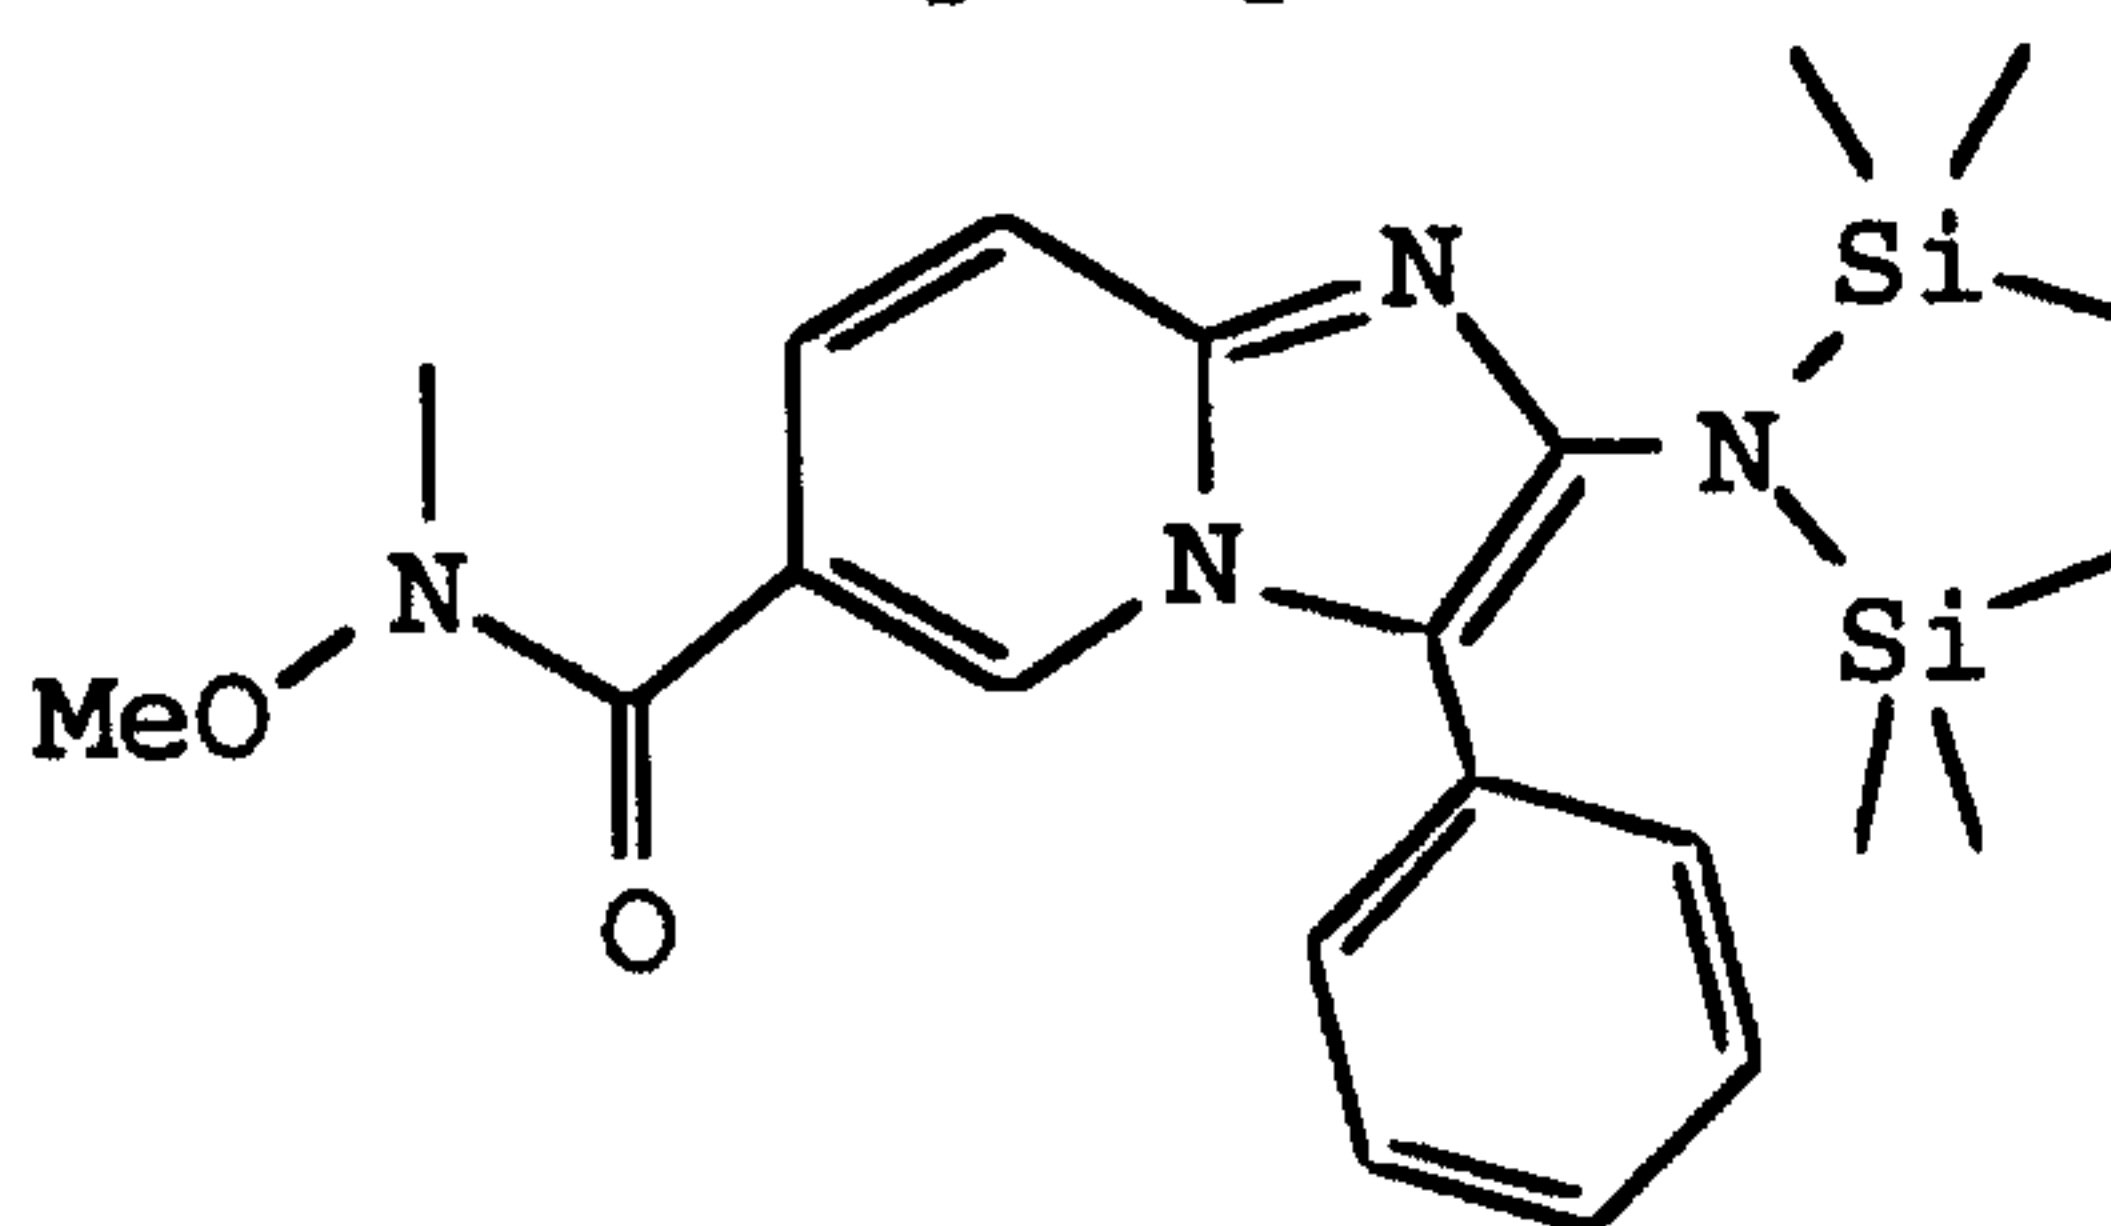

The 2-amino-3-phenyl-6-(N-methyl-N-methoxycarbamoyl)imidazo[1,2-a]pyridine (0.592 g, 2.00 mmol) was suspended in 20 ml of xylene. The 1,1'-ethylenebis(N,N,1,1,-tetramethylsilanamine) (1.227 g, 5.28 mmol) and zinc iodide (10 mg, 0.031 mmol) were added and the mixture heated to reflux for 4 hours. The solvent was removed in vacuo and the crude product was used in subsequent reactions without further purification.

Preparation 140


1-Carbamoylmethyl-1,2-dihydro-2-toluenesulfonimido-6-benzoylpyridine

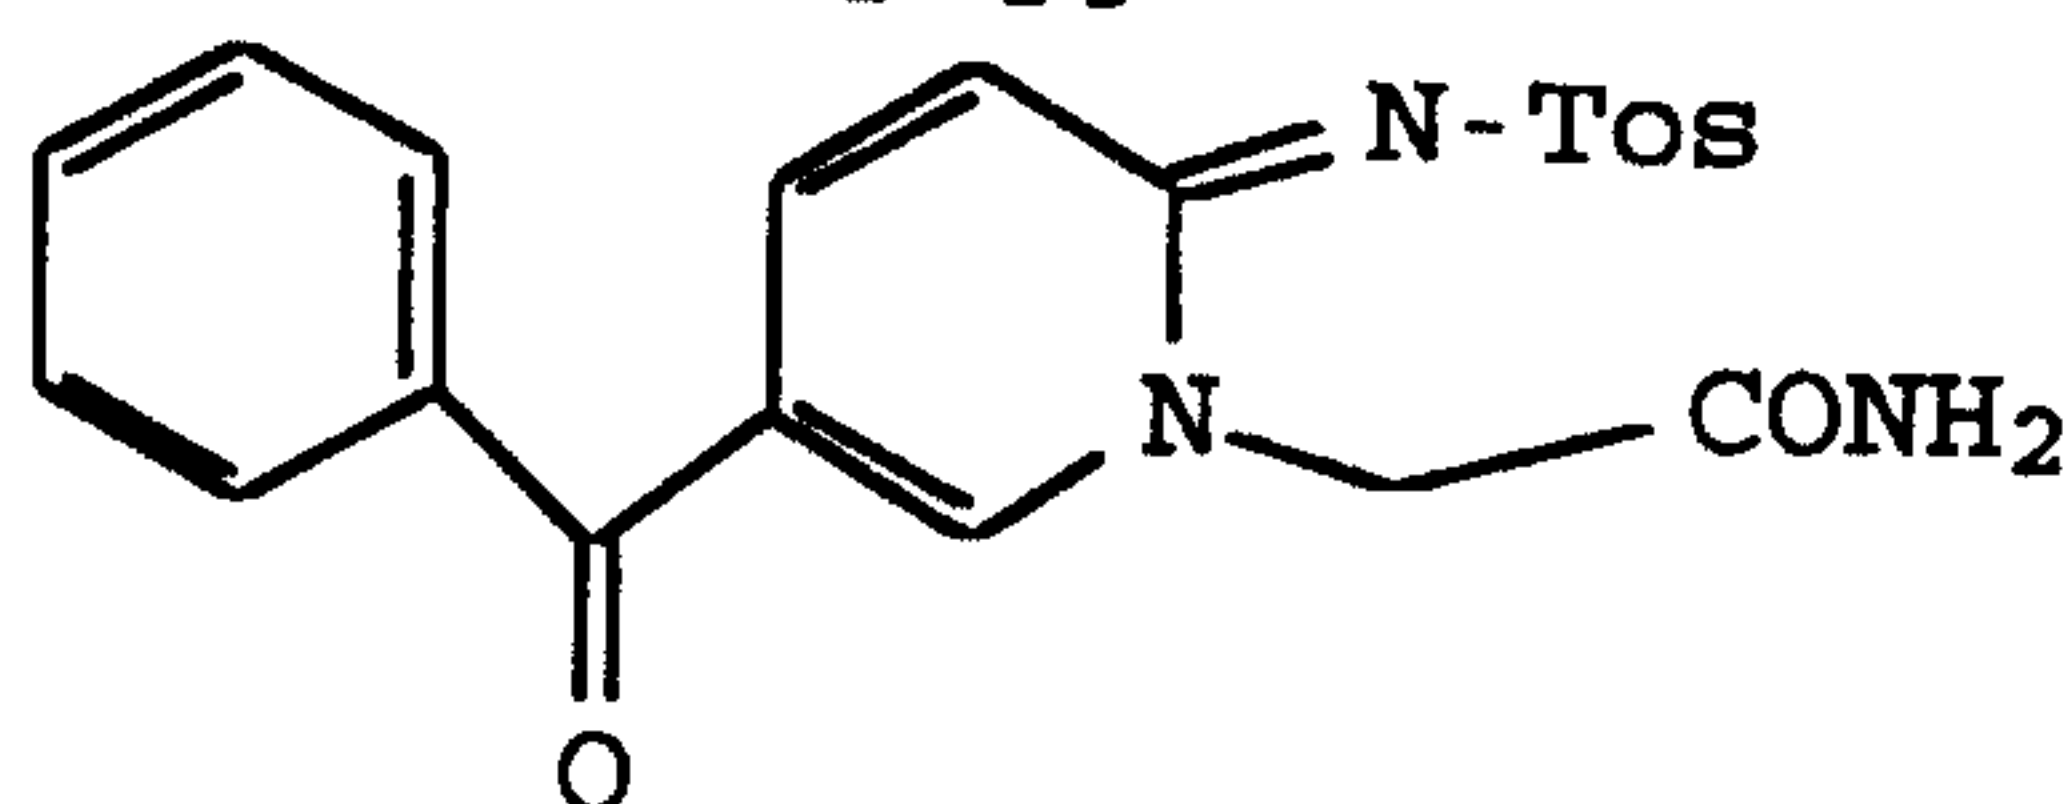

To a stirred suspension of 1,2-dihydro-2-toluenesulfonimido-5-benzoylpyridine (11.65 g, 32.10 mmol) in 100 ml of dry DMF was added diisopropylethylamine (6.34 ml, 34.2 mmol). After 15 minutes, the solution turned clear. Iodoacetamide (6.74g, 34.2 mmol) was then added. The mixture was stirred for 24 hours and then poured onto H₂O (2 L) and stirred for an additional hour. The solids were collected and air-dried yielding 13.15 g (97%) of a white solid. EIMS, NMR.

Preparation 141

Diethyl- (N-methylcarbamoylmethyl)phosphonate

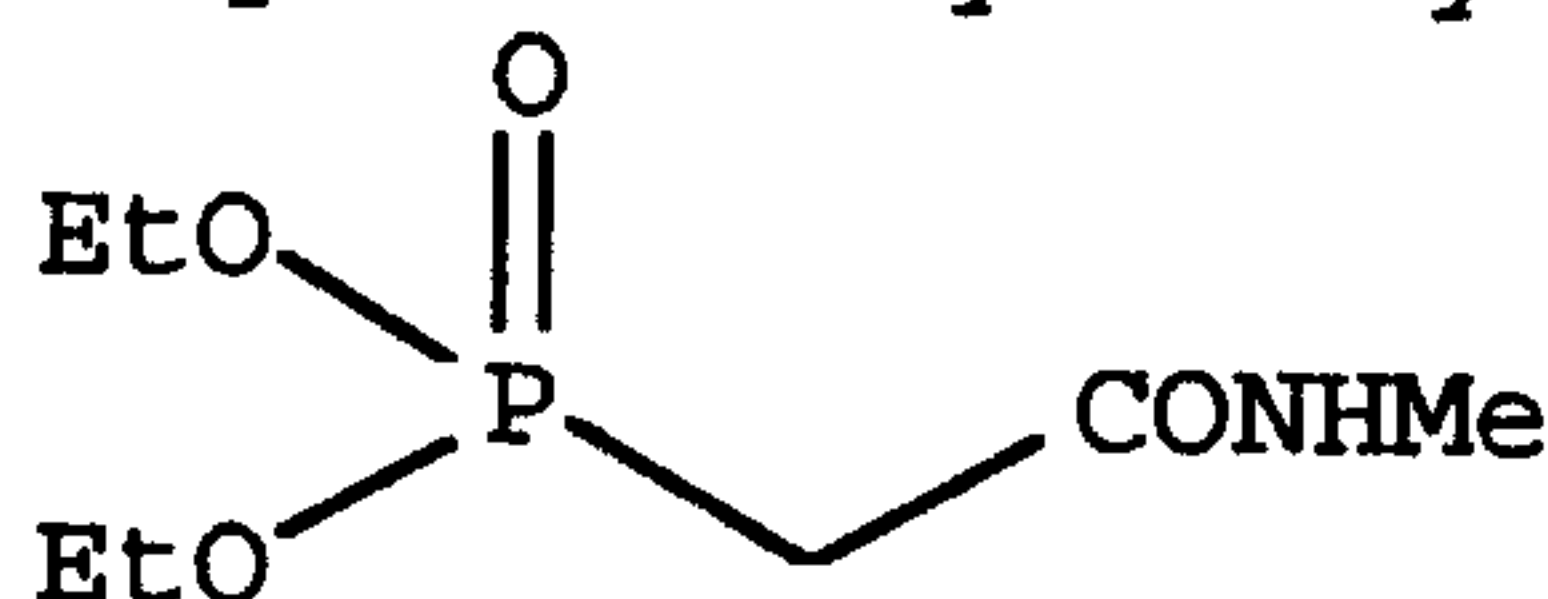

A solution of 4.12 mL of 40% methylamine (aqueous, 47 mmol) in 8.3 mL of MeOH was cooled to -78°C. Triethyl phosphonoacetate (8.85 mL, 44.2 mmol) was added dropwise over 10 minutes. The reaction mixture was allowed to warm to RT then stirred at this temperature for 29 hours (TLC: MeOH/CH₂Cl₂: 1/9). The solvents were removed in vacuo at 35°C and the resulting colorless liquid was purified by distillation (0.5 mmHg/130°C). (87%). NMR.

Preparation 142


Isopropyl isopropanethiol-sulfonate
iPr-S(O)₂-S-(iPr)

To a solution of diisopropylpropanethiol sulfonate (10.0 g, 66.5 mmol) in 55 ml of acetic acid was added dropwise 33% hydrogen peroxide (14.4 g, 140 mmol) over a 30 minute period at 0°C. After stirring for 24 hours at room temperature, the solvents were evaporated to dryness and

the crude oil was purified by column chromatography (EtOAc/hexane) to give 8.5 g of a colorless oil product. (70%). ^1H -NMR, ^{13}C -NMR.

Preparation 143


- 5 1-Carbamoylmethyl-1,2-dihydro-2-toluenesulfonimido-6-(carbomethoxy)pyridine

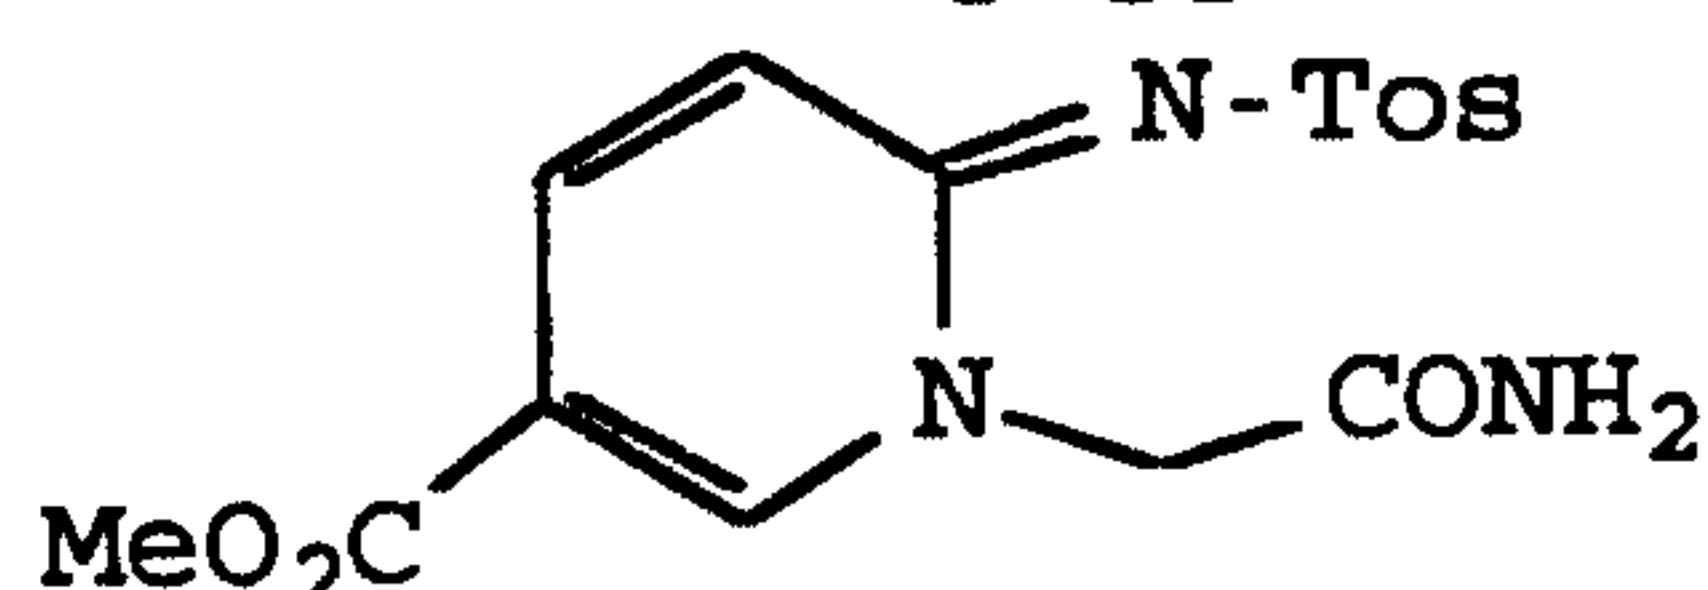

- The 1,2-dihydro-2-toluenesulfonimido-5-methoxycarbonylpyridine (20 g, 65.3 mmol) was suspended
 10 in dry DMF (120 mL) and stirred under argon. Diisopropylethylamine (125.2 mL, 71.82 mmol) and 2-iodoacetamide (13.28 g, 71.82 mmol) were added and the reaction mixture was stirred at RT for 24 hours. The reaction was poured onto H₂O (60 mL) and stirred for 90
 15 minutes. The solid was collected by filtration, washed with H₂O (1 L), Et₂O (200 mL), and dried *in vacuo* to give 21.8 g (91.7%) of desired product as a white solid. MS (FAB), NMR.

Preparation 144

- 20 2-Trifluoroacetamido-6-carbomethoxy-imidazo[1,2-a]pyridine

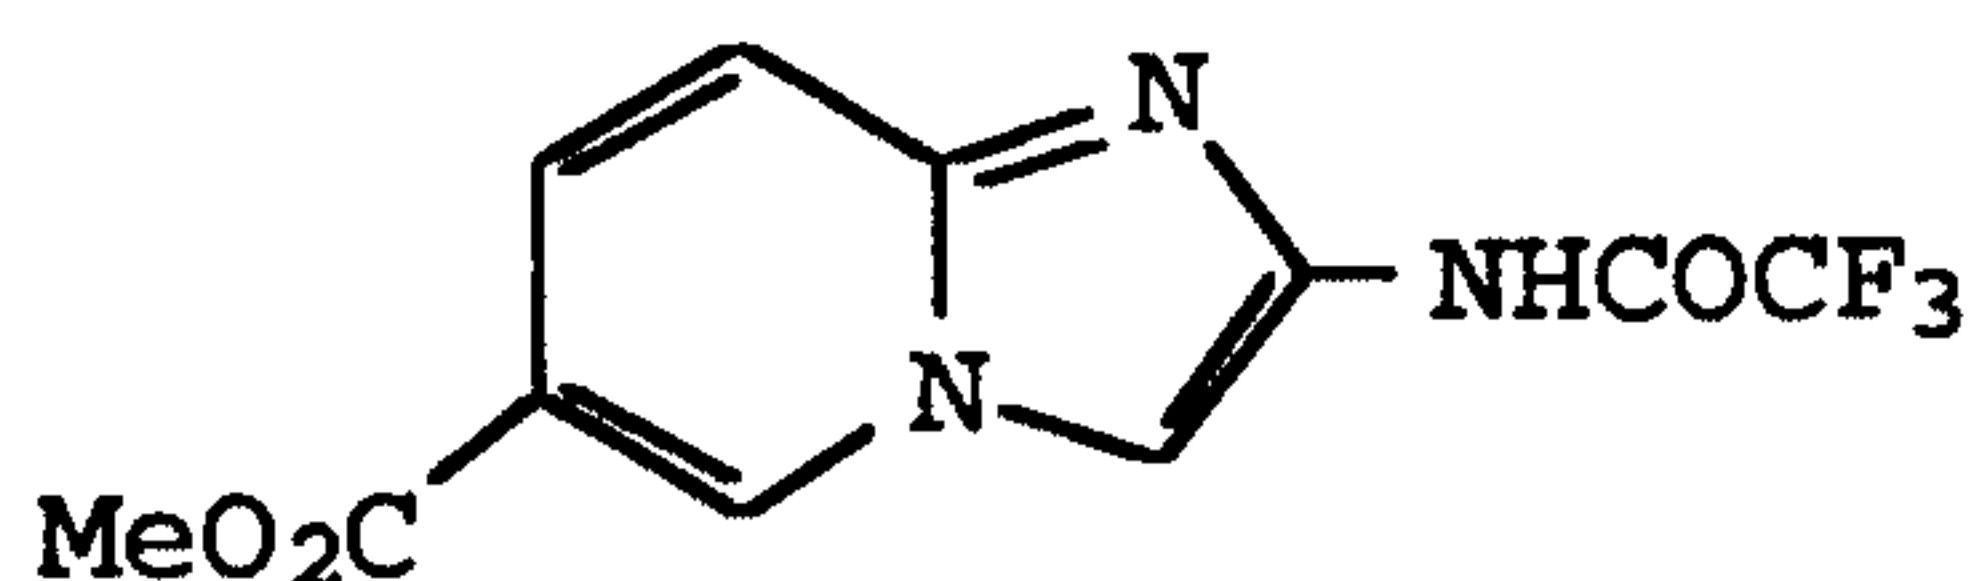


- To a suspension of 1-carbamoylmethyl-1,2-dihydro-2-toluenesulfonimido-6-(carbomethoxy)pyridine (5.00 g, 13.8
 25 mmol) in dry CH₂Cl₂ (75 mL), under an argon atmosphere, was added trifluoroacetic anhydride (60 mL, 425 mmol). The resulting solution was refluxed for 3 hours. The solvents were removed *in vacuo*. The residue was taken up in EtOAc (150 mL) and the suspension was stirred for 30
 30 minutes. The solids were collected, poured onto H₂O (50 mL) and stirred for 30 minutes. The solids were collected and dried *in vacuo* to give 1.92 g (49%) of product as a white solid. MS (FAB), NMR.

-60-

Preparation 145


2-Trifluoroacetamido-6- (N-methoxy-N-methylamido) -
imidazo[1,2-a]pyridine

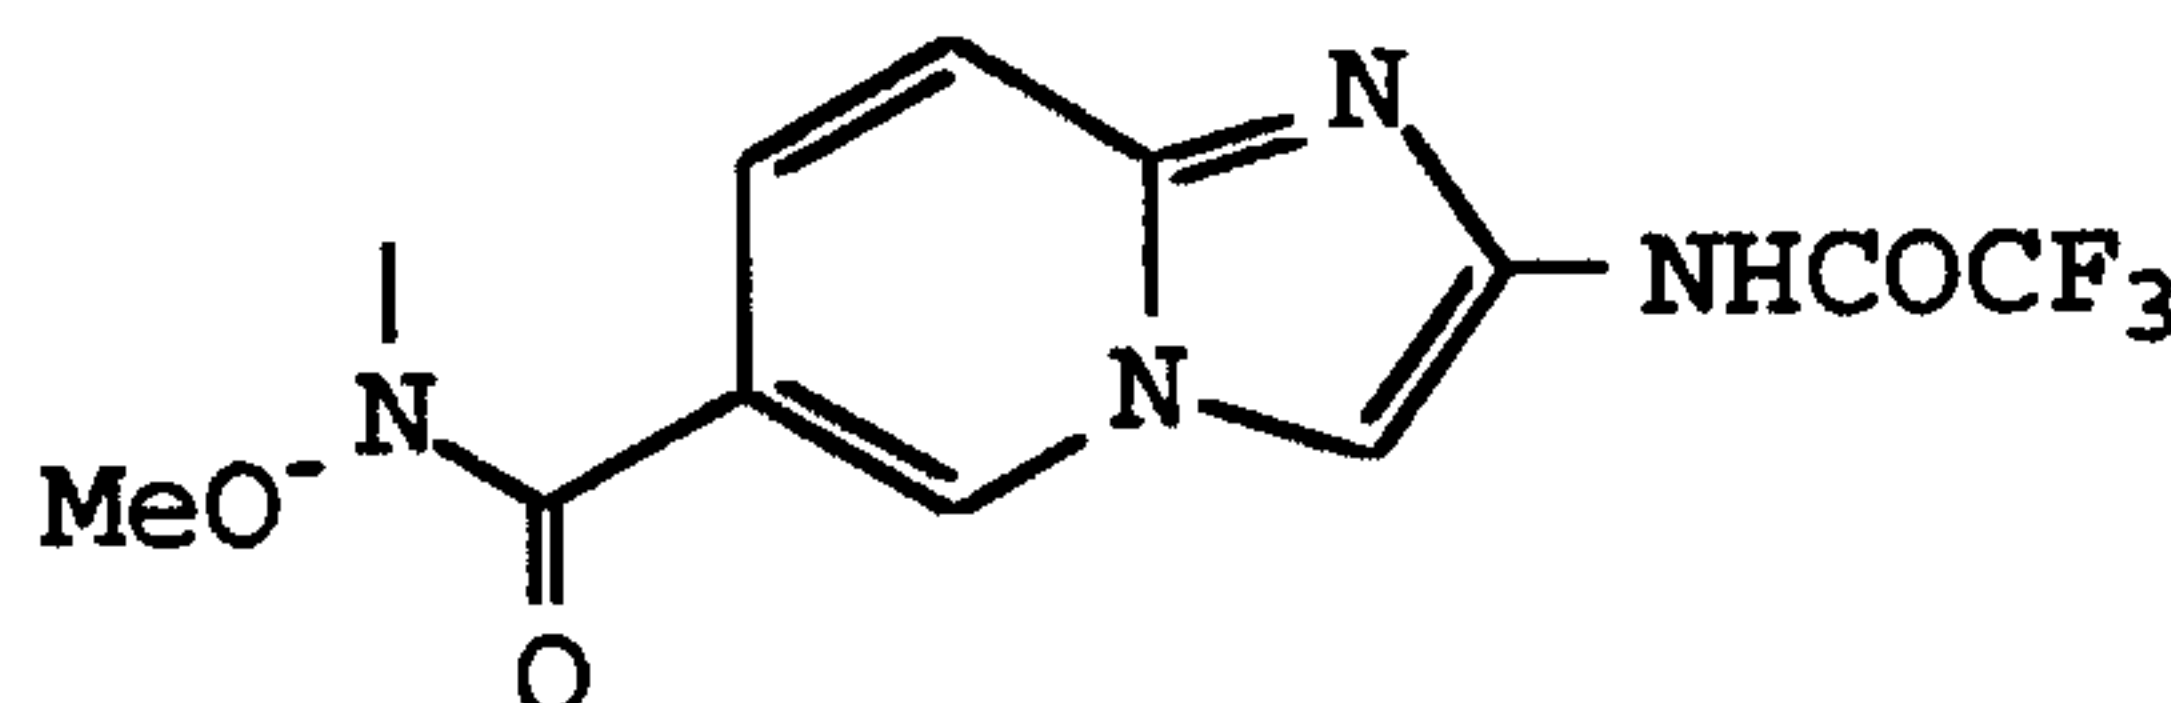

- 5 To a cooled solution (-20°C) of 2-trifluoroacetamido-6-carbomethoxy-imidazo[1,2-a]pyridine (1.50 g, 5.23 mmol) and N-O-dimethylaminohydrochloride (893 mg, 9.15 mmol) in 30 ml of THF was added dropwise isopropyl magnesium chloride (12.0 ml, 24.1 mmol) over 20 minutes.
- 10 The reaction mixture was stirred at -20°C for 1 hour. The solvent was removed and the residue was dissolved in EtOAc and washed with saturated NH₄Cl. The combined organic extracts were dried (Na₂SO₄) and the solvent was removed *in vacuo* to give 1.23 g of a white solid. (75%).
- 15 HRMS calcd. for C₁₂H₁₁N₄O₃F₃: 316.0783. Found: 316.0782, NMR.

Preparation 146

2-Trifluoroacetamido-3-phenyl-6- (N-methyl-N-methoxycarbamoyl) -imidazo[1,2-a]pyridine

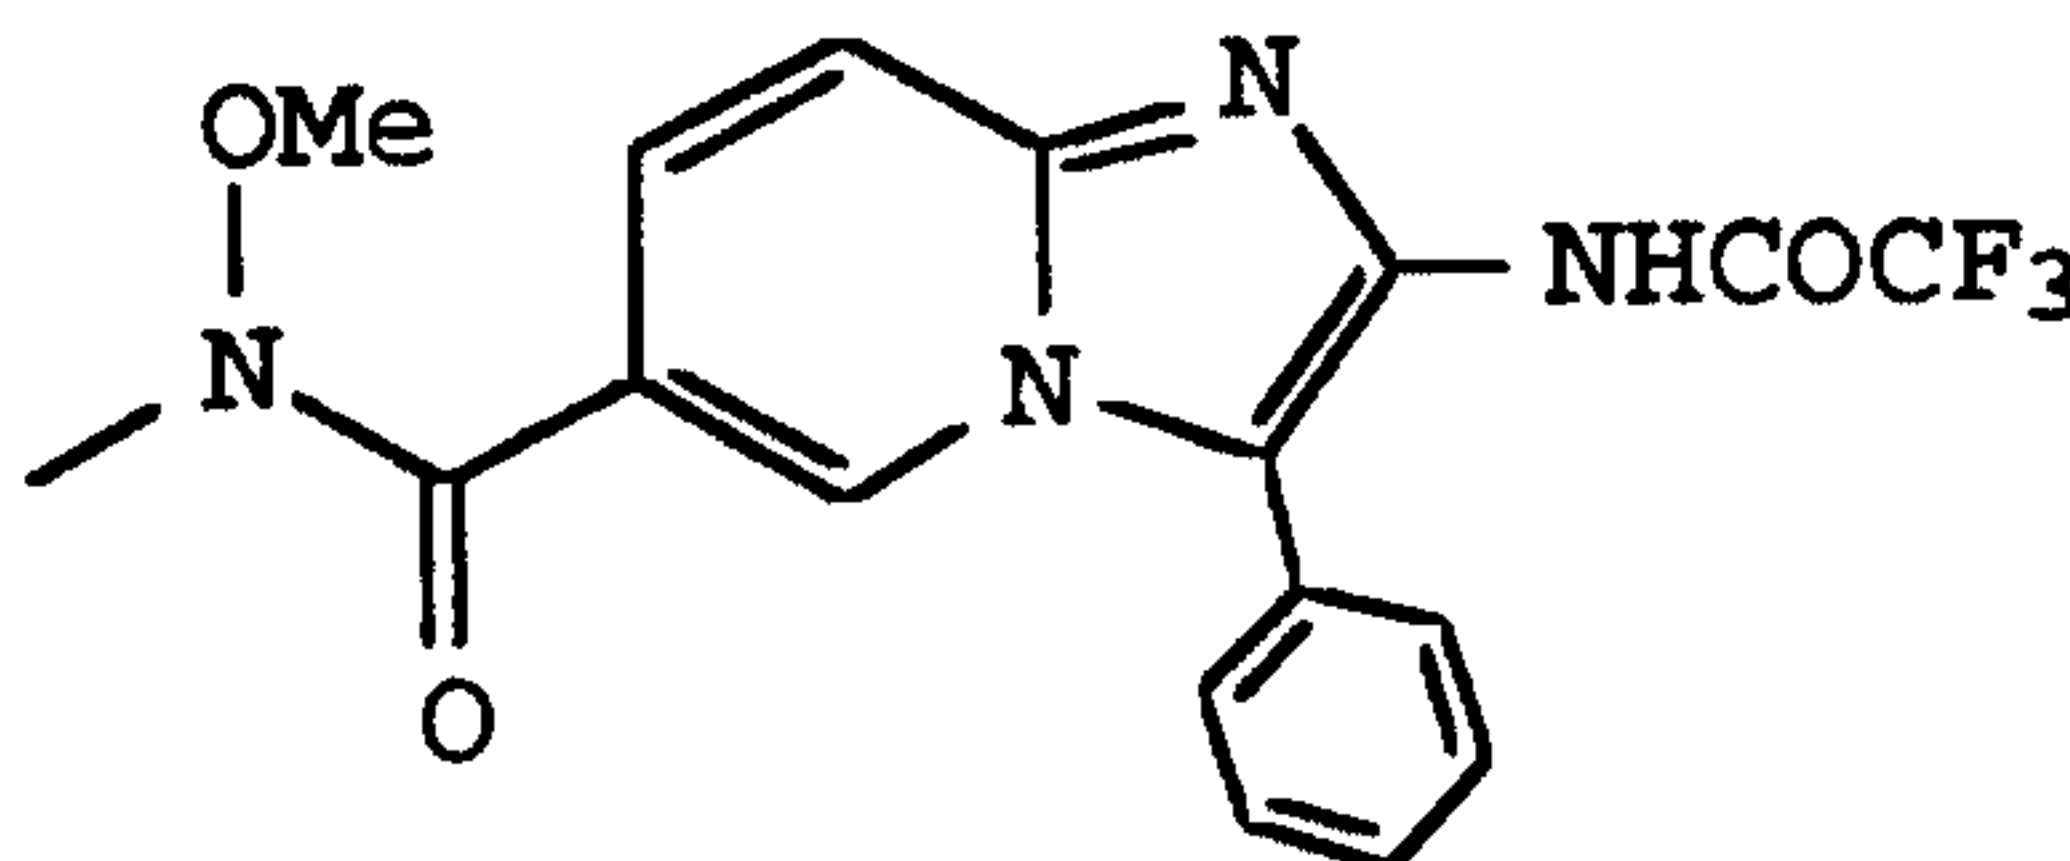

- 20 The 2-trifluoroacetamido-3-phenyl-6-carbomethoxy-imidazo[1,2-a]pyridine (12.0 g, 33 mol) was converted to product in a manner substantially analogous to Preparation 189 to yield 8.0 g. (68%). MS(FAB), NMR.

25 Preparation 147

2-Chloro-5- (N-methyl-N-methoxycarbamoyl)pyridine


- To a solution of 2,6-dichloronicotine (880 mg, 5 mmol) in 20 ml of acetone was added N-methoxy-N-methylamino hydrochloride (500 mg, 5.13 mmol) and
- 30 diisopropylethylamine (1.33 g, 10.2 mmol). The reaction mixture was stirred for 10 minutes. The solvent was

-61-

removed *in vacuo* and the resulting residue was purified by column chromatography to give 950 mg of product as an oil. (95%).

Preparation 148

5 2-Chloro-5-(1-phenyl-2-N-methylcarbamoylvinyl)pyridine

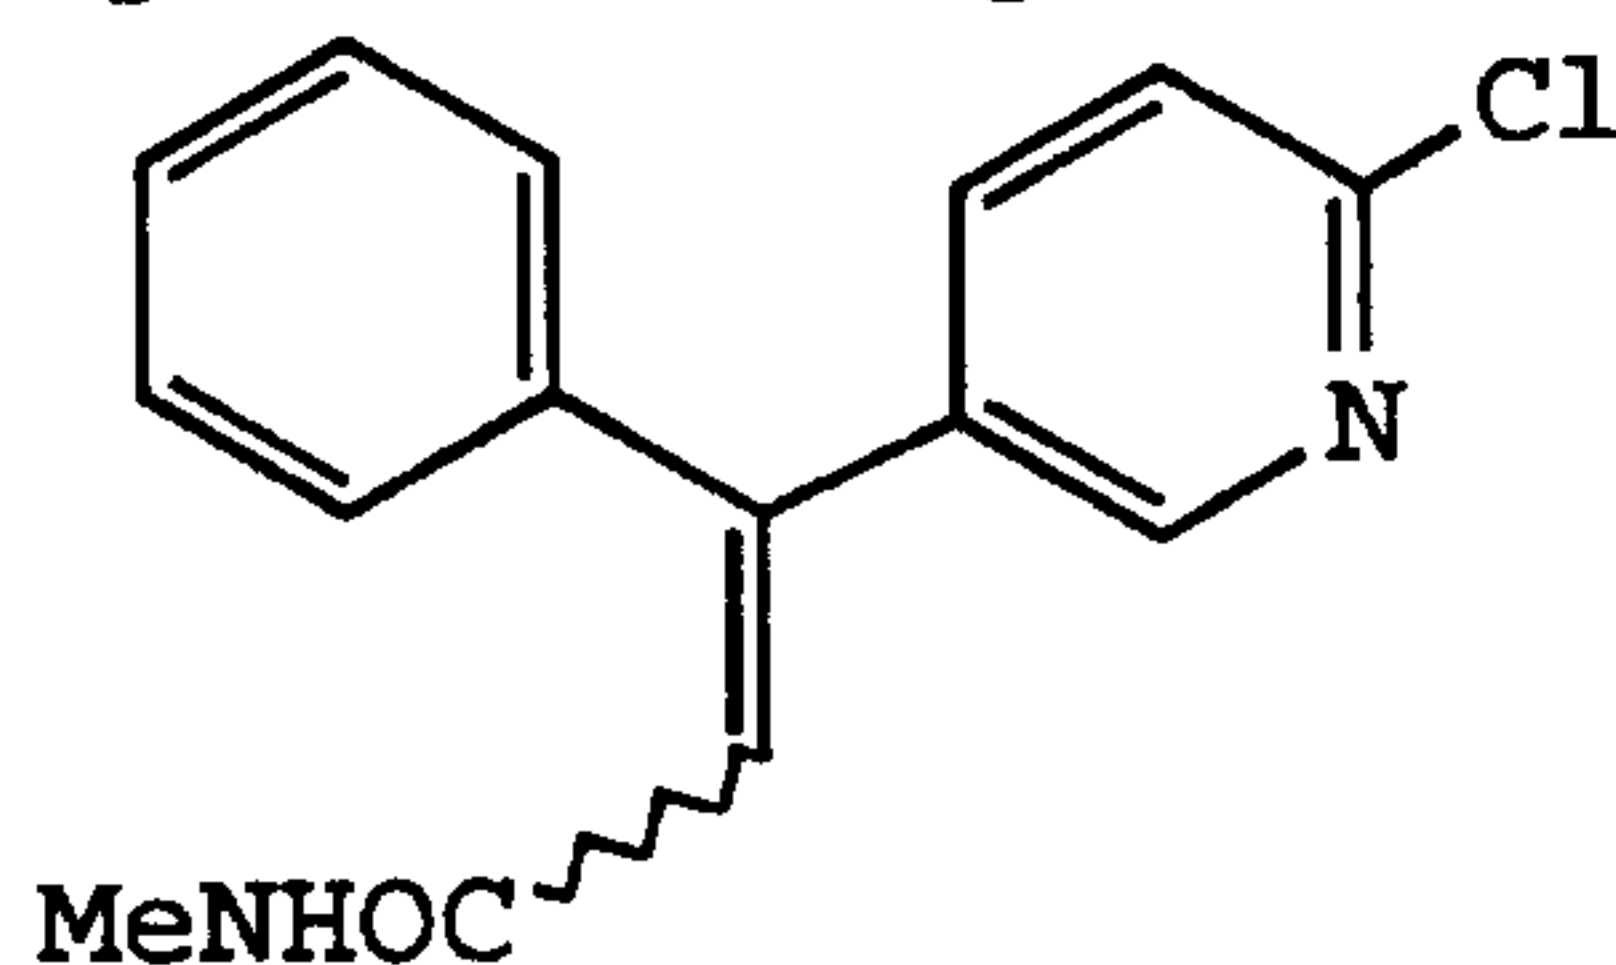

To a solution of potassium hexamethyldisilazide (9.2 g, 46 mmol) in 25 mL of dry DMF under an argon atmosphere at 0°C was added a solution of diethyl(N-methylcarbamoylmethyl)phosphonate (4.81 g, 23.0 mmol) in 50 mL of dry DMF. The reaction mixture was stirred at 0°C for about 2 hours. A solution of 2-chloro-5-benzoylpyridine (2.5 g, 11.5 mmol) in 25 mL of dry DMF was added via cannula. The ice bath was removed and the resulting brown solution was allowed to warm to RT and stir for 16 hours. The mixture was quenched with saturated NH₄Cl (30 mL) and extracted with EtOAc. The organic layers were combined and washed with saturated NH₄Cl and then with brine. After drying over NaSO₄, the solvent was removed *in vacuo* and the resulting residue was passed through a chromatography column (Hex/AcOEt 1:1) to give 1.5 g (50%) of a mixture of isomers E:Z in 1:1.5 ratio. The isomers were separated by crystallization. Z-isomer, IR, NMR and the E-isomer, IR, NMR.

Preparation 149

2-Chloro-5-(2,3-difluorobenzoyl)pyridine


To a solution of 1-bromo-2,3-difluorobenzene (0.114 g, 0.746 mmol) in 3 mL of dry THF was added, at -78°C, n-butyl lithium (1.6 M in hexane, 0.47 mL, 0.749 mmol). The reaction mixture was stirred at this temperature for 1 hour. A solution of 6-chloro-N-methoxy-N-methylnicotinamide (0.13 g, 0.68 mmol) in 5 mL of THF was added and the reaction mixture was allowed to warm to RT and

- 62 -

stir for 6 hours. Saturated NH_4Cl was added and the mixture was extracted with CH_2Cl_2 (3 x 10 ml). The organic layers were combined, washed with brine, and dried over NaSO_4 . The solvents were removed *in vacuo* and the residue was purified by column chromatography (Hex/AcOEt 9:1) to give 130 mg (77%) of an oily product. IR, NMR.

Preparation 150


2-Chloro-5-(1-(2,3-difluorophenyl)-2-N-methylcarbamoylvinyl)pyridine

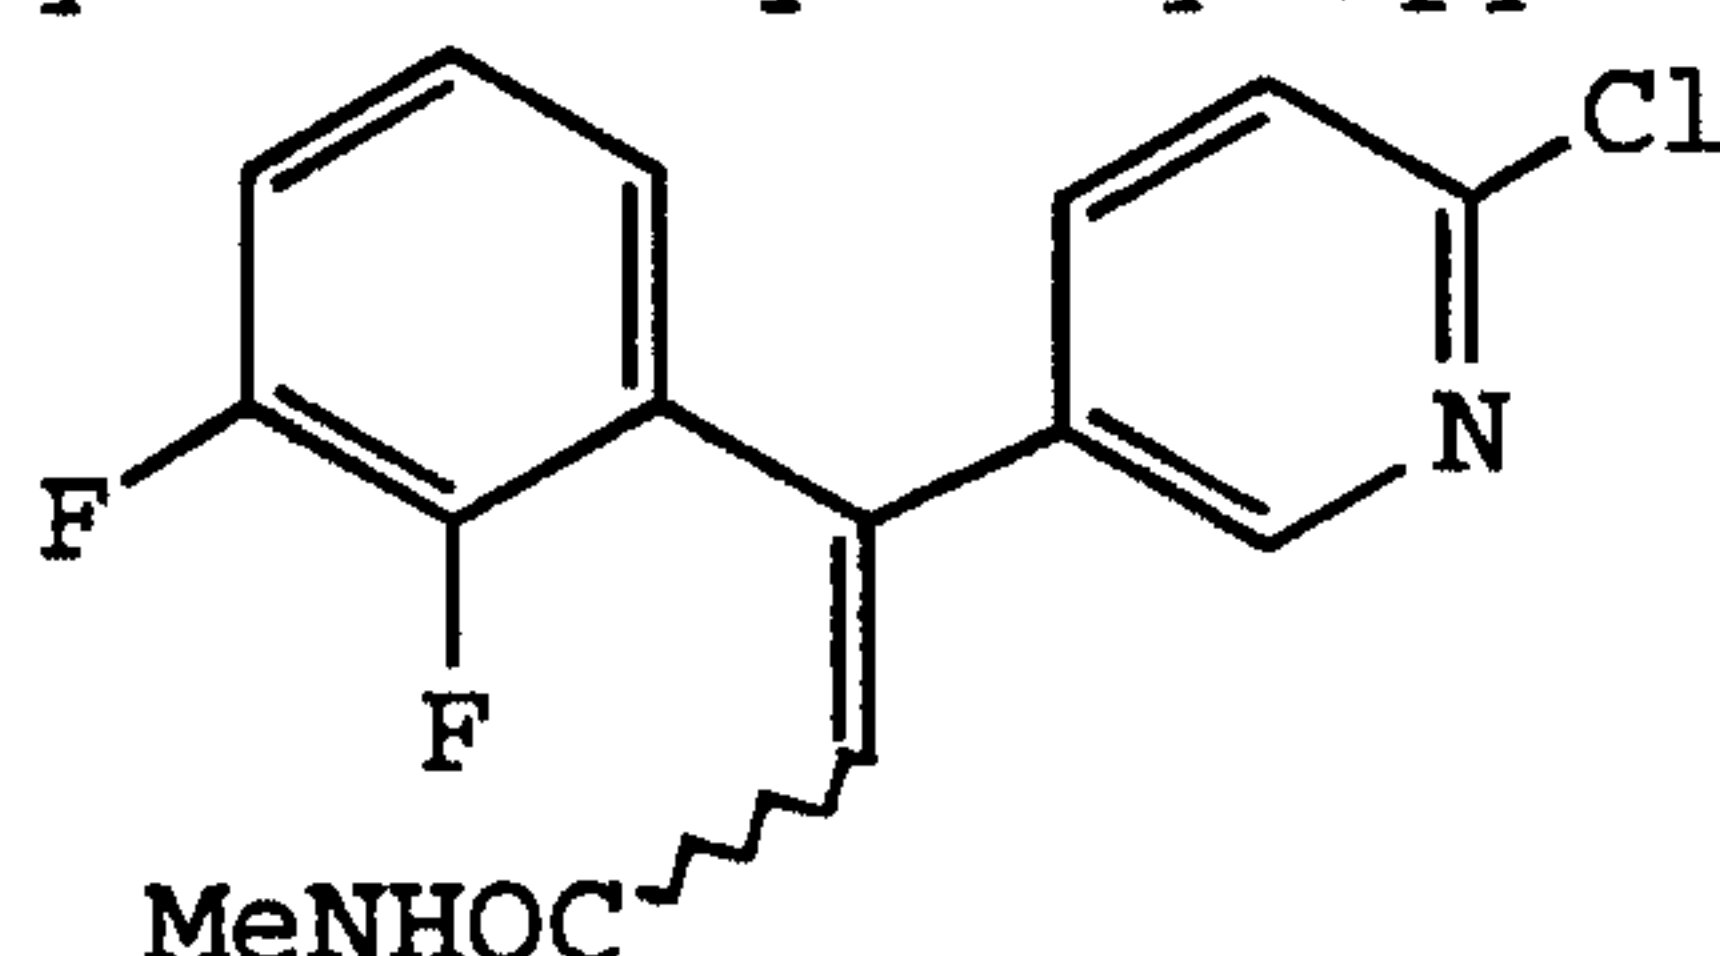

The 2-chloro-5-(2,3-difluorobenzoyl)pyridine was converted to product in a manner substantially analogous to preparation 203 to obtain a mixture of two isomers. After crystallization from EtOAc, the Z isomer was isolated in 35% yield, IR, NMR, while the E isomer was recovered from the filtrate in 17% yield, IR, NMR.

Preparation 151

1-(2-Oxo-2-phenylethyl)-2-chloro-5-[(E)-1-phenyl-2-methylcarbamoylvinyl]pyridinium iodide

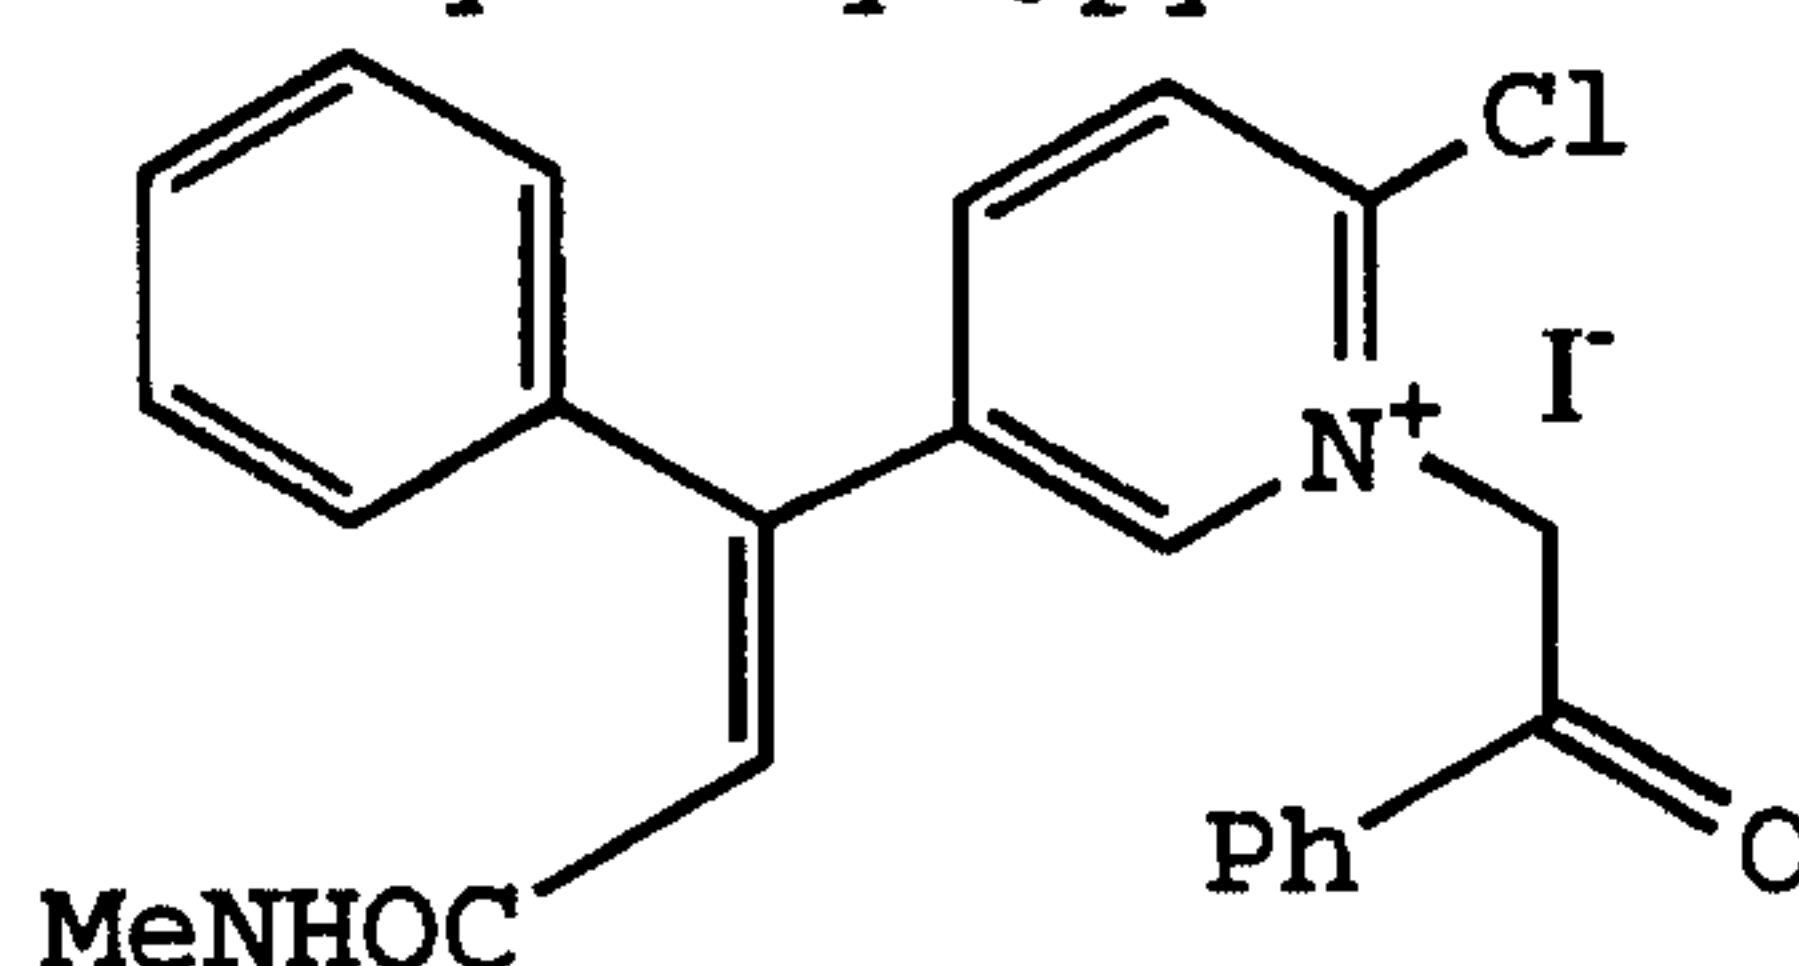


To a mixture of 2-chloro-5-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]pyridine (100 mg, 0.367 mmol) and bromoacetophenone (0.270 g, 1.35 mmol) in 5 ml of CH_3CN was added NaI (0.21 g, 1.4 mmol). The reaction mixture was refluxed for 40 hours. The CH_3CN was removed *in vacuo* and the resulting residue was dissolved in hot EtOH (40-45°C). After a rapid filtration, the filtrate was removed *in vacuo* and the resulting solid was washed with

100 mL of Et₂O then with cold EtOAc to yield product as a solid in 85% yield. IR, NMR.

Preparation 152


1- [2-Oxo-2- (4-fluorophenyl)ethyl] -2-chloro-5- [(E)-1-phenyl-2-methylcarbamoylvinyl]pyridinium iodide

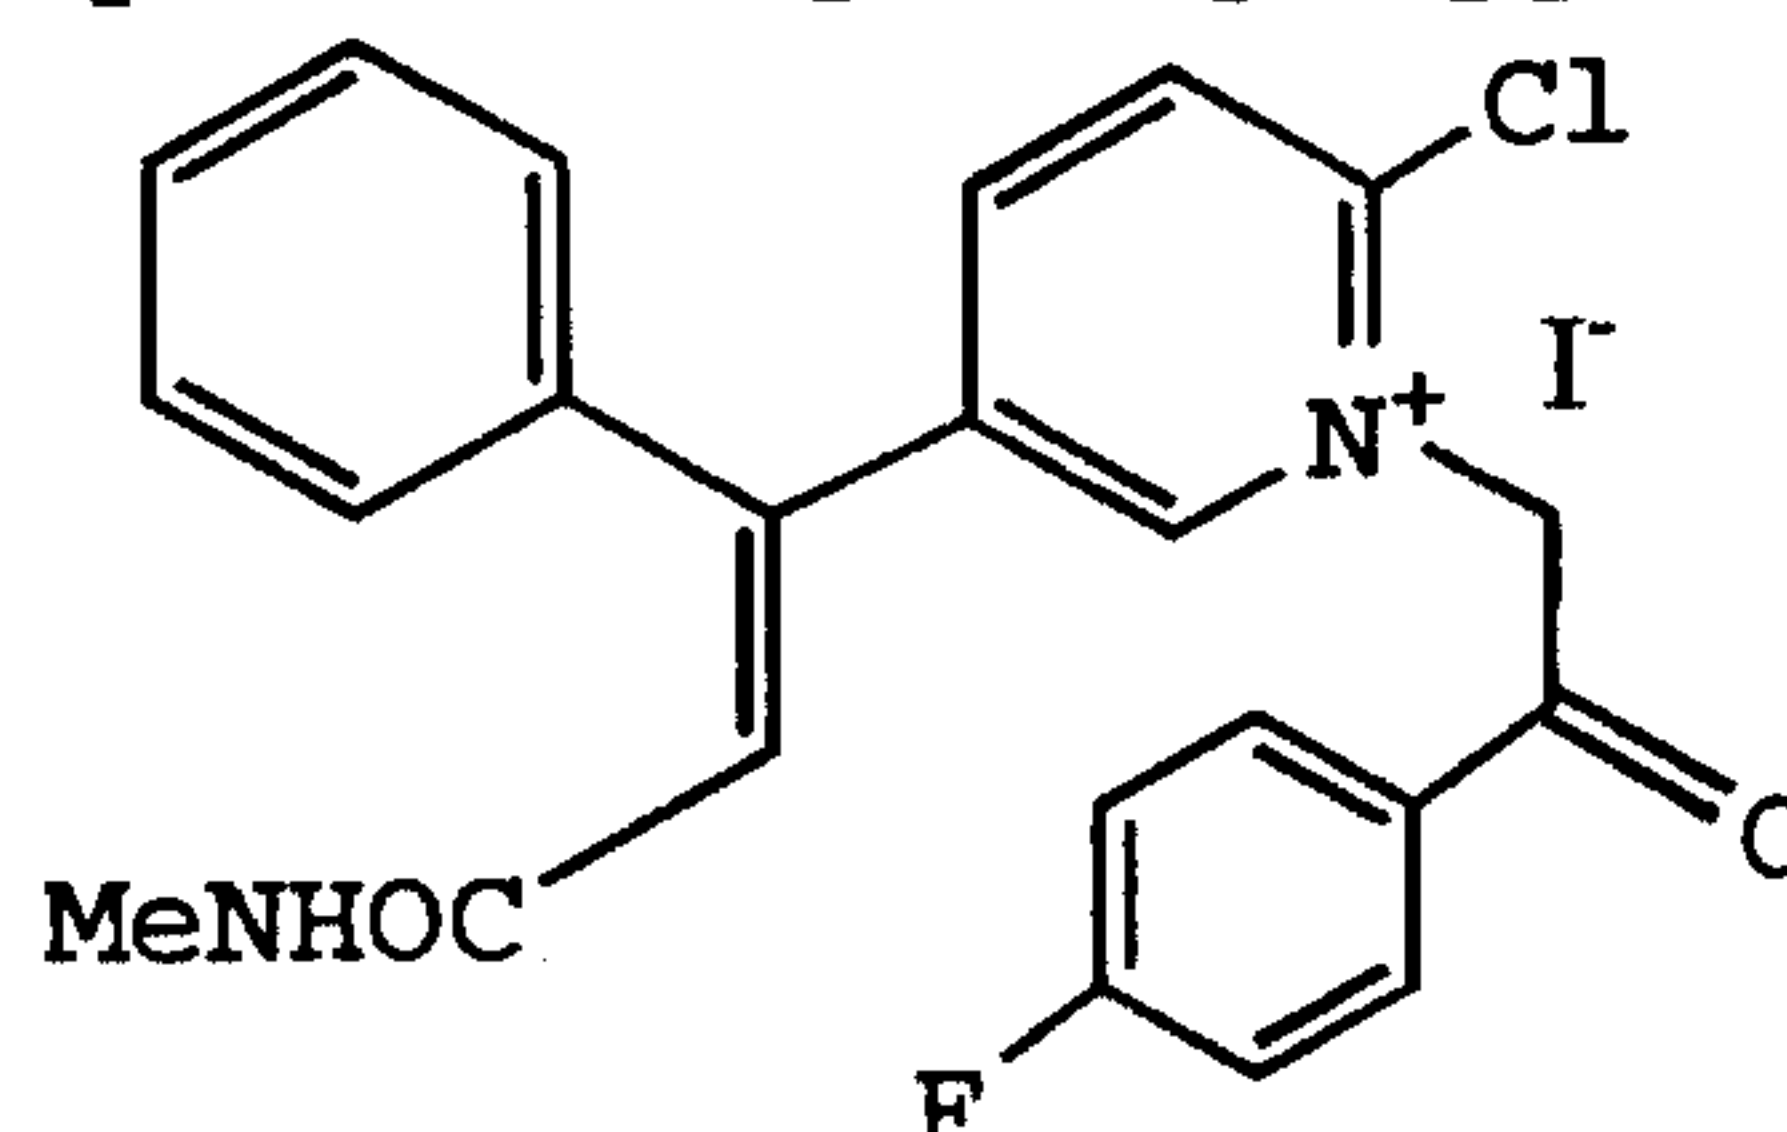

The 2-chloro-5- [(E)-1-phenyl-2-N-methylcarbamoylvinyl]pyridine (300 mg, 1.10 mmol) and 4-fluorobromoacetophenone were converted to product in a manner substantially analogous to Preparation 151 to yield 395 mg. (67%) IR, NMR.

Preparation 153

1- [2-Oxopropyl] -2-chloro-5- [(E)-1-phenyl-2-methylcarbamoylvinyl]pyridinium iodide

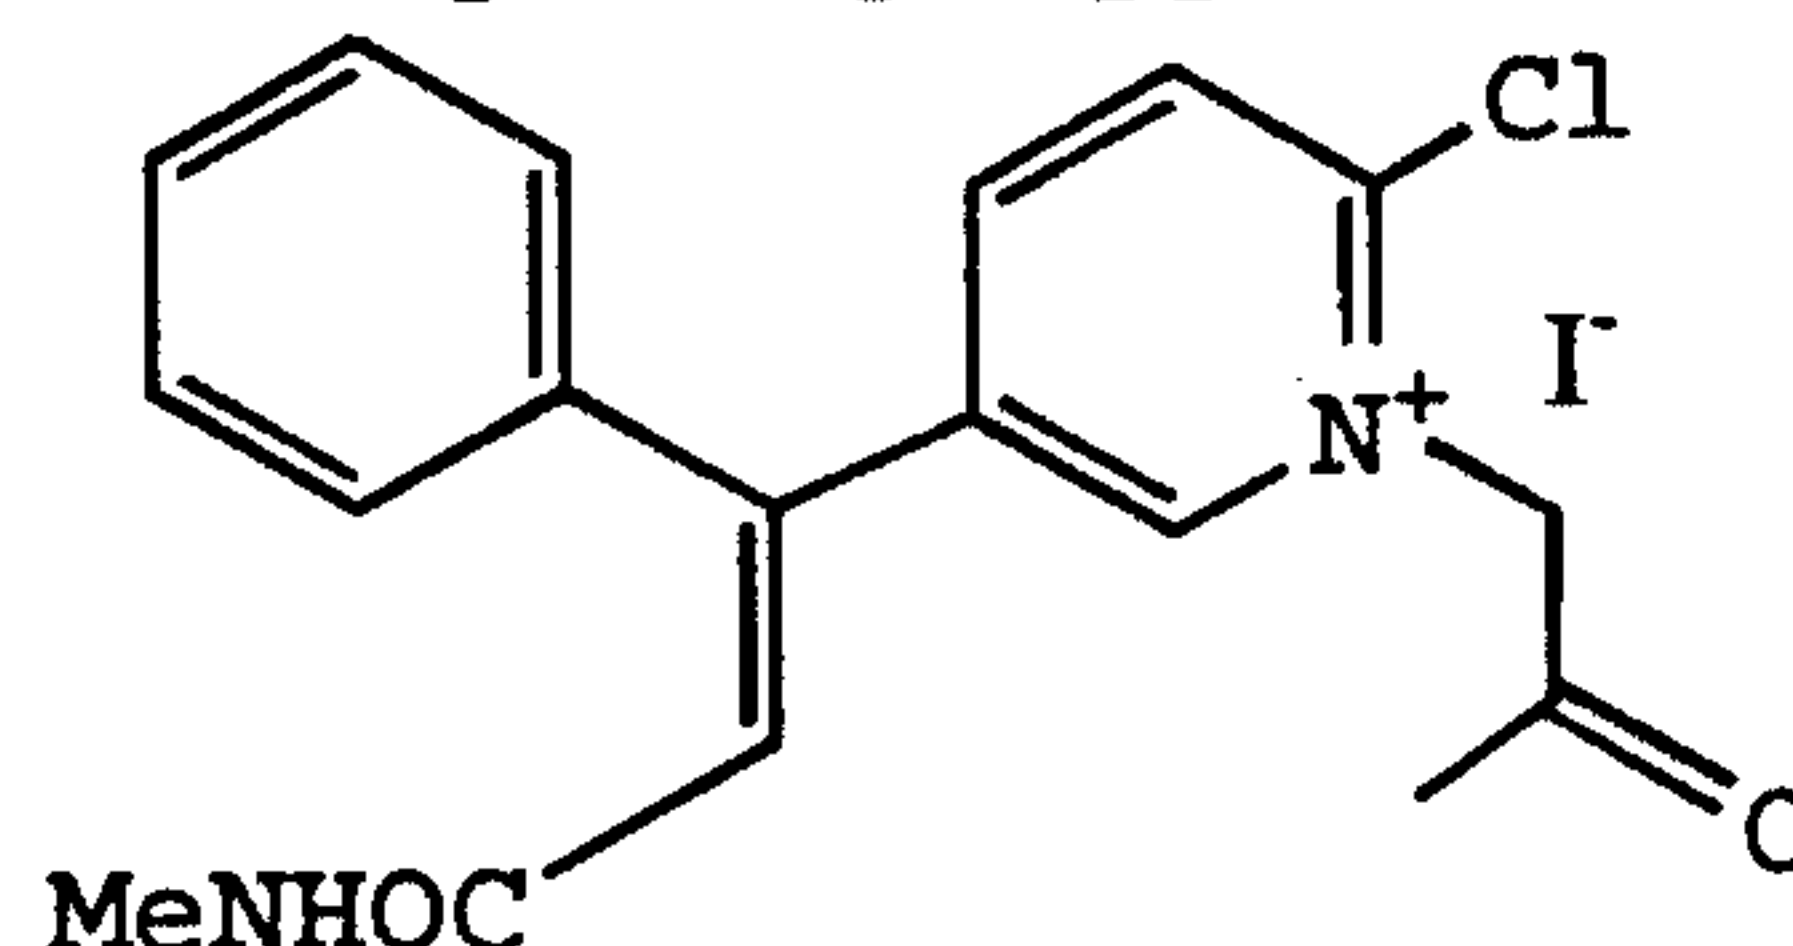

The 2-chloro-5- [(E)-1-phenyl-2-N-methylcarbamoylvinyl]pyridine (300 mg, 1.10 mmol) and chloropropanone were converted to product in a manner substantially analogous to Preparation 151 to yield 297 mg. (60%). NMR.

Preparation 154


1- [2-Oxo-3,3-dimethylbutyl] -2-chloro-5- [(E)-1-phenyl-2-methylcarbamoylvinyl]pyridinium iodide

The 2-chloro-5- [(E)-1-phenyl-2-N-methylcarbamoylvinyl]pyridine (300 mg, 1.10 mmol) and chloropinacolone were converted to product in a manner substantially analogous to Preparation 151 to give 141 mg. (26%). IR.

Preparation 155

- 64 -


1- (N,N-diethylacetamidyl) -2-chloro-5- [(E) -1-phenyl-2-methylcarbamoylvinyl]pyridinium iodide

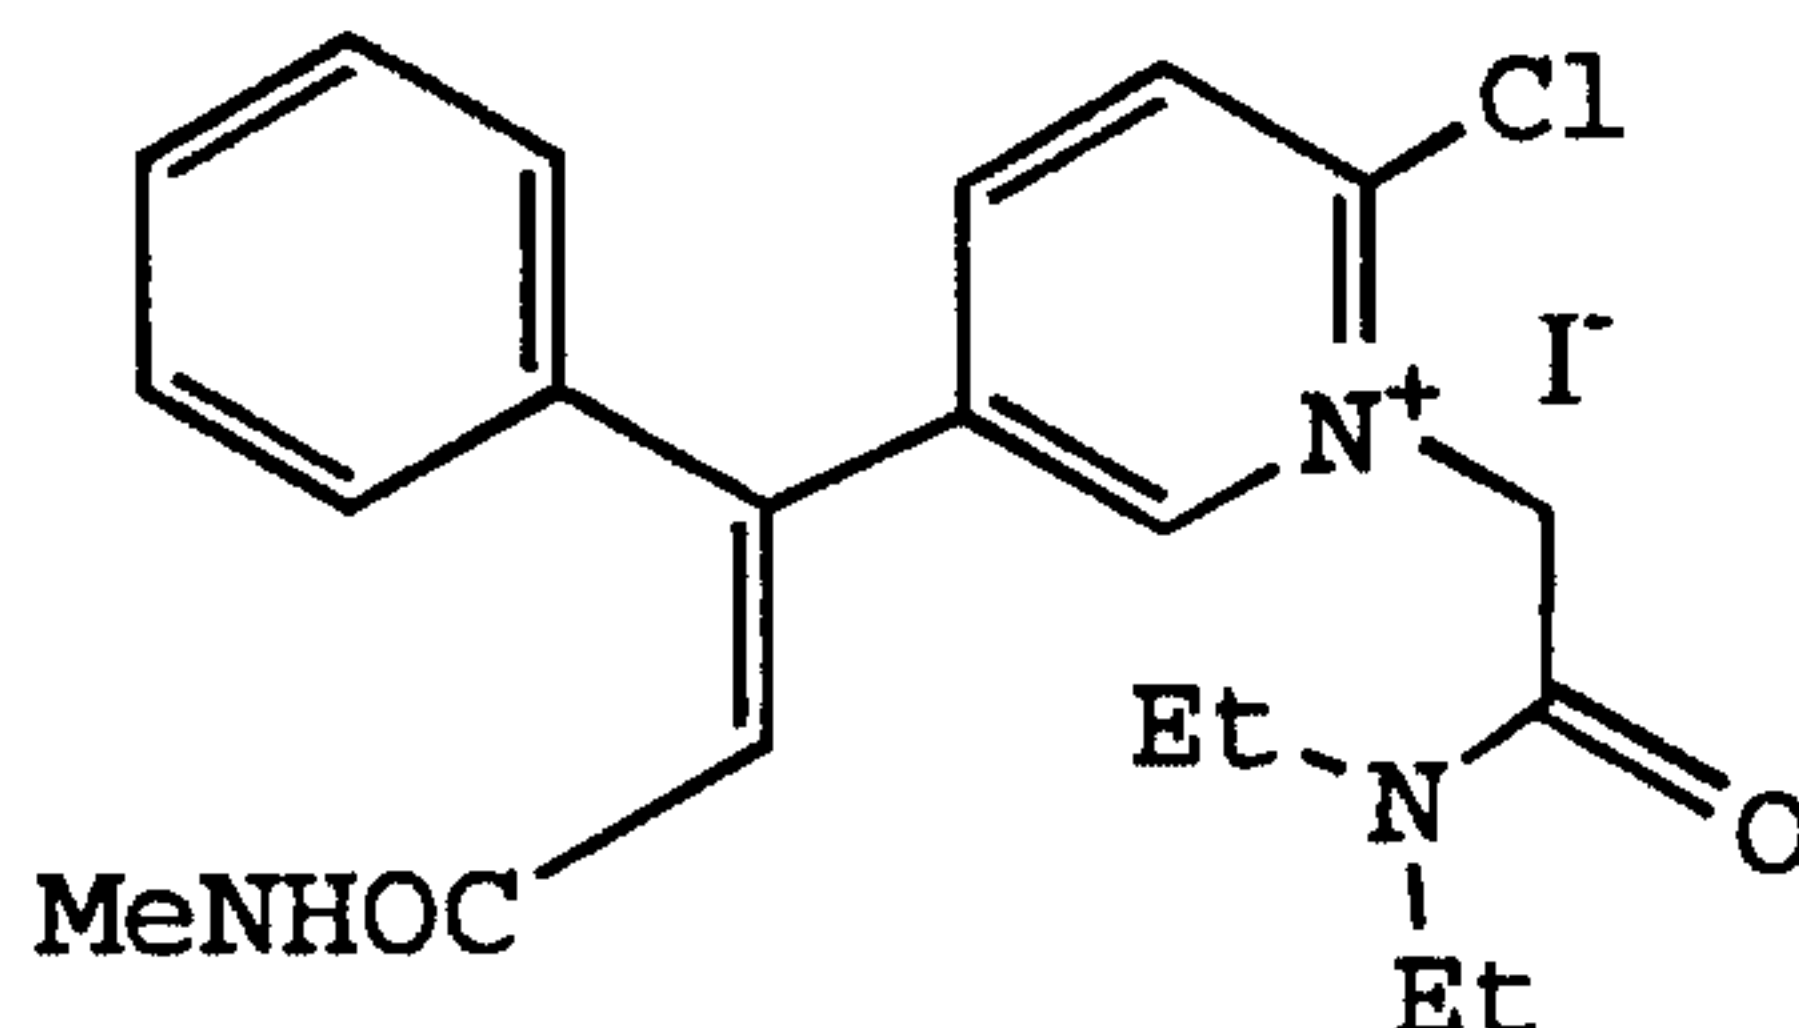

The 2-chloro-5- [(E) -1-phenyl-2-N-methylcarbamoylvinyl]pyridine (140 mg, 0.514 mmol) and 2-chloro-N,N-diethylacetamide were converted to product in a manner substantially analogous to Preparation 151 to give 75.9 mg. (29%). NMR.

Preparation 156

10 1- [2-Oxo-3,3-dimethylbutyl] -2-chloro-5- [(E) -1- (2,3-difluorophenyl) -2-methylcarbamoylvinyl]pyridinium iodide

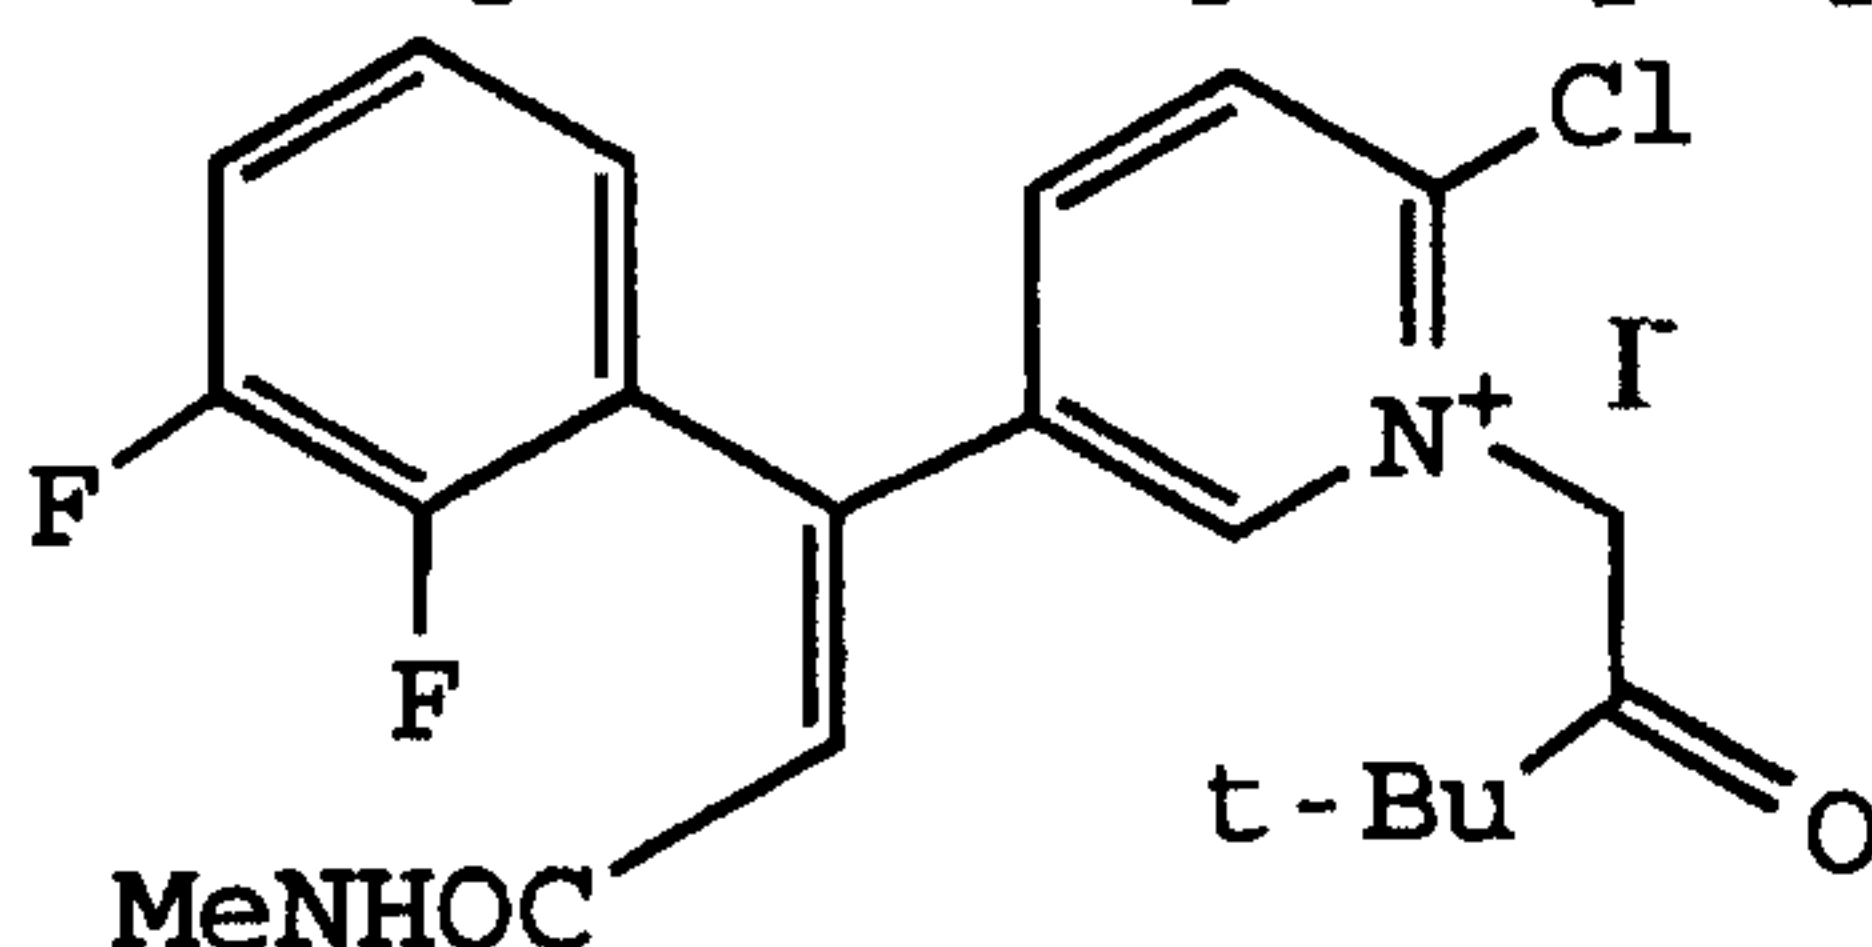


The 2-chloro-5- [(E) -1- (2,3-difluorophenyl) -2-N-methylcarbamoylvinyl]pyridine (250 mg, 0.810 mmol) and chloropinacolone were converted to product in a manner substantially analogous to Preparation 151 to give 199 mg. (46%). IR.

Examples

Example 1

20 2-Trifluoroacetamido-3- (2,5-difluorophenyl) -6-benzoyl-imidazo[1,2-a]pyridine

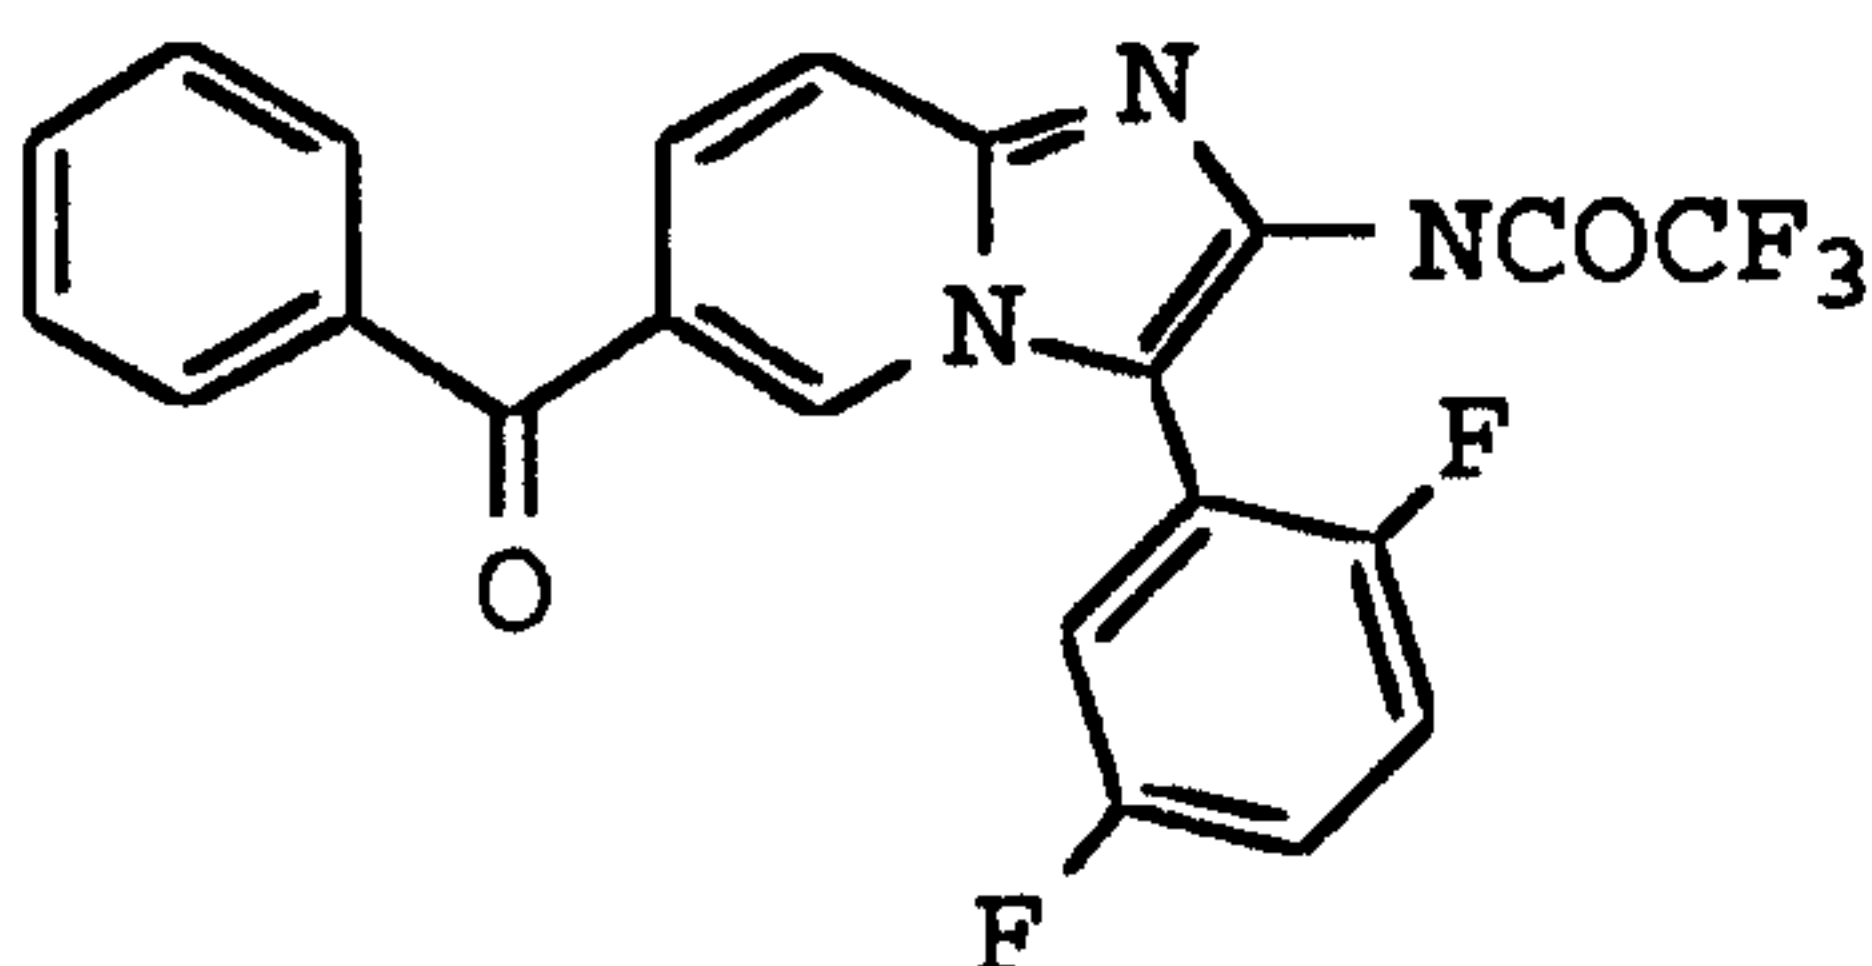

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N- (1-[2,5-difluorophenyl] -carbamoylmethyl) -pyridine (14.9 g, 28.6 mmol) was dissolved in 400 ml of CH₂Cl₂ and


- 65 -

trifluoroacetic anhydride (50 ml, 354 mmol) was added. The solution was heated to reflux (a dry ice condensor was used to keep volatiles refluxing) and allowed to stir for 3 hours. The solvents were removed *in vacuo* and the residue taken up in 700 ml of EtOAc. The solution was washed with saturated NaHCO₃ (3 x 100 ml), brine (3 x 100 ml), dried over Na₂SO₄, filtered, and concentrated *in vacuo*. The crude product was recrystallized from EtOAc/hexanes to yield 12.1 g. (94.6%). EA, MS(FD).

10

Example 2

2-Trifluoroacetamido-3-(4-methoxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine

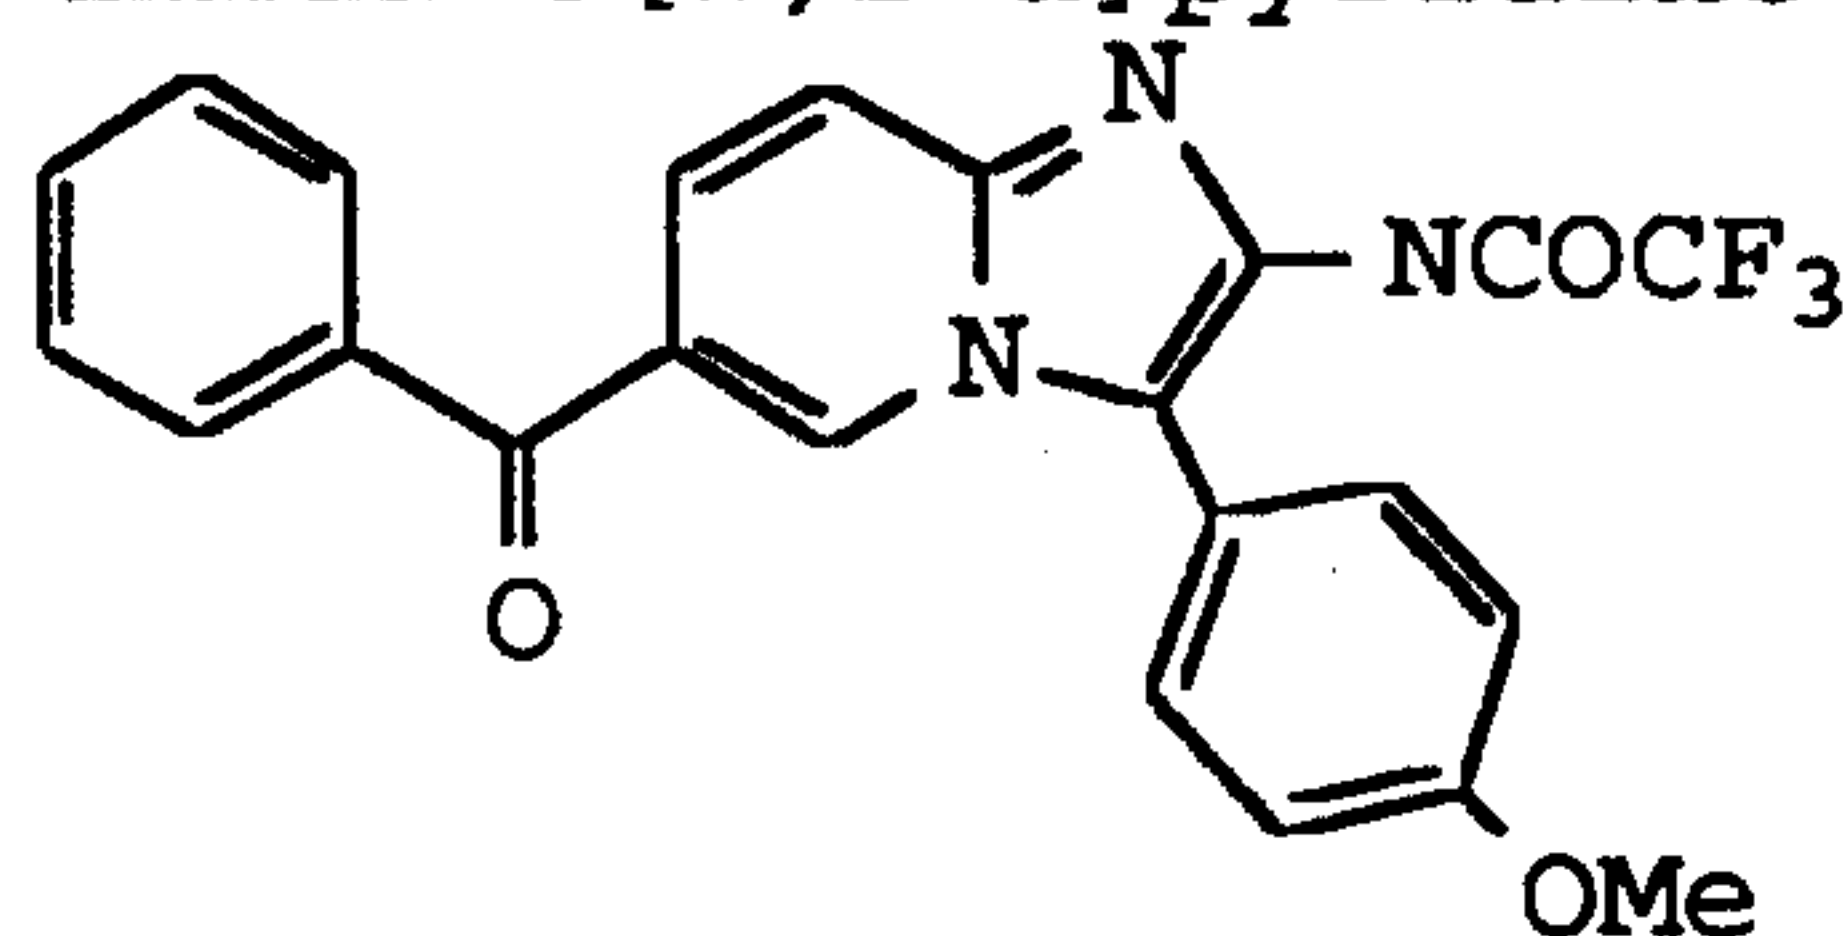


The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[4-methoxyphenyl]-carbamoylmethyl)-pyridine (13.2 g, 23.3 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 10.6 g. (92%). EA, MS(FD).

20

Example 3

2-Trifluoroacetamido-3-(naph-2-yl)-6-benzoyl-imidazo[1,2-a]pyridine

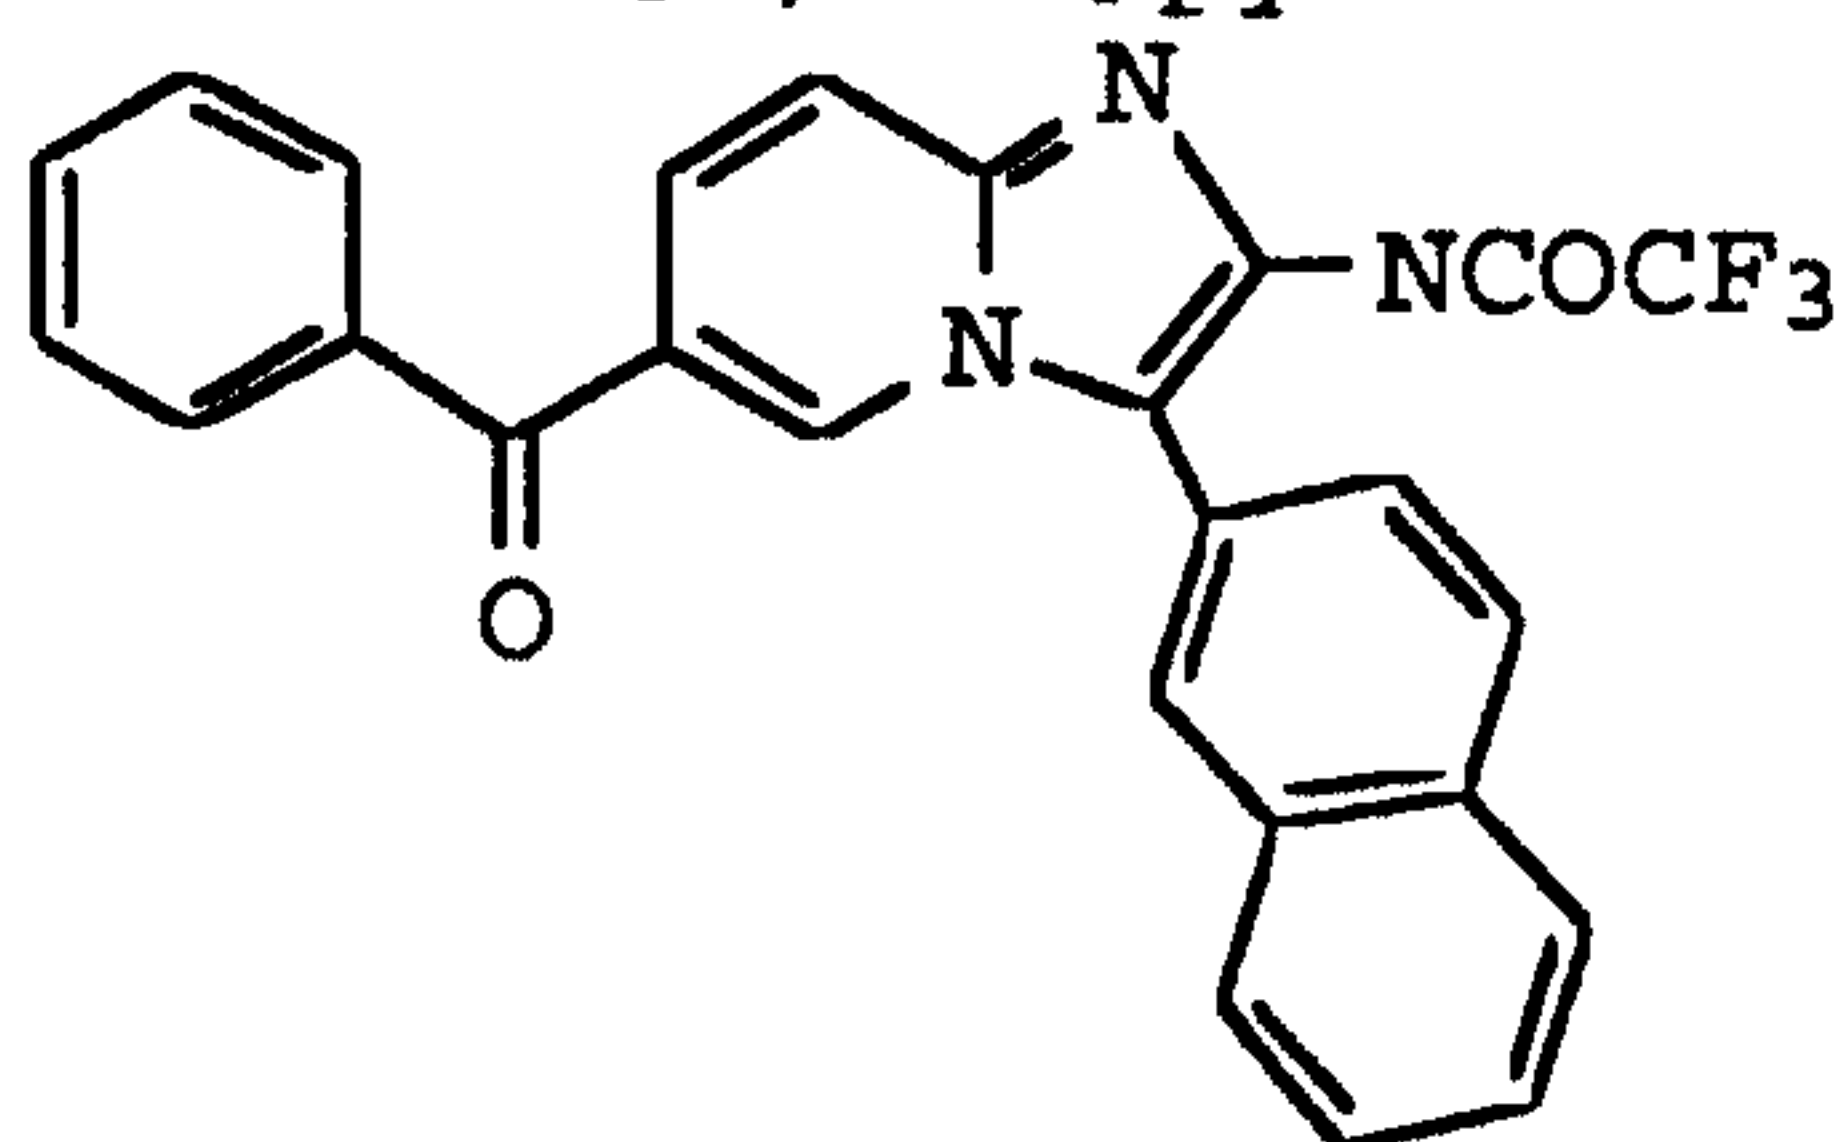


The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[naph-2-yl]-carbamoylmethyl)-pyridine (14.7 g, 27.4 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 10.4 g. (82.4%). EA, MS(FD).

Example 4

- 66 -


2-Trifluoroacetamido-3-naphthyl-6-benzoyl-imidazo[1,2-a]pyridine

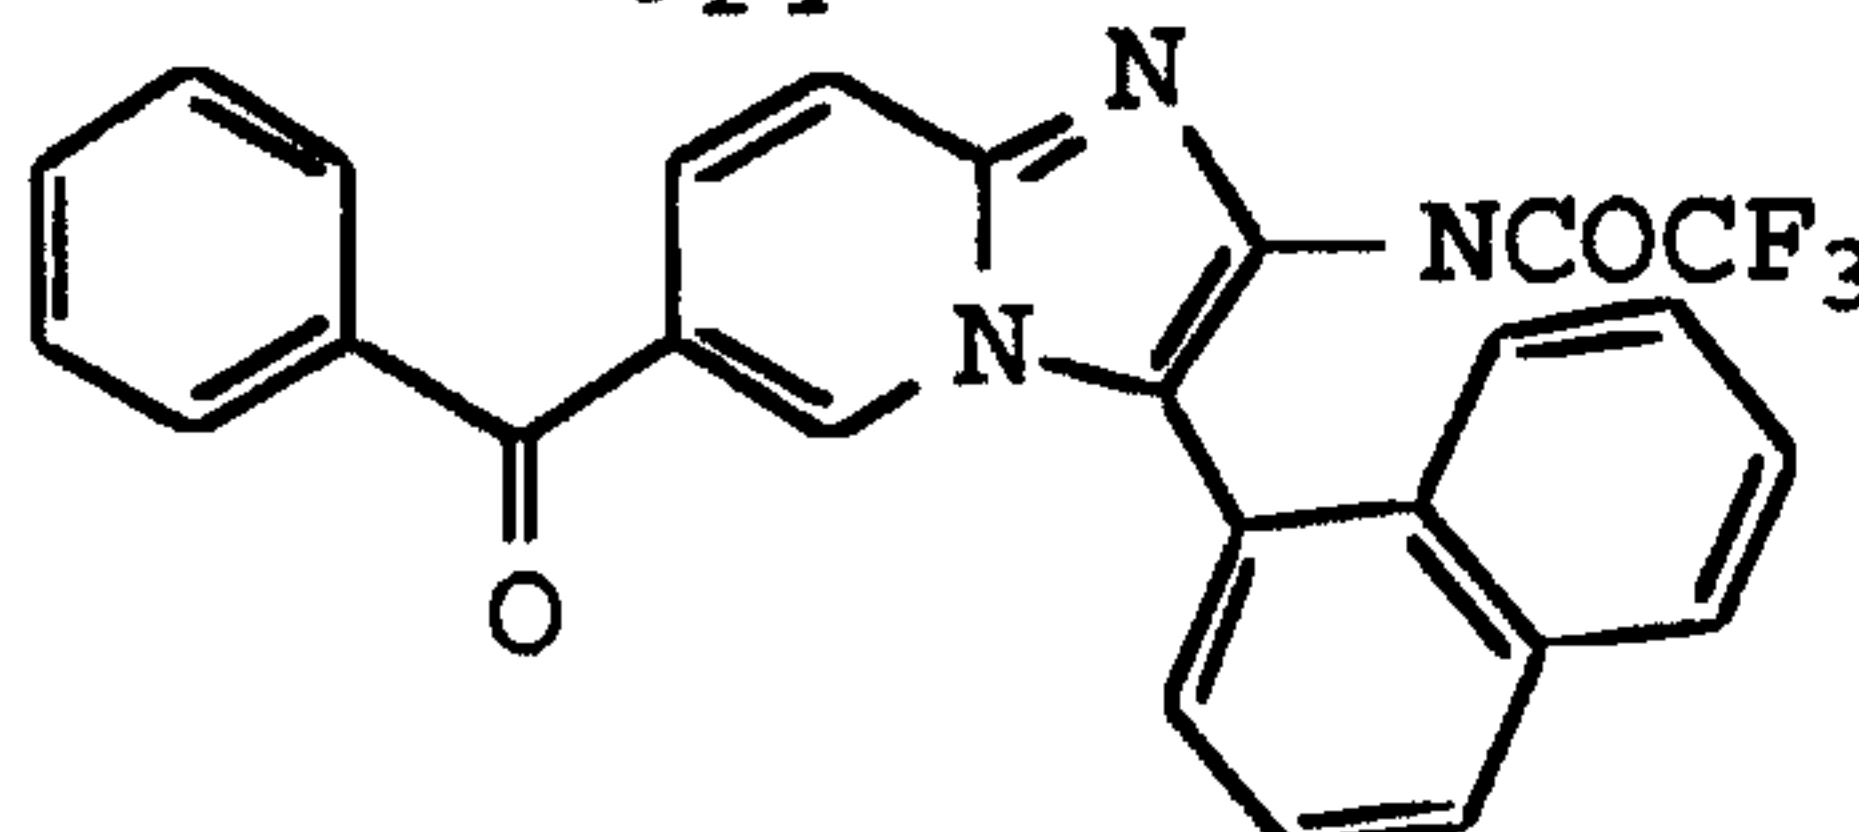

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-naphthyl-carbamoylmethyl)-pyridine (11.3 g, 22.0 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 8.25 g. (82%). EA, MS(FD).

Example 5


2-Trifluoroacetamido-3-(2-fluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

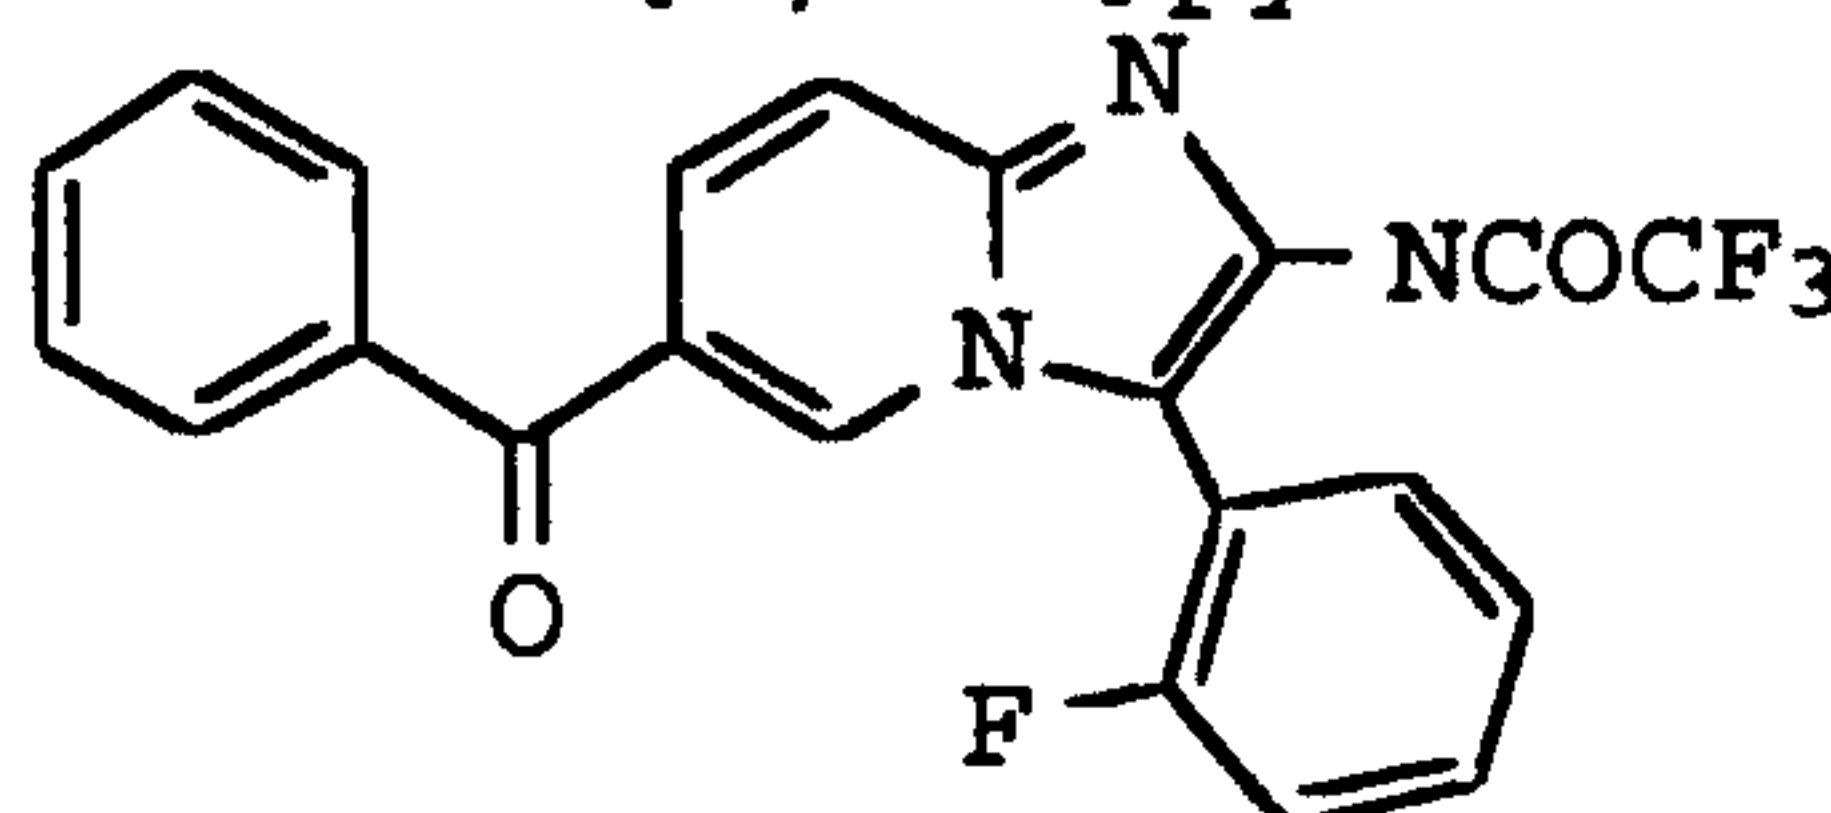

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2-fluorophenyl]-carbamoylmethyl)-pyridine (12.3 g, 24.5 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 10.2 g. (97%). EA, MS(FD).

Example 6

2-Trifluoroacetamido-3-(3-fluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

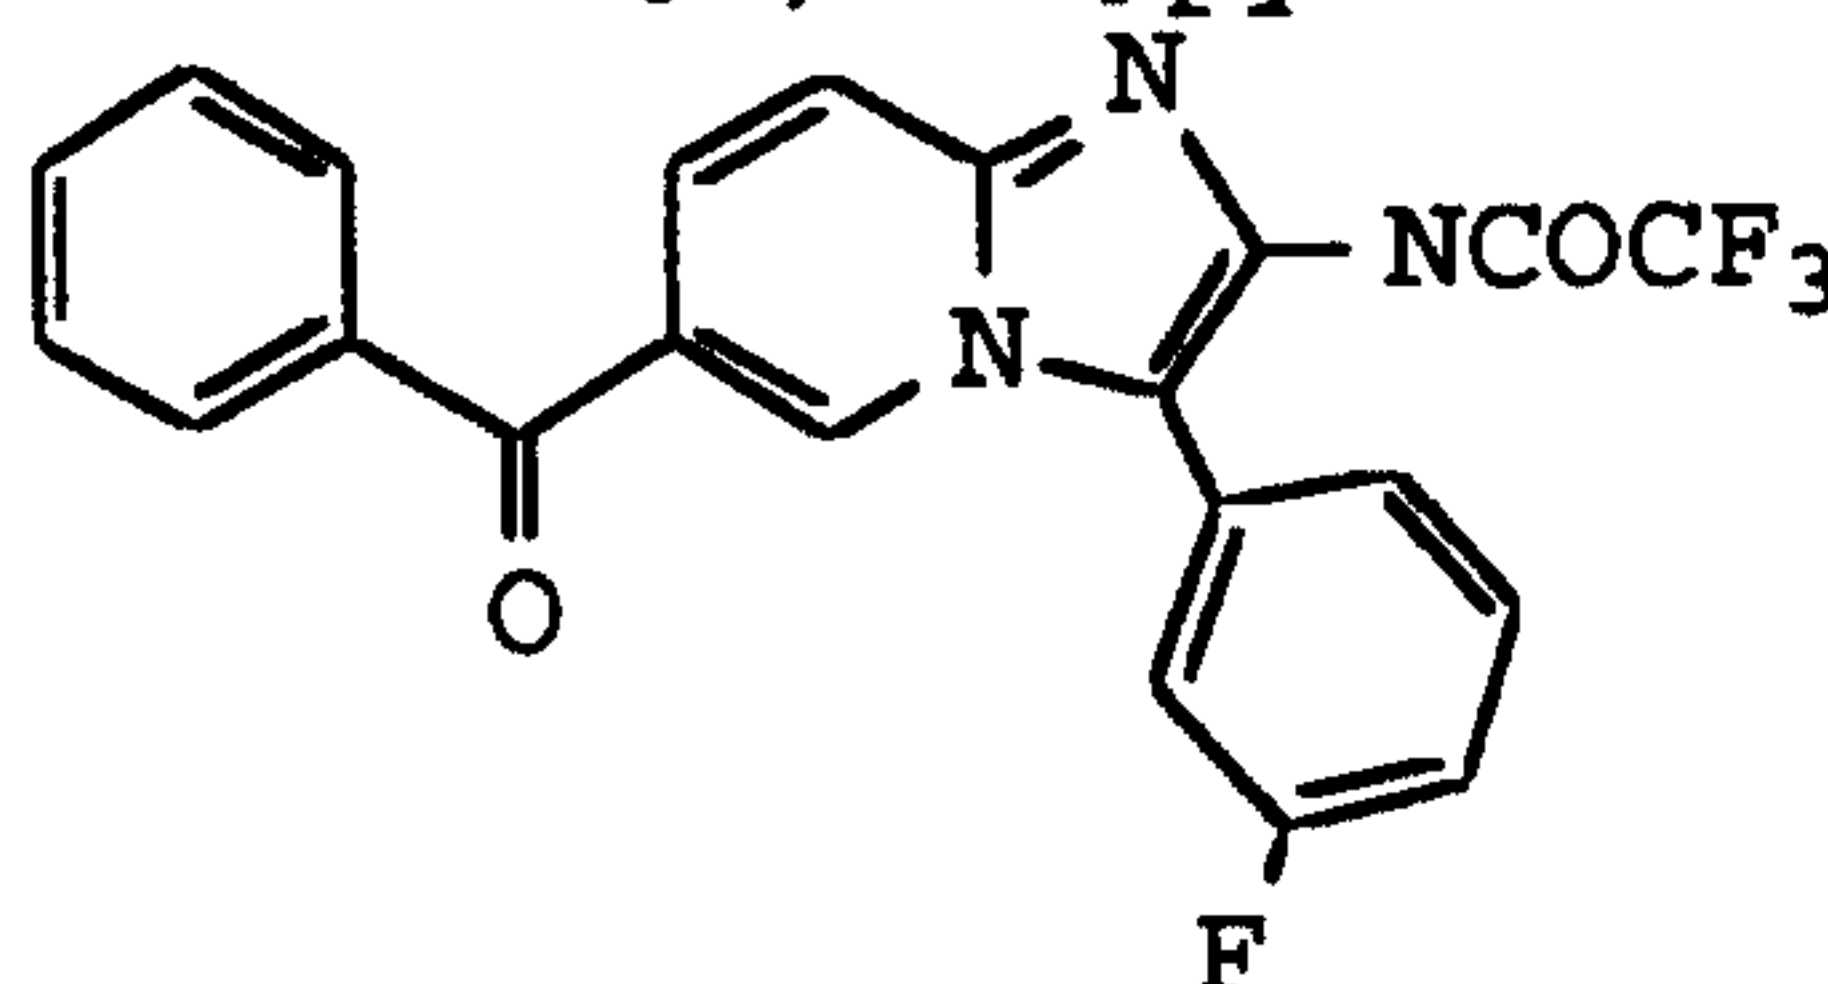


The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[3-fluorophenyl]-carbamoylmethyl)-pyridine (26.6 g, 52.8 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 21.6 g. (95.8%). EA, MS(FD).

Example 7

- 67 -


2-Trifluoroacetamido-3-(2,4-difluorophenyl)-6-benzoyl-
imidazo[1,2-a]pyridine

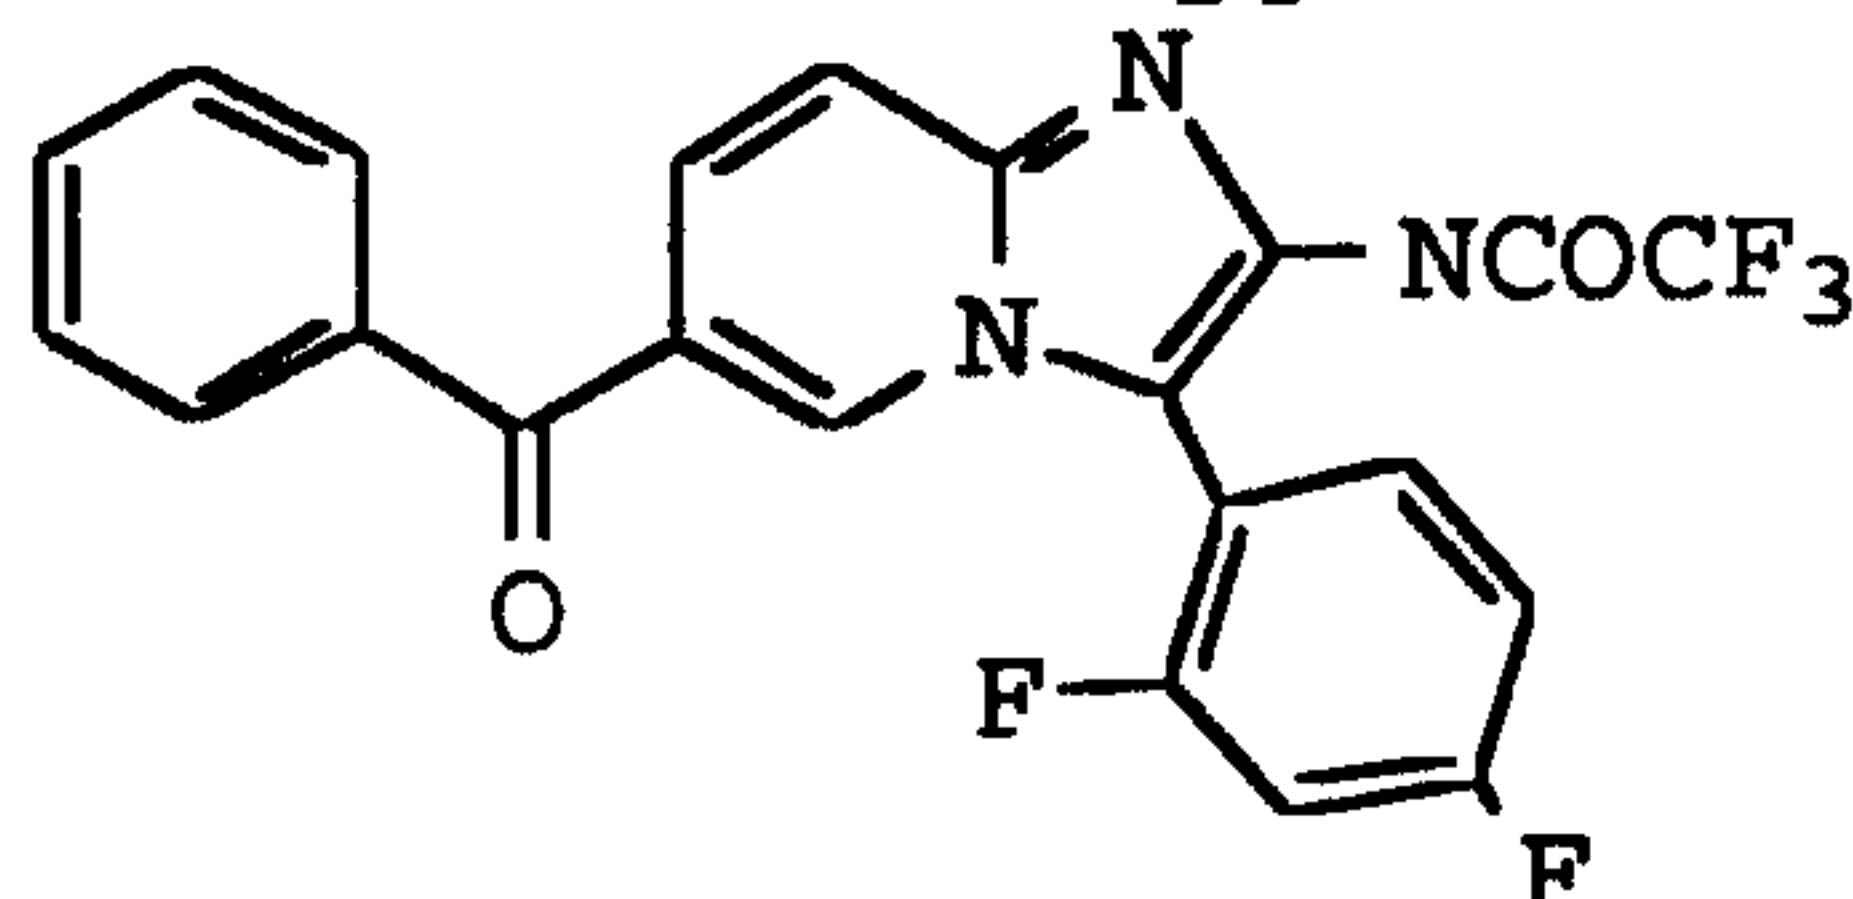

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-
5 [2,4-difluorophenyl]-carbamoylmethyl)-pyridine (11.0 g,
21.1 mmol) was converted to product in a manner
substantially analogous to Example 1 to yield 9.24 g.
(98.5%). EA, MS(FD).

Example 8


10 2-Trifluoroacetamido-3-(3,5-difluorophenyl)-6-benzoyl-
imidazo[1,2-a]pyridine

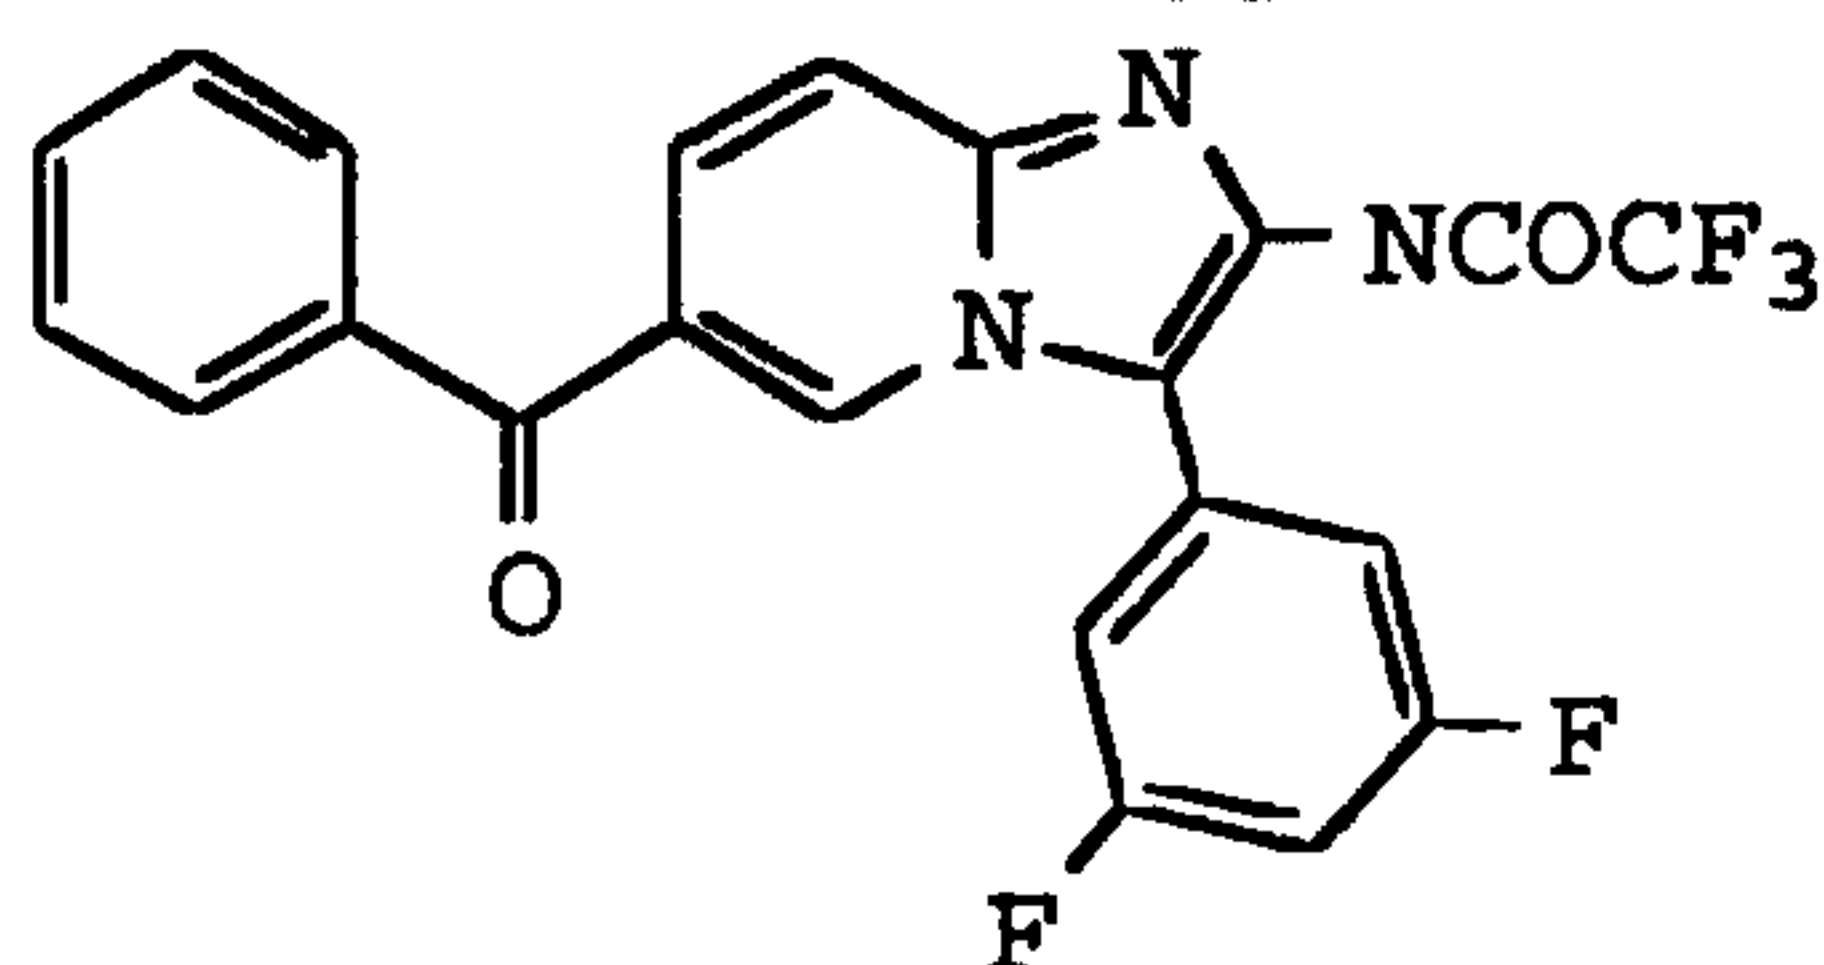

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-
[3,5-difluorophenyl]-carbamoylmethyl)-pyridine (13.3 g,
15 25.6 mmol) was converted to product in a manner
substantially analogous to Example 1 to yield 10.2 g.
(90.1%). EA, MS(FD).

Example 9

20 2-Trifluoroacetamido-3-(4-fluorophenyl)-6-benzoyl-
imidazo[1,2-a]pyridine

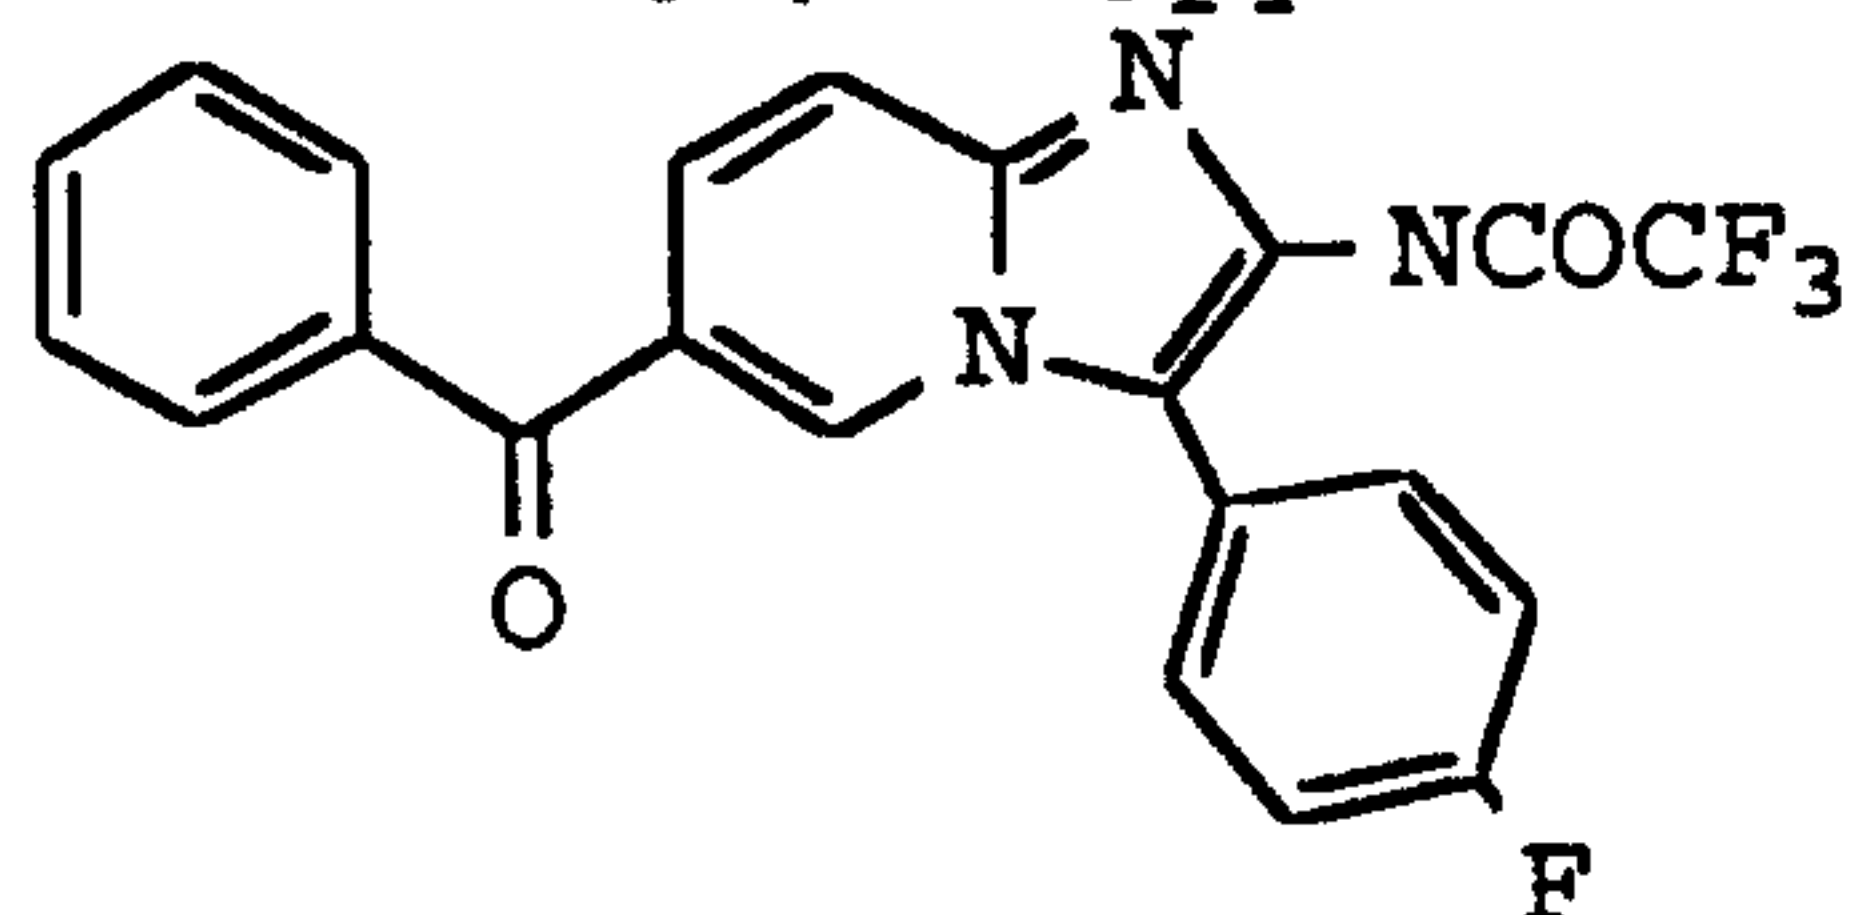


The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[4-
fluorophenyl]-carbamoylmethyl)-pyridine (35.0 g, 69.6
mmol) was converted to product in a manner substantially
25 analogous to Example 1 to yield 18.6 g. (62.7%). EA,
MS(FD).

- 68 -

Example 10

2-Trifluoroacetamido-3-(3-trifluoromethylphenyl)-6-benzoyl-imidazo[1,2-a]pyridine

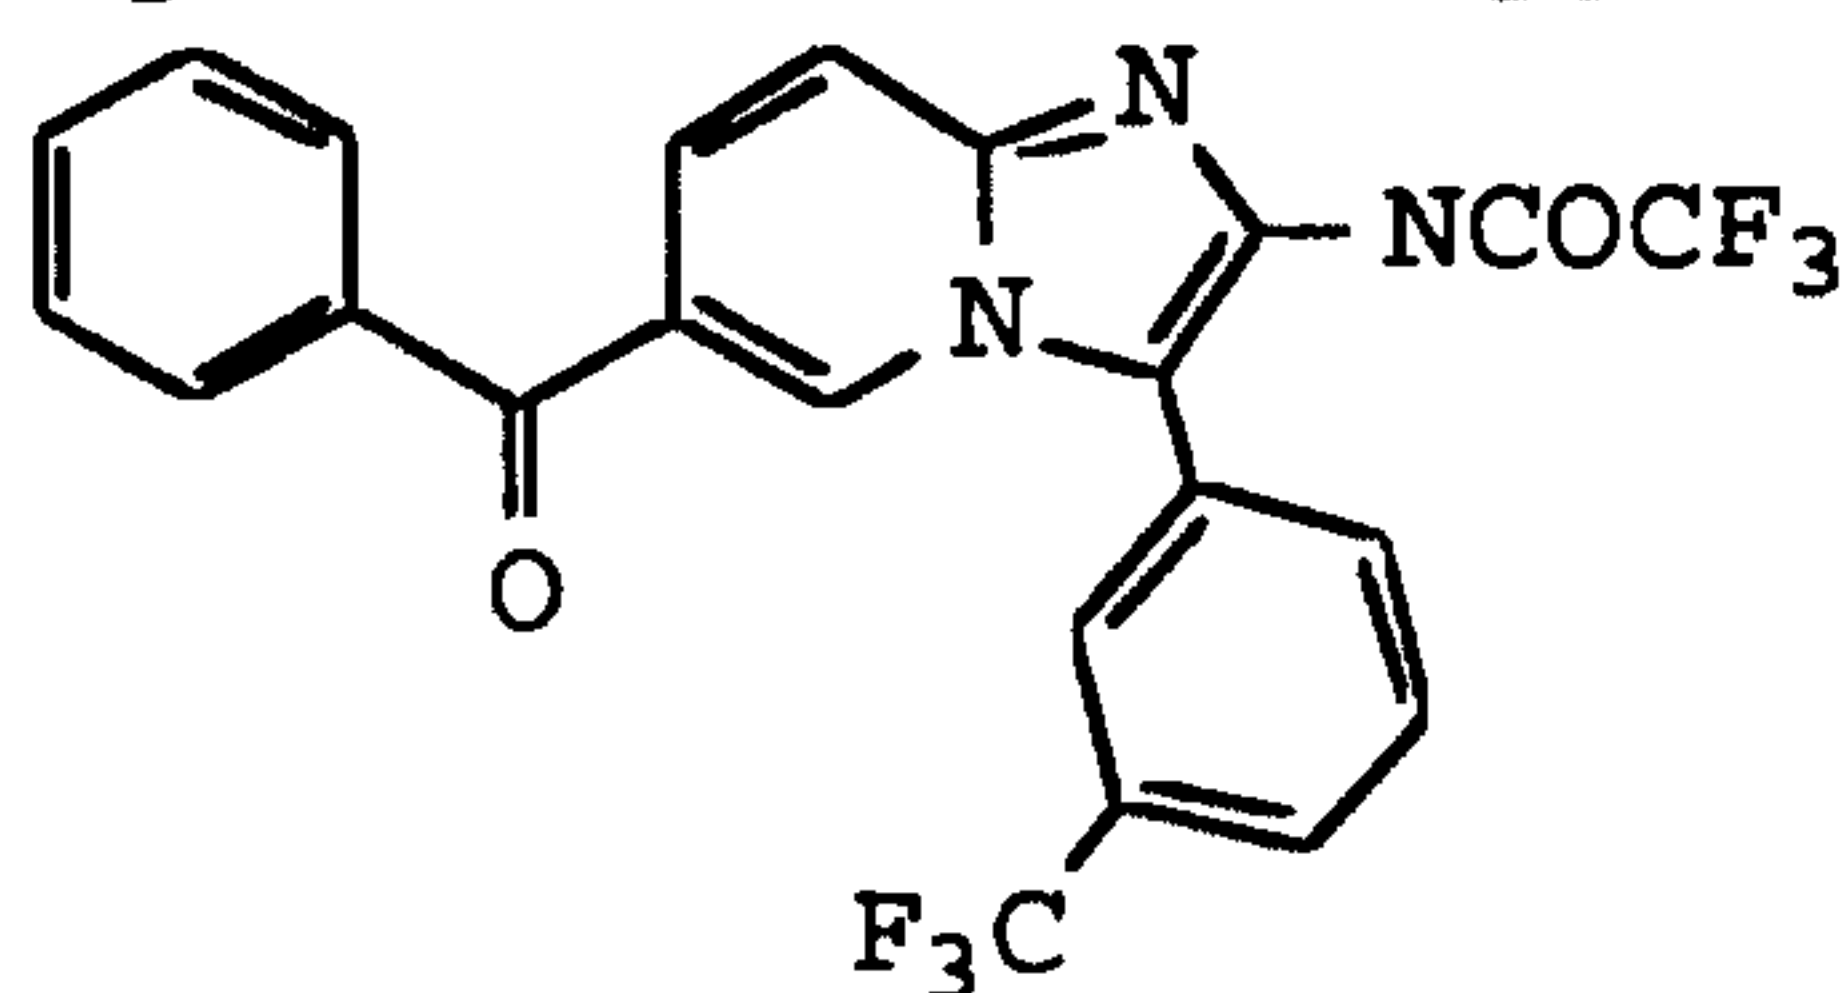


- 5 The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[3-trifluoromethylphenyl]-carbamoylmethyl)-pyridine (13.3 g, 24.1 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 9.08 g. (80%). EA, MS(FD).

10

Example 11


2-Trifluoroacetamido-3-(4-bromophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

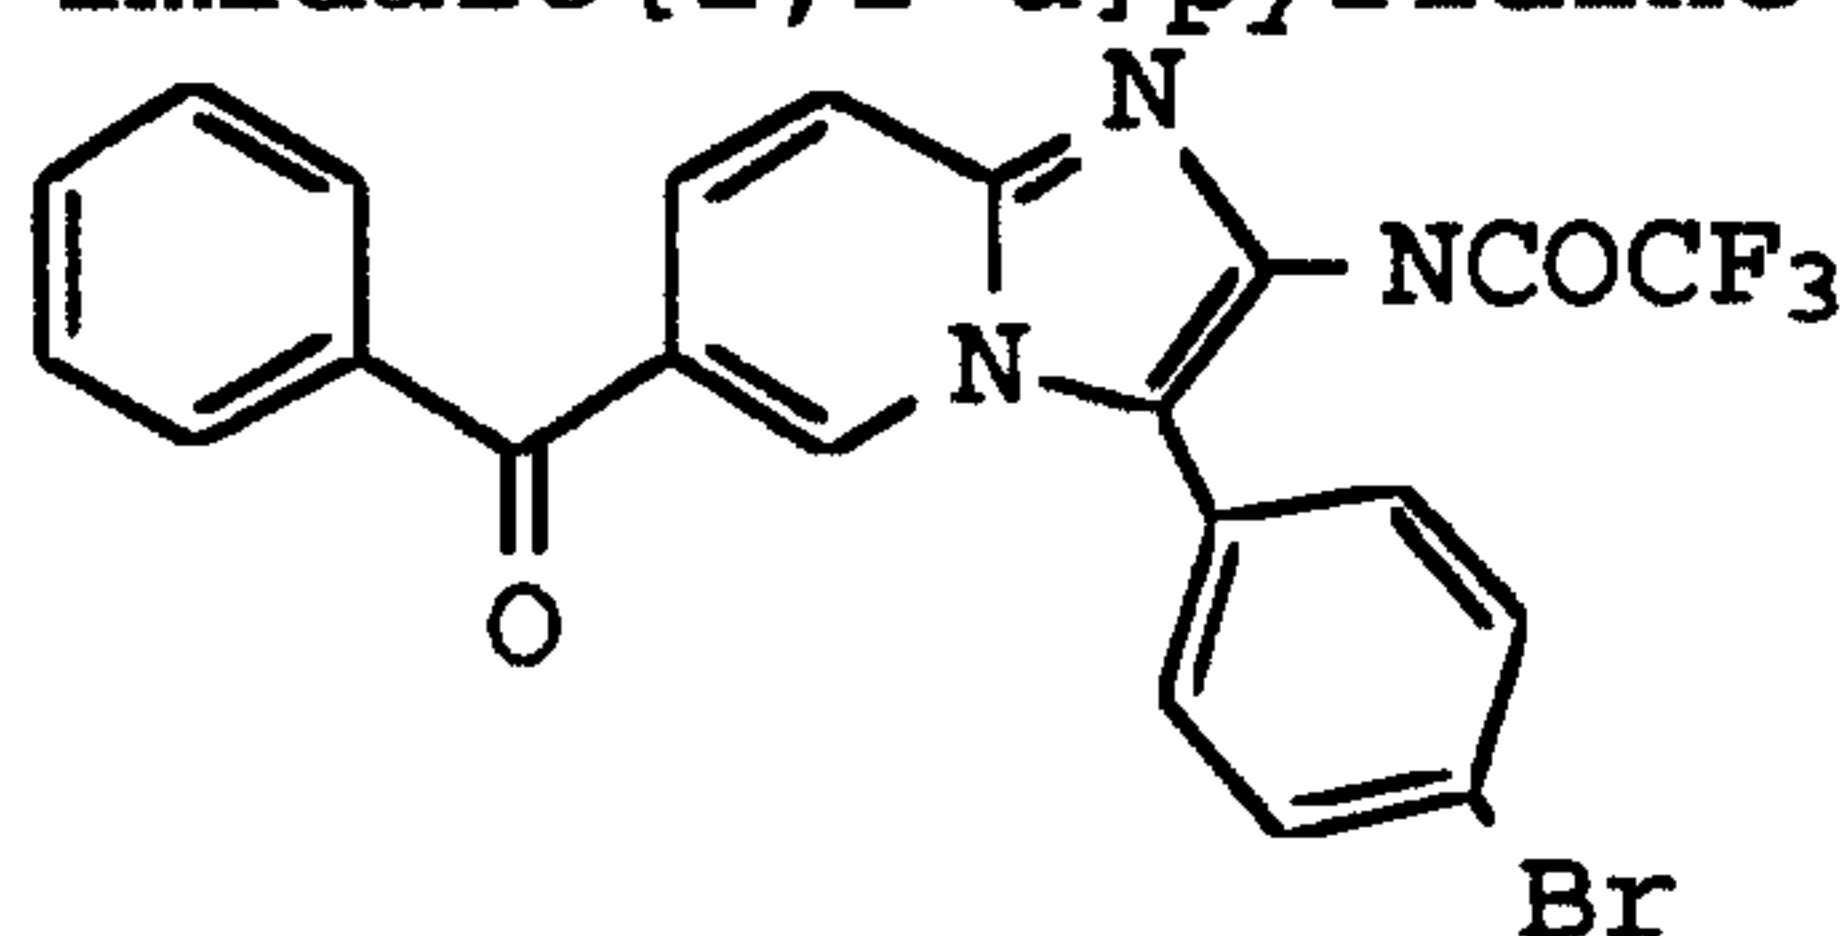

- 15 The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[4-bromophenyl]-carbamoylmethyl)-pyridine (12.7 g, 22.5 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 10.5 g. (95.4%). EA, MS(FD).

Example 12

20 2-Trifluoroacetamido-3-(2,3,4-trifluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

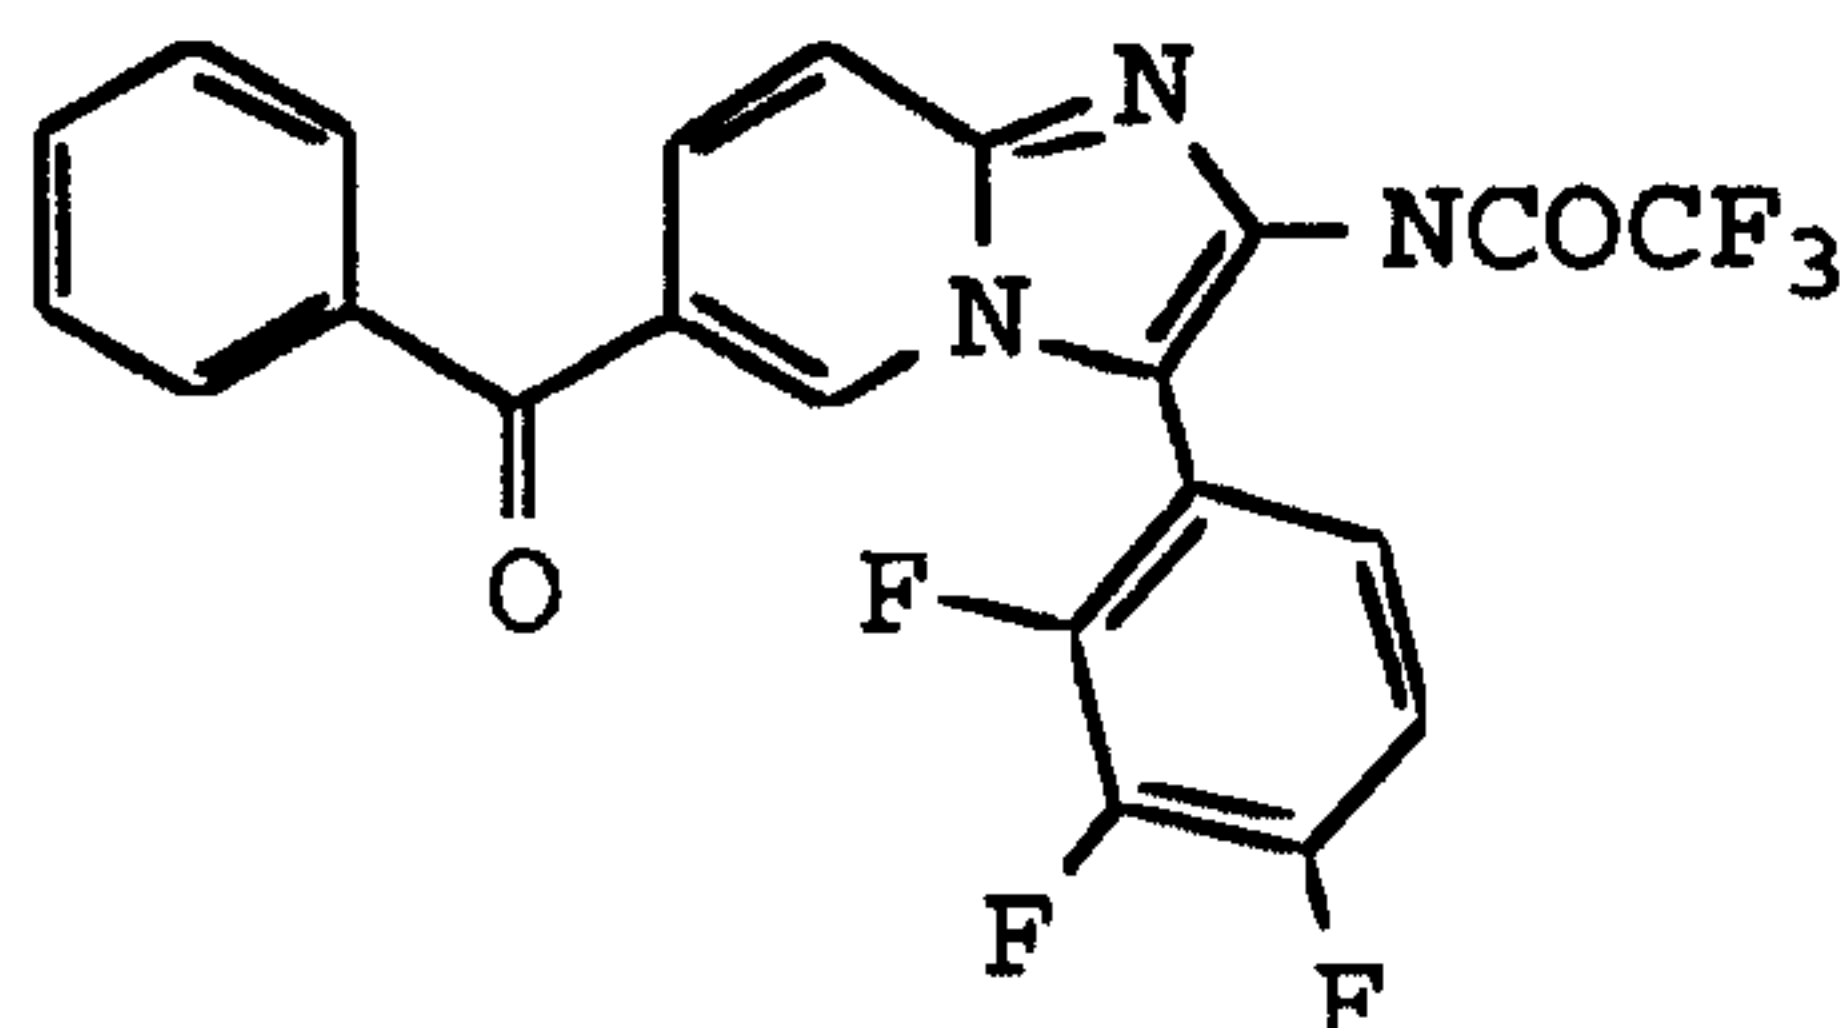


- 25 The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2,3,4-trifluorophenyl]-carbamoylmethyl)-pyridine (11.3 g, 20.9 mmol) was converted to product in a manner

substantially analogous to Example 1 to yield 8.43 g.
(87%). EA, MS(FD).

Example 13


2-Trifluoroacetamido-3-(3,4-difluorophenyl)-6-benzoyl-
imidazo[1,2-a]pyridine

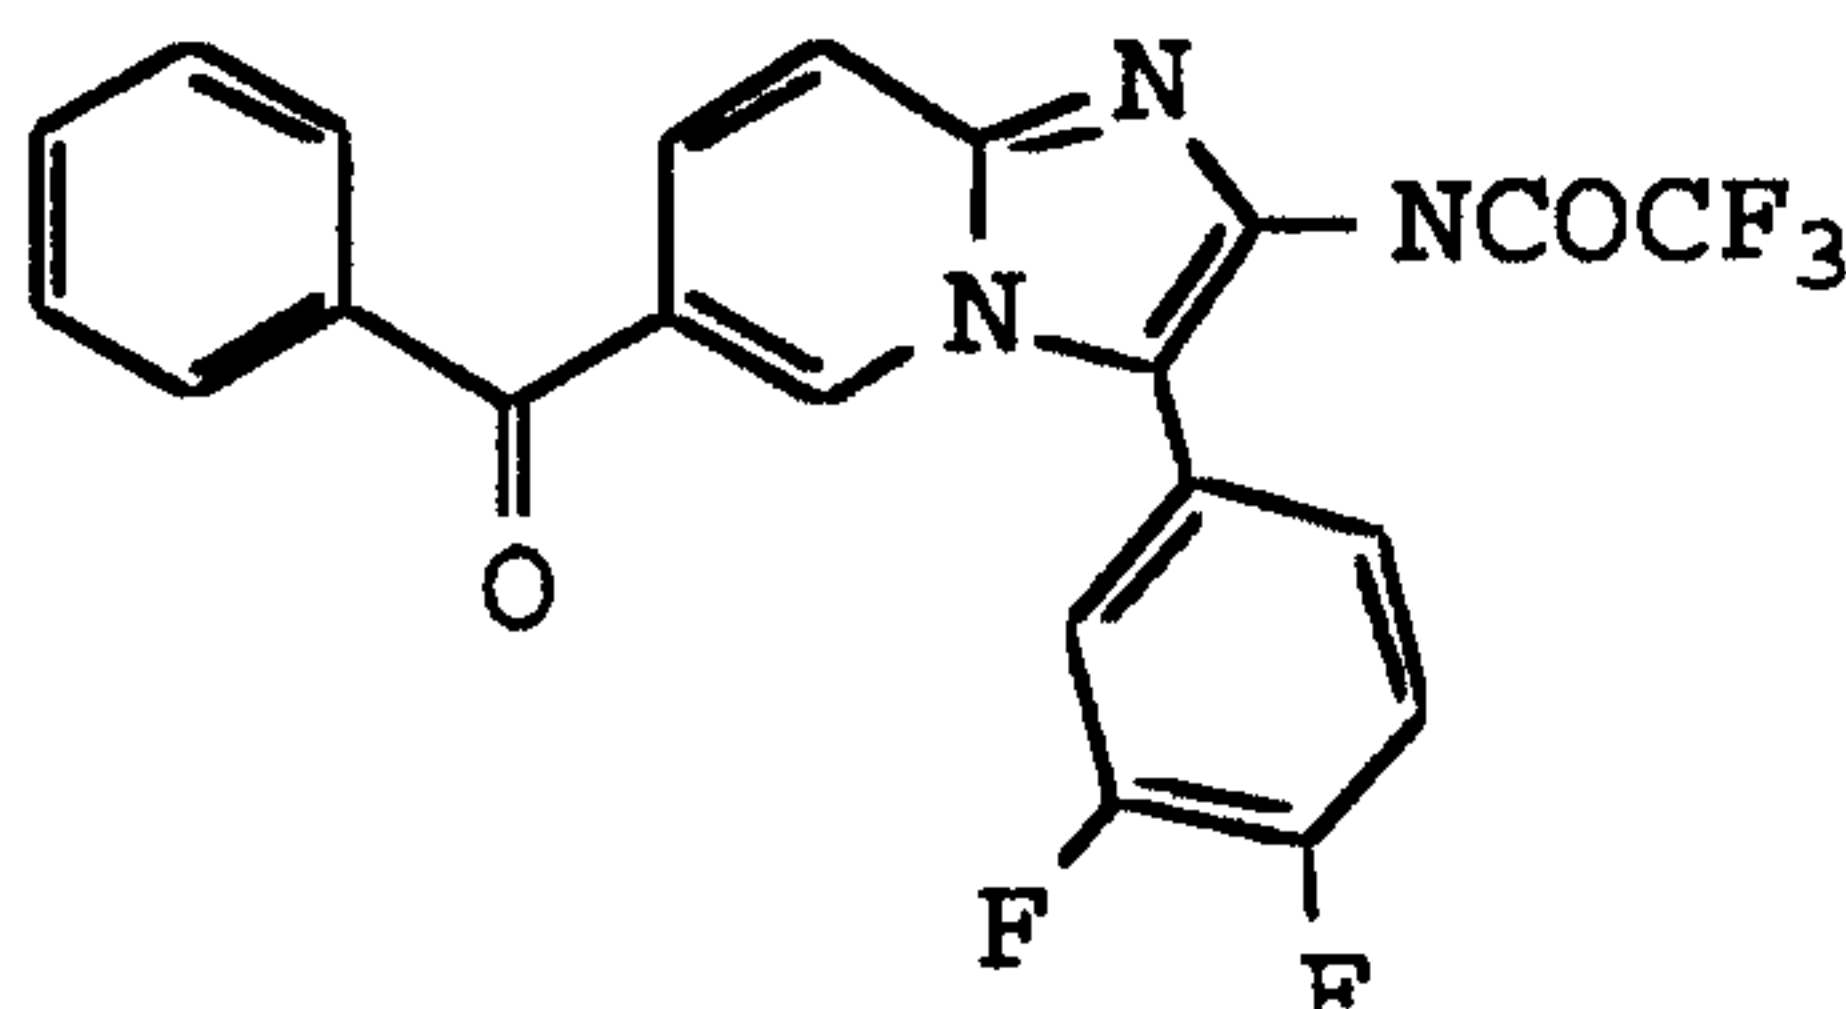

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[3,4-fluorophenyl]-carbamoylmethyl)-pyridine (9.53 g, 18.3 mmol) was converted to product in a manner
substantially analogous to Example 1 to yield 7.44 g.
(91%). EA, MS(FD).

Example 14


2-Trifluoroacetamido-3-(3,4-dichlorophenyl)-6-benzoyl-
imidazo[1,2-a]pyridine

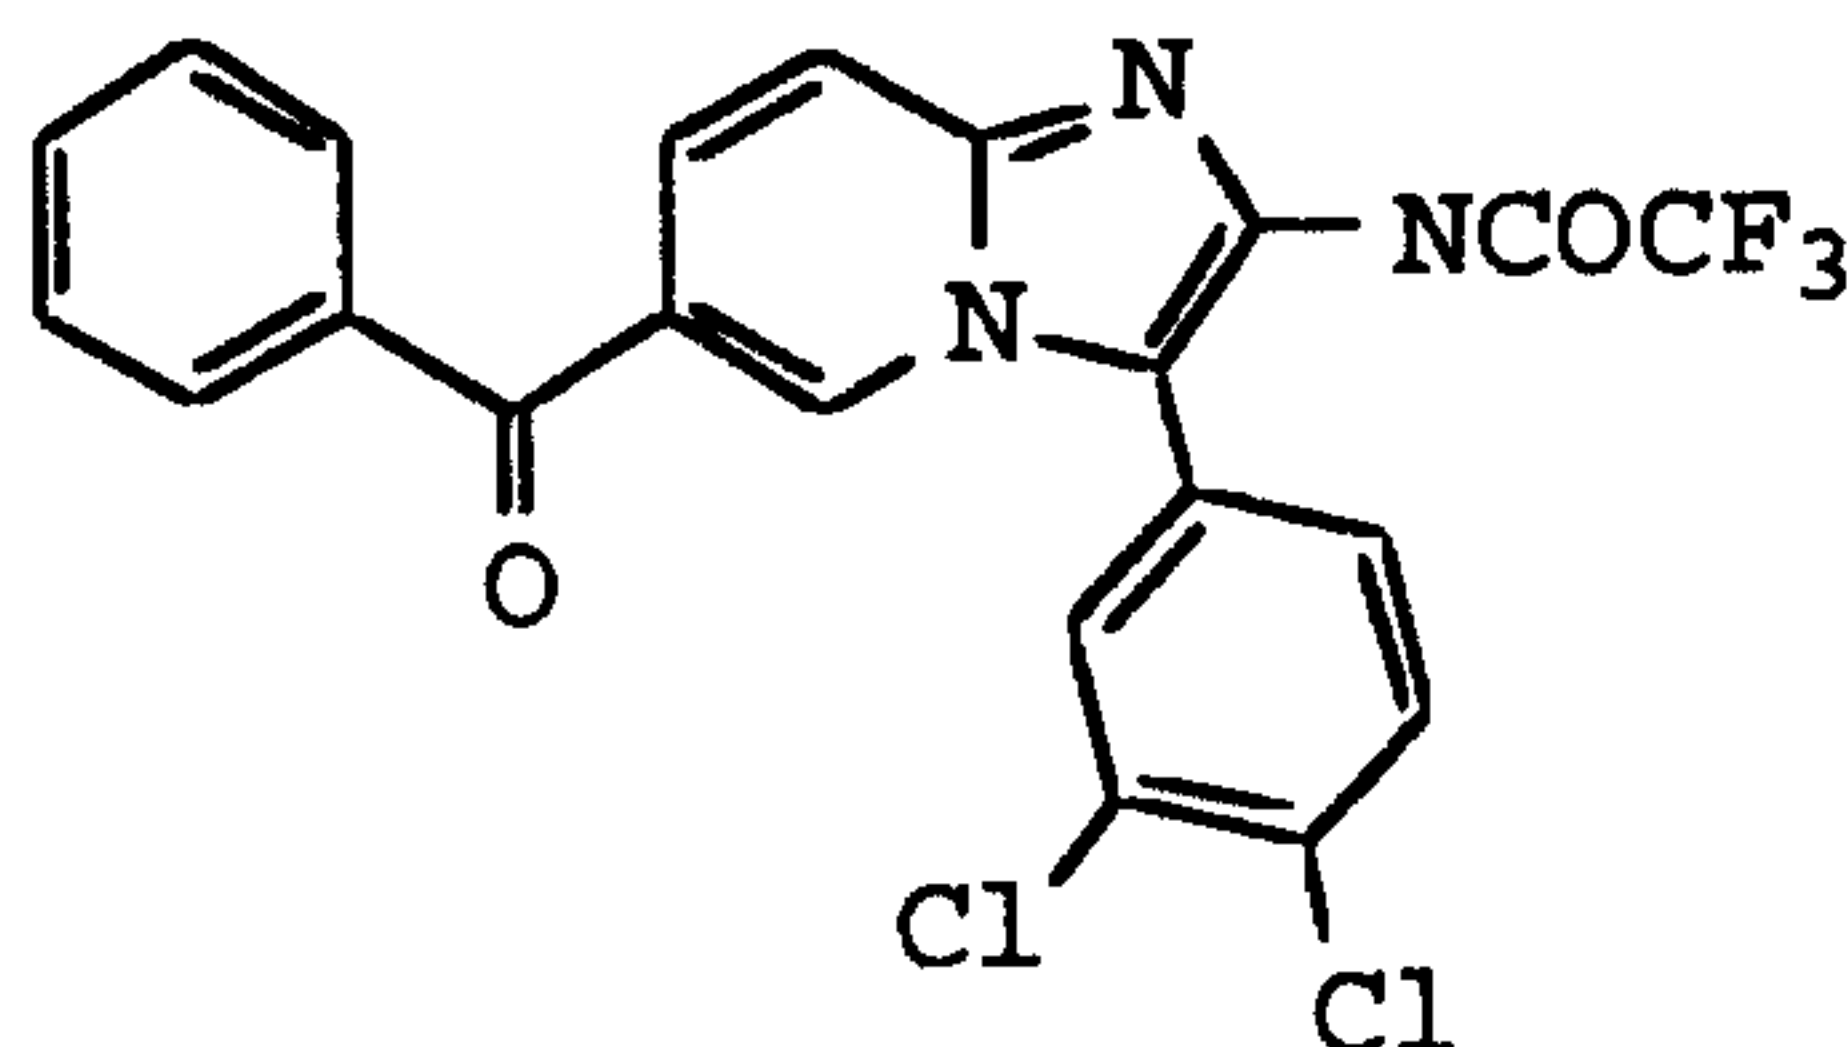

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[3,4-dichlorophenyl]-carbamoylmethyl)-pyridine (13.8 g, 24.9 mmol) was converted to product in a manner
substantially analogous to Example 1 to yield 9.91 g.
(83%). EA, MS(FAB).

Example 15


2-Trifluoroacetamido-3-(2,4,5-trifluorophenyl)-6-benzoyl-
imidazo[1,2-a]pyridine

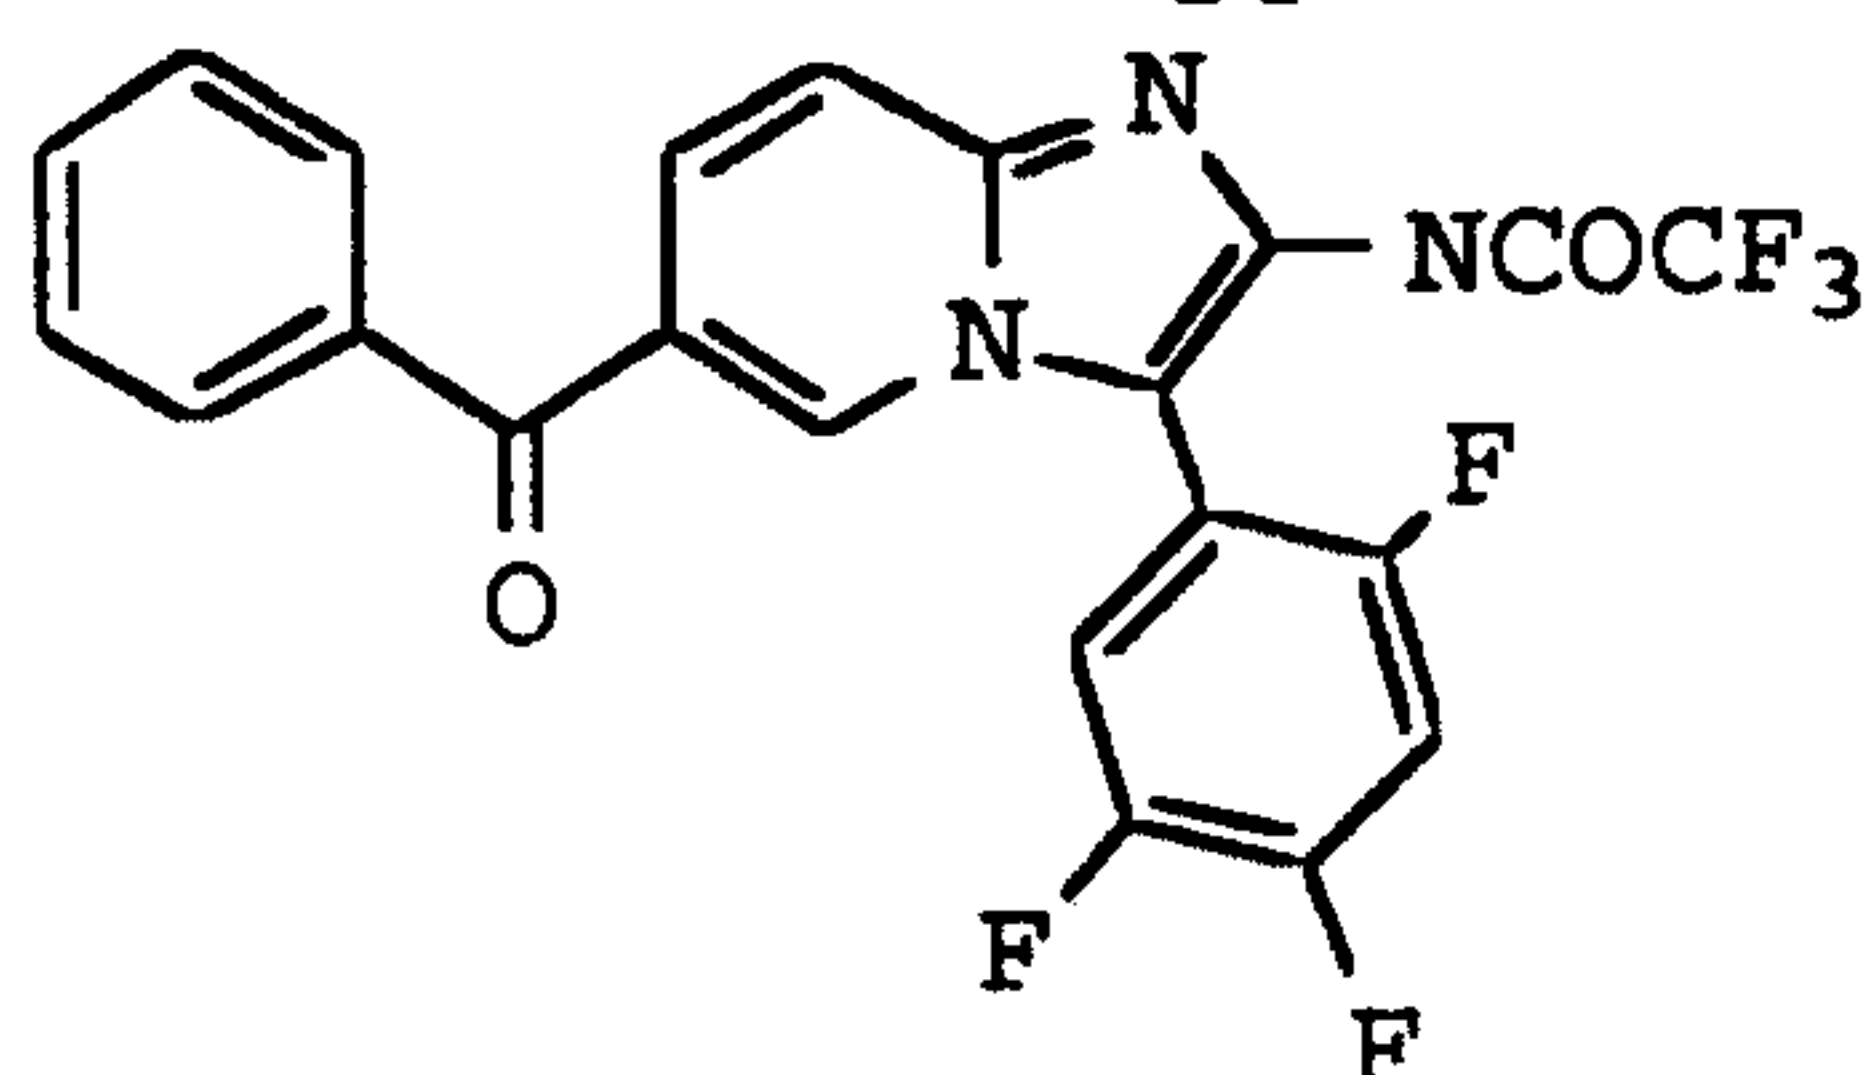

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2,4,5-trifluorophenyl]-carbamoylmethyl)-pyridine (11.6 g, 21.5 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 9.28 g. (93%). EA, MS(FD).

Example 16


2-Trifluoroacetamido-3-(2-chlorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

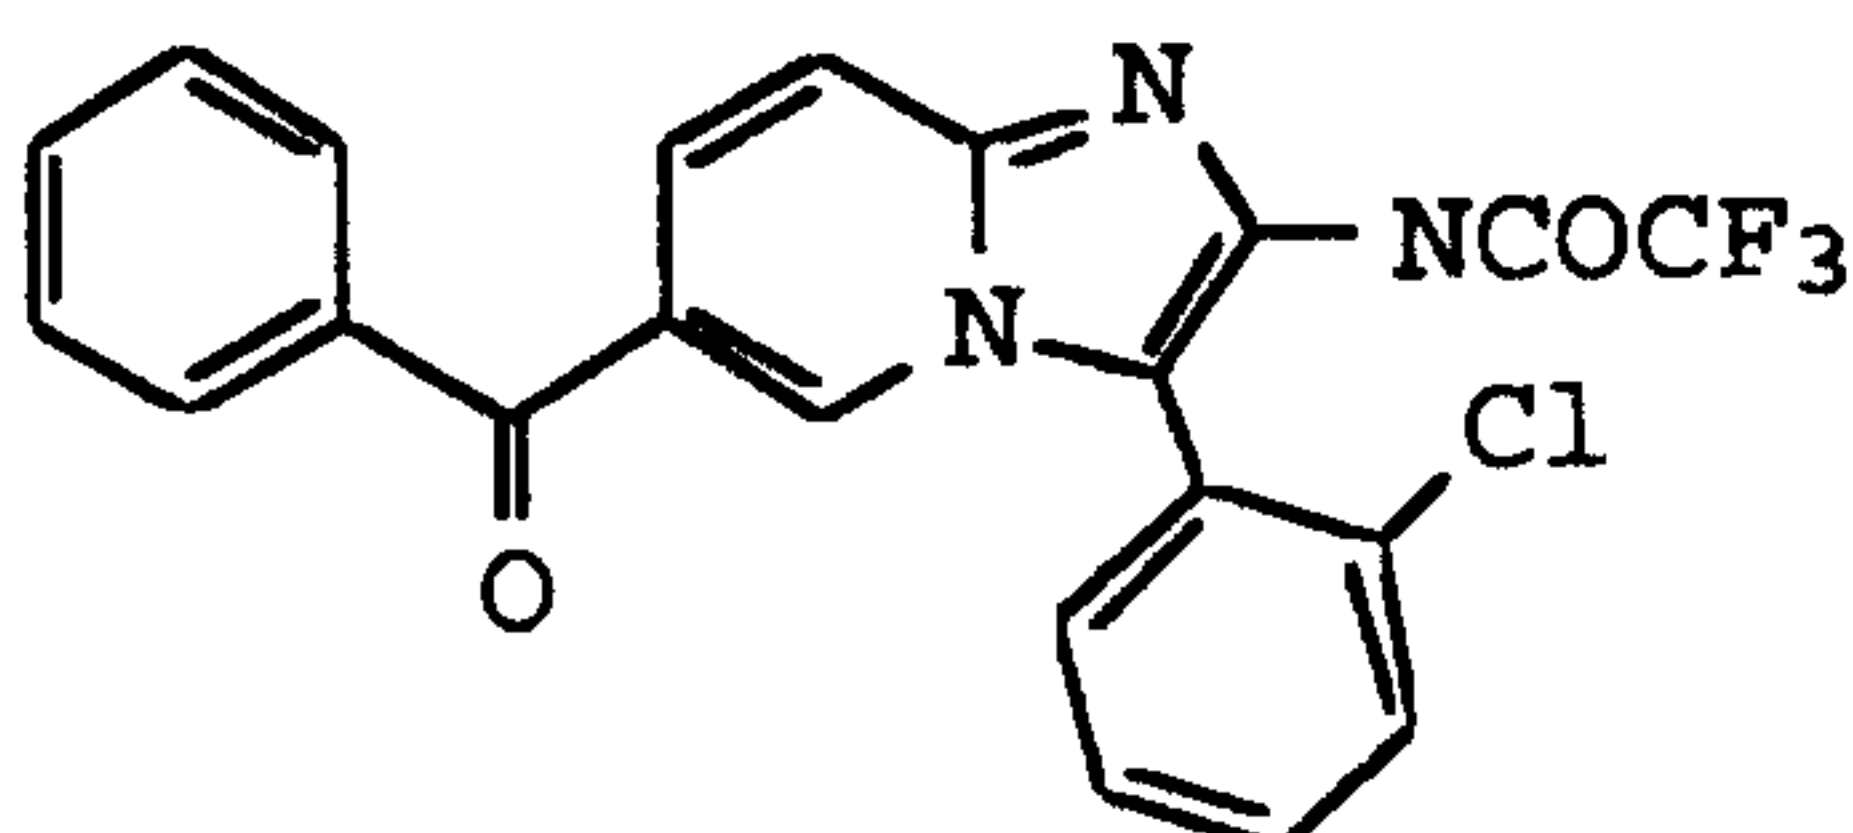

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2-chlorophenyl]-carbamoylmethyl)-pyridine (14.2 g, 27.3 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 10.8 g. (88%). EA, MS(FD).

Example 17

2-Trifluoroacetamido-3-(3-chlorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

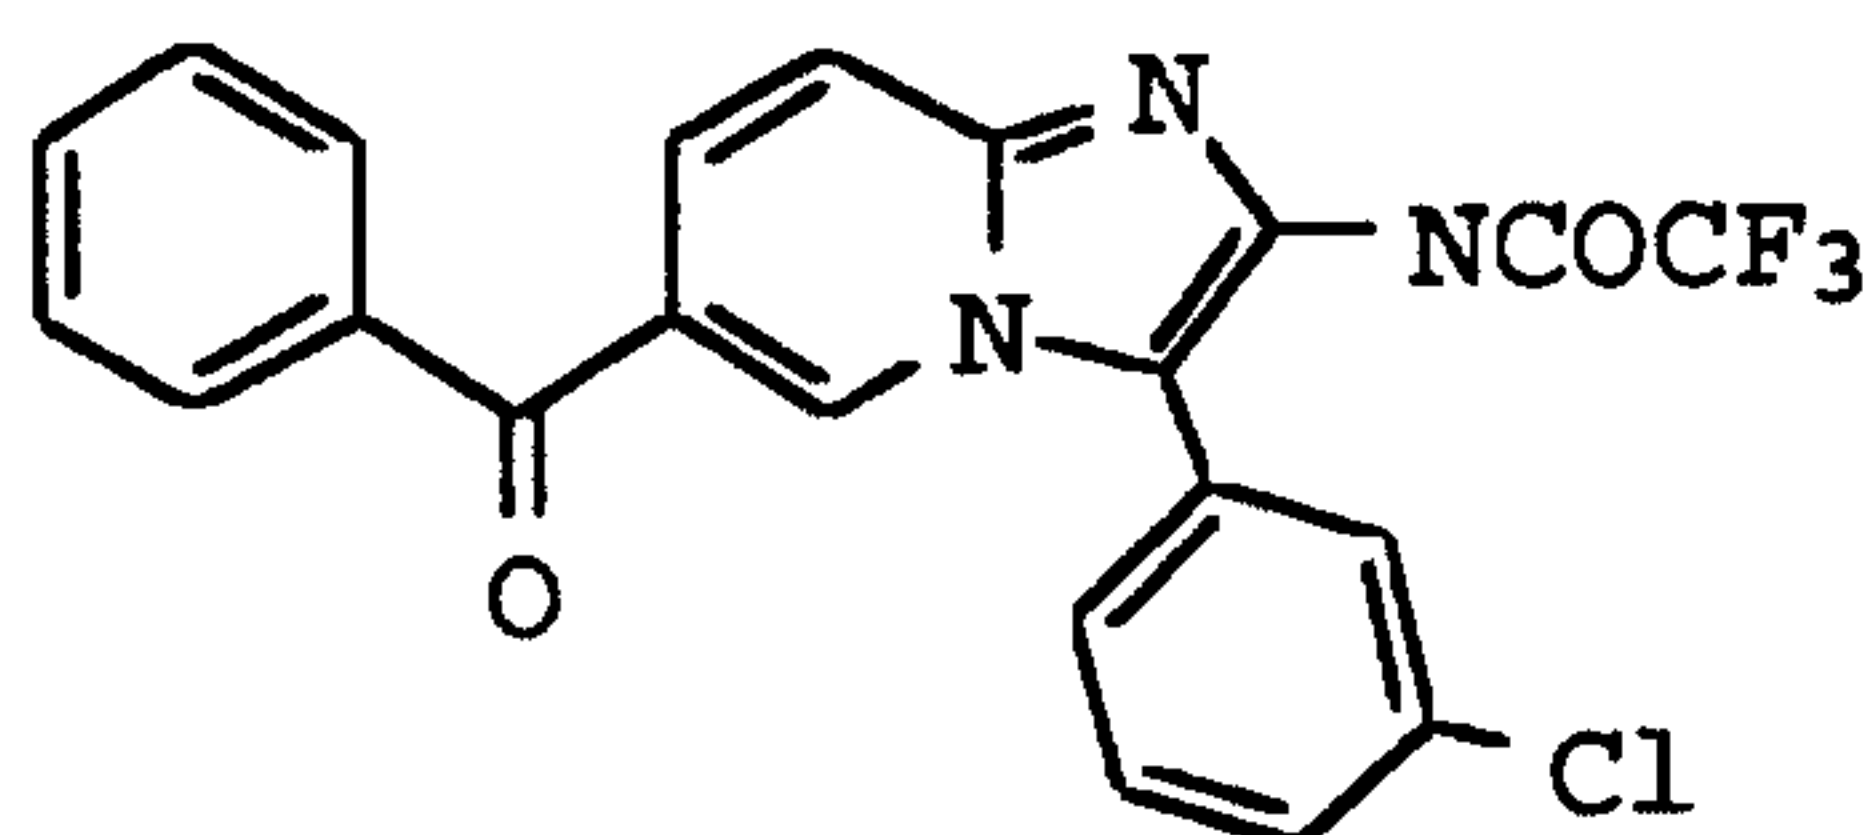


The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[3-chlorophenyl]-carbamoylmethyl)-pyridine (12.0 g, 23.1 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 8.97 g. (88%). EA, MS(FD).

Example 18

2-Trifluoroacetamido-3-(4-chlorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine


- 71 -

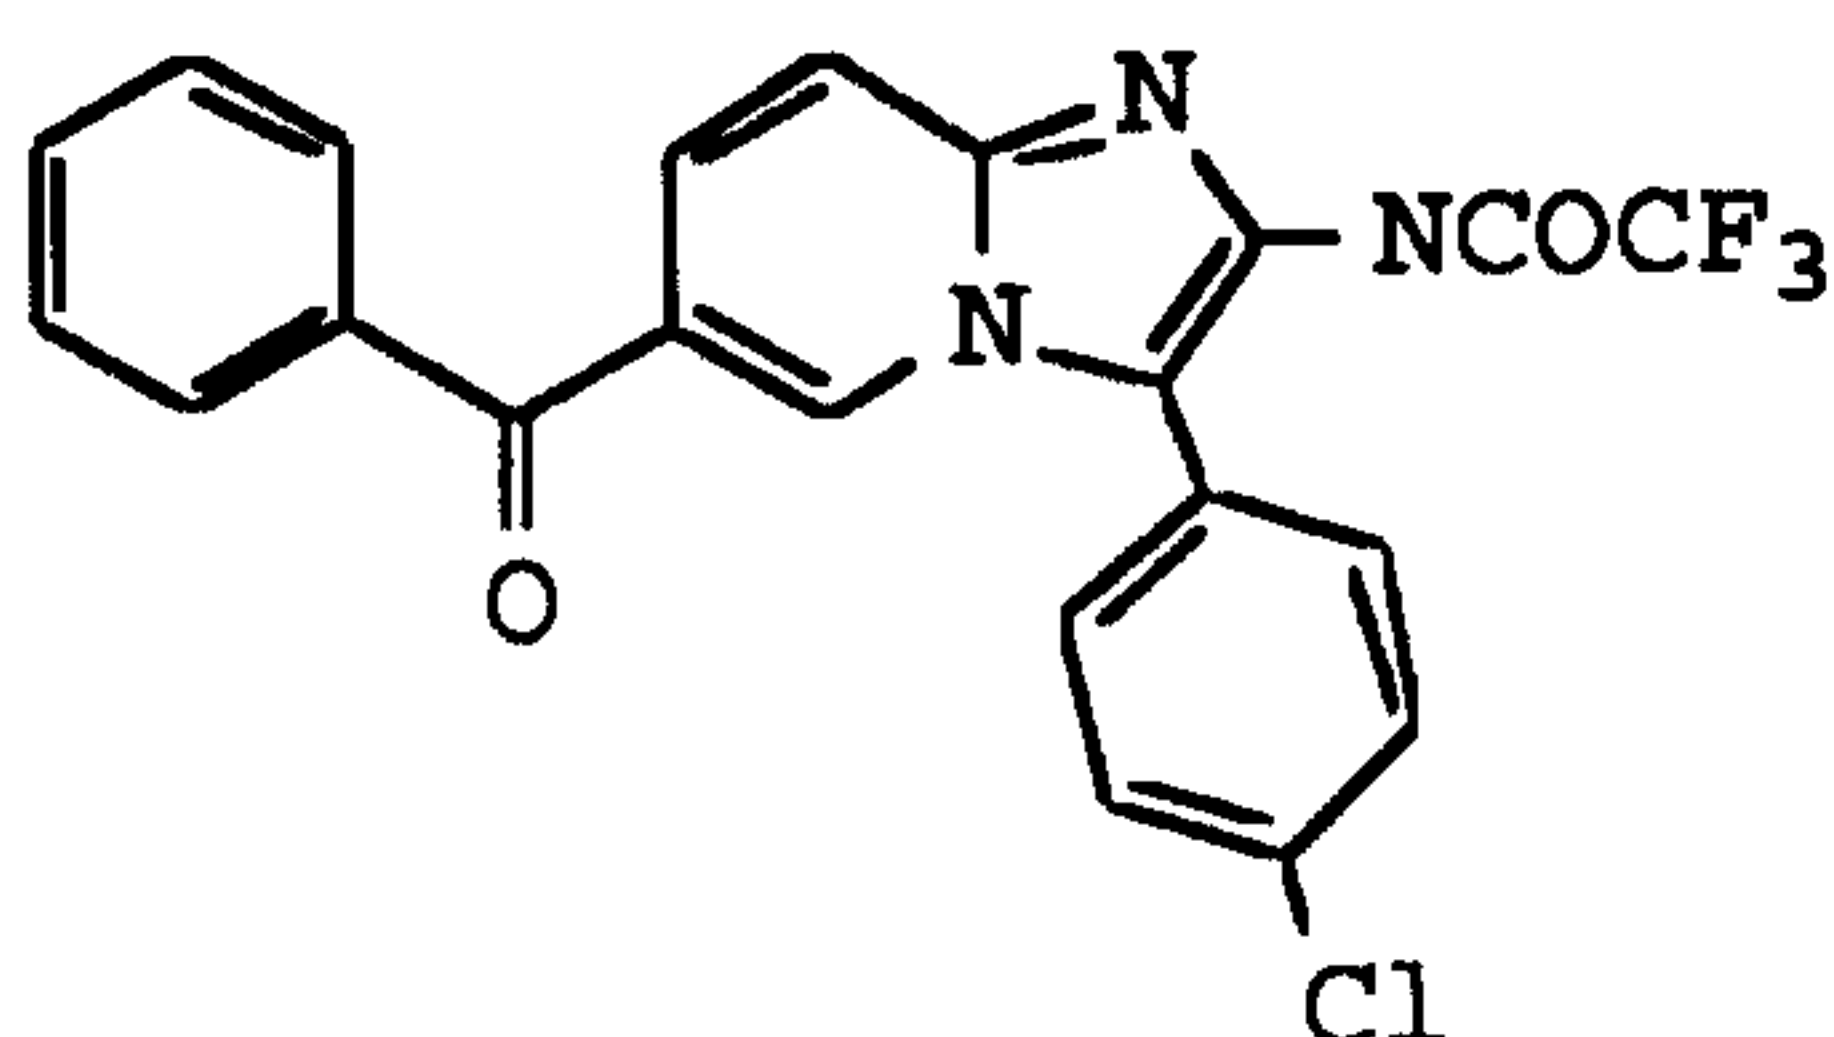

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[4-chlorophenyl]-carbamoylmethyl)-pyridine (13.8 g, 26.5 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 10.7 g. (91%). EA, MS (FD).

Example 19

2-Trifluoroacetamido-3-(4-trifluoromethoxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine

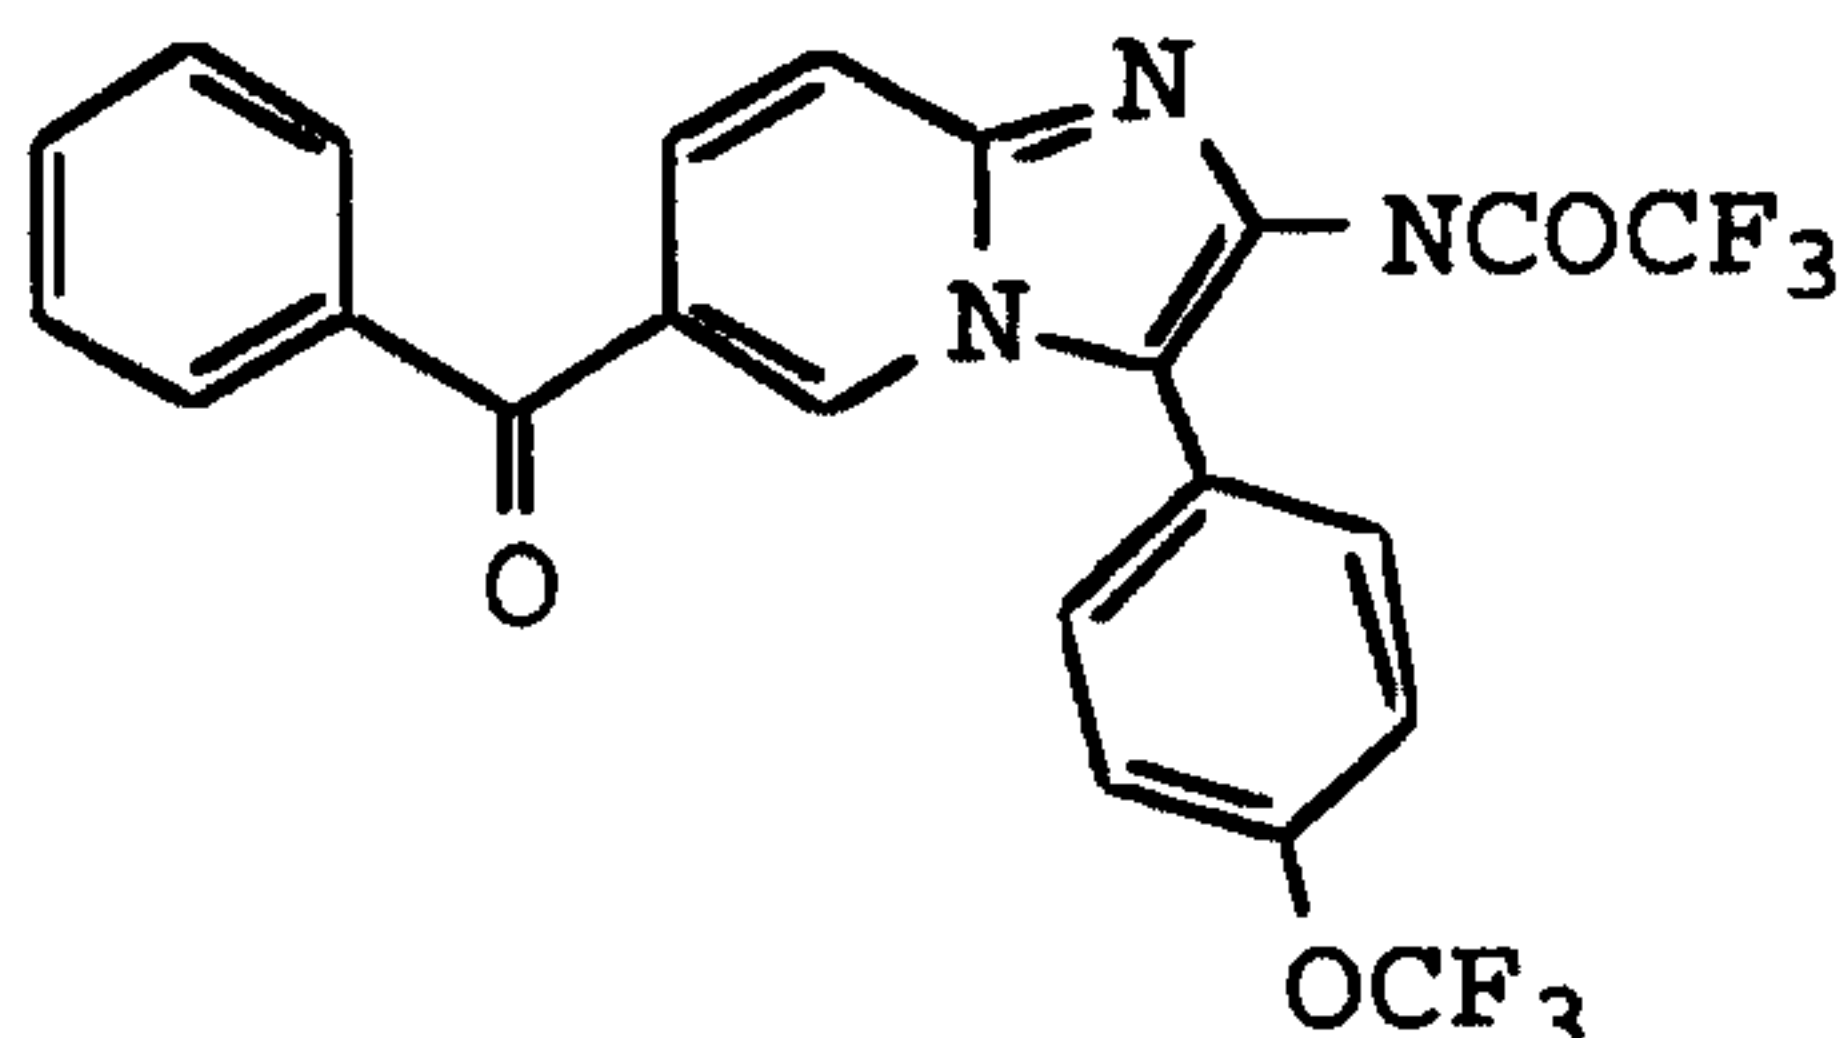


10

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[4-trifluoromethoxyphenyl]-carbamoylmethyl)-pyridine (13.2 g, 23.3 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 10.6 g.

15 (92%). EA, MS (FD).

Example 20

2-Trifluoroacetamido-3-(3-trifluoromethoxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine

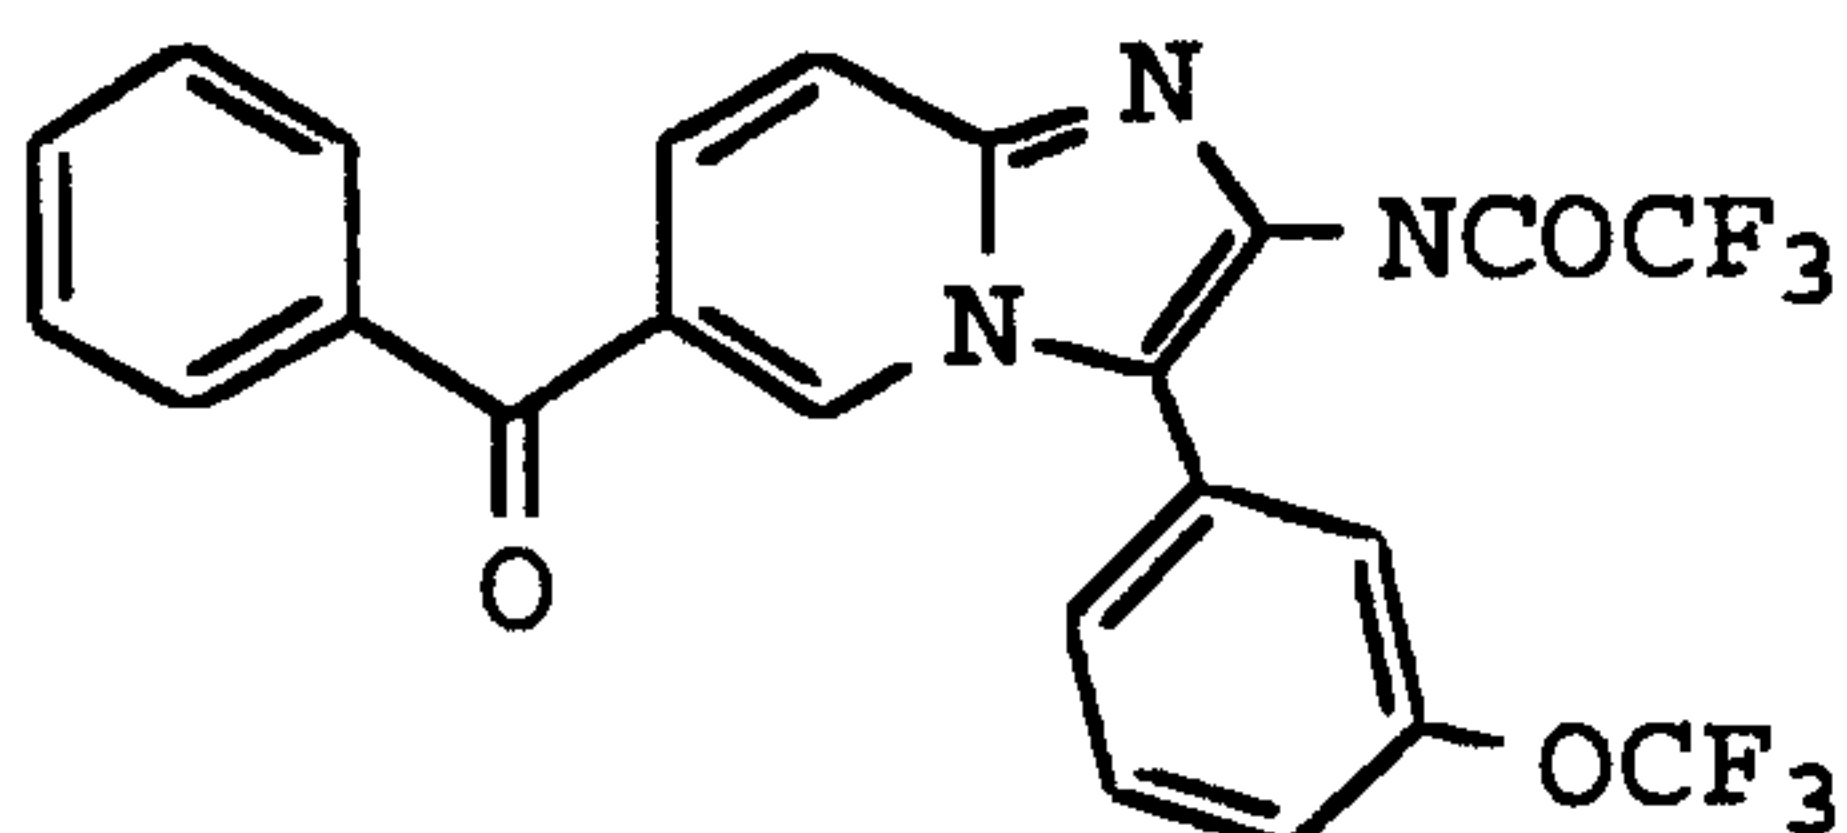


20 The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[3-trifluoromethoxyphenyl]-carbamoylmethyl)-pyridine (12.5 g, 22.0 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 10.4 g. (96%). EA, MS (FD).

25

Example 21

- 72 -


2-Trifluoroacetamido-3-(2-fluoro-4-trifluoromethylphenyl)-6-benzoyl-imidazo[1,2-a]pyridine

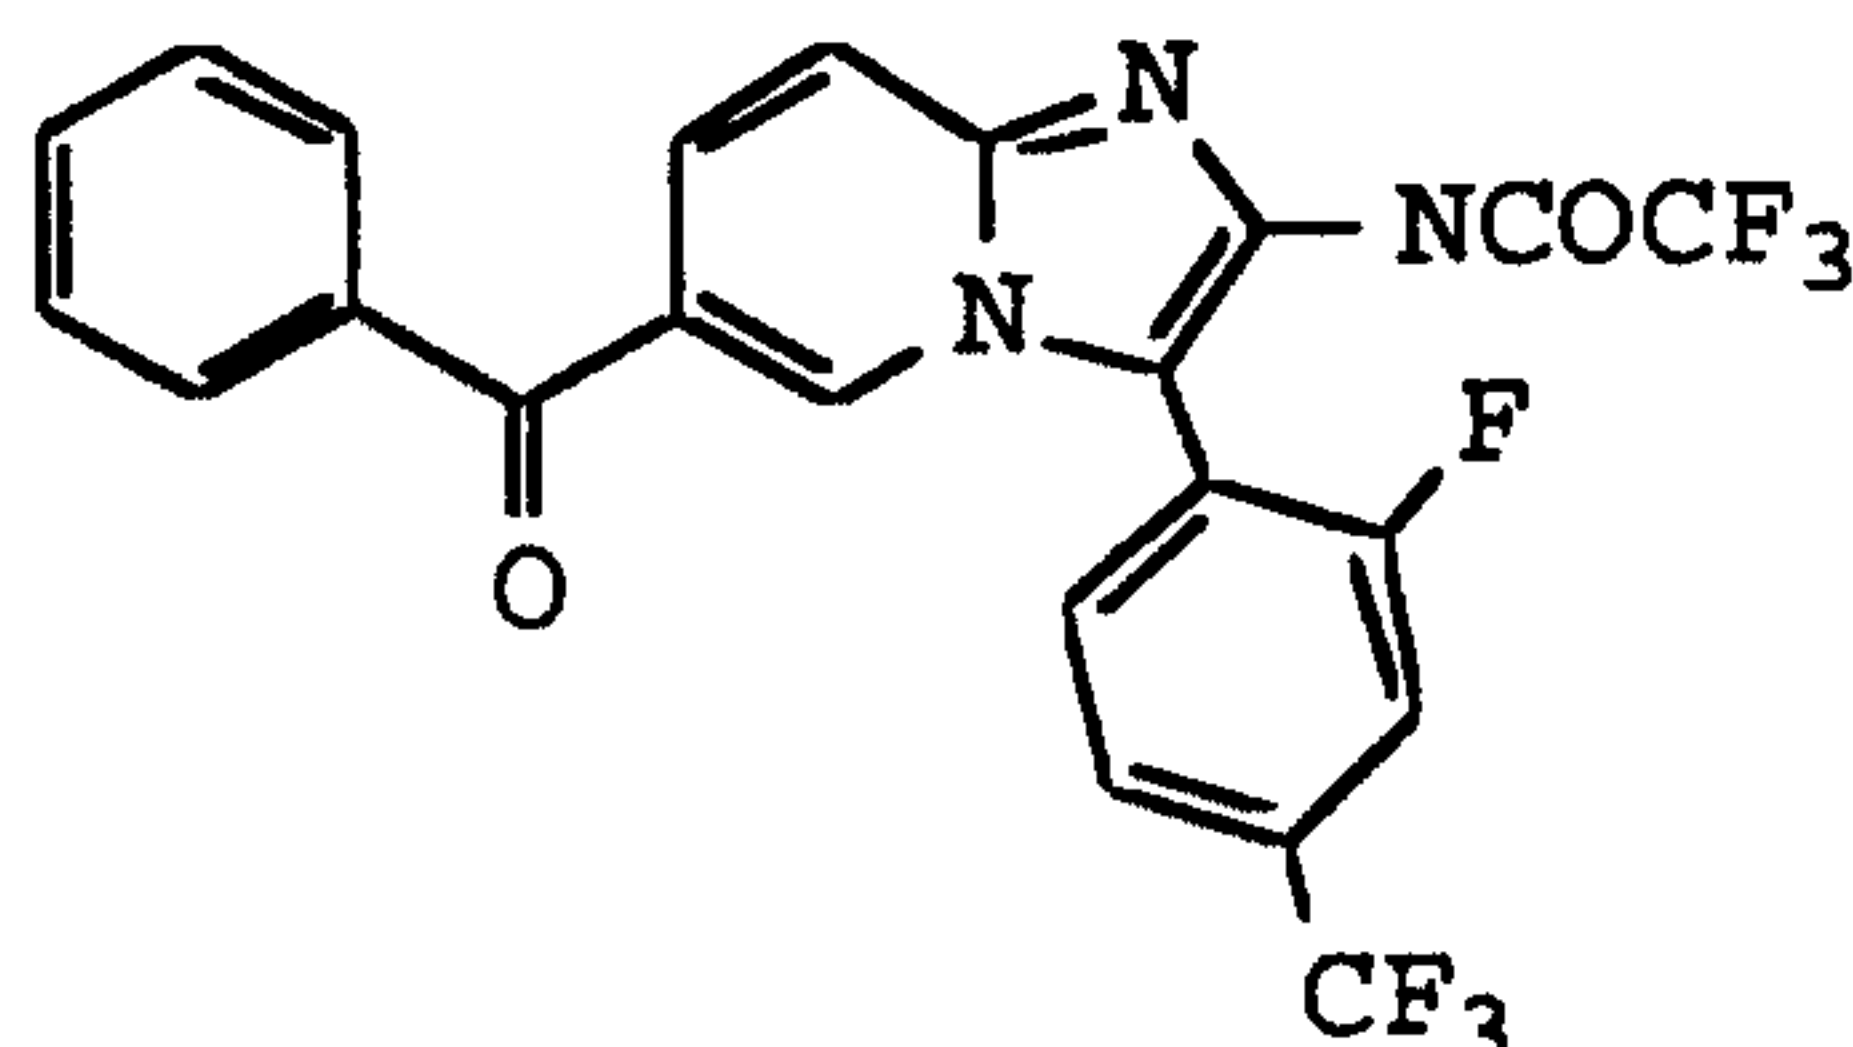

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2-fluoro-4-trifluoromethylphenyl]-carbamoylmethyl)-pyridine (10.1 g, 17.7 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 8.03 g. (92%). EA, MS(FD).

Example 22


2-Trifluoroacetamido-3-phenyl-6-benzoyl-imidazo[1,2-a]pyridine

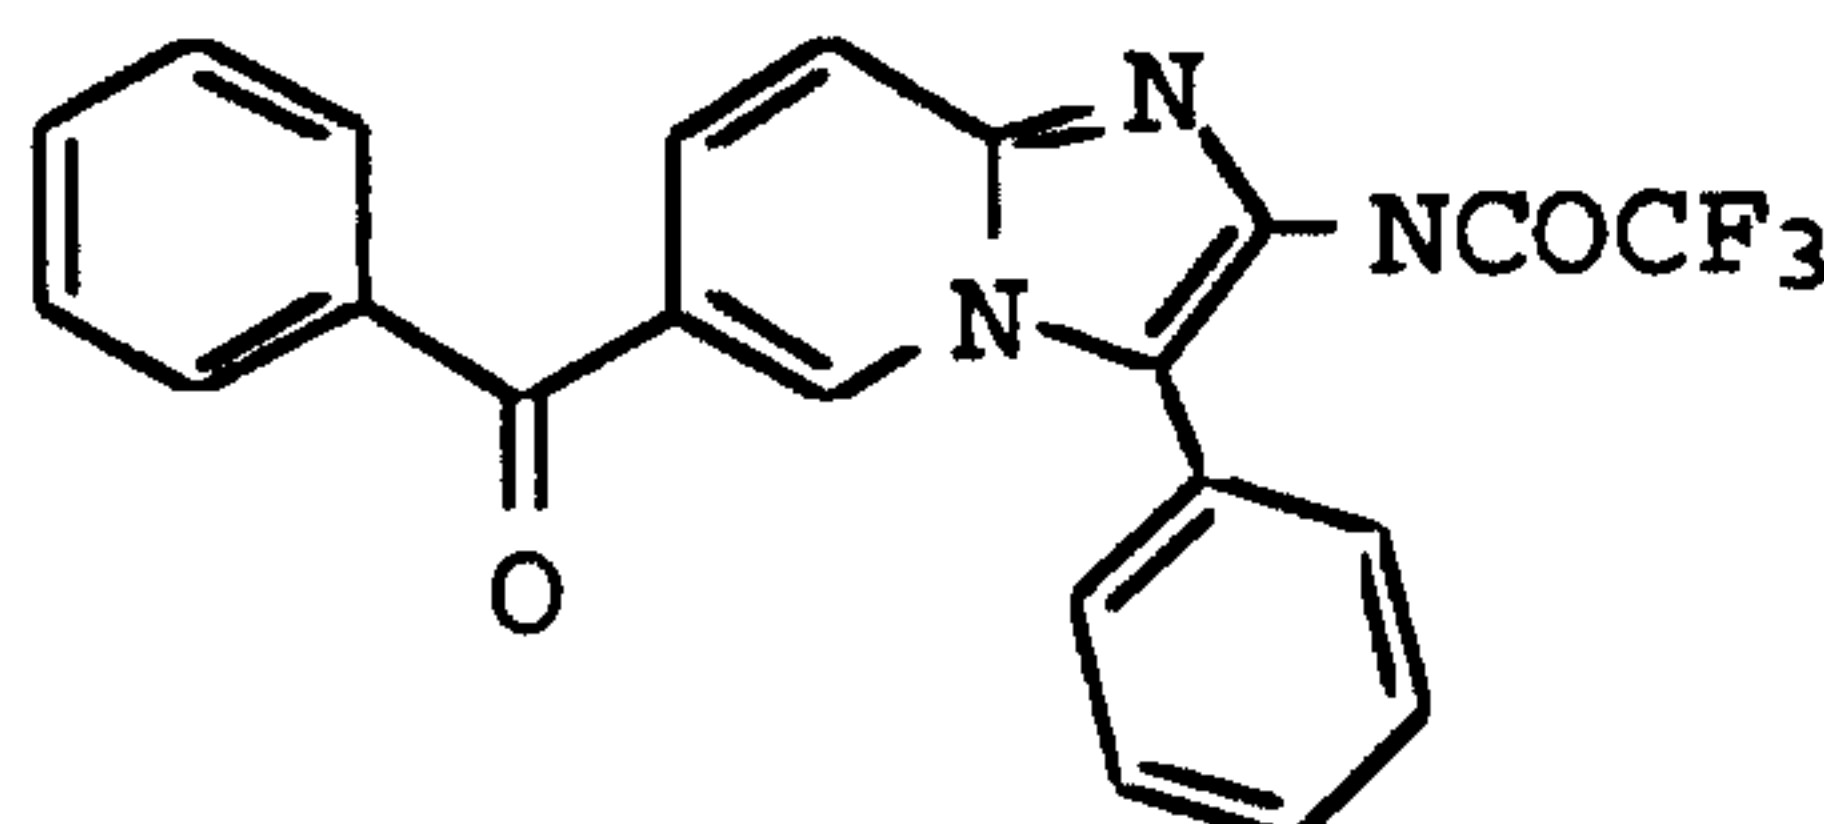

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-phenyl-carbamoylmethyl)-pyridine (13.3 g, 27.3 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 10.0 g. (90%). EA, MS(FD).

Example 23

2-Trifluoroacetamido-3-(2,6-difluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

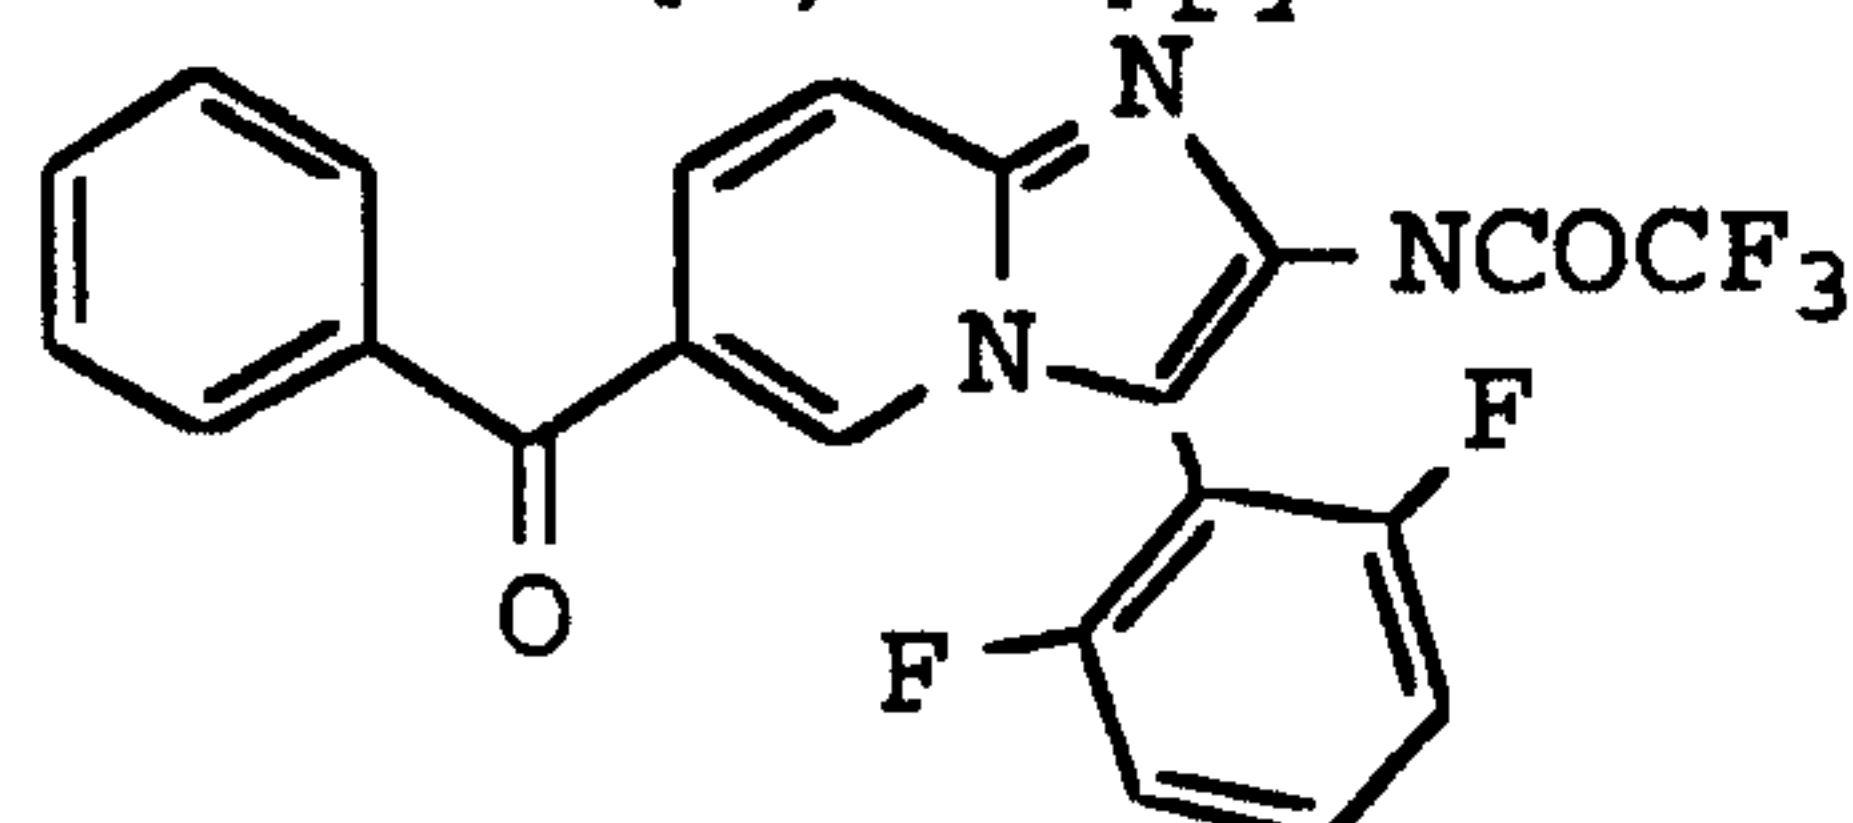


20

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2,6-difluorophenyl]-carbamoylmethyl)-pyridine (7.44 g, 14.3 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 5.26 g.

(82.8%). EA, MS(FD).

Example 24


2-Trifluoroacetamido-3-(2,3,4,5,6-pentafluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

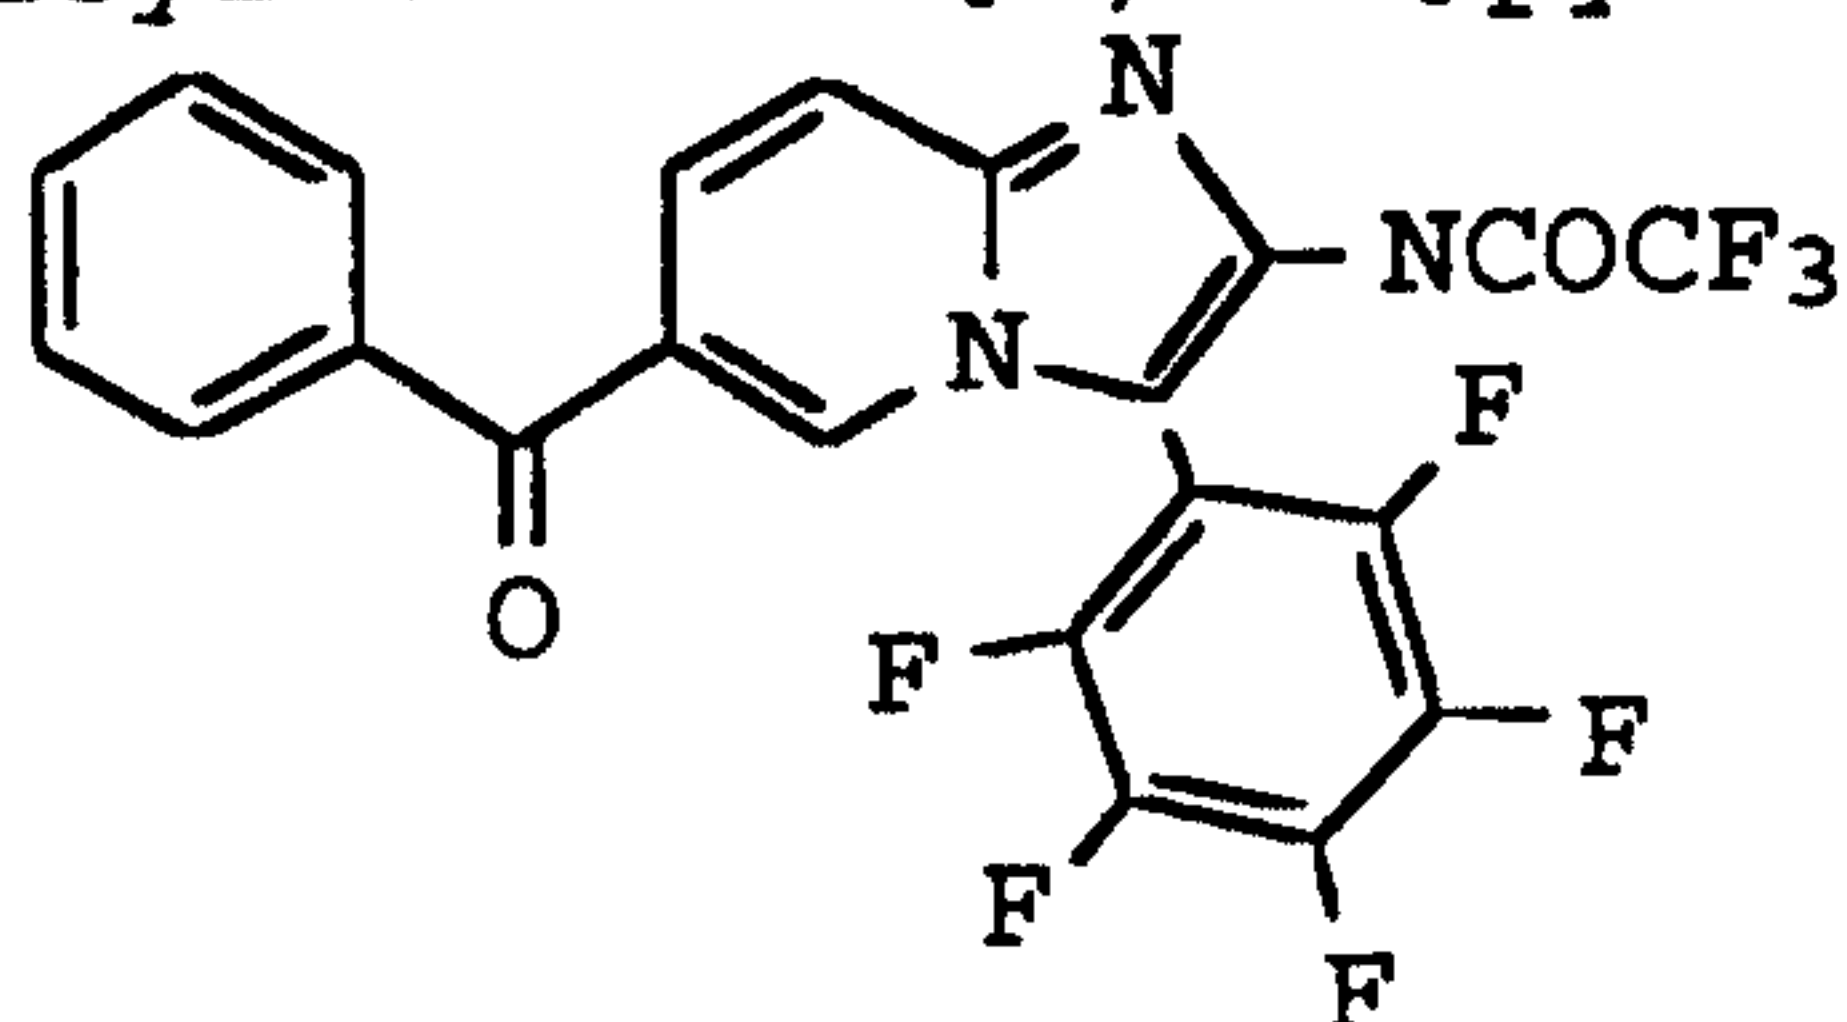

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2,3,4,5,6-pentafluorophenyl]-carbamoylmethyl)-pyridine (3.00 g, 5.22 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 1.58 g. (60.8%). EA, MS(FD).

Example 25


2-Trifluoroacetamido-3-(2-trifluoromethylphenyl)-6-benzoyl-imidazo[1,2-a]pyridine

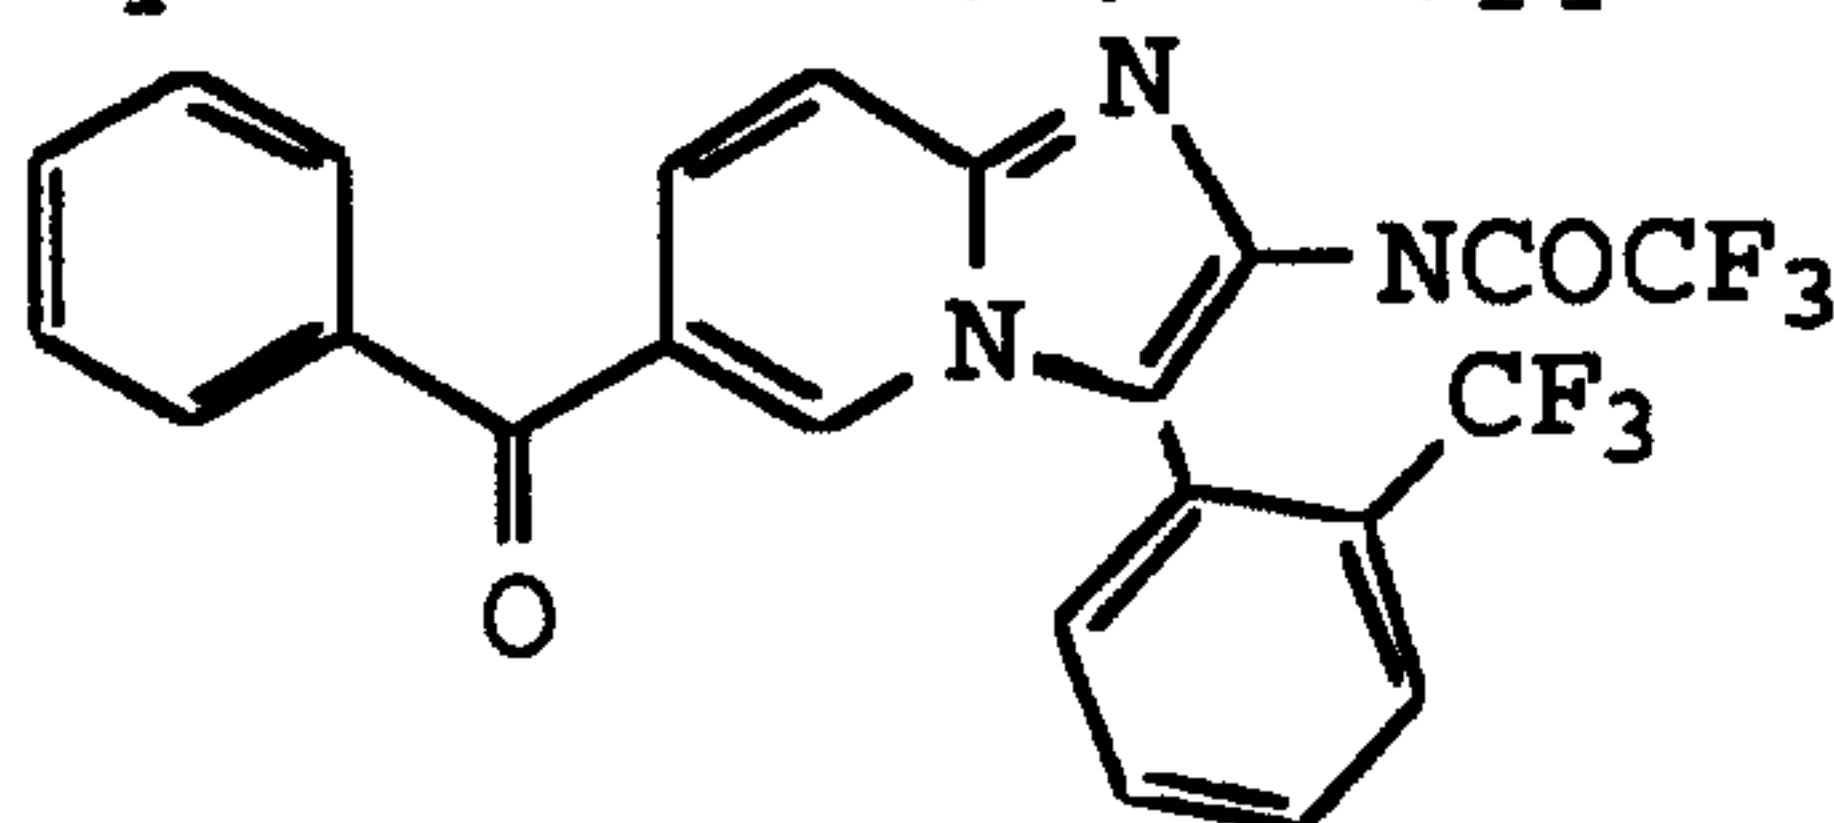

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2-trifluoromethylphenyl]-carbamoylmethyl)-pyridine (7.37 g, 13.3 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 6.22 g. (98%). EA, MS(FD).

Example 26

2-Trifluoroacetamido-3-(thiophen-3-yl)-6-benzoyl-imidazo[1,2-a]pyridine

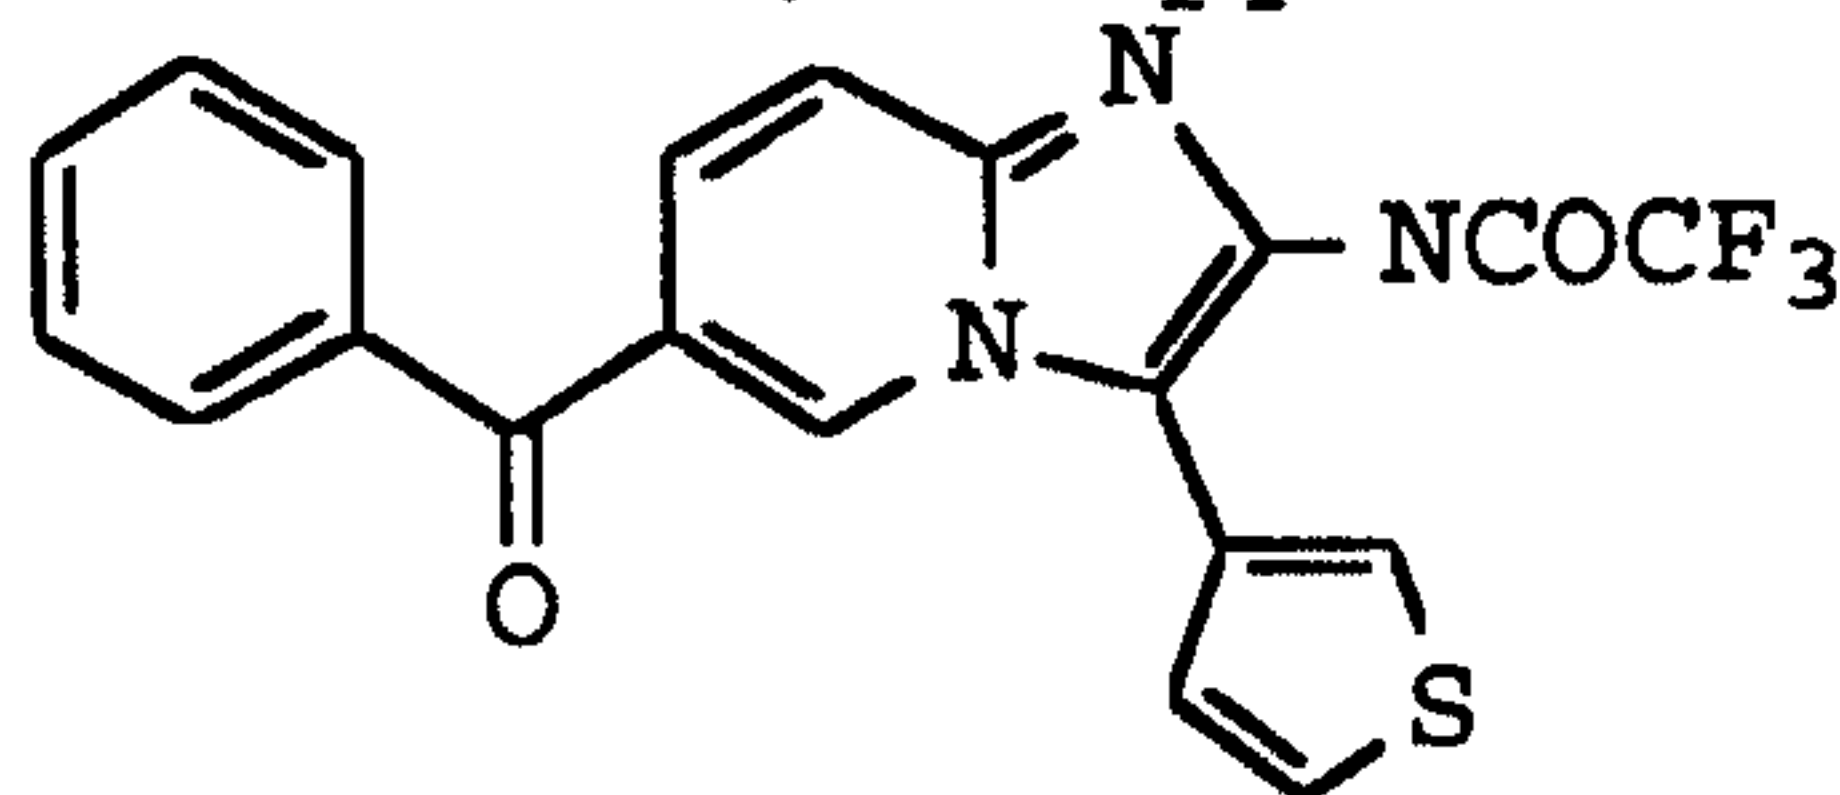


The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[thiophen-3-yl]-carbamoylmethyl)-pyridine (11.4 g, 23.1 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 8.88 g. (92.6%). EA, MS(FD).

Example 27

- 74 -


2-Trifluoroacetamido-3-(2-trifluoromethyl-4-fluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

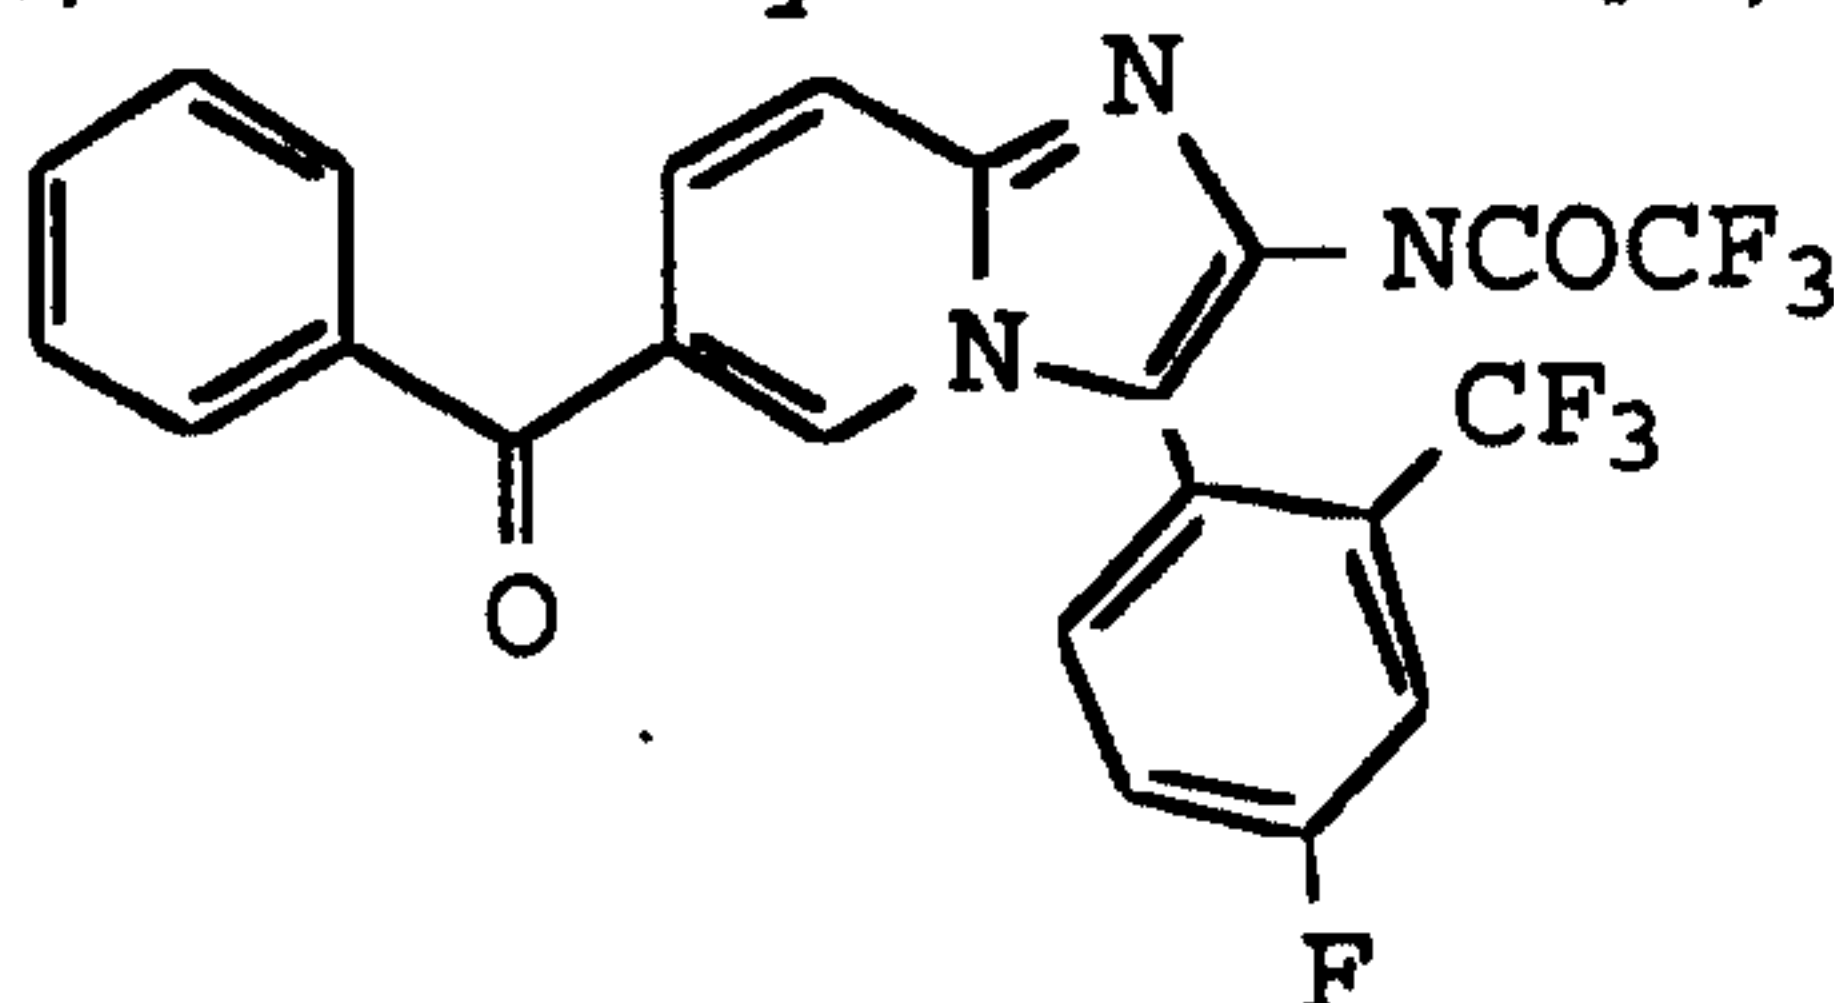

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2-trifluoromethyl-4-fluorophenyl]-carbamoylmethyl)-pyridine (14.5 g, 25.3 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 11.0 g. (88%). EA, MS(FD).

Example 28


2-Trifluoroacetamido-3-(2-fluoro-6-trifluoromethylphenyl)-6-benzoyl-imidazo[1,2-a]pyridine

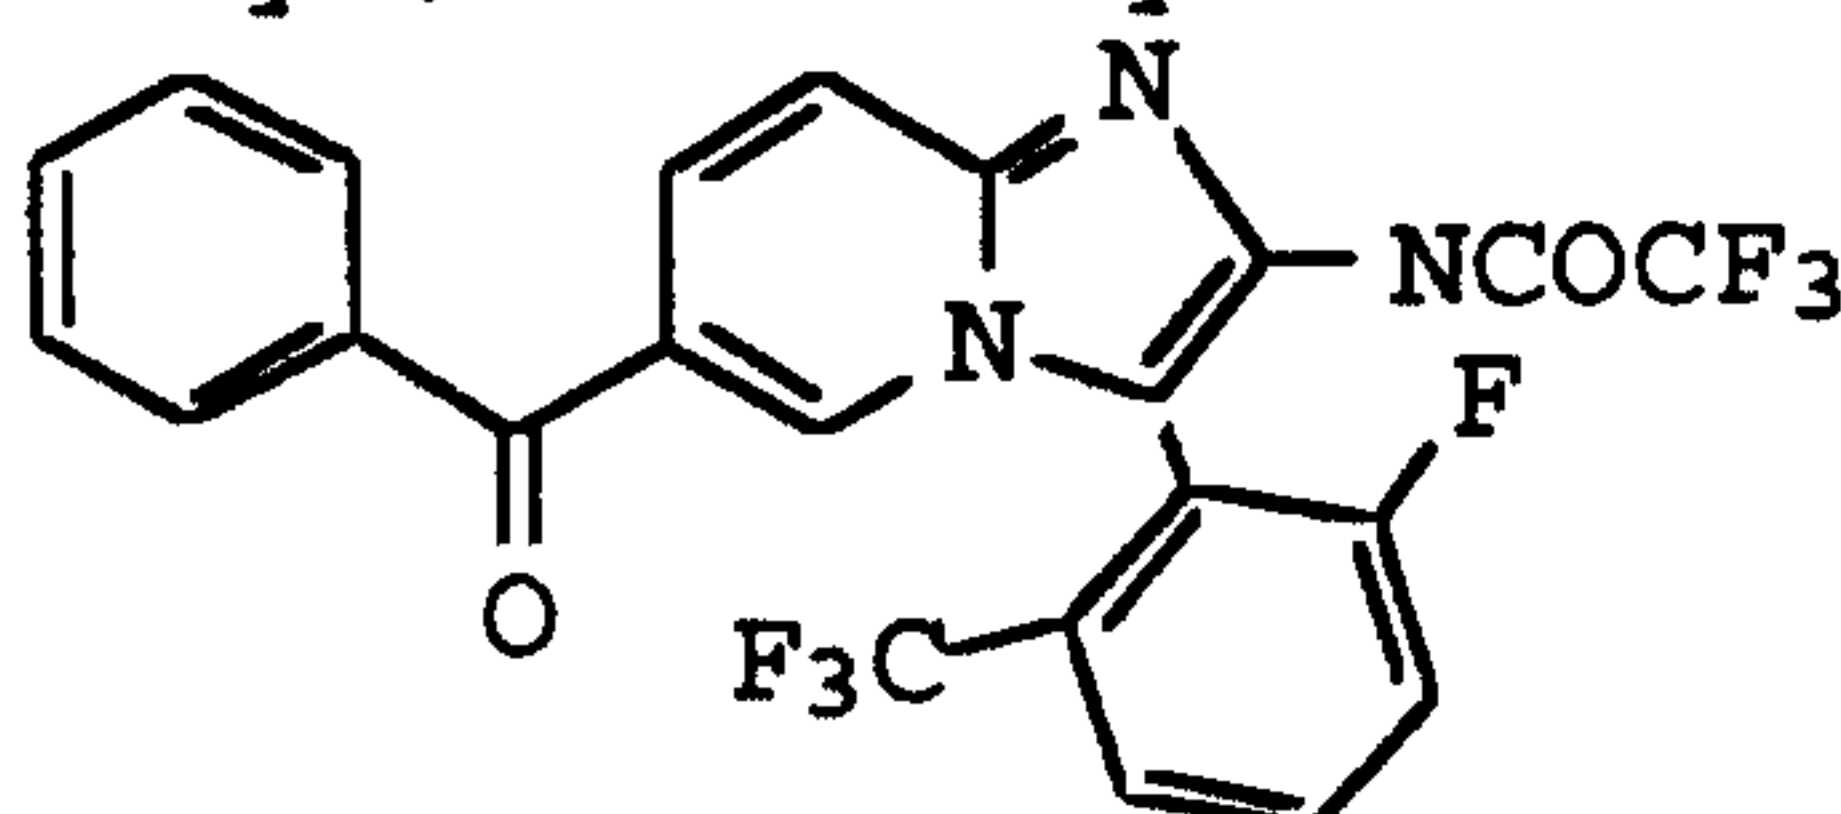

The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2-fluoro-6-trifluoromethylphenyl]-carbamoylmethyl)-pyridine (2.90 g, 5.08 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 2.37 g. (94%). EA, MS(FD).

Example 29

2-Trifluoroacetamido-3-(4-trifluoromethylphenyl)-6-benzoyl-imidazo[1,2-a]pyridine

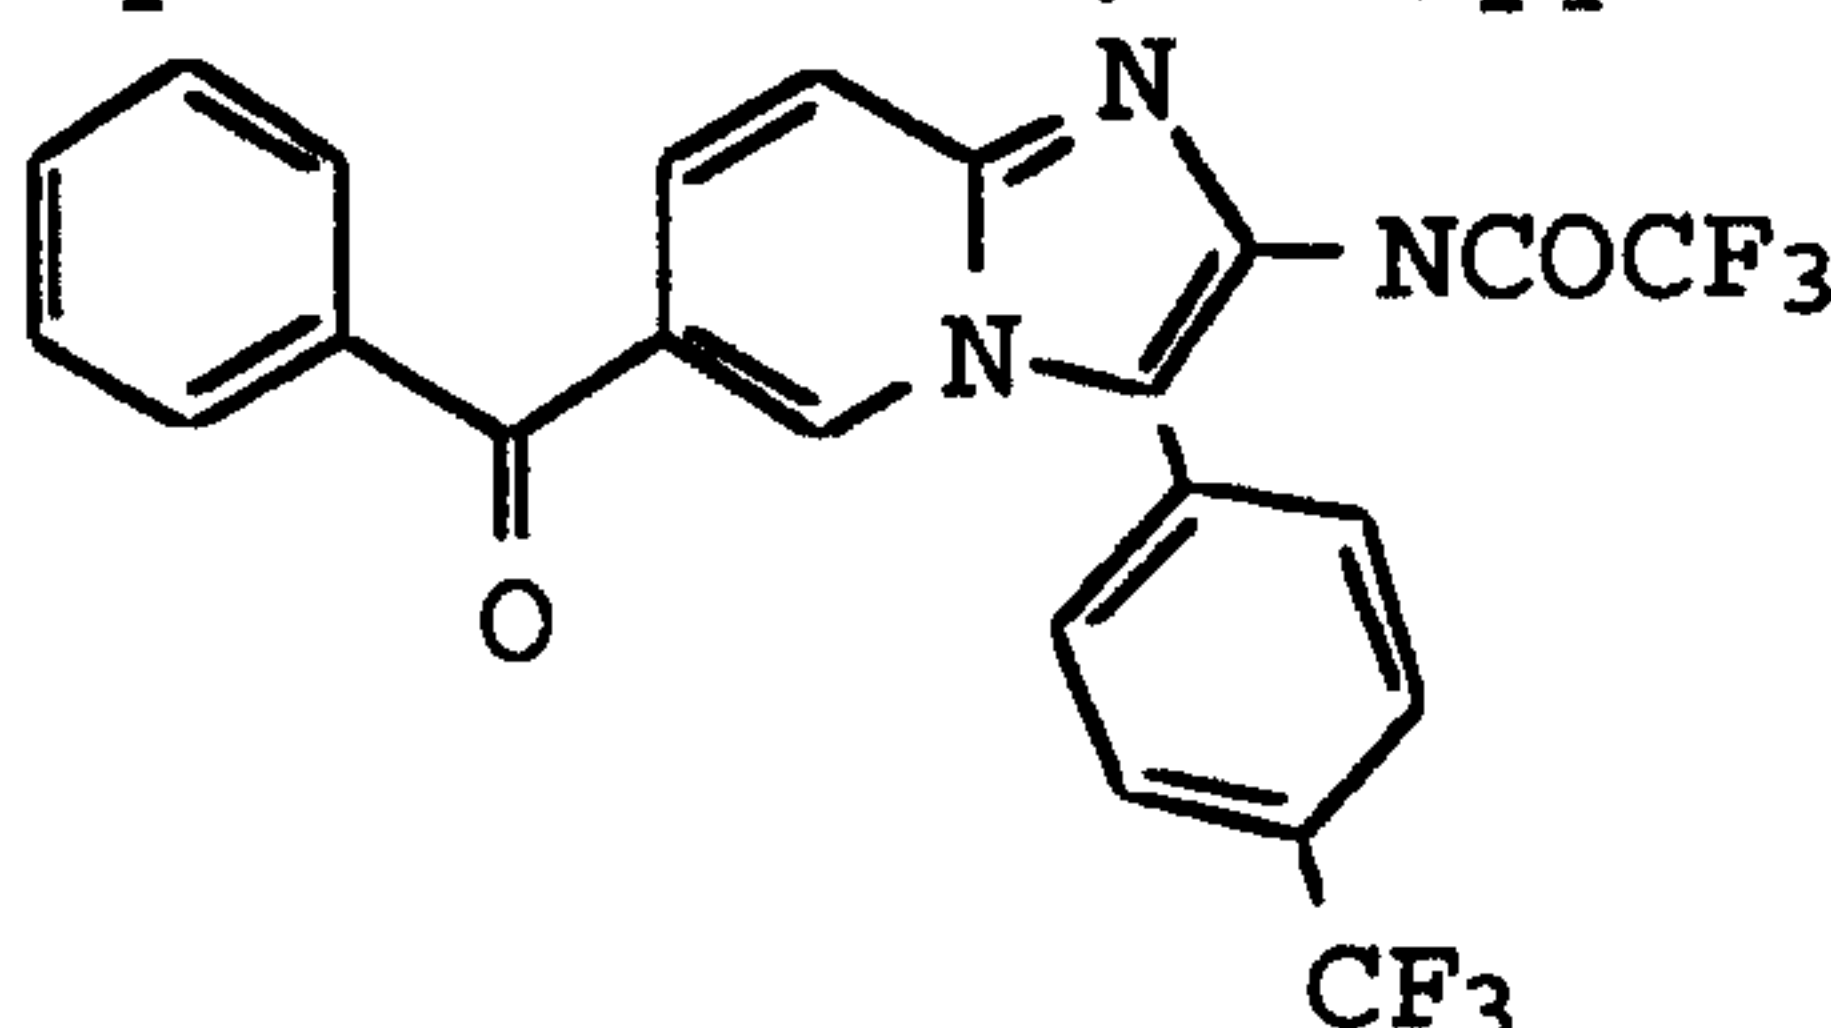


The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[4-trifluoromethylphenyl]-carbamoylmethyl)-pyridine (13.3 g, 24.1 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 10.1 g. (88.1%). EA, MS(FD).

- 75 -

Example 30

2-Trifluoroacetamido-3-(2-methoxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine

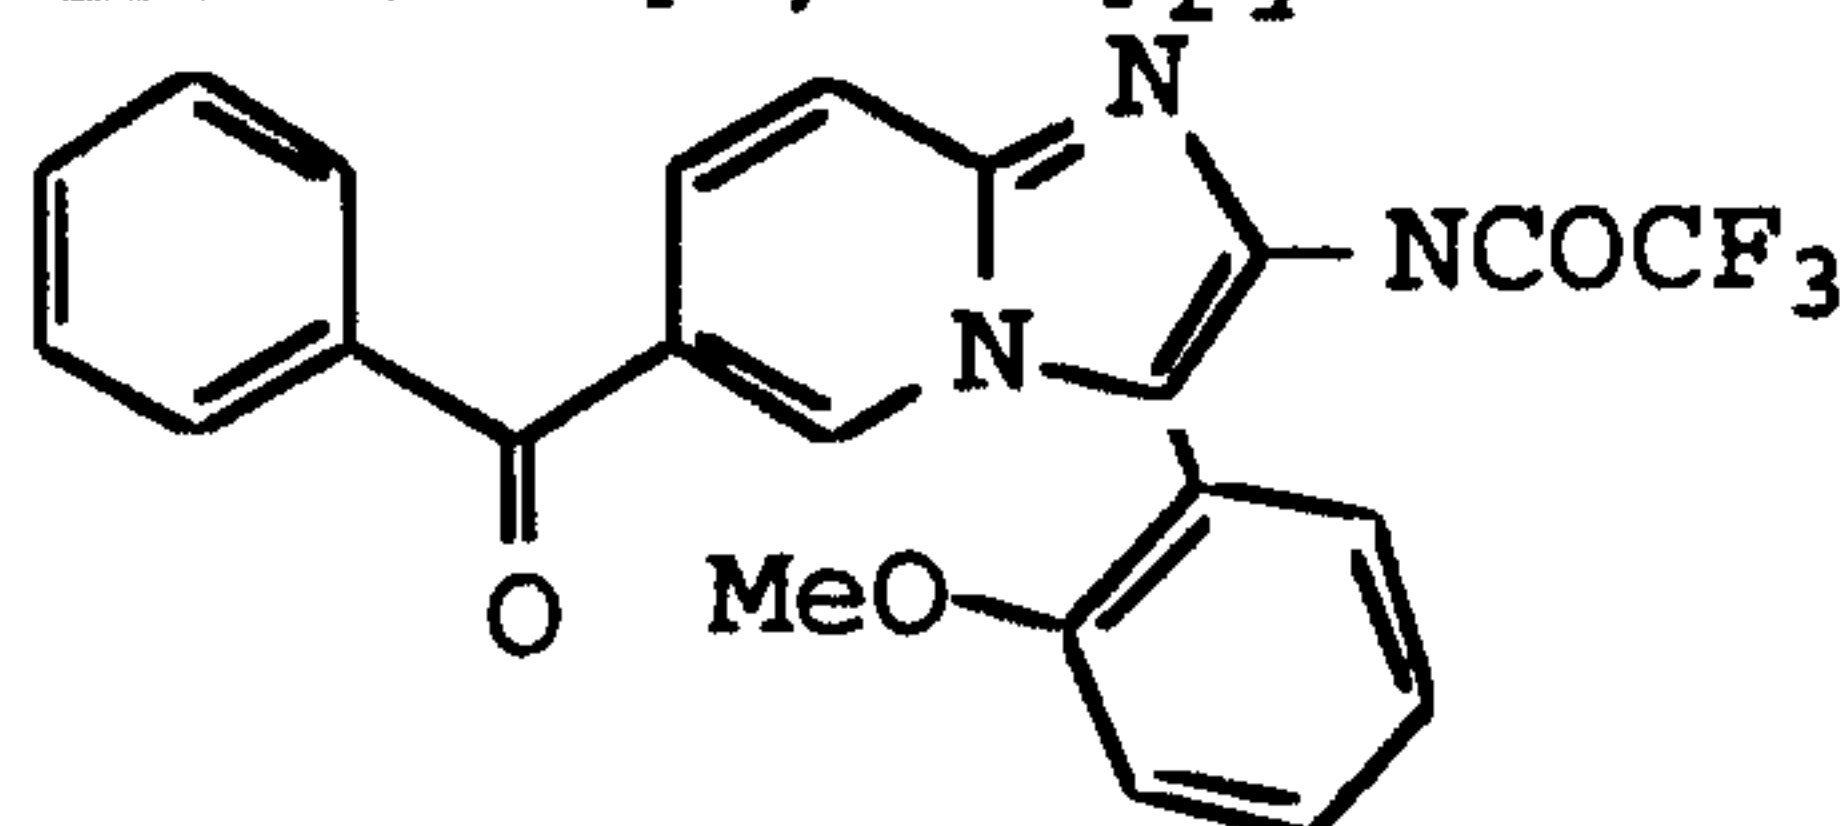


5 The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2-methoxyphenyl]-carbamoylmethyl)-pyridine (10.4 g, 20.3 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 7.40 g. (83%). EA, MS (FD).

10

Example 31

2-Trifluoroacetamido-3-(4-carbomethoxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine

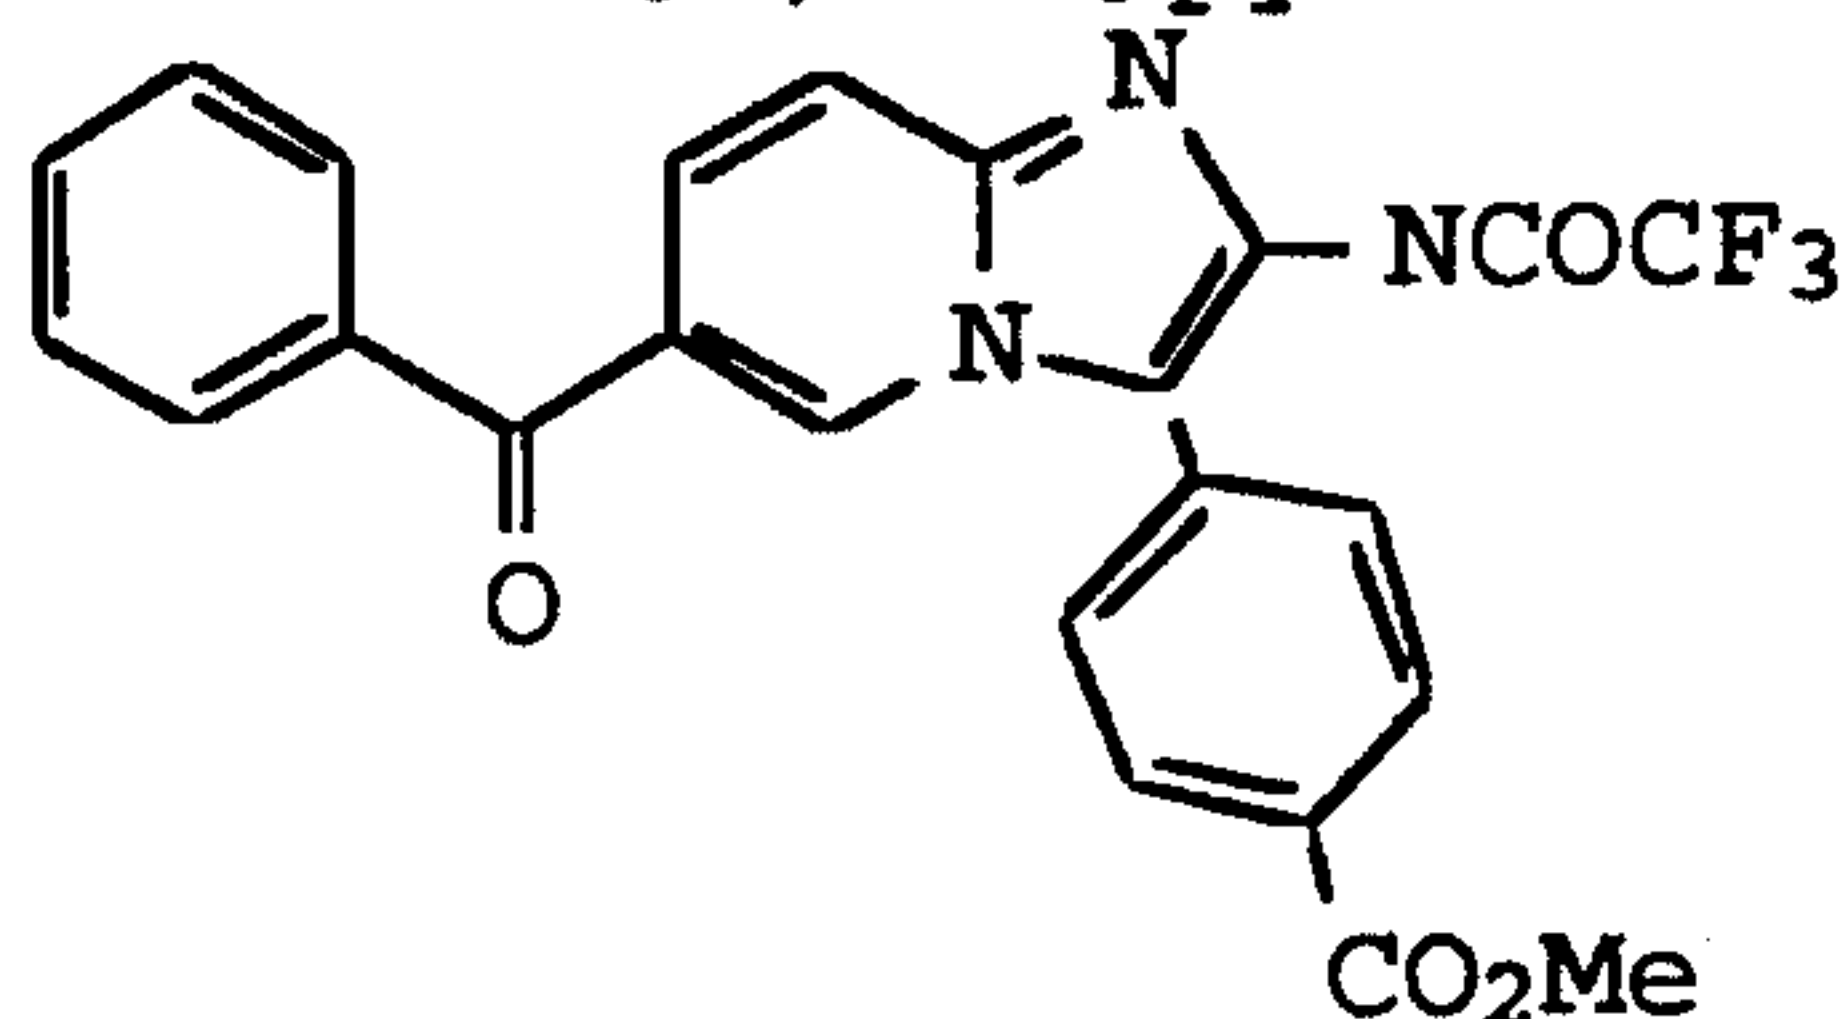


15 The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2-methoxyphenyl]-carbamoylmethyl)-pyridine (15.5 g, 28.5 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 12.6 g. (94.5%). EA, MS (FD).

Example 32

20

2-Trifluoroacetamido-3-(4-nitrophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

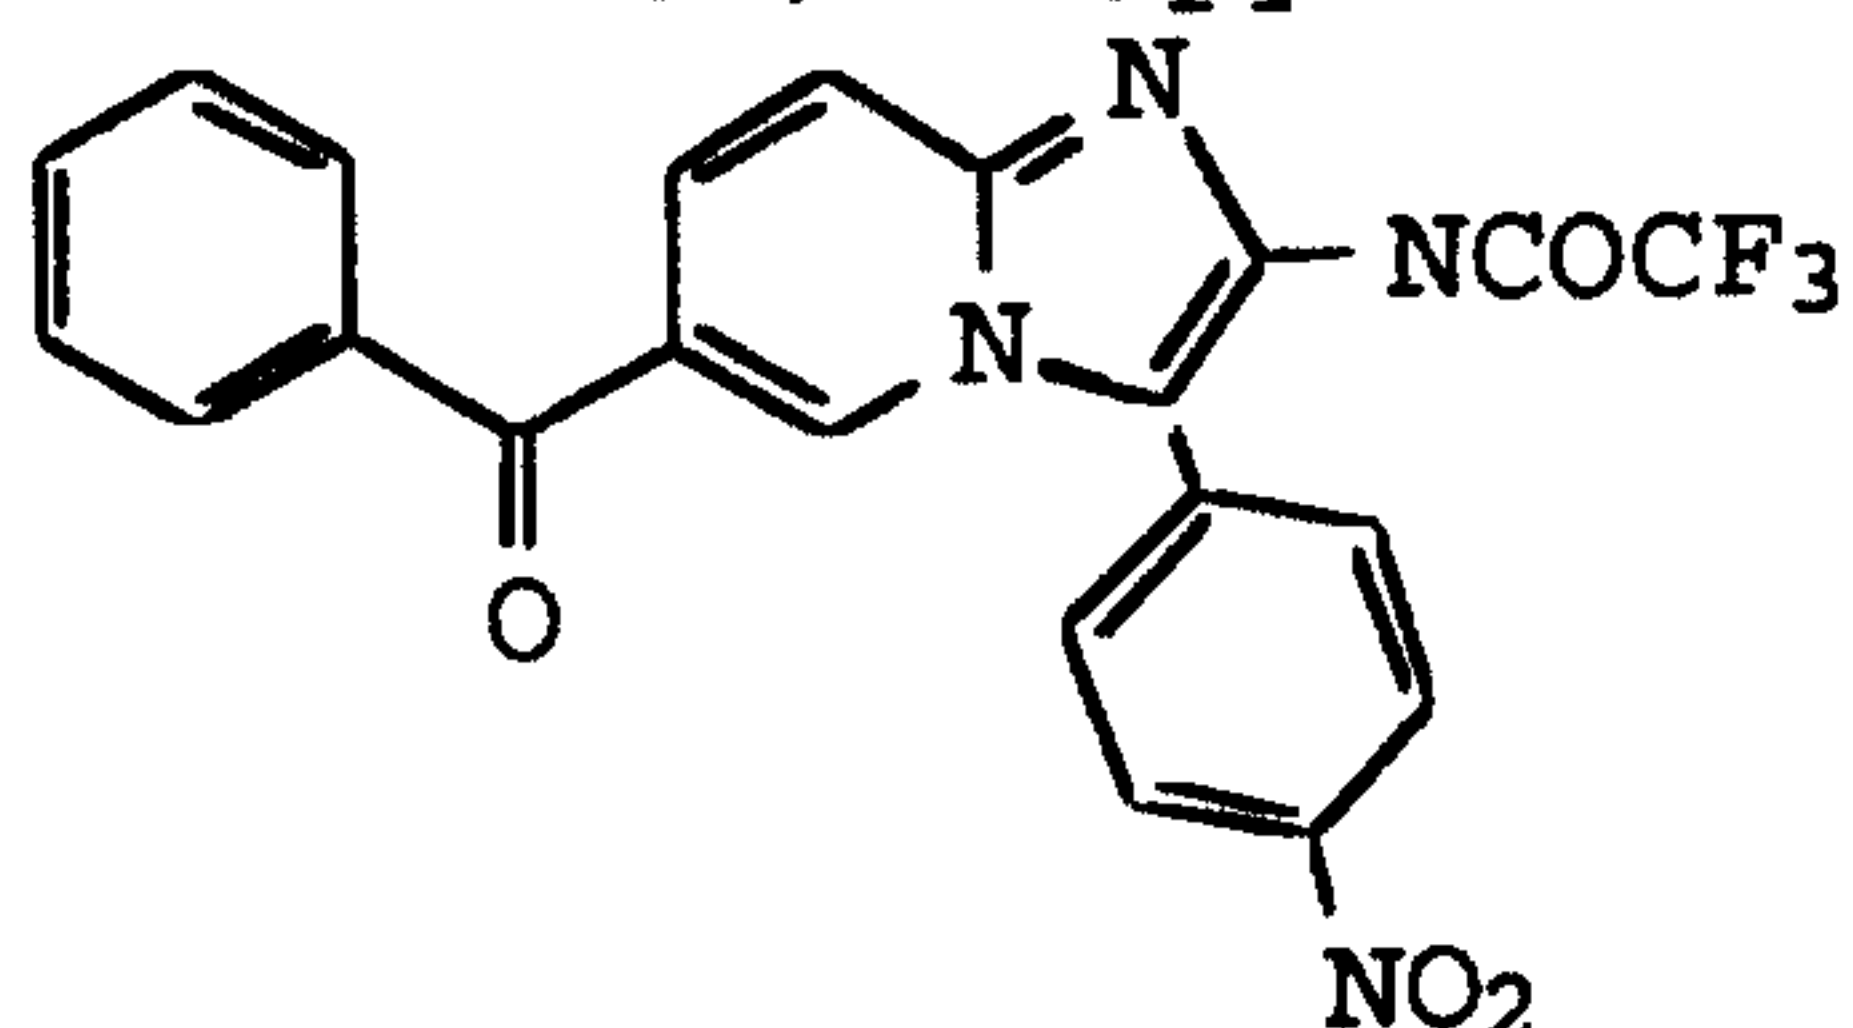

25 The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-[2-methoxyphenyl]-carbamoylmethyl)-pyridine (15.3 g, 28.9 mmol) was converted to product in a manner substantially


-76-

analogous to Example 1 to yield 11.2 g. (85.1%). EA, MS (FD).

Example 33

2-Trifluoroacetamido-3-benzyl-6-benzoyl-imidazo[1,2-
a]pyridine

5

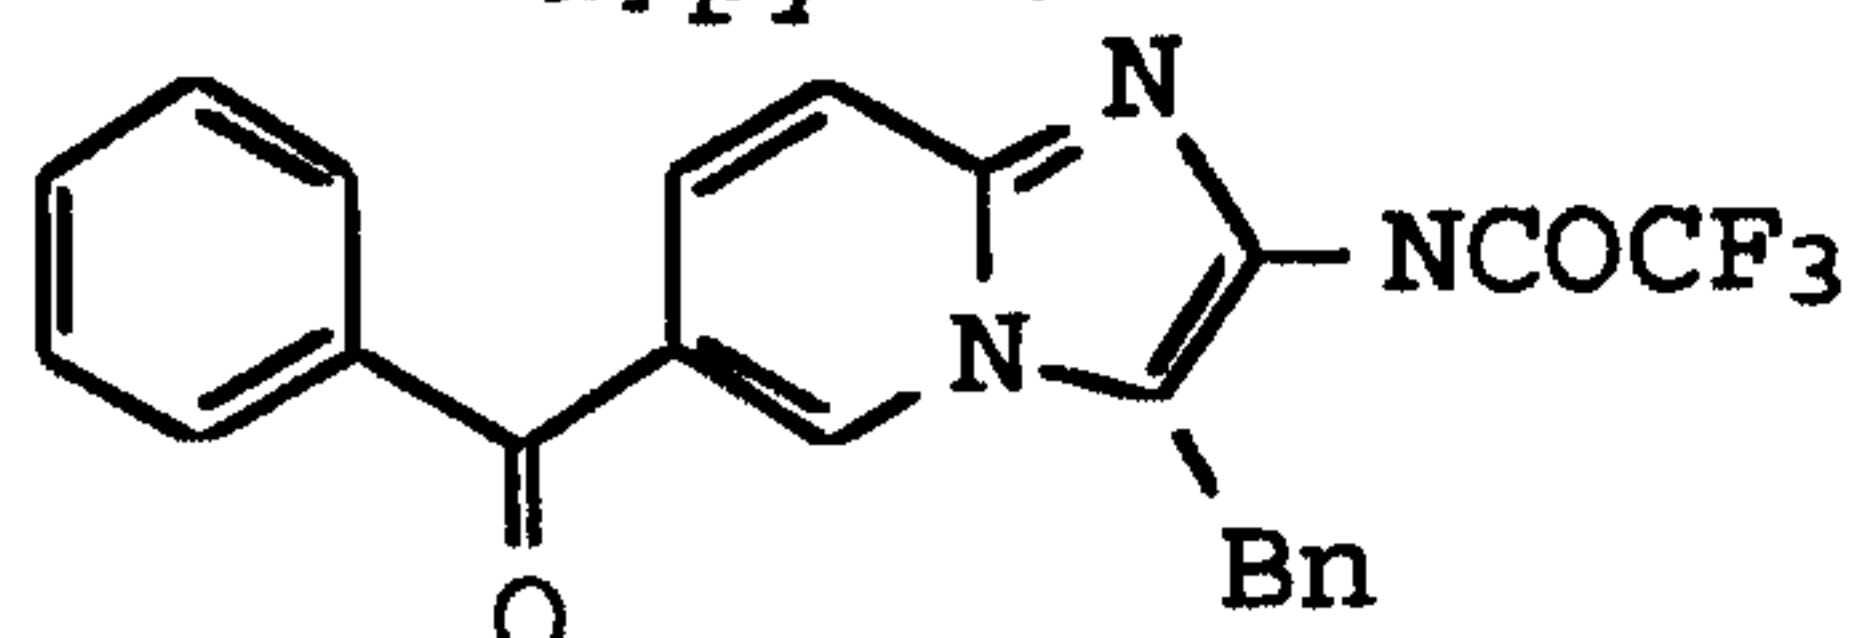


The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-benzyl-carbamoylmethyl)-pyridine (3.44 g, 6.89 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 2.19 g. (74.0%). EA, MS (FD).

10

Example 34

2-Trifluoroacetamido-3-isobutyl-6-benzoyl-imidazo[1,2-
a]pyridine

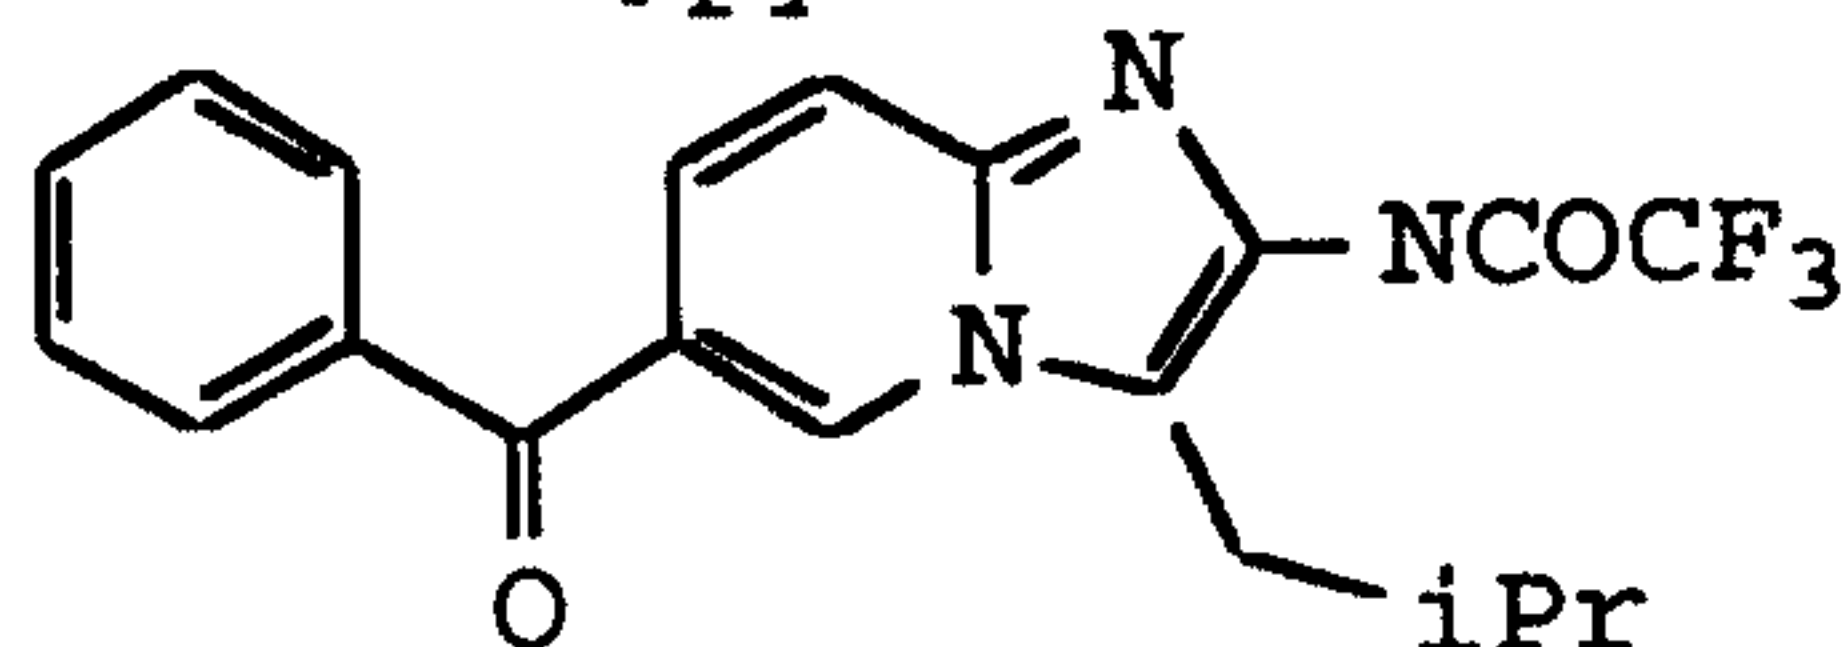


The 1,2-dihydro-2-toluenesulfonylimido-5-benzoyl-N-(1-isobutyl-carbamoylmethyl)-pyridine (3.30 g, 7.09 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 2.37 g. (85.9%). EA, MS (FD).

15

Example 35

2-Trifluoroacetamido-3-(4-fluorophenyl)-6-(4-fluorobenzoyl)-imidazo[1,2-a]pyridine

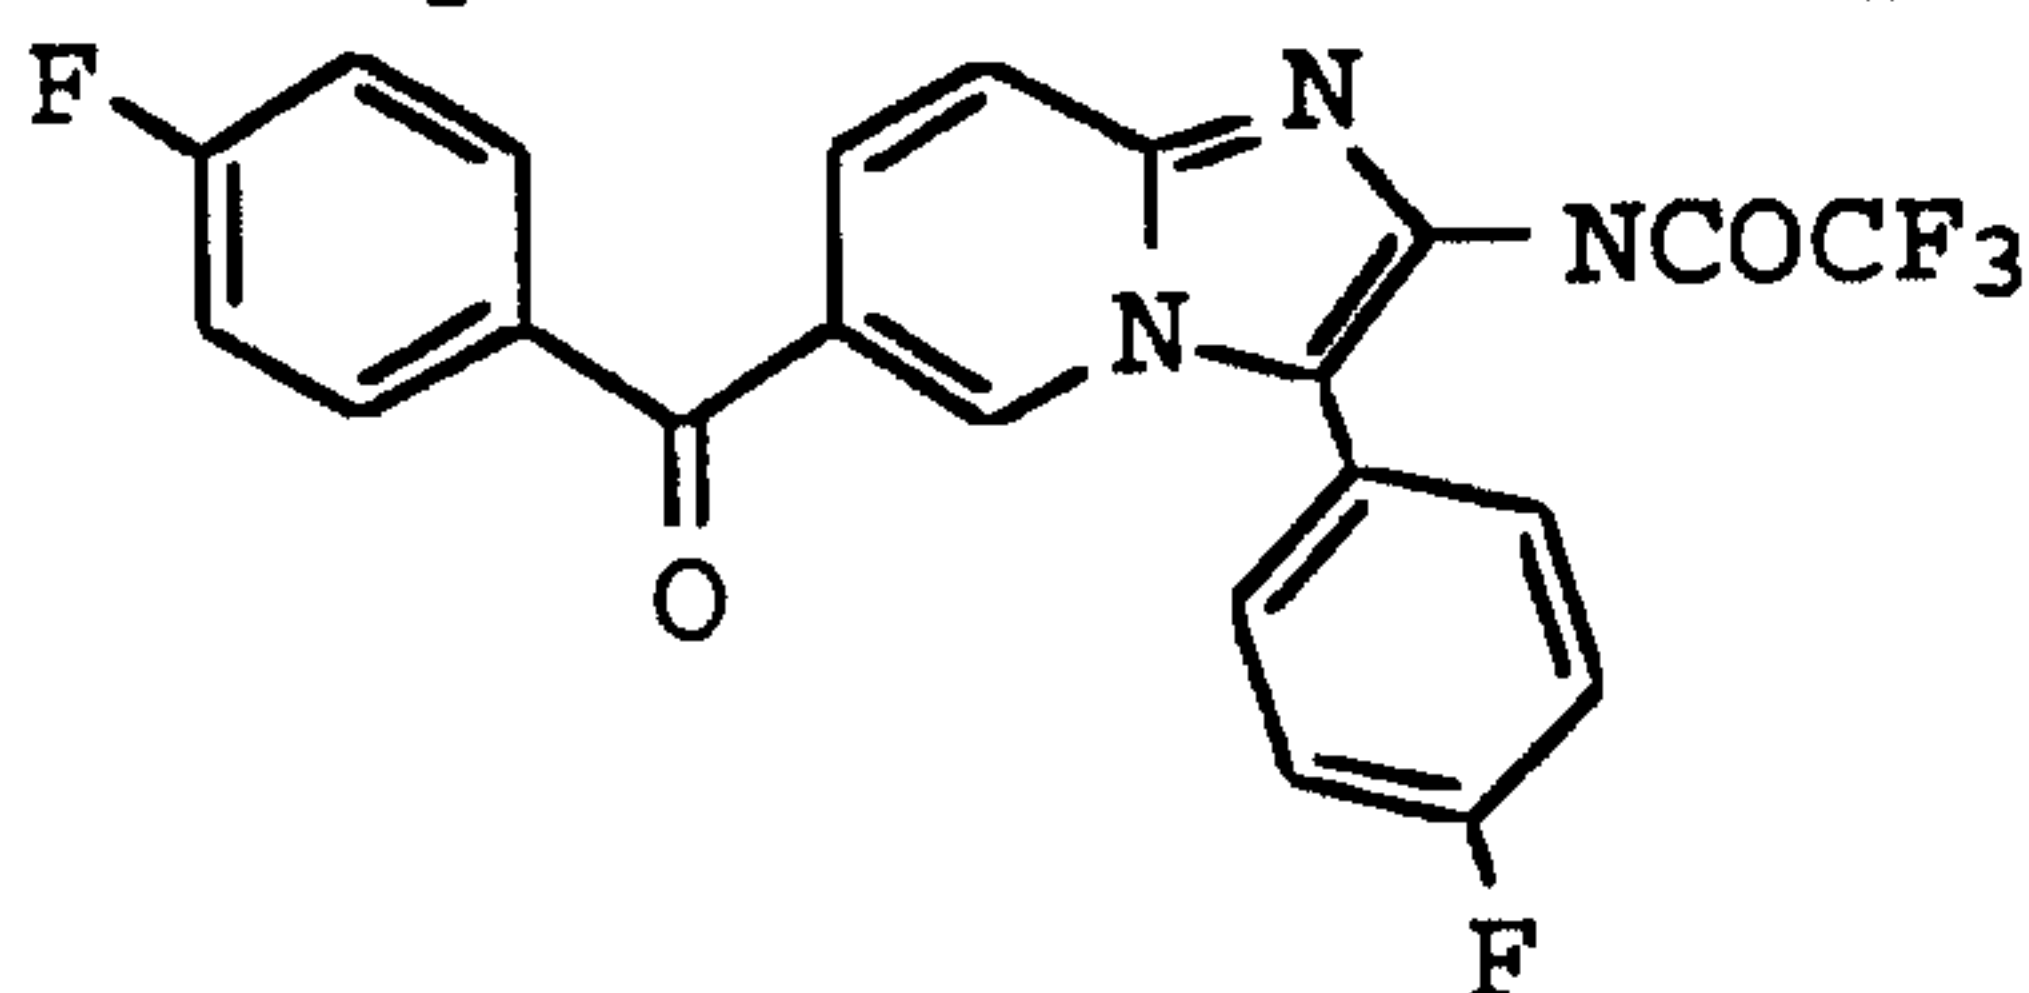

The 1,2-dihydro-2-toluenesulfonylimido-5-(4-fluorobenzoyl)-N-(1-[4-fluorophenyl]-carbamoylmethyl)-pyridine (9.15 g, 17.6 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 7.11 g. (91%). EA, MS (FD).


20

25

Example 36

- 77 -

2-Trifluoroacetamido-3-(2-fluoro-4-trifluoromethylphenyl)-6-(4-fluorobenzoyl)-imidazo[1,2-a]pyridine

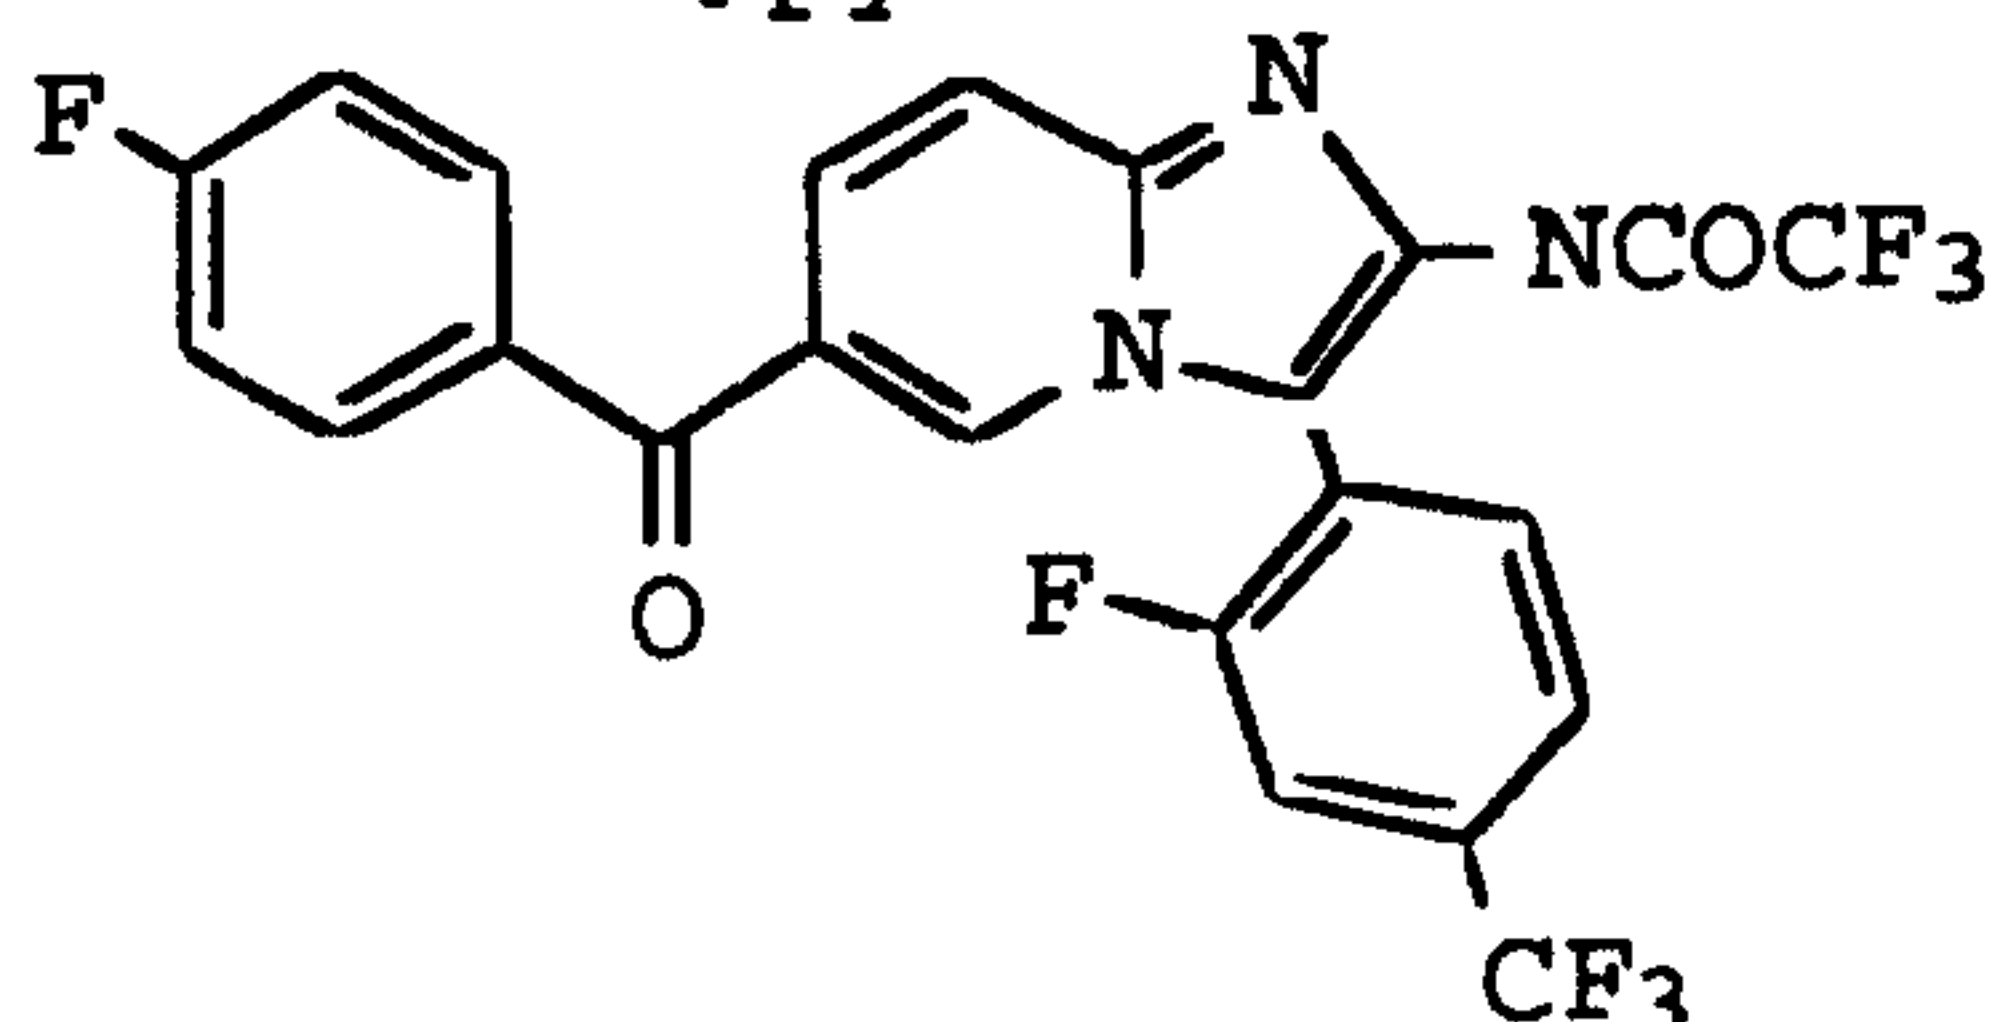


5 The 1,2-dihydro-2-toluenesulfonylimido-5-(4-fluorobenzoyl)-N-(1-[2-fluoro-4-trifluoromethylphenyl]-carbamoylmethyl)-pyridine (8.95 g, 15.2 mmol) was converted to product in a manner substantially analogous to Example 1 to yield 6.75 g. (87%). EA, MS(FD).

10

Example 37

2-Trifluoroacetamido-6-benzoyl-imidazo[1,2-a]pyridine

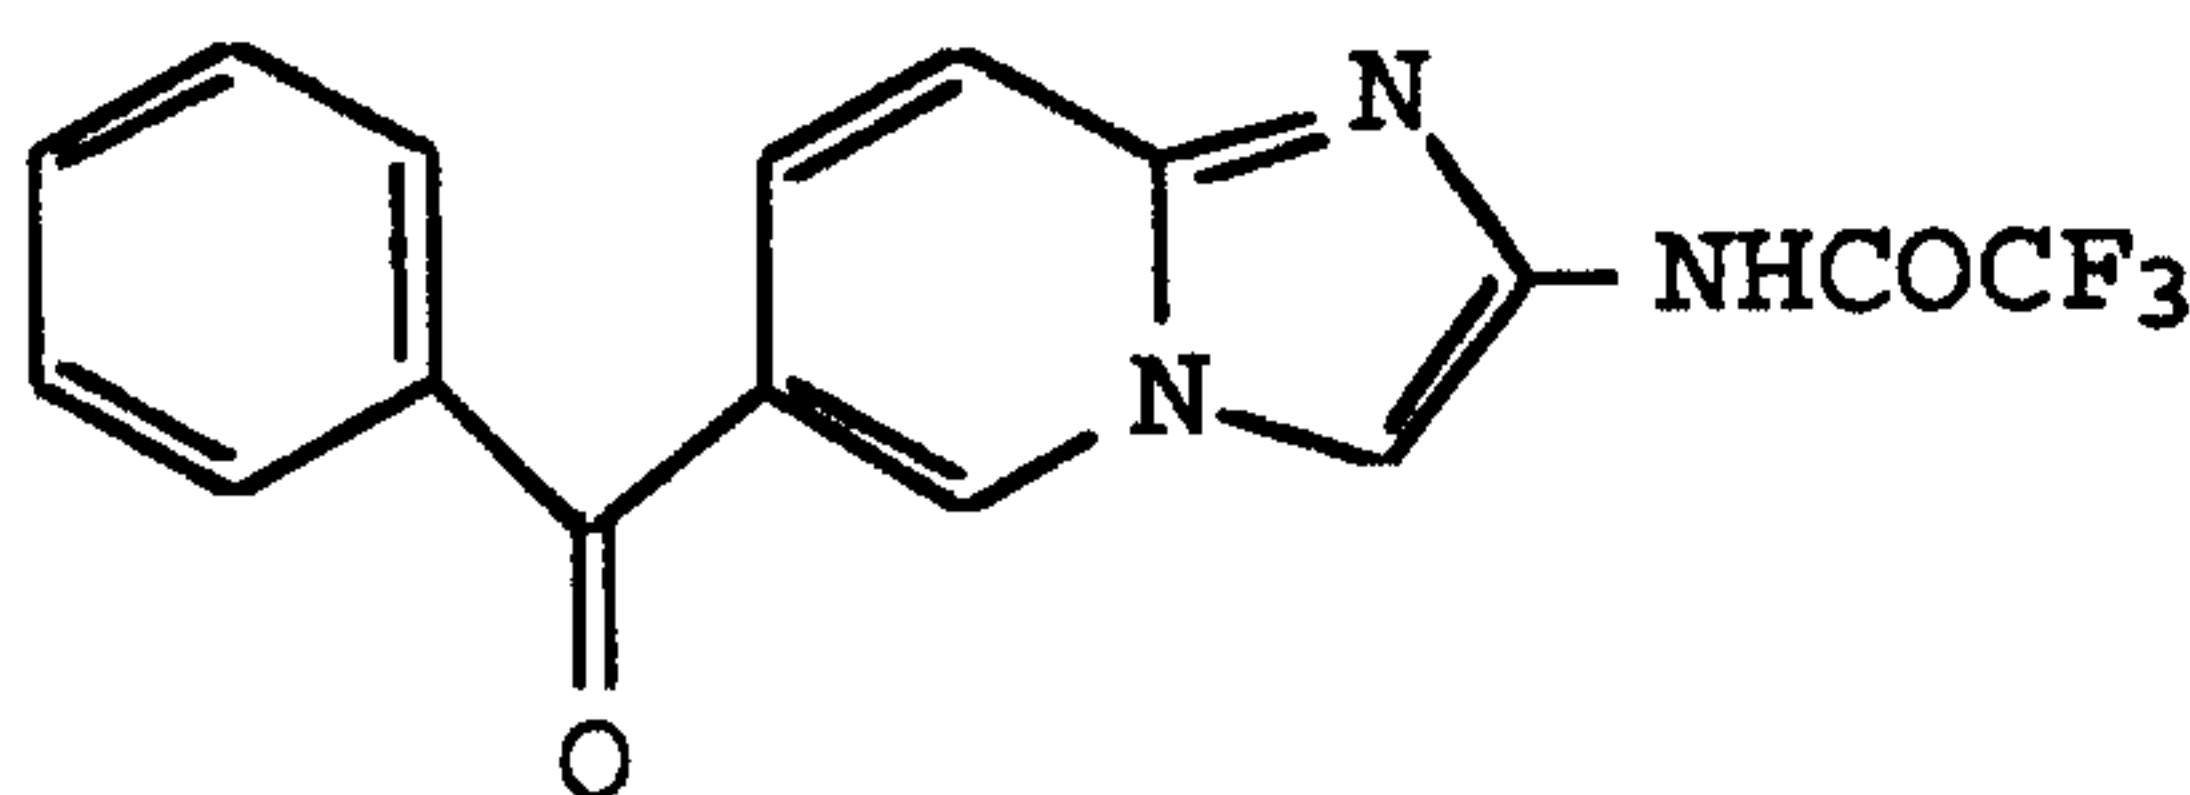


To a suspension of 1-carbamoylmethyl-1,2-dihydro-2-toluenesulfonimido-6-benzoylpyridine (7.15 g, 17.46 mmol) in 85 ml of dry CH₂Cl₂ was added trifluoroacetic anhydride (62 ml, 439 mmol). The mixture was stirred for 2.5 hours at 30°C under an argon atmosphere. The solvents were removed in vacuo and the foam was taken-up in EtOAc (600 ml), then washed with NaHCO₃ (2 x 250 ml) and brine (1 x 250 ml). The organic layer was dried (Na₂SO₄) and the solvents were removed in vacuo to afford 5.5 g (92%) of product as a white solid. EIMS, NMR.

25

Example 38


2-Trifluoroacetamido-3-iodo-6-benzoyl-imidazo[1,2-a]pyridine

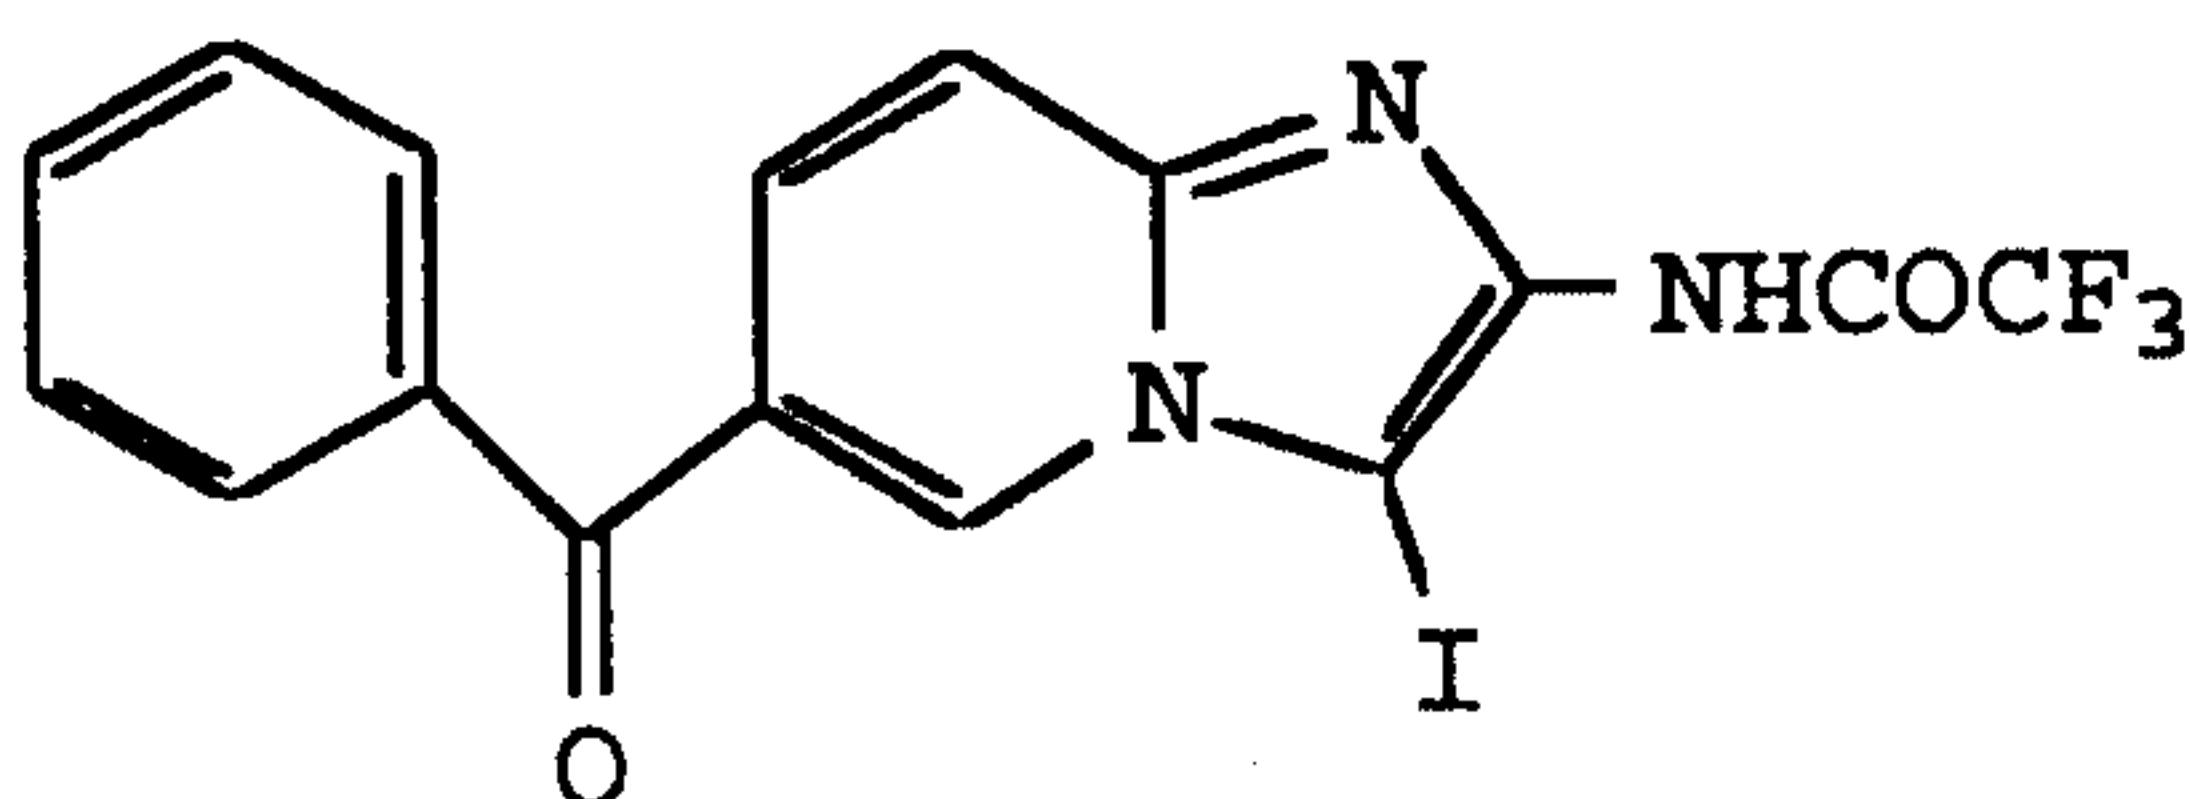

To a solution of 2-trifluoroacetamido-6-benzoyl-imidazo[1,2-a]pyridine (2.0 g, 6.0 mmol) in 50 ml of dry CH₃CN cooled at 0°C, was added N-iodosuccinimide (1.35 g, 6.0 mmol) portionwise. The mixture was stirred for 10 minutes. Acetonitrile was removed *in vacuo* and the residue was dissolved in EtOAc (250 ml), washed with NaHSO₃ (40% p/v, 2 x 200 ml) and NaHCO₃ (2 x 200 ml). The organic layer was dried (Na₂SO₄) and EtOAc was removed *in vacuo* to afford 2.60 g (95%) of product as a yellow solid. EIMS, NMR.

Example 39

2-Trifluoroacetamido-3-methylthio-6-benzoyl-imidazo[1,2-a]pyridine

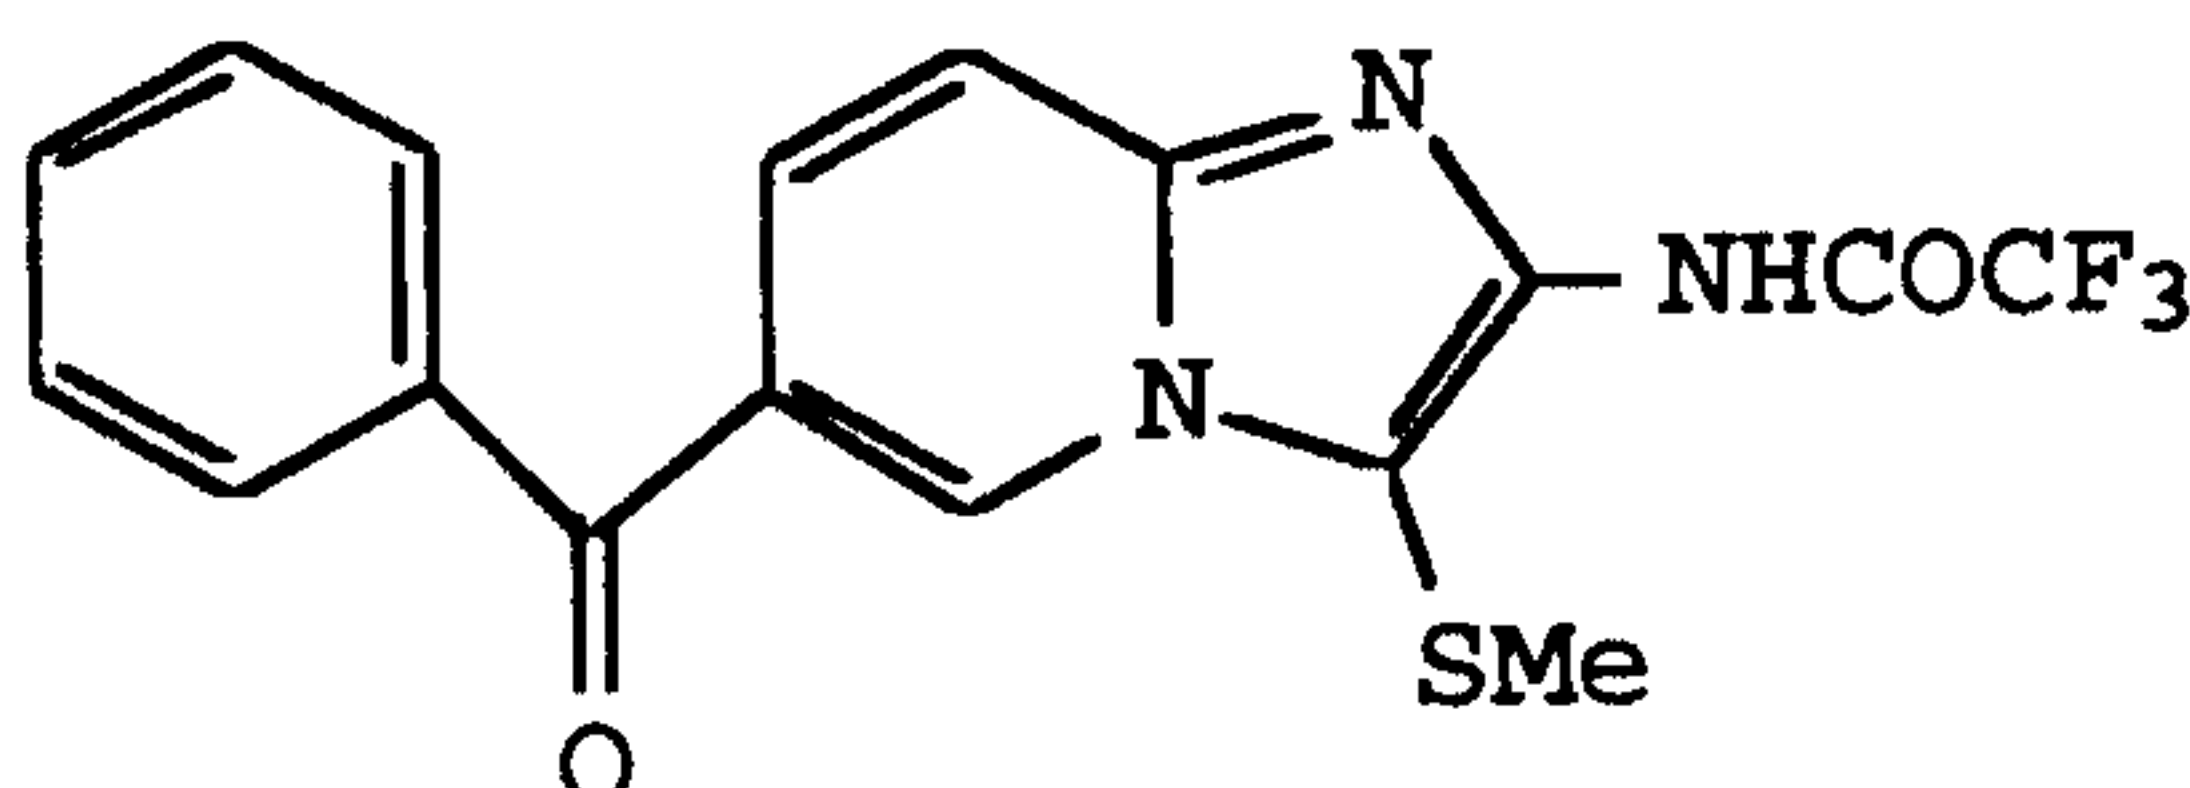


The 2-trifluoroacetamido-3-iodo-6-benzoyl-imidazo[1,2-a]pyridine (1.00 g, 2.17 mmol) was dissolved in 20 ml of pyridine (predried over KOH and then molecular sieve 3A, 0.04% H₂O) under argon atmosphere. Copper bronze (207 mg, 3.25 mmol) was added. To the golden suspension in brown solution was added methylidisulfide (160 µl, 2.17 mmol) via syringe. The reaction mixture was heated for 1 hour at 104°C then 68 hours at 100°C. The evolution of the reaction was followed by NMR (in each case, a sample was taken, hydrolyzed and washed with ammonia/NH₄Cl (1:9) before checking by NMR). When the reaction was complete, the reaction mixture was diluted in 3 L of EtOAc and stirred for 15 minutes. Two liters of NH₄OH/NH₄Cl 1:9 were added and the mixture was strongly stirred for 30 minutes in a 10 L funnel. The layers were separated and 2 L of NH₄OH/NH₄Cl (1:9) were added to the organic layer. The mixture was again stirred for 30 minutes and then left without stirring for 5 to 10 minutes. The layers were separated and the organic layer was washed with brine.

The organic layers were removed *in vacuo* and the resulting brown solid was subjected to a vary rapid column chromatography (MeOH/CH₂Cl₂, 2:98) to give 670 mg (81%) of a yellow solid. NMR.

5

Example 40

2-Trifluoroacetamido-3-methylsulfonyl-6-benzoyl-imidazo[1,2-a]pyridine

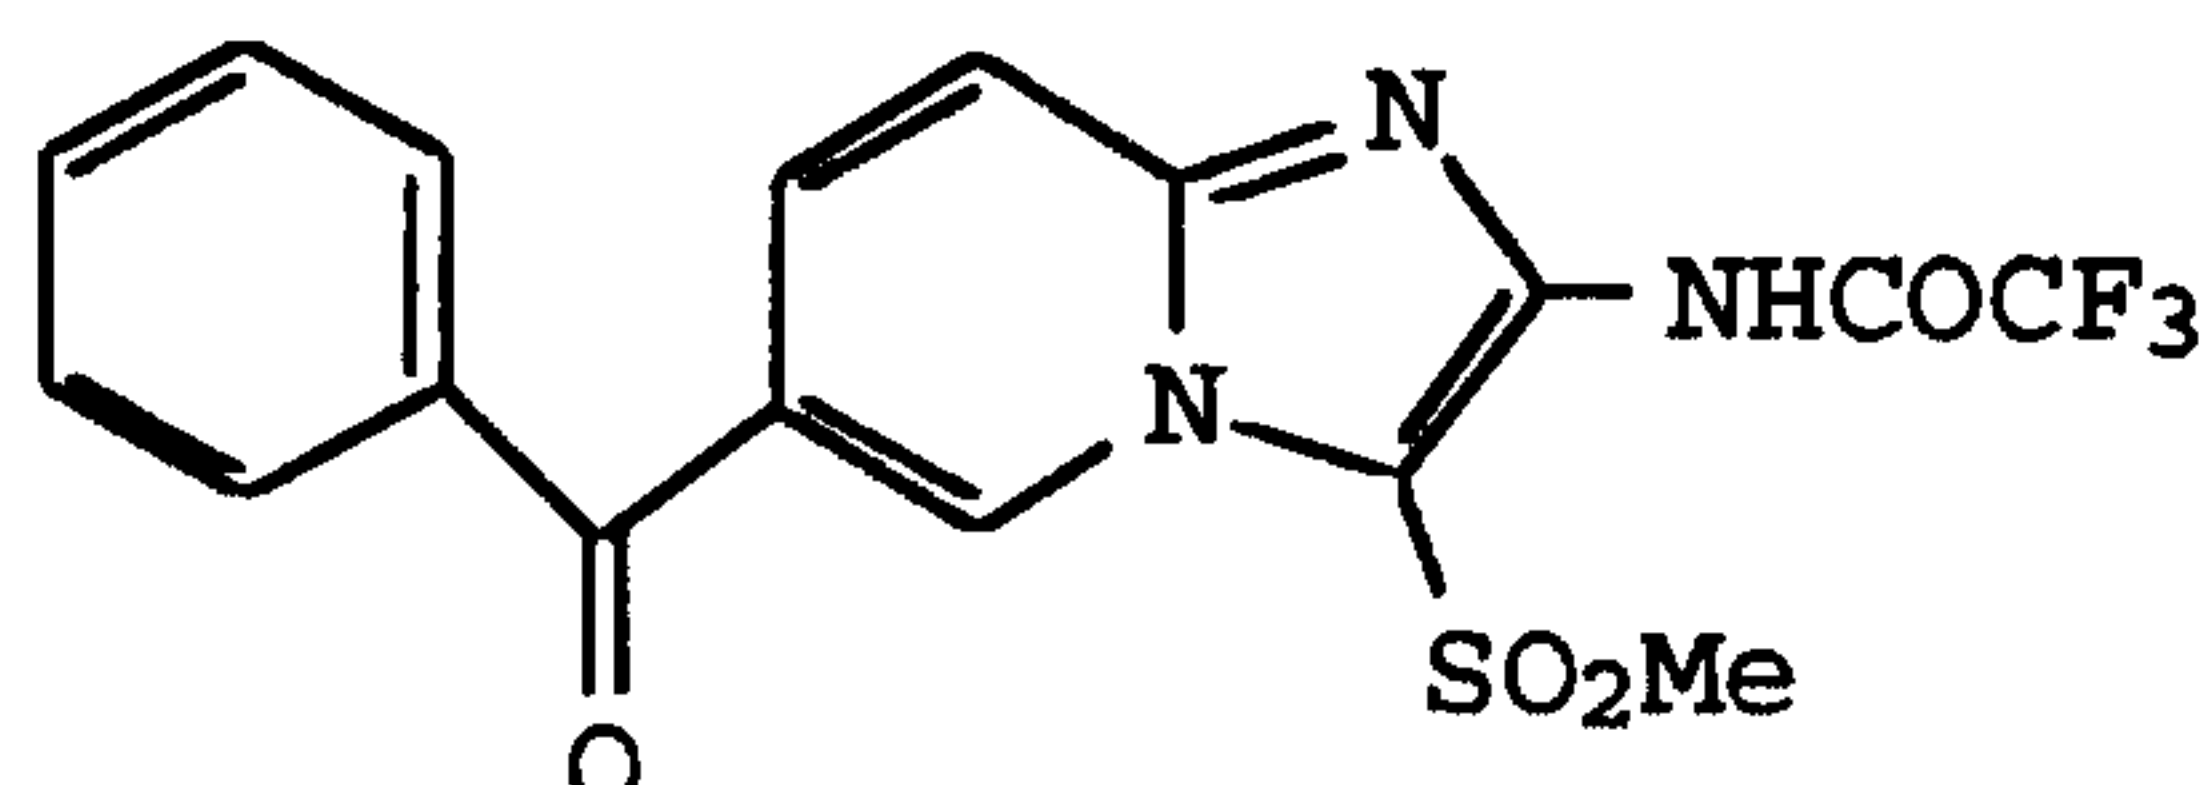


The 2-trifluoroacetamido-3-methylthio-6-benzoyl-imidazo[1,2-a]pyridine (500 mg, 1.37 mmol) was mixed with mCPBA (563 mg, 2.62 mmol) in 20 ml of dry CH₂Cl₂. The reaction mixture was stirred for 3 hours at 0°C and then washed with 1 ml of saturated NaHCO₃. The mixture was filtered through celite and washed with EtOAc. The filtrate was removed *in vacuo* and the residue was purified by column chromatography to yield 385 mg (67%) of a white yellow solid. NMR.

15

Example 41

2-Trifluoroacetamido-3-isopropylthio-6-benzoyl-imidazo[1,2-a]pyridine

20

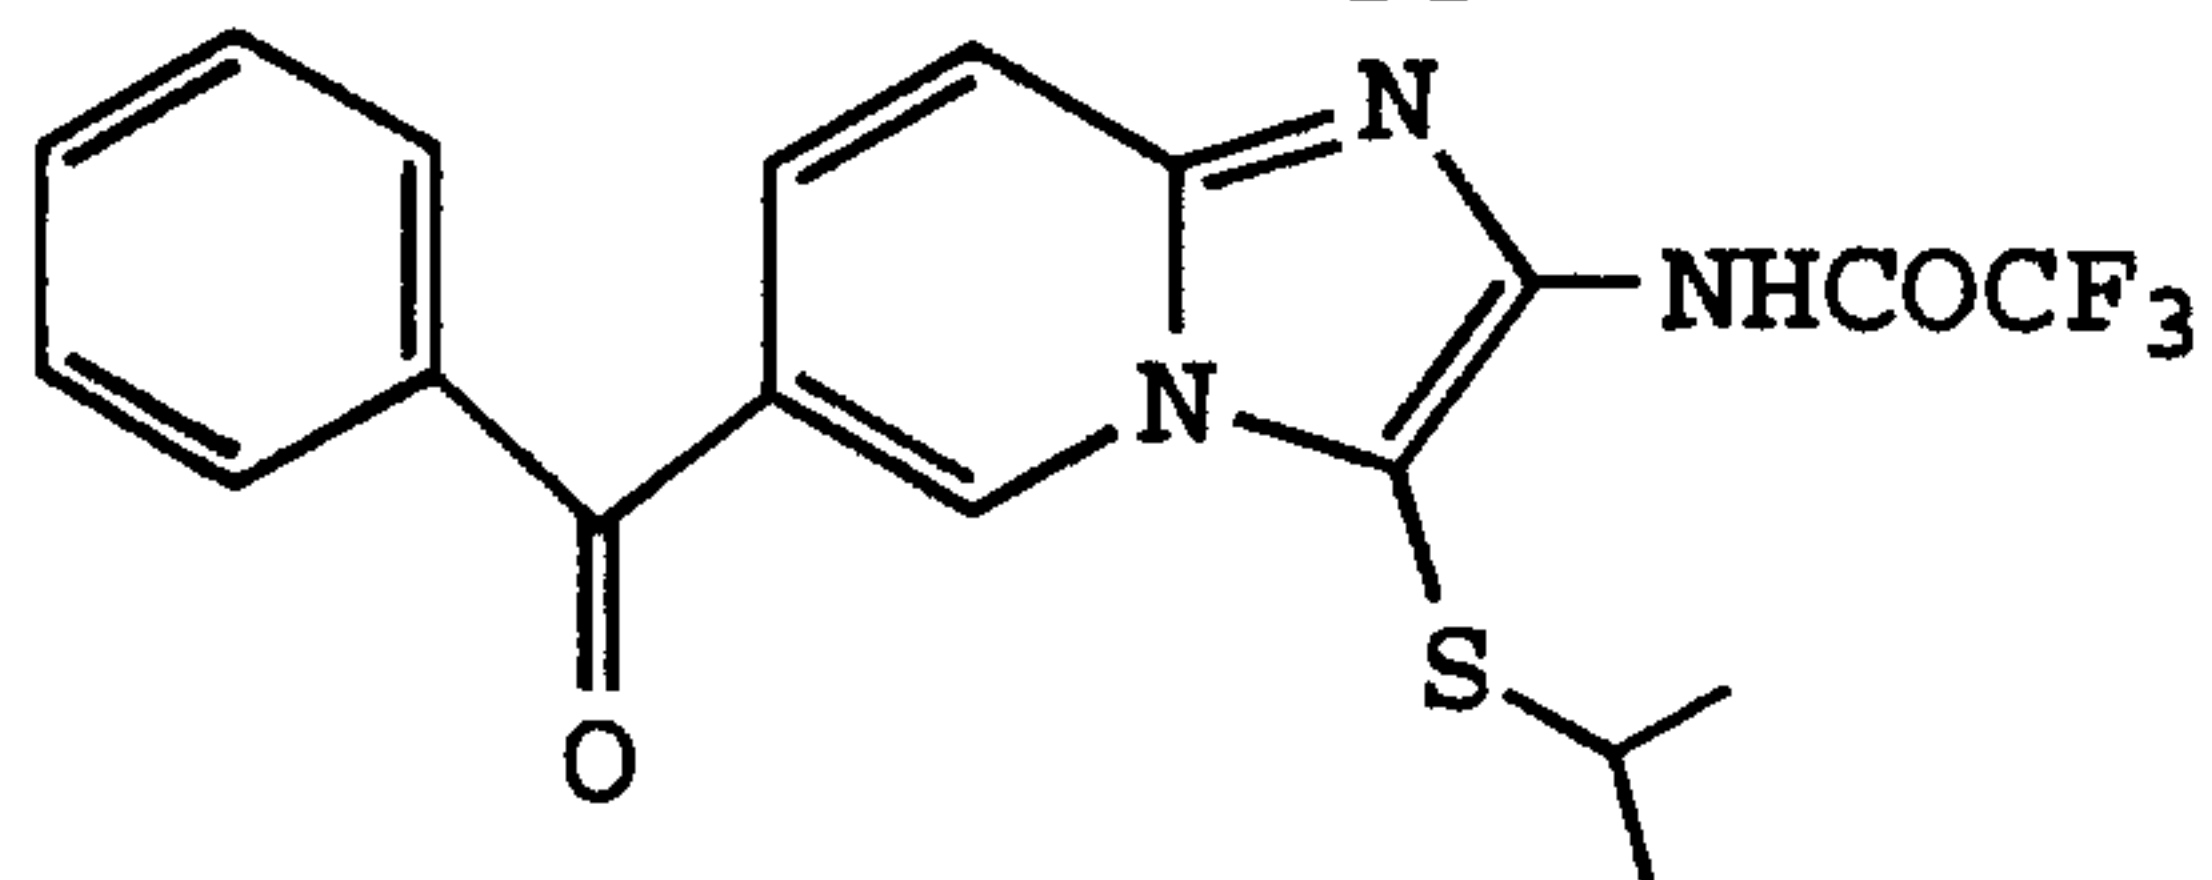

The 2-trifluoroacetamido-3-iodo-6-benzoyl-imidazo[1,2-a]pyridine (100 mg, 0.22 mmol) was dissolved in dry pyridine (10 ml) at RT under an argon atmosphere. Copper bronze (21 mg, 0.33 mmol) was added followed by diisopropyl disulfide (35 μ l, 0.22 mmol). The mixture was stirred and heated at 100-102°C for 83 hours. The reaction was cooled to RT, poured onto 1 L of EtOAc and stirred for 1 hour. A 9:1 solution of NH₄Cl/NH₄OH (750 ml) was then added and the mixture stirred for 15 minutes with a mechanical stirrer. The aqueous layer turned


25

30

light-blue and the organic extract was washed again with 750 ml of the 9:1 $\text{NH}_4\text{Cl}/\text{NH}_4\text{OH}$ solution (15 minutes) followed by brine (750 ml). The EtOAc was removed *in vacuo* and the residue was purified by flash chromatography (EtOAc:Hexane 1:1). The product was obtained as a brown oil in 20% yield (18 mg). ^1H -NMR, ^{13}C -NMR.

Example 42

2-Trifluoroacetamido-6-[(*E*)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

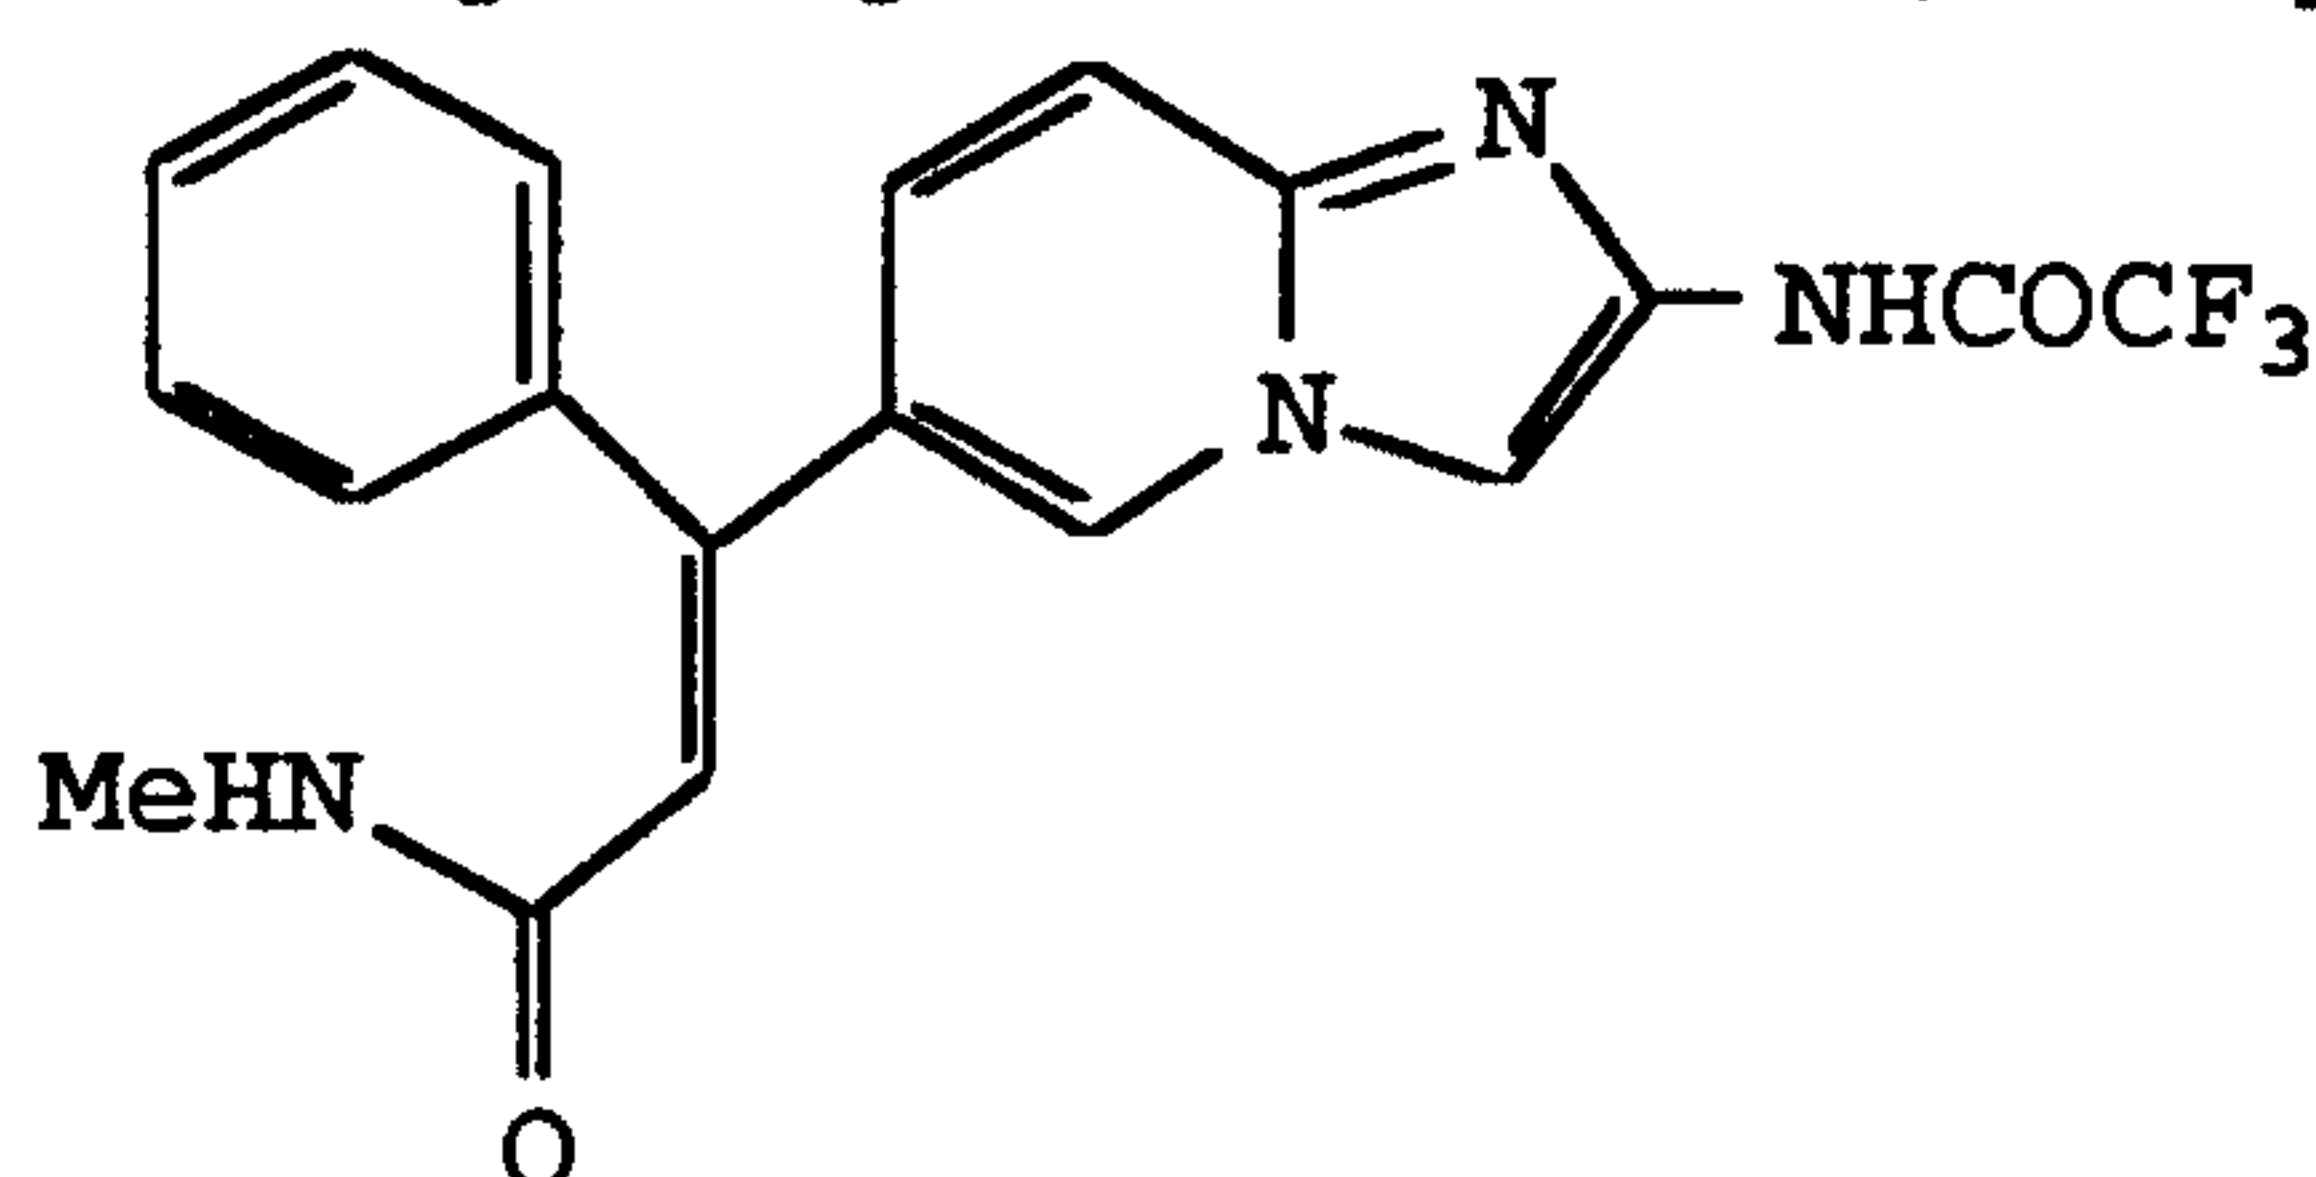


The diethyl-(N-methylcarbamoylmethyl)phosphonate (1.88 g, 9.00 mmol) and 250 mL of dry THF were placed in a flame dried flask under an argon atmosphere. The solution was cooled to -78°C before the dropwise addition of potassium hexamethyldisilazide (30 mL, 22.5 mmol; 0.5M in toluene). The mixture was stirred for 2 hours at -78°C . A solution of 2-trifluoroacetamido-6-benzoyl-imidazo[1,2-a]pyridine (2.00 g, 6.00 mmol) in 100 mL of dry THF was added dropwise. The reaction mixture was stirred at -78°C for 2 hours and then allowed to warm to room temperature. The resulting brown solution was stirred at RT for 60 hours. The THF was removed *in vacuo* and the residue was taken up in 400 mL of EtOAc and washed with saturated NH_4Cl (2 x 100 mL) and once with brine. After drying over MgSO_4 , the solvents were removed *in vacuo* to give a brown solid. NMR analysis of the crude showed only the "E" isomer along with some other side products that were not identified. The crude was purified by column chromatography $\text{CH}_3\text{CN}:\text{CH}_2\text{Cl}_2$ (2:1) to give 920 mg (40%) of product. EIMS, NMR.

Example 43

- 81 -


2-Trifluoroacetamido-3-iodo-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

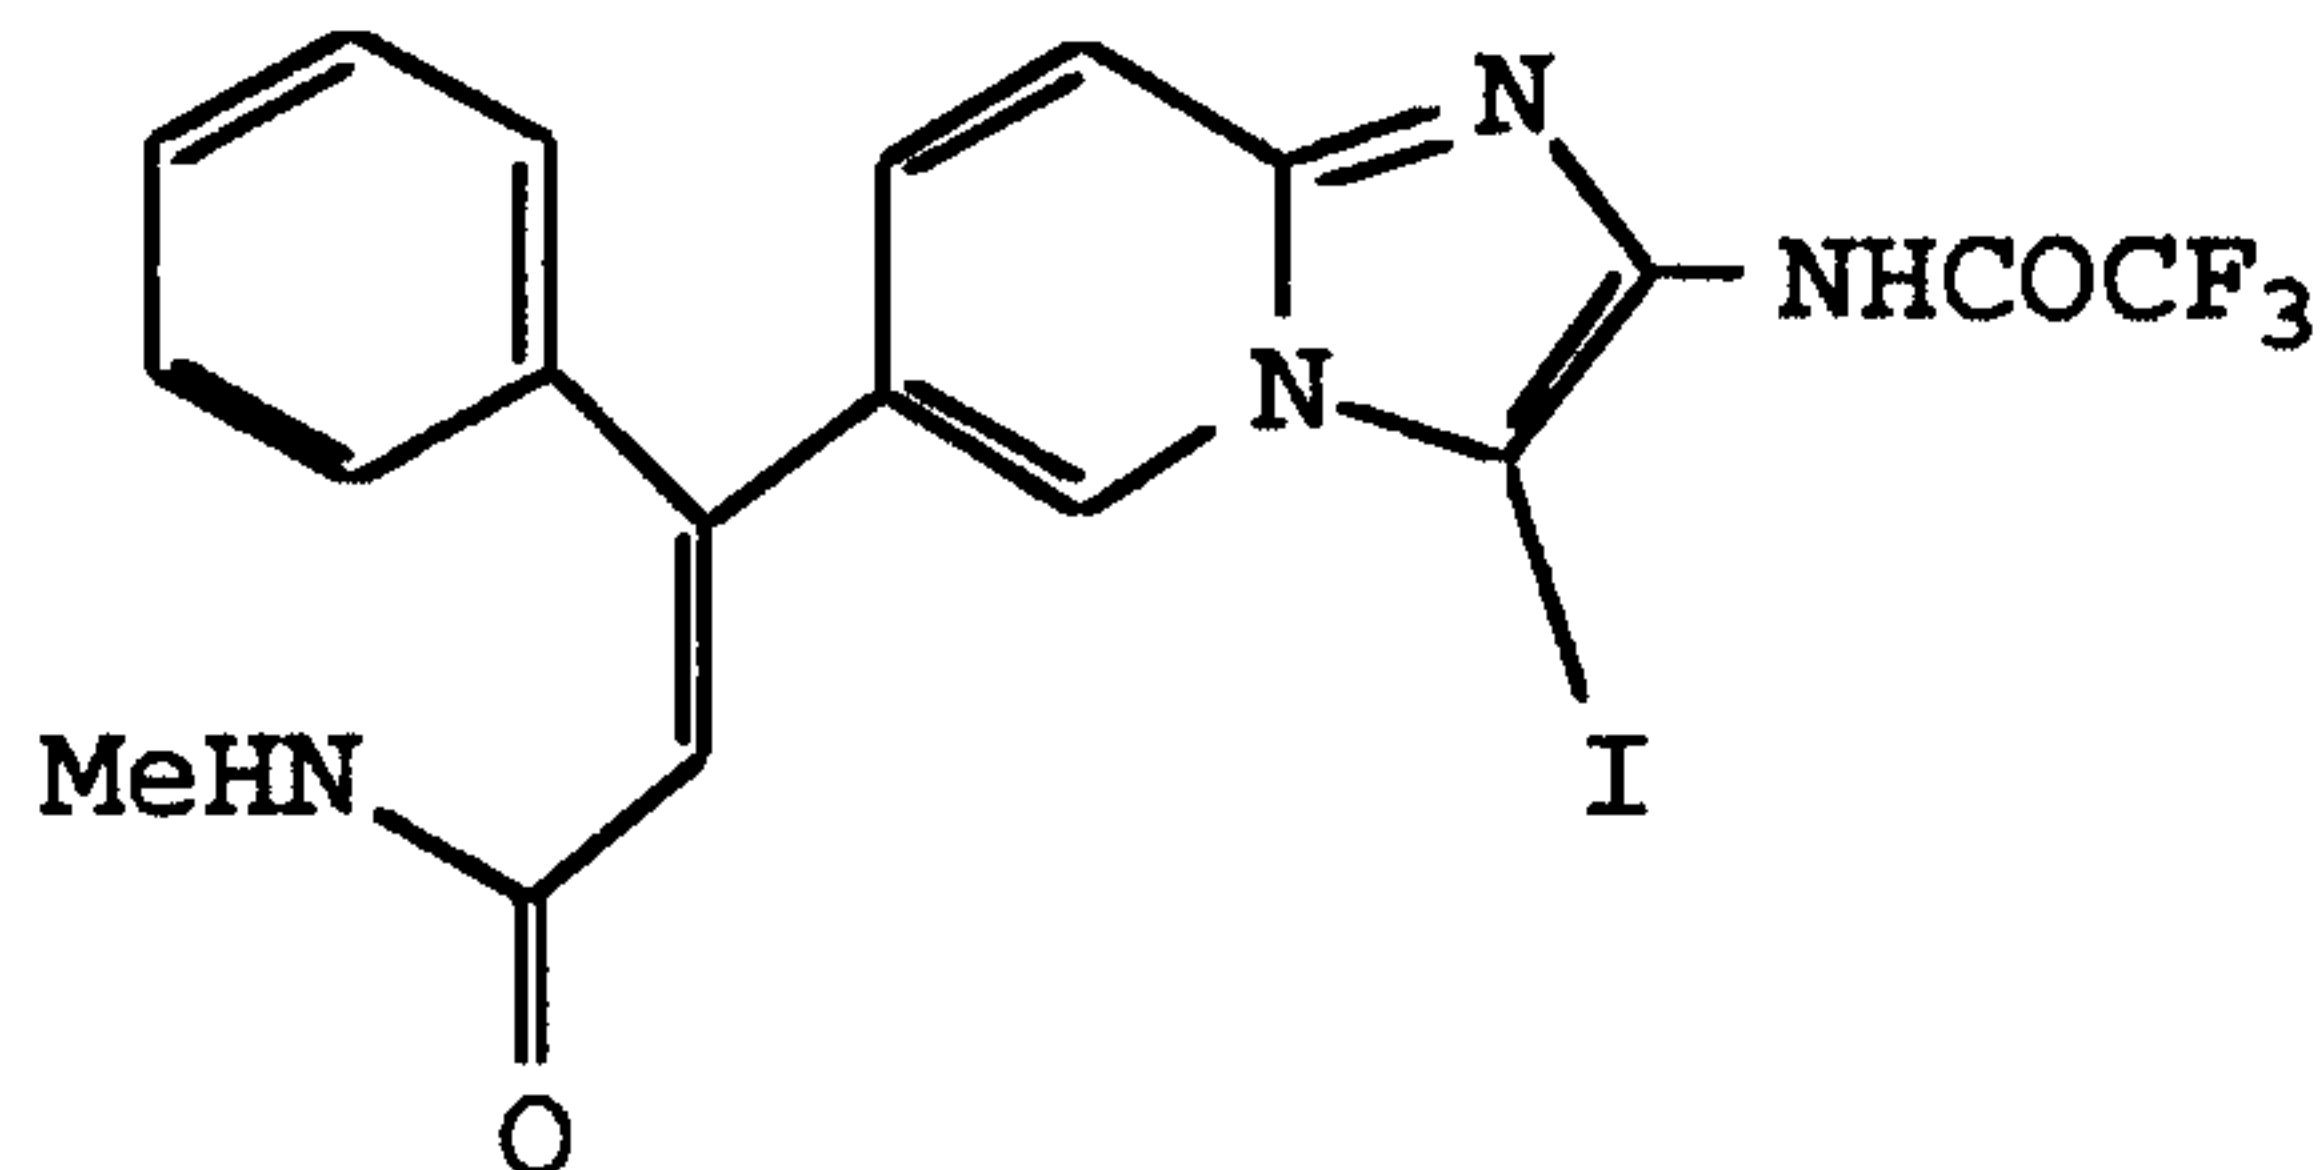

To a solution of 2-trifluoroacetamido-6-[(E)-2-N-methylcarbamoyl-1-phenylvinyl]-imidazo[1,2-a]pyridine (423 mg, 1.22 mmol) in 20 ml of dry CH₃CN cooled at 0°C, was added N-iodosuccinimide (1.34 mmol, 302 mg) portionwise and the mixture was stirred for 10 minutes. The desired product precipitates as a white solid which is filtered and air-dried affording 375 mg of crude product. The CH₃CN was removed *in vacuo* and the residue dissolved in EtOAc (50 ml). The EtOAc was washed with NaHSO₃ (40% p/v) (2 x 50 ml) and NaHCO₃ (2 x 50 ml). The organic layer was dried (Na₂SO₄) and the EtOAc removed *in vacuo*, affording 240 mg (98% overall yield) of product as a white solid. EIMS, NMR.

Example 44

2-Trifluoroacetamido-3-isopropylsulfonyl-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

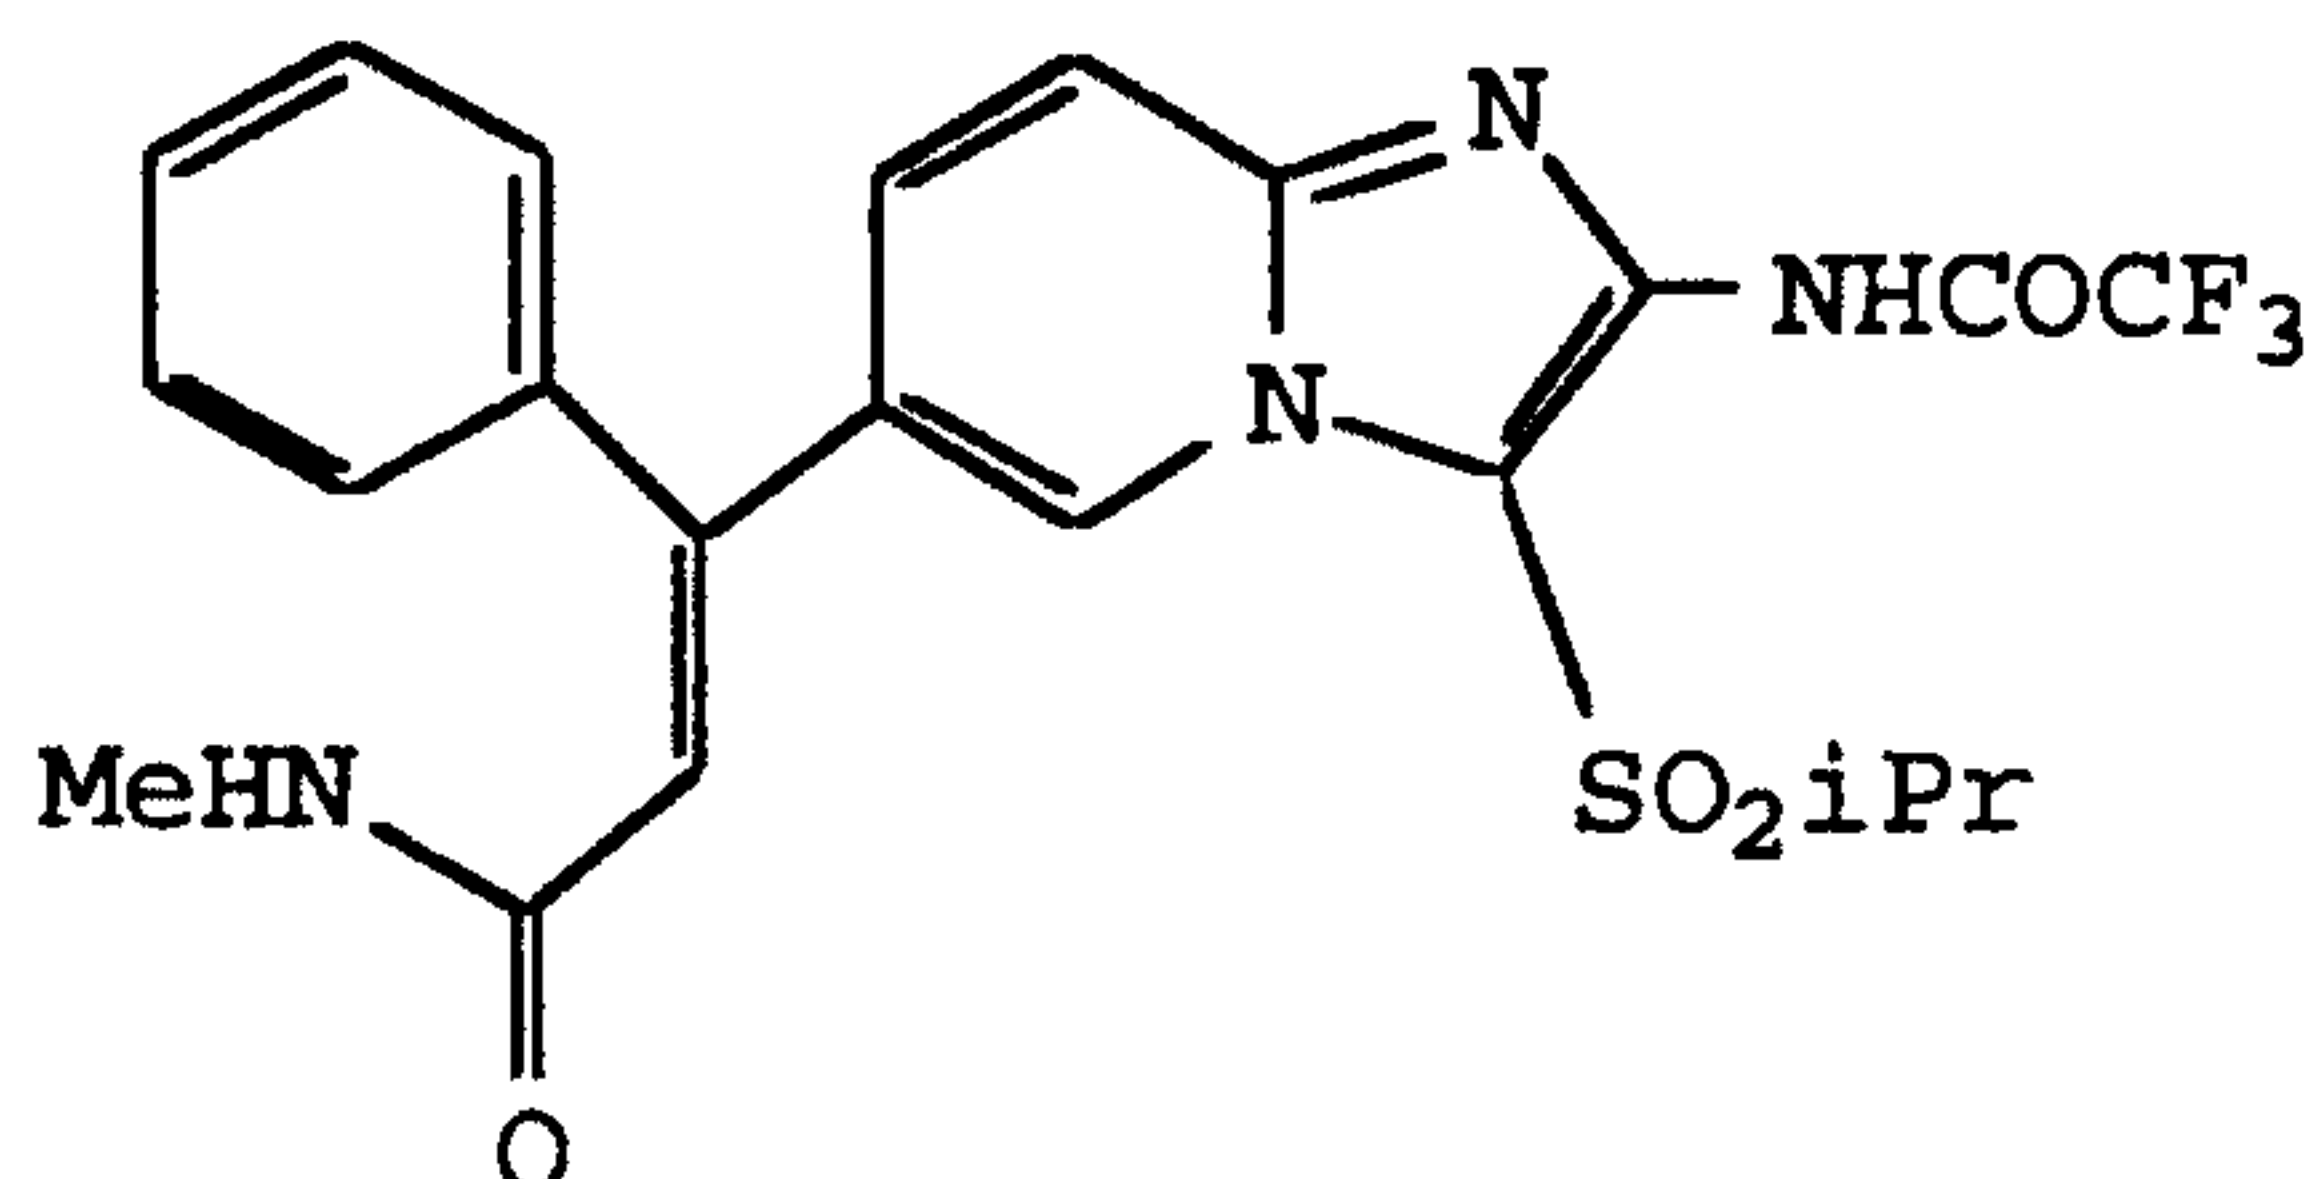


20

To a solution of 2-trifluoroacetamido-3-iodo-6-[(E)-2-N-methylcarbamoyl-1-phenylvinyl]-imidazo[1,2-a]pyridine (70 mg, 0.15 mmol) in 5 ml of THF cooled to -78°C was added phenyl lithium (230 μl, 0.33 mmol) under an argon atmosphere. The reaction mixture was stirred for 3 minutes before injecting t-butyl lithium (310 μl, 0.38 mmol). After stirring for a 10 minute period, a solution

of isopropyl isopropanethiol-sulfonate (109 mg, 0.60 mmol) in 5 ml of THF was added. The reaction mixture was stirred for 30 minutes at -78°C and then quenched with 2 drops of H₂O and 10 ml of THF. Ethyl acetate (15 ml) was added and the mixture was allowed to warm to RT. The solution was filtered through celite and the solvents were removed in vacuo. The residue was then dissolved in dry CH₂Cl₂ (10 ml) and cooled to 0°C. Previously dried mCPBA (208 mg, 5 equiv. excess calculated over 100% theoretical yield of sulfide coupling product) dissolved in CH₂Cl₂ (40 ml) was then added dropwise until the starting material was completely converted to the sulfone (monitor by TLC). The solution was then washed with Na₂SO₃ (50 ml) and NaHCO₃ (2 x 50 ml). The organics were dried (Na₂SO₄) and the solvent removed in vacuo. The residue was purified by flash chromatography in silica gel (CH₃CN:CH₂Cl₂ 1:1) to give 47 mg of product as a white solid. (63%). NMR.

Example 45

20 2-Trifluoroacetamido-6-(2,3-difluorobenzoyl)-imidazo[1,2-a]pyridine

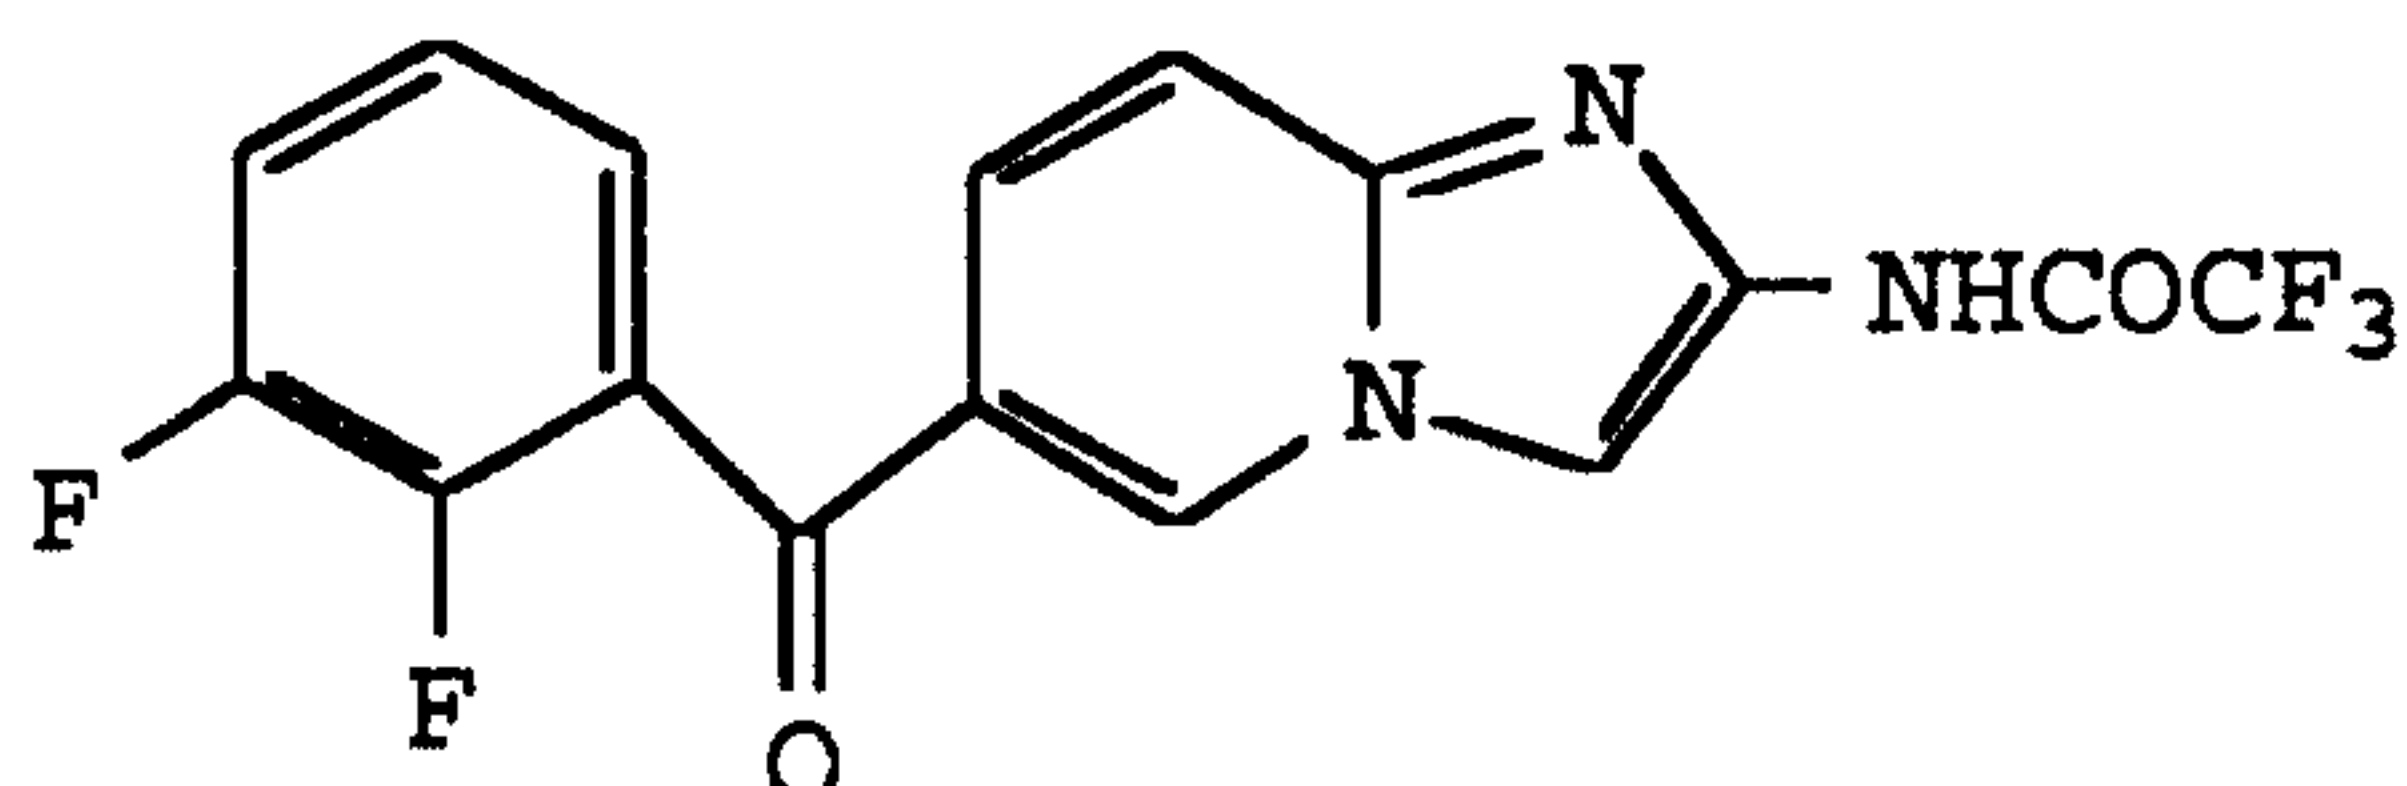


To a solution of 1-bromo-2,3-difluorobenzene (480 ml, 4.32 mmol) in THF was added n-butyl lithium (2.05 ml, 4.42 mmol) in 10 ml of dry THF at -78°C under an argon atmosphere. After 10 minutes stirring, a solution of 2-trifluoroacetamido-6-(N-methoxy-N-methylamido)-imidazo[1,2-a]pyridine (513 mg, 1.88 mmol) in THF (15 ml) was added dropwise. The reaction mixture was stirred at -78°C for 1 hour. NH₄Cl was then added and the reaction was extracted with EtOAc (25 ml) and washed with NH₄Cl (2 x 20 ml). The solvents were removed in vacuo and the residue was purified by flash chromatography on silica

gel (CH₂Cl₂:CH₃CN 2.5:1) affording 395 mg of product as a white solid. (57%). EIMS, NMR.

Example 46


2-Trifluoroacetamido-6-[(E)-1-(2,3-difluorophenyl)-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

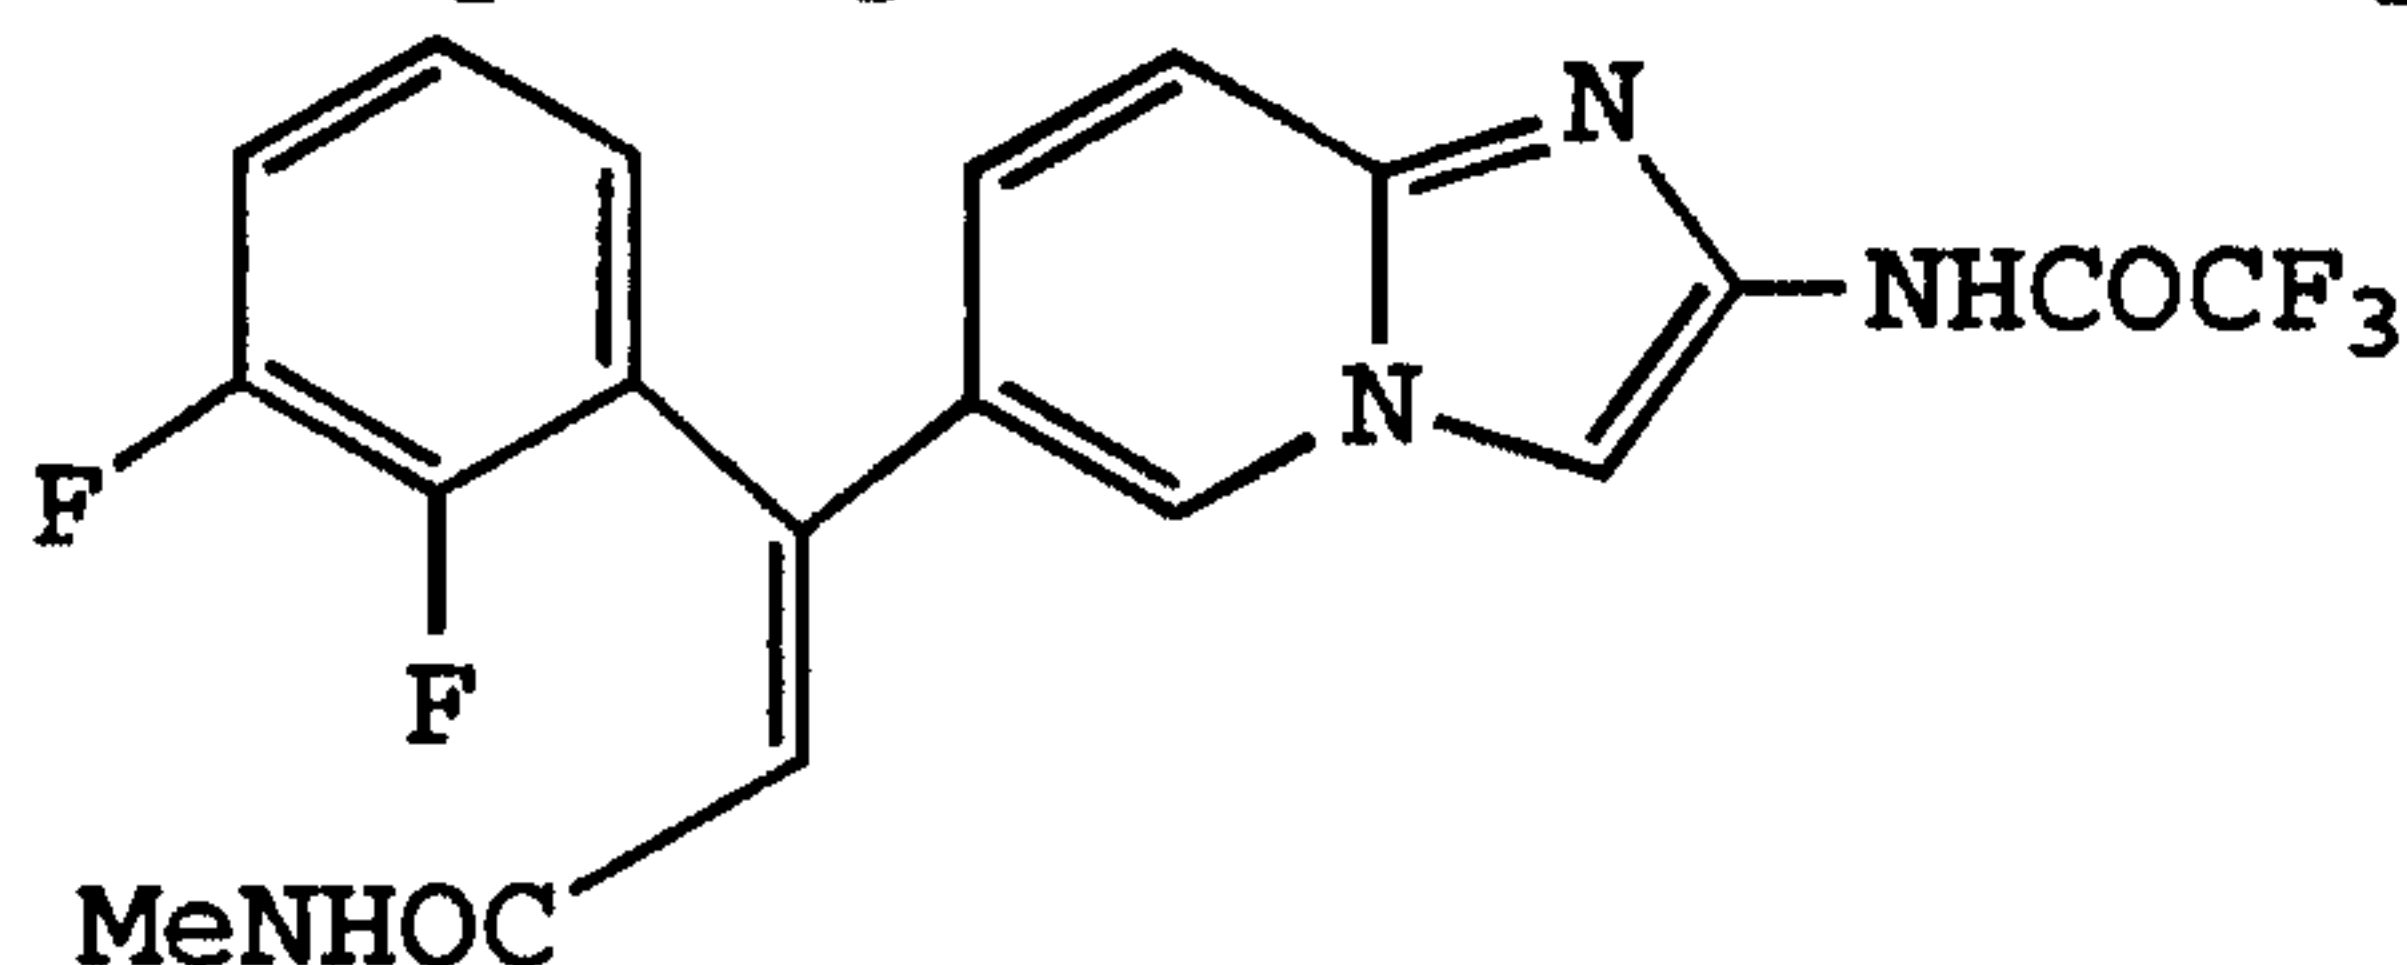

The 2-trifluoroacetamido-6-(2,3-difluorobenzoyl)-imidazo[1,2-a]pyridine (0.454 g, 1.27 mmol) was converted to product in a manner substantially analogous to Preparation 183 to yield 120 mg. (23%). ¹H-NMR, ¹³C-NMR.

Example 47

2-Trifluoroacetamido-3-iodo-6-[(E)-1-(2,3-difluorophenyl)-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

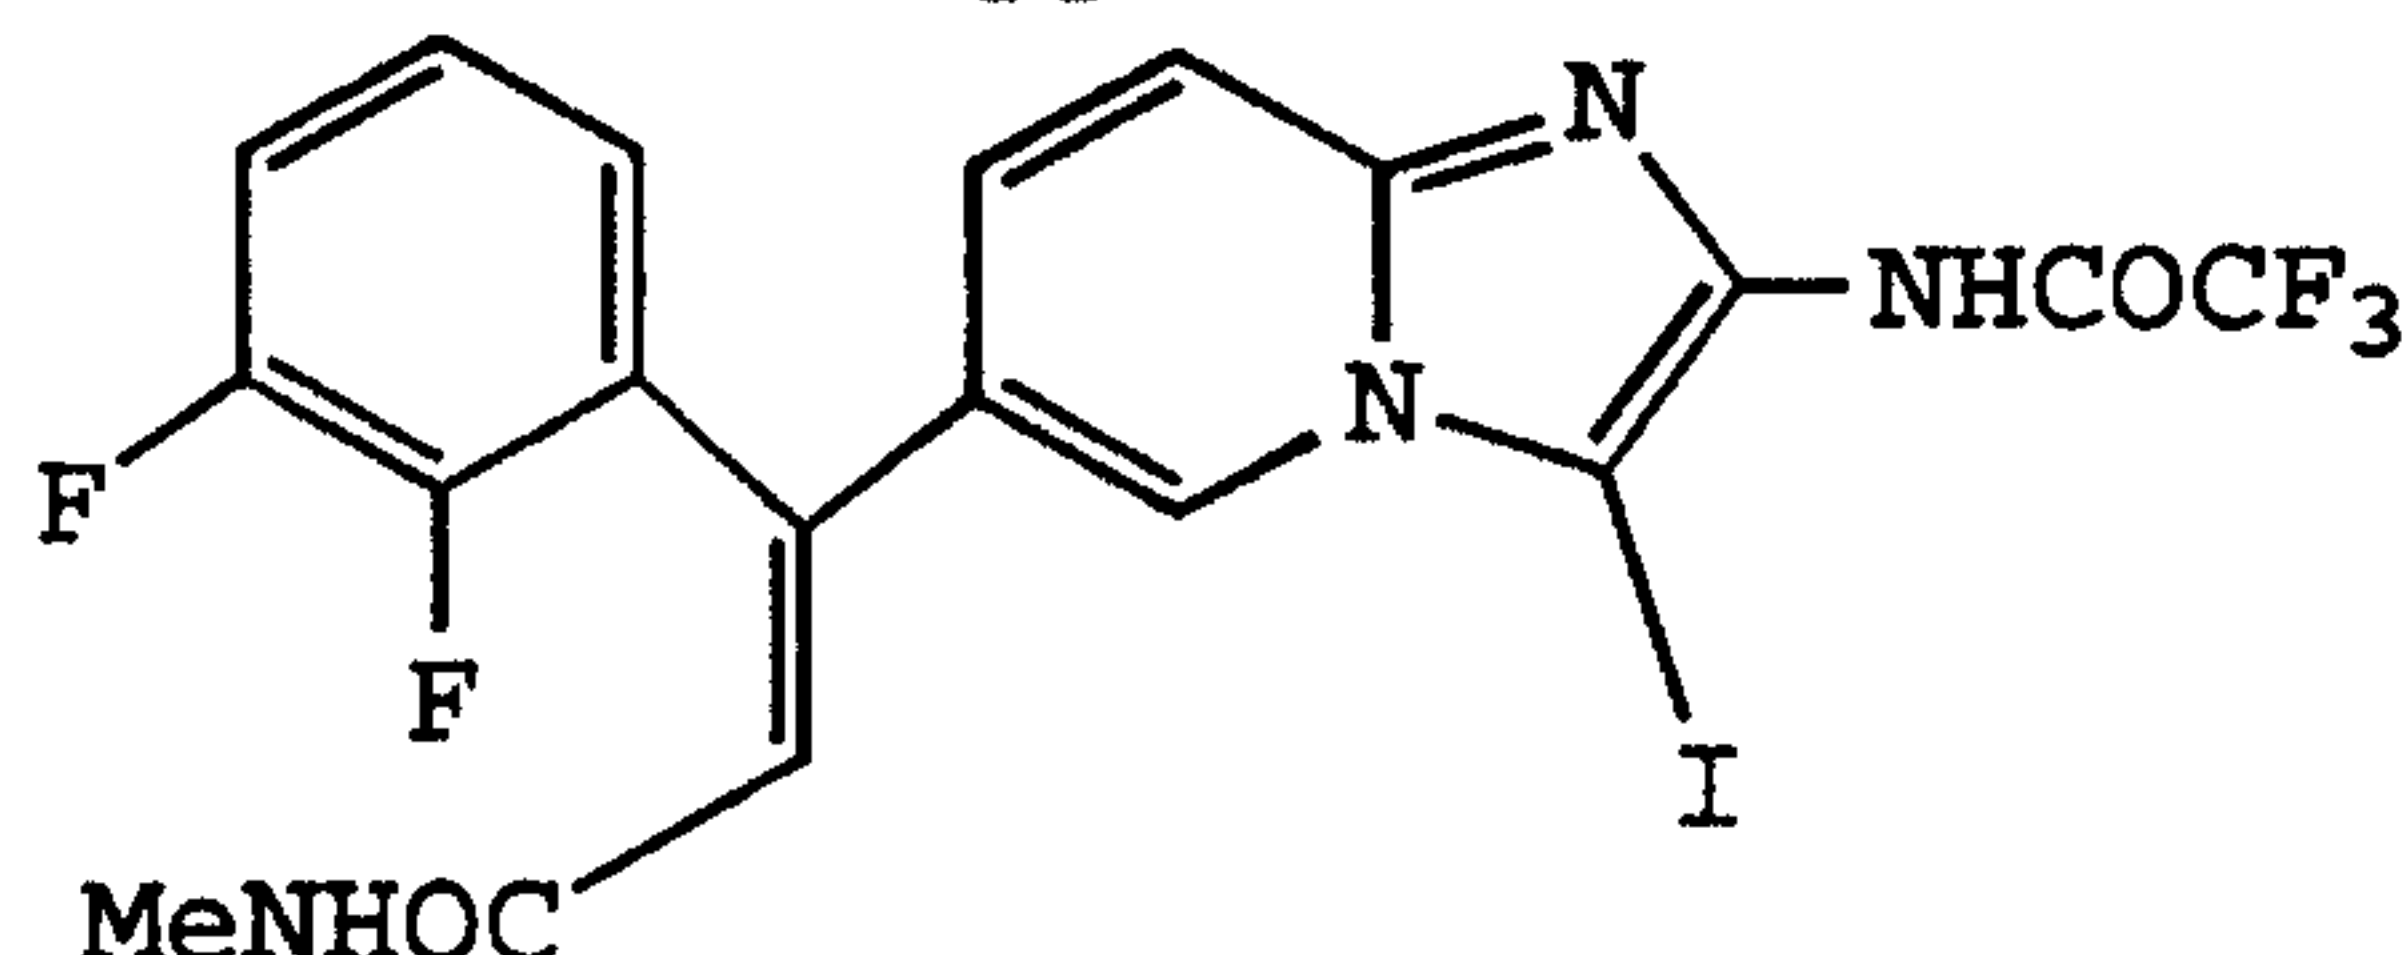


To a solution of 2-trifluoroacetamido-6-[(E)-1-(2,3-difluorophenyl)-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine (116 mg, 0.27 mmol) in 10 ml of dry CH₃CN cooled at 0°C, was added N-iodosuccinimide (67 mg, 0.30 mmol) portionwise. The reaction mixture was stirred for 15 minutes. The solvent was removed *in vacuo*, the residue was dissolved in EtOAc (25 ml), washed with NaHSO₃ (40%p/v, 2 x 25 ml), and then with NaHCO₃ (2 x 25 ml). The organic layer was dried (Na₂SO₄) and the EtOAc removed *in vacuo*, affording 130 mg (86%) of product. ¹H-NMR, ¹³C-NMR.

Example 48

2-Trifluoroacetamido-3-phenyl-6-(2,3-difluorobenzoyl)-imidazo[1,2-a]pyridine


- 84 -

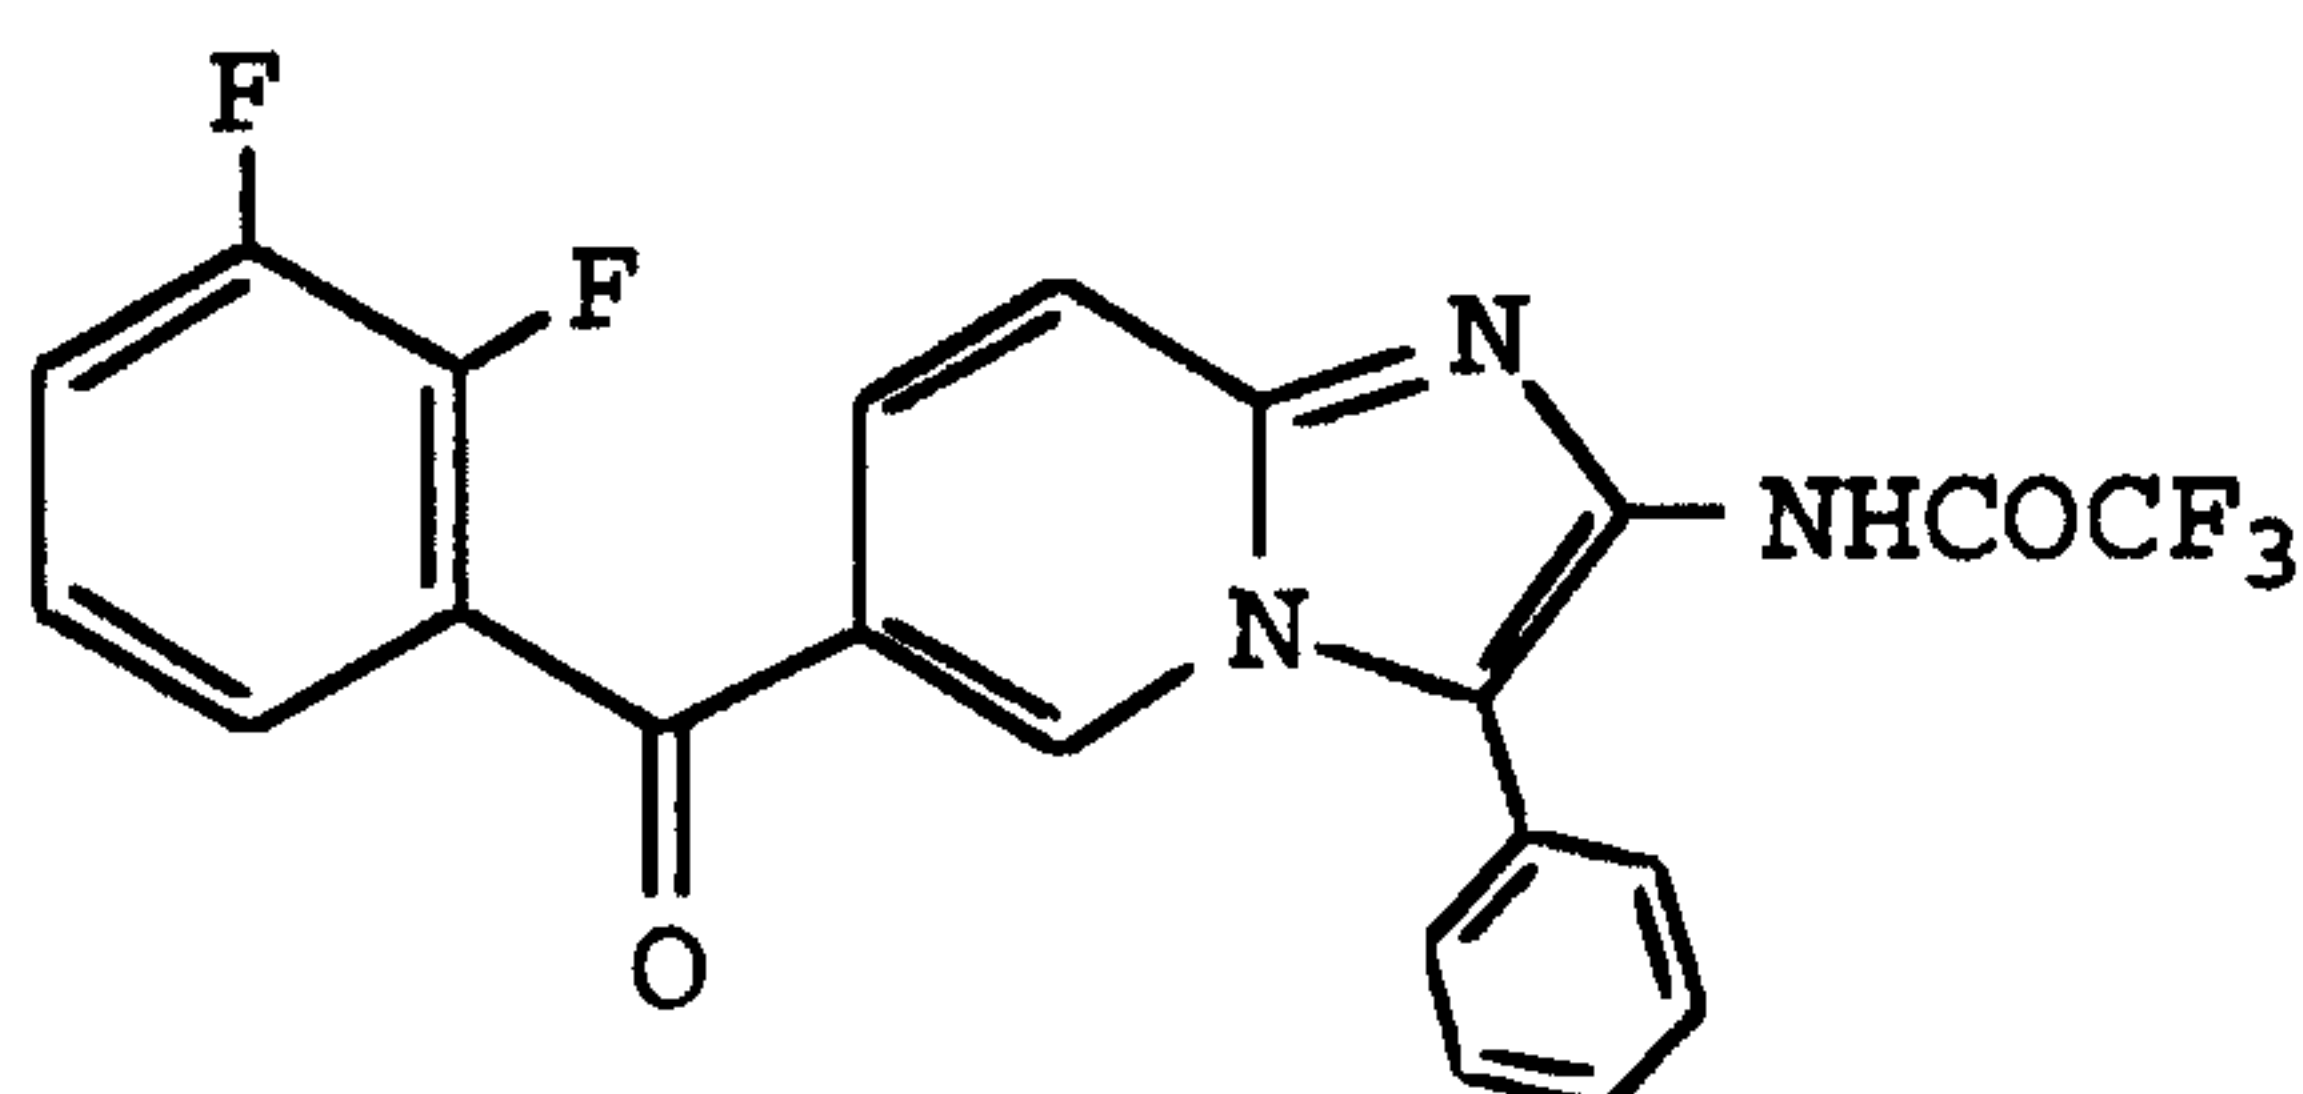

To a solution of 2,3-difluorobromobenzene (471 ml, 4.206 mmol) in dry THF (20 mL) was added a solution of n-butyl lithium (1.6M in hexanes, 2.63 mL) at -78°C. The resulting yellow solution was stirred at the same temperature for 70 minutes, then a solution of 2-trifluoroacetamido-3-phenyl-6-(N-methyl-N-methoxycarbamoyl)imidazo[1,2-a]pyridine (0.500 g, 1.28 mmol) in dry THF (20 mL), was added dropwise via a cannula. The red-orange solution was allowed to warm over 60 minutes. Saturated NH₄Cl was added and the mixture was stirred for 25 minutes before extracting with EtOAc. The organic layer was washed with brine, dried (Na₂SO₄), concentrated *in vacuo* and purified by column chromatography (CH₂Cl₂/CH₃CN 4/1) to give 390 mg of an orange solid. (69%). MS(FAB), NMR.

Example 49

2-Trifluoroacetamido-3-phenyl-6-[(E)-1-(2,3-difluorophenyl)-2-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

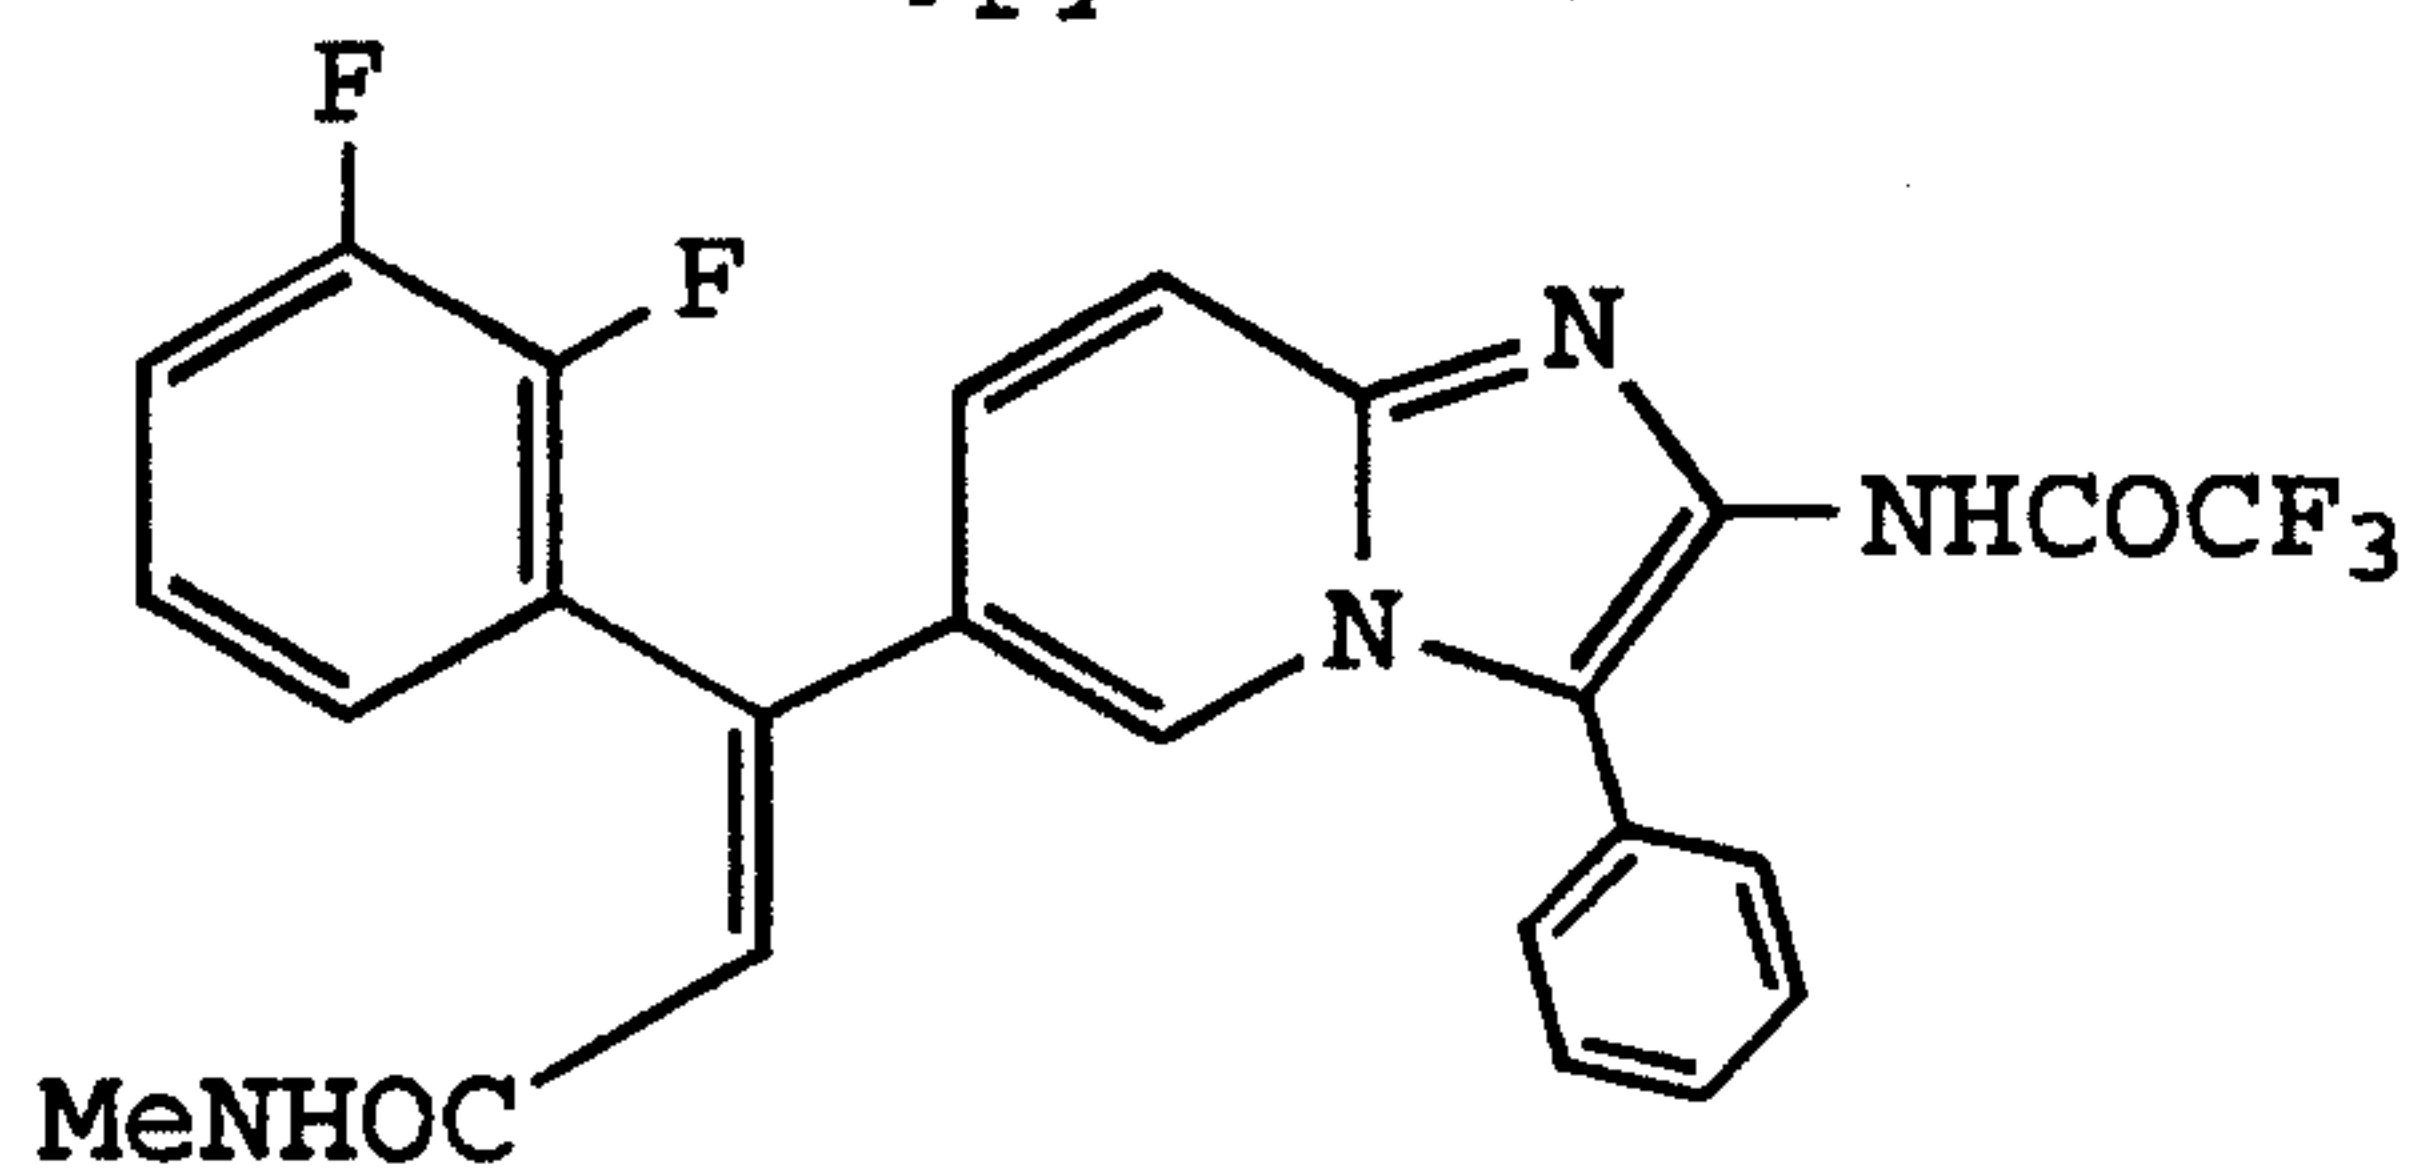


The diethyl-(N-methylcarbamoylmethyl)phosphonate (217 mg, 1.04 mmol) in 250 mL of dry THF was placed in a flame dried flask under an argon atmosphere. The solution was cooled to -78°C before the dropwise addition of potassium hexamethyldisilazide (5.13 mL, 2.56 mmol; 0.5 M in toluene). The mixture was stirred for 2 hours at -78°C. A solution of the 2-trifluoroacetamido-3-phenyl-6-

(2,3-difluorobenzoyl)-imidazo[1,2-a]pyridine (300 mg, 0.693 mmol) in 100 mL of dry THF was added dropwise. The reaction mixture was stirred at -78°C for 2 hours and then allowed to warm to RT. The resulting brown solution
 5 was stirred at RT for 48 hours (as it is noted a high amount of solvent was required in order to avoid dealing with heterogenous medium once the reagents were mixed). The THF was removed *in vacuo* and the mixture was diluted in 400 mL of EtOAc and washed with saturated NH₄Cl (2 x
 10 100 mL) and once with brine. After drying over MgSO₄, the solvents were removed *in vacuo* to give a brown solid. The residue was purified by column chromatography (CH₃CN:CH₂Cl₂, 2:1) to give 57.6 mg of product. (22%).
¹H NMR, ¹³C NMR.

15

Example 50


2-Trifluoroacetamido-3-phenyl-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

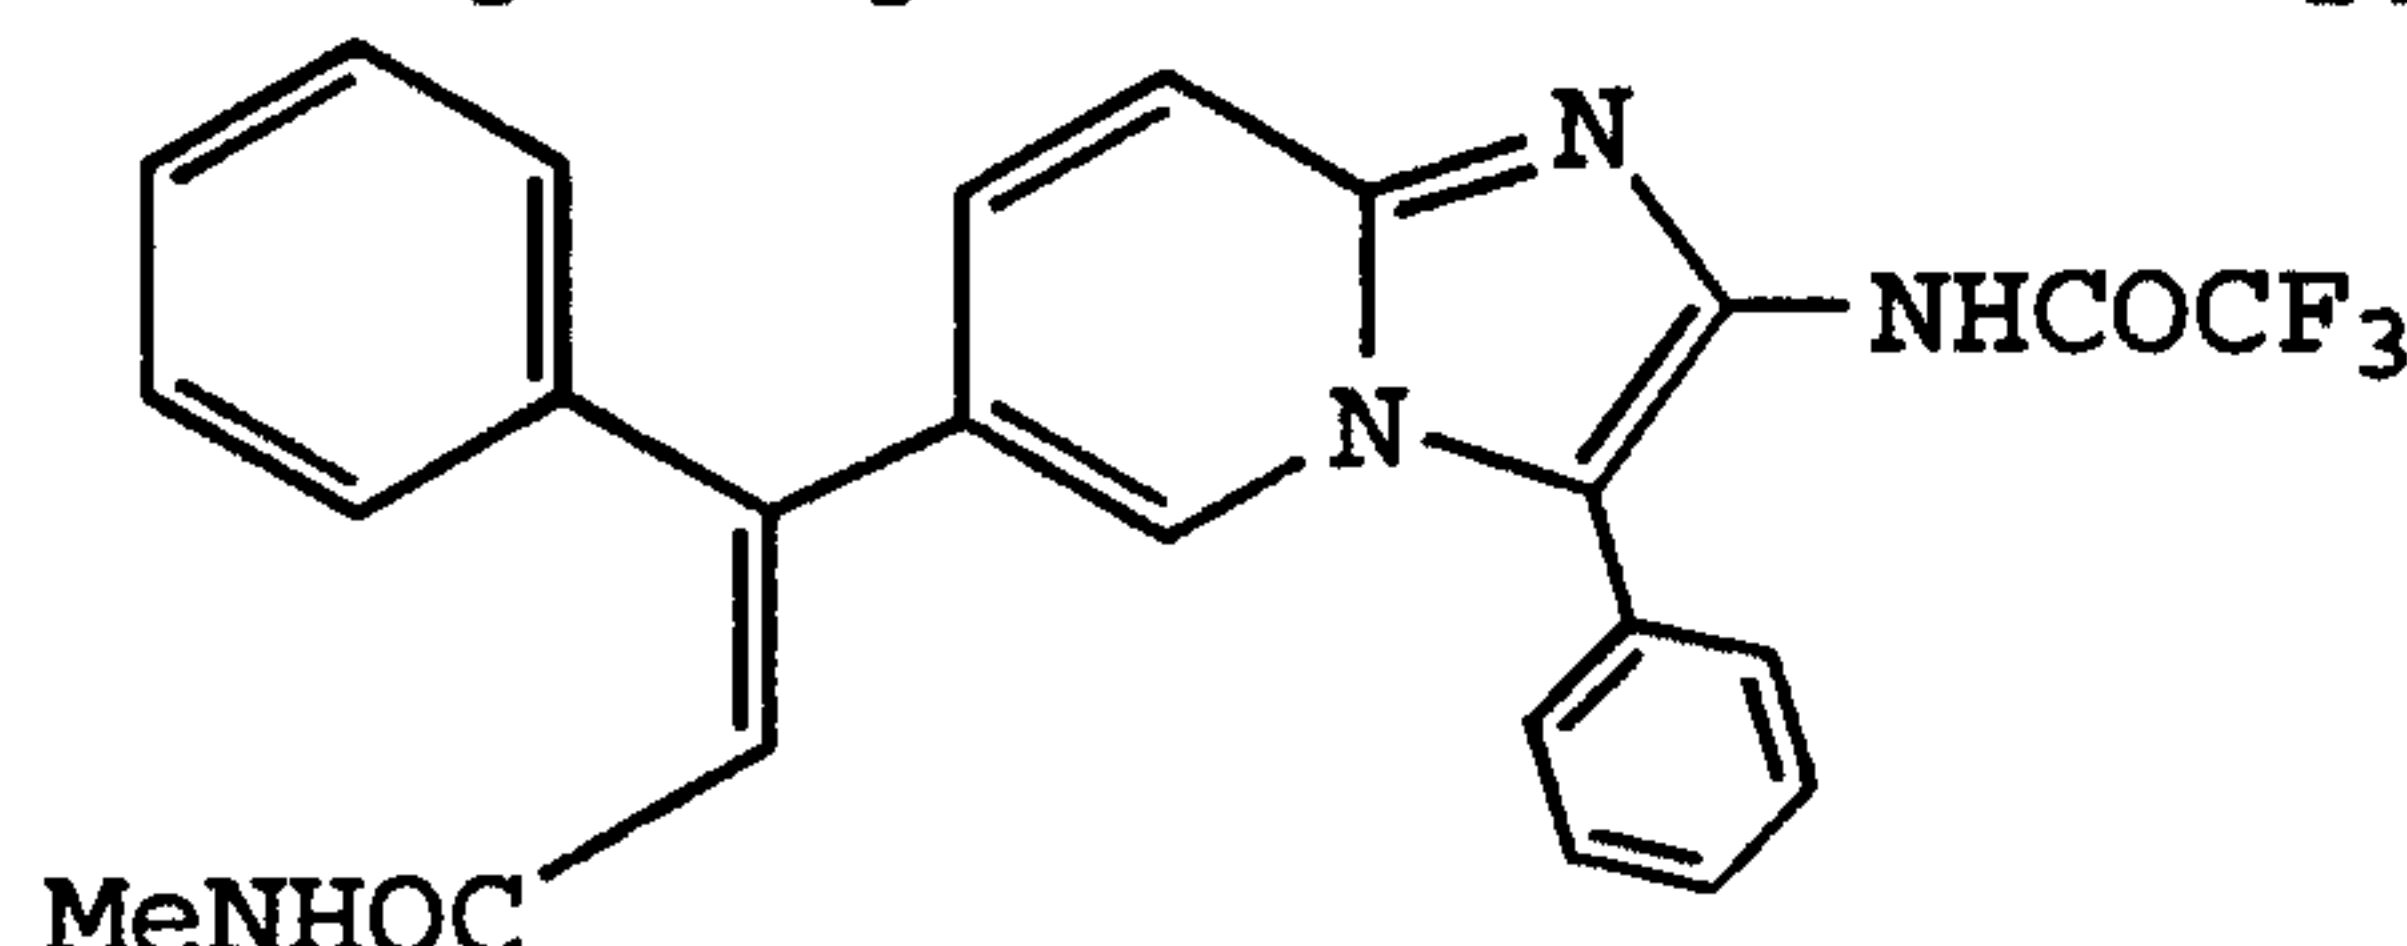

The 2-trifluoroacetamido-3-phenyl-6-benzoyl-imidazo[1,2-a]pyridine (618 mg, 1.27 mmol) was converted
 20 to product in a manner substantially analogous to Example 49 to yield 526 mg. (75%). EIMS, NMR.

Example 51


2-Trifluoroacetamido-3-(2,5-difluorophenyl)-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine
 25

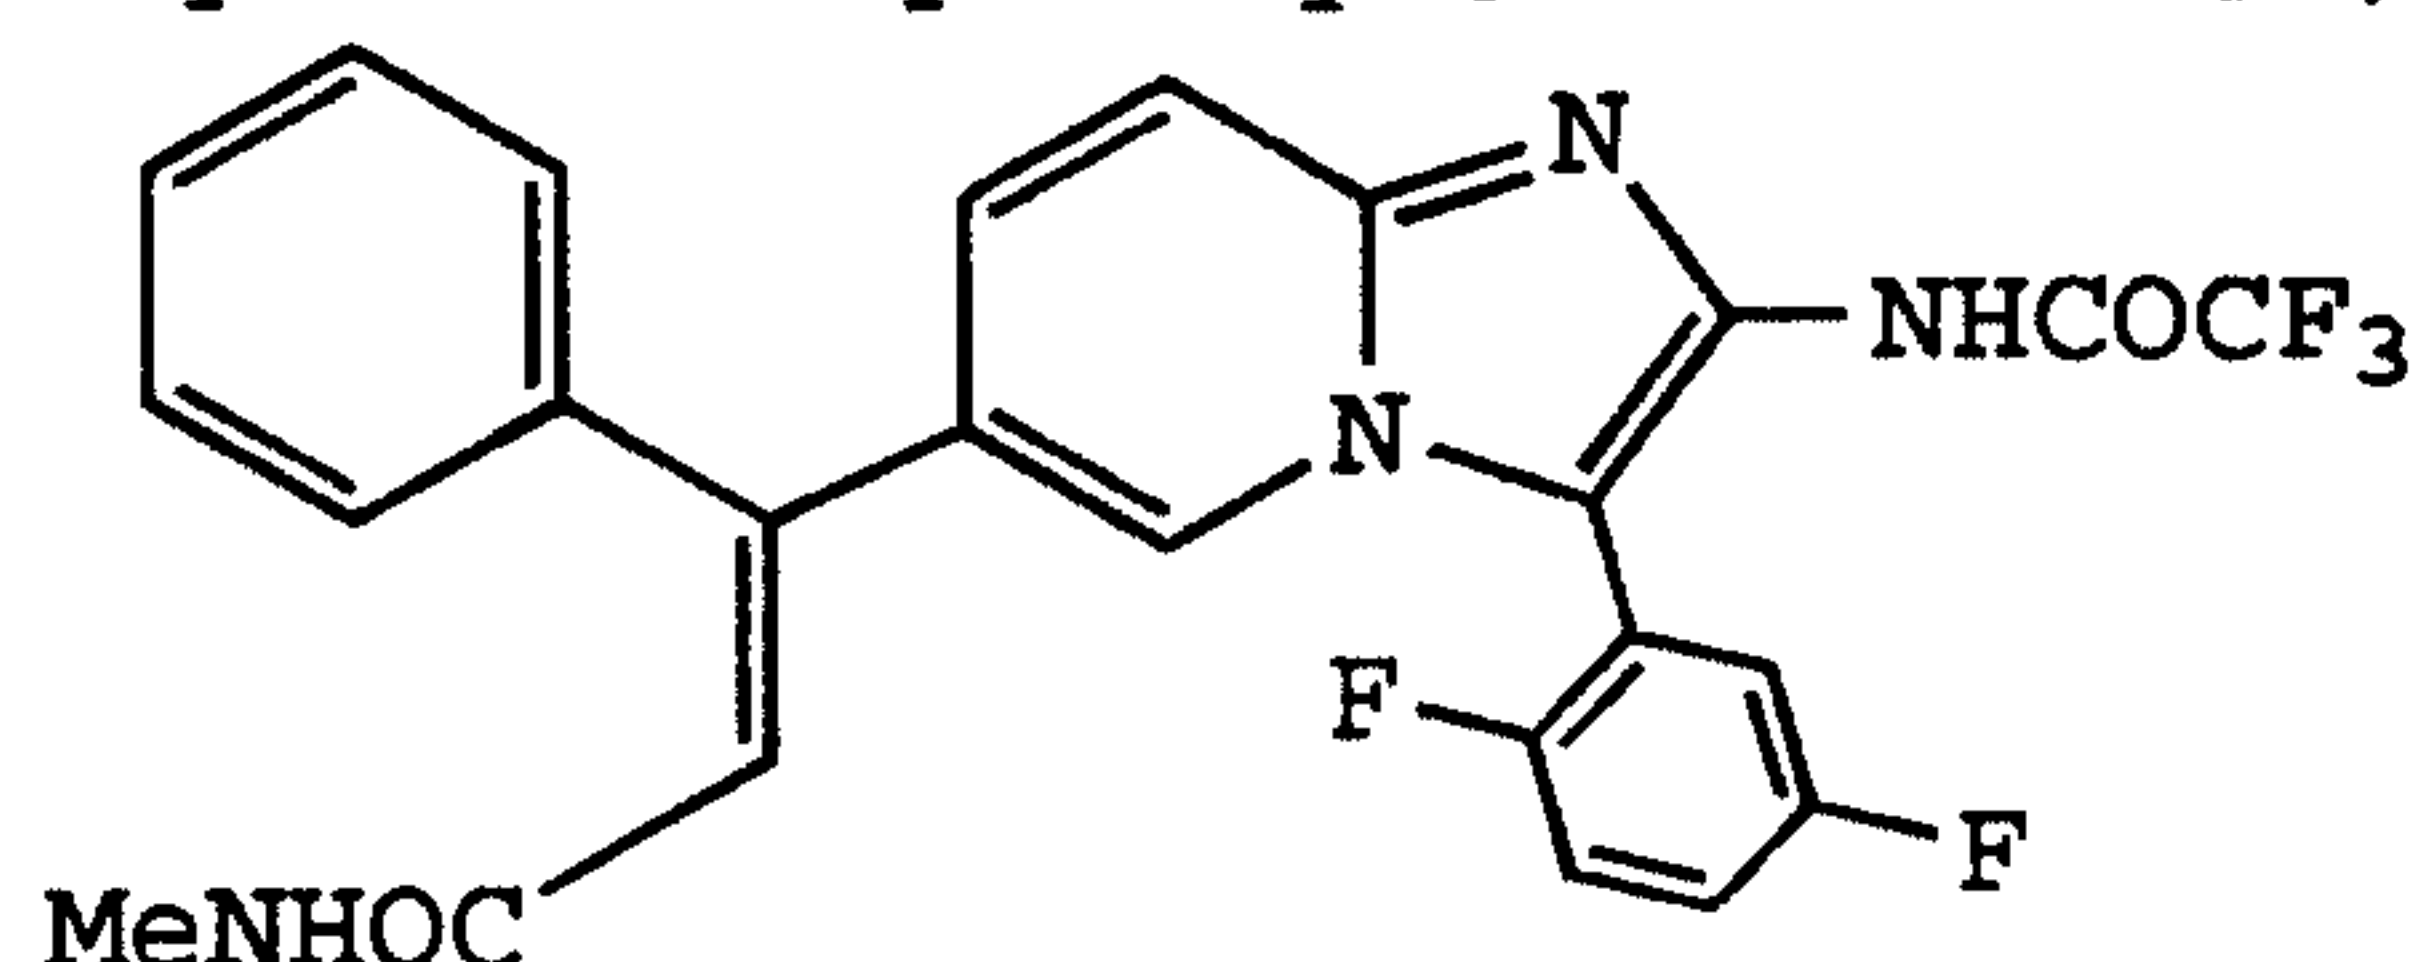

The 2-trifluoroacetamido-3-(2,5-difluorophenyl)-6-benzoylimidazo[1,2-a]pyridine (500 mg, 1.15 mmol) was converted to product in a manner substantially analogous
 30 to Example 49 to give 483 mg. (86%). EIMS, NMR.

Example 52

2-Trifluoroacetamido-3-(2-trifluoromethyl-4-fluorophenyl)-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

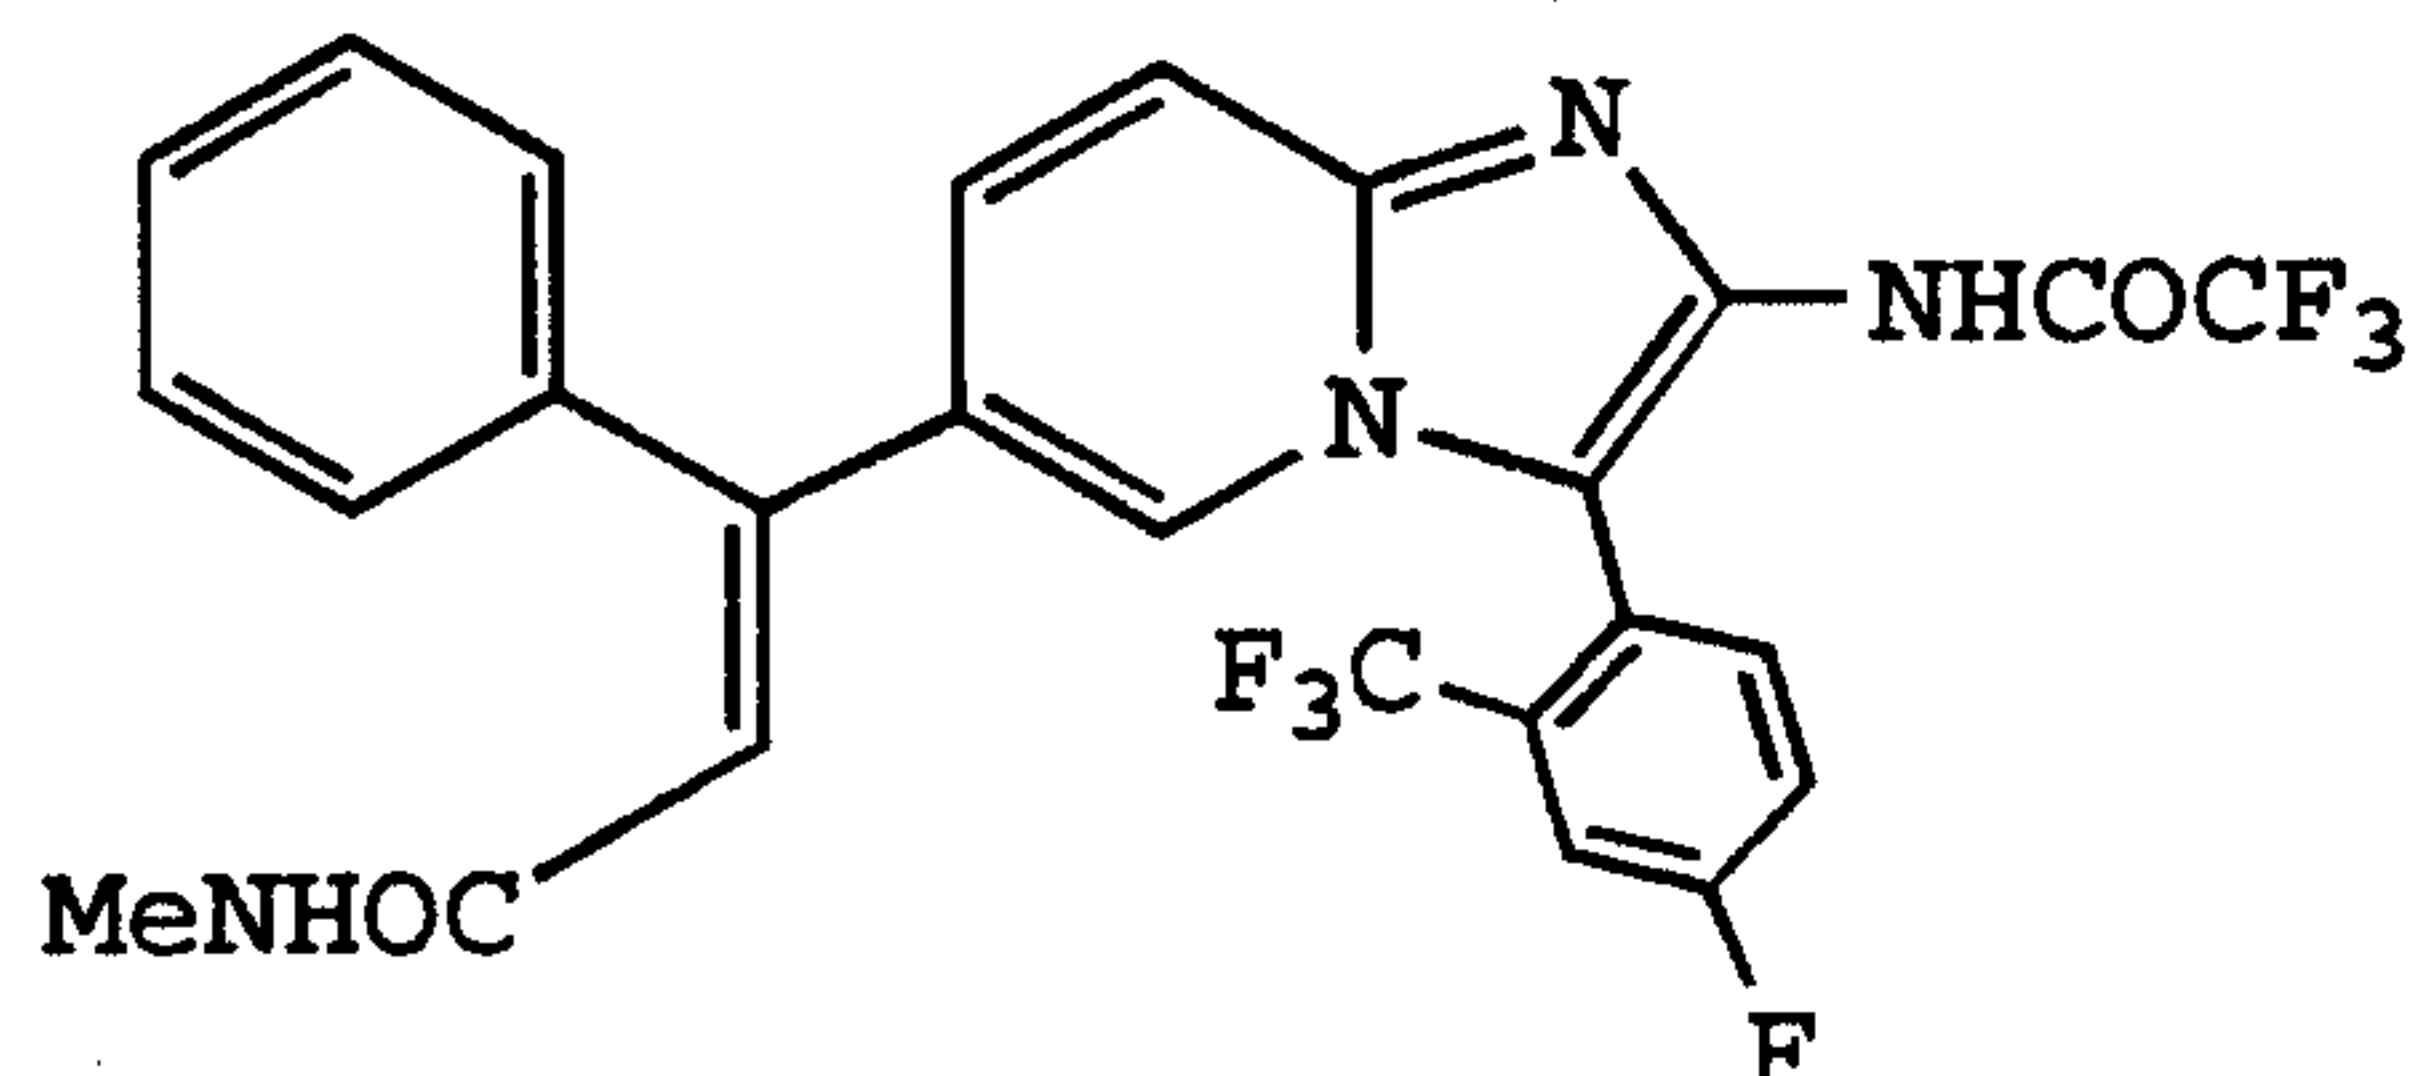


5

The 2-trifluoroacetamido-3-(2-trifluoromethyl-4-fluoro-phenyl)-6-benzoylimidazo[1,2-a]pyridine (500 mg, 1.04 mmol) was converted to product in a manner substantially analogous to Example 49 to give 439 mg.

10 (79%). EIMS, NMR.

Example 53

2-Trifluoroacetamido-3-(2,3,4-trifluorophenyl)-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

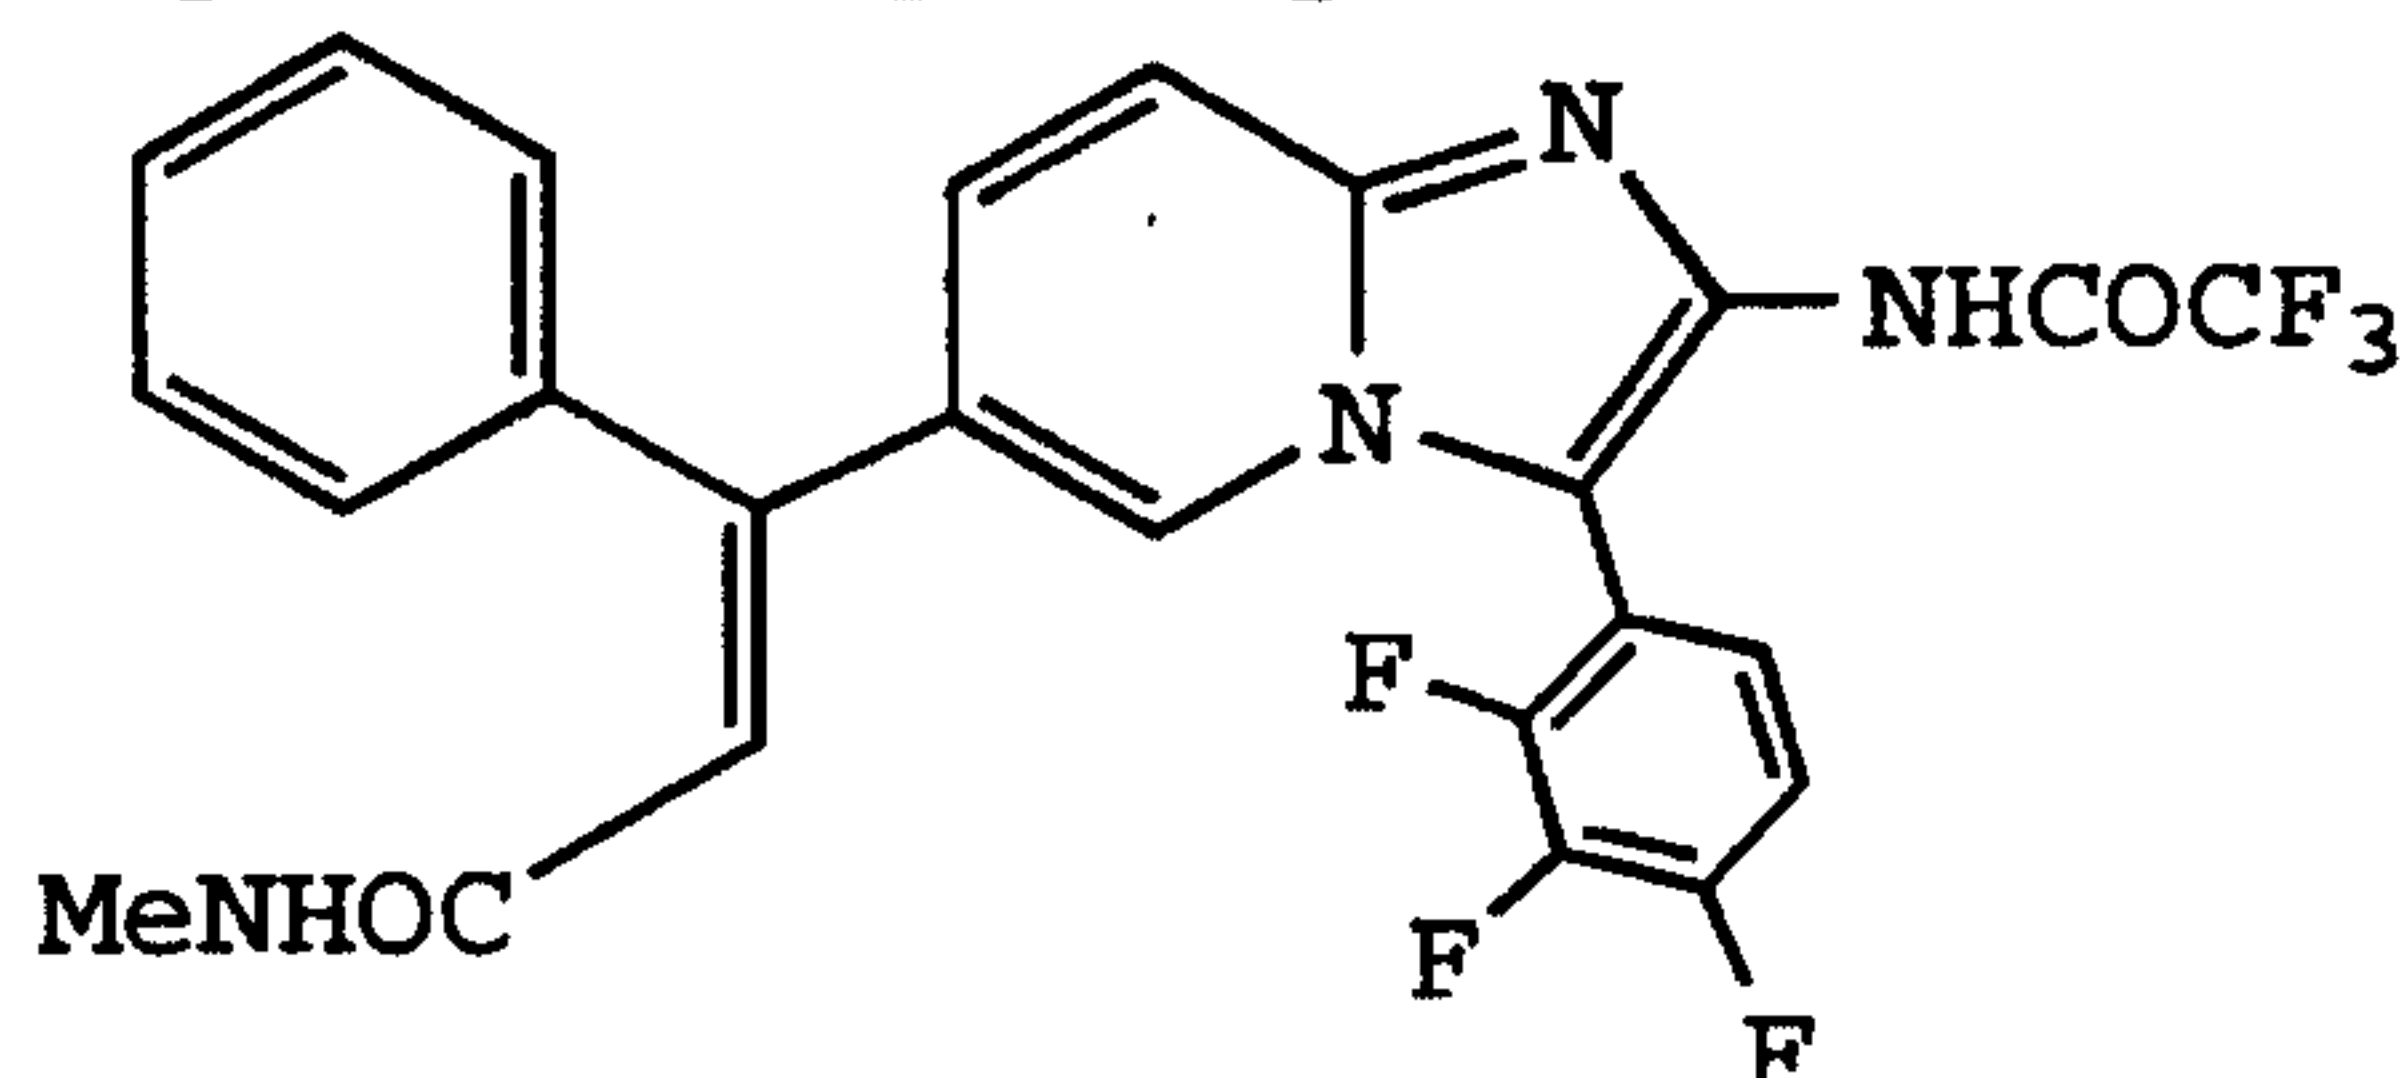


15

The 2-trifluoroacetamido-3-(2,3,4-trifluorophenyl)-6-benzoylimidazo[1,2-a]pyridine (303 mg, 0.672 mmol) was converted to product in a manner substantially analogous to Example 49 to give 168 mg. (50%). NMR.

Example 54

20 2-Trifluoroacetamido-3-(3,5-difluorophenyl)-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

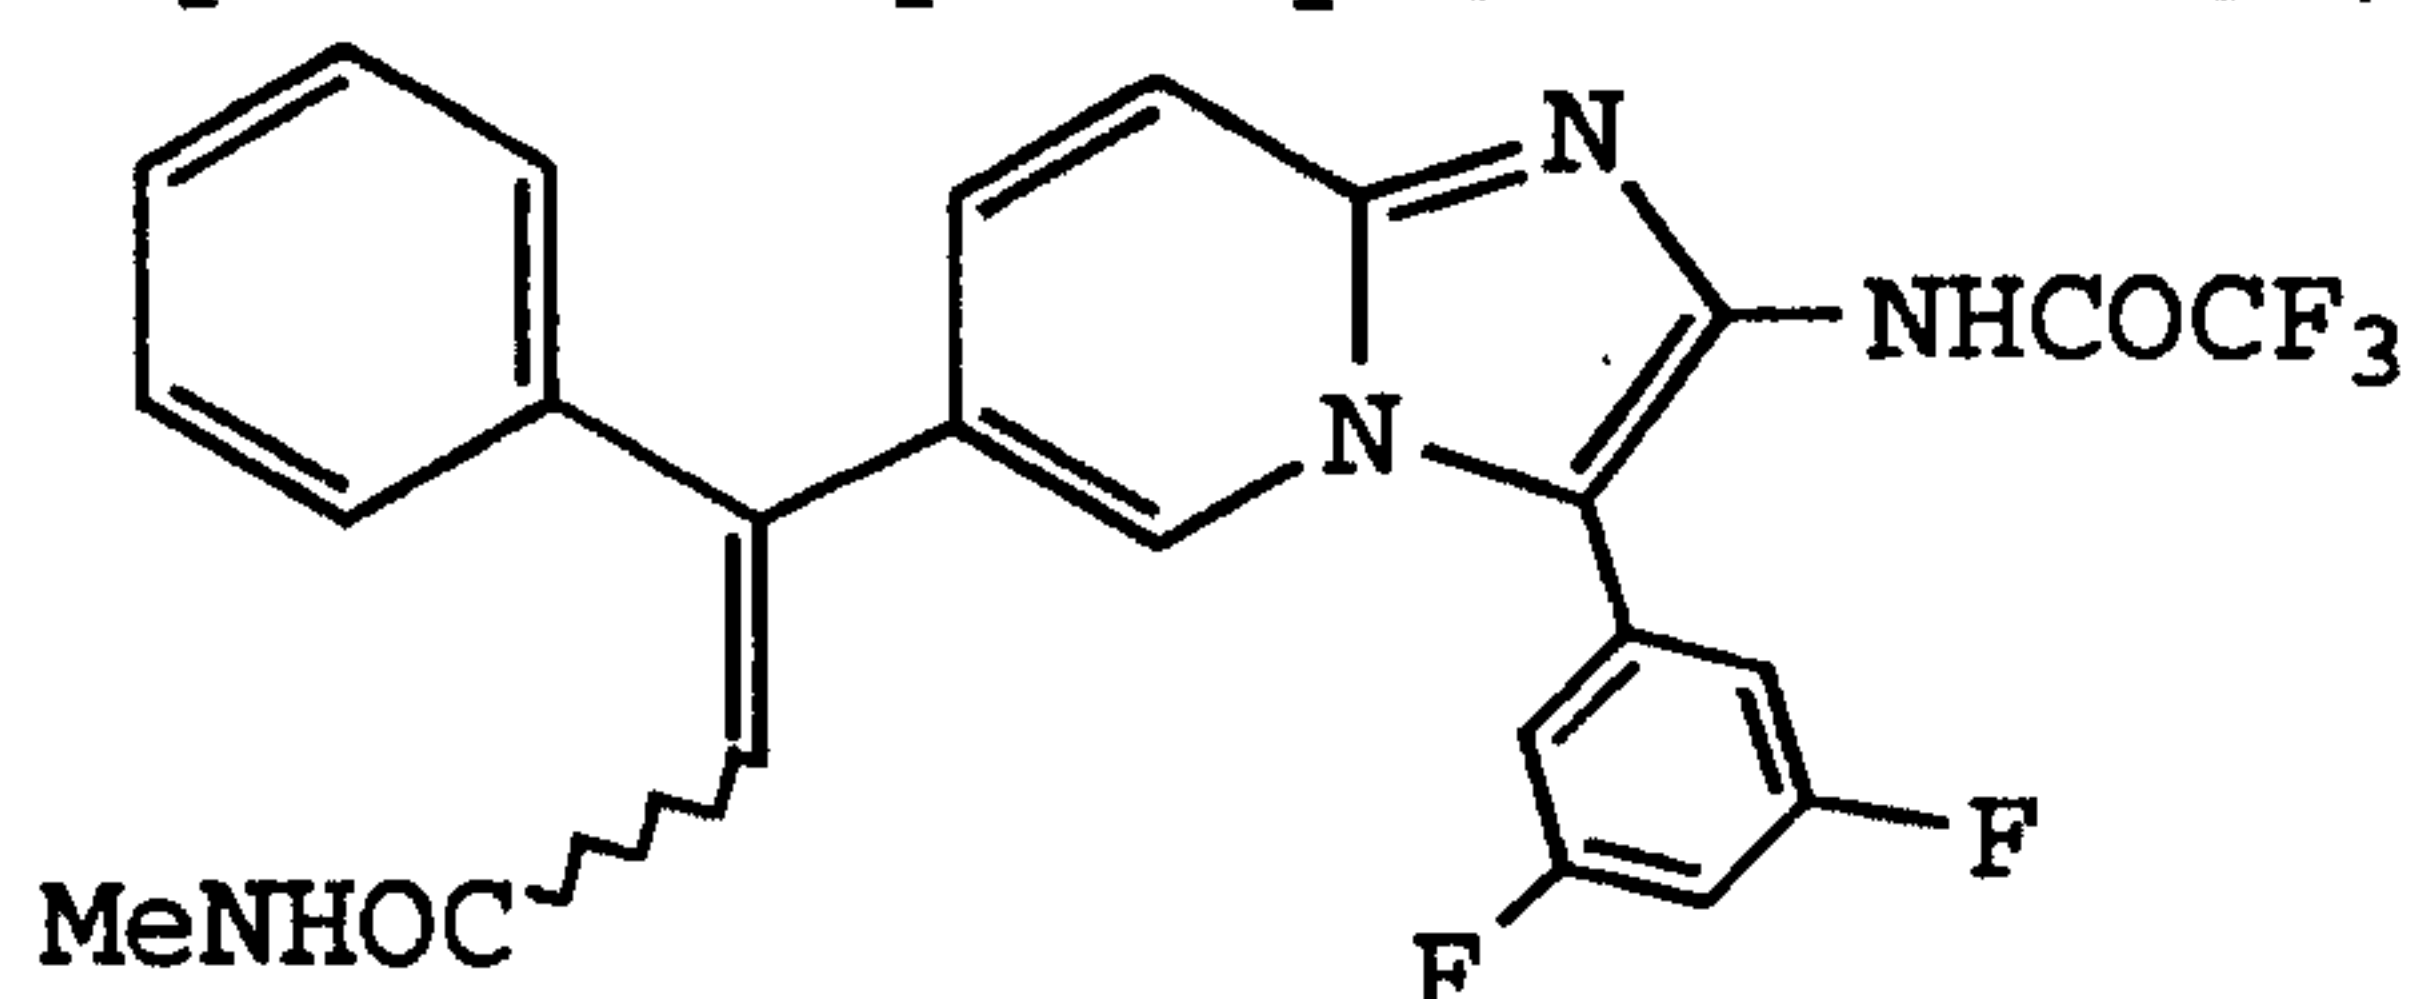


The 2-trifluoroacetamido-3-(3,5-difluorophenyl)-6-benzoylimidazo[1,2-a]pyridine (240 mg, 0.554 mmol) was

converted to product in a manner substantially analogous to Example 49 to give 161 mg of two isomers E:Z in 1:1 ratio. Yield: 60%. EIMS, NMR.

Example 55


- 5 2-Trifluoroacetamido-3-(3-trifluoromethylphenyl)-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

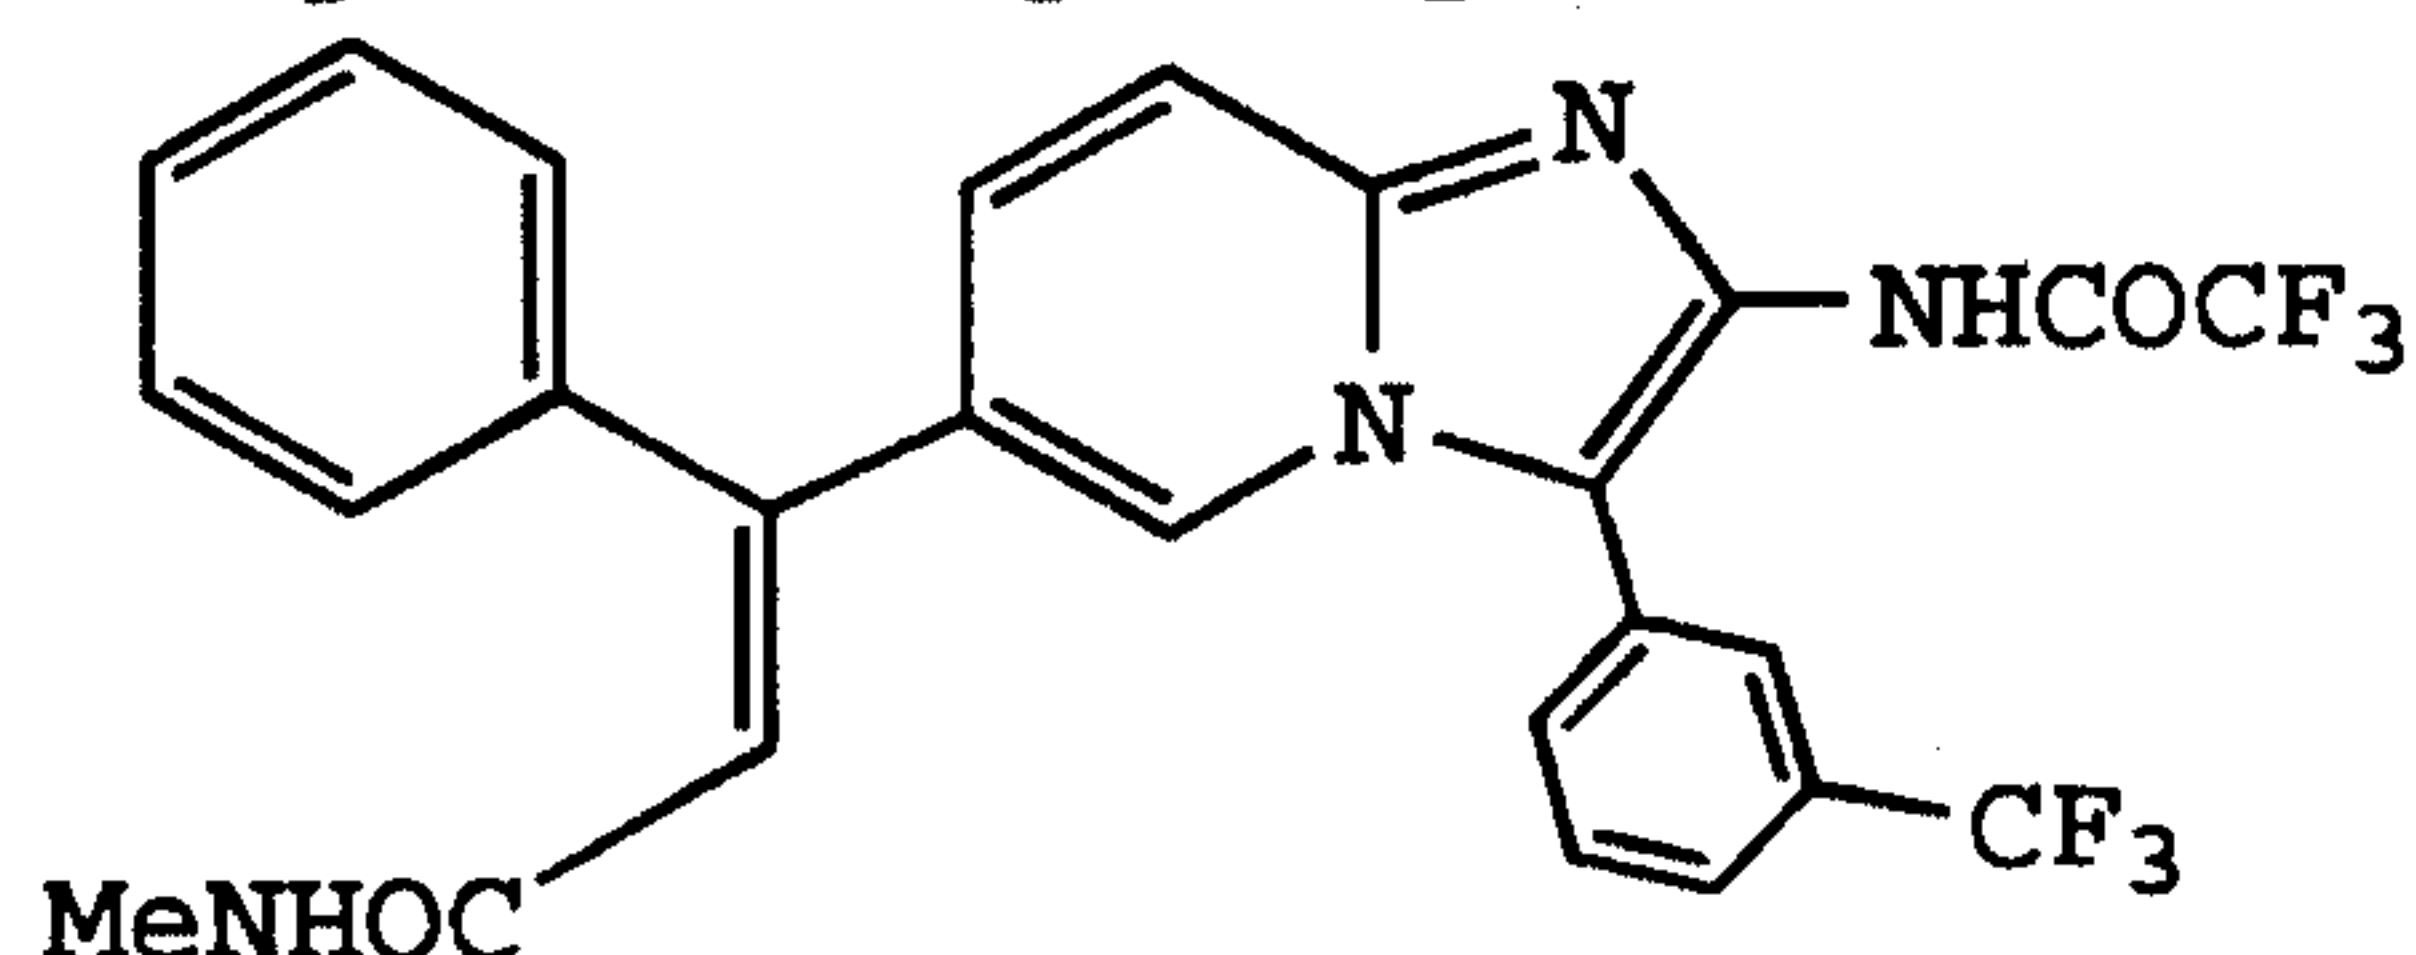

- The 2-trifluoroacetamido-3-(3-trifluoromethylphenyl)-6-benzoylimidazo[1,2-a]pyridine (228 mg, 0.491 mmol) was converted to product in a manner substantially analogous to Example 49 to give 228 mg. (57%). EIMS, NMR.

Example 56

- 15 2-Amino-3-(2,4-difluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

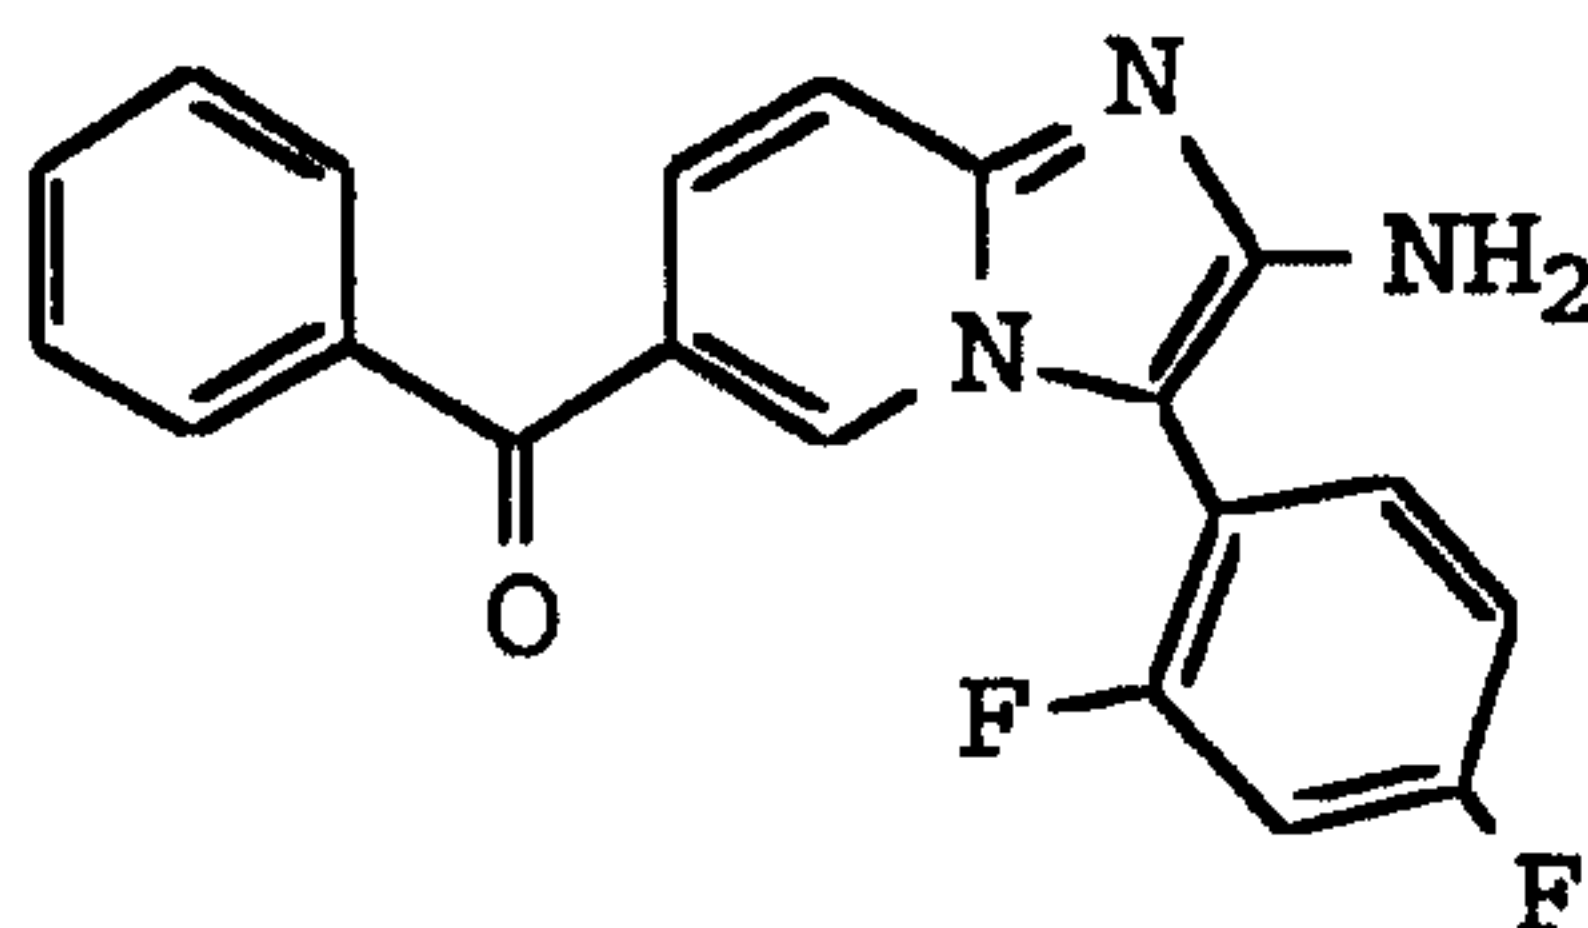


- The 2-trifluoroacetamido-3-(2,4-difluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (9.24 g, 20.8 mmol) was dissolved in 250 ml of MeOH and 170 ml of 1N NaOH. The solution was stirred at RT under N₂ for 2 weeks. The precipitant was filtered and the filter cake was dissolved in 900 ml of EtOAc. The solution was washed with brine (3 x 50 ml), dried over Na₂SO₄, filtered, and concentrated *in vacuo*. The residue was recrystallized from EtOAc/hexane to give 2 crops yielding 5.57 g. (76.8%). EA, MS(FD).

Example 57

- 2-Amino-3-(3,5-difluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine


- 88 -

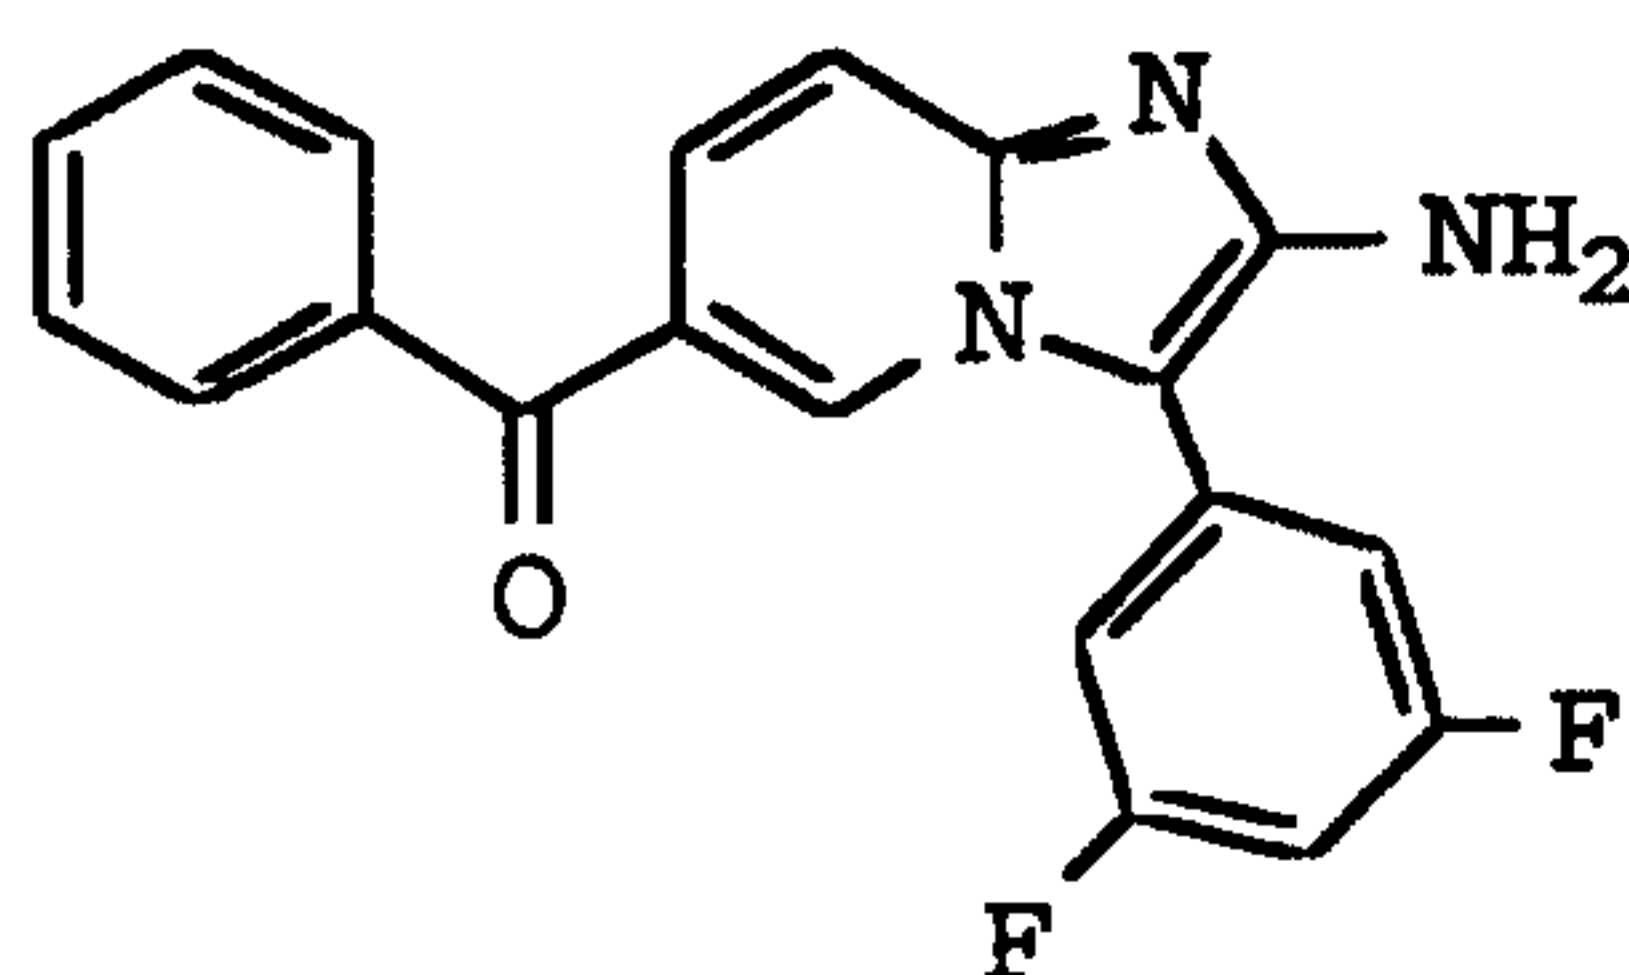

The 2-trifluoroacetamido-3-(3,5-difluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (10.2 g, 22.9 mmol) was converted to product in a manner substantially analogous to Example 56 to yield 4.93 g. (61.6%). EA, MS(FD).

Example 58


2-Amino-3-(naph-2-yl)-6-benzoyl-imidazo[1,2-a]pyridine

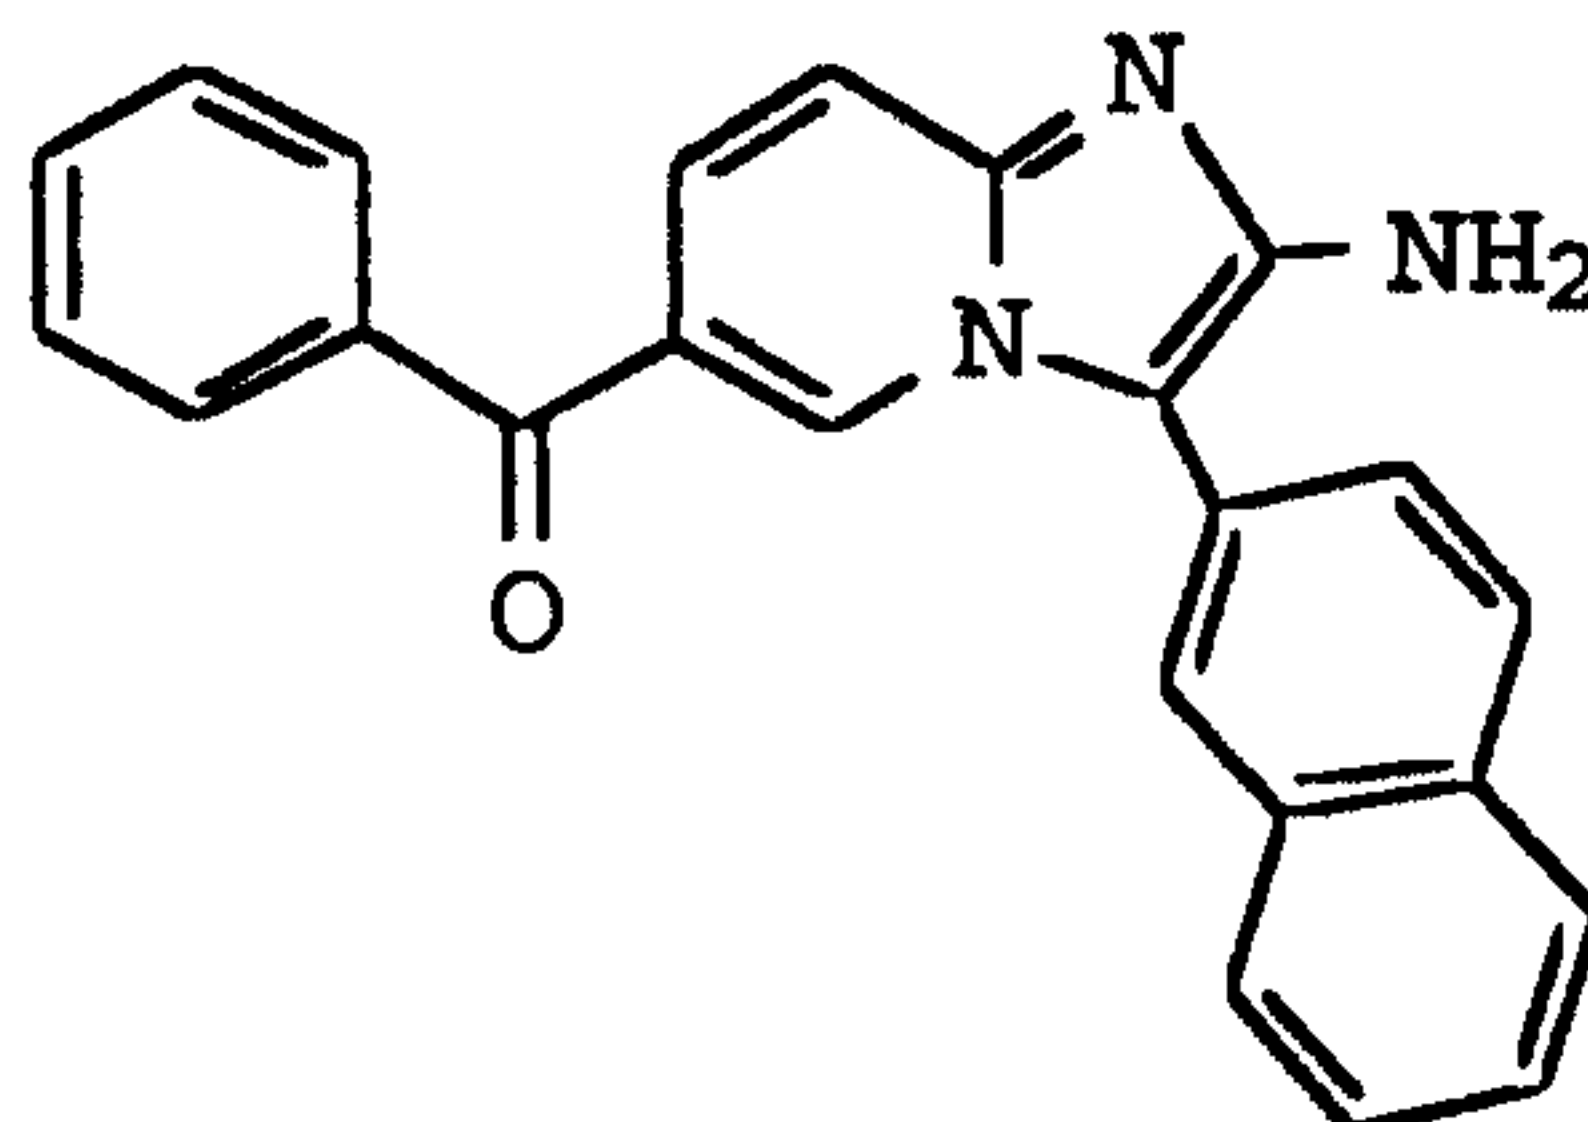

The 2-trifluoroacetamido-3-(naph-2-yl)-6-benzoyl-imidazo[1,2-a]pyridine (6.05 g, 13.7 mmol) was converted to product in a manner substantially analogous to Example 56 to yield 3.50 g. (70.4%). MS(FD), NMR.

Example 59

2-Amino-3-naphthyl-6-benzoyl-imidazo[1,2-a]pyridine

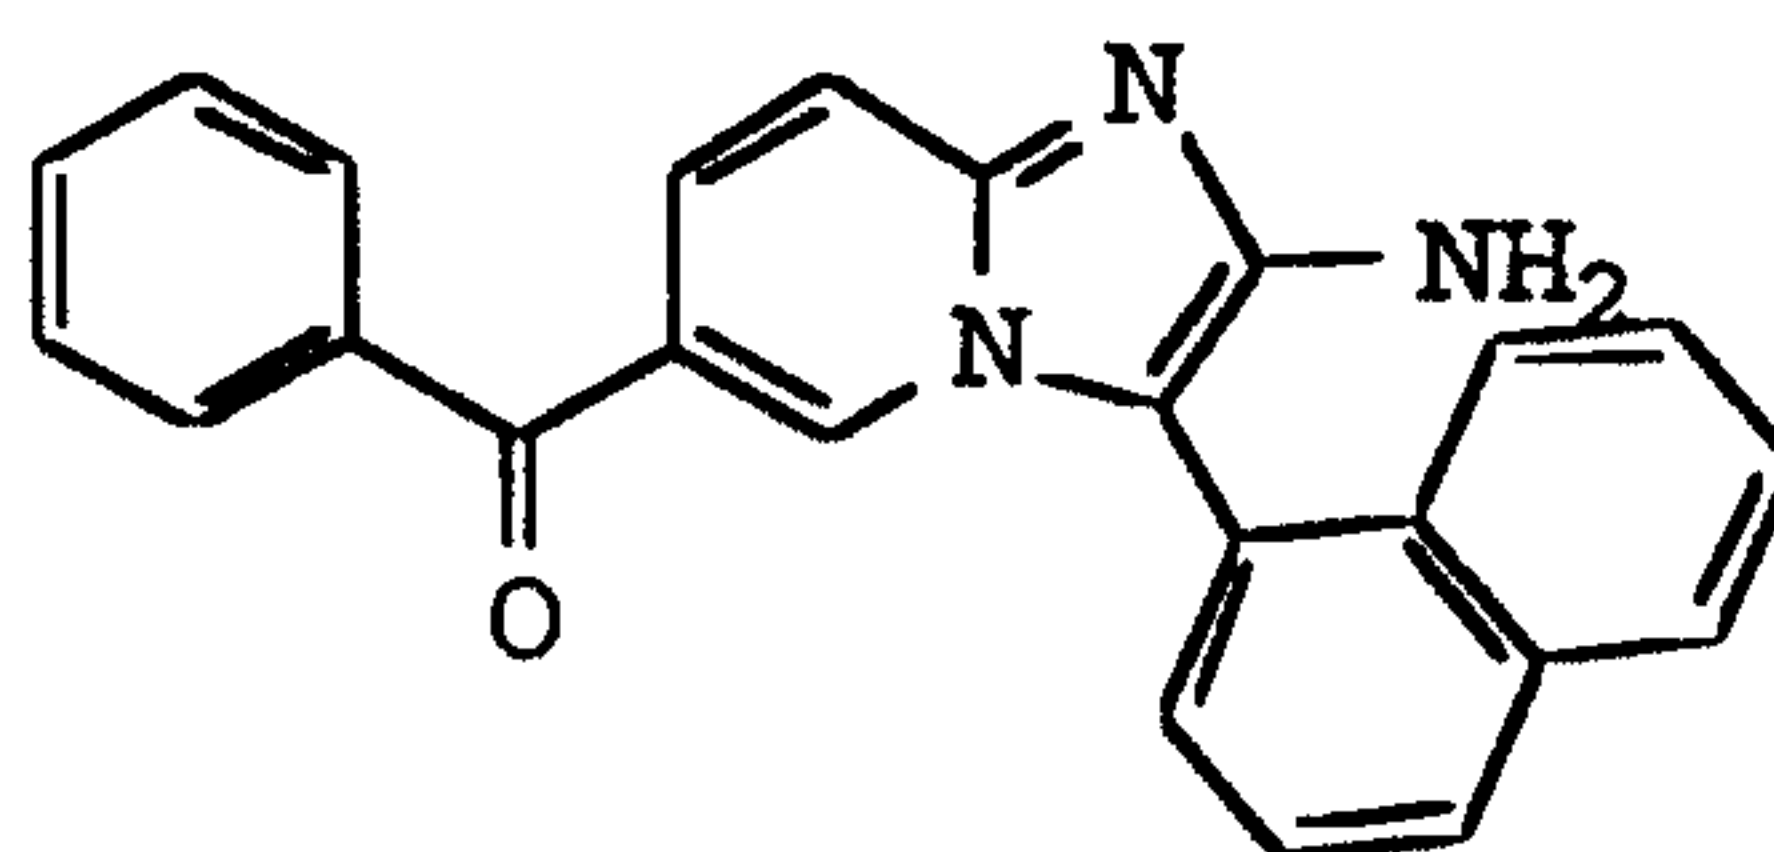


The 2-trifluoroacetamido-3-naphthyl-6-benzoyl-imidazo[1,2-a]pyridine (8.25 g, 18.0 mmol) was converted to product in a manner substantially analogous to Example 56 to yield 4.73 g. (73%). EA, MS(FD).

Example 60

2-Amino-3-(2,5-difluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine


- 89 -

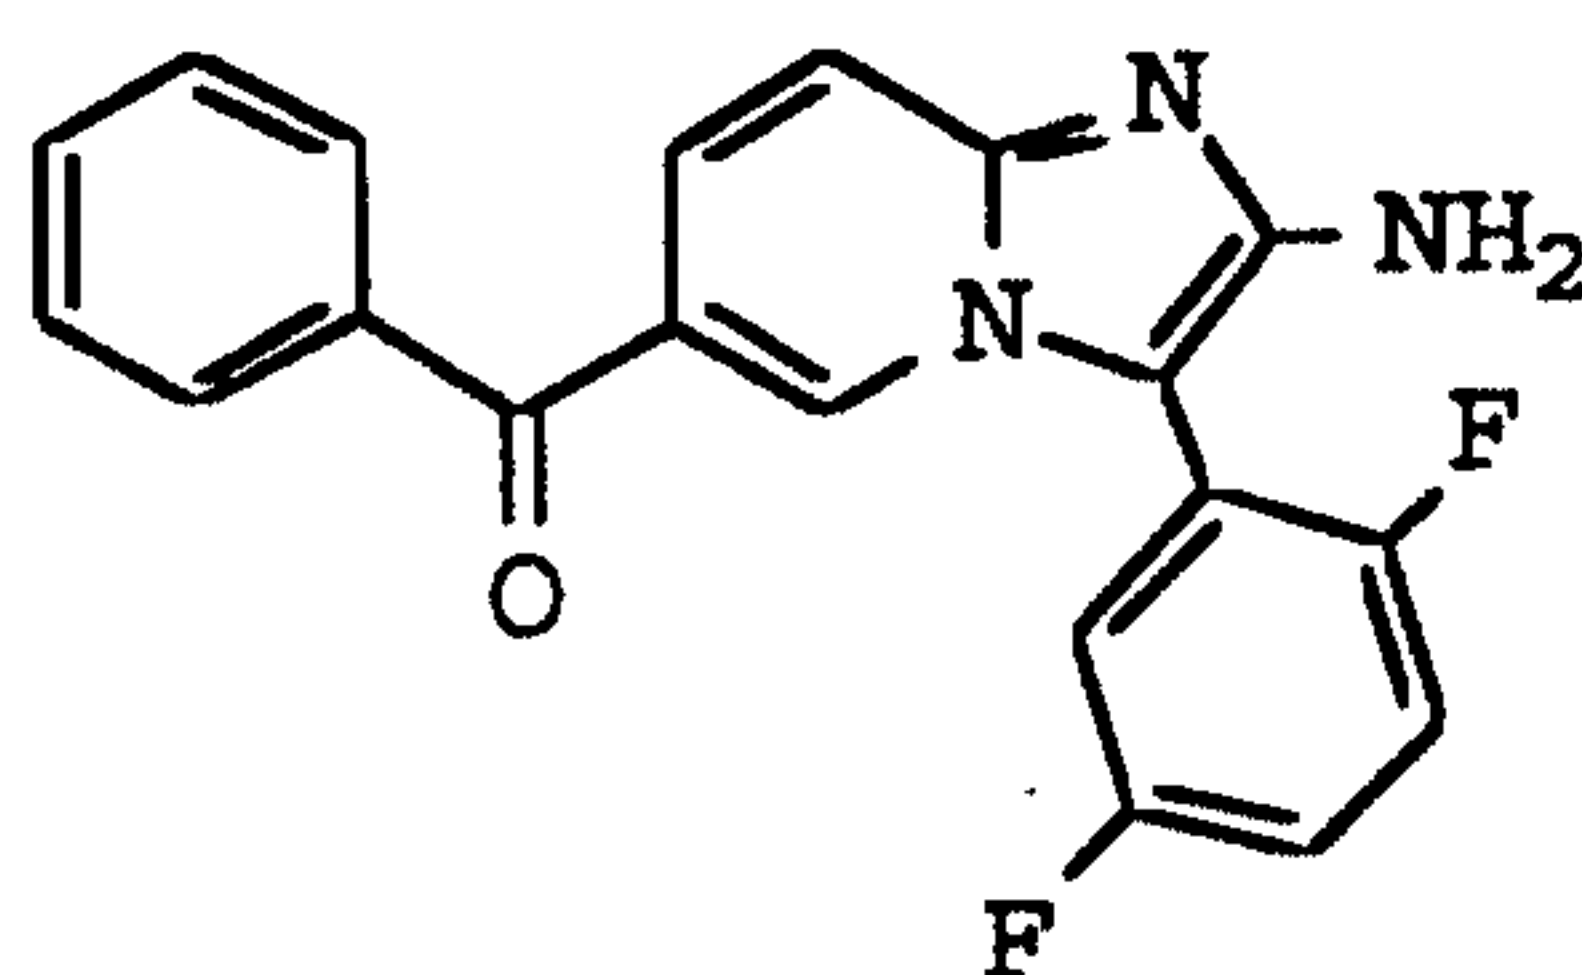

The 2-trifluoroacetamido-3-(2,5-difluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (12.1 g, 27.1 mmol) was converted to product in a manner substantially analogous to Example 56 to yield 6.10 g. (64.6%). EA, MS(FD).

Example 61


2-Amino-3-(2,6-difluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

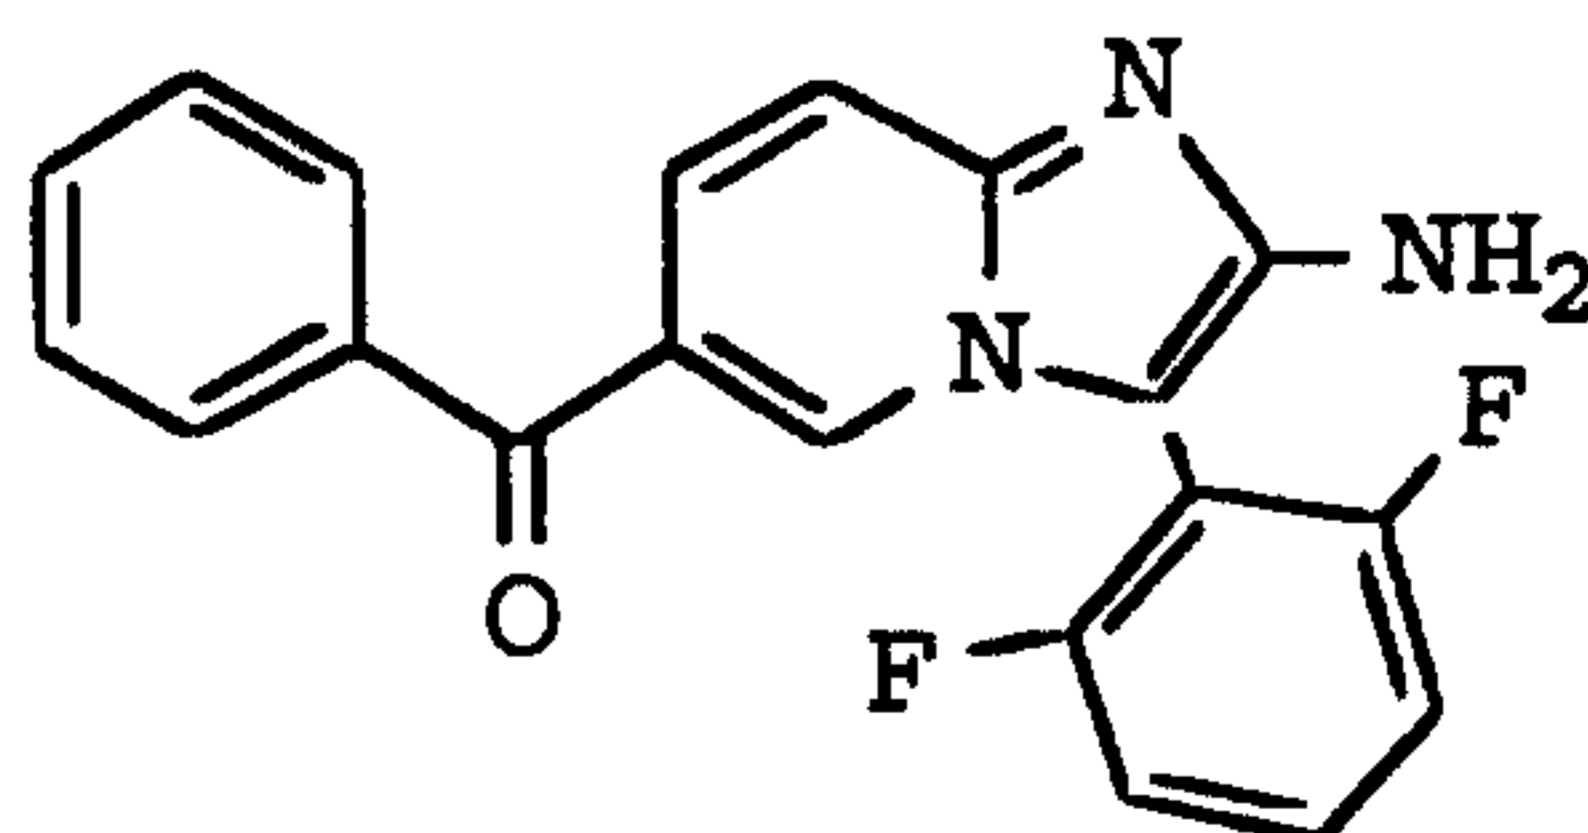

The 2-trifluoroacetamido-3-(2,6-difluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (6.01 g, 13.5 mmol) was converted to product in a manner substantially analogous to Example 56 to yield 3.42 g. (72.6%). EA, MS(FD).

Example 62

2-Amino-3-(4-trifluoromethylphenyl)-6-benzoyl-imidazo[1,2-a]pyridine

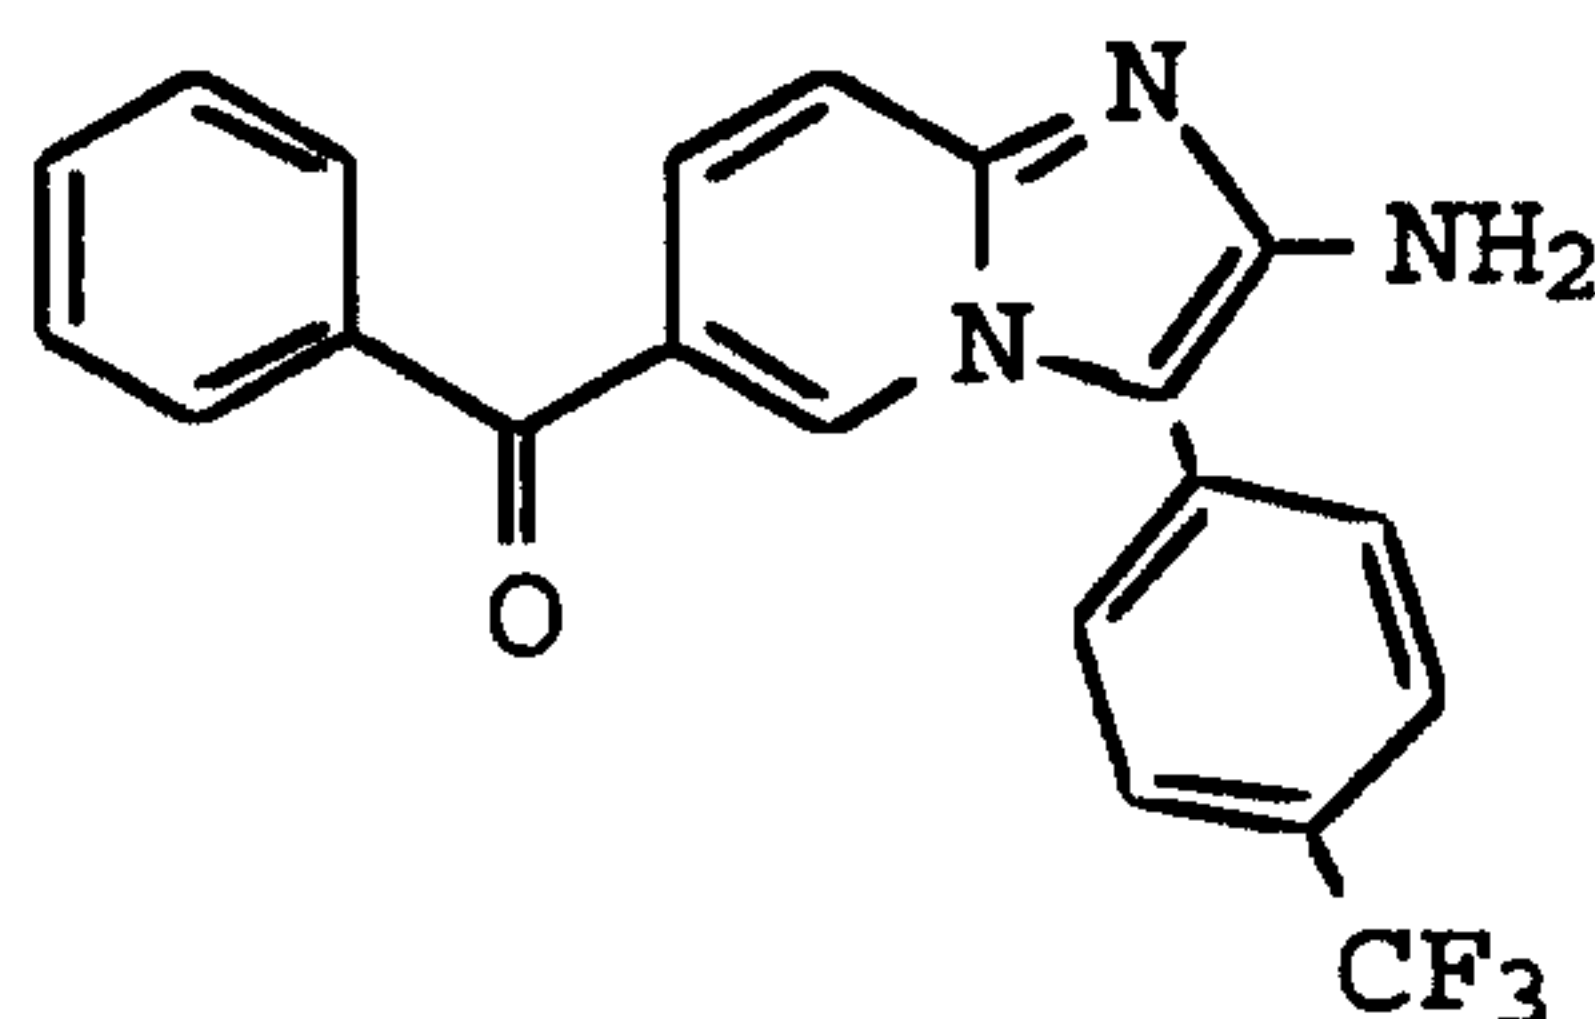


The 2-trifluoroacetamido-3-(4-trifluoromethylphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (10.1 g, 21.2 mmol) was converted to product in a manner substantially analogous to Example 56 to yield 4.43 g. (54.8%). EA, MS(FD).

Example 63

2-Amino-3-(2-fluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine


- 90 -

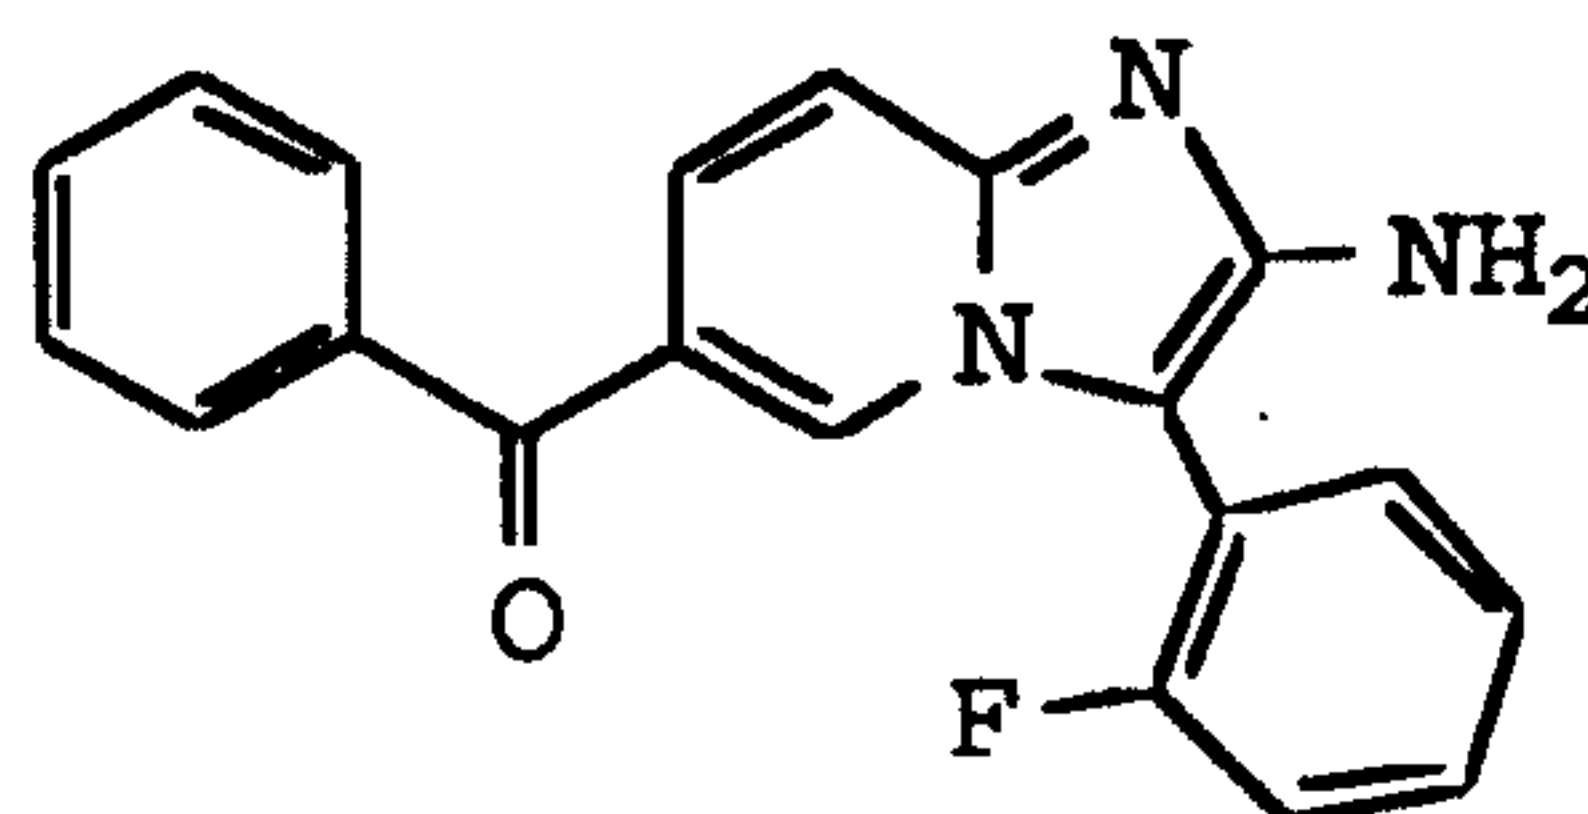

The 2-trifluoroacetamido-3-(2-fluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (9.46 g, 22.2 mmol) was converted to product in a manner substantially analogous to Example 56 to yield 6.70 g. (91.4%). EA, MS(FD).

Example 64


2-Amino-3-(3-fluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

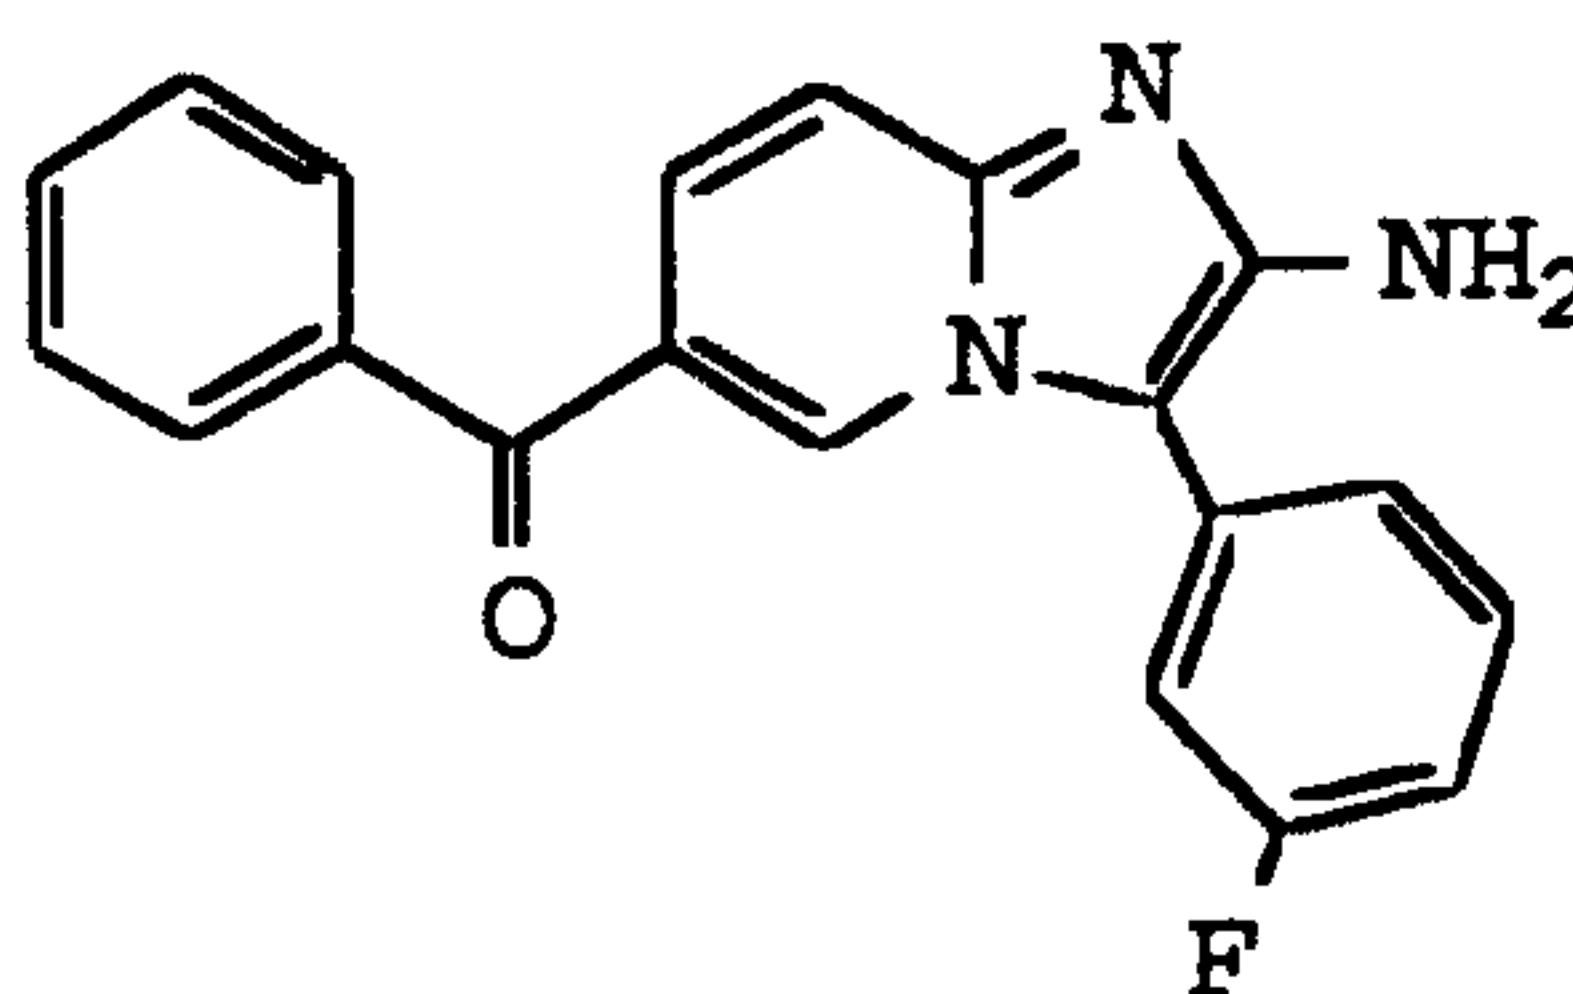

10 The 2-trifluoroacetamido-3-(3-fluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (14.3 g, 33.6 mmol) was converted to product in a manner substantially analogous to Example 56 to yield 8.30 g. (74.7%). EA, MS(FD).

Example 65

15 2-Amino-3-(4-fluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

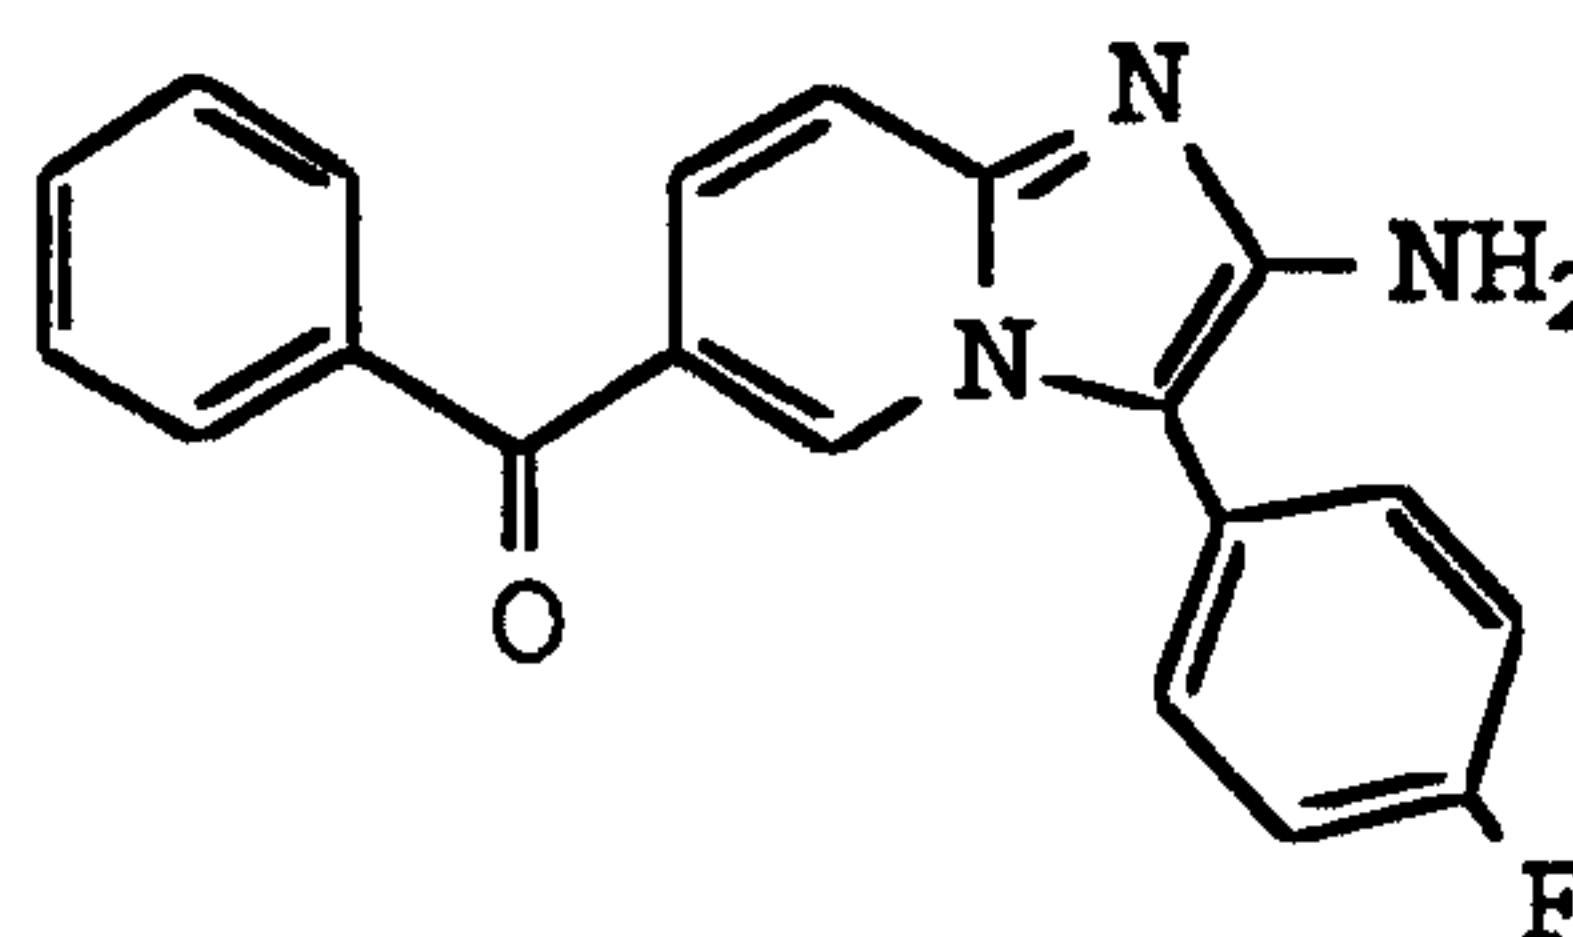


20 The 2-trifluoroacetamido-3-(4-fluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (18.6 g, 43.7 mmol) was converted to product in a manner substantially analogous to Example 56 to yield 11.2 g. (77.2%). EA, MS(FD).

Example 66

2-Amino-3-benzyl-6-benzoyl-imidazo[1,2-a]pyridine


- 91 -

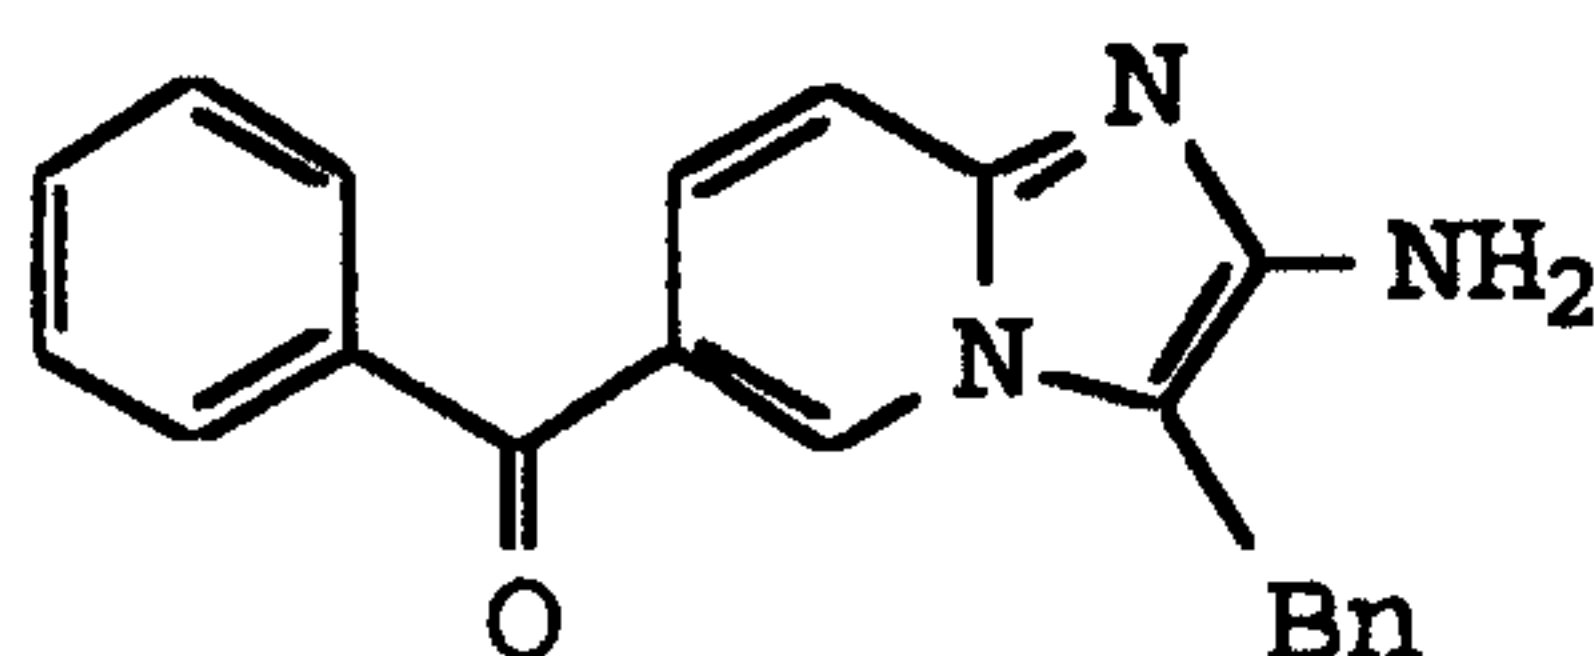

The 2-trifluoroacetamido-3-benzyl-6-benzoyl-imidazo[1,2-a]pyridine (2.14 g, 5.06 mmol) was converted to product in a manner substantially analogous to Example 56 to
 5 yield 1.29 g. (78.2%). EA, MS(FD).

Example 67


2-Amino-3-(3-trifluoromethylphenyl)-6-benzoyl-imidazo[1,2-a]pyridine

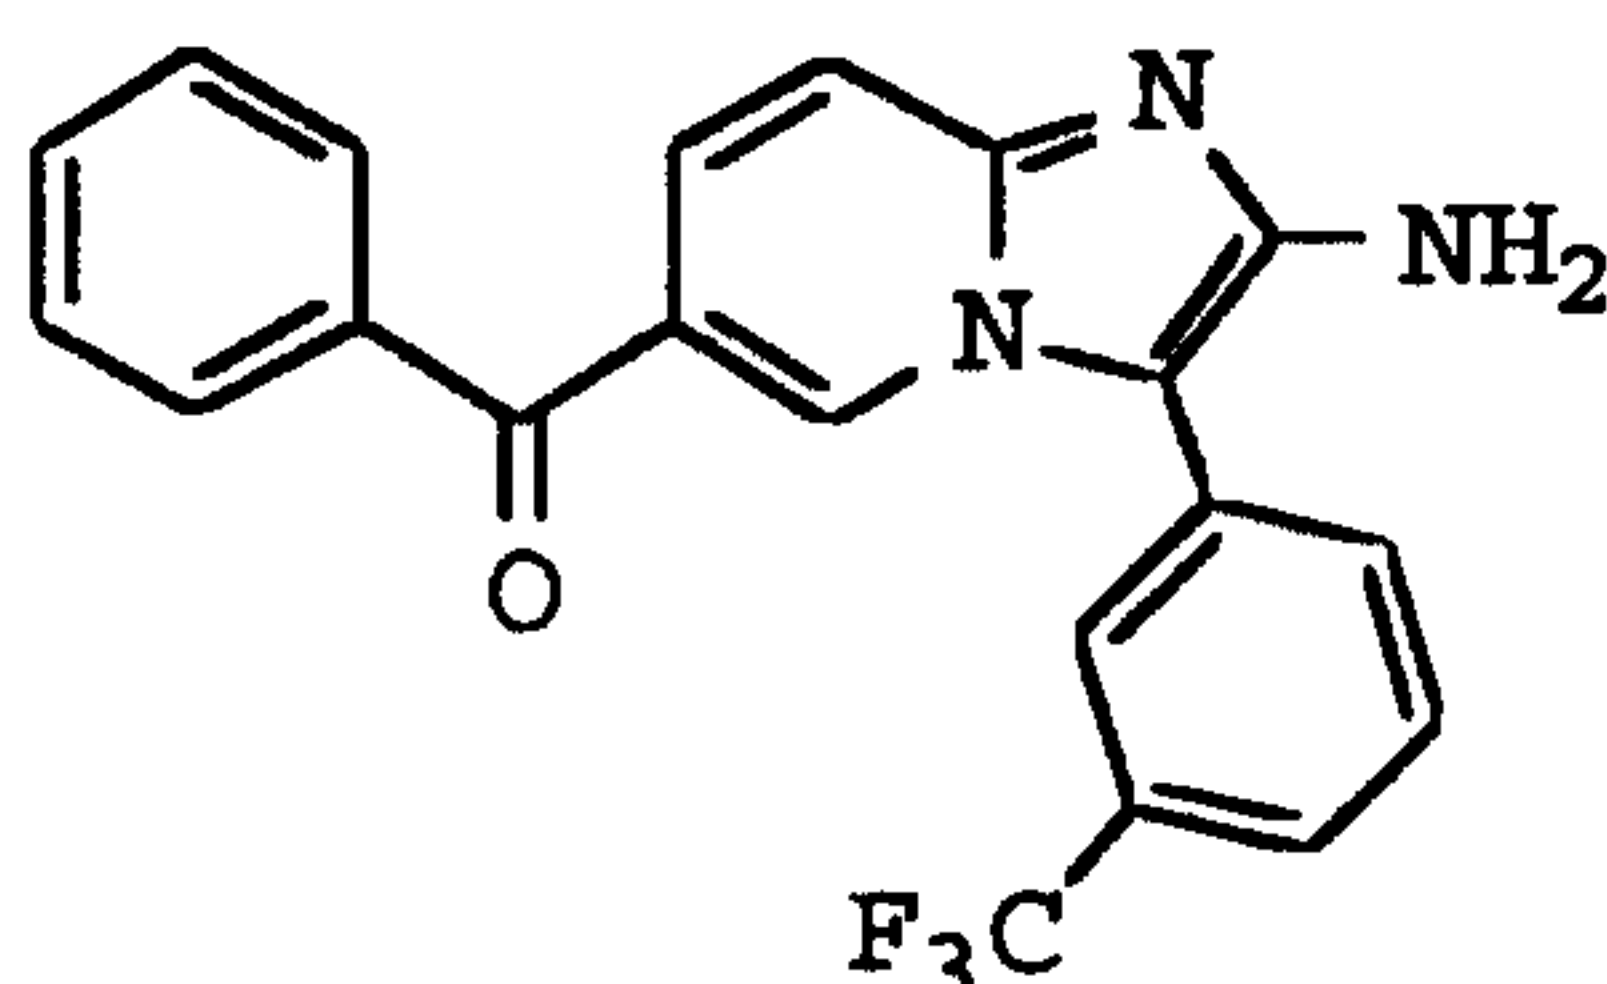

- 10 The 2-trifluoroacetamido-3-(3-trifluoromethylphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (9.39 g, 19.7 mmol) was dissolved in 200 ml of MeOH and diisopropylethylamine (100 ml, 574 mmol) was added. The solution was heated to reflux and then stirred at reflux under N₂ for 2 days.
- 15 The solution was concentrated in vacuo and the residue recrystallized from EtOAc/hexane to yield 6.59 g of product. (87.9%). EA, MS(FD).

Example 68

2-Amino-3-(4-methoxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine

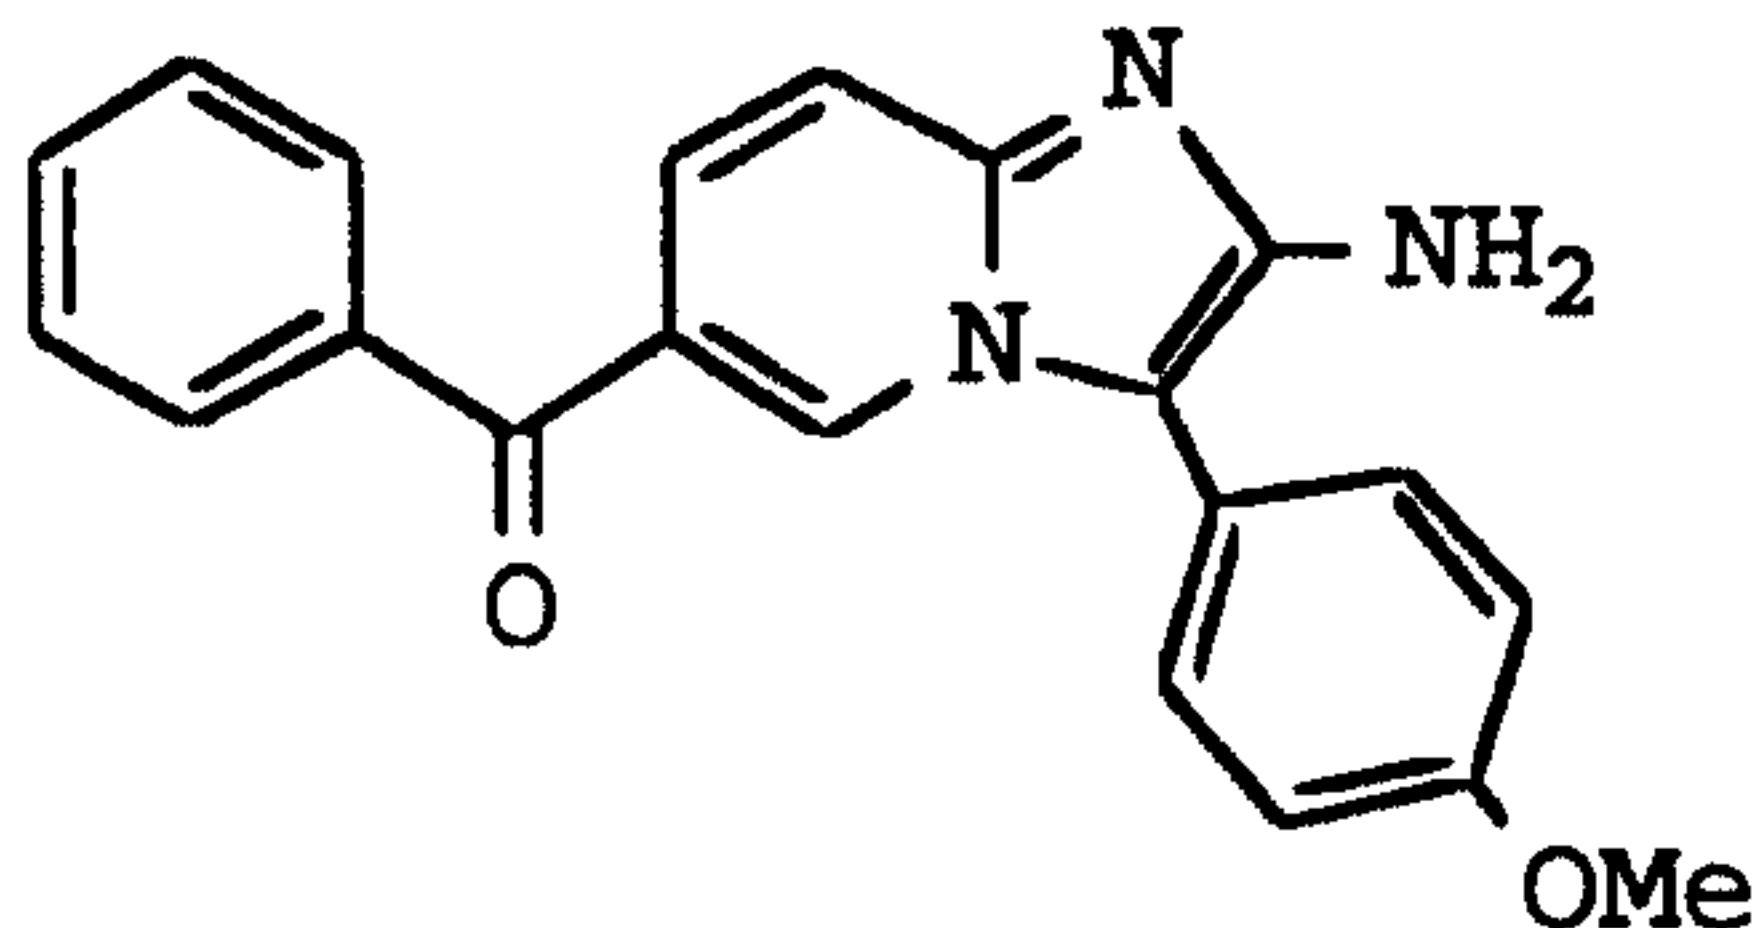


- 20 The 2-trifluoroacetamido-3-(4-methoxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (4.89 g, 11.1 mmol) was converted to product in a manner substantially analogous to Example
- 25 67 to yield 3.08 g. (80%). EA, MS(FD).

Example 69

- 92 -


2-Amino-3-(4-bromophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

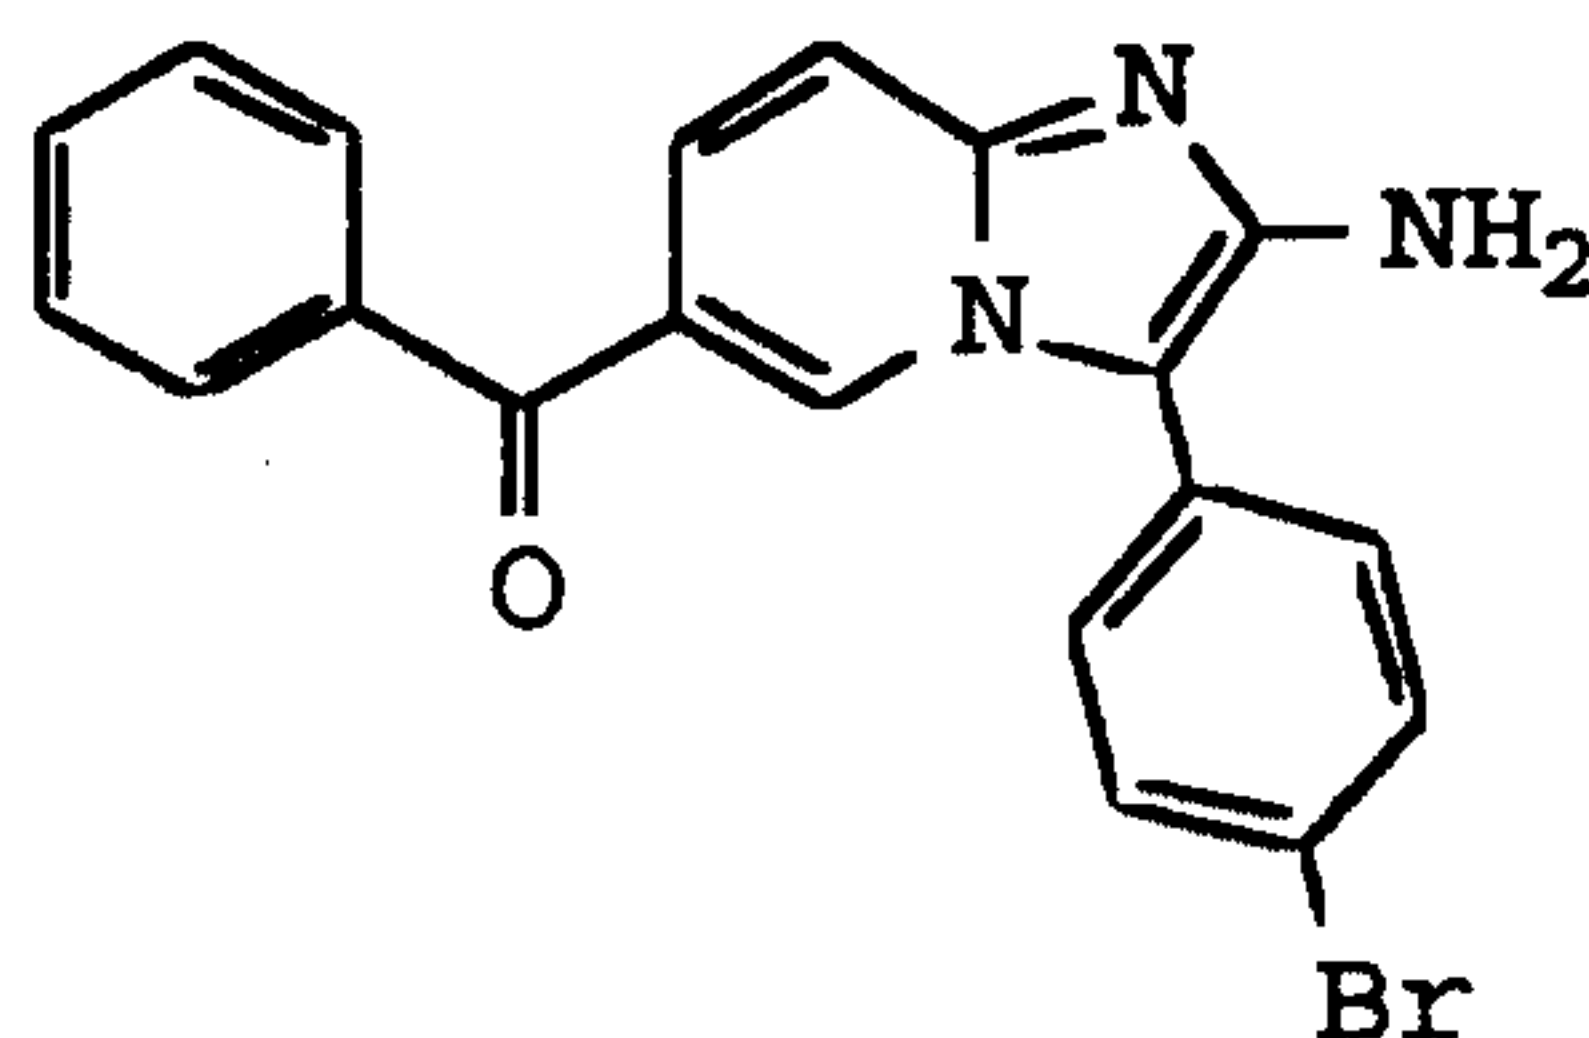

The 2-trifluoroacetamido-3-(4-bromophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (3.00 g, 6.15 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 1.80 g. (75%). EA, MS(FD).

Example 70


2-Amino-3-(2,3,4-trifluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

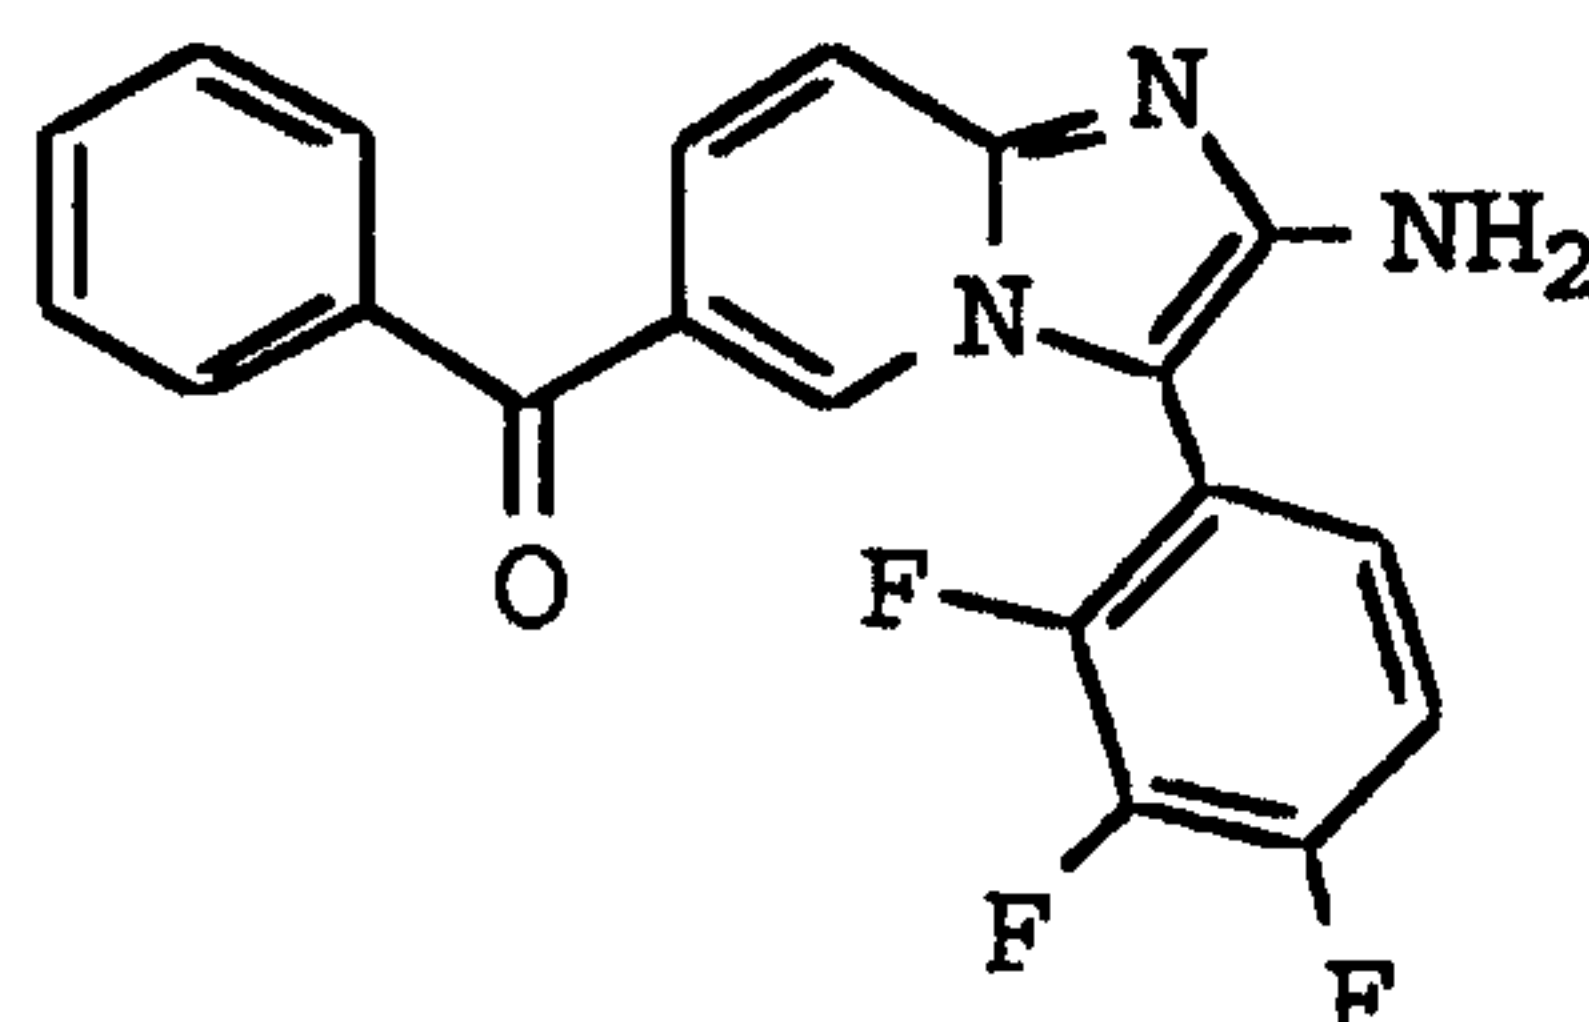

The 2-trifluoroacetamido-3-(2,3,4-trifluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (8.43 g, 18.2 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 5.82 g. (87%). EA, MS(FD).

Example 71

2-Amino-3-(3,4-difluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

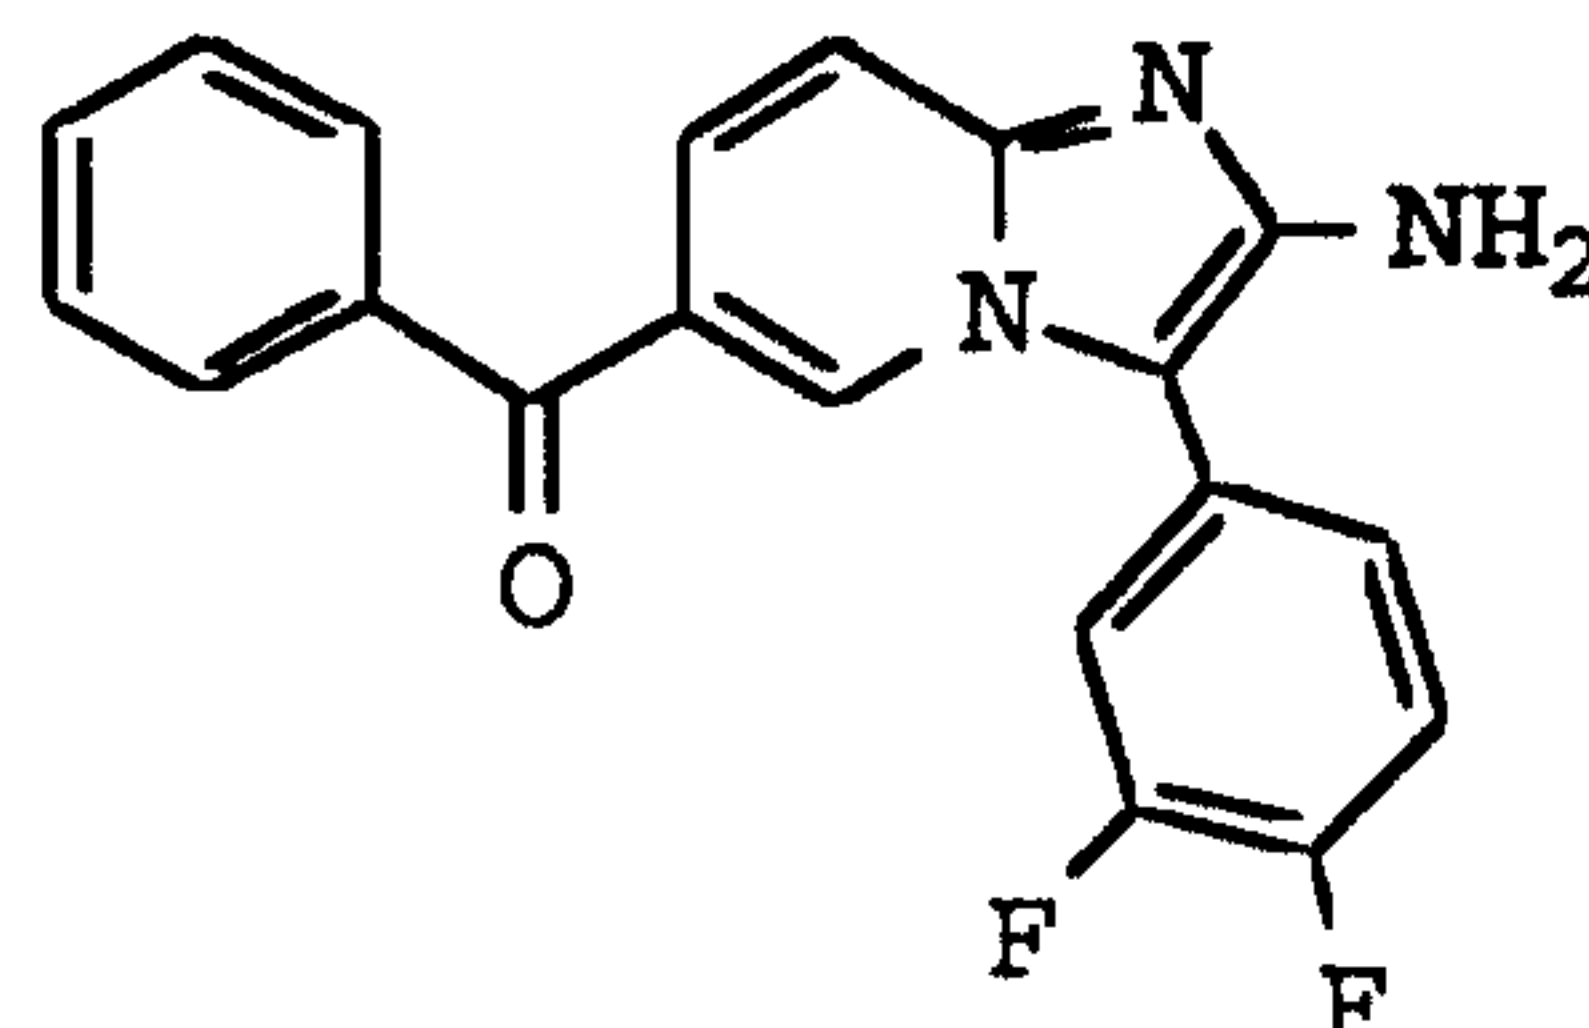


The 2-trifluoroacetamido-3-(3,4-difluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (7.44 g, 16.7 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 5.09 g. (87.2%). EA, MS(FD).

Example 72

- 93 -


2-Amino-3-(3,4-dichlorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

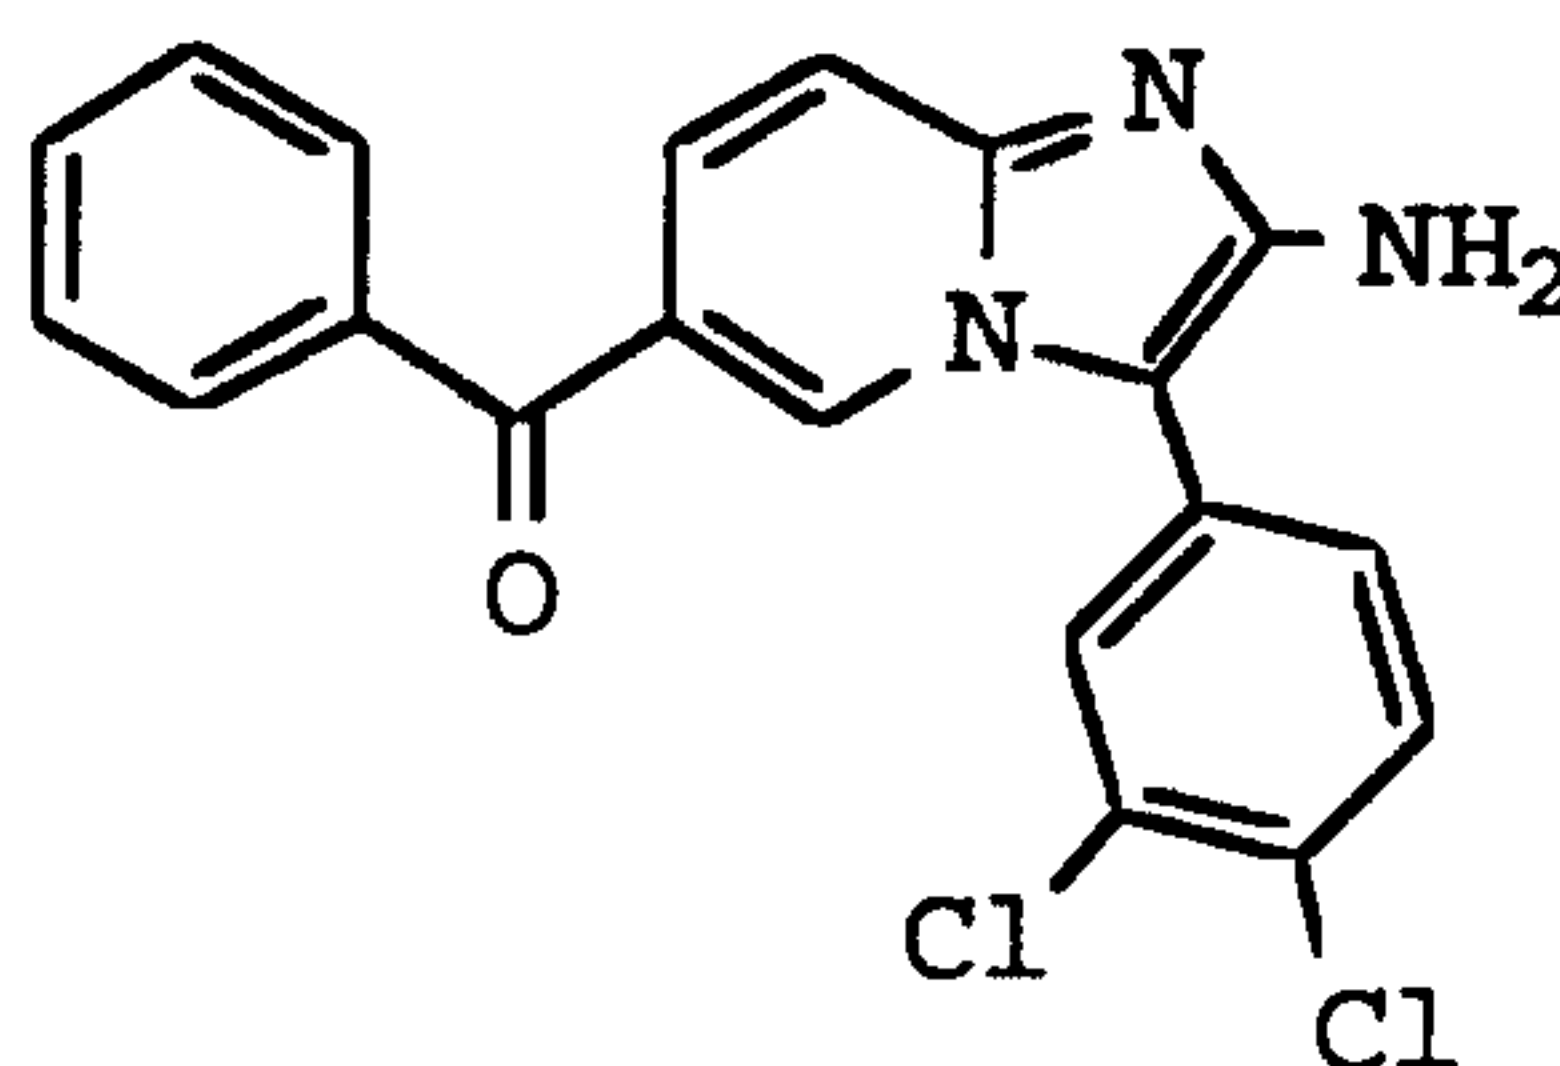

The 2-trifluoroacetamido-3-(3,4-dichlorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (9.91 g, 20.8 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 7.17 g. (90.4%). EA, MS(FD).

Example 73


2-Amino-3-(2,4,5-trifluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

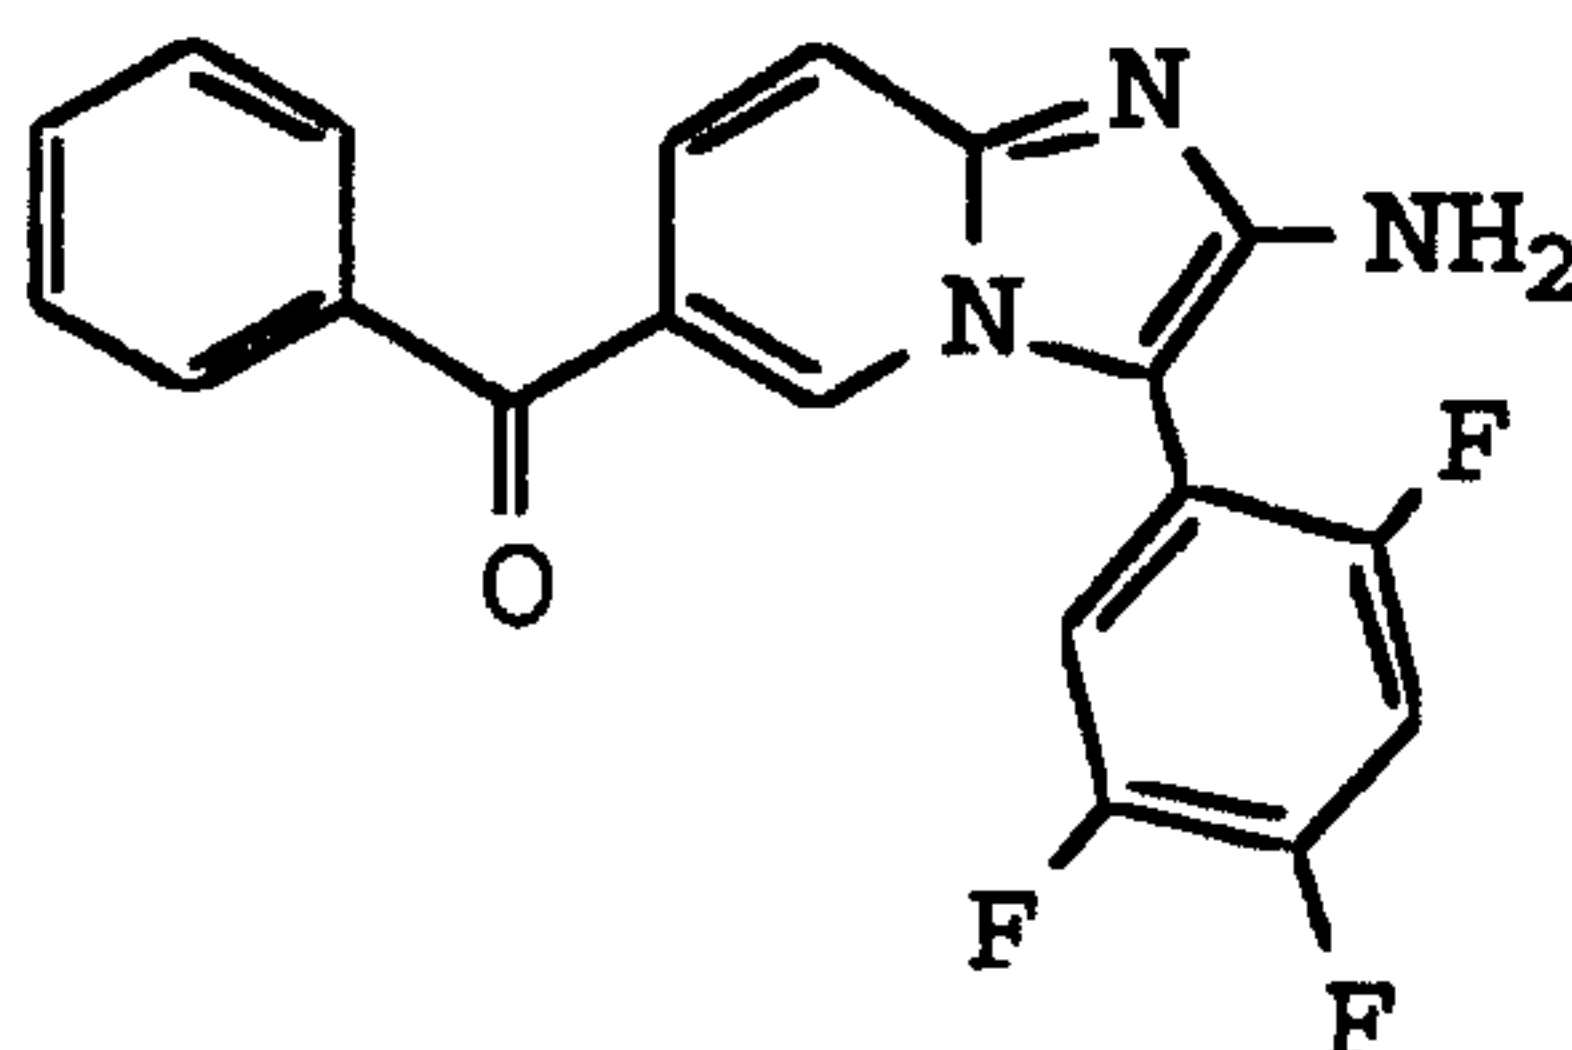

The 2-trifluoroacetamido-3-(2,4,5-trifluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (9.28 g, 20.0 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 7.28 g. (98.9%). EA, MS(FD).

Example 74

2-Amino-3-(2-chlorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

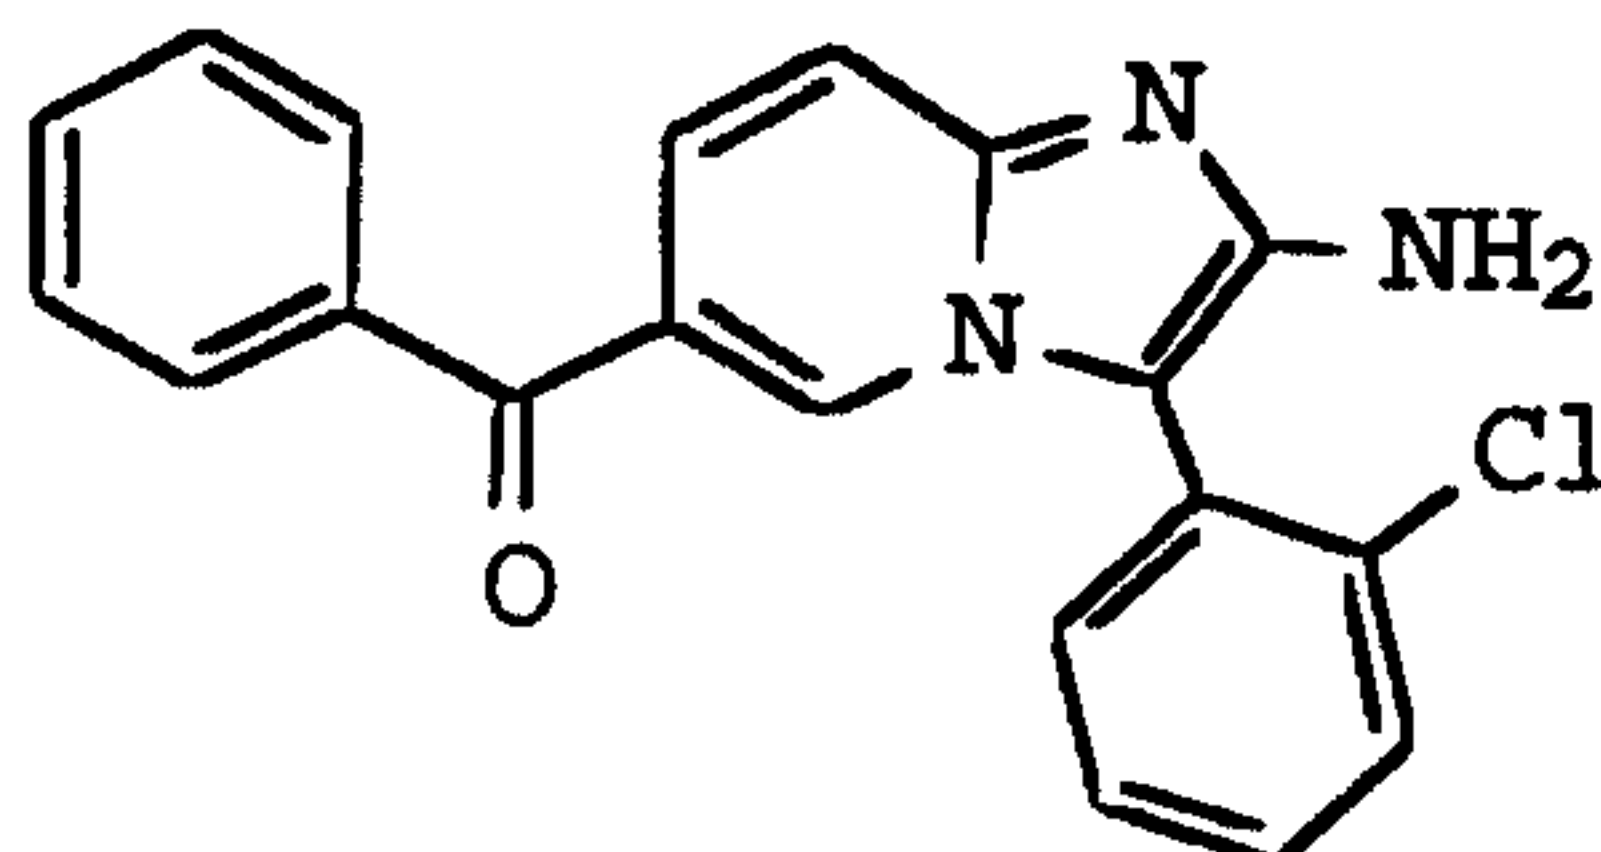


The 2-trifluoroacetamido-3-(2-chlorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (10.8 g, 24.2 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 7.45 g. (88.5%). EA, MS(FD).

Example 75

- 94 -


2-Amino-3-(3-chlorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

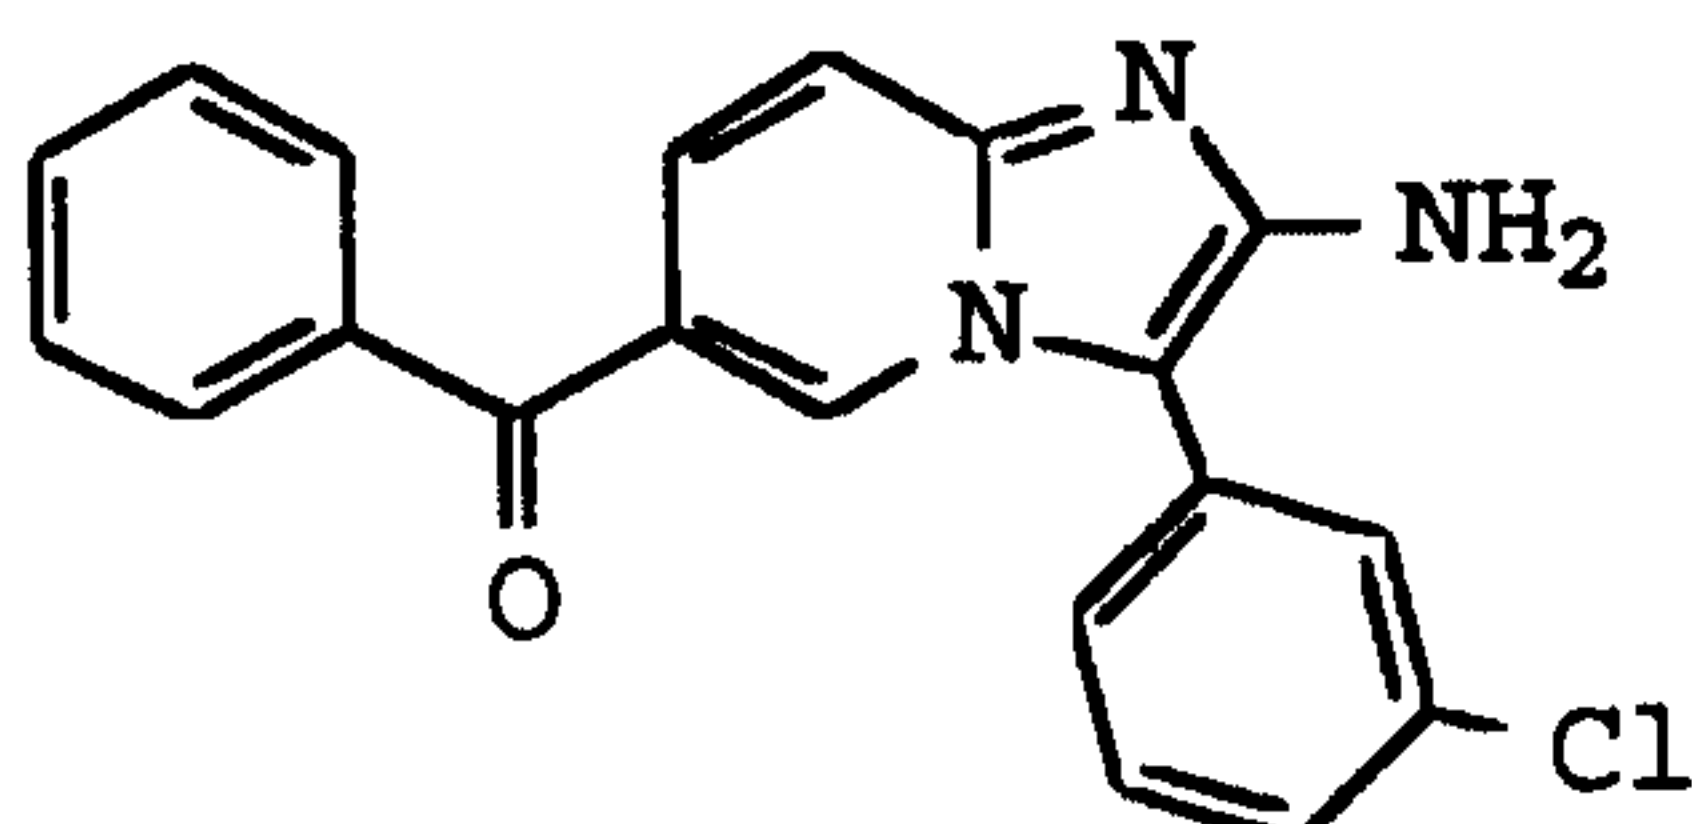

The 2-trifluoroacetamido-3-(3-chlorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (8.97 g, 20.2 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 6.05 g. (86.1%). EA, MS(FD).

Example 76


2-Amino-3-(4-chlorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

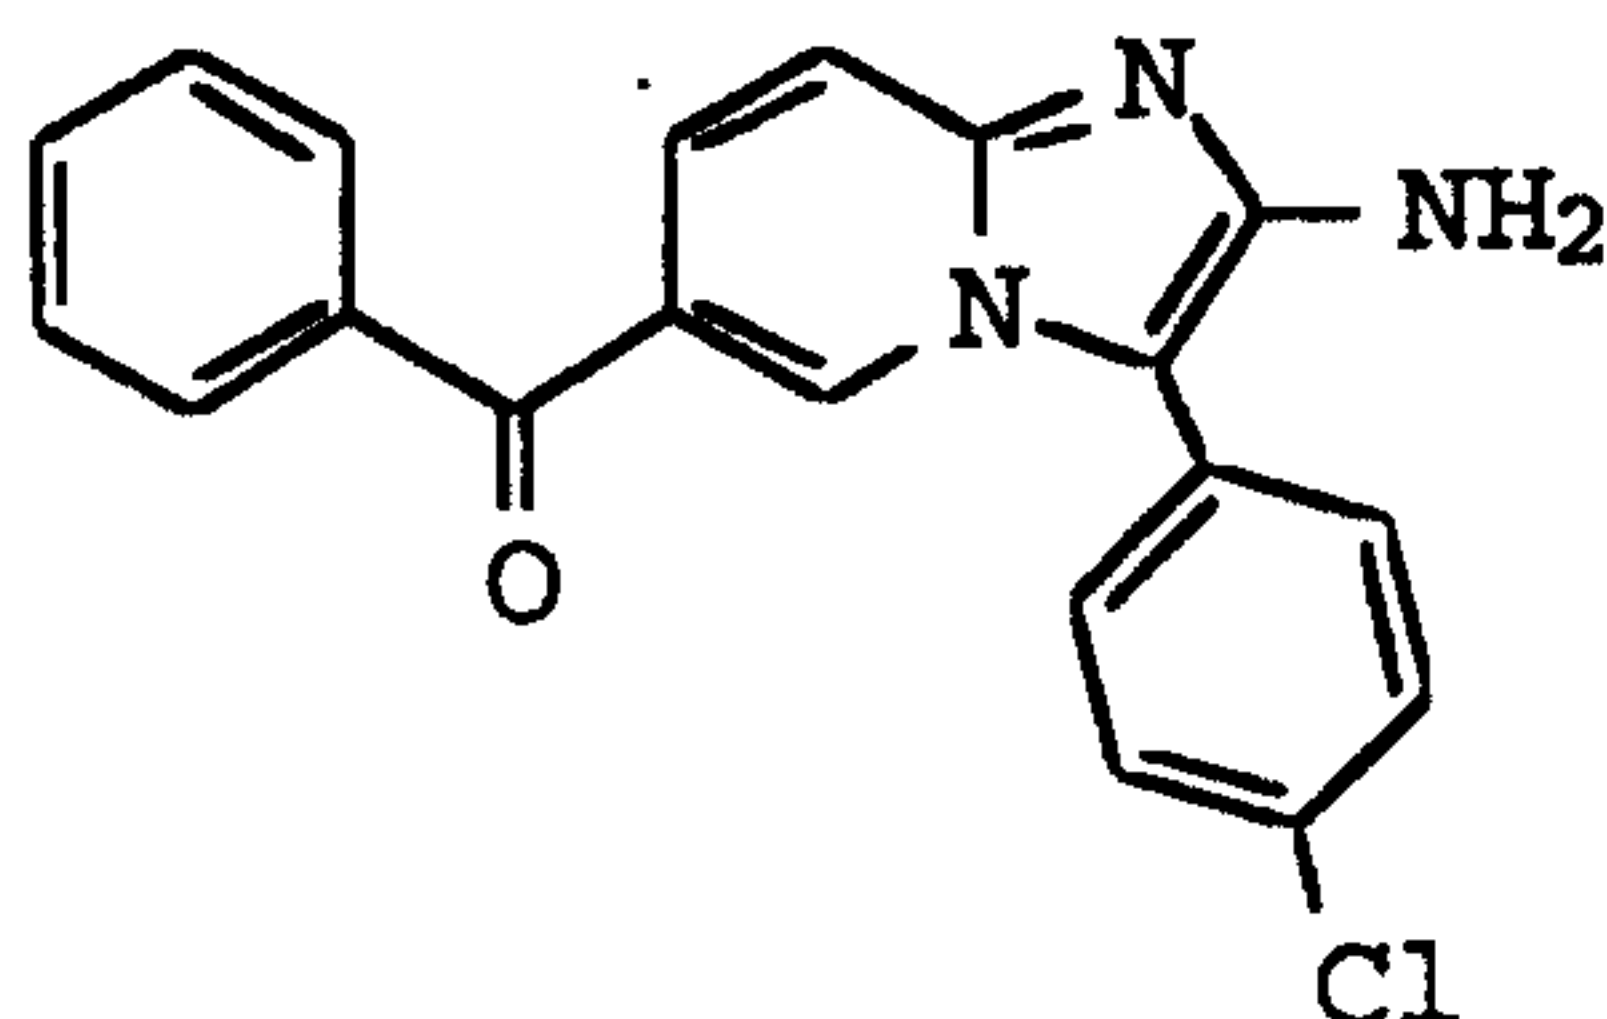

The 2-trifluoroacetamido-3-(4-chlorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (10.8 g, 24.2 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 7.17 g. (85.2%). EA, MS(FD).

Example 77

2-Amino-3-(4-trifluoromethoxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine

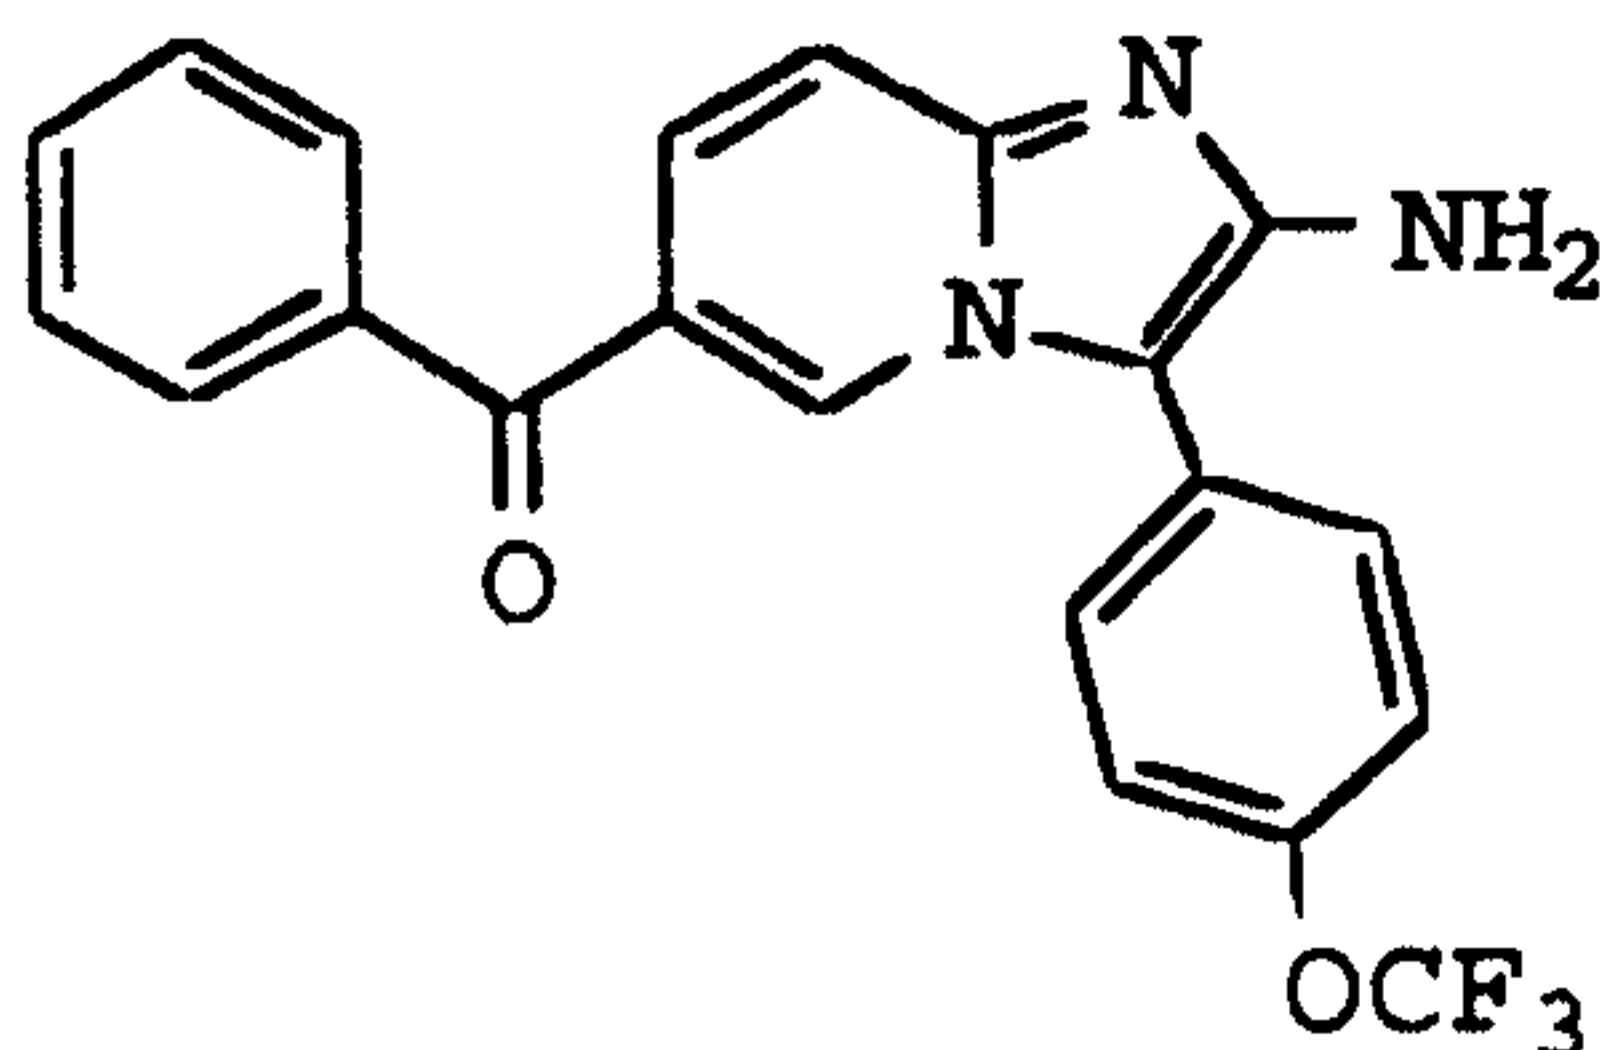


The 2-trifluoroacetamido-3-(4-trifluoromethoxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (10.6 g, 21.5 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 8.24 g. (96.7%). EA, MS(FD).

Example 78

-95-


2-Amino-3-(3-trifluoromethoxyphenyl)-6-benzoyl-
imidazo[1,2-a]pyridine

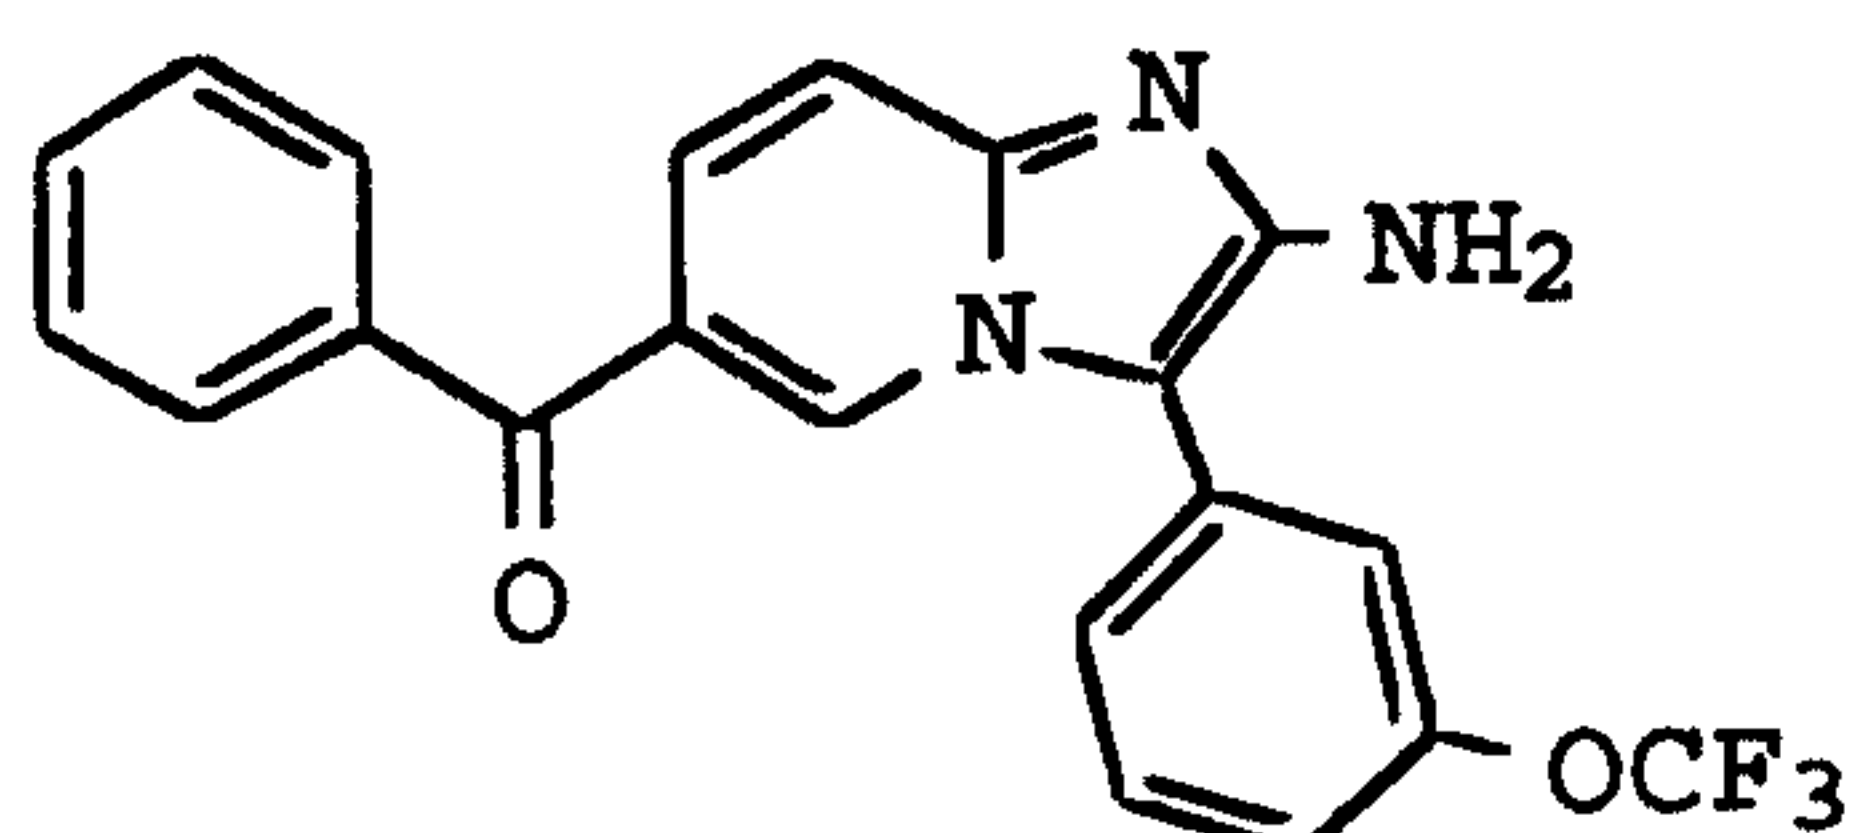

The 2-trifluoroacetamido-3-(3-trifluoromethoxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (10.4 g, 21.1 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 7.89 g. (94.4%). MS(FD), NMR.

Example 79


2-Amino-3-(2-fluoro-4-trifluoromethylphenyl)-6-benzoyl-
imidazo[1,2-a]pyridine

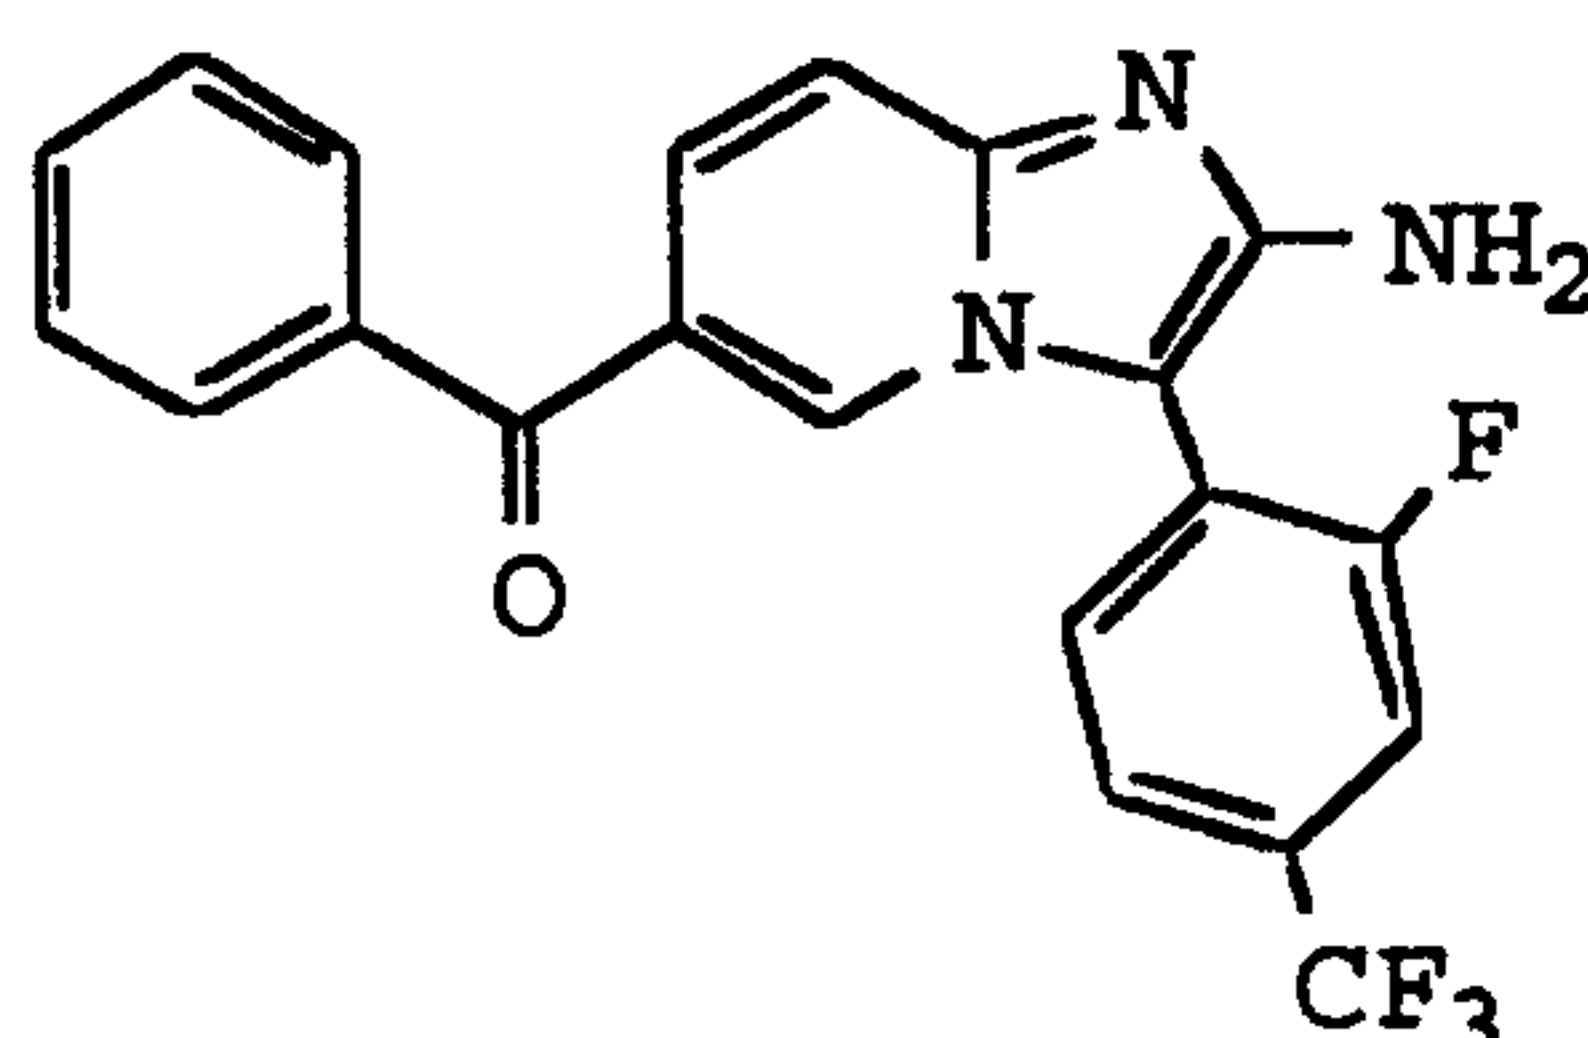

The 2-trifluoroacetamido-3-(2-fluoro-4-trifluoromethylphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (8.03 g, 16.2 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 6.00 g. (92.8%). EA, MS(FD).

Example 80

2-Amino-3-(2,3,4,5,6-pentafluorophenyl)-6-benzoyl-
imidazo[1,2-a]pyridine

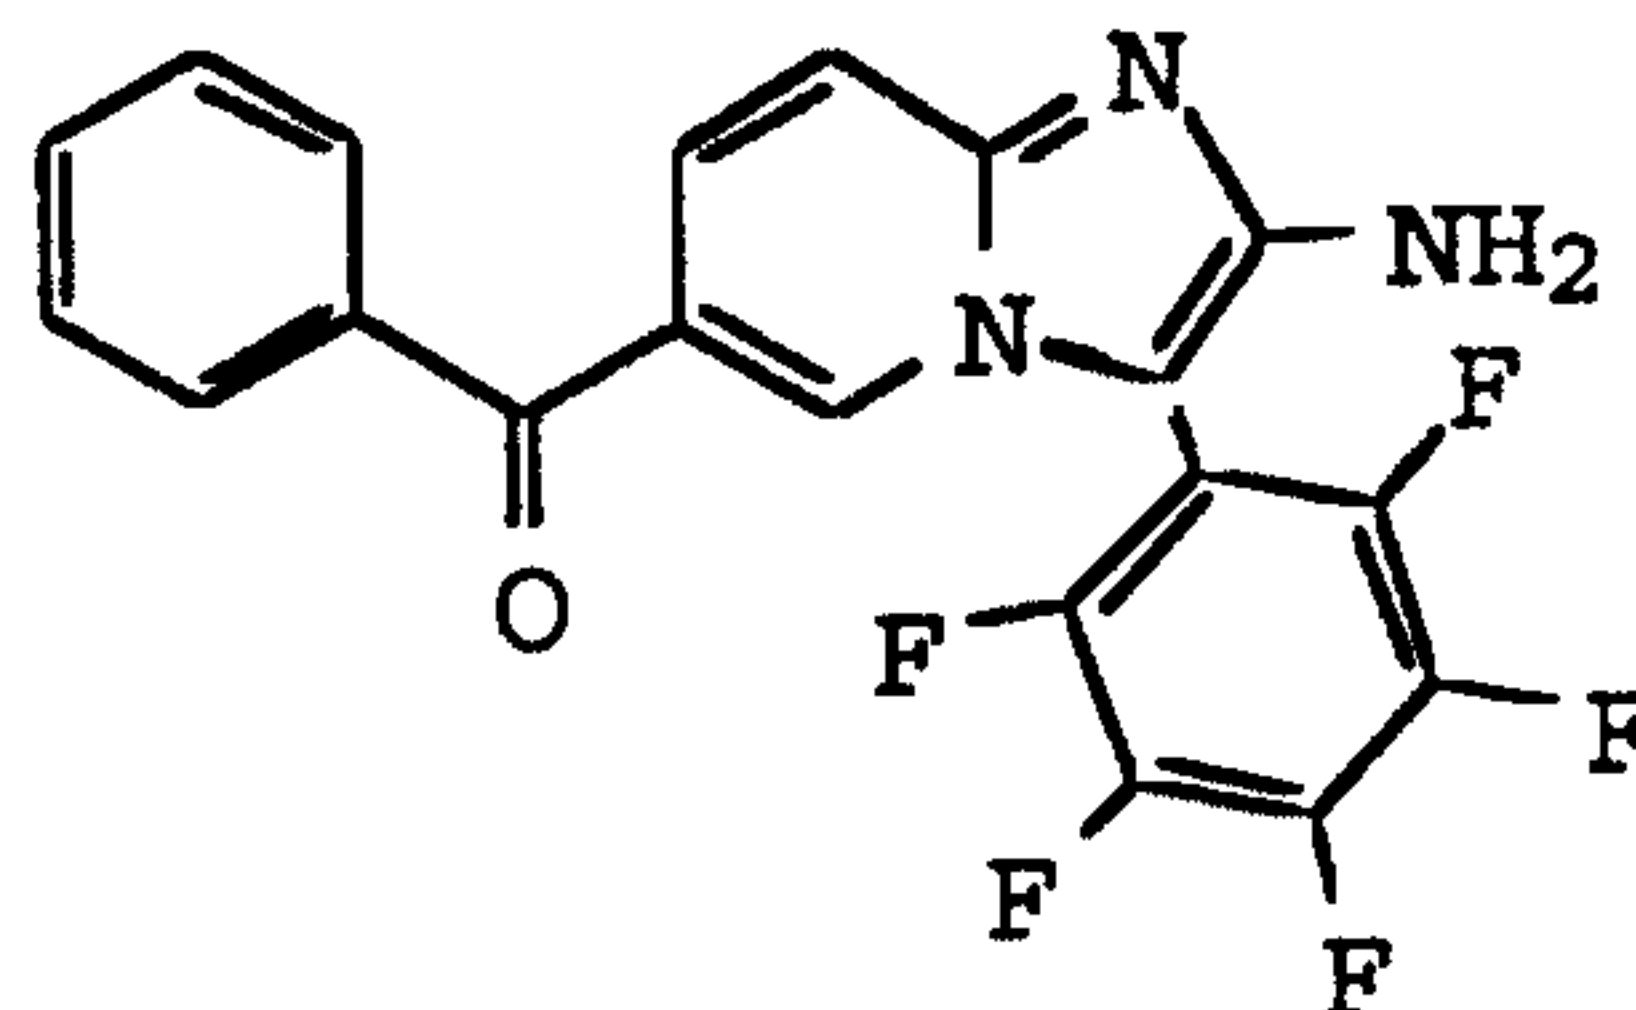


The 2-trifluoroacetamido-3-(2,3,4,5,6-pentafluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (5.03 g, 10.1 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 3.79 g. (93.3%). EA, MS(FD).

-96-

Example 81


2-Amino-3-(2-trifluoromethylphenyl)-6-benzoyl-imidazo[1,2-a]pyridine

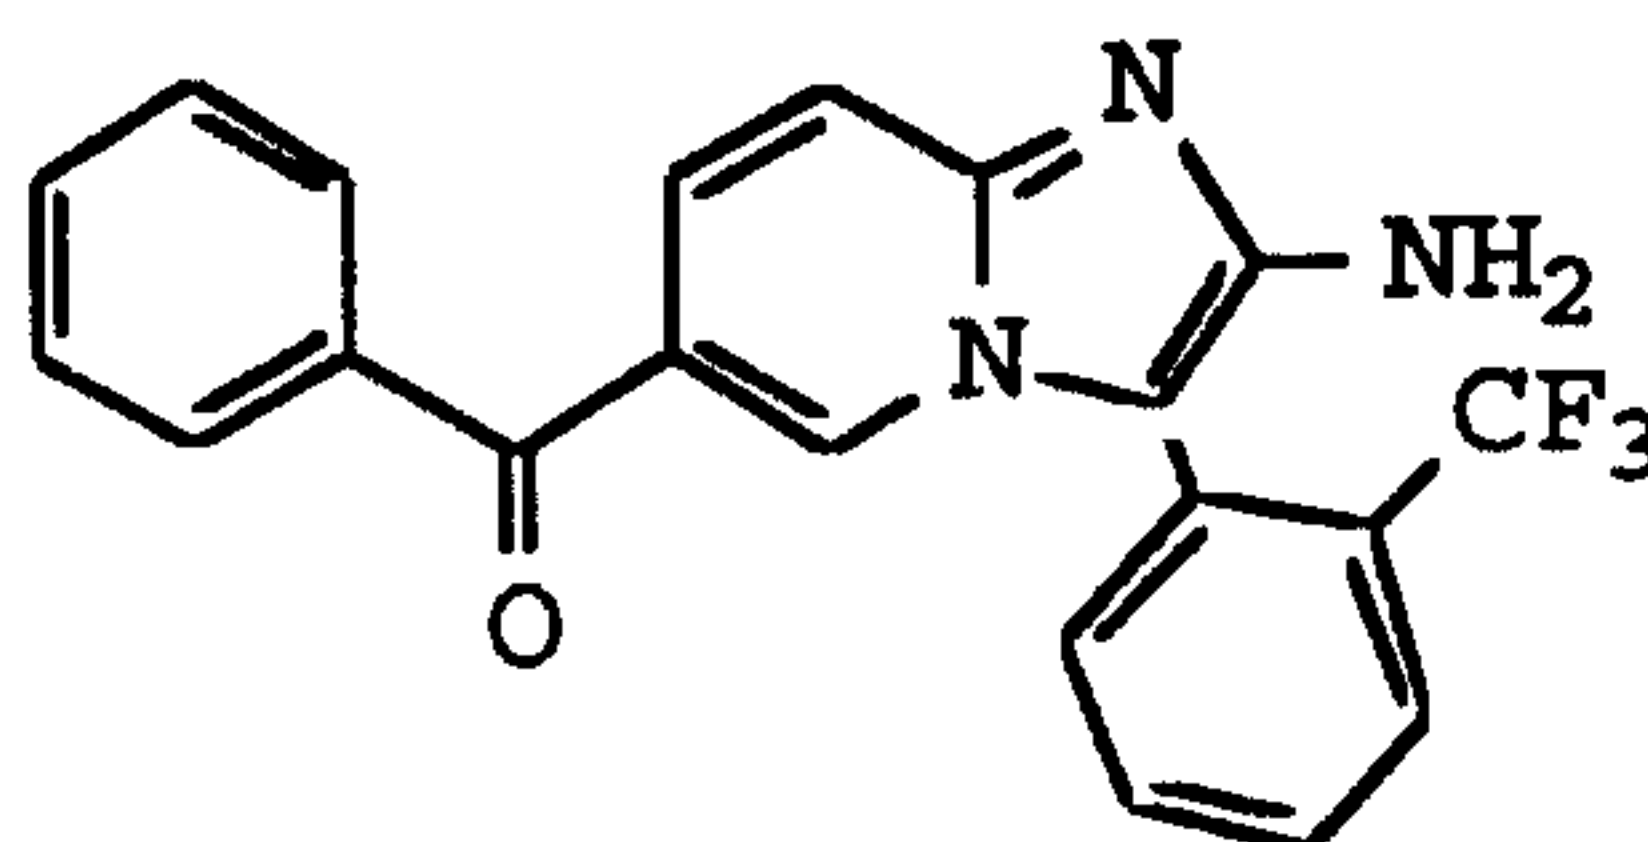

- 5 The 2-trifluoroacetamido-3-(2-trifluoromethylphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (6.22 g, 13.0 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 4.25 g. (85.5%). EA, MS(FD).

Example 82


- 10 2-Amino-3-(thiophen-3-yl)-6-benzoyl-imidazo[1,2-a]pyridine

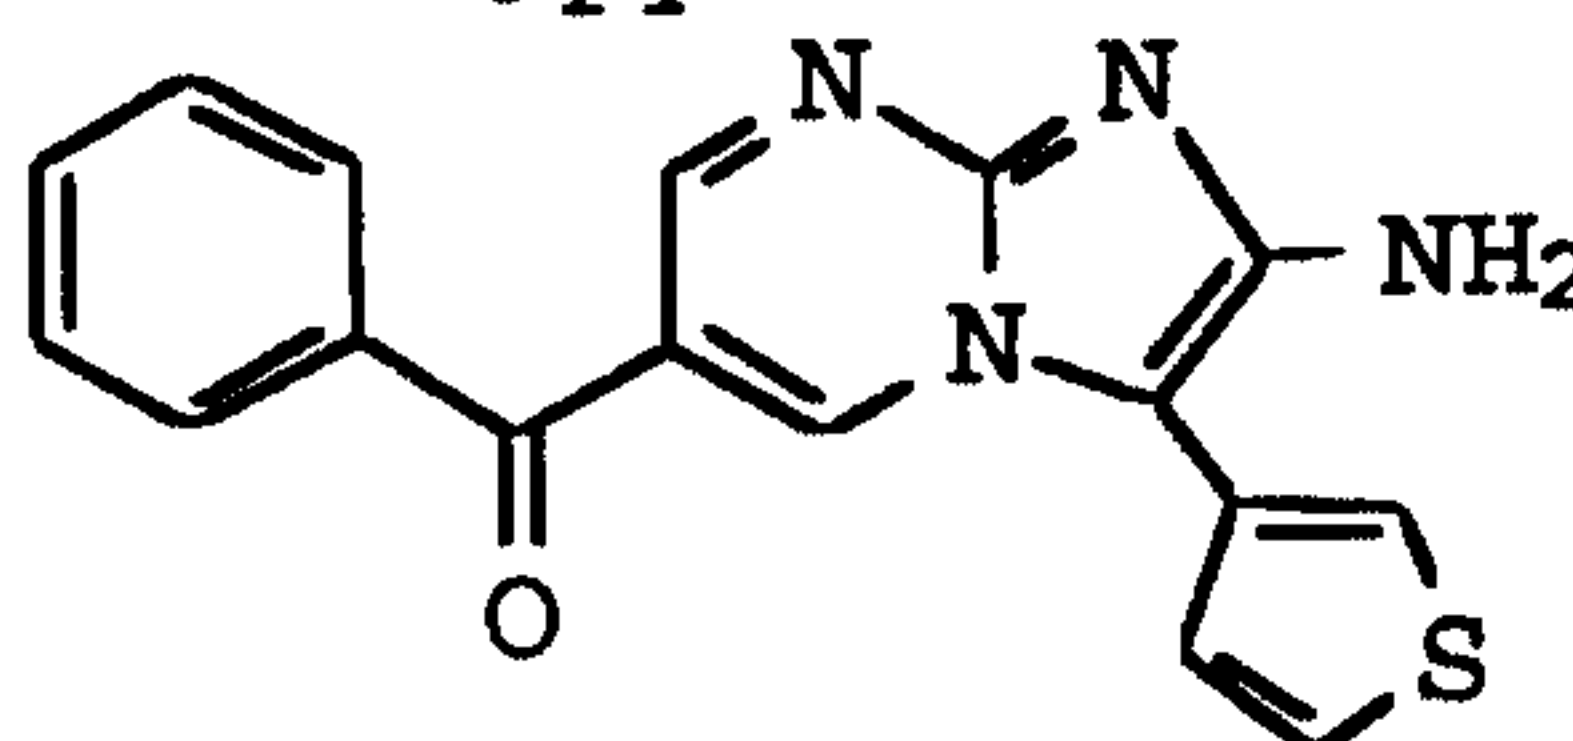

- 15 The 2-trifluoroacetamido-3-(thiophen-3-yl)-6-benzoyl-imidazo[1,2-a]pyridine (8.88 g, 21.4 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 5.51 g. (80.7%). EA, MS(FD).

Example 83

2-Amino-3-(2-trifluoromethyl-4-fluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

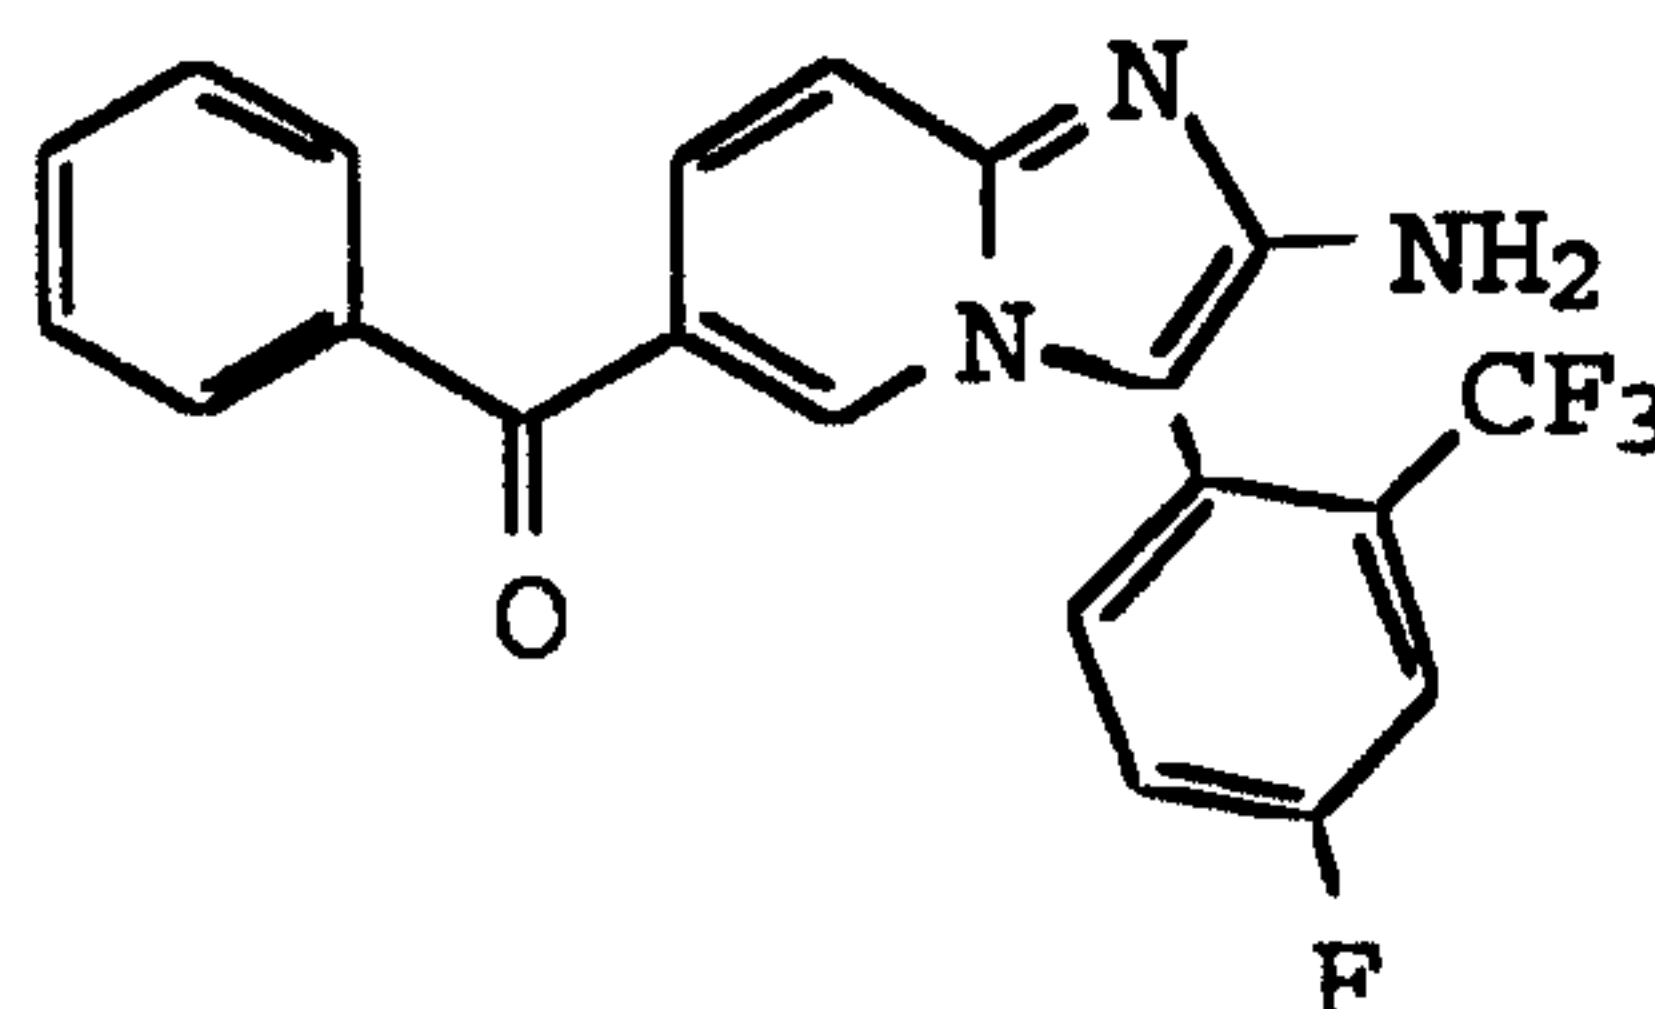

20


The 2-trifluoroacetamido-3-(2-trifluoromethyl-4-fluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (11.0 g, 22.2 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 8.60 g.

25 (97.2%). MS(FD).

Example 84

-97-

2-Amino-3-(2-fluoro-6-trifluoromethylphenyl)-6-benzoyl-imidazo[1,2-a]pyridine

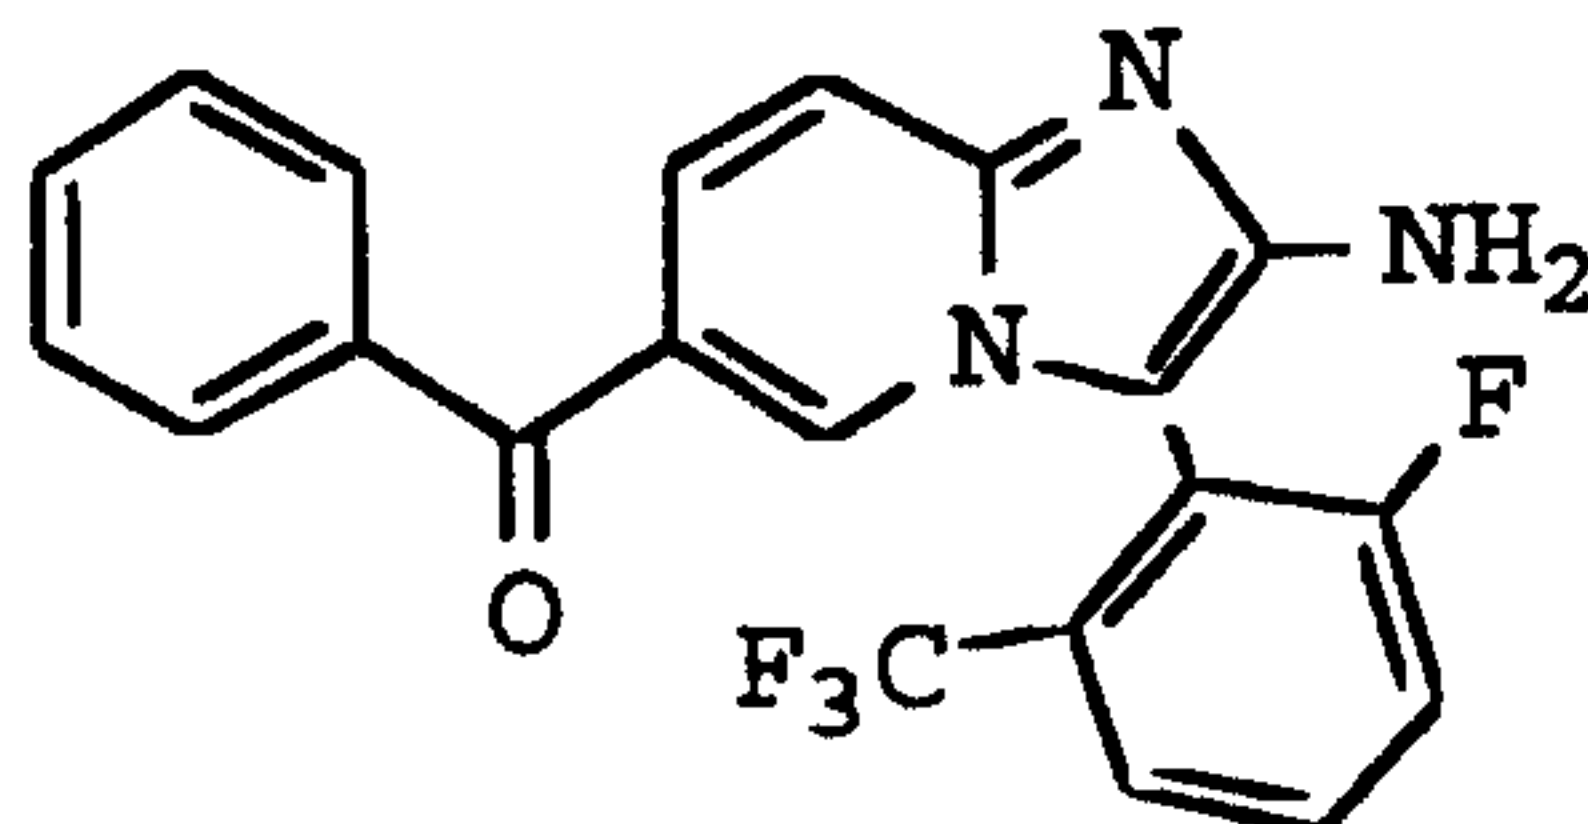


The 2-trifluoroacetamido-3-(2-fluoro-6-trifluoromethylphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (1.80 g, 3.64 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 1.28 g. (88.3%). EA, MS(FD).

10

Example 85

2-Amino-3-(2-methoxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine

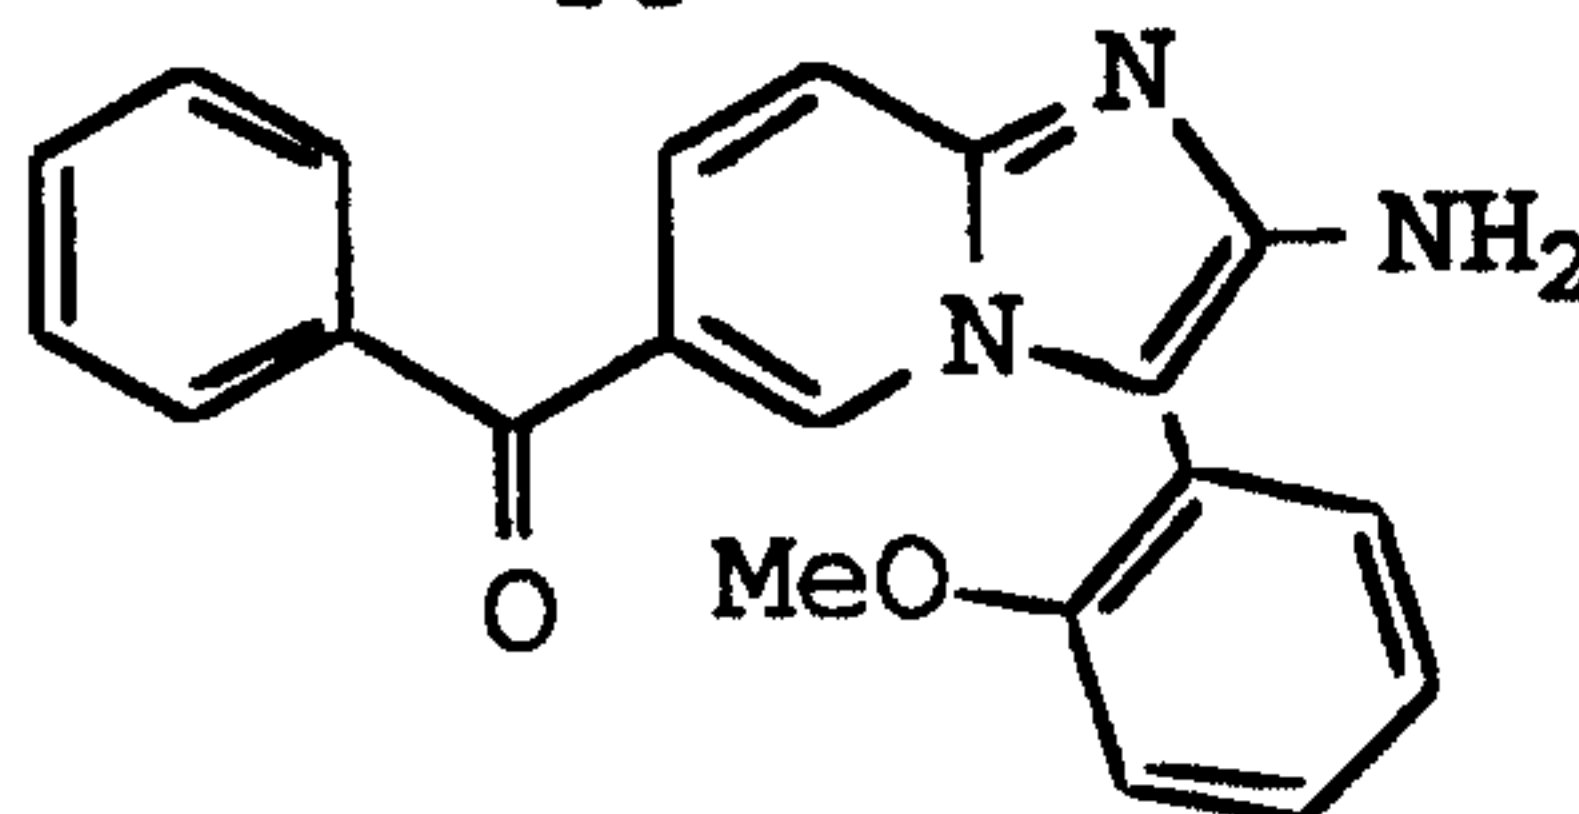


The 2-trifluoroacetamido-3-(2-methoxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (7.40 g, 16.8 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 5.0 g. (87%). EA, MS(FD).

20

Example 86

2-Amino-3-(4-carbomethoxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine

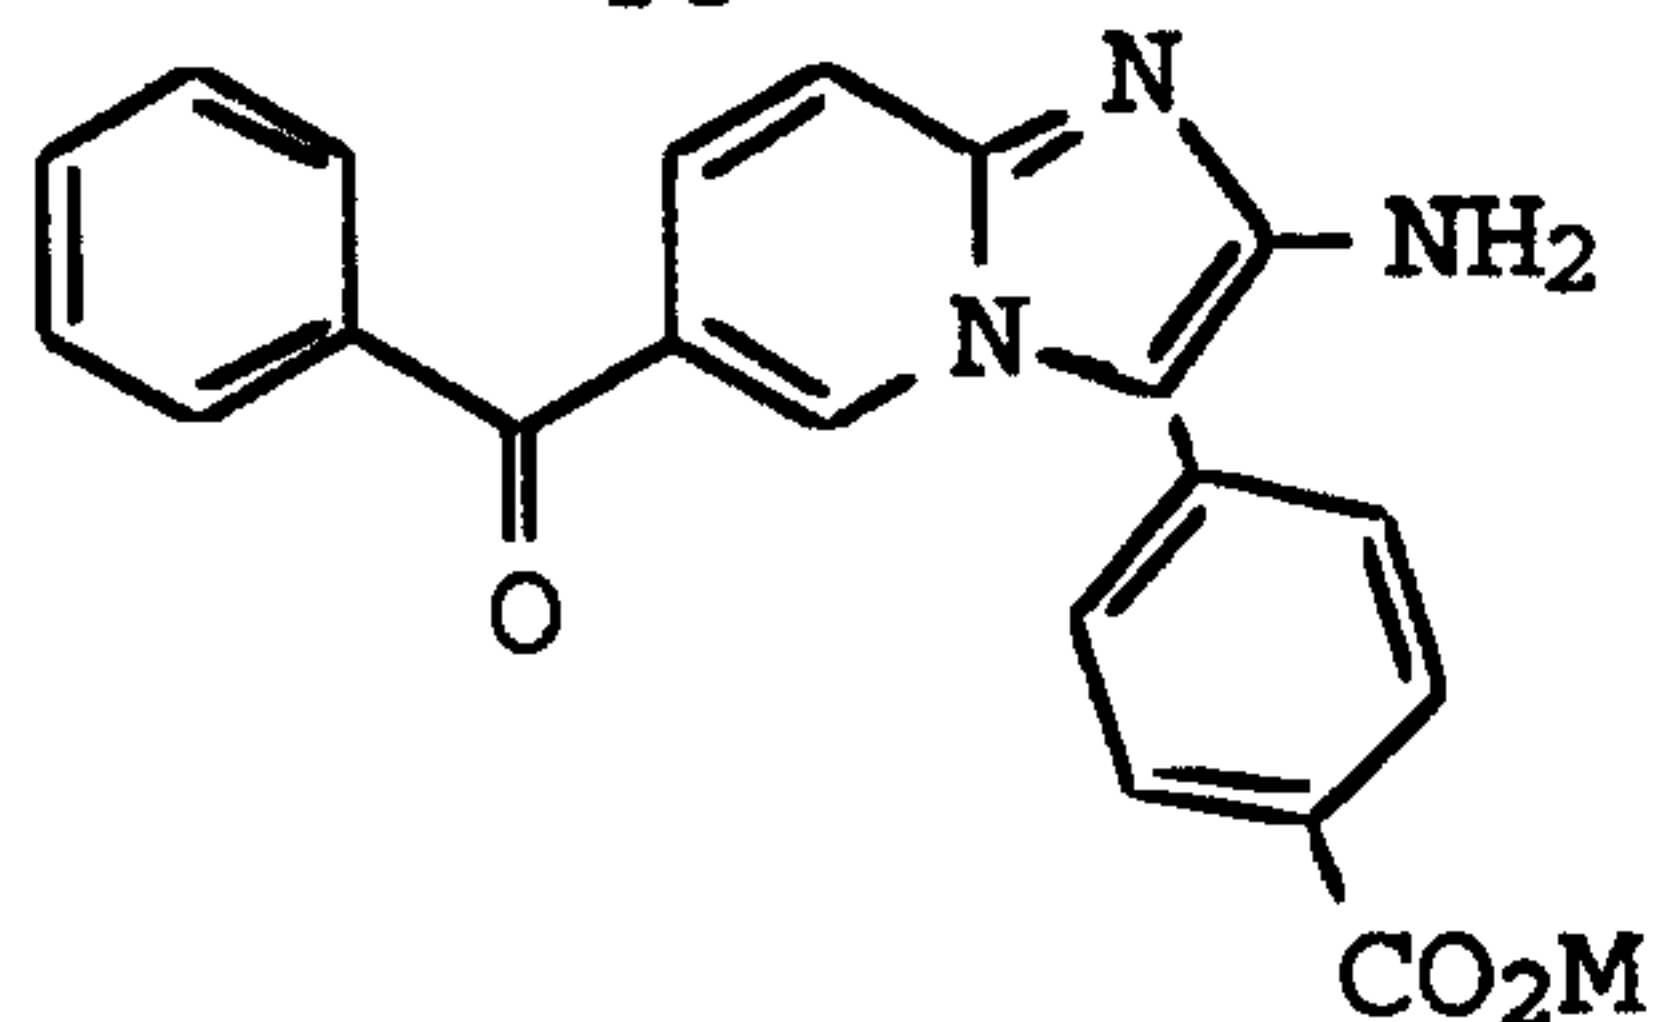


The 2-trifluoroacetamido-3-(4-carbomethoxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (2.13 g, 16.8 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 1.44 g. (85%). EA, MS(FD).

25

Example 87

- 98 -


2-Amino-3-(4-nitrophenyl)-6-benzoyl-imidazo[1,2-a]pyridine

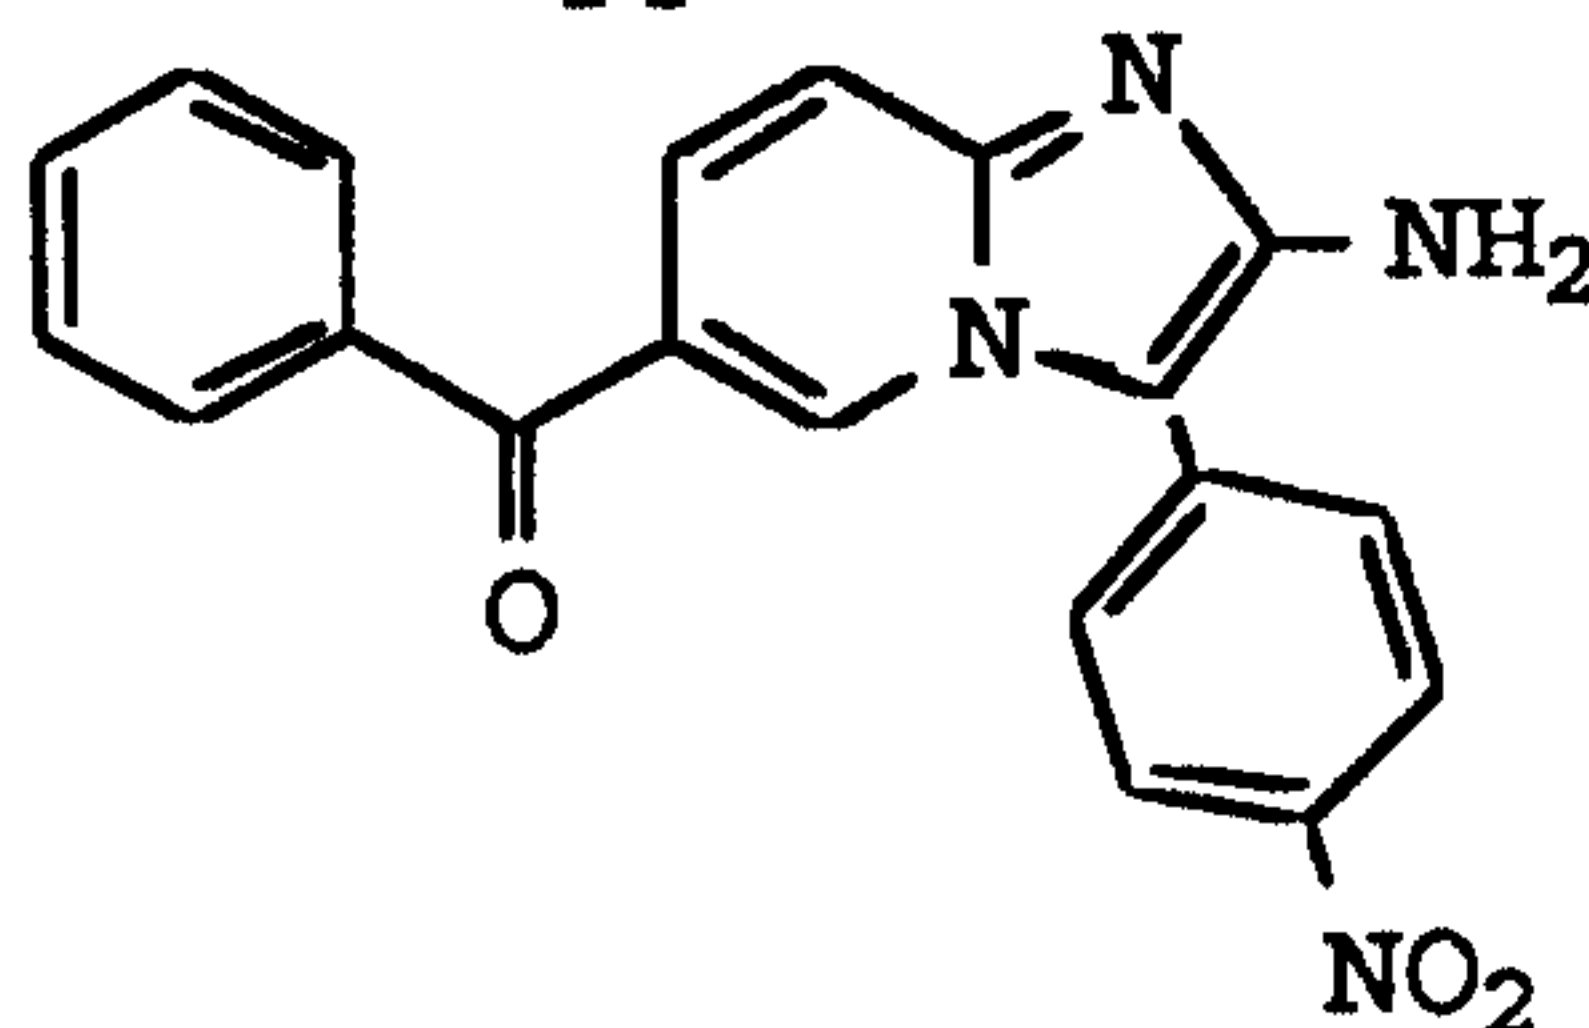

The 2-trifluoroacetamido-3-(4-nitrophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (8.59 g, 18.9 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 5.04 g. (74.4%). EA, MS(FD).

Example 88

2-Amino-3-isobutyl-6-benzoyl-imidazo[1,2-a]pyridine

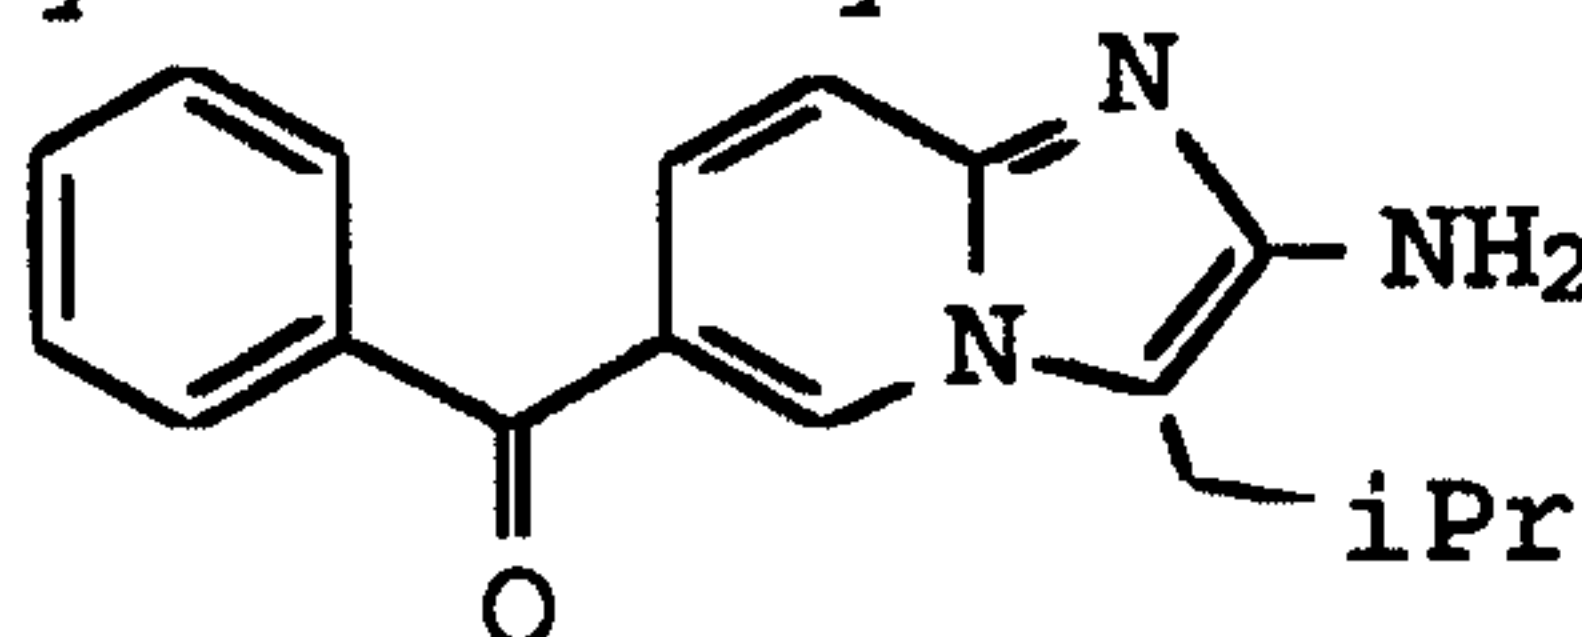


10

The 2-trifluoroacetamido-3-isobutyl-6-benzoyl-imidazo[1,2-a]pyridine (2.37 g, 6.09 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 1.49 g. (83.5%). EA, MS(FD).

15

Example 89

2-Amino-3-(4-carboxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine

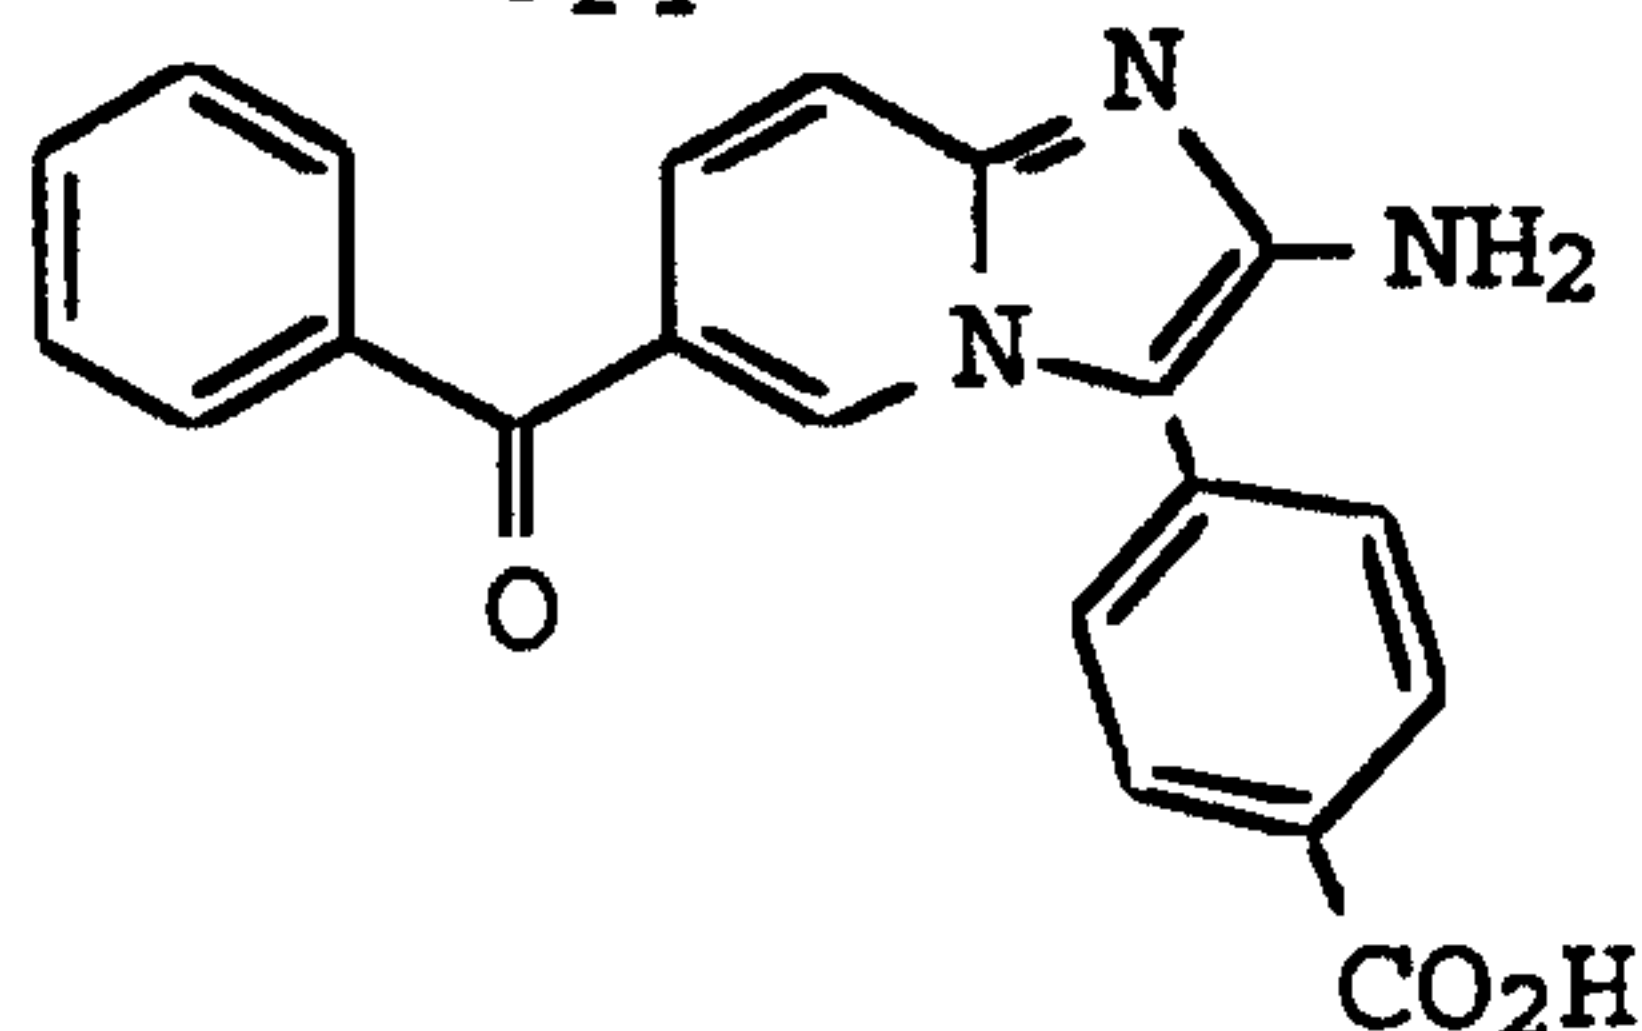


The 2-amino-3-(4-carbomethoxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (3.00 g, 8.09 mmol) was dissolved in 25 ml of THF and 8 ml of H₂O and stirred at RT. Lithium hydroxide (968 mg, 40.4 mmol) was added and the reaction stirred overnight. The solvents were removed, and H₂O added to solids which were then filtered and washed with H₂O. The solids were recrystallized from MeOH to yield 2.62 g of product. (91%). EA, MS(FD).

Example 90

- 99 -

2-Amino-3-(4-N-methoxyamido)-6-benzoyl-imidazo[1,2-a]pyridine

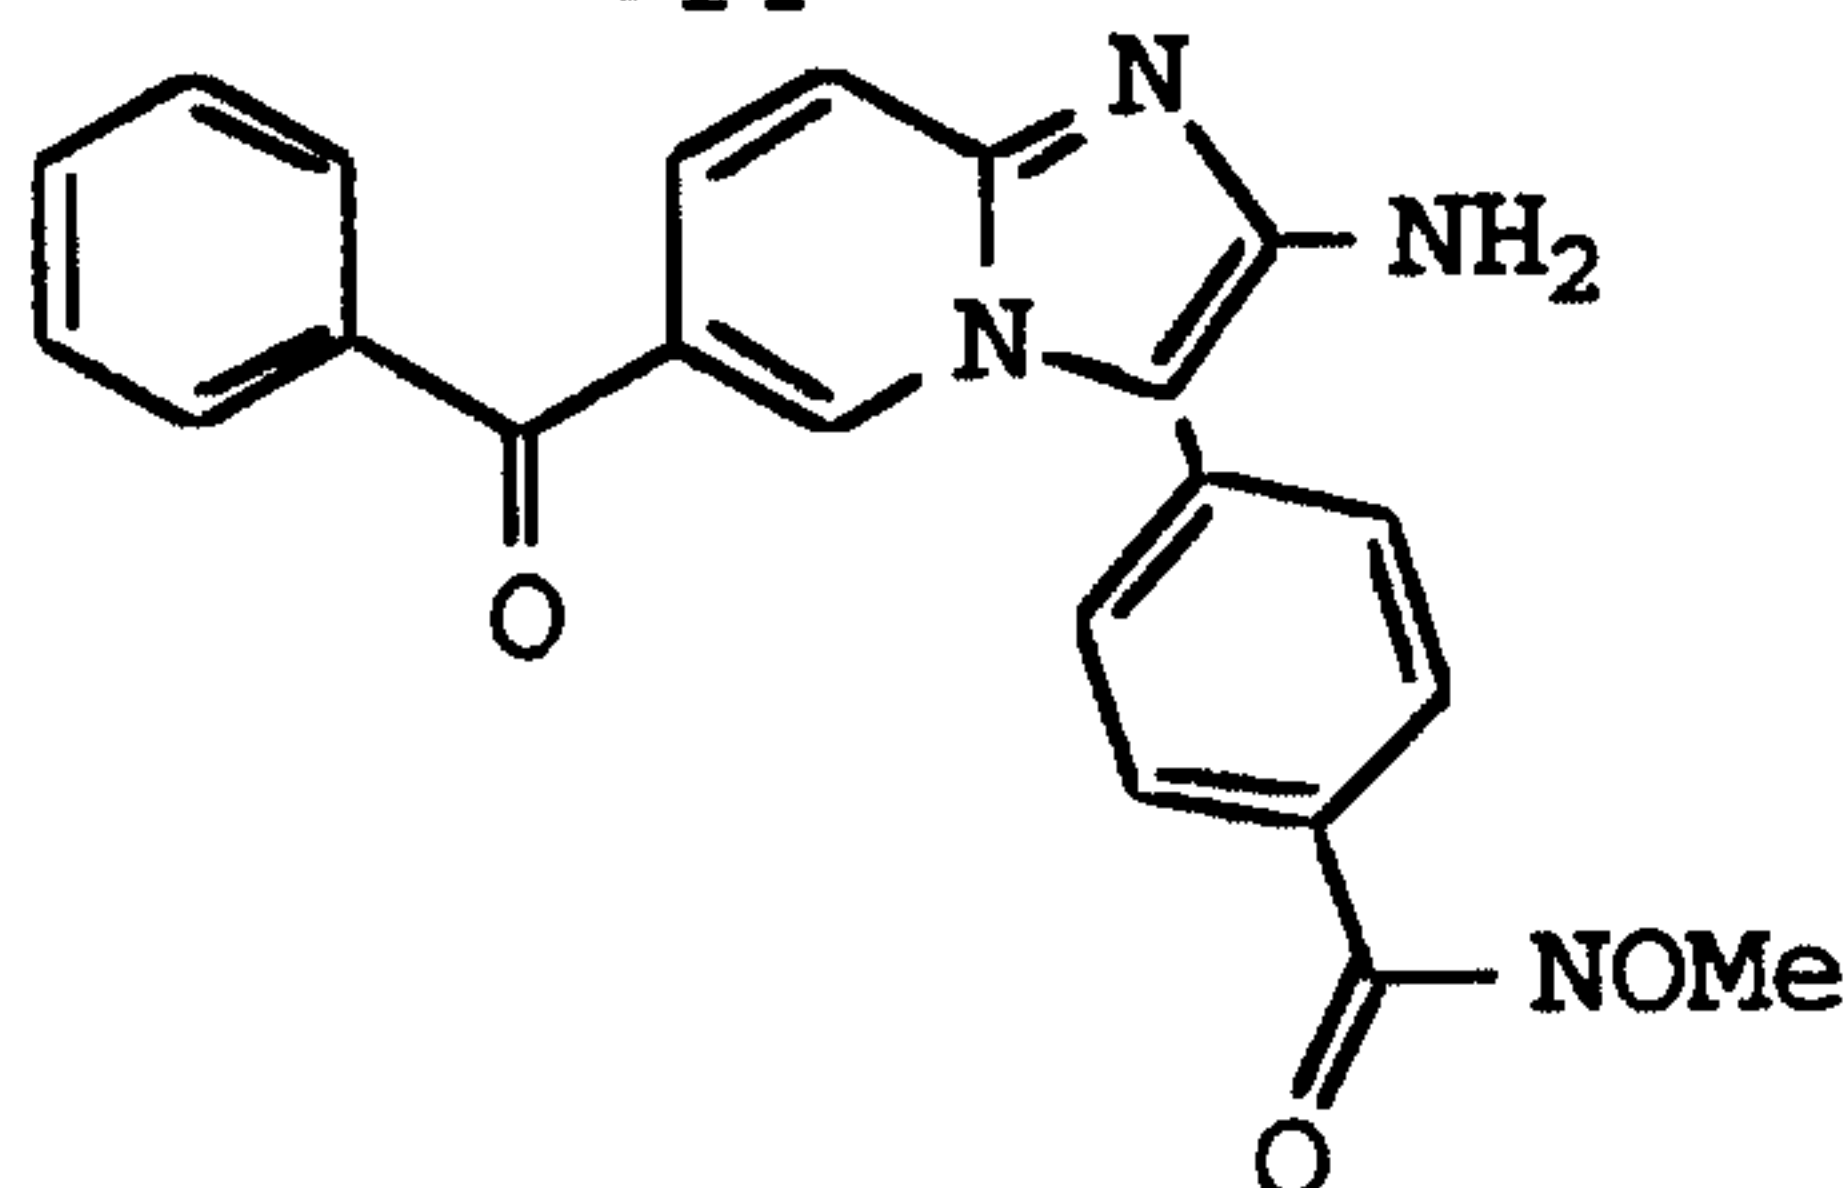


The 2-amino-3-(4-carboxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (714 mg, 2.00 mmol), methoxyamine hydrochloride (1.34 g, 16.0 mmol), and diisopropylethylamine (2.93 ml, 16.0 mmol) were suspended in 20 ml of dry DMF under N₂. Within 20 minutes the solution was clear to yellow-orange. The reaction was stirred overnight at RT. The DMF was removed in vacuo and the residue poured onto H₂O and stirred for 1 hour. The solids were then filtered and air dried. The crude product was recrystallized from EtOAc to give 317 mg of product. (41.0%). EA, MS(FD).

15

Example 91

2-Amino-3-(4-fluorophenyl)-6-(4-fluorobenzoyl)-imidazo[1,2-a]pyridine

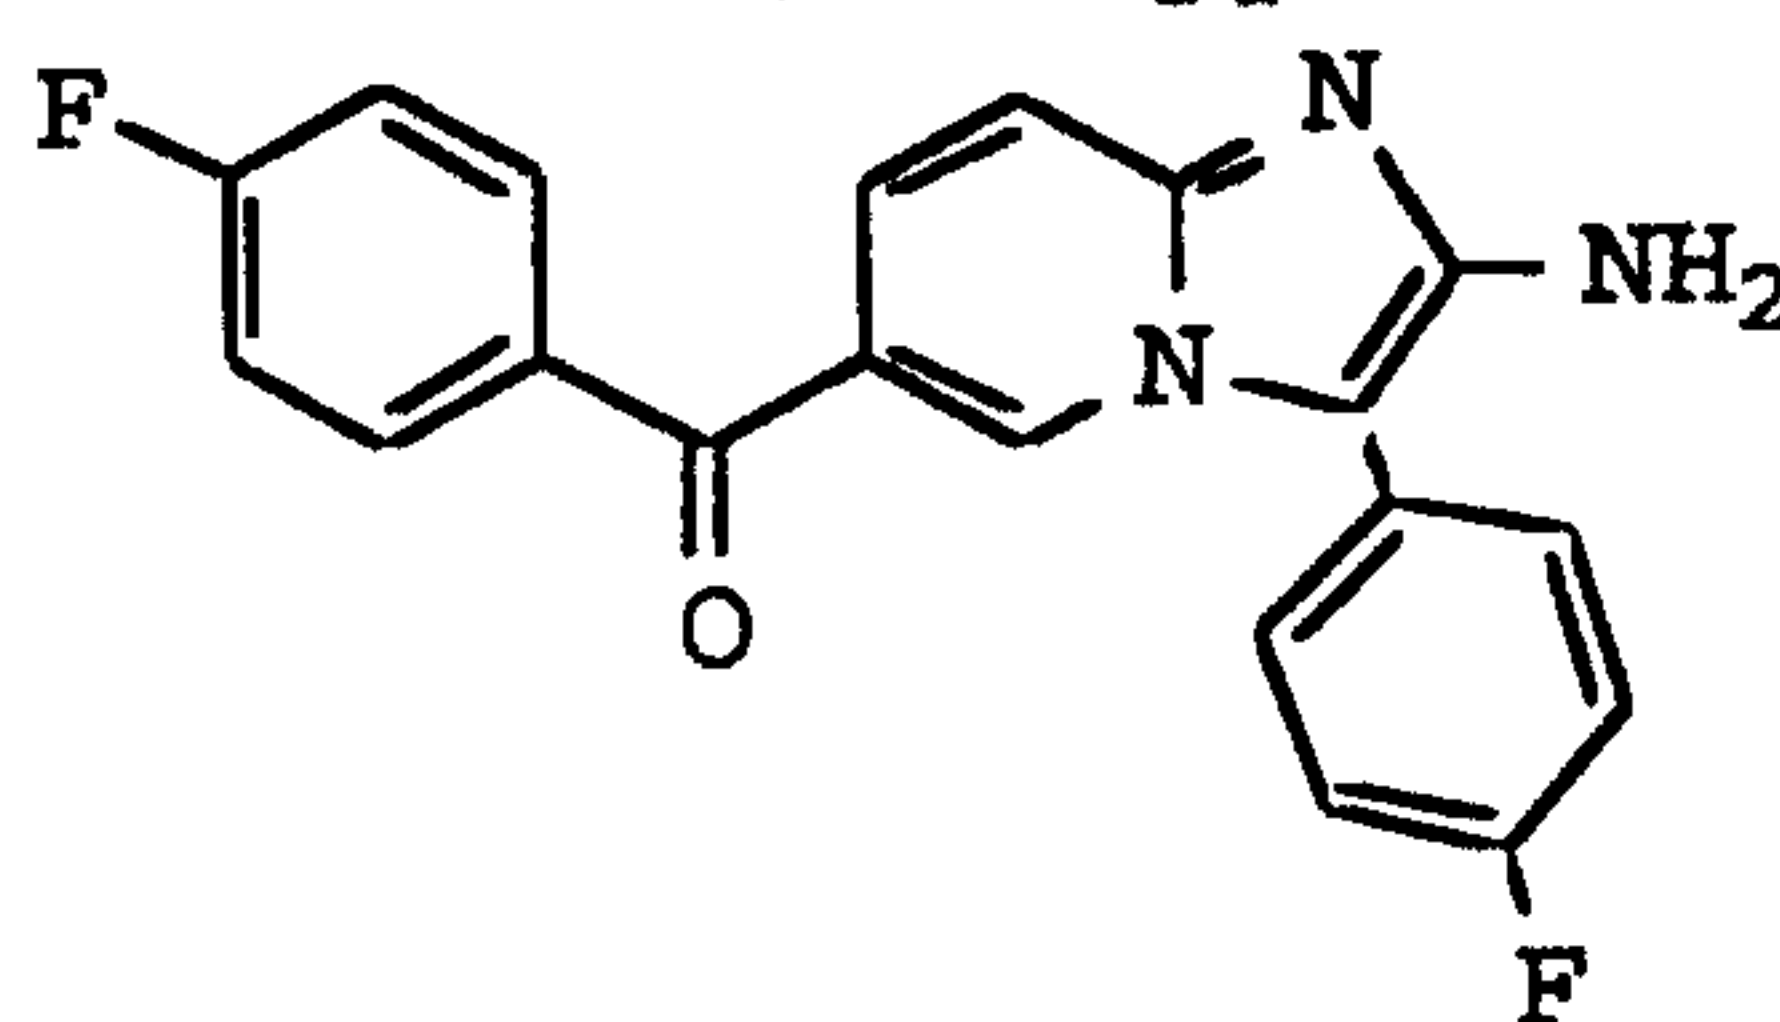


The 2-trifluoroacetamido-3-(4-fluorophenyl)-6-(4-fluorobenzoyl)-imidazo[1,2-a]pyridine (7.11 g, 16.0 mmol) was converted to product in a manner substantially analogous to Example 67 to yield 4.80 g. (86.2%). MS(FD), NMR.

Example 92

25 2-Amino-3-(2-fluoro-4-trifluoromethylphenyl)-6-(4-fluorobenzoyl)-imidazo[1,2-a]pyridine


-100-

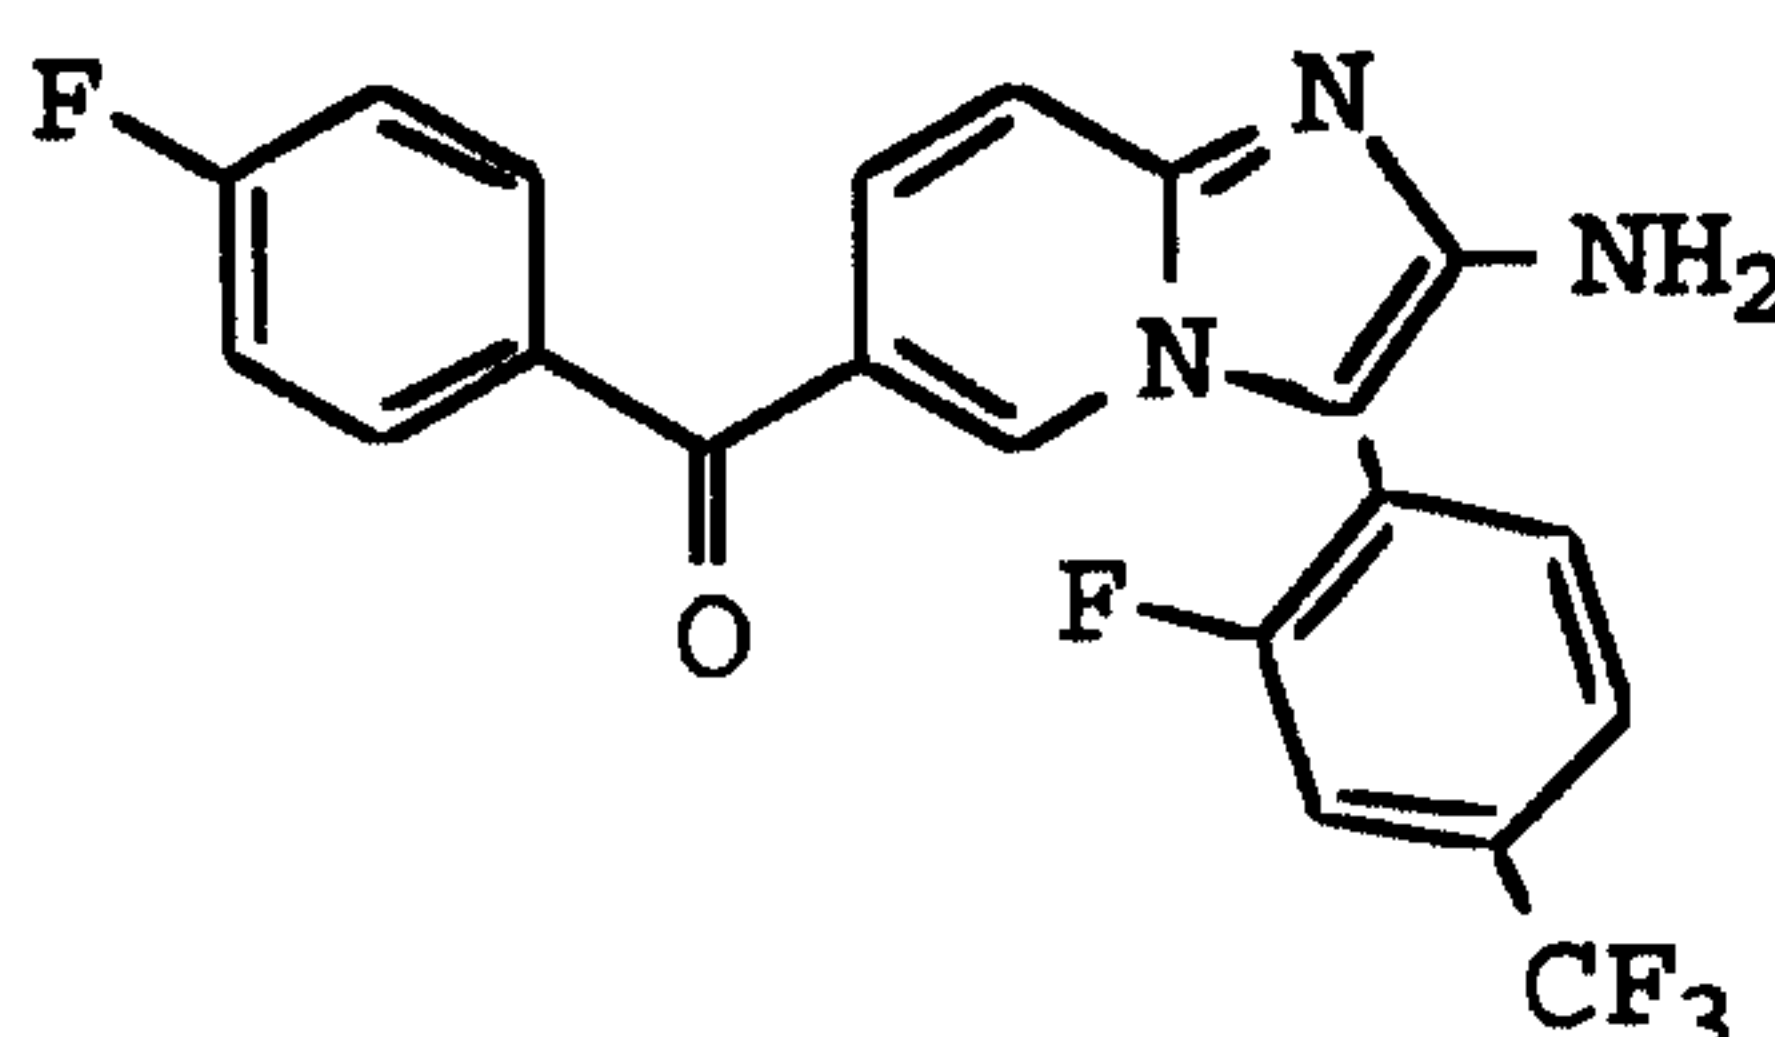

The 2-trifluoroacetamido-3-(2-fluoro-4-trifluoromethylphenyl)-6-(4-fluorobenzoyl)-imidazo[1,2-a]pyridine (6.75 g, 13.2 mmol) was converted to product
 5 in a manner substantially analogous to Example 67 to yield 4.66 g. (85%). EA, MS(FD).

Example 93

2-amino-3-phenyl-6-(α -phenylacetyl)-imidazo[1,2-a]pyridine

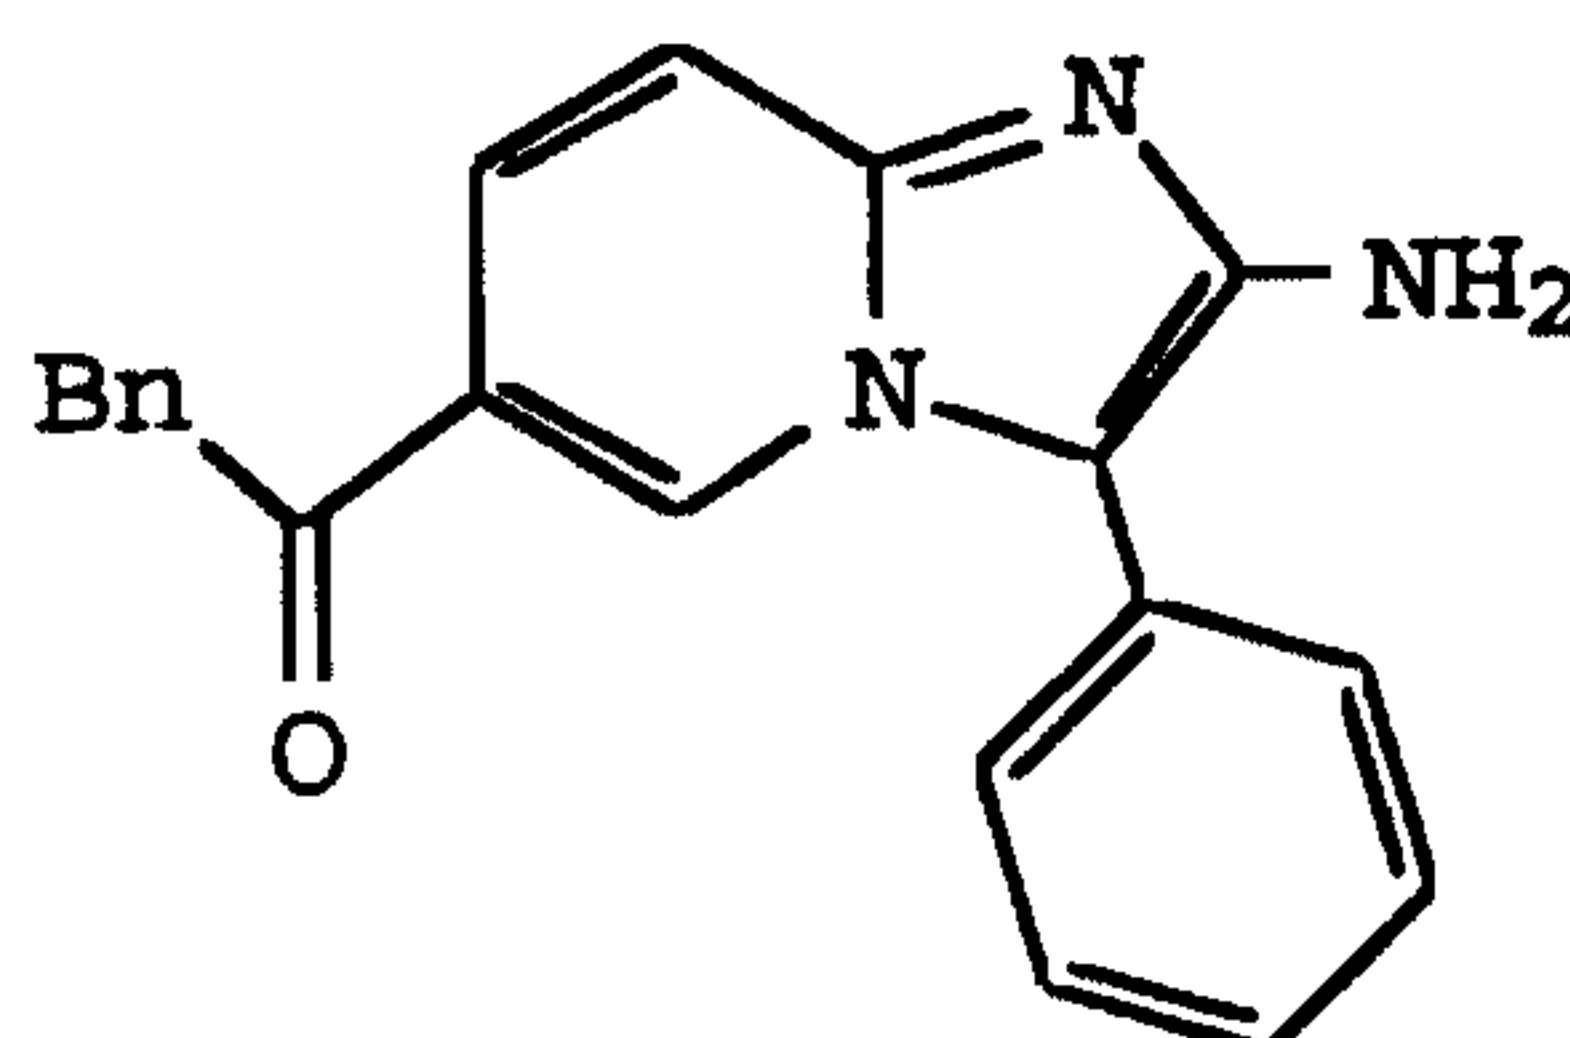


10

The N-(3-phenyl-6-[N-methyl-N-methoxycarbamoyl]imidazo[1,2-a]pyridin-2-yl)-2,2,5,5-tetramethyl-1-aza-2,5-disilacyclopentane (812 mg, 4 mmol) was dissolved in 30 ml of THF under N₂ and
 15 benzylmagnesiumchloride (2 M in THF, 6 ml, 12.0 mmol) was added. The mixture was allowed to stir for 18 hours at RT before adding 15 ml of MeOH and 3 ml of acetic acid. The mixture was allowed to stir for 1 hour at RT. The solvents were removed *in vacuo* and the residue taken up
 20 in 400 ml of EtOAc and 60 ml of NaHCO₃. The EtOAc was separated and washed with with brine (2 x 75 ml), dried over NaSO₄, and then concentrated *in vacuo*. The residue was purified by normal phase flash chromatography (EtOAc). The product fractions were recrystallized from
 25 EtOAc to yield 398 mg of product. (31.6%). MS(FD), NMR.

Example 94

2-Amino-3-phenyl-6-(picolinoyl)-imidazo[1,2-a]pyridine


-101-

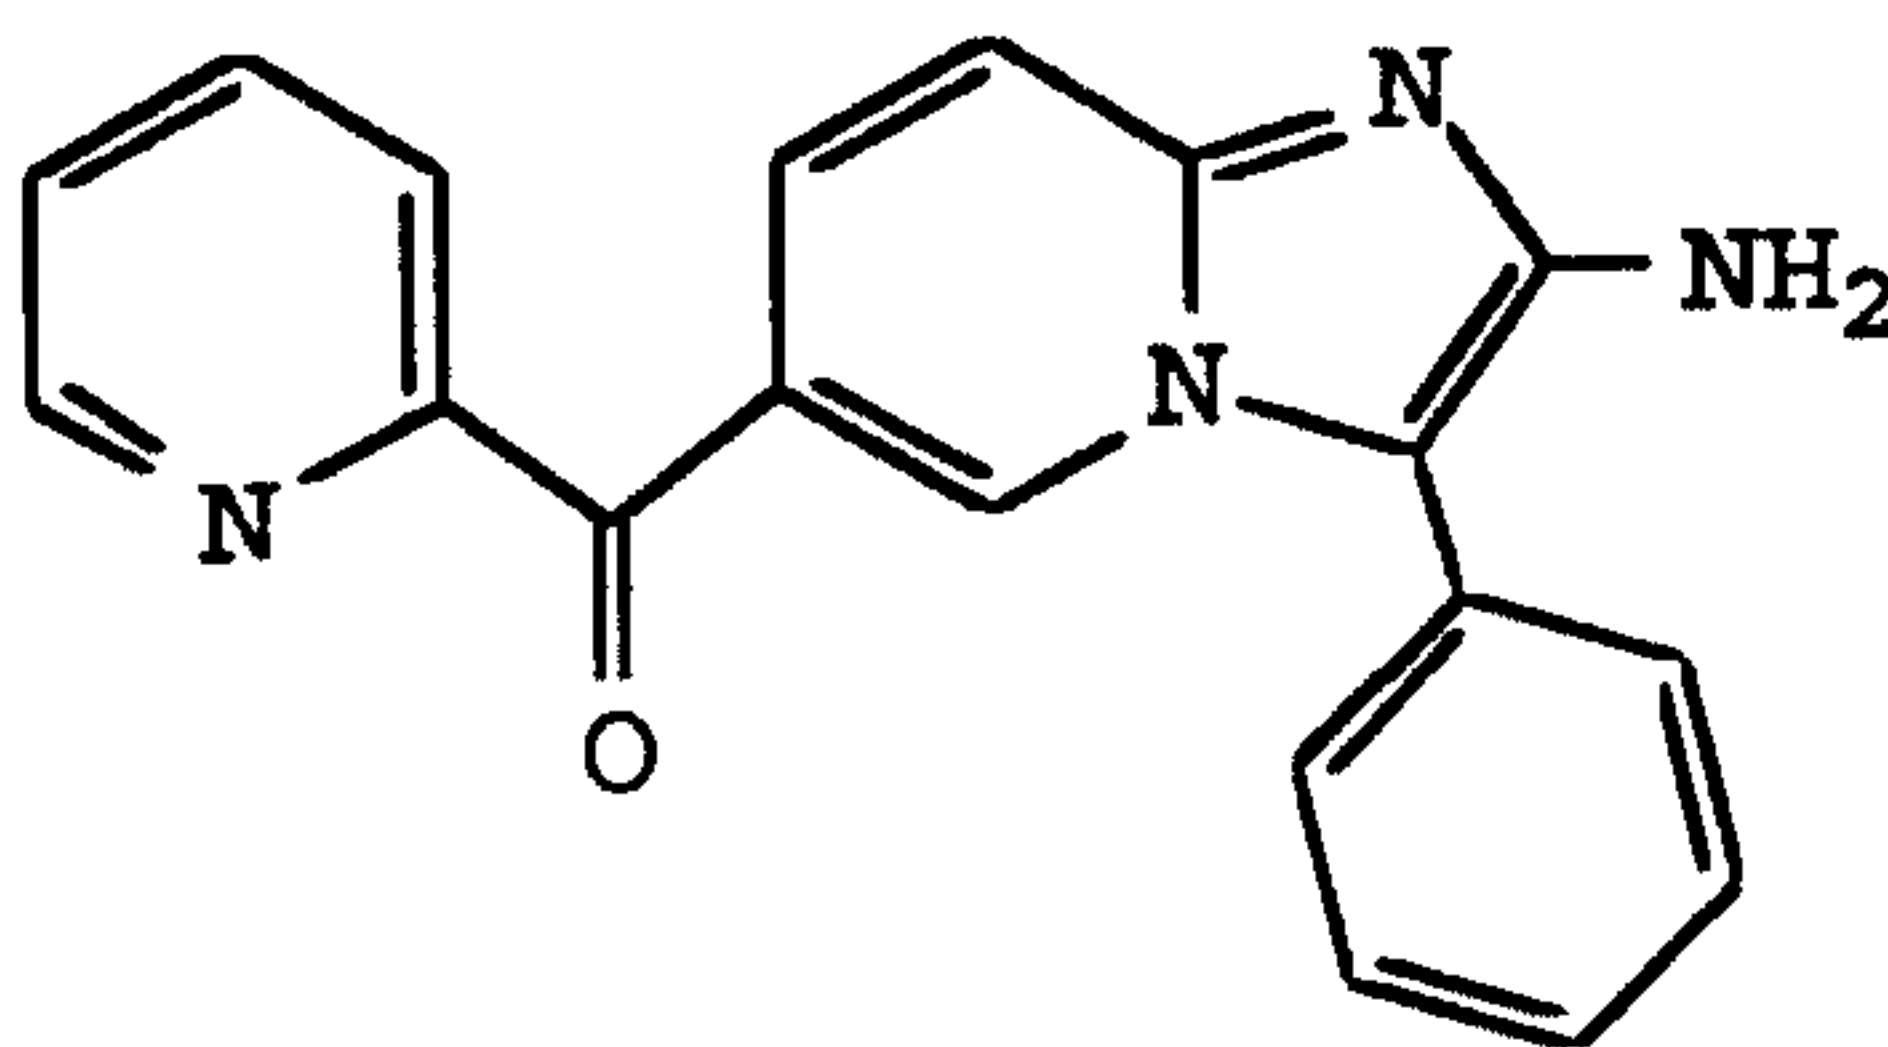

The 2-iodopyridine (1.23 g, 6.00 mmol) was dissolved in 40 ml of THF under N₂ and ethylmagnesiumbromide (2 ml, 3 M, 6 mmol) was added. The mixture was allowed to stir for 30 minutes at RT before adding N-(3-phenyl-6-[carboxyl]imidazo[1,2-a]pyridin-2-yl)-2,2,5,5-tetramethyl-1-aza-2,5-disilacyclopentane (820 mg, 2 mmol) in 25 ml THF via cannula. The resulting mixture was allowed to stir for 18 hours at RT. Methanol (4 ml) and 2 ml of acetic acid were added and the mixture was allowed to stir for 1 hour at RT. The solvents were removed *in vacuo* and the residue purified by normal phase chromatography. The product fractions were recrystallized from EtOAc to yield 205 mg of product. (10.9%). MS(FD), NMR.

Example 95

2-Amino-3-phenyl-6-(nicotinoyl)-imidazo[1,2-a]pyridine

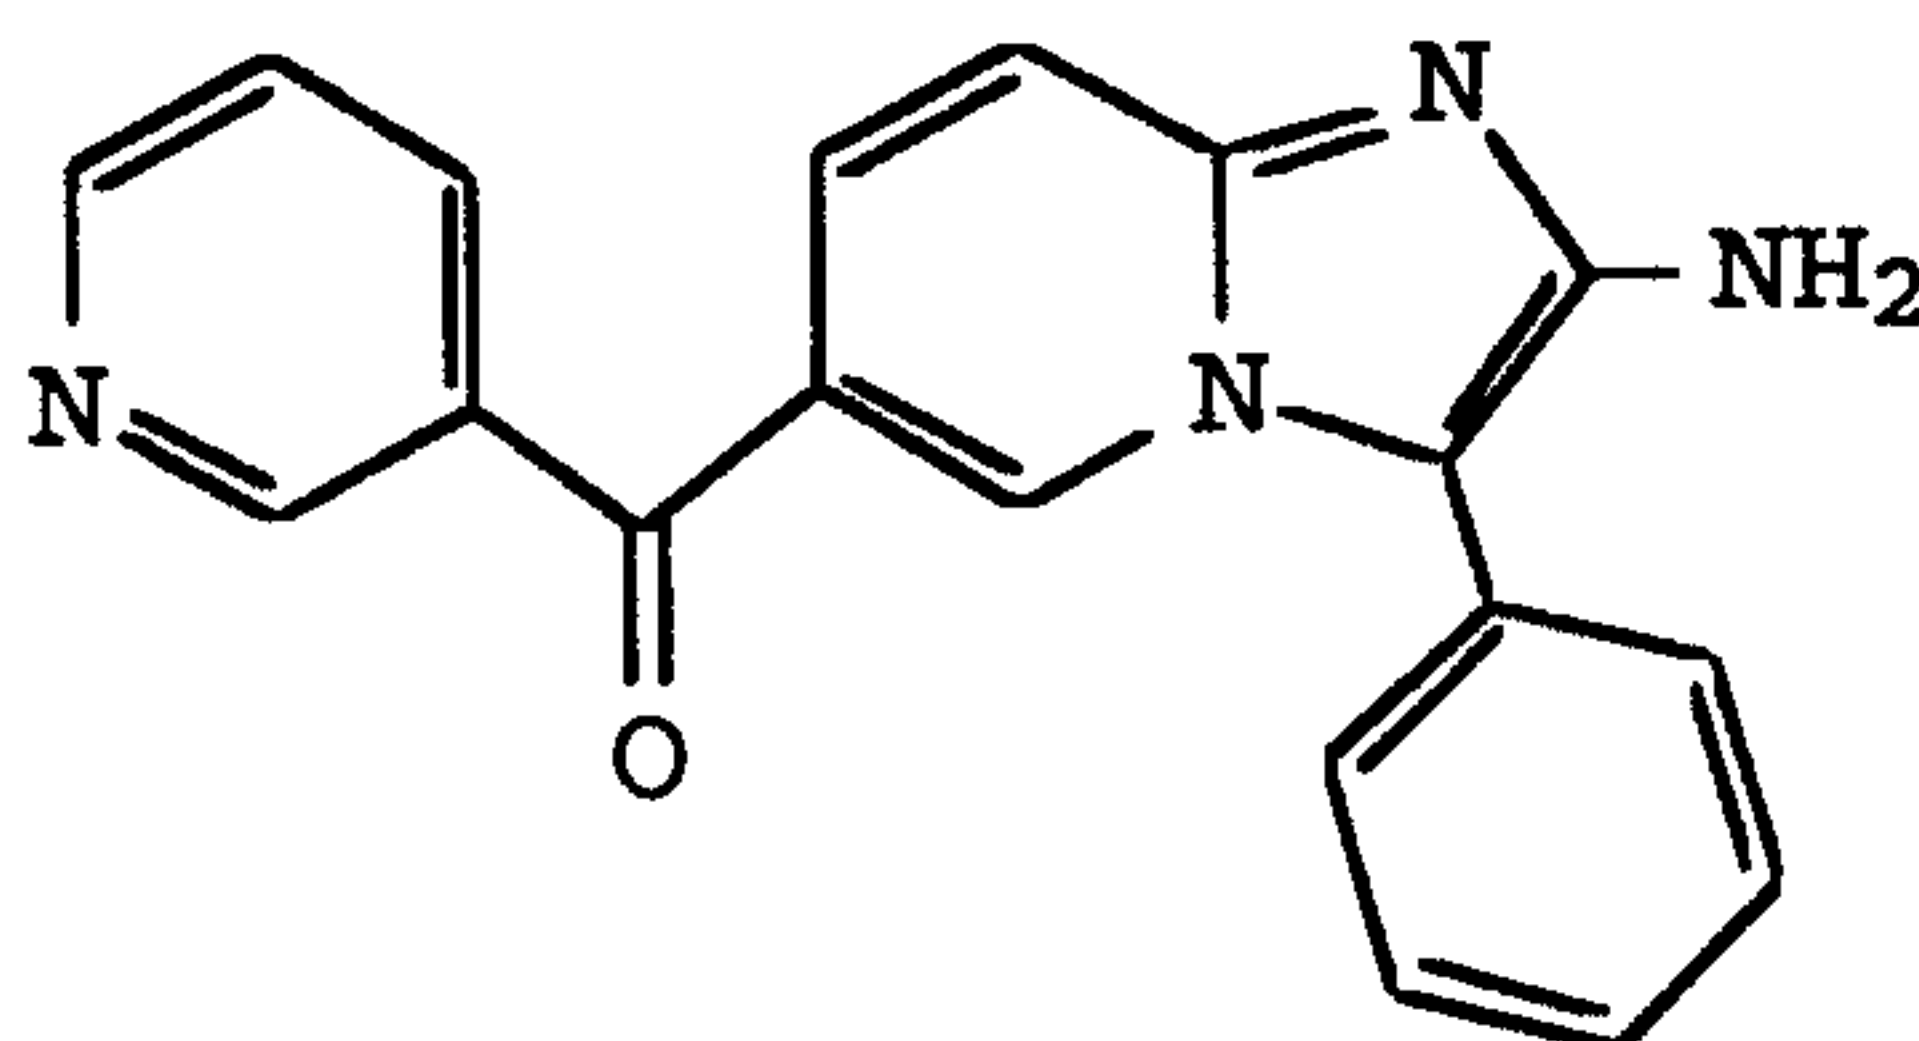


The N-(3-phenyl-6-[carboxyl]imidazo[1,2-a]pyridin-2-yl)-2,2,5,5-tetramethyl-1-aza-2,5-disilacyclopentane (820 mg, 2.00 mmol) was converted to product using 3-iodopyridine in a manner substantially analogous to Example 94 to yield 271 mg. (14.4%). EA, MS(FD).

Example 96

2-Amino-3-phenyl-6-(isonicotinoyl)-imidazo[1,2-a]pyridine


- 102 -

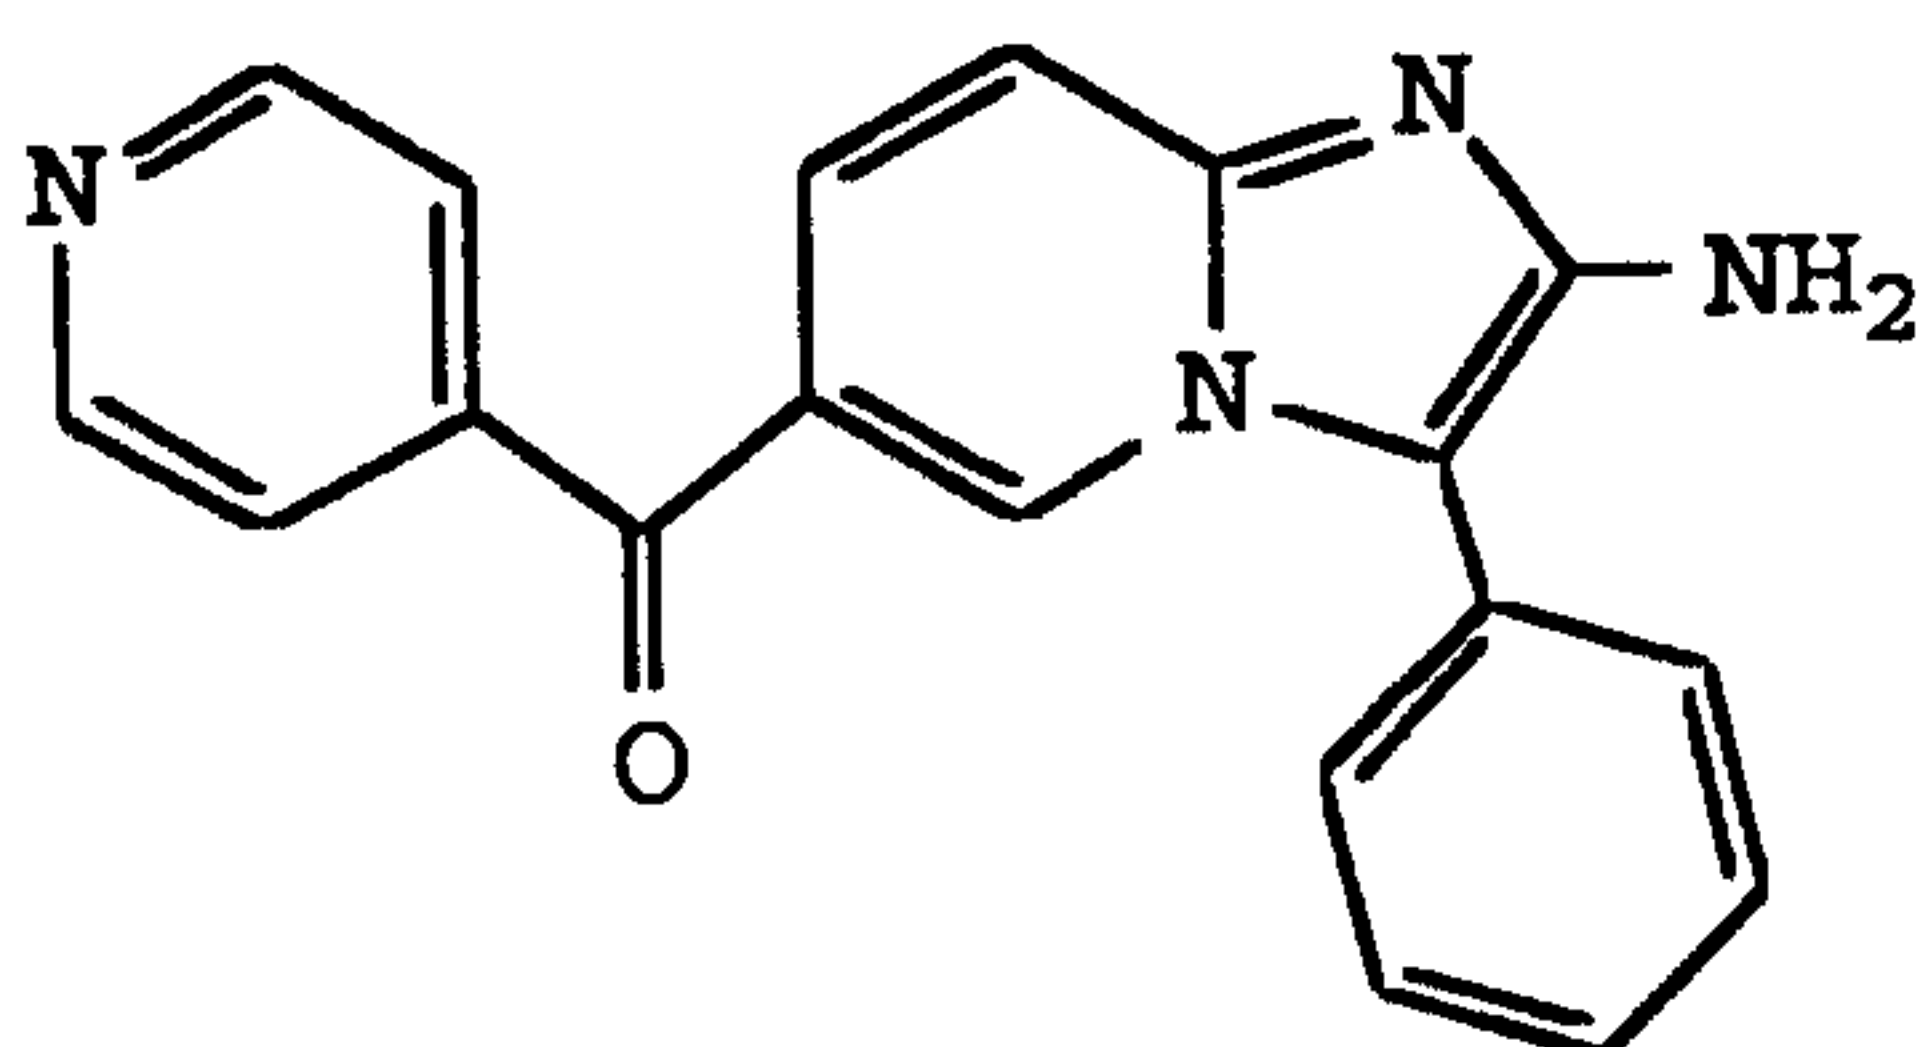

The N-(3-phenyl-6-[carboxyl]imidazo[1,2-a]pyridin-2-yl)-
2,2,5,5-tetramethyl-1-aza-2,5-disilacyclopentane (3.28 g,
8.00 mmol) was converted to product using 4-iodopyridine
5 in a manner substantially analogous to Example 94 to
yield 1.74 g. (69.3%). EA, MS(FD).

Example 97

2-Amino-3-(2,4-difluorophenyl)-6-[(E)-benzyloxim- α -yl]-
imidazo[1,2-a]pyridine

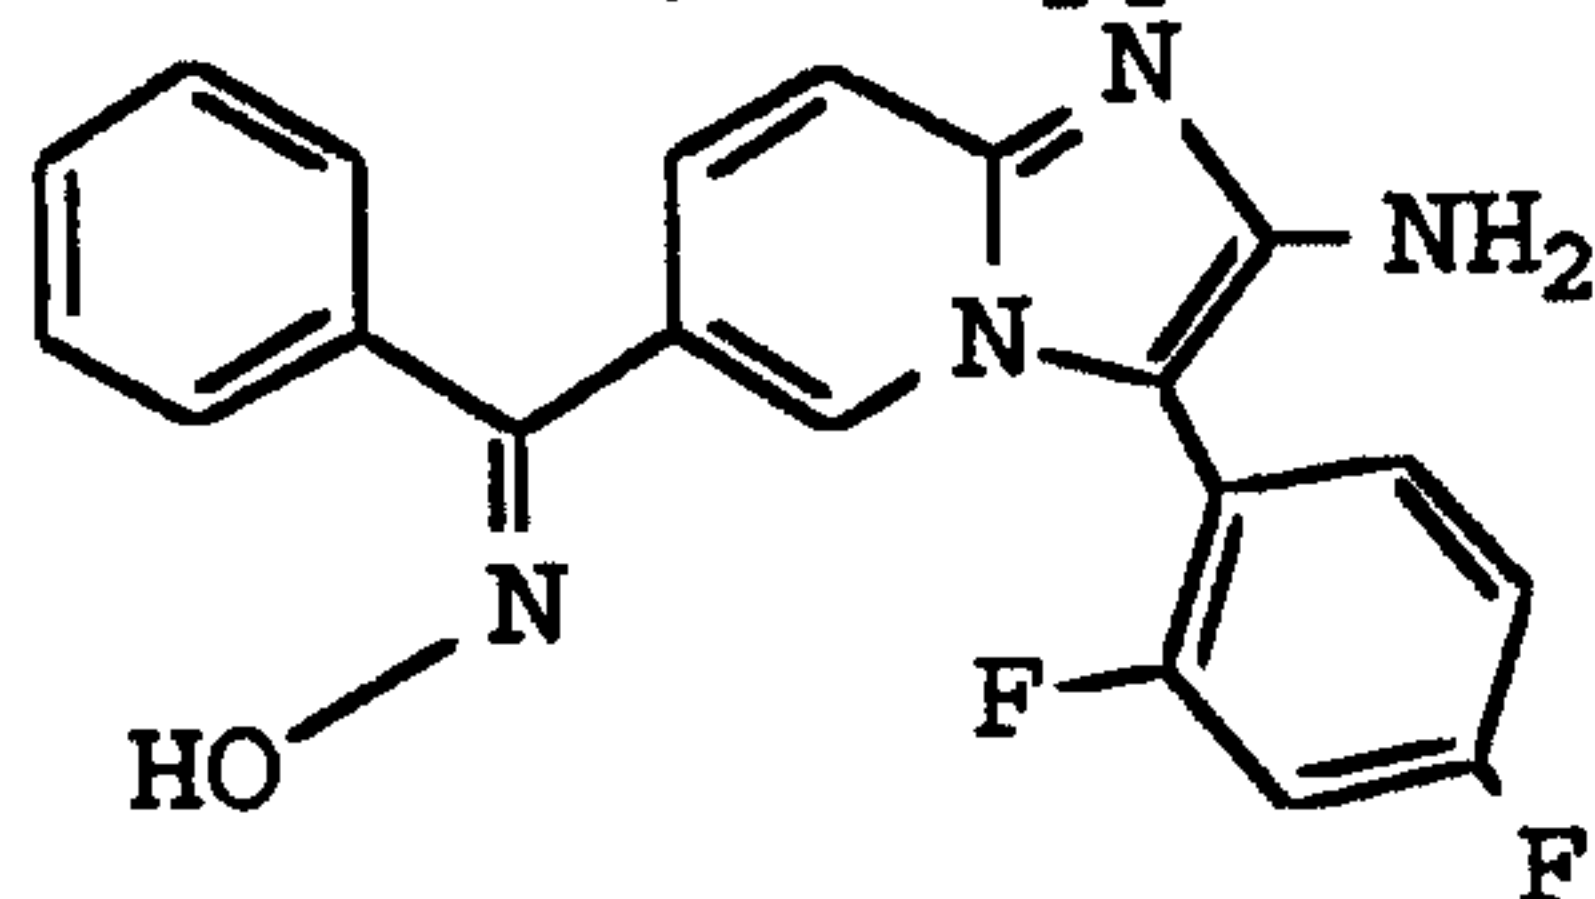


10

The 2-amino-3-(2,4-difluorophenyl)-6-benzoyl-imidazo[1,2-
a]pyridine (1.00 g, 2.87 mmol) was dissolved in 40 ml of
80% EtOH/H₂O. Hydroxylamine hydrochloride (2.39 g, 34.4
mmol) and NaOAc (2.82 g, 34.4 mmol) were added and this
15 mixture was heated to reflux for 4 hours, monitoring the
progress of the reaction by HPLC. The reaction was
worked up by removing the solvents *in vacuo* and taking
the residue up in 900 ml of EtOAc. The solution was
washed with saturated NaHCO₃ (3 x 100 ml), brine (3 x 100
20 ml), dried over Na₂SO₄, filtered, and concentrated *in*
vacuo. The residue was recrystallized with EtOAc and
further purified by HPLC to yield 130 mg of the E-isomer.
(17.2%). MS(FD), UV.

Example 98

25 2-Amino-3-(4-methoxyphenyl)-6-(benzyloxim- α -yl)-
imidazo[1,2-a]pyridine


- 103 -

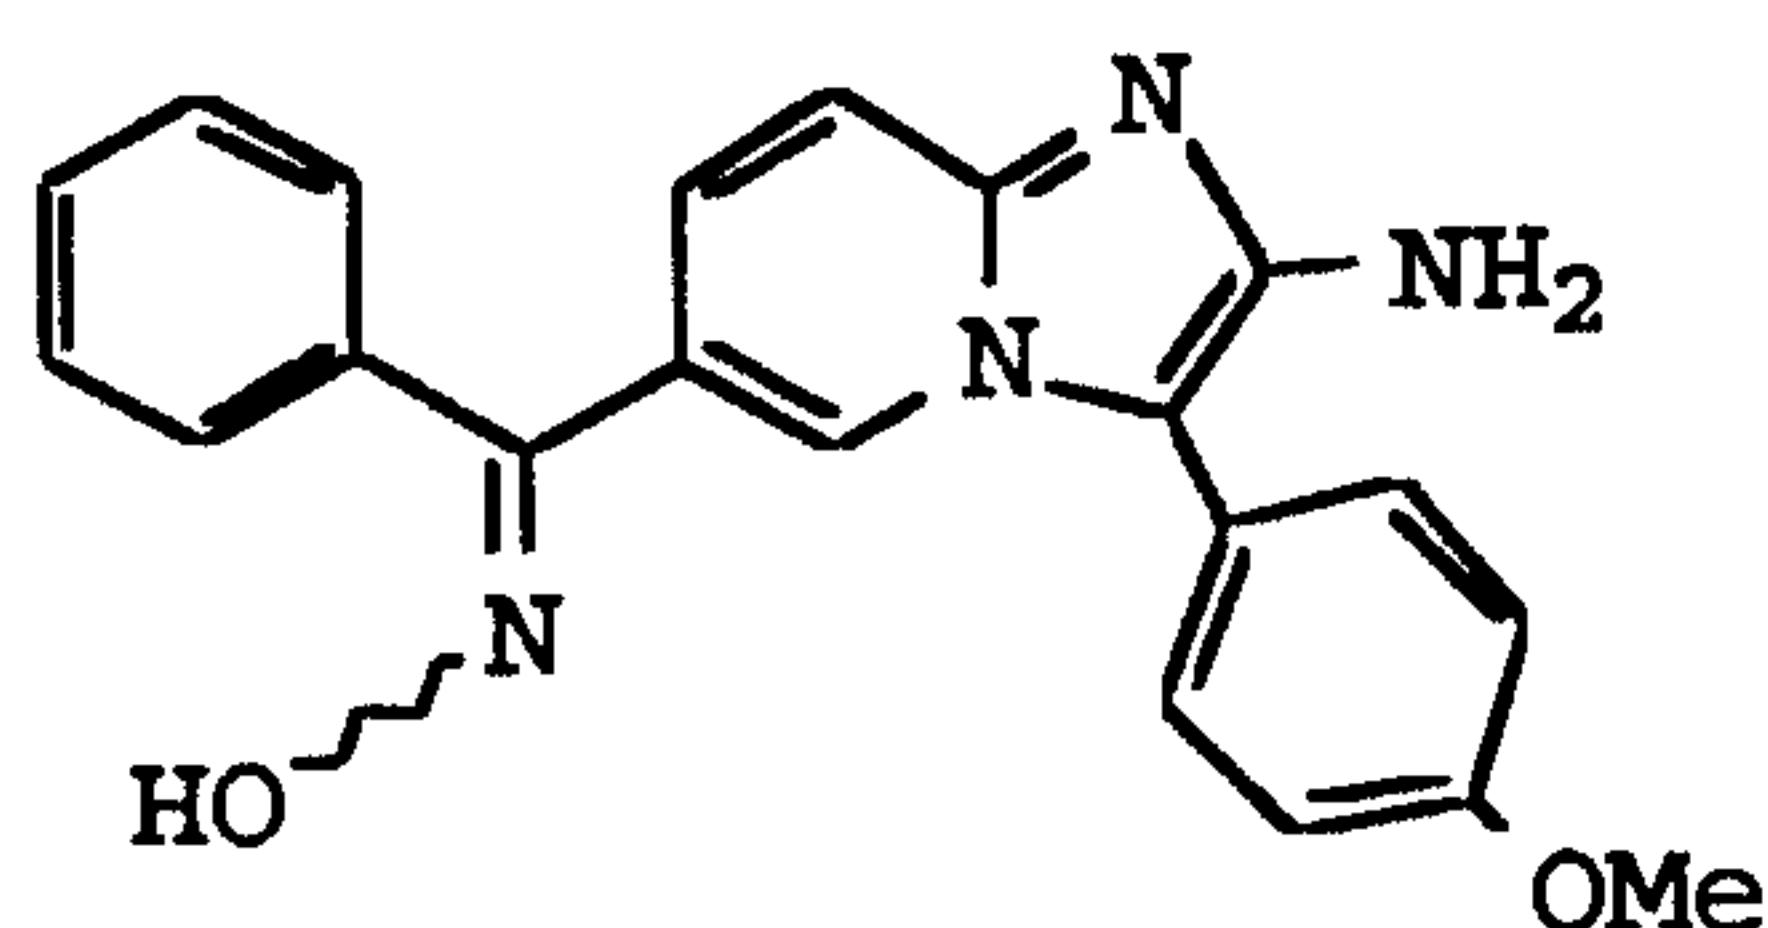

The 2-amino-3-(4-methoxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (2.00 g, 5.83 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 490 mg of E-product, (24.0%), EA, MS(FD), and a small but unspecified amount of Z-product. EA, MS(FD).

Example 99

2-Amino-3-(naphth-2-yl)-6-[(E)-benzyloxim- α -yl]-imidazo[1,2-a]pyridine

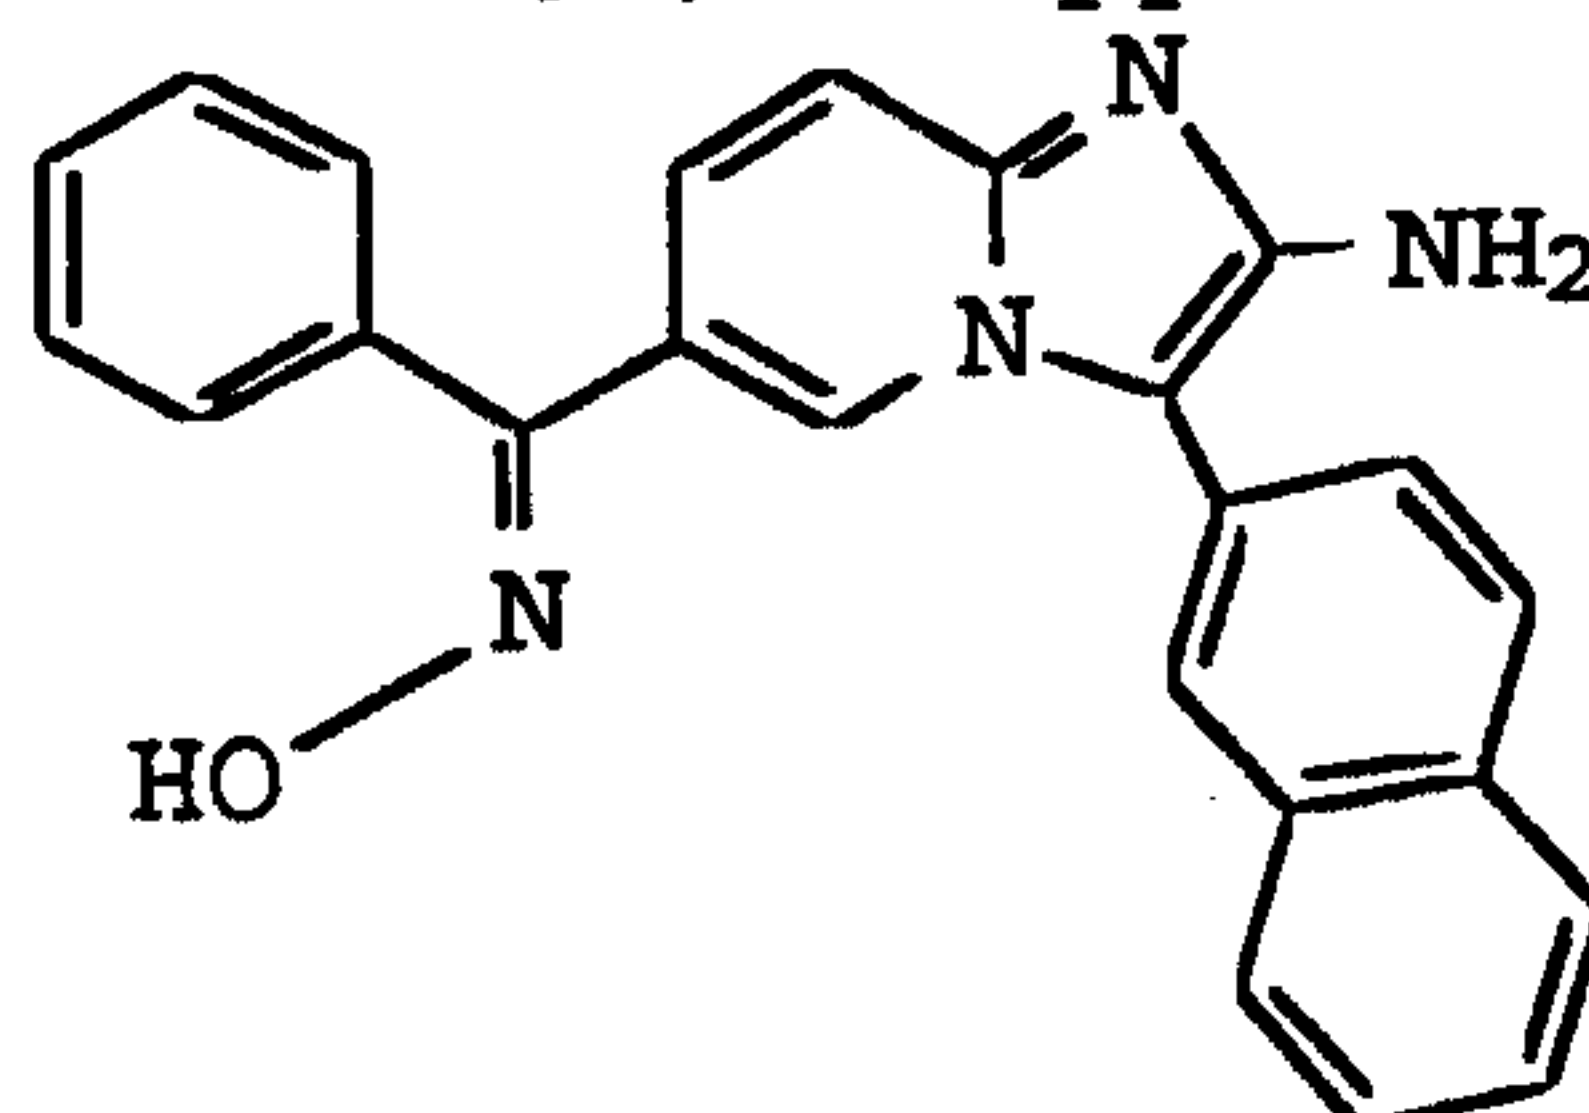


10

The 2-amino-3-(naphth-2-yl)-6-benzoyl-imidazo[1,2-a]pyridine (2.00 g, 5.51 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 115 mg of E-product. (5.52%). EA, MS(FD).

15

Example 100

2-Amino-3-naphthyl-6-(benzyloxim- α -yl)-imidazo[1,2-a]pyridine

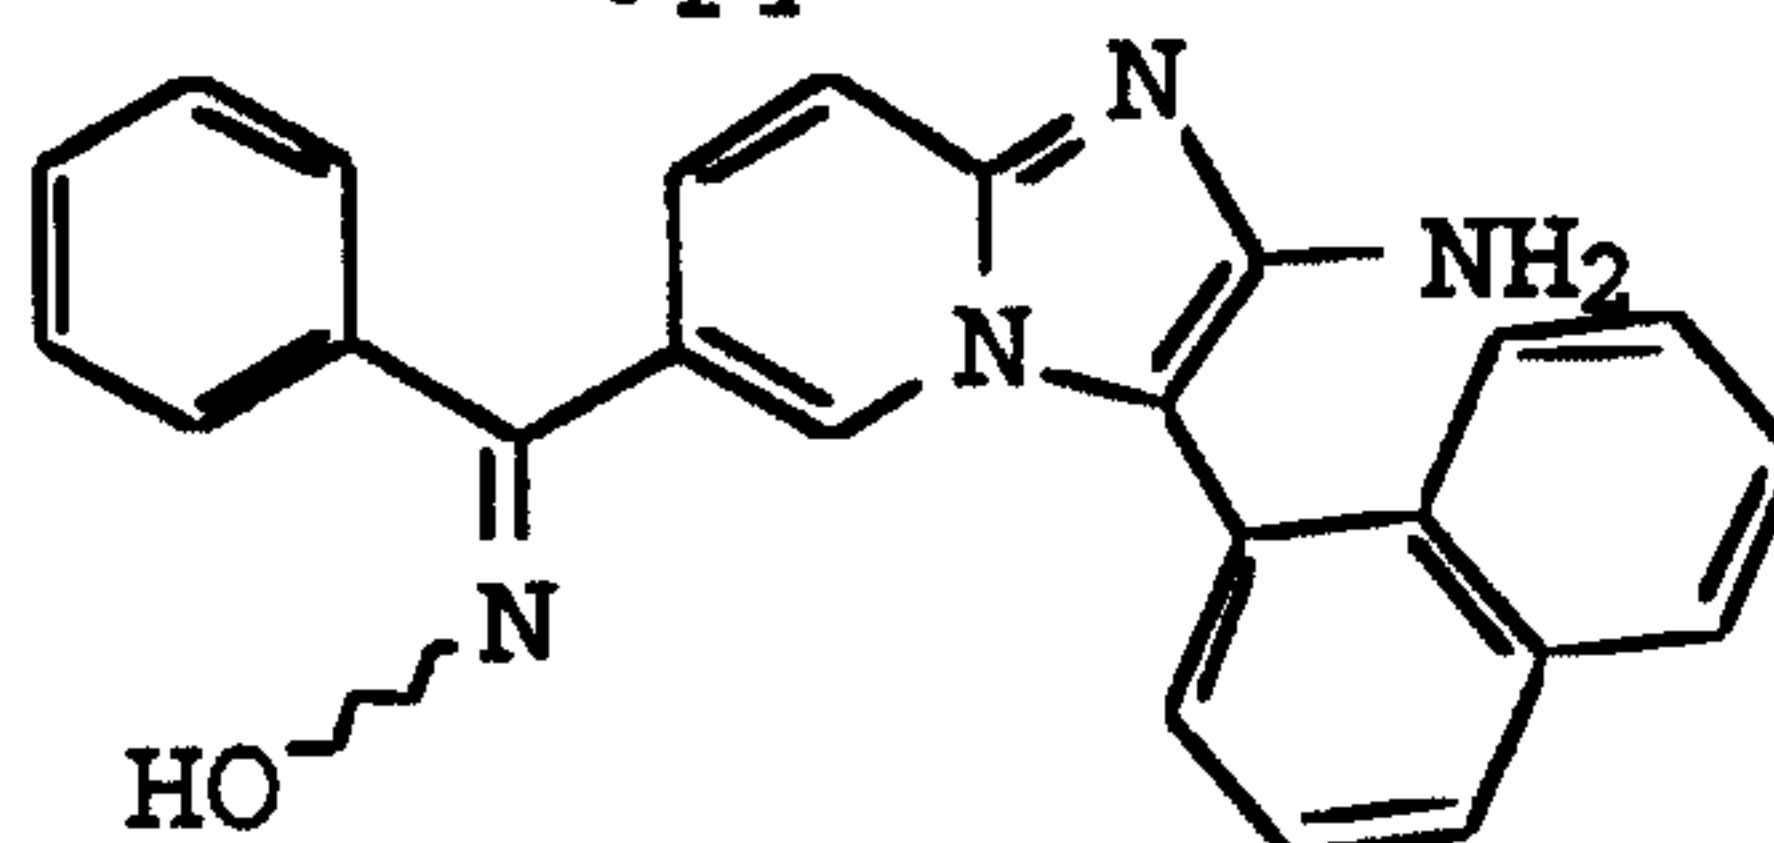


The 2-amino-3-naphthyl-6-benzoyl-imidazo[1,2-a]pyridine (2.00 g, 5.51 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 470 mg of E-product, (22.6%), EA, MS(FD), and 810 mg of Z-product. (38.9%). NMR.

Example 101

-104-


2-Amino-3-(2-fluorophenyl)-6-[(E)-benzyloxim- α -yl]-
imidazo[1,2-a]pyridine

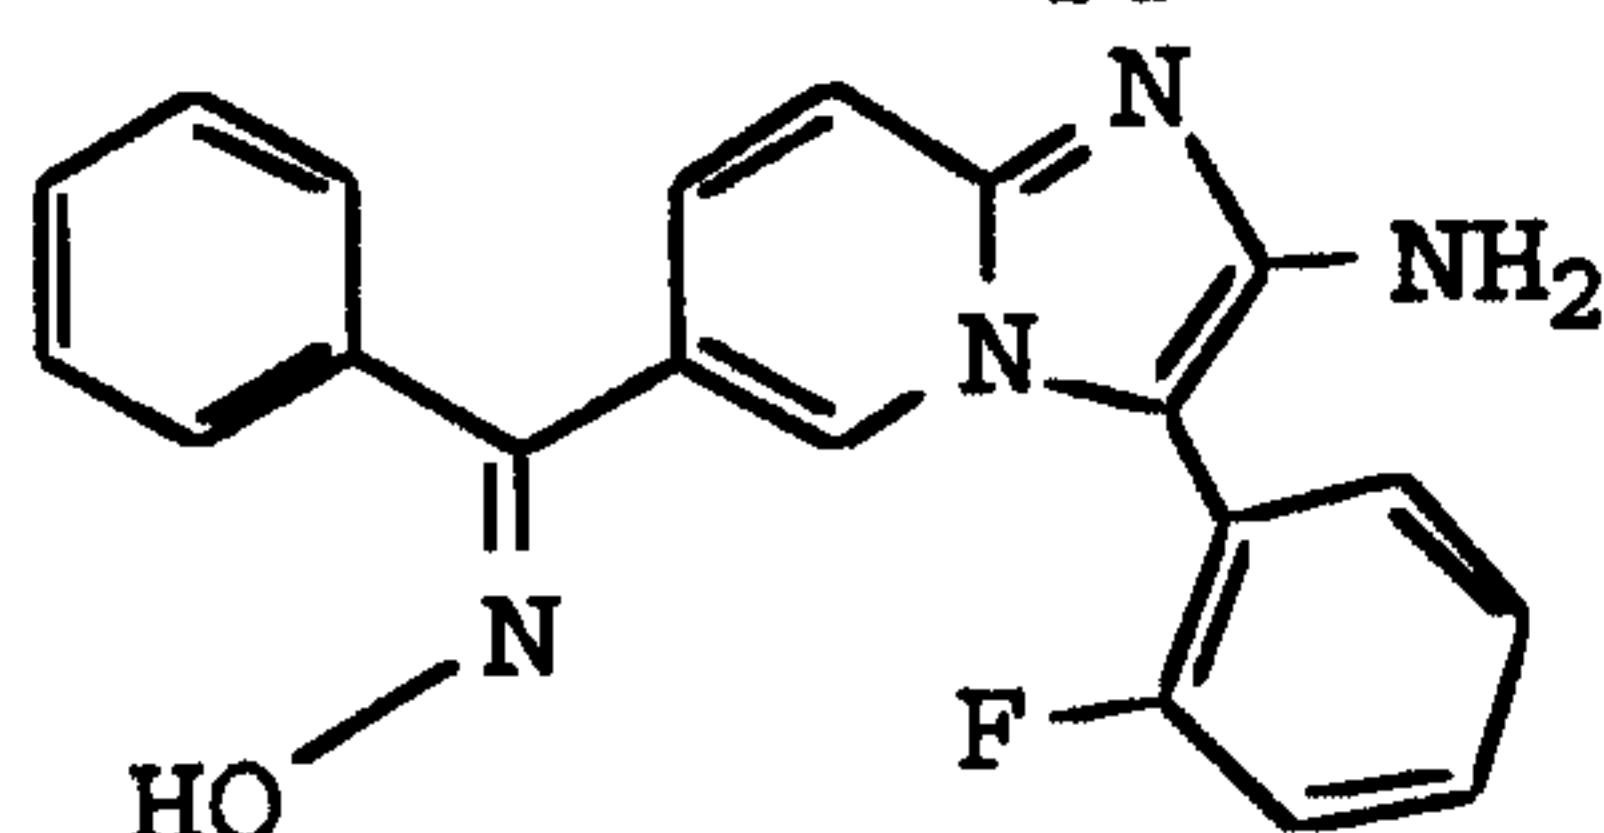

The 2-amino-3-(2-fluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (2.62 g, 7.92 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 1.08 g of E-product. (39.3%). MS(FD), NMR.

Example 102


2-Amino-3-(3-fluorophenyl)-6-[(E)-1-benzyloxim- α -yl]-
imidazo[1,2-a]pyridine

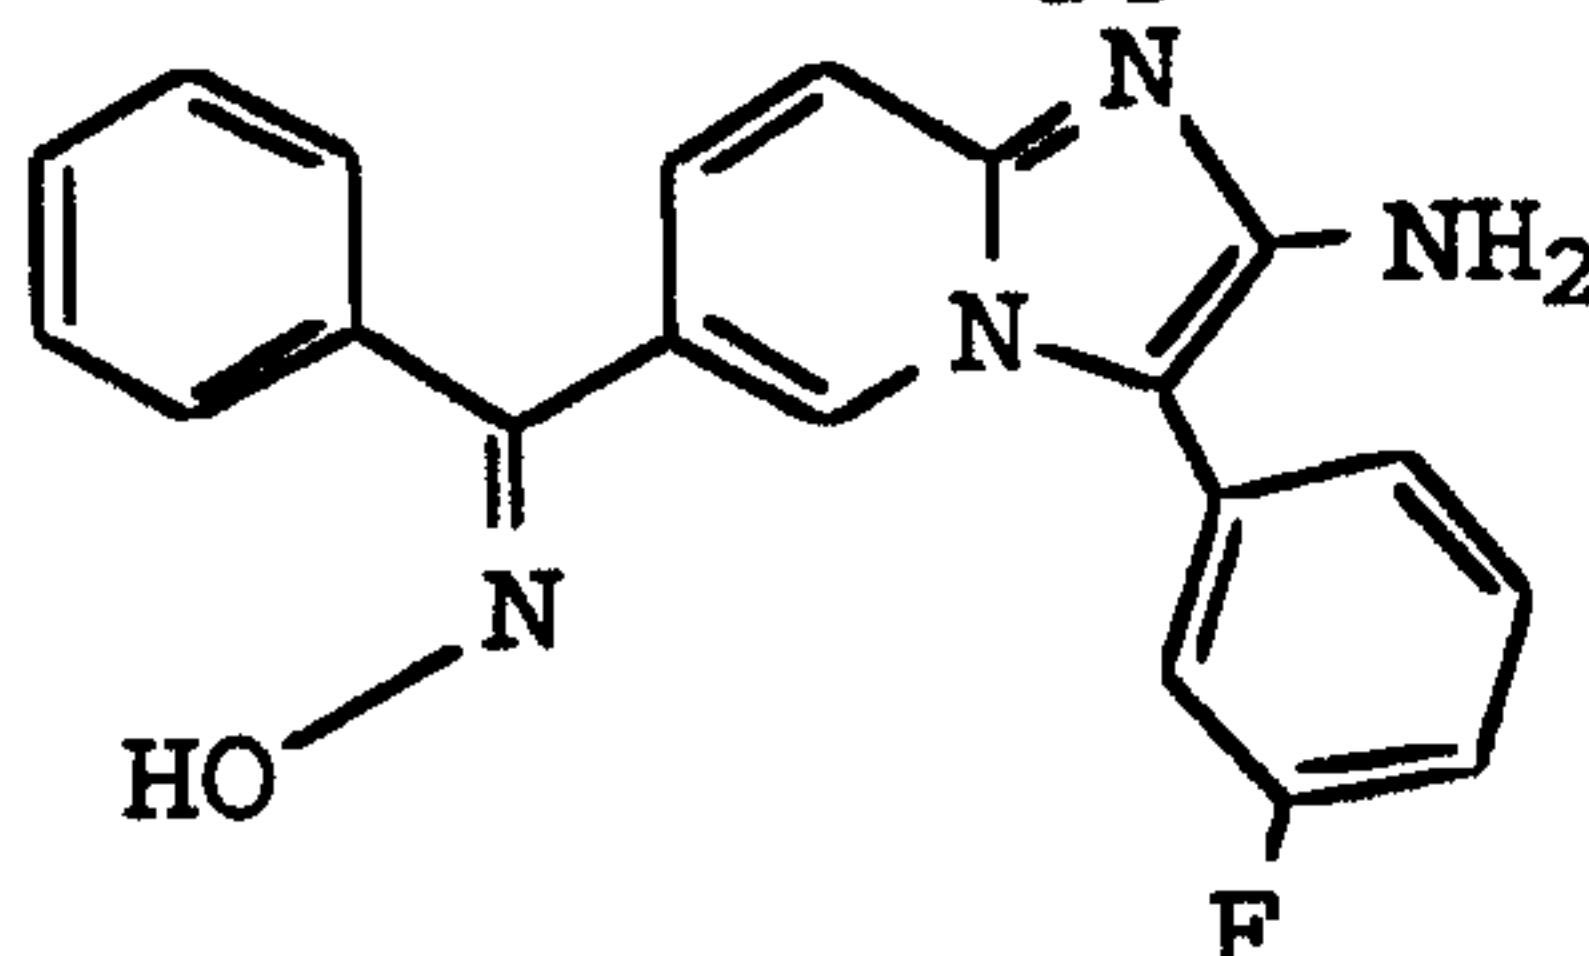

The 2-amino-3-(3-fluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (2.00 g, 6.04 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 463 mg of E-product. (22.2%), EA, MS(FD).

Example 103

2-Amino-3-(4-fluorophenyl)-6-[(E)-benzyloxim- α -yl]-
imidazo[1,2-a]pyridine

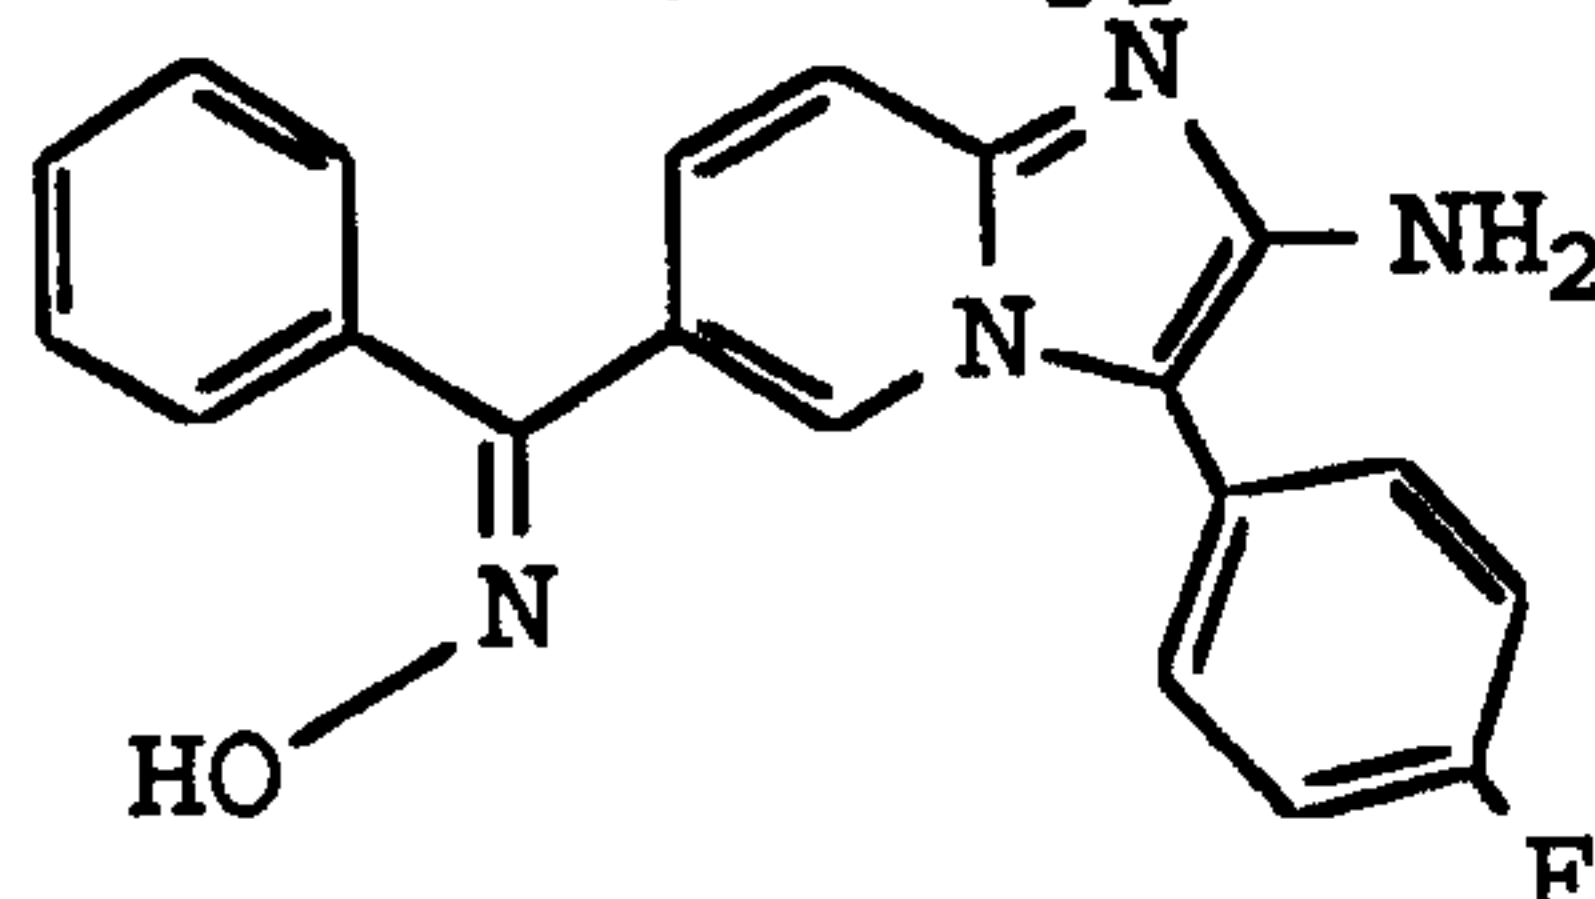


The 2-amino-3-(4-fluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (3.00 g, 9.06 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 2.78 g of E-product. (88.8%). EA, MS(FD).

Example 104

2-Amino-3-(3,5-difluorophenyl)-6-[(E)-benzyloxim- α -yl]-
imidazo[1,2-a]pyridine


-105-

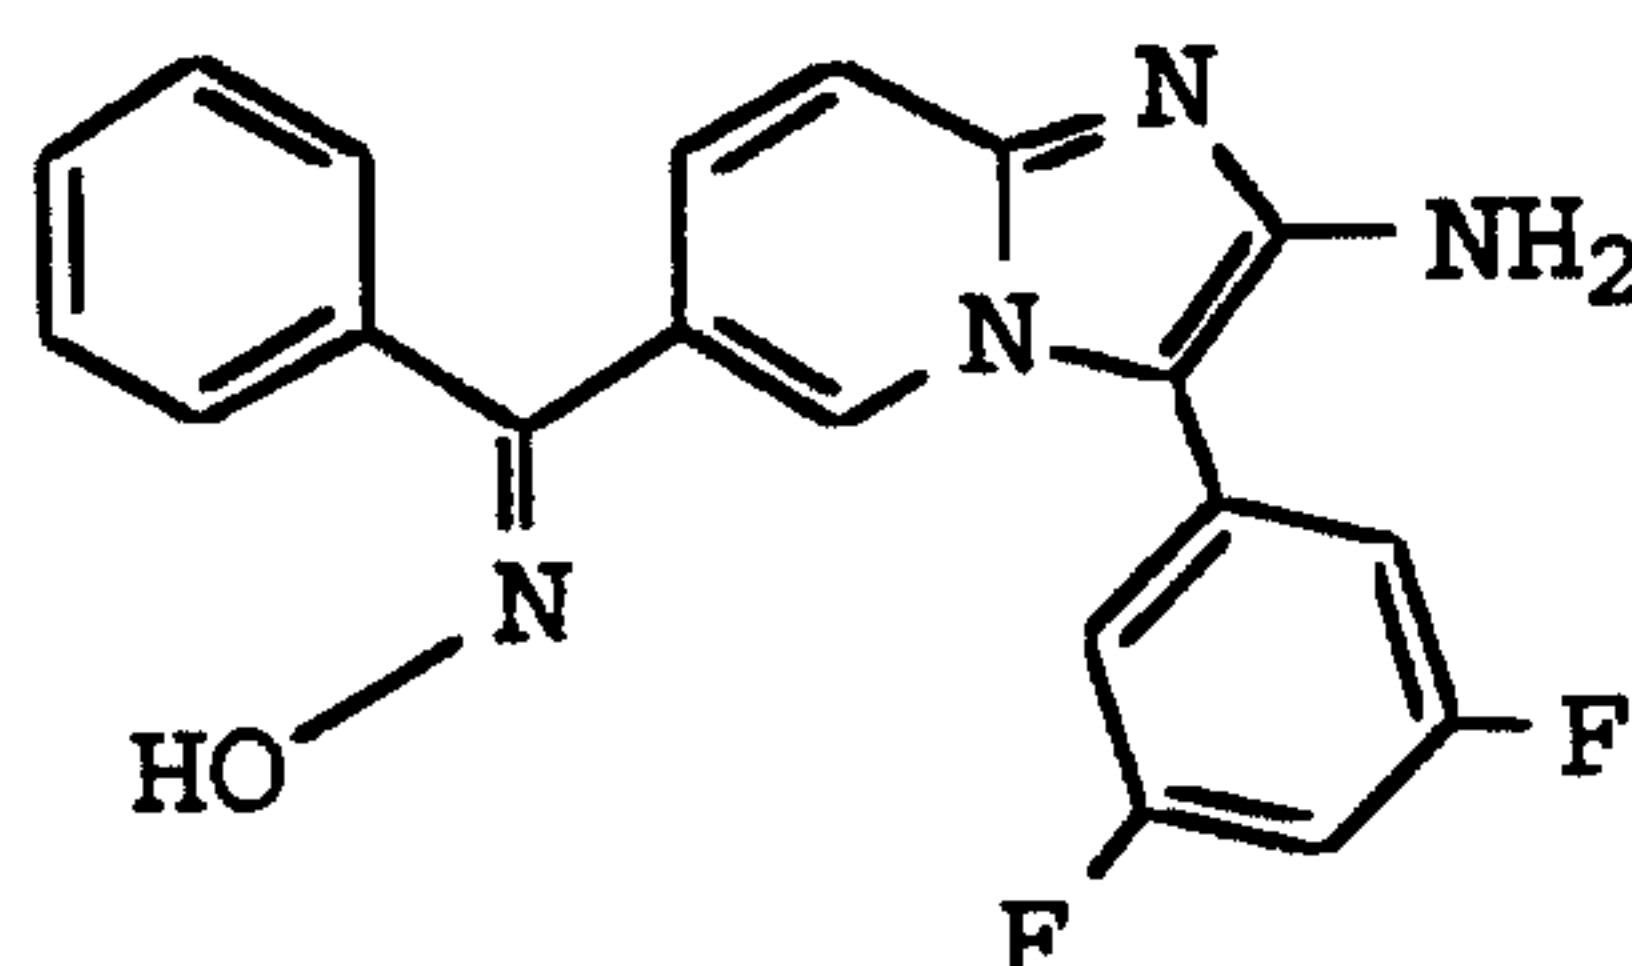

The 2-amino-3-(3,5-difluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (1.00 g, 2.87 mmol) was converted to product in a manner substantially analogous to Example 97 to
 5 yield 65 mg of E-product. (6.22%). EA, MS(FD).

Example 105


2-Amino-3-(2,5-difluorophenyl)-6-[(E)-benzyloxim- α -yl]-imidazo[1,2-a]pyridine

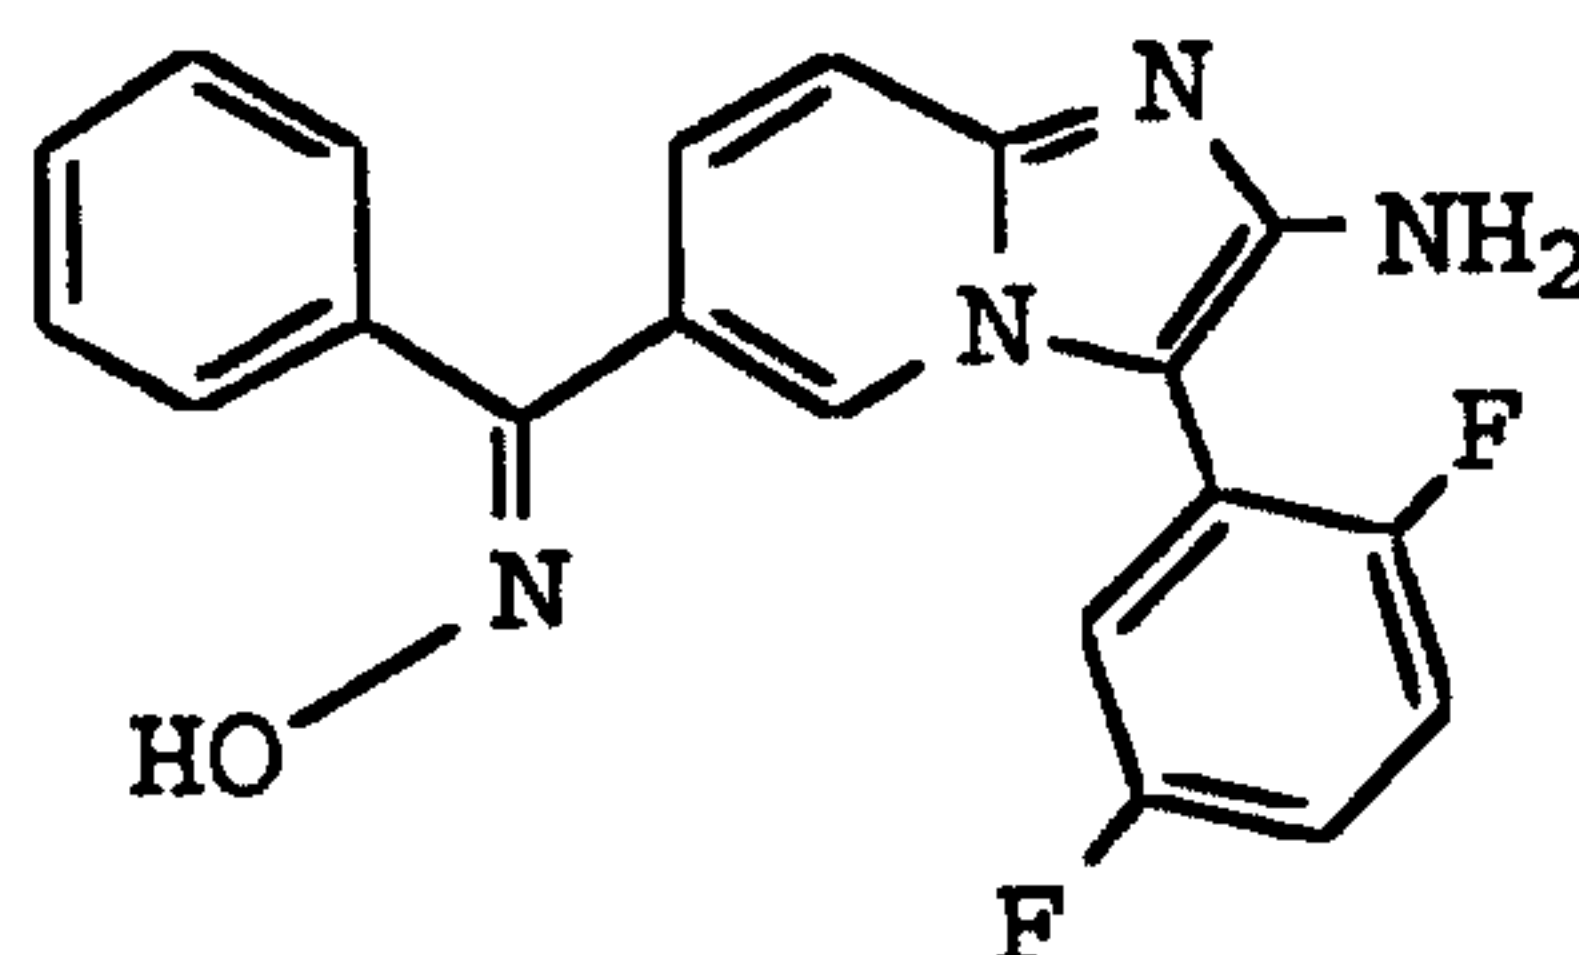

10 The 2-amino-3-(2,5-difluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (1.00 g, 2.87 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 315 mg of E-product. (30.2%). EA, MS(FD).

Example 106

15 2-Amino-3-(3-trifluoromethylphenyl)-6-[(E)-benzyloxim- α -yl]-imidazo[1,2-a]pyridine

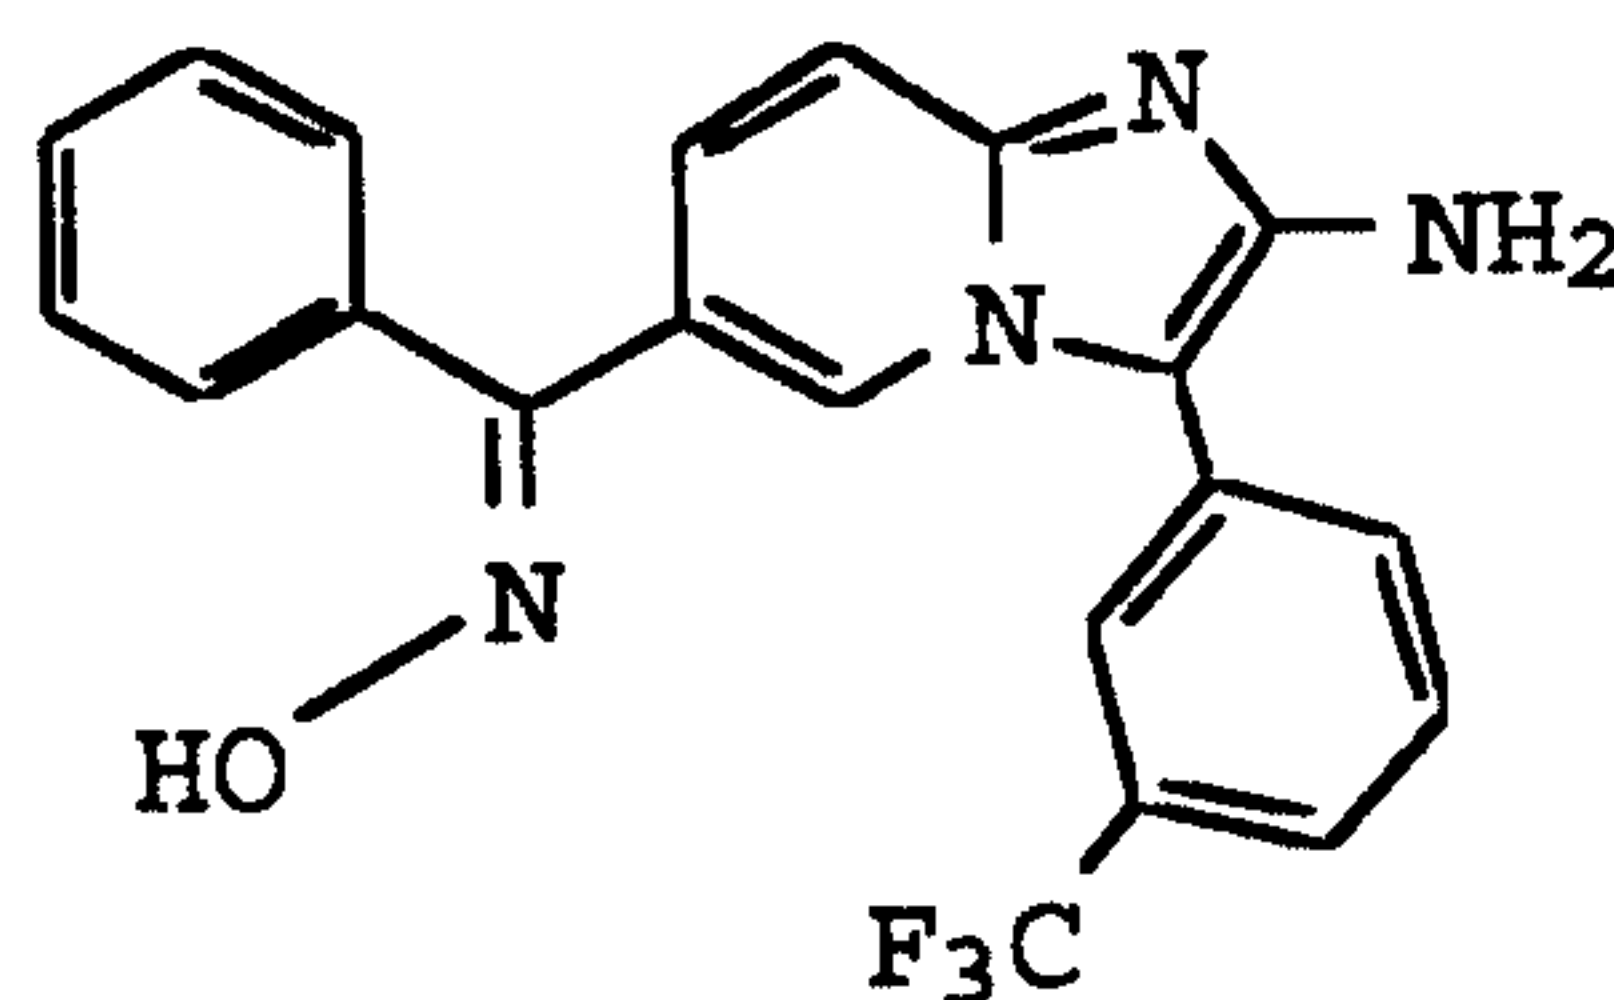


The 2-amino-3-(3-trifluoromethylphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (2.00 g, 5.24 mmol) was converted
 20 to product in a manner substantially analogous to Example 97 to yield 579 mg of E-product. (27.9%). EA, MS(FD).

Example 107

2-Amino-3-(4-bromophenyl)-6-(benzyloxim- α -yl)-imidazo[1,2-a]pyridine


-106-

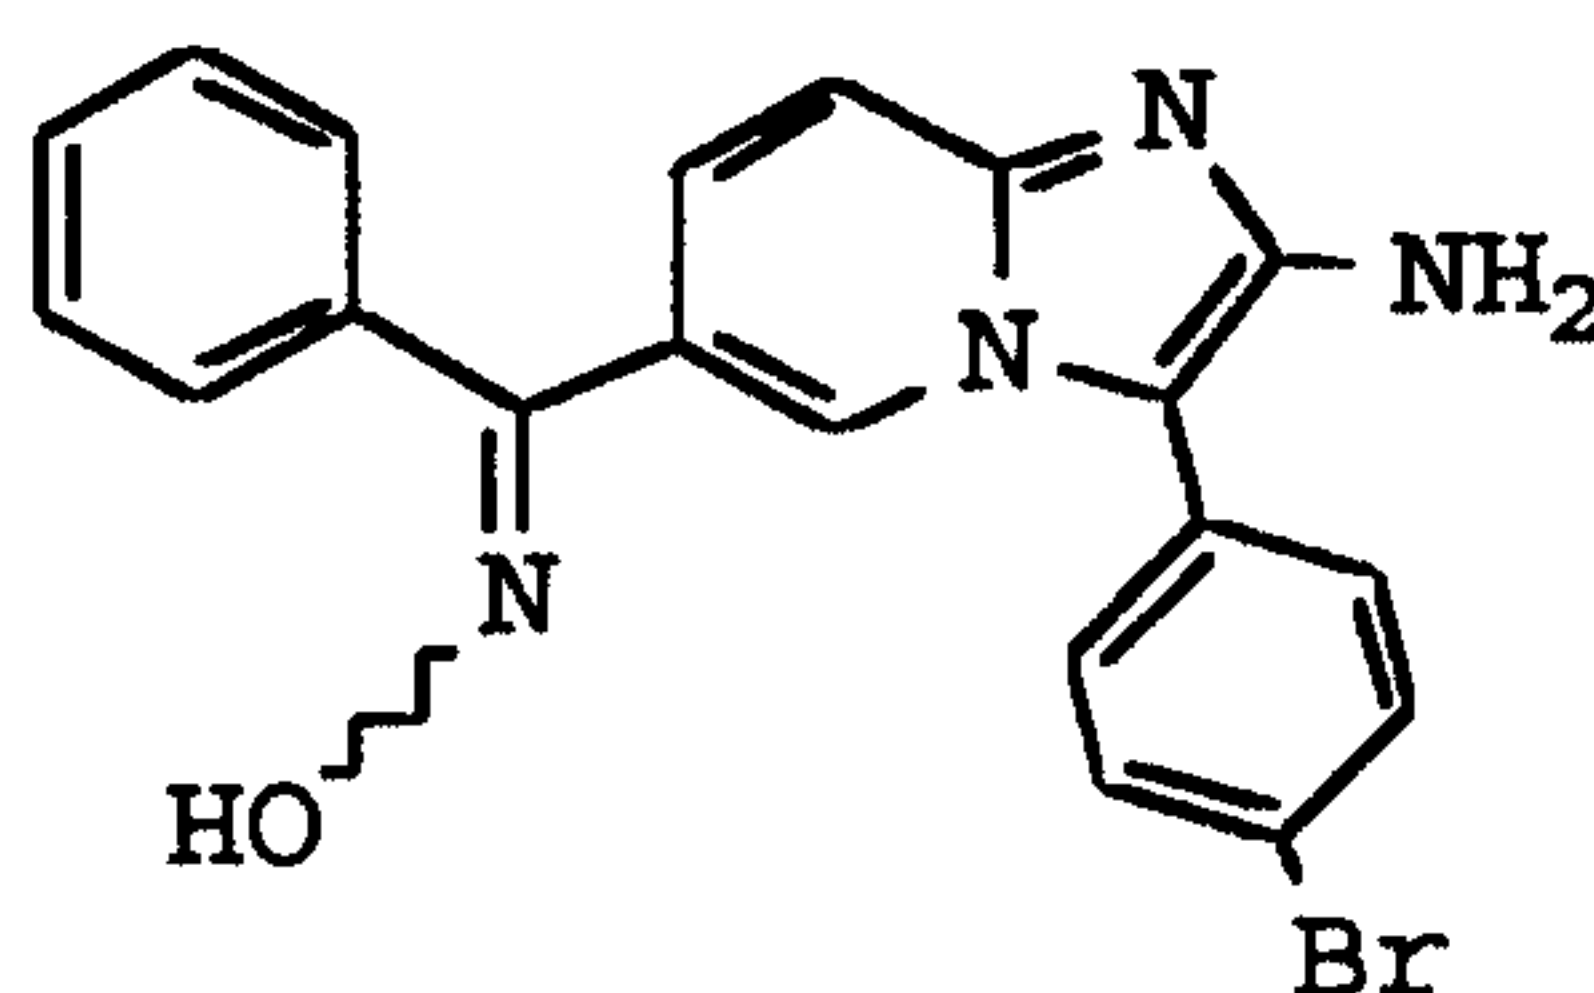

The 2-amino-3-(4-bromophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (1.80 g, 4.59 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 1.20 g of a 1:1 mixture of E and Z isomer products. (64.2%). EA, MS(FD).

Example 108

2-Amino-3-(2,3,4-trifluorophenyl)-6-[(E)-benzyloxim- α -yl]-imidazo[1,2-a]pyridine

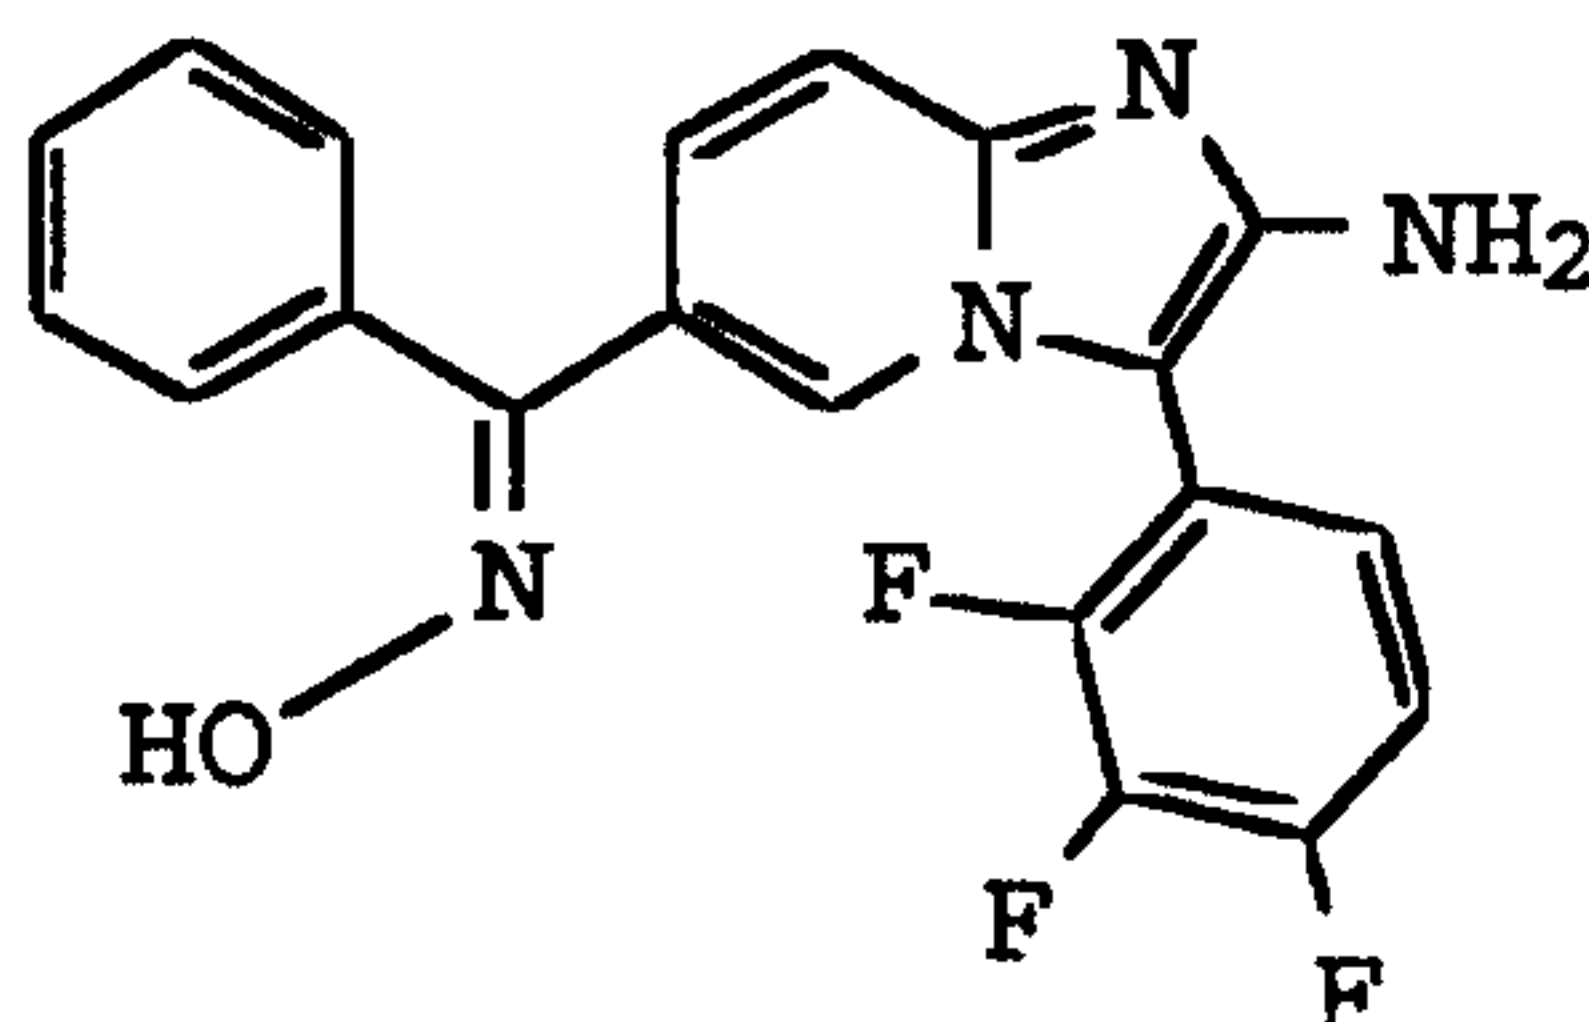


10

The 2-amino-3-(2,3,4-trifluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (2.00 g, 5.45 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 508 mg of E-product. (24.1%). EA, MS(FD).

15

Example 109

2-Amino-3-(3,4-difluorophenyl)-6-[(E)-benzyloxim- α -yl]-imidazo[1,2-a]pyridine

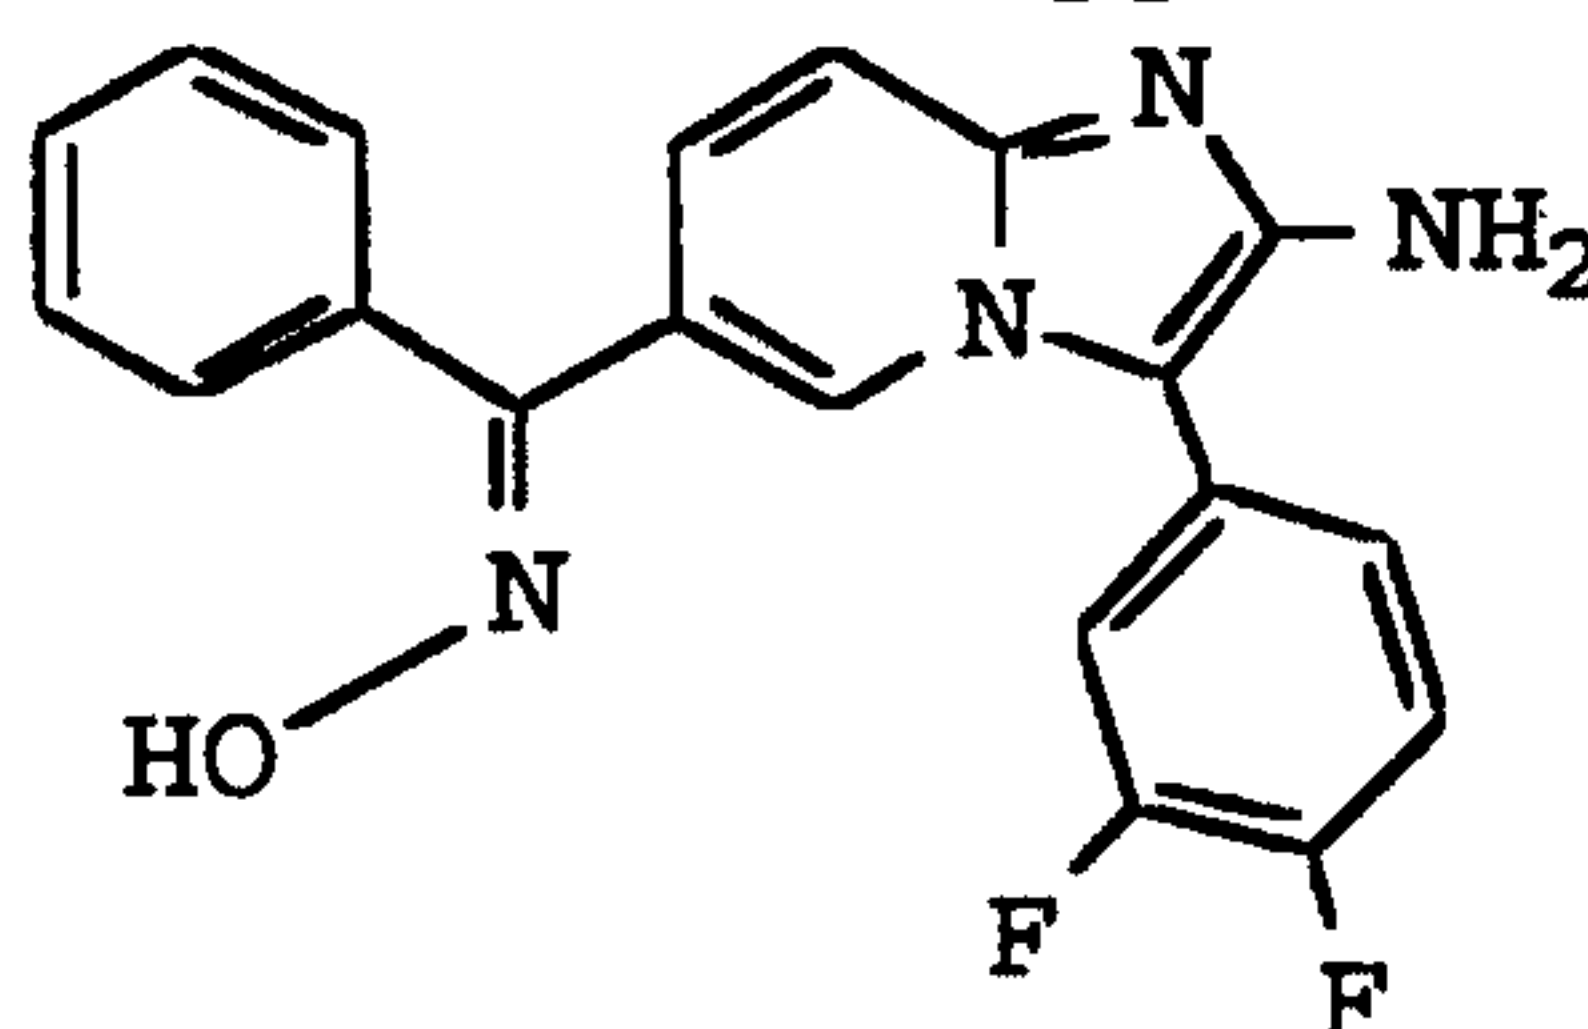


20

The 2-amino-3-(3,4-difluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (2.00 g, 5.73 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 507 mg of E-product. (24.2%). EA, MS(FD).

Example 110

-107-


2-Amino-3-(3,4-dichlorophenyl)-6-[(E)-benzyloxim- α -yl]-
imidazo[1,2-a]pyridine

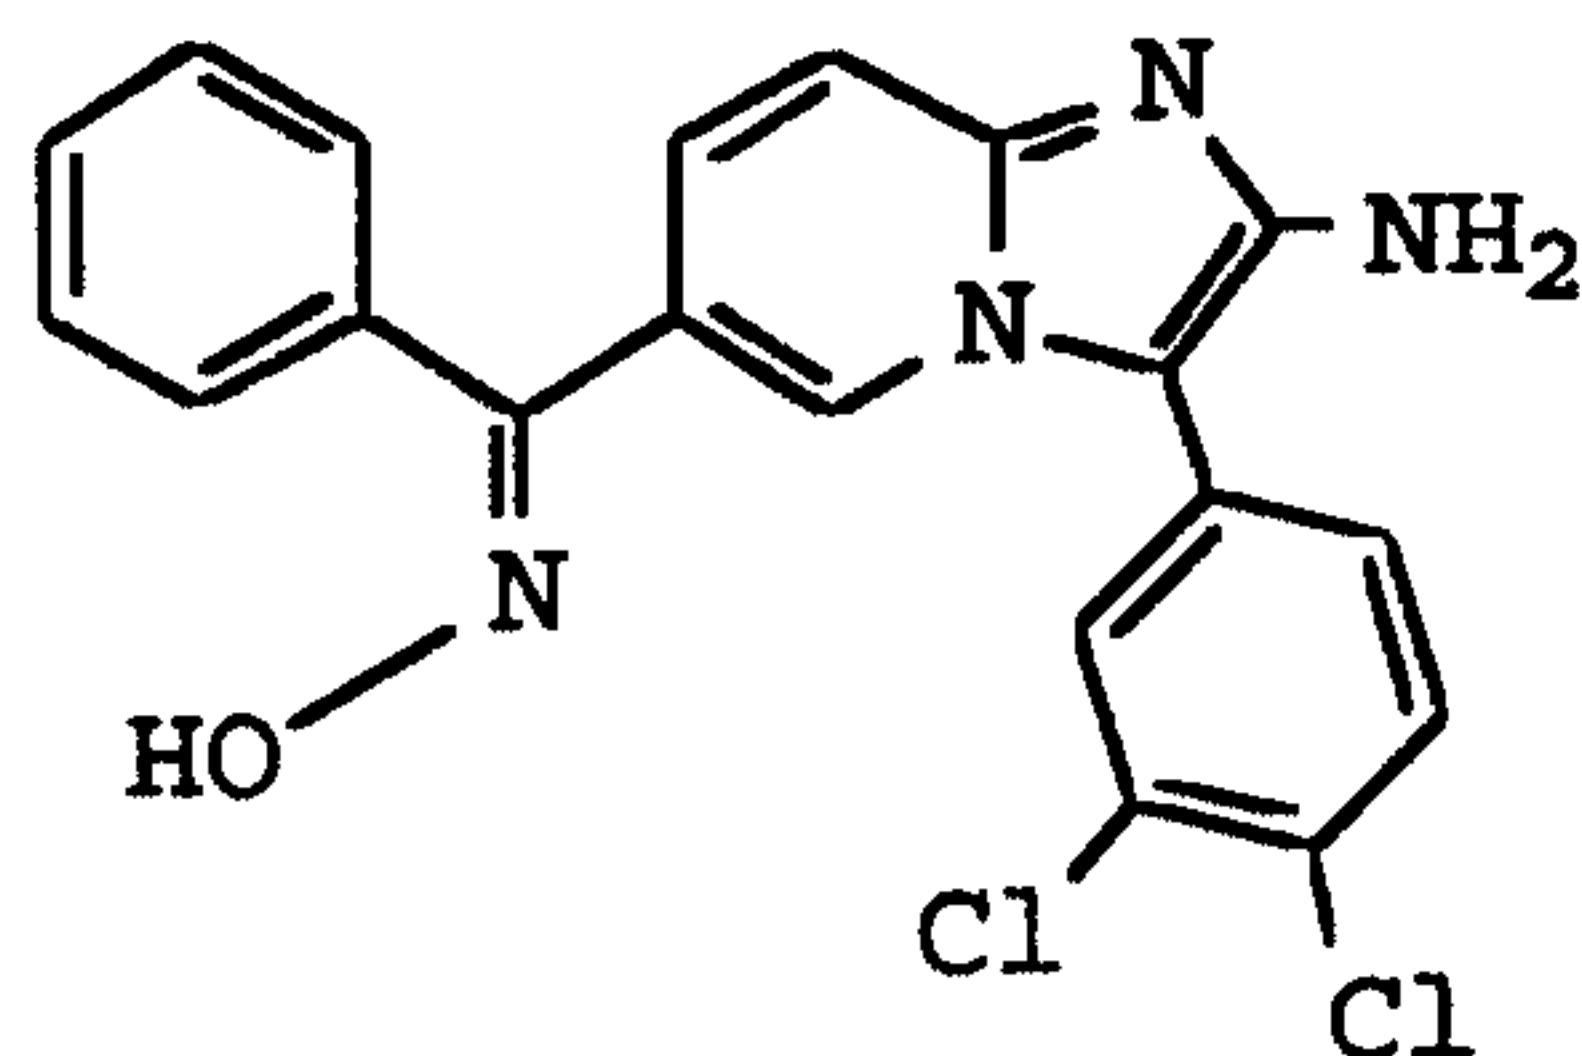

The 2-amino-3-(3,4-dichlorophenyl)-6-benzoyl-imidazo[1,2-
a]pyridine (2.00 g, 5.25 mmol) was converted to product
in a manner substantially analogous to Example 97 to
yield 643 mg of E-product. (31.1%). EA, MS(FD).

Example 111


2-Amino-3-(2,4,5-trifluorophenyl)-6-[(E)-benzyloxim- α -
yl]-imidazo[1,2-a]pyridine

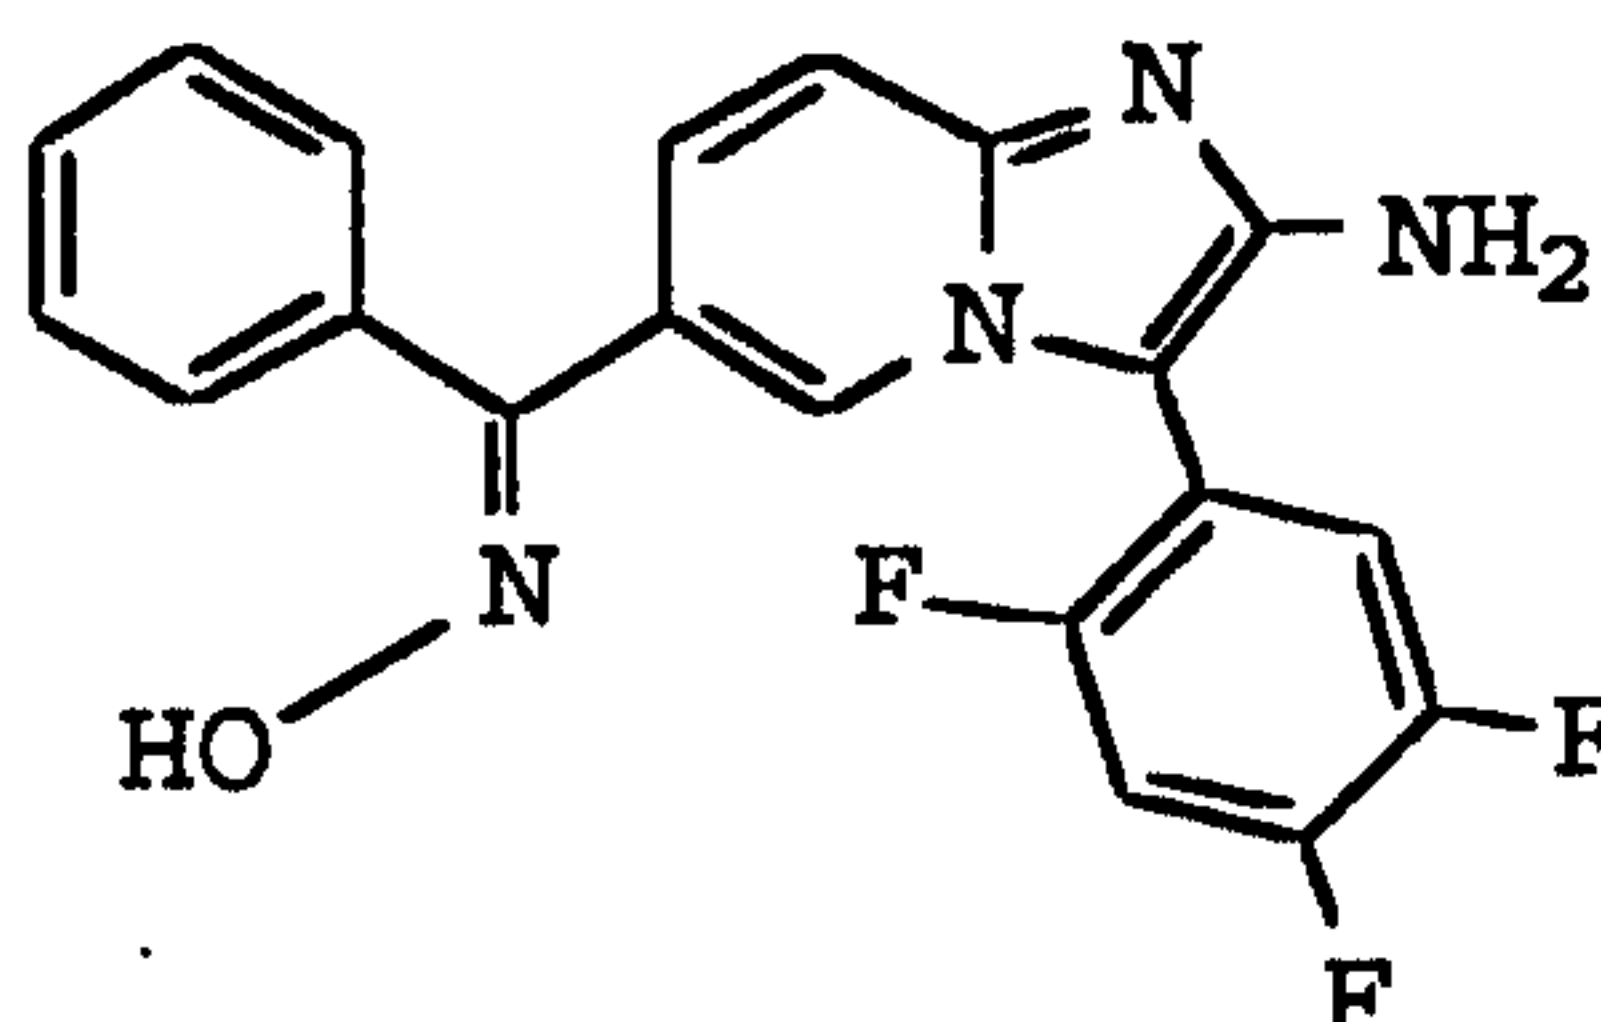

The 2-amino-3-(2,4,5-trifluorophenyl)-6-benzoyl-
imidazo[1,2-a]pyridine (2.00 g, 5.45 mmol) was converted
to product in a manner substantially analogous to Example
97 to yield 344 mg of E-product. (16.6%). EA, MS(FD).

Example 112


2-Amino-3-(2-chlorophenyl)-6-[(E)-benzyloxim- α -yl]-
imidazo[1,2-a]pyridine

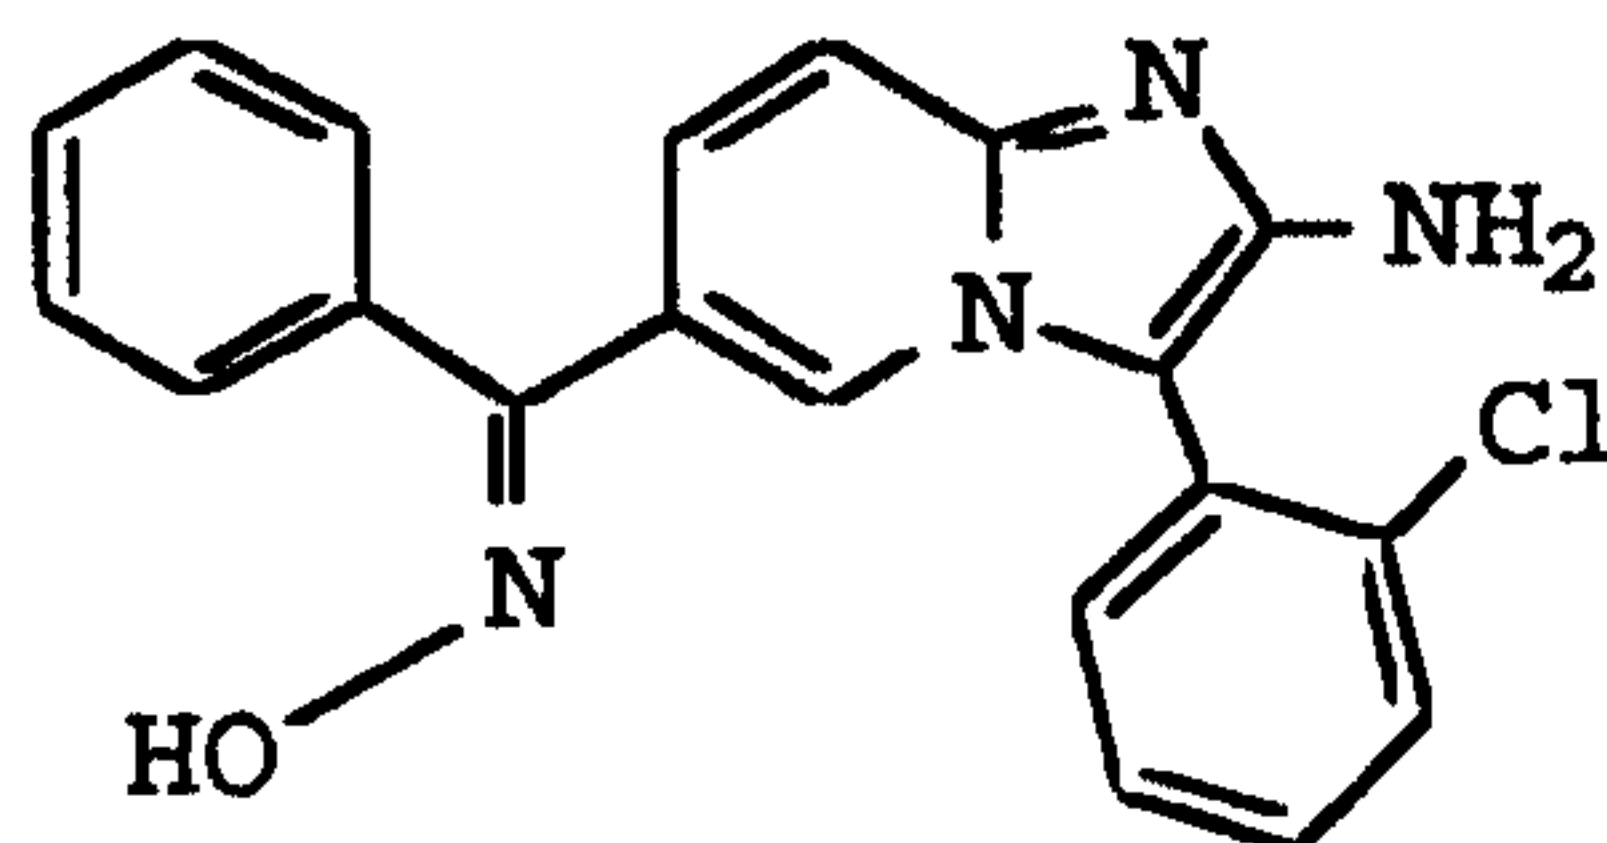

The 2-amino-3-(2-chlorophenyl)-6-benzoyl-imidazo[1,2-
a]pyridine (2.00 g, 5.76 mmol) was converted to product
in a manner substantially analogous to Example 97 to
yield 180 mg of E-product. (8.61%). EA, MS(FD).

Example 113


2-Amino-3-(3-chlorophenyl)-6-[(E)-benzyloxim- α -yl]-
imidazo[1,2-a]pyridine

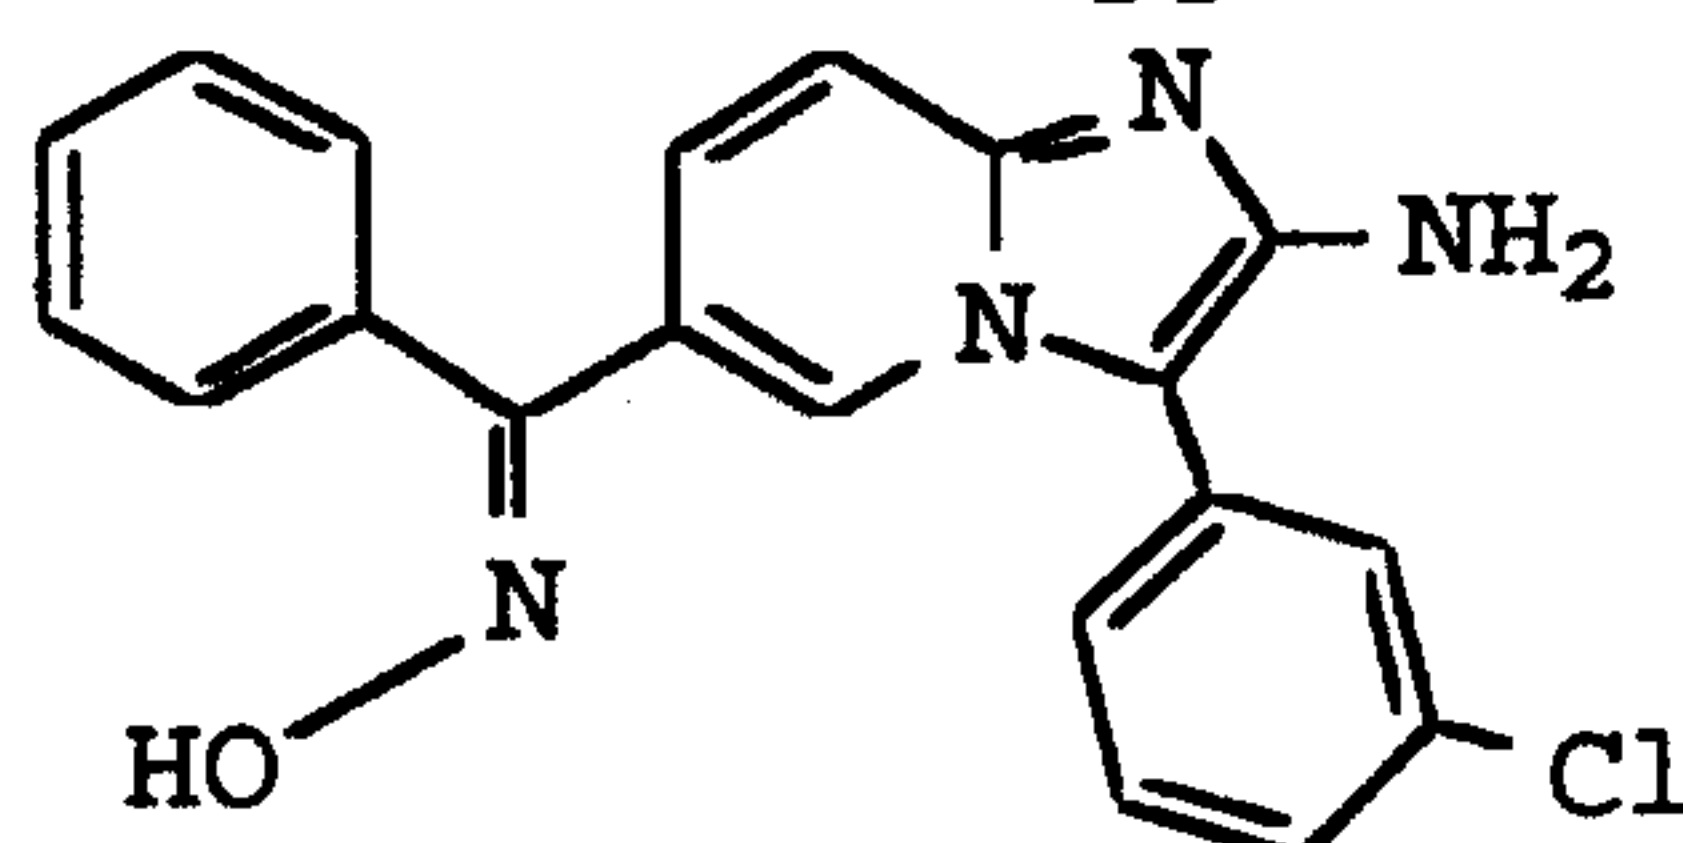

The 2-amino-3-(3-chlorophenyl)-6-benzoyl-imidazo[1,2-
5 a]pyridine (2.00 g, 5.75 mmol) was converted to product
in a manner substantially analogous to Example 97 to
yield 551 mg of E-product. (26.4%). EA, MS(FD).

Example 114


10 2-Amino-3-(4-chlorophenyl)-6-[(E)-benzyloxim- α -yl]-
imidazo[1,2-a]pyridine

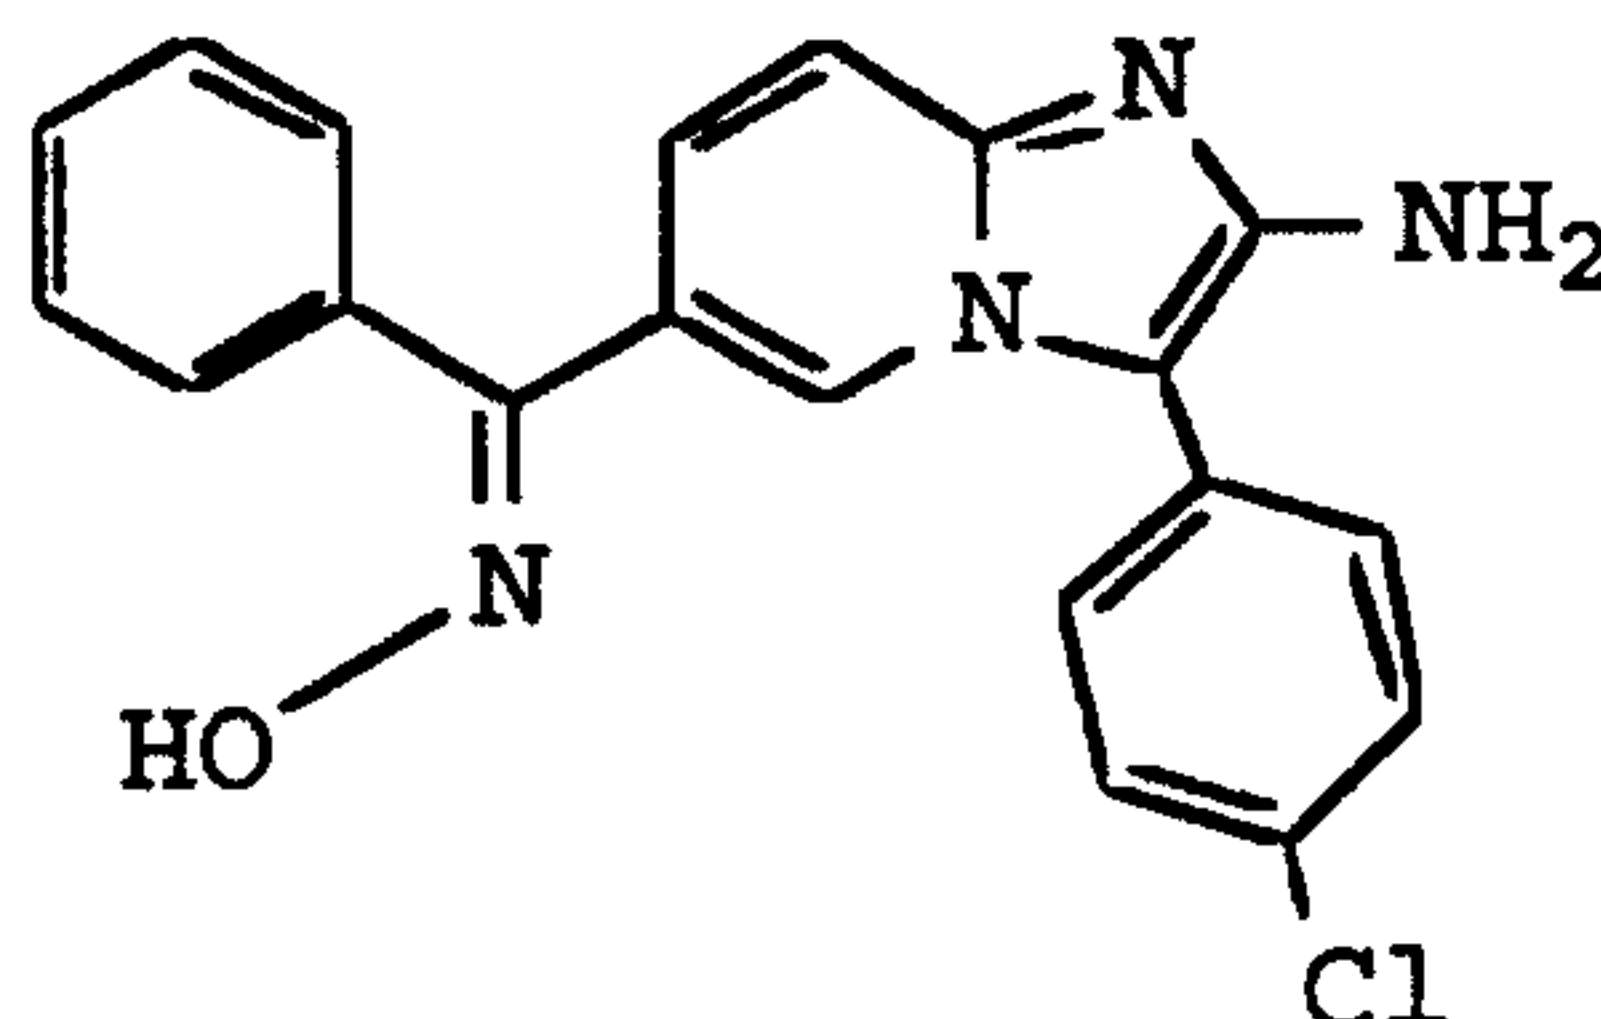

The 2-amino-3-(4-chlorophenyl)-6-benzoyl-imidazo[1,2-
a]pyridine (2.00 g, 5.75 mmol) was converted to product
in a manner substantially analogous to Example 97 to
15 yield 180 mg of E-product. (8.61%). EA, MS(FD).

Example 115

2-Amino-3-(4-trifluoromethoxyphenyl)-6-[(E)-benzyloxim- α -
yl]-imidazo[1,2-a]pyridine

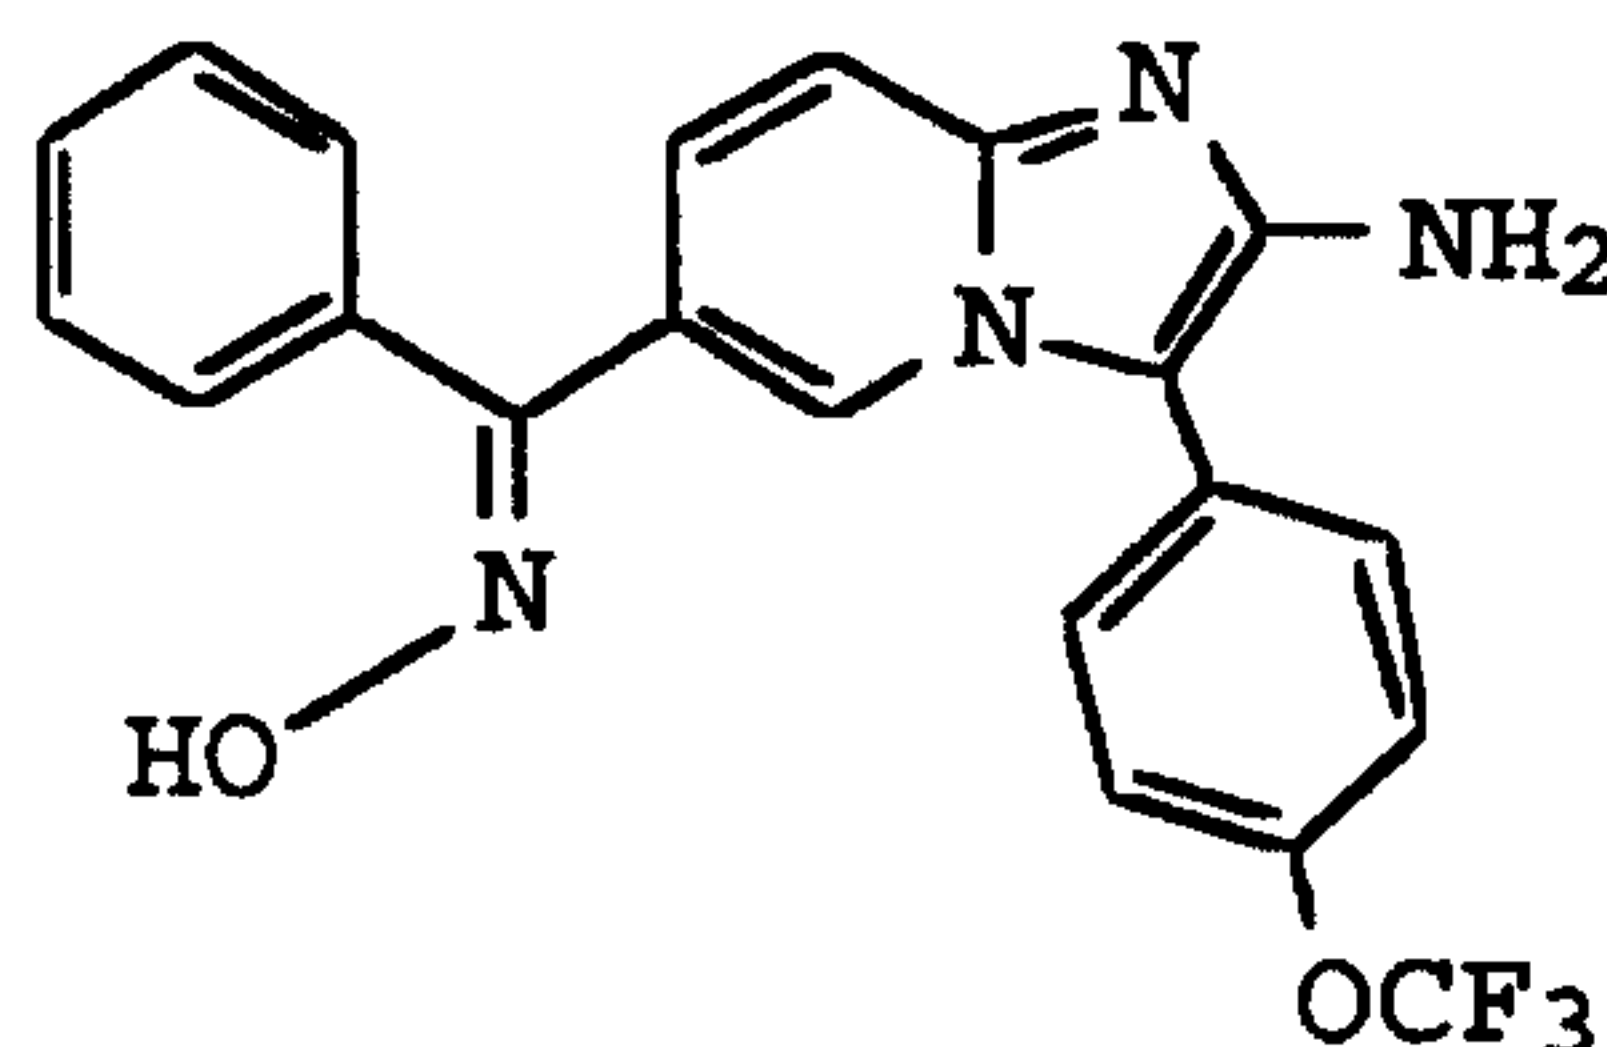


20 The 2-amino-3-(4-trifluoromethoxyphenyl)-6-benzoyl-
imidazo[1,2-a]pyridine (2.00 g, 5.04 mmol) was converted
to product in a manner substantially analogous to Example
97 to yield 383 mg of E-product. (18.4%). EA, MS(FD).

Example 116

-109-


2-Amino-3-(3-trifluoromethoxyphenyl)-6-[(E)-benzyloxim- α -yl]-imidazo[1,2-a]pyridine

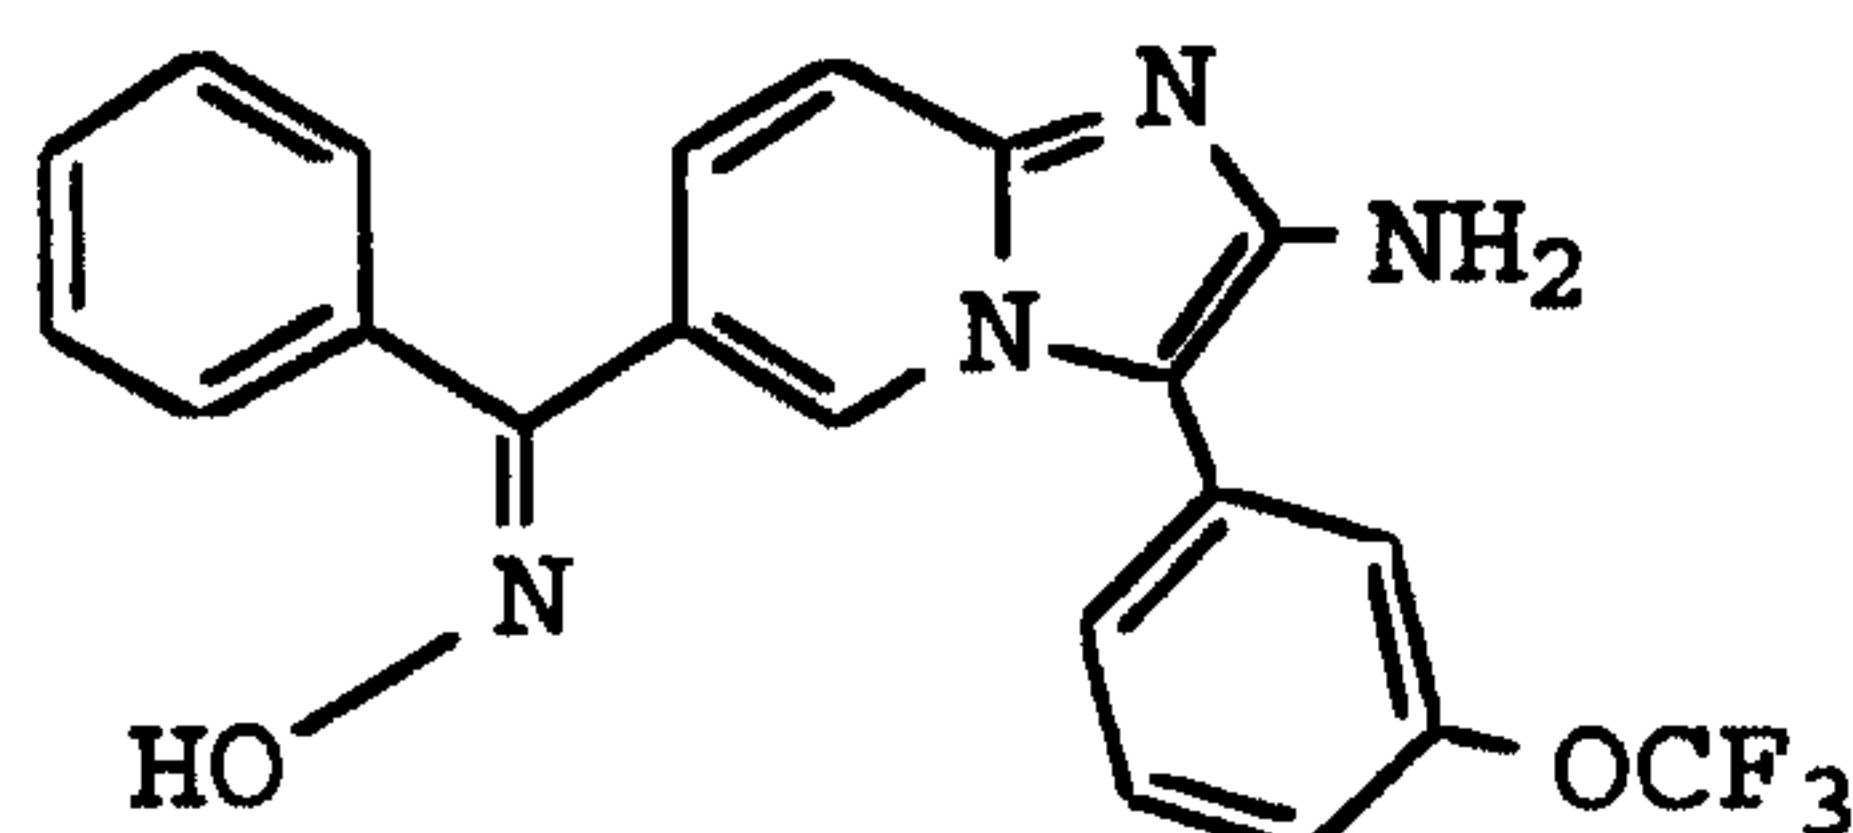

The 2-amino-3-(3-trifluoromethoxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (2.00 g, 5.04 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 224 mg of E-product. (10.8%). EA, MS(FD).

Example 117


2-Amino-3-(2-fluoro-4-trifluoromethylphenyl)-6-(benzyloxim- α -yl)-imidazo[1,2-a]pyridine

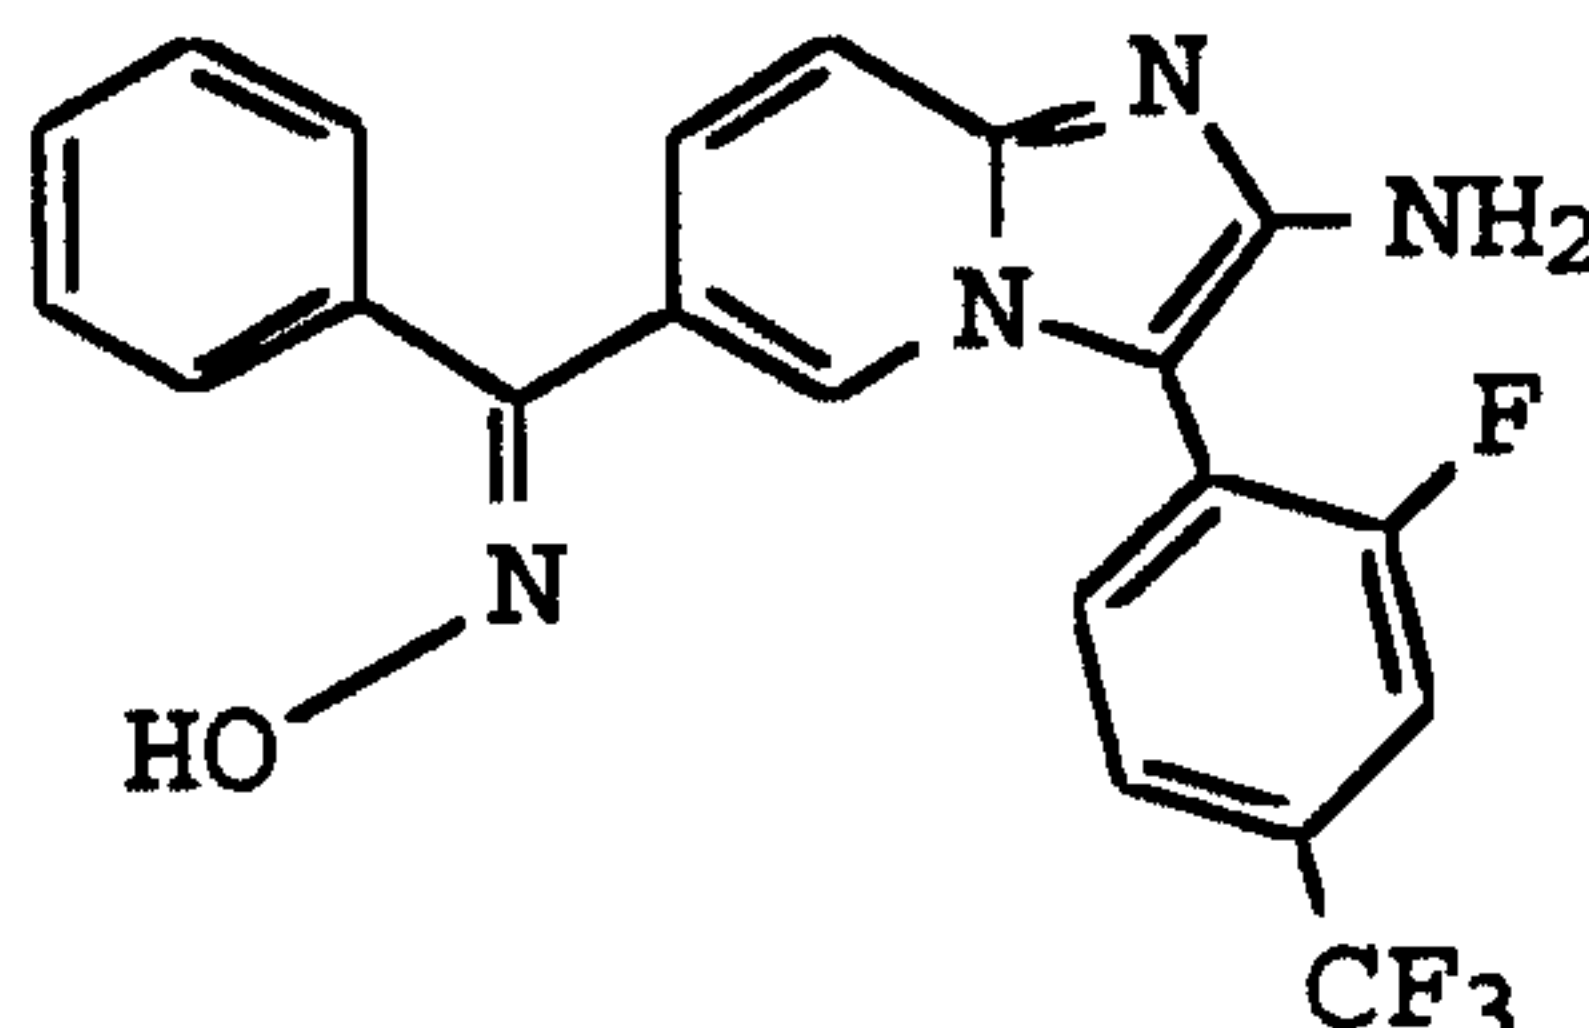

The 2-amino-3-(2-fluoro-4-trifluoromethylphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (2.00 g, 5.01 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 742 mg of E-product. (35.7%). EA, MS(FD).

Example 118

2-Amino-3-phenyl-6-[(E)-benzyloxim- α -yl]-imidazo[1,2-a]pyridine

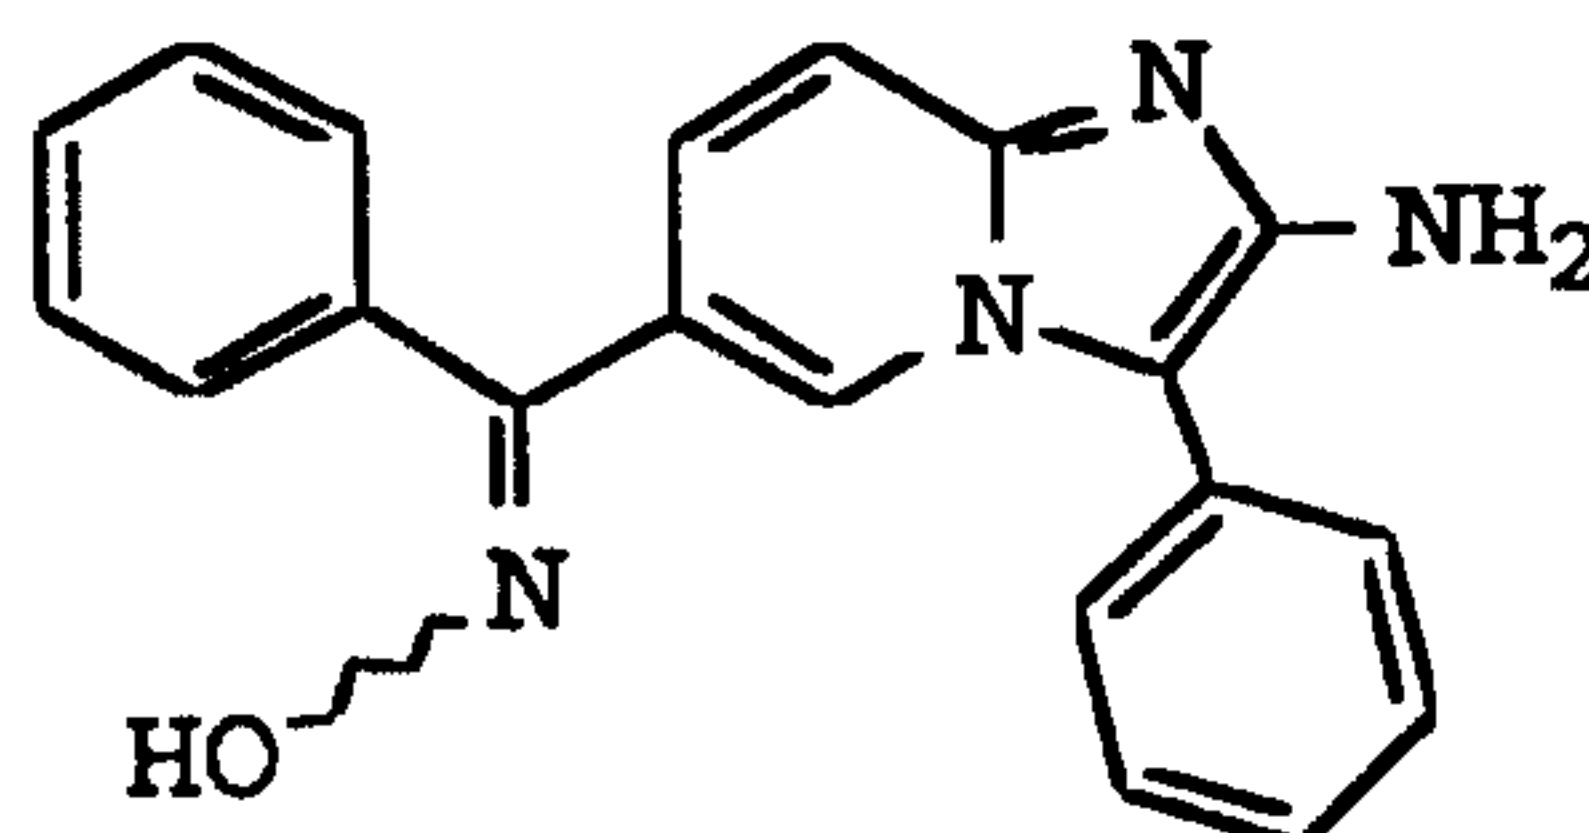

20


The 2-amino-3-phenyl-6-benzoyl-imidazo[1,2-a]pyridine (133 mg, 0.426 mmol) was treated with hydroxylamine hydrochloride (500 mg, 7.20 mmol), 2.5 ml of pyridine, and 7.5 ml of dry EtOH. After refluxing for 2.5 hours, 200 ml of EtOAc was added and the solution washed twice with saturated NaHSO₃. The organic layer was dried over

MgSO₄ and the solvent removed in vacuo. The product crystallized out in EtOAc to yield 64 mg of E-product, (45.7%), MS(FD), and 68 mg of the Z isomer. (48.6%). MS(FD).

5

Example 119

2-Amino-3-(2,6-difluorophenyl)-6-[(E)-benzyloxim- α -yl]-imidazo[1,2-a]pyridine

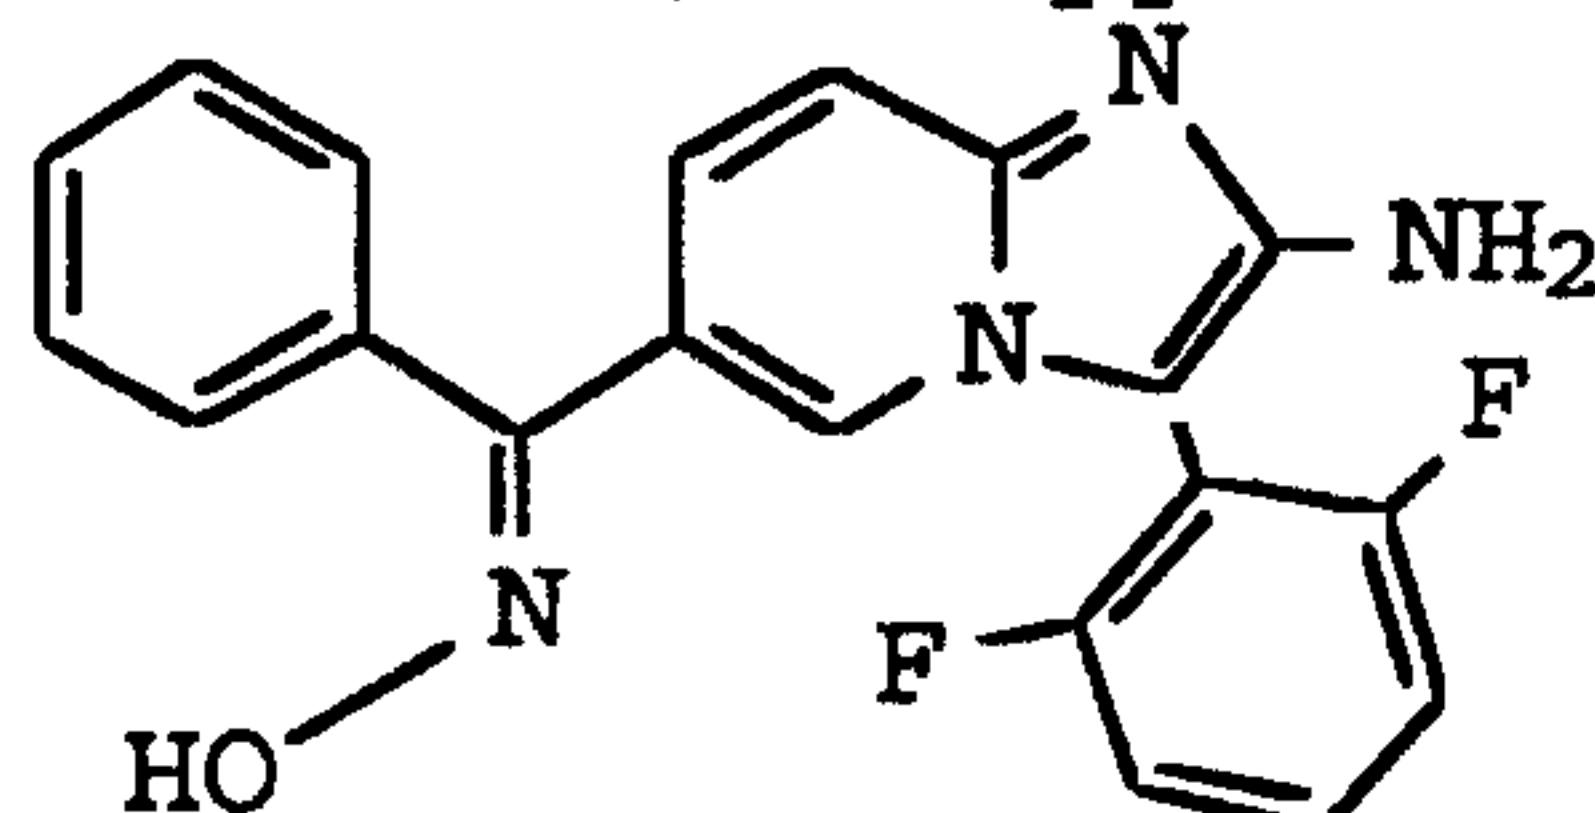


The 2-amino-3-(2,6-difluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (2.00 g, 5.73 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 383 mg of E-product. (18.4%). EA, MS(FD).

15

Example 120

2-Amino-3-(2,3,4,5,6-pentafluorophenyl)-6-[(E)-benzyloxim- α -yl]-imidazo[1,2-a]pyridine

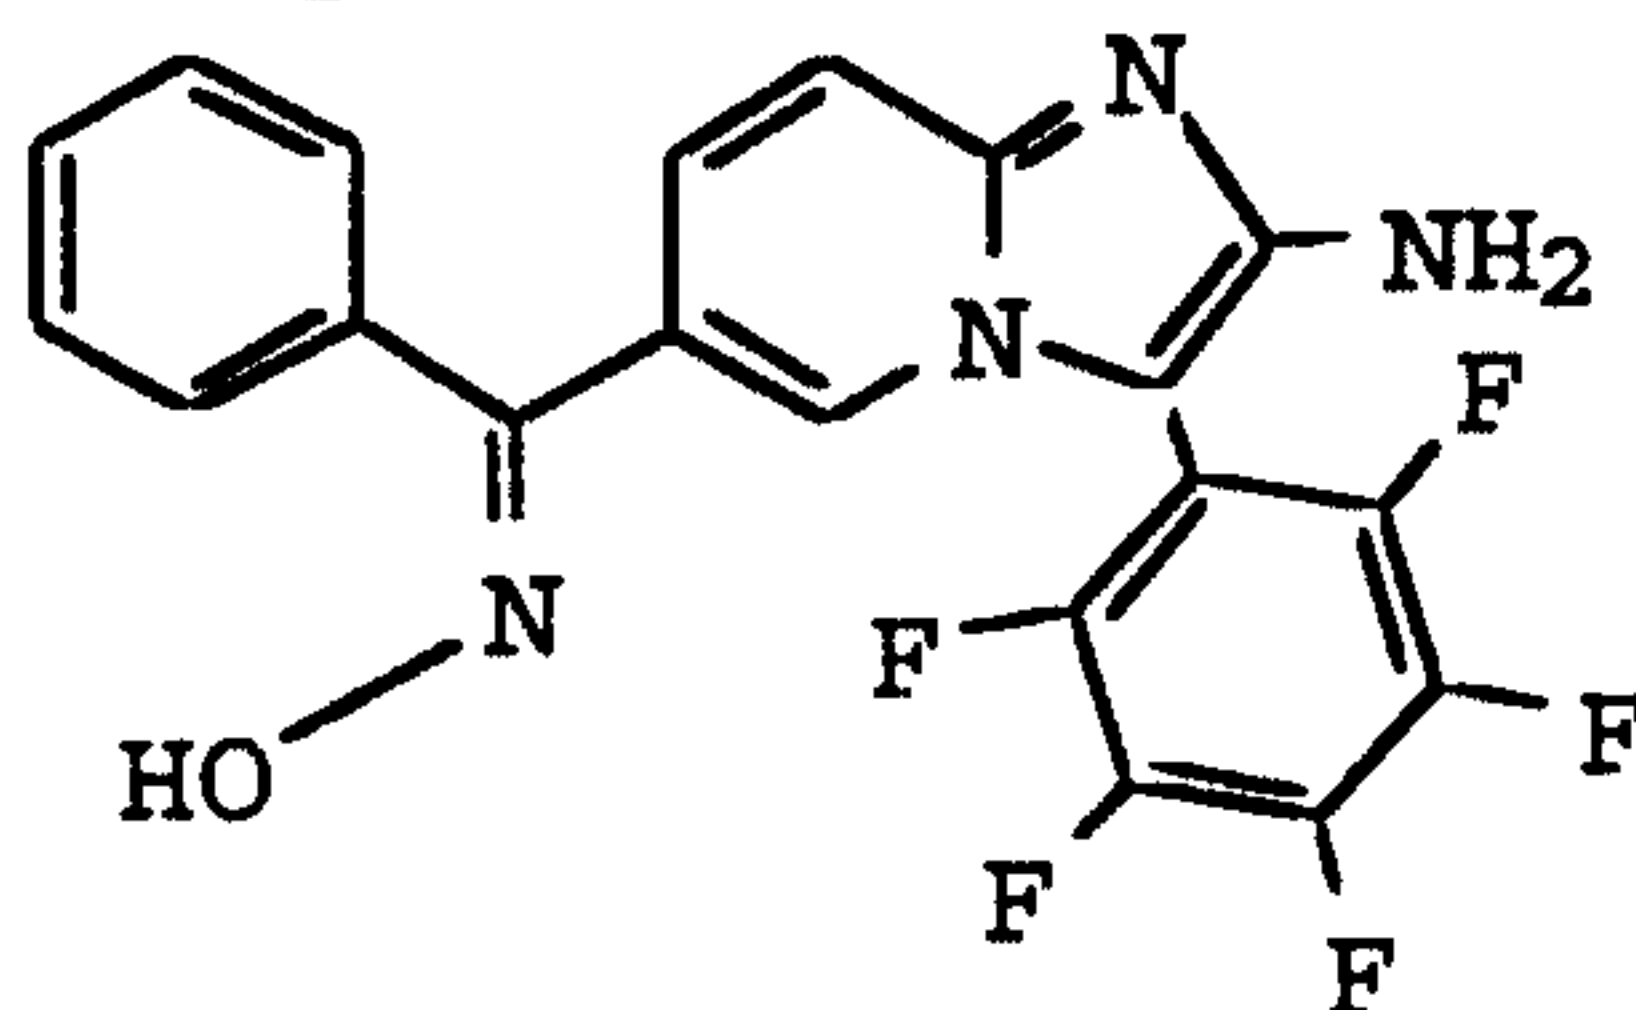


The 2-amino-3-(2,6-difluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (4.52 g, 11.2 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 940 mg of E-product. (20%). EA, MS(FD).

20

Example 121

2-Amino-3-(2-trifluoromethylphenyl)-6-[(E)-benzyloxim- α -yl]-imidazo[1,2-a]pyridine

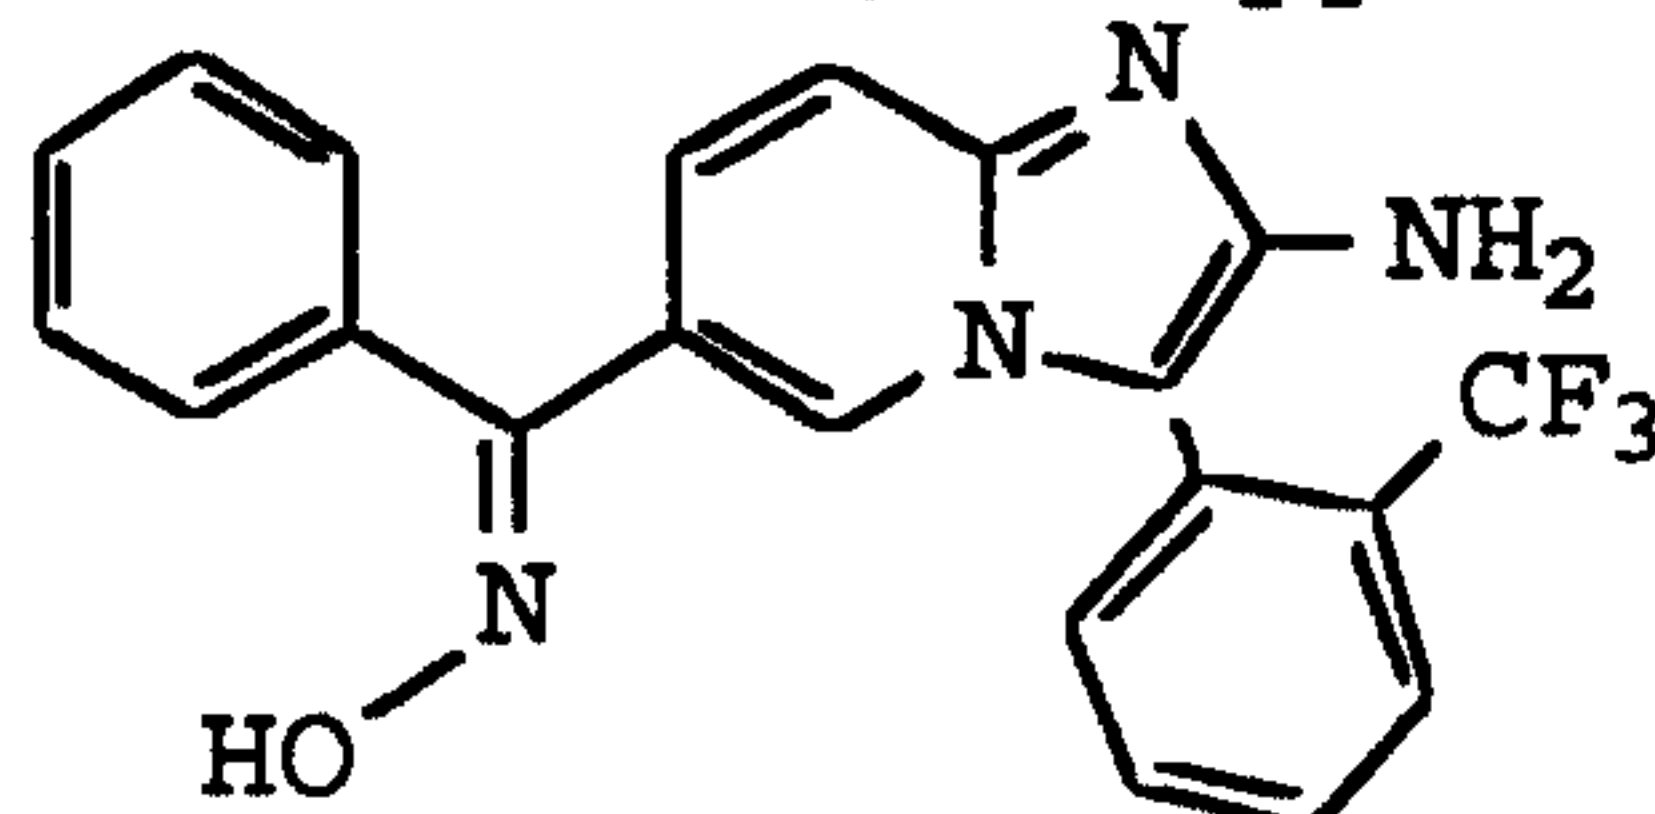

The 2-amino-3-(2-trifluoromethylphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (2.00 g, 5.25 mmol) was converted


25

-111-

to product in a manner substantially analogous to Example 97 to yield 146 mg of E-product. (7.02%). EA, MS(FD).

Example 122


2-Amino-3-(thiophen-3-yl)-6-[(E)-benzyloxim- α -yl]-
imidazo[1,2-a]pyridine

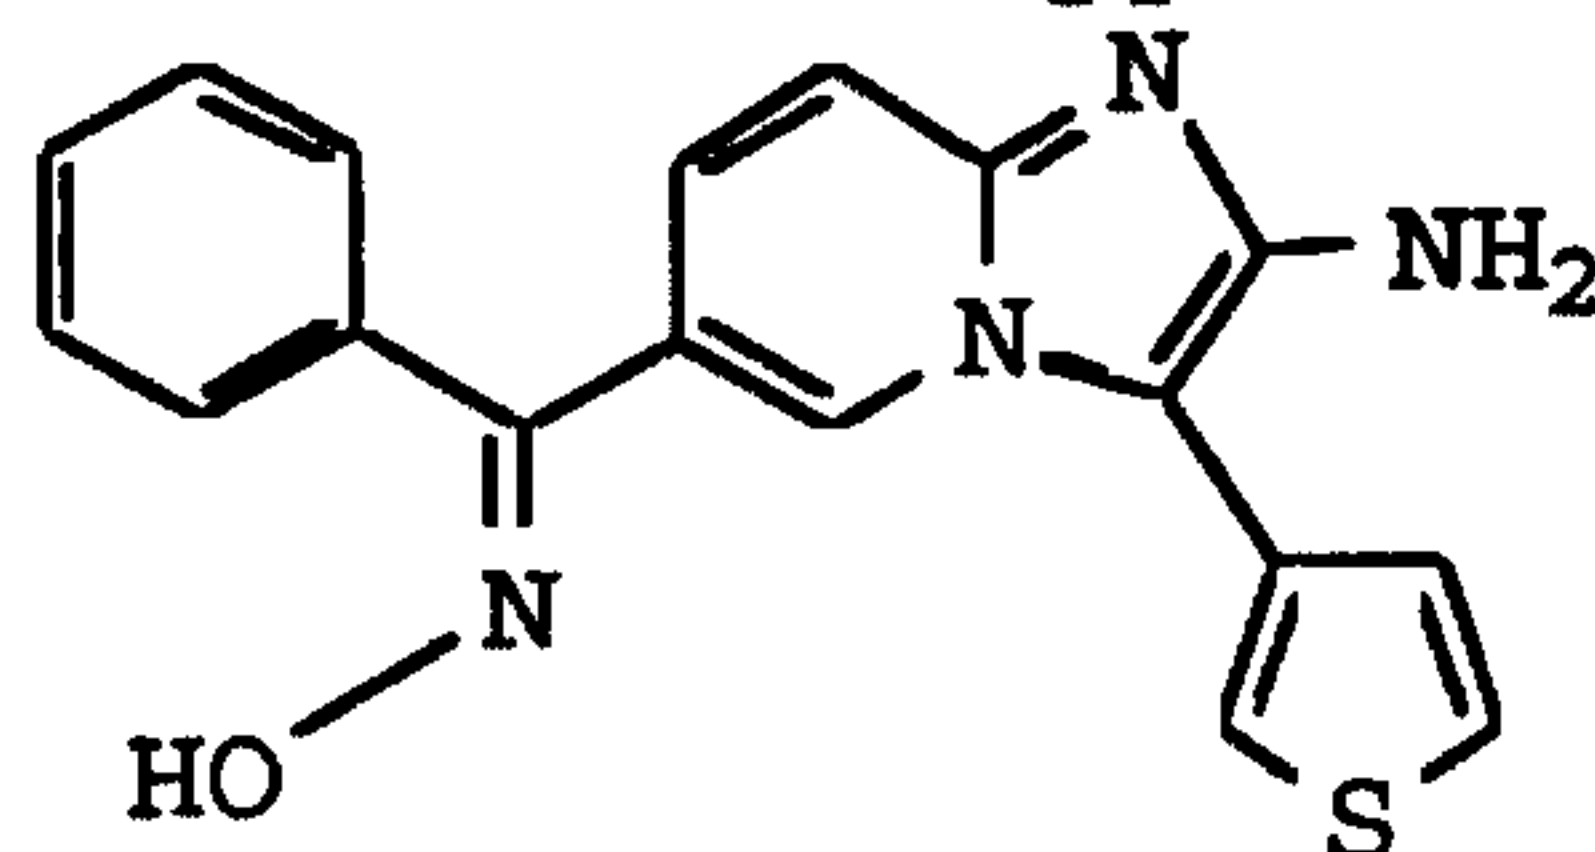

The 2-amino-3-(thiophen-3-yl)-6-benzoyl-imidazo[1,2-a]pyridine (2.00 g, 6.27 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 497 mg of E-product. (23.8%). EA, MS(FD).

Example 123


2-Amino-3-(2-trifluoromethyl-4-fluorophenyl)-6-[(E)-benzyloxim- α -yl]-imidazo[1,2-a]pyridine

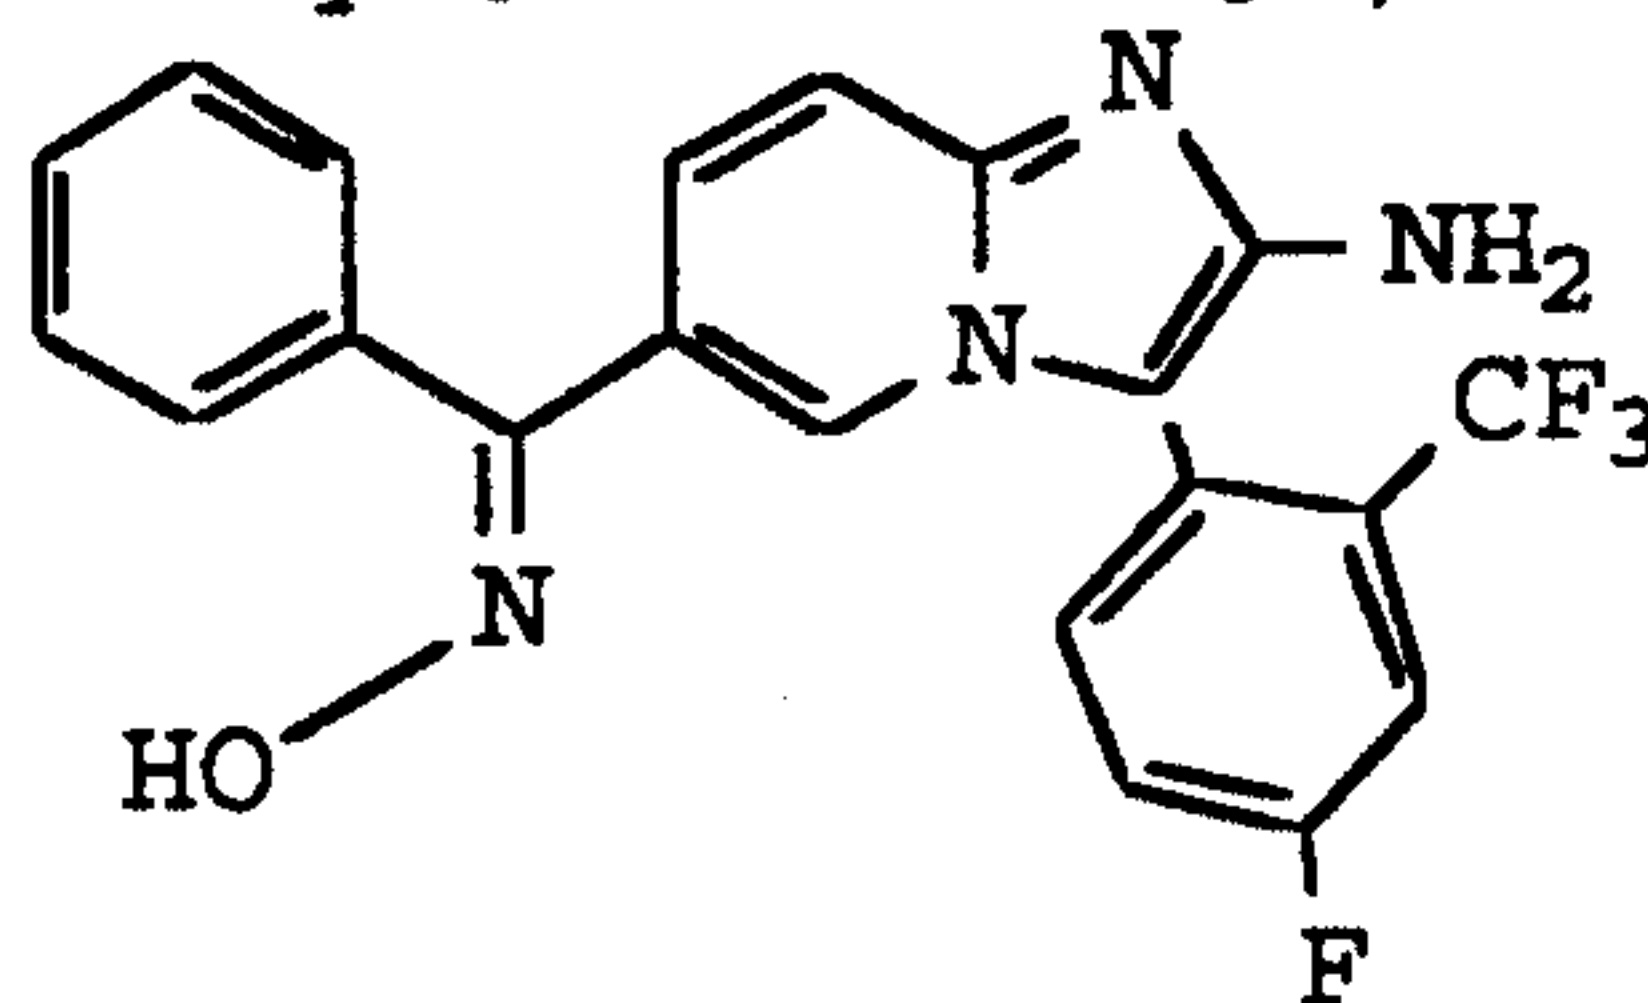

The 2-amino-3-(2-trifluoromethyl-4-fluorophenyl)-6-benzoyl-imidazo[1,2-a]pyridine (2.00 g, 5.01 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 288 mg of E-product. (13.8%). EA, MS(FD).

Example 124

2-Amino-3-(2-fluoro-6-trifluoromethylphenyl)-6-[(E)-benzyloxim- α -yl]-imidazo[1,2-a]pyridine

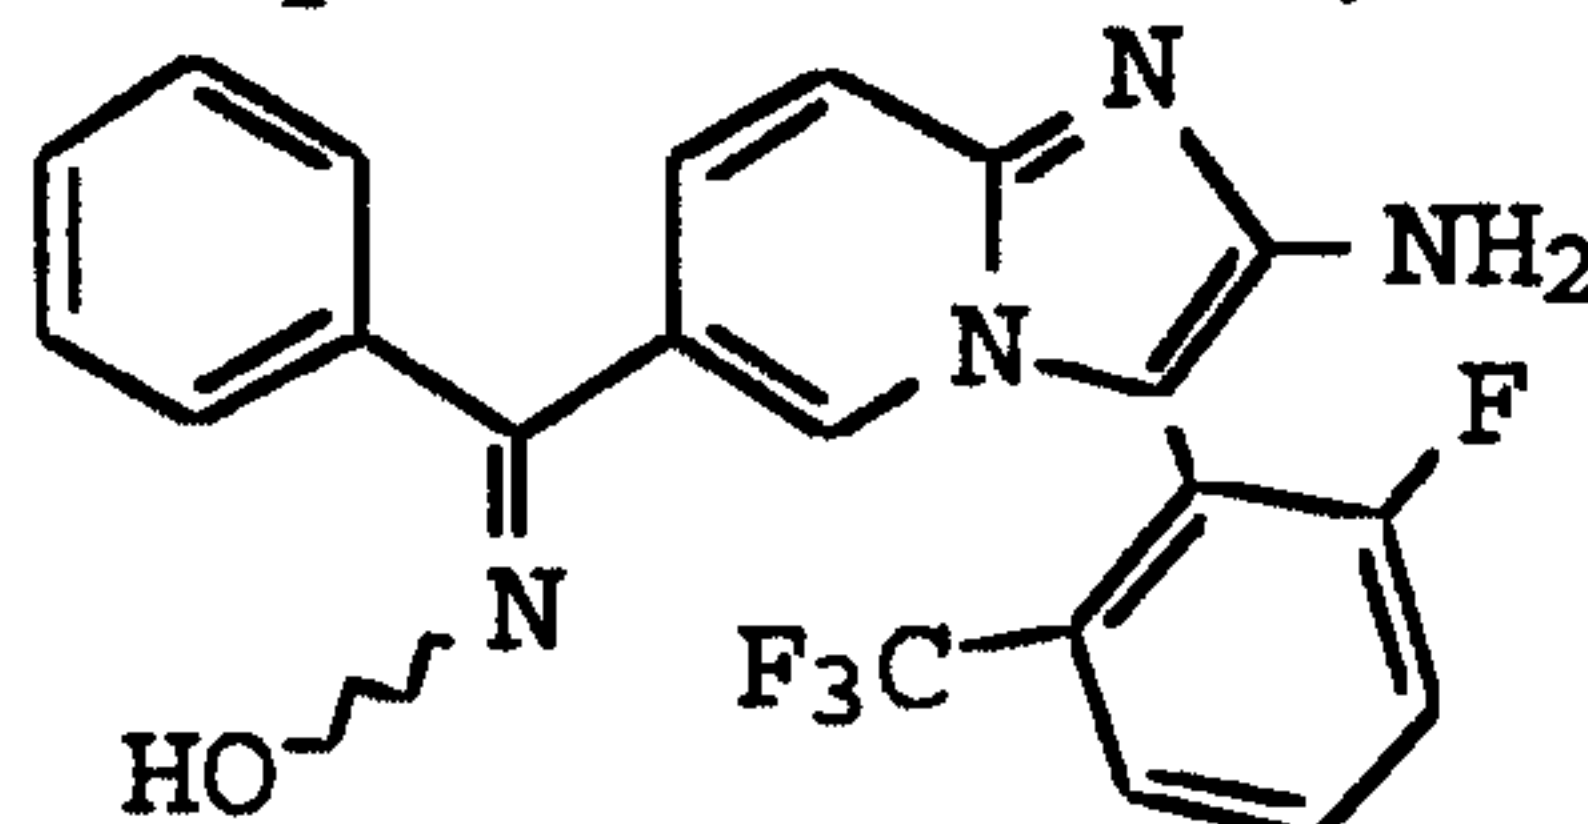


The 2-amino-3-(2-fluoro-6-trifluoromethylphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (1.28 g, 3.21 mmol) was converted to product in a manner substantially analogous

to Example 97 to yield 75.0 mg of E-product, (5.64%), EA, MS(FD), and 395 mg of Z-product. (29.7%). MS(FD), NMR.

Example 125


5 2-Amino-3-(4-trifluoromethylphenyl)-6-[(E)-benzyloxim- α -yl]-imidazo[1,2-a]pyridine

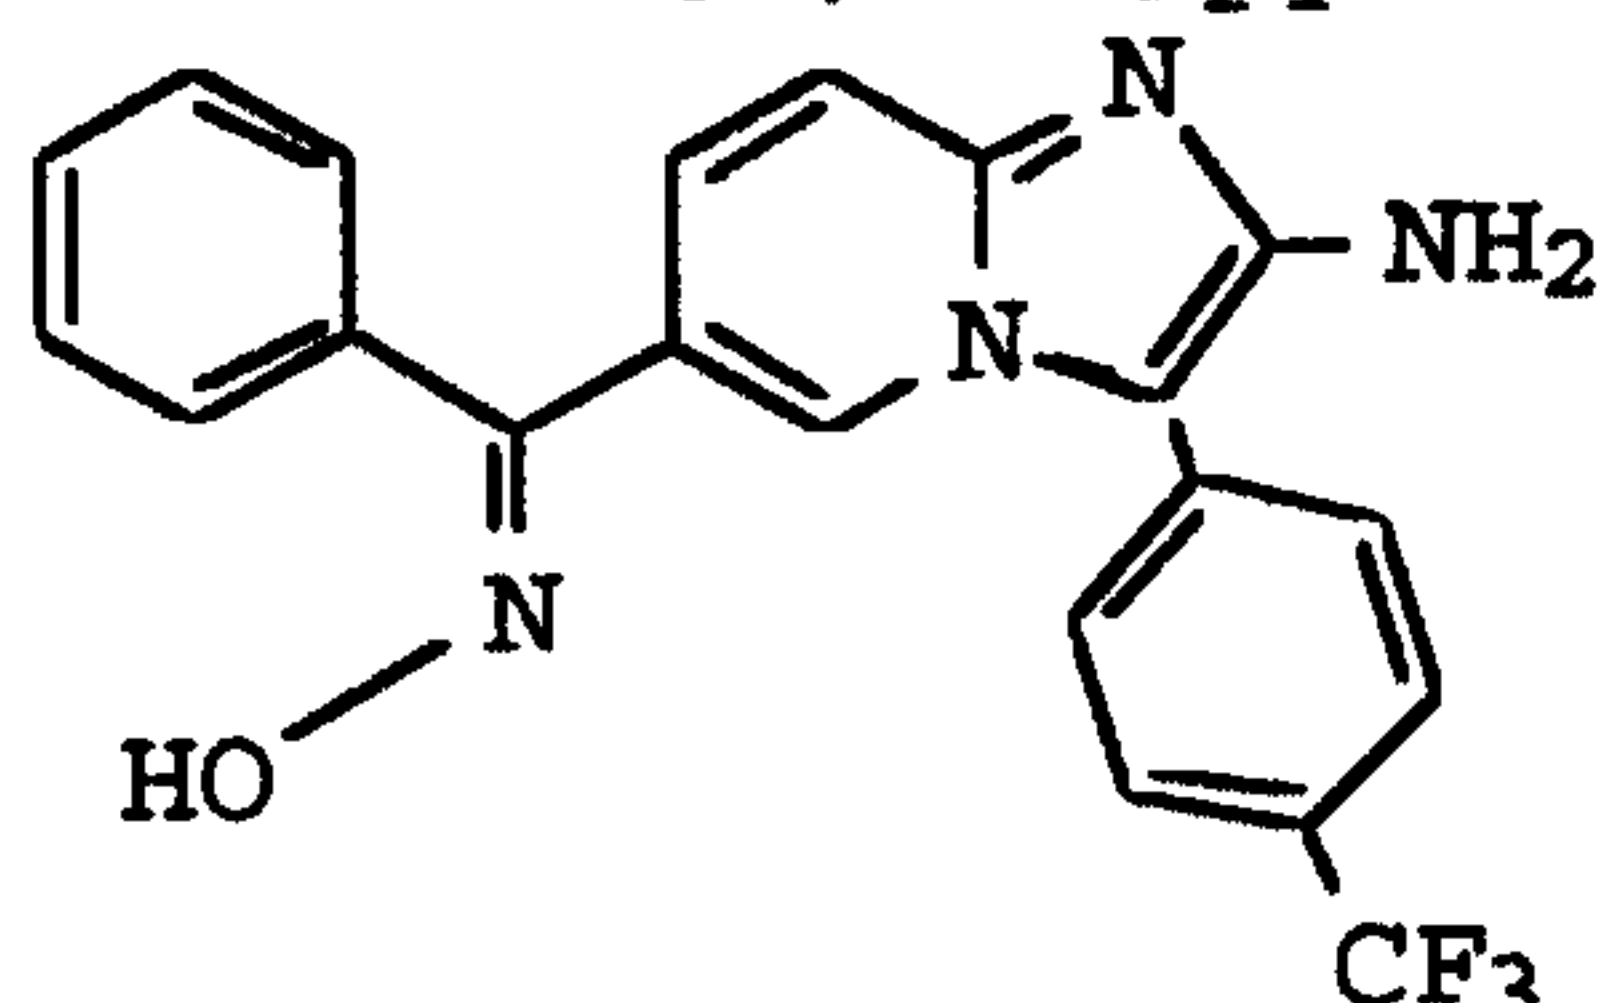

The 2-amino-3-(4-trifluoromethylphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (2.00 g, 5.25 mmol) was converted to product in a manner substantially analogous to Example 10 97 to yield 512 mg of E-product. (24.6%). EA, MS(FD).

Example 126


2-Amino-3-(4-carbomethoxyphenyl)-6-[(E)-benzyloxim- α -yl]-imidazo[1,2-a]pyridine

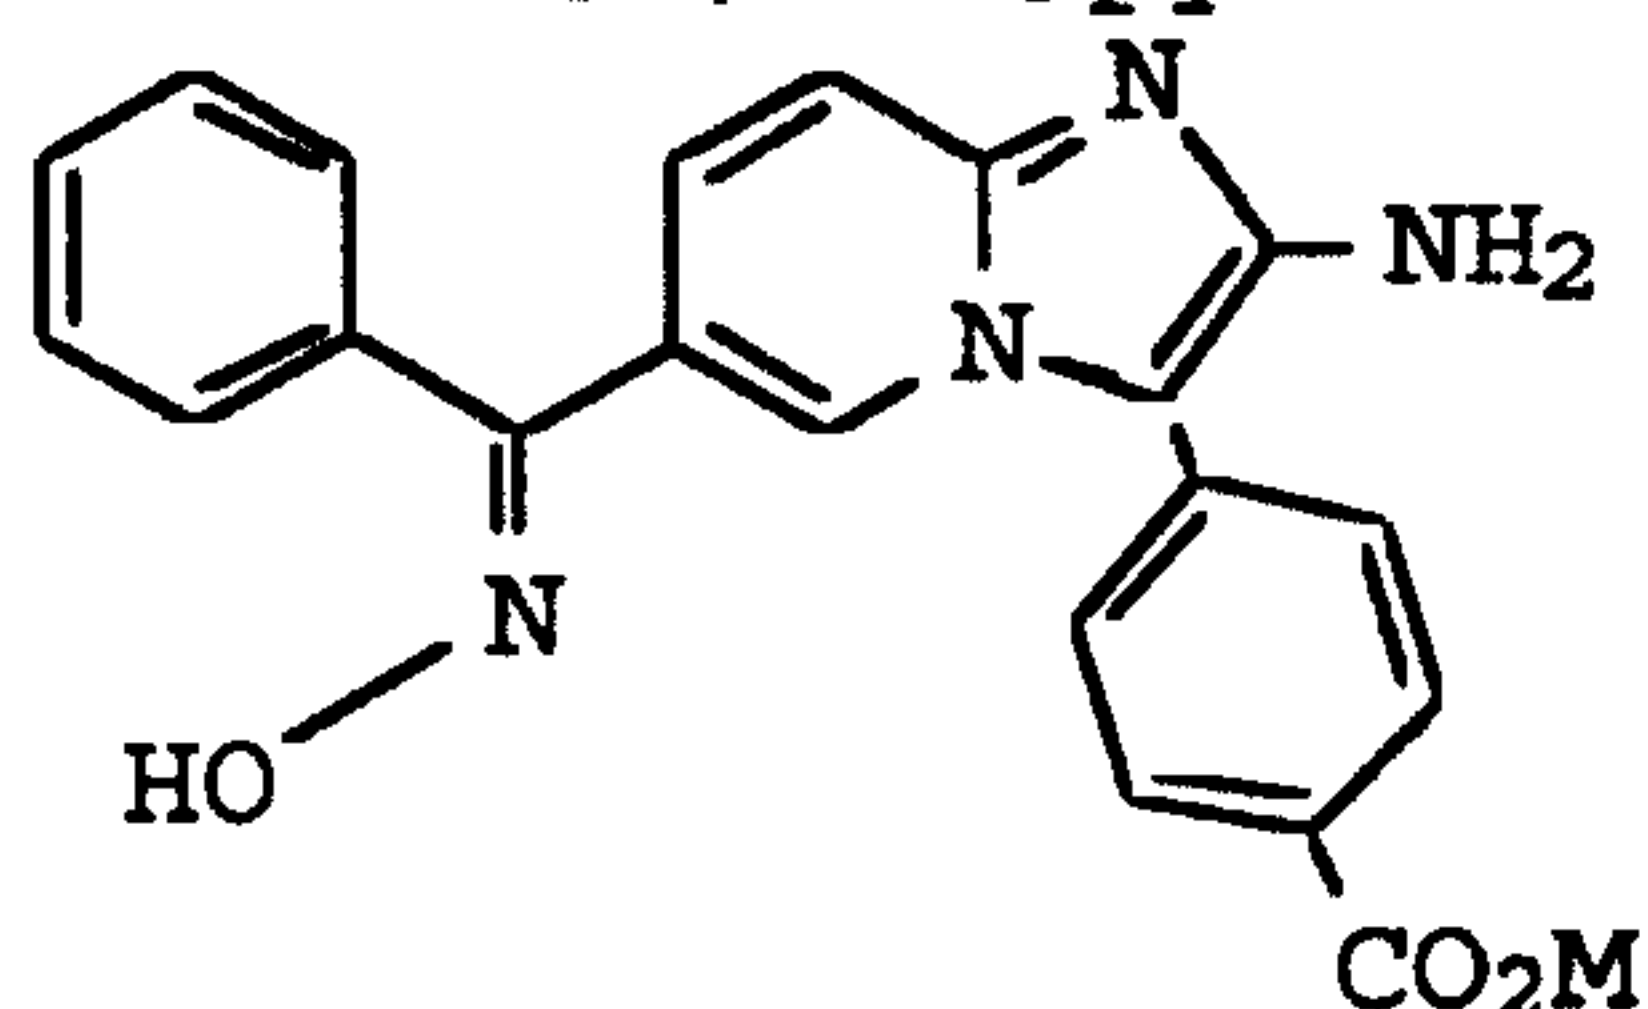

15 The 2-amino-3-(4-carbomethoxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (1.00 g, 2.70 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 437 mg of E-product. (43.5%). EA, MS(FD).

Example 127

20 2-Amino-3-(4-carboxyphenyl)-6-[benzyloxim- α -yl]-imidazo[1,2-a]pyridine

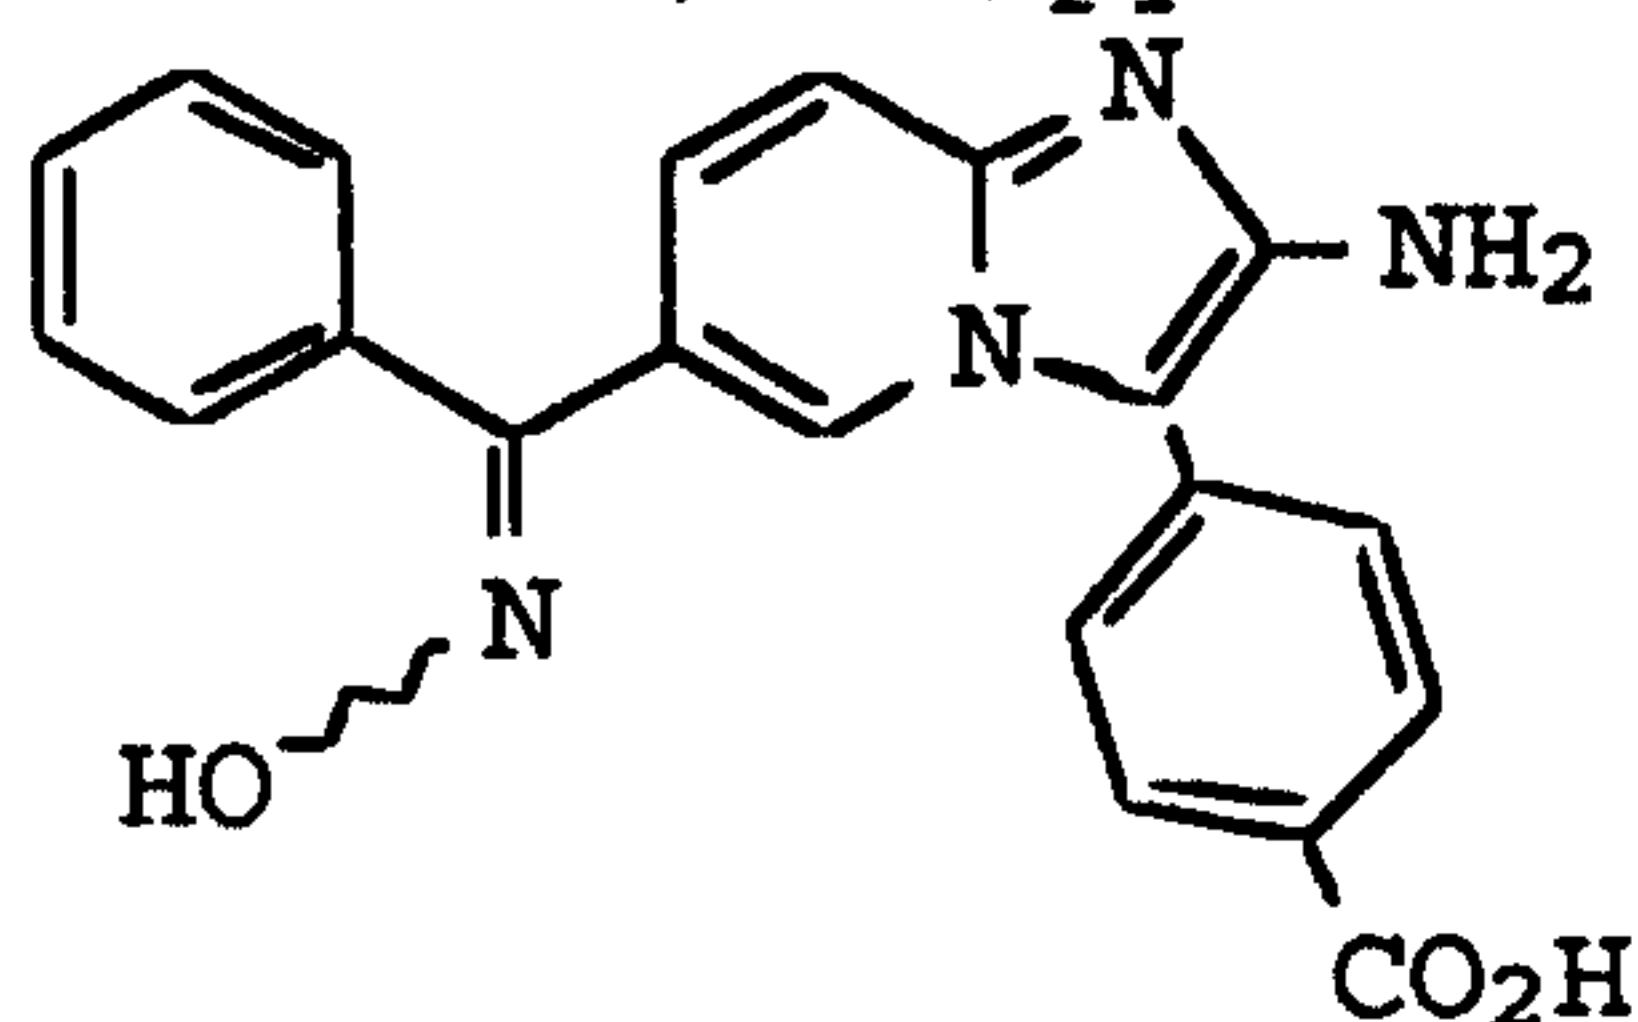

The 2-amino-3-(4-carboxyphenyl)-6-benzoyl-imidazo[1,2-a]pyridine (2.00 g, 5.60 mmol) was converted to product 25 in a manner substantially analogous to Example 97 to


-113-

yield 990 mg of an E and Z isomer mixture. (46.6% global yield). NMR.

Example 128

2-Amino-3-benzyl-6-[benzyloxim- α -yl]-imidazo[1,2-a]pyridine

5

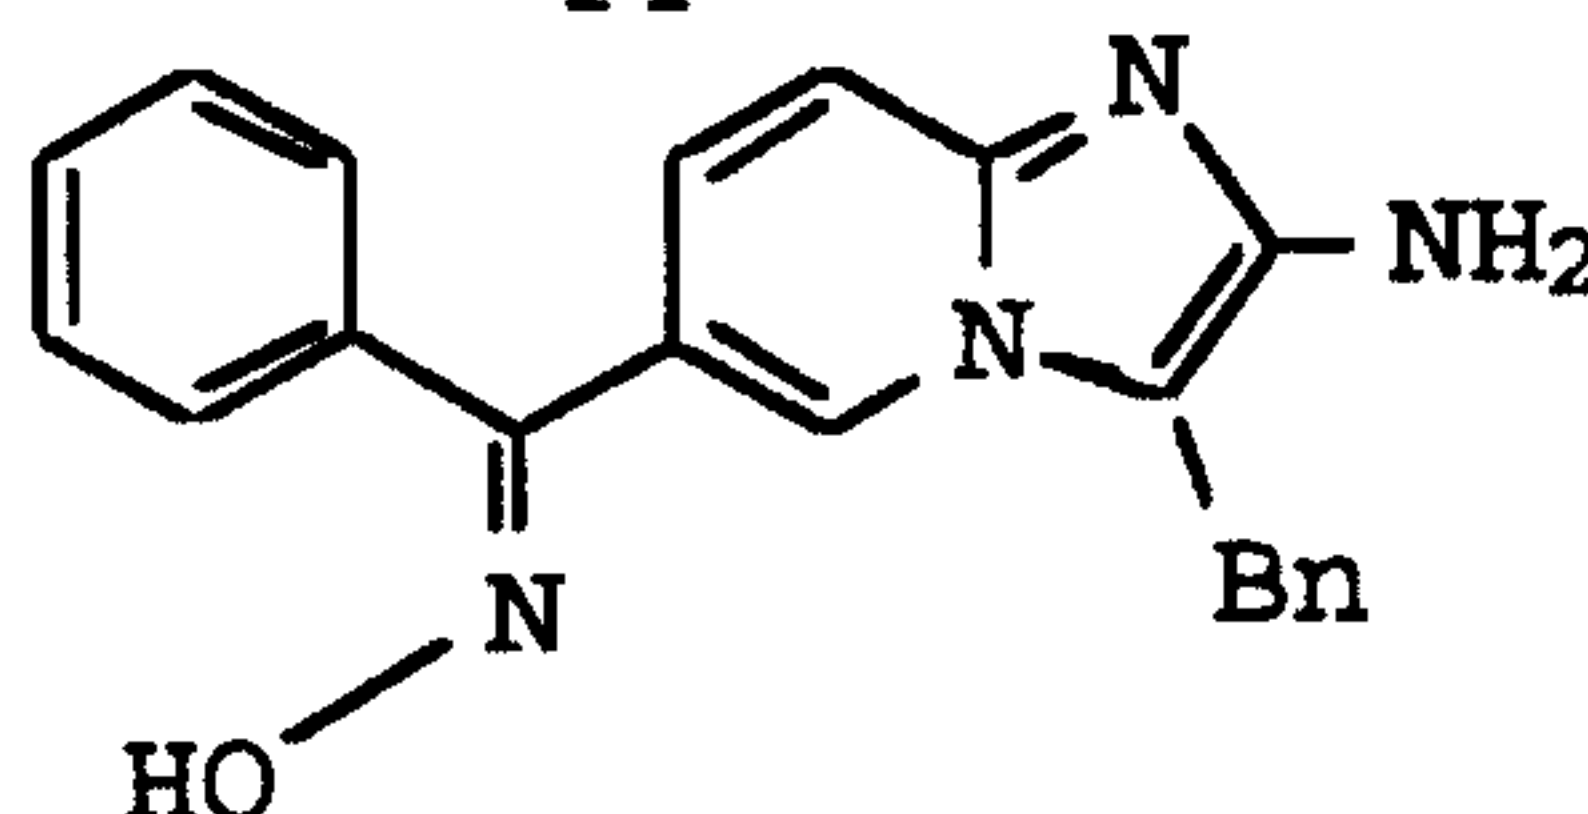


The 2-amino-3-benzyl-6-benzoyl-imidazo[1,2-a]pyridine (2.00 g, 5.60 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 210 mg of the E isomer product. (16.5%). EA, MS(FAB).

10

Example 129

2-Amino-3-isobutyl-6-[benzyloxim- α -yl]-imidazo[1,2-a]pyridine

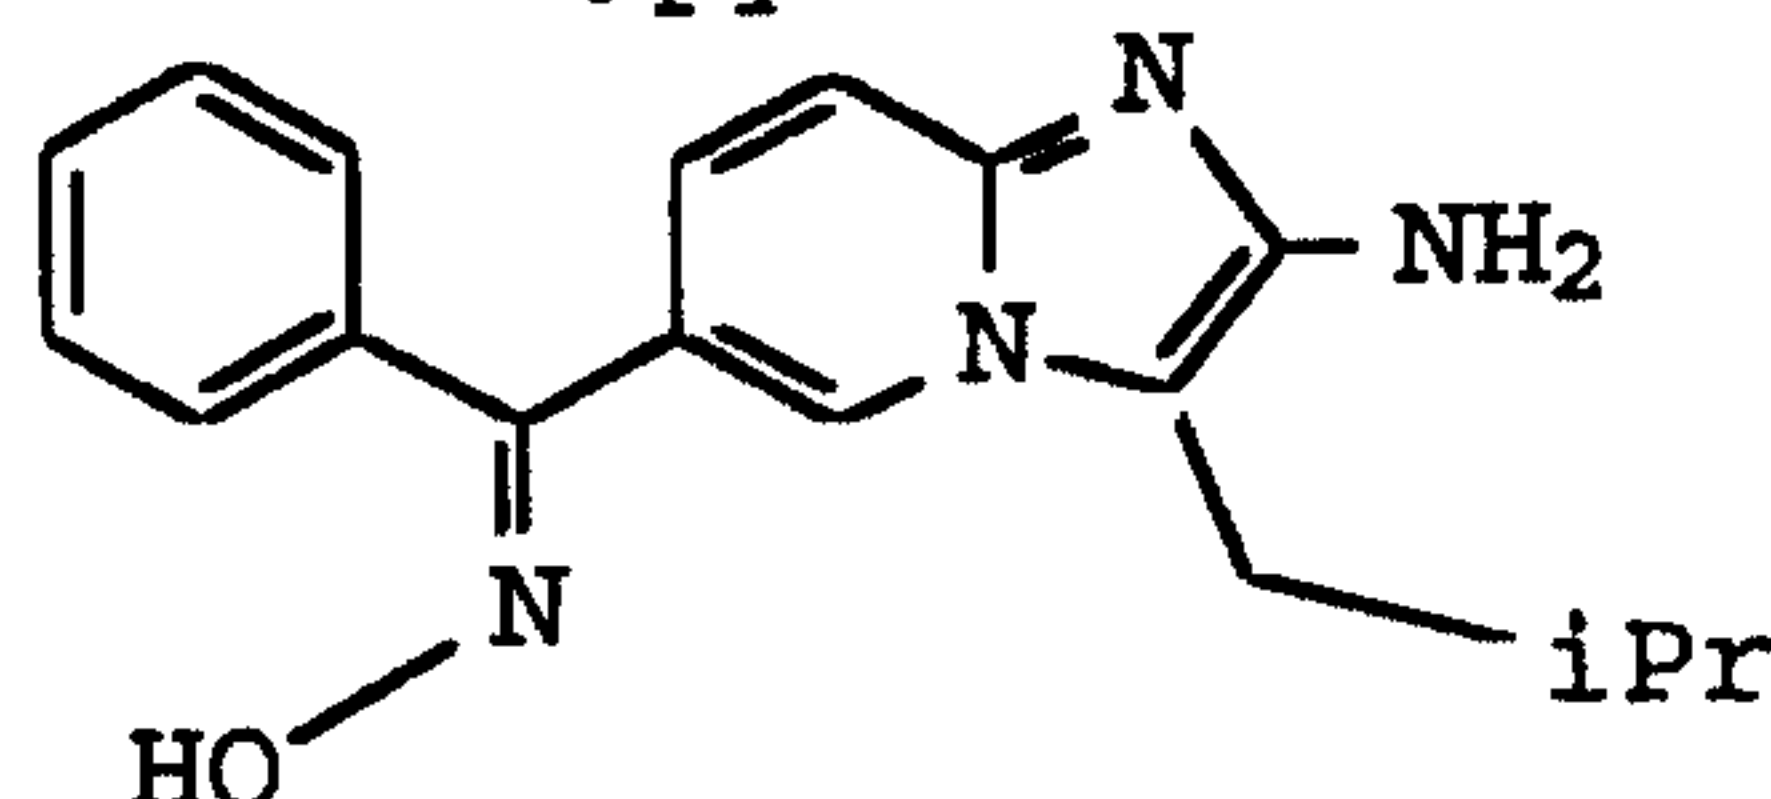


The 2-amino-3-isobutyl-6-benzoyl-imidazo[1,2-a]pyridine (820 mg, 2.80 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 120 mg of the E isomer product. (13.9%). EA, MS(FAB).

15

Example 130

2-Amino-3-(4-fluorophenyl)-6-[(E)-1-(4-fluorobenzyl)oxim- α -yl]-imidazo[1,2-a]pyridine

20

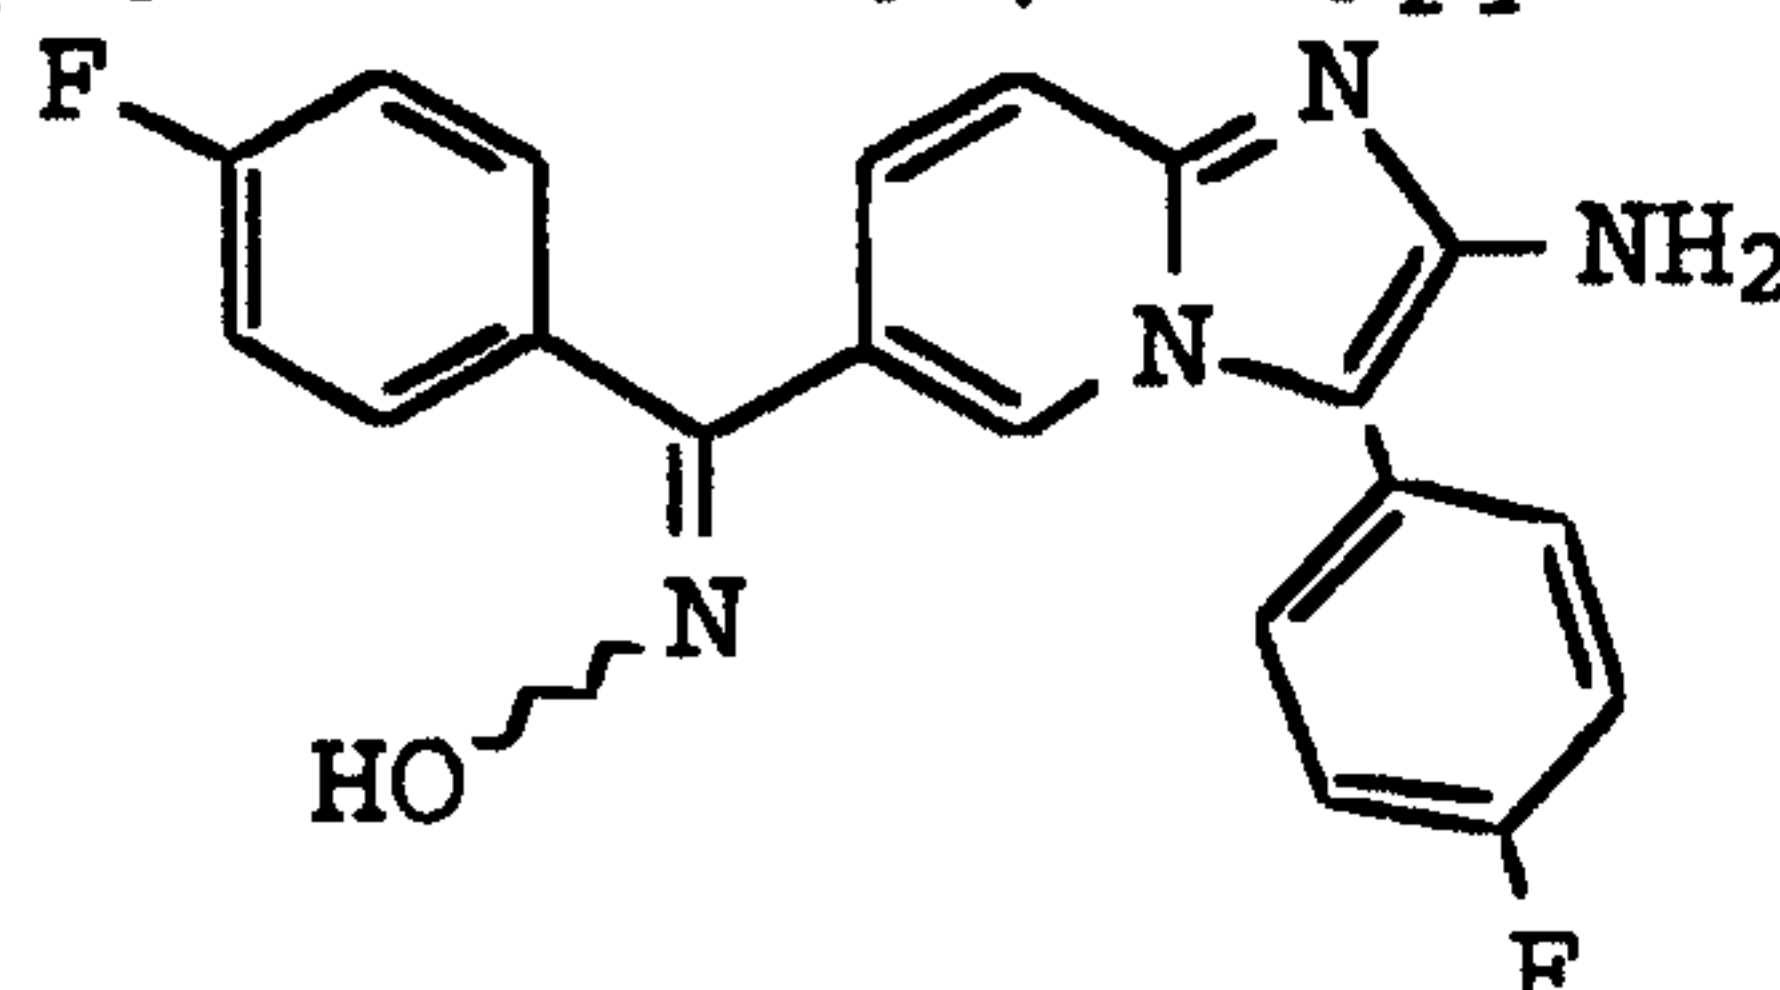


The 2-amino-3-(4-fluorophenyl)-6-(4-fluorobenzoyl)-imidazo[1,2-a]pyridine (2.00 g, 5.73 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 572 mg of E-product, (27.4%), EA, MS(FD), and 198 mg of Z-product. (9.47%). EA, MS(FD).

25

-114-

Example 131

2-Amino-3-(2-fluoro-4-trifluoromethylphenyl)-6-[(E)-1-(4-fluorobenzyl)oxim- α -yl]-imidazo[1,2-a]pyridine

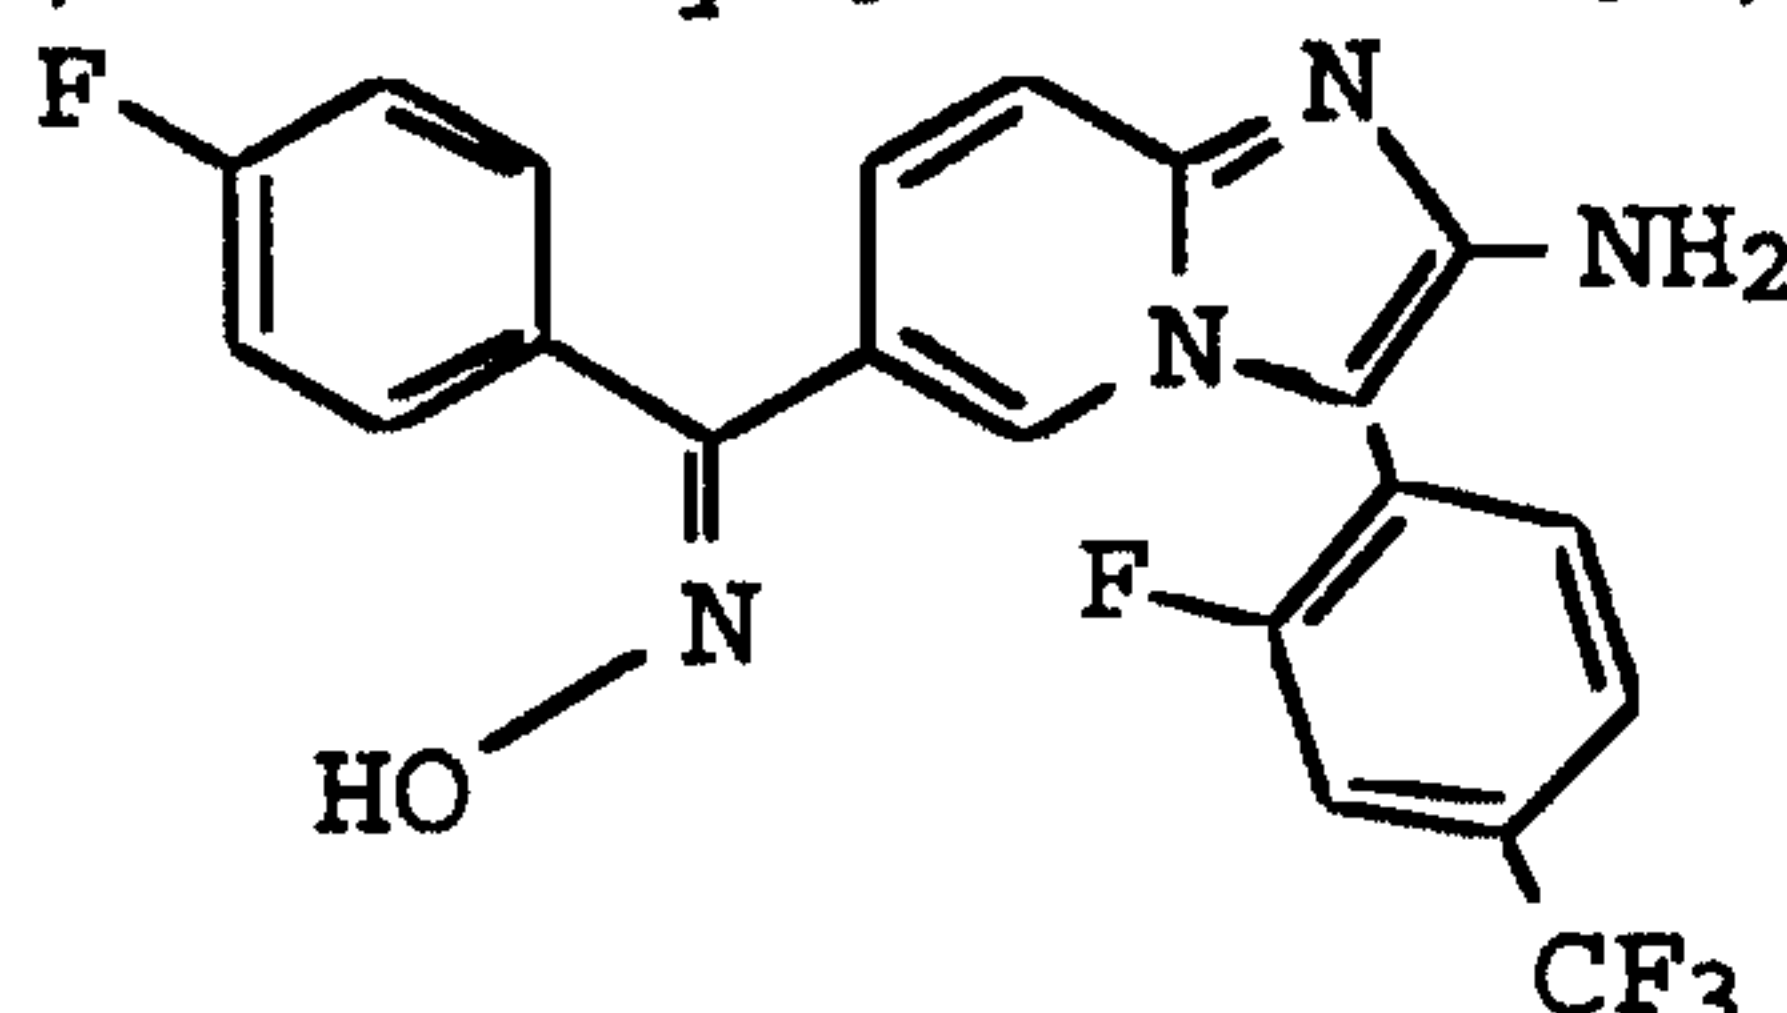


- 5 The 2-amino-3-(2-fluoro-4-trifluoromethylphenyl)-6-(4-fluorobenzoyl)-imidazo[1,2-a]pyridine (2.00 g, 4.80 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 310 mg of E-product. (15%). EA, MS(FD).

10

Example 132

2-Amino-3-phenyl-6-[(E)-phenylacetoxim- α -yl]-imidazo[1,2-a]pyridine

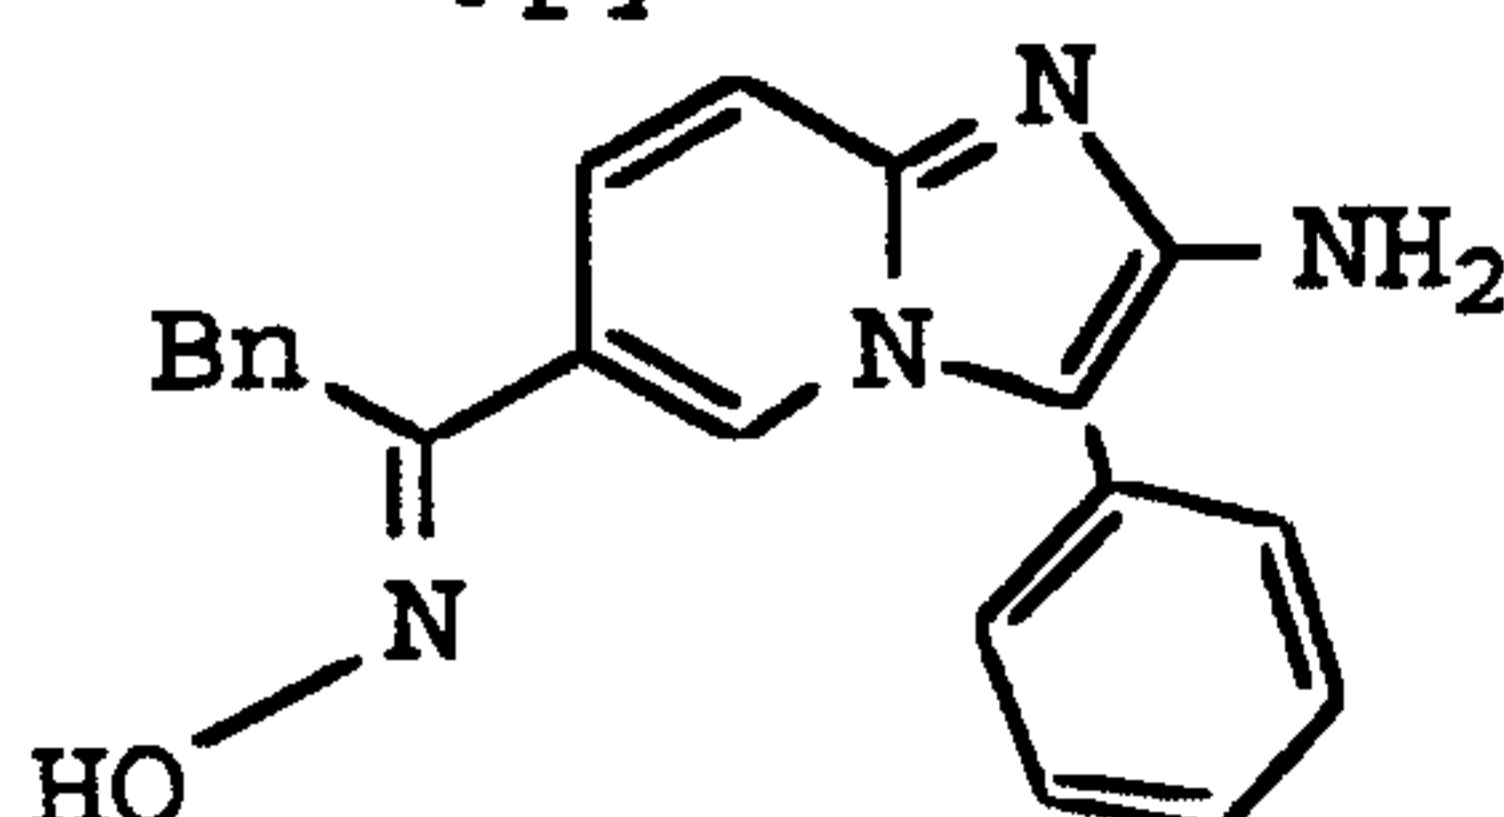


- 15 The 2-amino-3-phenyl-6-(α -phenylacetyl)-imidazo[1,2-a]pyridine (732 mg, 2.24 mmol) was converted to product in a manner substantially analogous to Example 97 to yield 485 mg of E-product. (63.3%). EA, MS(FD).

Example 133

2-Amino-3-phenyl-6-(picolinylloxim- α -yl)-imidazo[1,2-a]pyridine

20

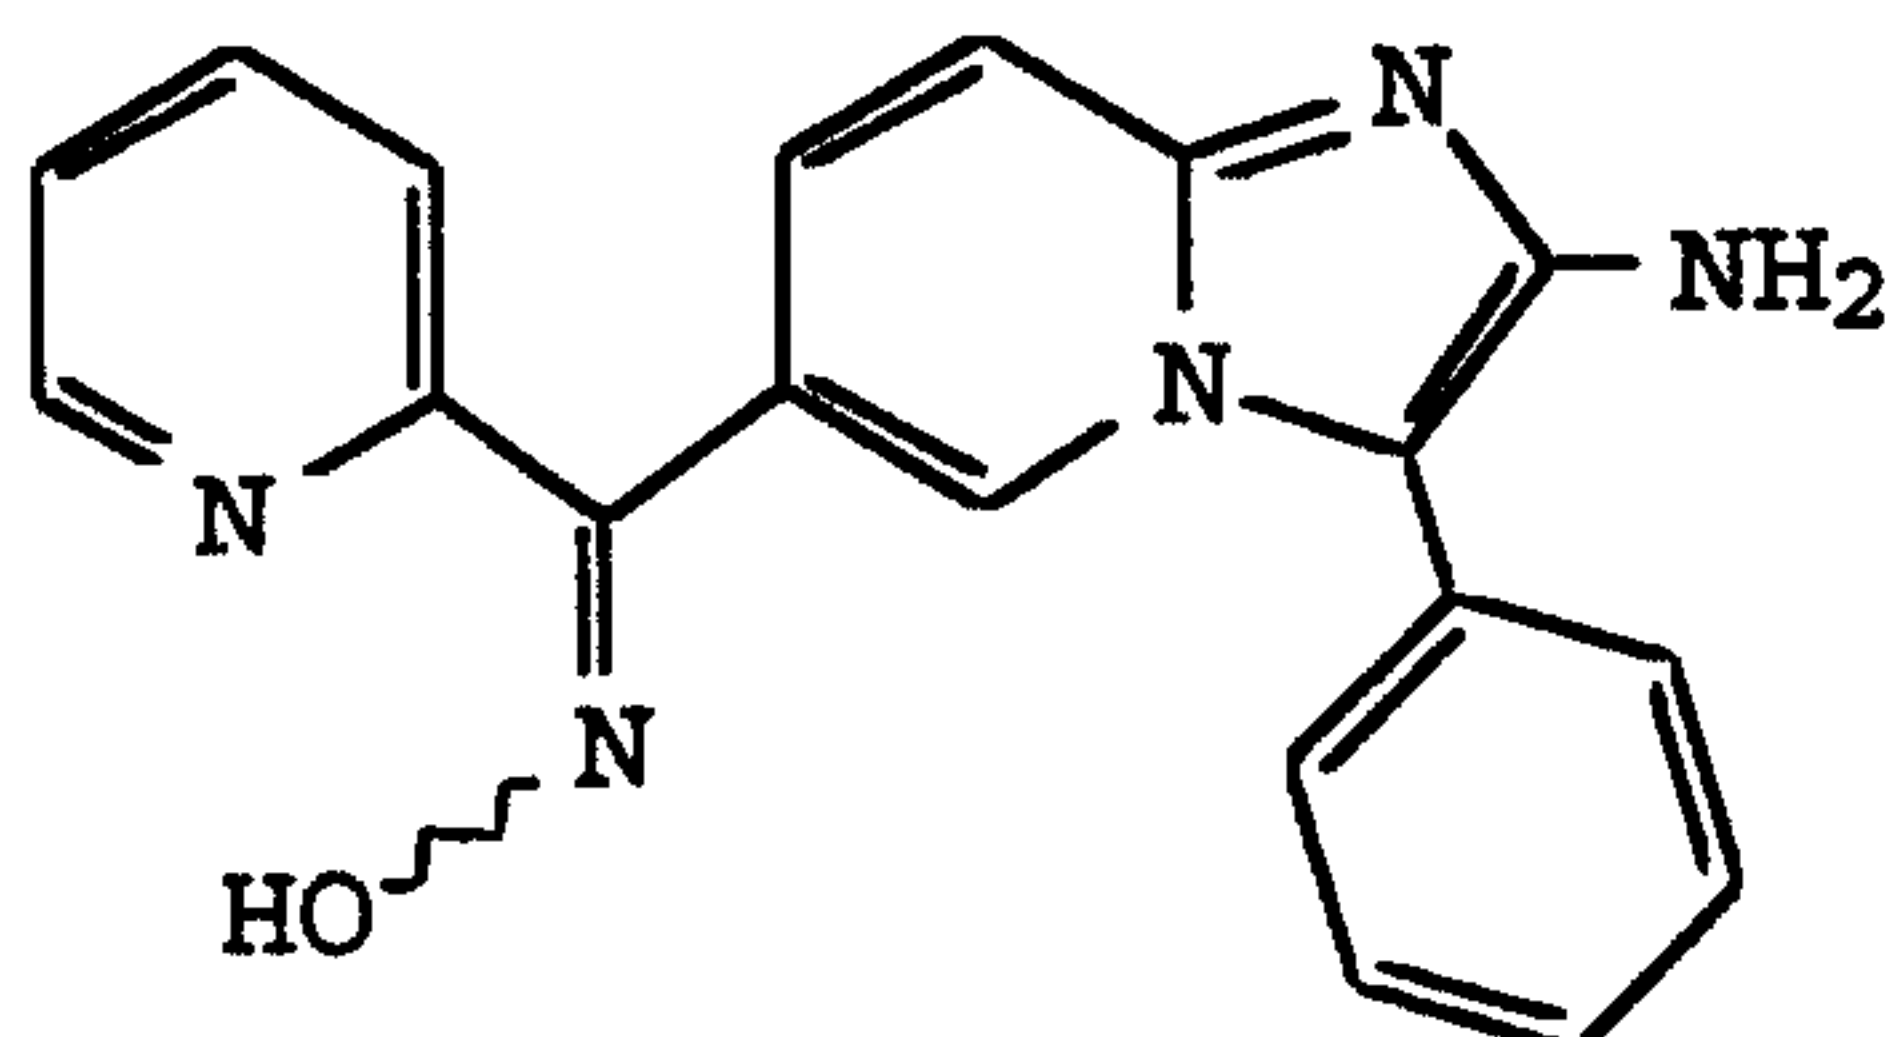


- 25 To a suspension of 2-amino-3-phenyl-6-(picolinoyl)-imidazo[1,2-a]pyridine (1.57 g, 5.00 mmol) in 100 ml of 80% aqueous EtOH was added hydroxylamine hydrochloride (4.17 g, 60.0 mmol) and NaOAc (4.92 g, 60.0 mmol). The

-115-

mixture was refluxed for 6 hours and then the solvent was removed in vacuo. The residue was partitioned between 900 ml of EtOAc and 100 ml of saturated NaHCO₃. The EtOAc was separated and washed with brine, dried over Na₂SO₄, filtered, and concentrated in vacuo. The residue was recrystallized from EtOAc to yield a mixture of both product isomers. The mixture was triturated with CH₂Cl₂ and the solids filtered. The filtrate was chromatographed (normal phase) to yield 75.8 mg of cis product. (4.6%). EA, MS(FD). The solids were recrystallized twice from MeOH to yield 134 mg of trans product. (8.1%). EA, MS(FD).

Example 134


2-Amino-3-phenyl-6-(nicotinyl)-imidazo[1,2-a]pyridine

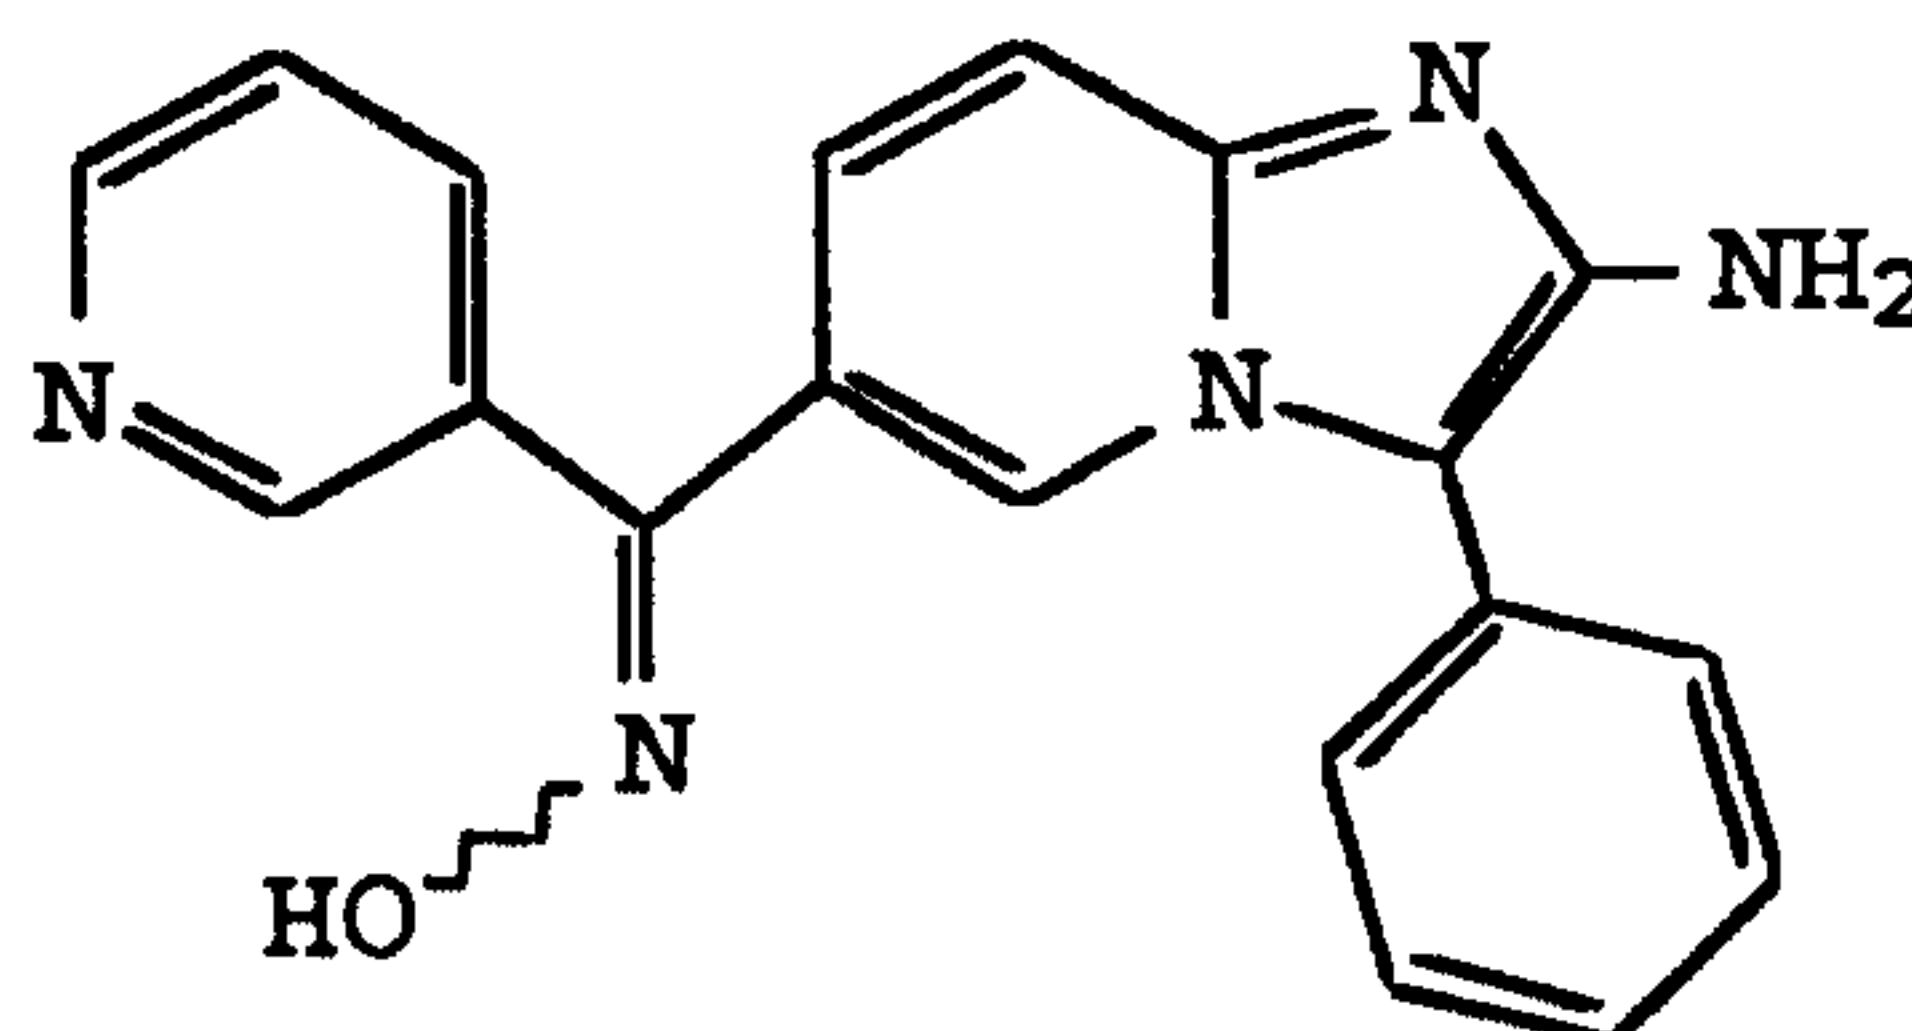

The 2-amino-3-phenyl-6-(nicotinoyl)-imidazo[1,2-a]pyridine (1.18 g, 3.75 mmol) was converted to product in a manner substantially analogous to Example 78 to yield 127 mg of cis product, (10.3%), MS(FD), NMR, and 20.5 mg of 80% trans product. (1.3% corrected). MS(FD), NMR.

Example 135

2-Amino-3-phenyl-6-(cis-isonicotinyloxim- α -yl)-imidazo[1,2-a]pyridine

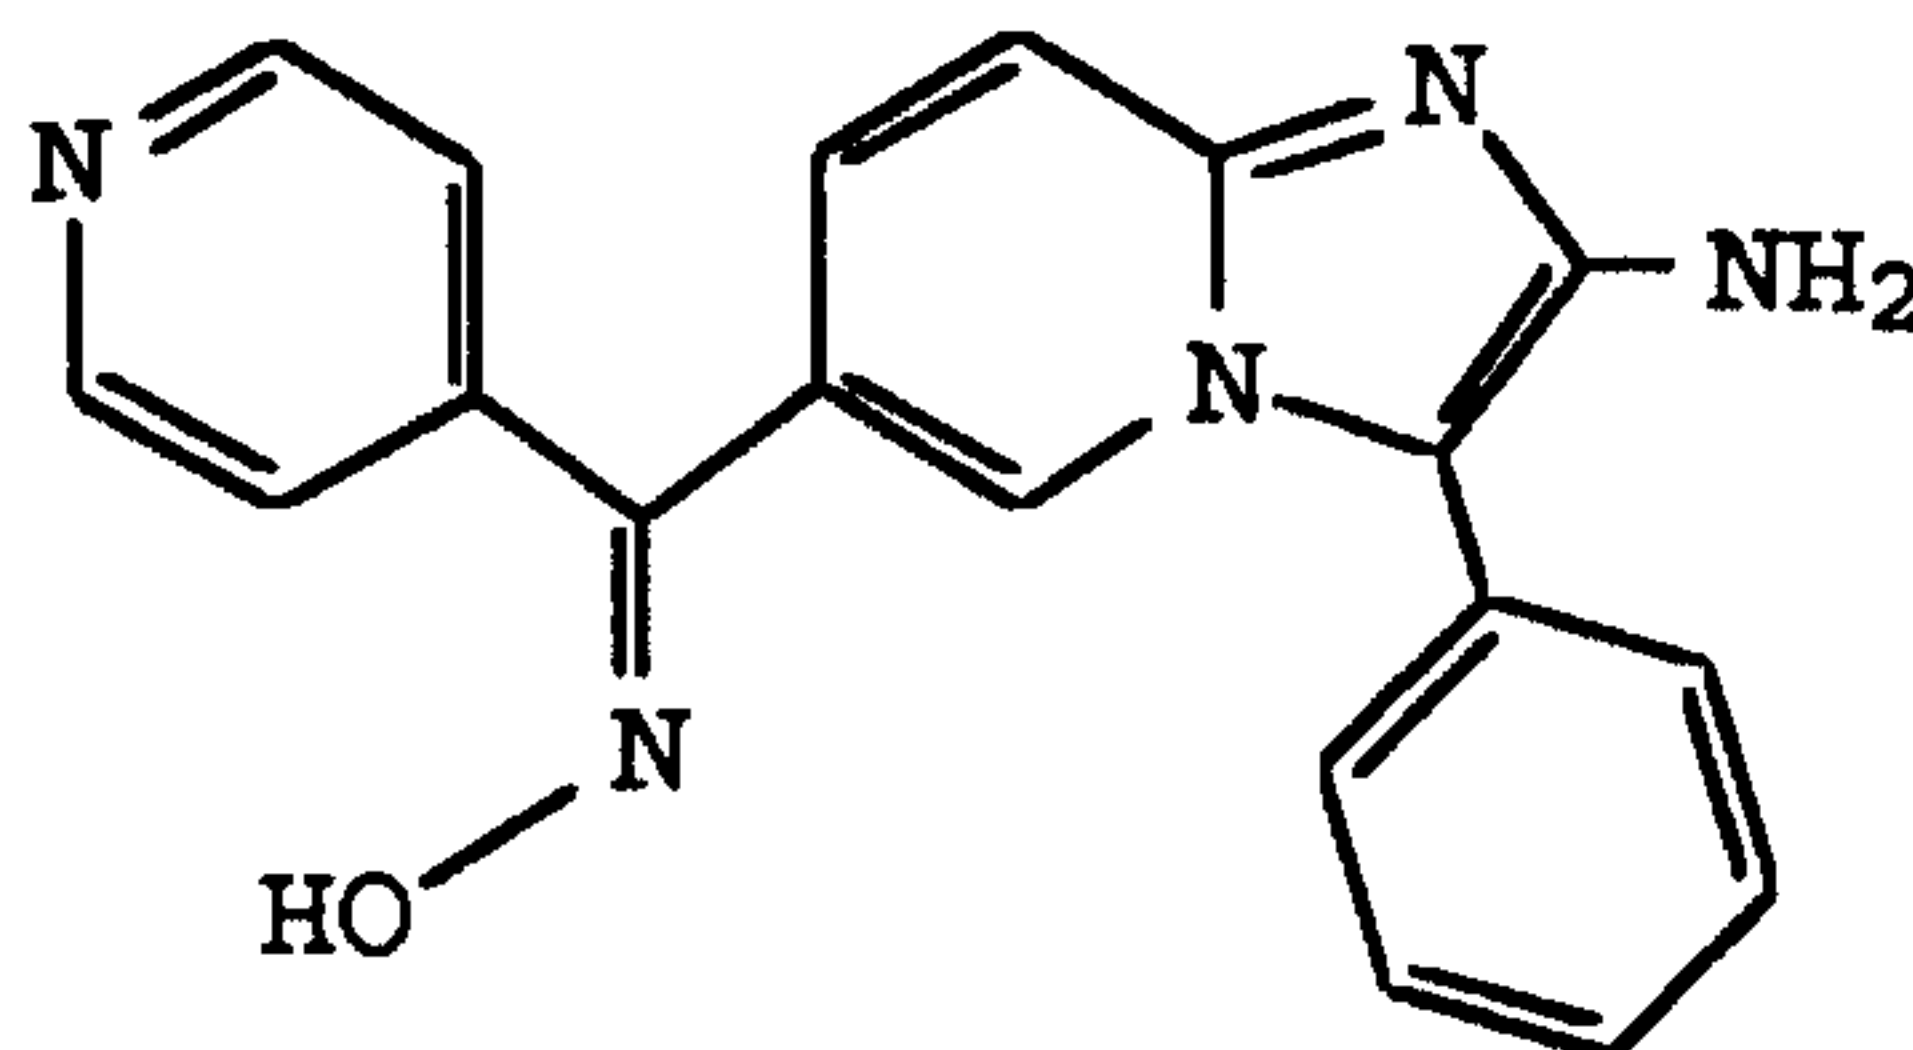


The 2-amino-3-phenyl-6-(isonicotinoyl)-imidazo[1,2-a]pyridine (1.57 g, 5.00 mmol) was converted to product

-116-

in a manner substantially analogous to Example 78 to yield 466 mg of cis, (28.3%), EA, MS(FD), NMR, and 230 mg of trans. (14%). EA, MS(FD).

Example 136


5 2-Amino-3-phenyl-6-(1-phenyl-2-cyanovinyl)-imidazo[1,2-a]pyridine

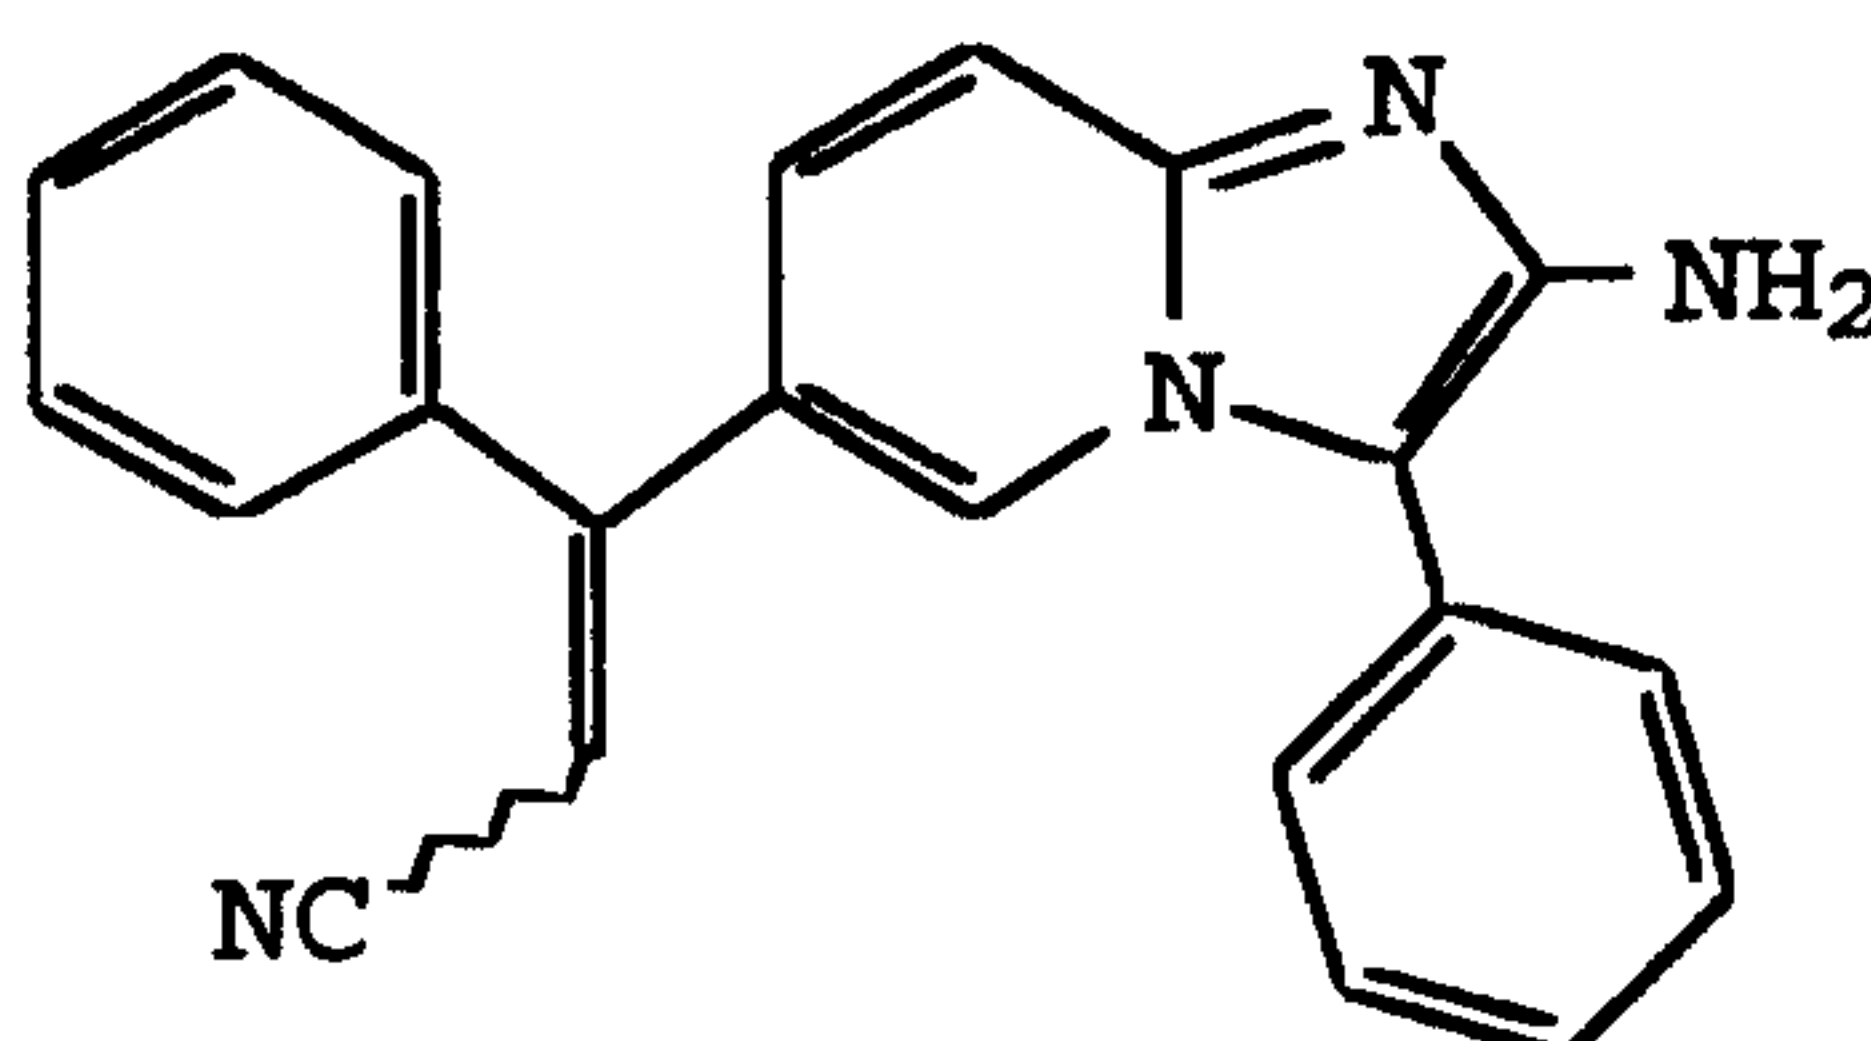

The 2-amino-3-phenyl-6-benzoyl-imidazo[1,2-a]pyridine (1.57 g, 5.00 mmol) was dissolved in 30 ml of THF and diethylcyanophosphonate (1.63 g, 10.0 mmol) followed by potassium bistrimethylsilylamide (0.5 M in toluene, 5 ml, 10 mmol) were added. The reaction was allowed to stir for 5 days. The THF was removed *in vacuo* and the residue dissolved in 500 ml of EtOAc. The EtOAc was washed with 50 ml of H₂O, brine (2 x 50 ml), dried over NaSO₄, and then concentrated *in vacuo*. The residue was purified by normal phase flash chromatography (EtOAc) to yield 250 mg of product which was recrystallized from EtOAc to yield 98 mg of Z-product, (5.82%), EA, MS(FD), and 128 mg of E-product. (7.60%). EA, MS(FD).

Example 137

2-Amino-3-isobutyl-6-(1-phenyl-2-cyanovinyl)-imidazo[1,2-a]pyridine

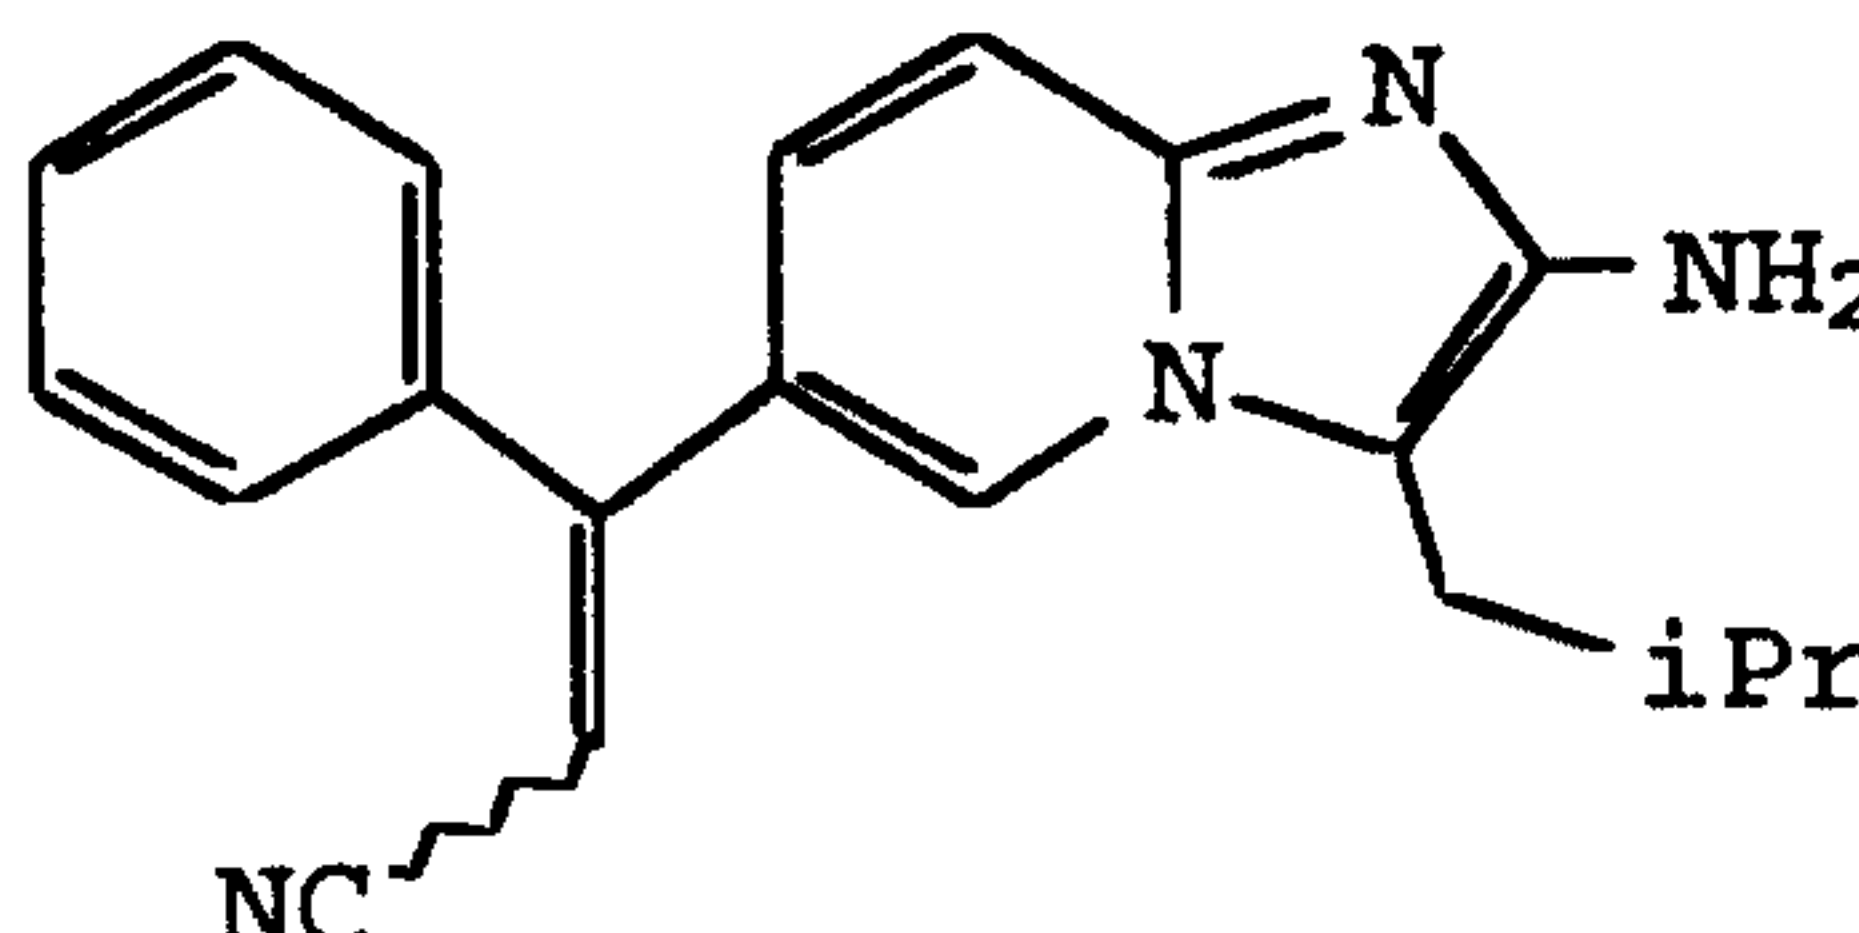


25 The 2-amino-3-isobutyl-6-benzoyl-imidazo[1,2-a]pyridine (1.46 g, 5.00 mmol) was converted to product in a manner substantially analogous to Example 136 to yield 200 mg of Z-product, (12.7%), MS(FD), NMR, and 130 mg of E-product. (8.23%). EA, MS(FD).

-117-

Example 138

2-Amino-3-methylthio-6-benzoyl-imidazo[1,2-a]pyridine

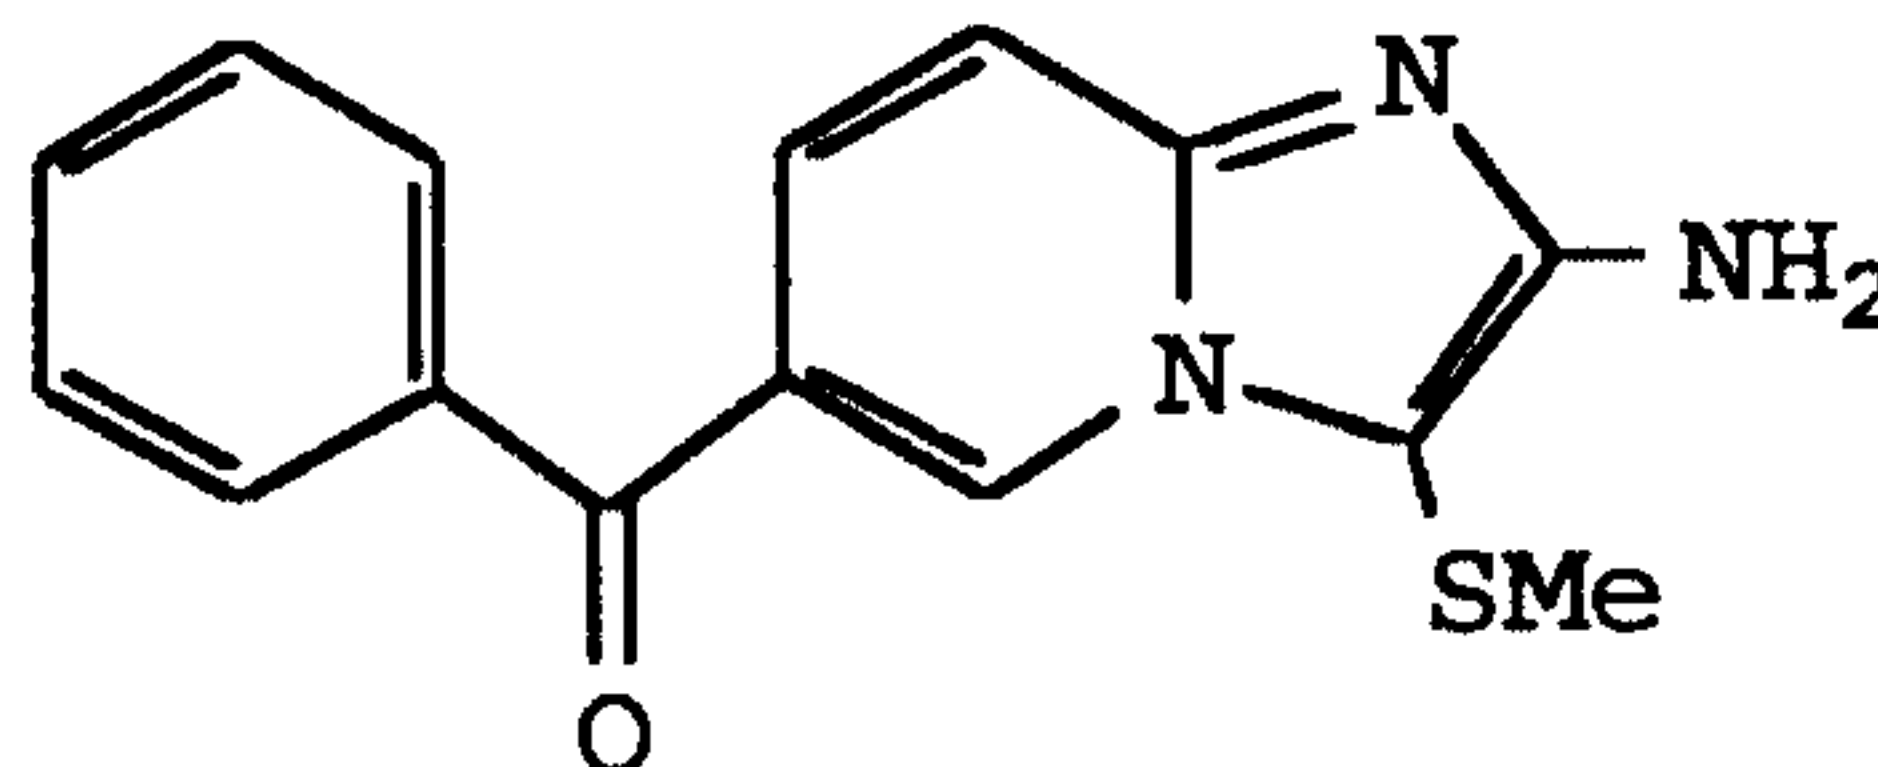


The 2-trifluoroacetamido-3-methylthio-6-benzoyl-imidazo[1,2-a]pyridine (100 mg, 263 mmol) was dissolved in 20 mL of a mixture of MeOH/CH₂Cl₂ 1:1, and 5 g of silica gel was added. The mixture was stirred at RT for 2 days. The residue was filtered and washed with CH₂Cl₂ and the solution was concentrated *in vacuo* to give 63 mg (85%) of a yellow solid. ¹H-NMR (200 MHz, CDCl₃) δ 2.12 (s, 3H, SMe), 4.40 (bs, 2H, NH₂), 7.46-7.80 (m, 7H, ArH + H₇ + H₈), 8.68 (d, *J*₅₇ = 1.7, H₅). ¹³C-NMR (50 MHz, CDCl₃) δ 18.0 (SMe), 95.0, 122.7, 125.8, 127.7, 128.5, 129.6, 132.6, 137.4, 145.3, 156.1, 193.5.

15

Example 139


2-Amino-3-methylsulfonyl-6-benzoyl-imidazo[1,2-a]pyridine

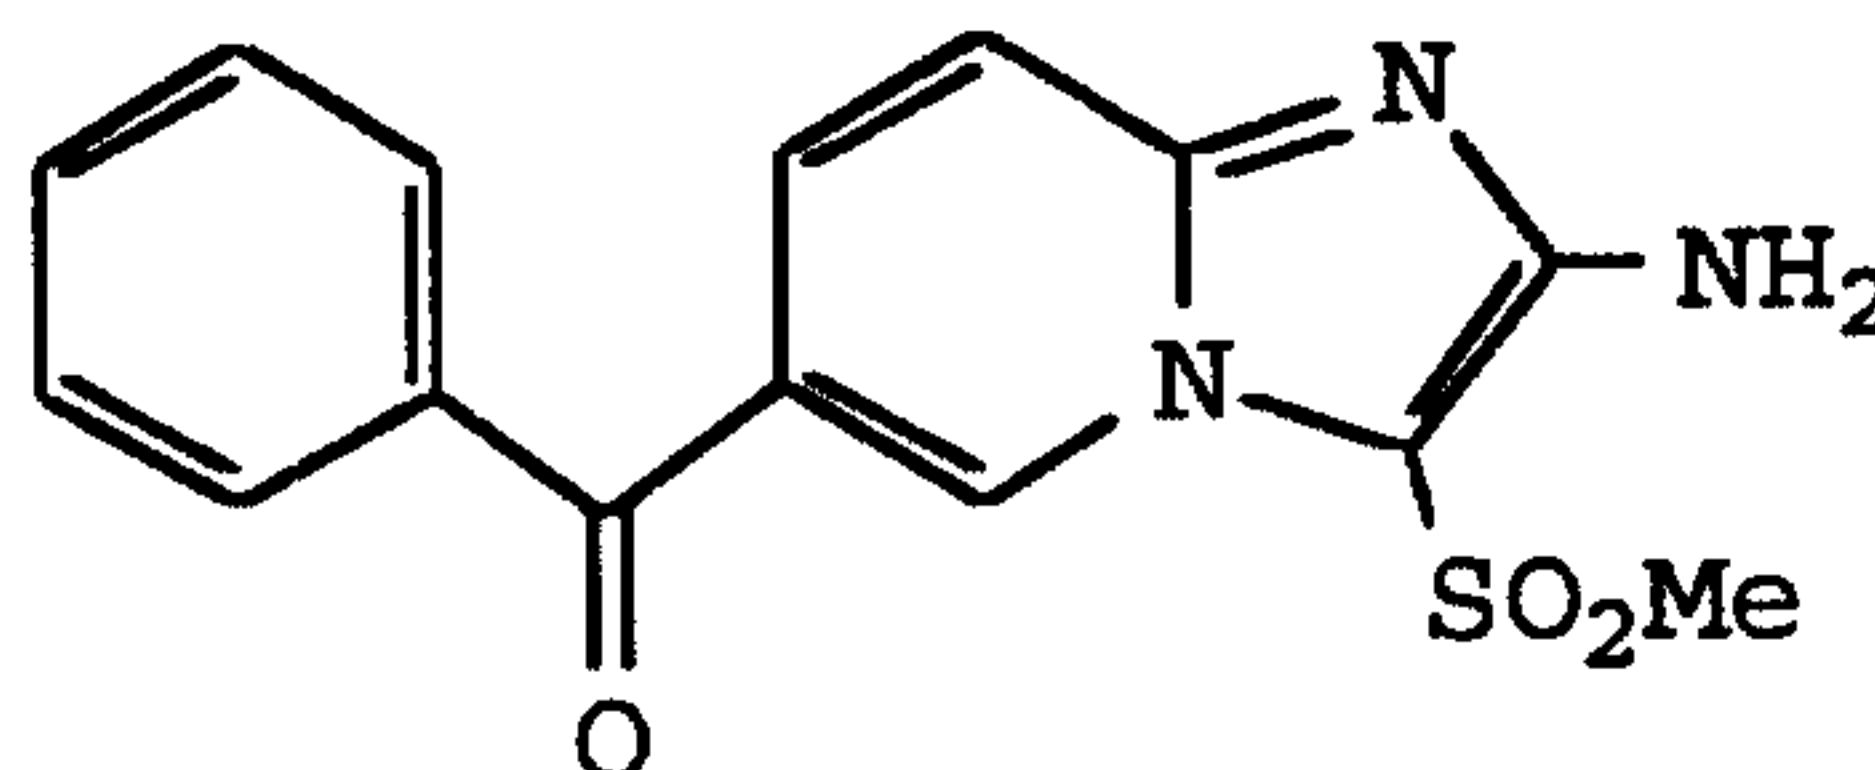

The 2-trifluoroacetamido-3-methylsulfonyl-6-benzoyl-imidazo[1,2-a]pyridine (160 mg, 0.438 mmol) was converted to product in a manner substantially analogous to Example 138 to give 92 mg. (78%). ¹H-NMR (200 MHz, CDCl₃) δ 3.06 (s, 3H, SO₂Me), 4.82 (bs, 2H, NH₂), 7.53-7.82 (m, 6H, ArH + H₇ + H₈), 8.78 (d, *J*₅₇ = 1.6, H₅).

Example 140

25 2-Amino-3-isopropylthio-6-benzoyl-imidazo[1,2-a]pyridine

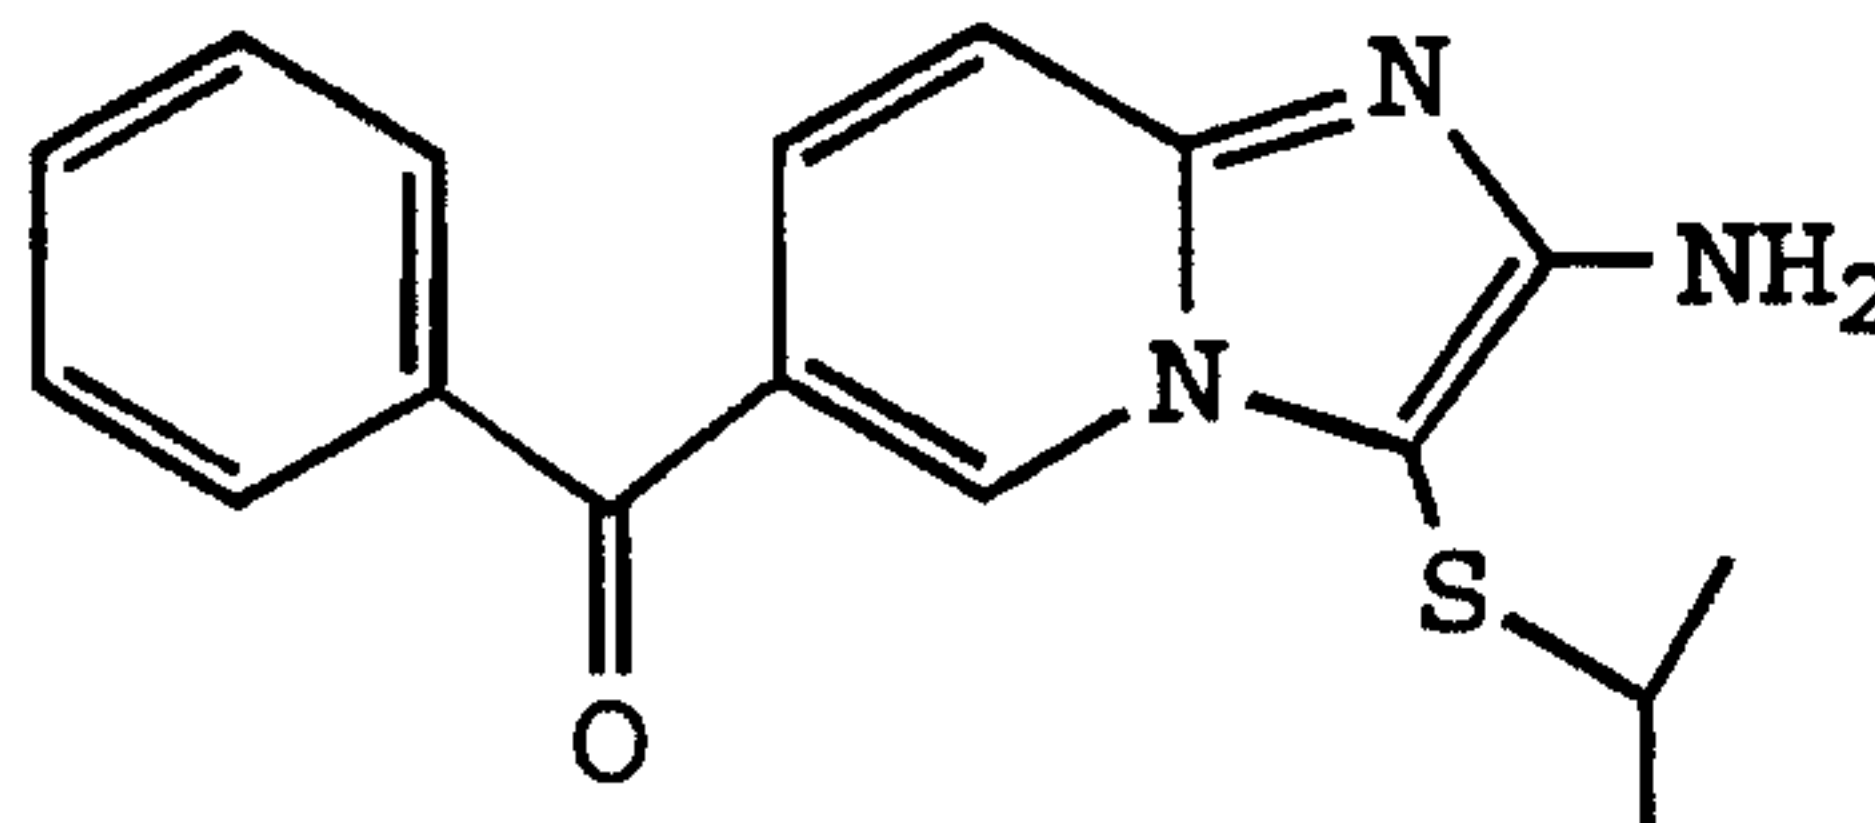


The 2-trifluoroacetamido-3-isopropylsulfonyl-6-benzoyl-imidazo[1,2-a]pyridine (16 mg, 0.0393 mmol) was

-118-

converted to product in a manner substantially analogous to Example 138 to give 11 mg. (88%). EIMS m/z 311 M^+ (28), 268 (100), 224 (27), 105 (41), 77 (29), ^1H -NMR ($CDCl_3$) δ 8.75 (s, 1H, H_5), 7.79-7.47 (m, 7H, Ar), 4.62 (broad s, 2H, NH_2), 3.09 (hept., 1H, $J = 6.4$ Hz, $CH(CH_3)_2$), 1.22 (d, 6H, $J = 6.7$ Hz, $(CH_3)_2-CH$), ^{13}C -NMR ($CDCl_3$) δ 199.3, 157.1, 145.2, 137.3, 132.6, 129.5, 128.4, 127.9, 126.0, 122.8, 113.6, 40.8, 23.4.

Example 141

10 2-Amino-3-phenyl-6-(2-fluorobenzoyl)-imidazo[1,2-a]pyridine

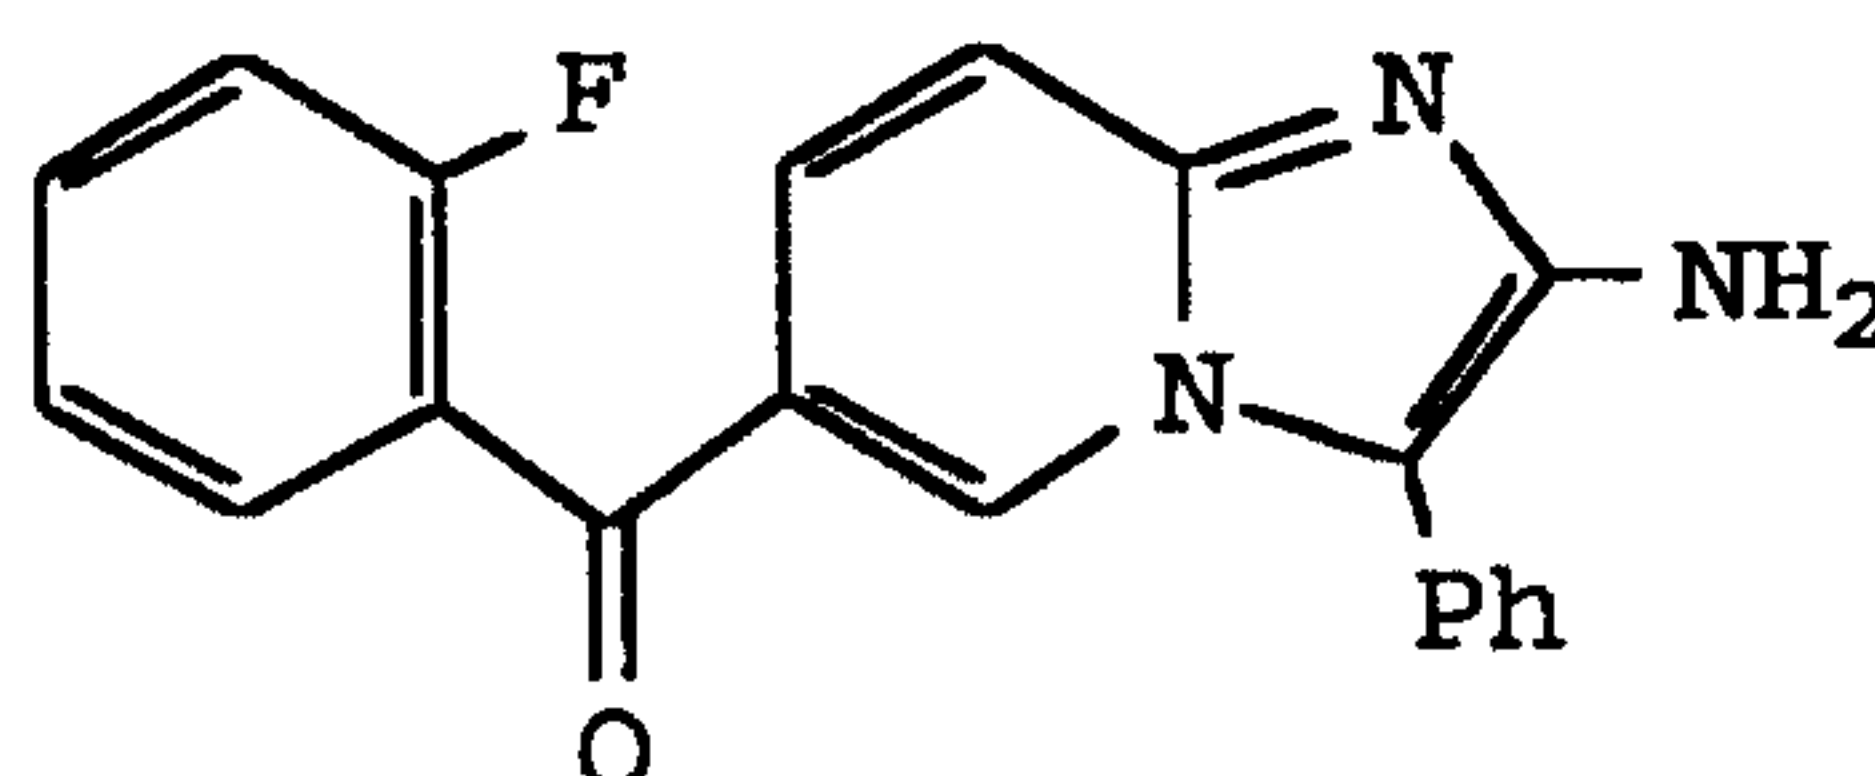


To a solution of 1-bromo-2-fluorobenzene (191 mL, 1.75mmol) in dry THF (2 mL) under an argon atmosphere was added t-butyl lithium dropwise. After stirring for 50 minutes at $-78^\circ C$, a solution of 2-amino-3-phenyl-6-(N-methyl-N-methoxycarbamoyl)imidazo[1,2-a]pyridine (148 mg, 0.5 mmol) in dry THF (3 mL) was added. The resulting red-orange solution was stirred at the same temperature for another 50 minutes and then allowed to warm to RT. The solution was poured into H_2O (20 mL) and extracted with EtOAc (2 x 20 mL). The organic layer was washed with H_2O , dried (Na_2SO_4), and removed *in vacuo* to give a brown solid. The crude solid was purified by column chromatography (CH_2Cl_2/CH_3CN 2.5/1) to give 84.0 mg (50.6%) of product as a yellow solid. MS(FAB) m/z 332.2 ($M^+ + 1$, 51.99), NMR (200 MHz, $CDCl_3$) δ 4.27 (bs, 2H, NH), 7.12 -7.58 (m, 11H, $ArH + H_7 + H_8$), 8.71 (s, H_5).

Example 142

30 2-Amino-3-phenyl-6-(3-fluorobenzoyl)-imidazo[1,2-a]pyridine


-119-

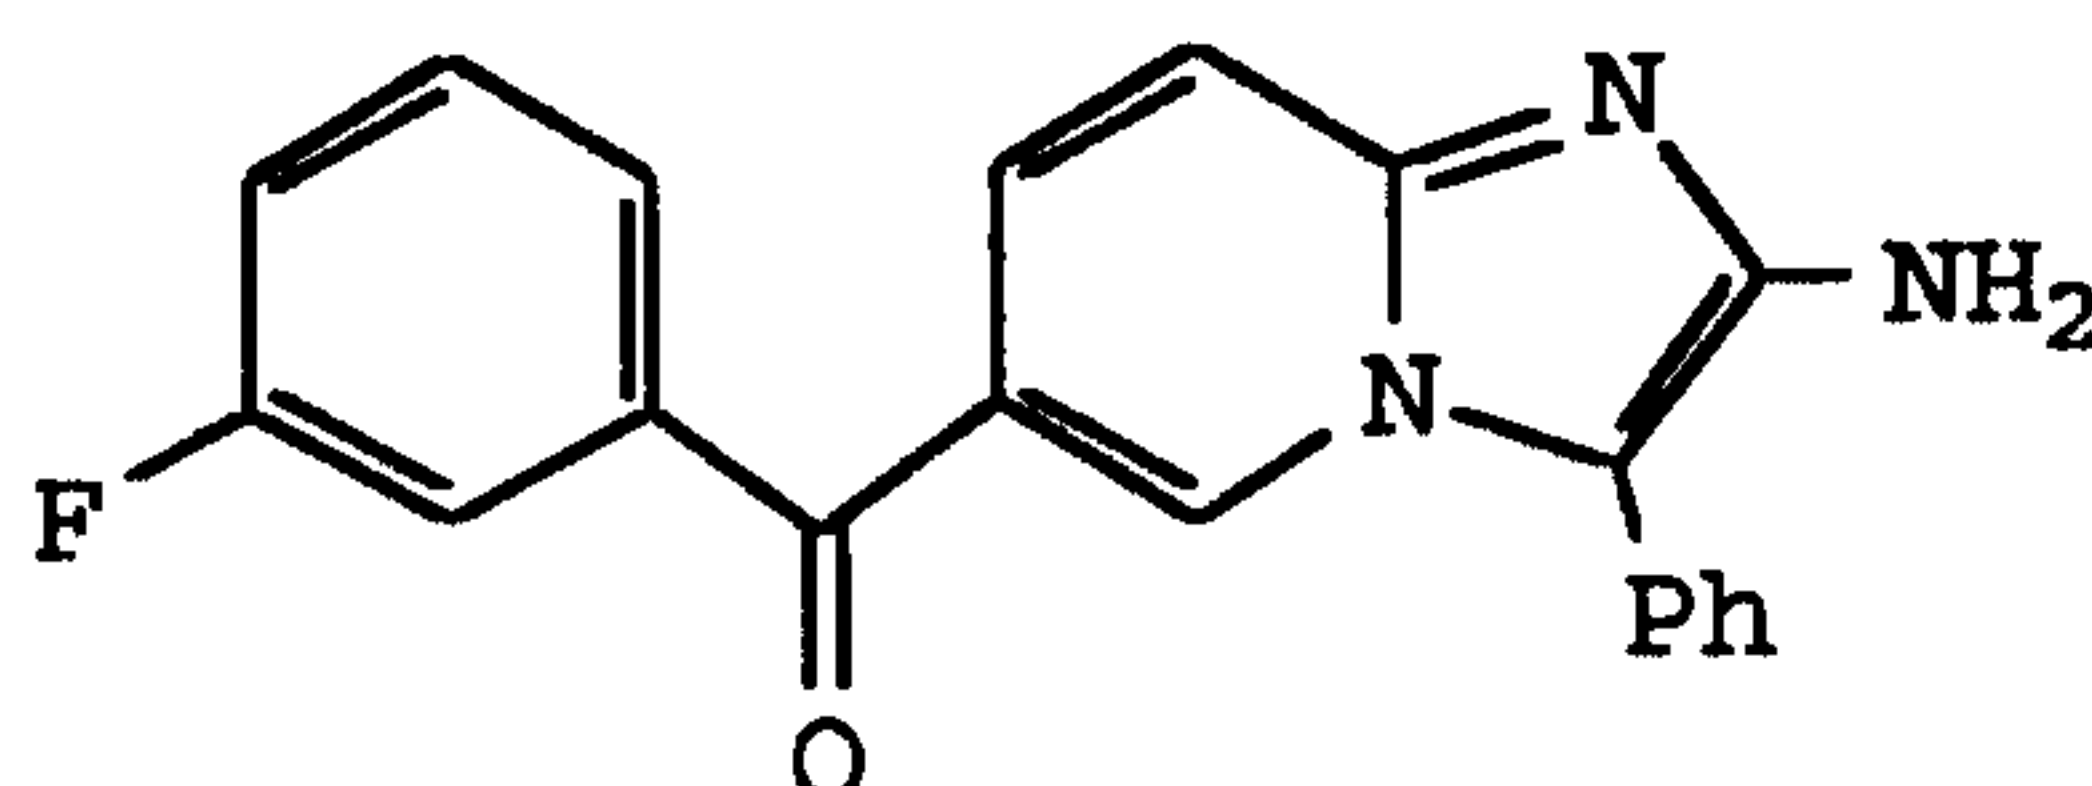

The 2-amino-3-phenyl-6-(N-methyl-N-methoxycarbamoyl)imidazo[1,2-a]pyridine (148 mg, 0.500 mmol) and 1-bromo-3-fluorobenzene were converted to product in a manner substantially analogous to Example 141 to give 37 mg. (37%). MS(FAB⁺) m/z 332.2 (M⁺ + 1, 86.6), NMR (200 MHz, CDCl₃) δ 4.22 (bs, 2H, NH), 7.21 - 7.55 (m, 11H, ArH + H₇ + H₈), 8.69 (d, J₅₇ = 1.1, H₅).

Example 143


10 2-Amino-3-phenyl-6-(4-fluorobenzoyl)-imidazo[1,2-a]pyridine

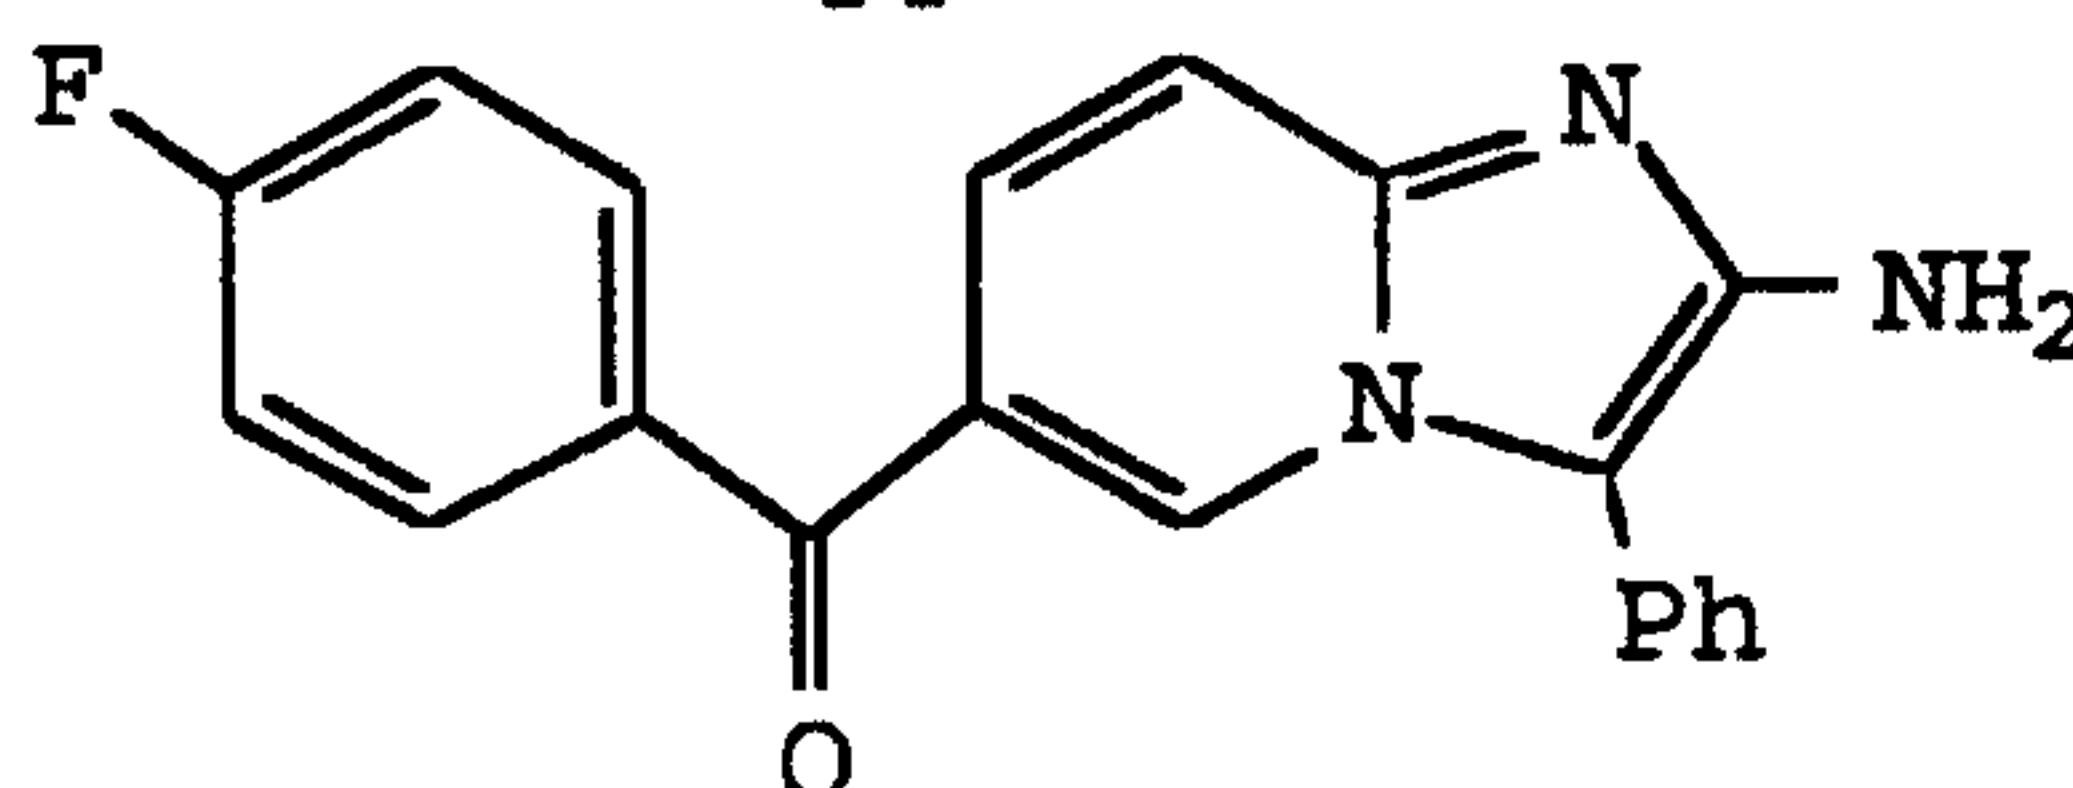

The 2-amino-3-phenyl-6-(N-methyl-N-methoxycarbamoyl)imidazo[1,2-a]pyridine (584 mg, 1.97 mmol) and 1-bromo-4-fluorobenzene were converted to product in a manner substantially analogous to Example 141 to yield 205 mg. (52%). NMR (200 MHz, CDCl₃) δ 4.31 (bs, 2H, NH), 7.15 (m, 2H, F-ArH), 7.25-7.56 (m, 7H, ArH + H₇ + H₈), 7.78 (m, 2H, F-ArH), 8.69 (s, H₅).

Example 144

2-Amino-3-phenyl-6-(2,3-difluorobenzoyl)-imidazo[1,2-a]pyridine

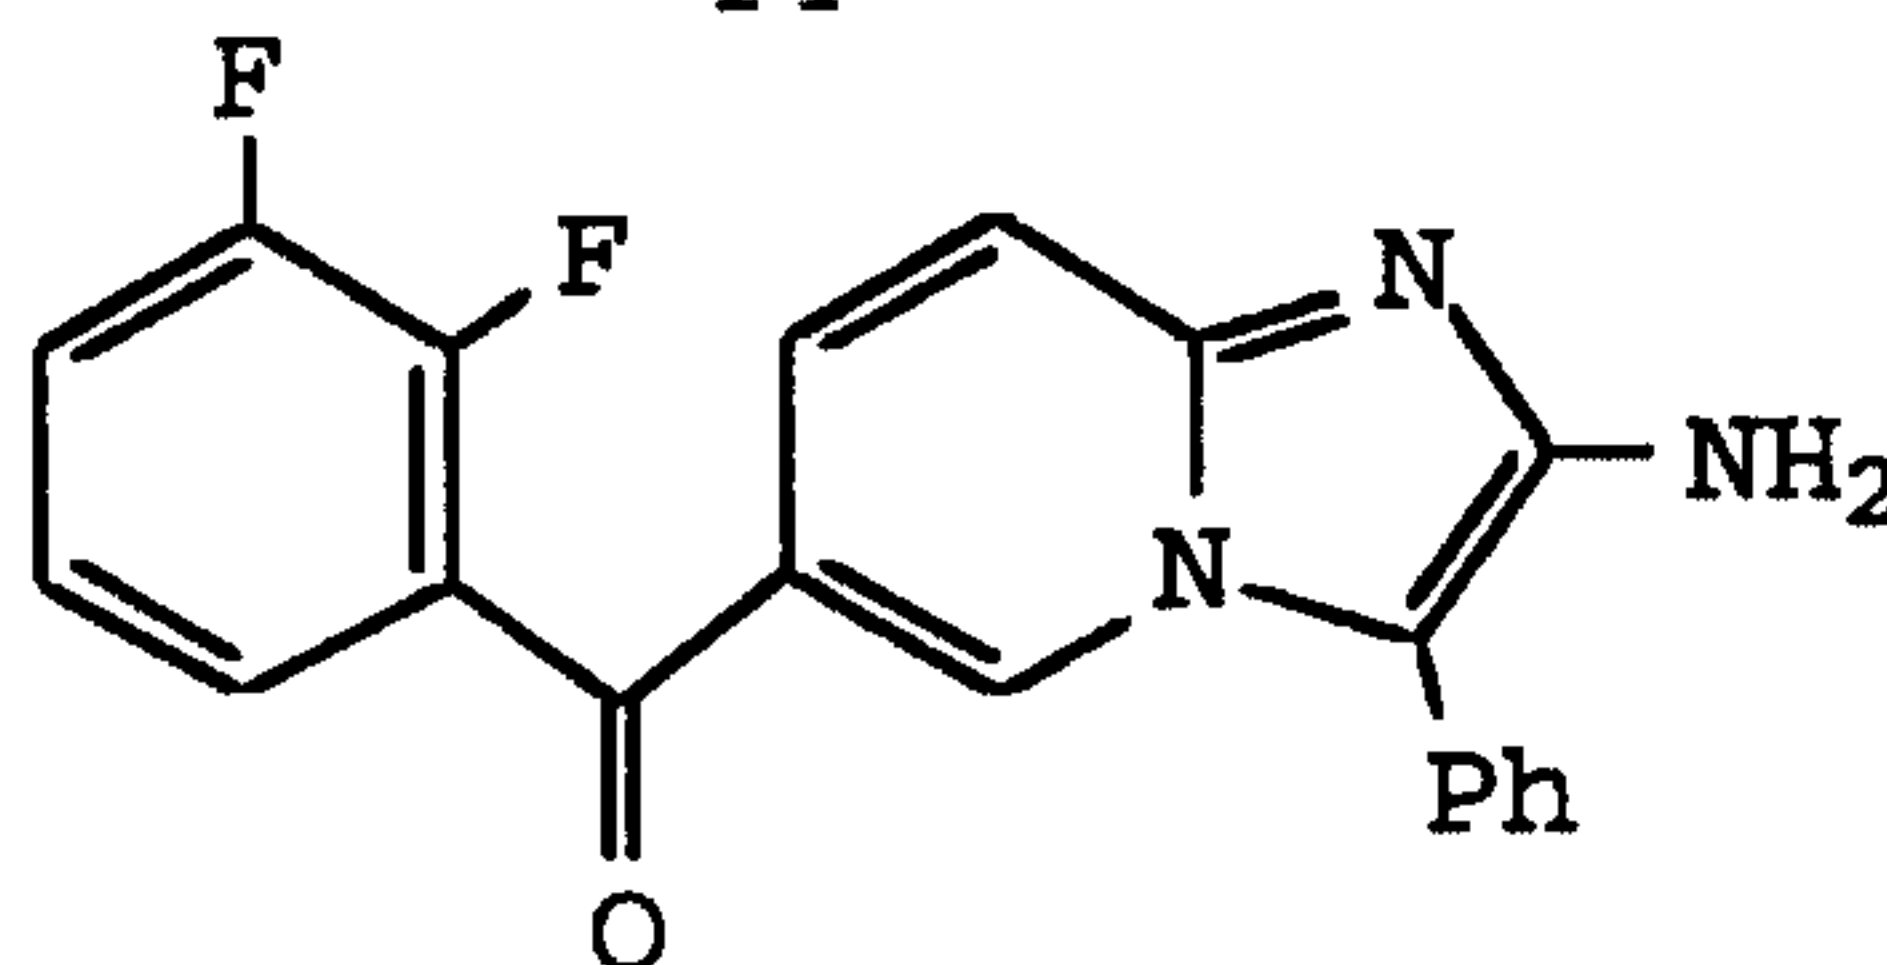

25 To a solution of 2,3-difluorobromobenzene (0.945 g, 8.44 mmol) in dry THF (20 mL), was added n-butyl lithium (1.6M in hexanes, 5.27 mL) at -78°C. The resulting


-120-

yellow solution was stirred at the same temperature for 70 minutes, then a solution of 2-amino-3-phenyl-6-(N-methyl-N-methoxycarbamoyl)imidazo[1,2-a]pyridine (500 mg, 1.69 mmol) in dry THF (20 mL), under argon, was added dropwise via a cannula. The resulting orange solution was allowed to warm very slowly to RT during a 2.5 hour period. Saturated NH₄Cl was added, and the mixture was stirred for 25 minutes then extracted with EtOAc. The organic layer was washed with brine, and dried (Na₂SO₄).

The solvents were evaporated and the residue was purified by column chromatography (CH₂Cl₂/CH₃CN, 4/1) to give 440 mg (74.7%) of product as a yellow solid. MS(FAB) *m/z* 350.1 (*M*⁺ + 1, 100.0), NMR (200 MHz, DMSO *d*₆) δ 5.71 (bs, 2H, NH), 7.27-7.70 (m, 11H, F-ArH + ArH + H₇ + H₈), 8.58 (dd, *J*₅₇ = 1.8, *J*₅₈ = 0.9, H₅).

Example 145

2-Amino-3-methylthio-6-(1-phenyl-2-cyanovinyl)-imidazo[1,2-a]pyridine

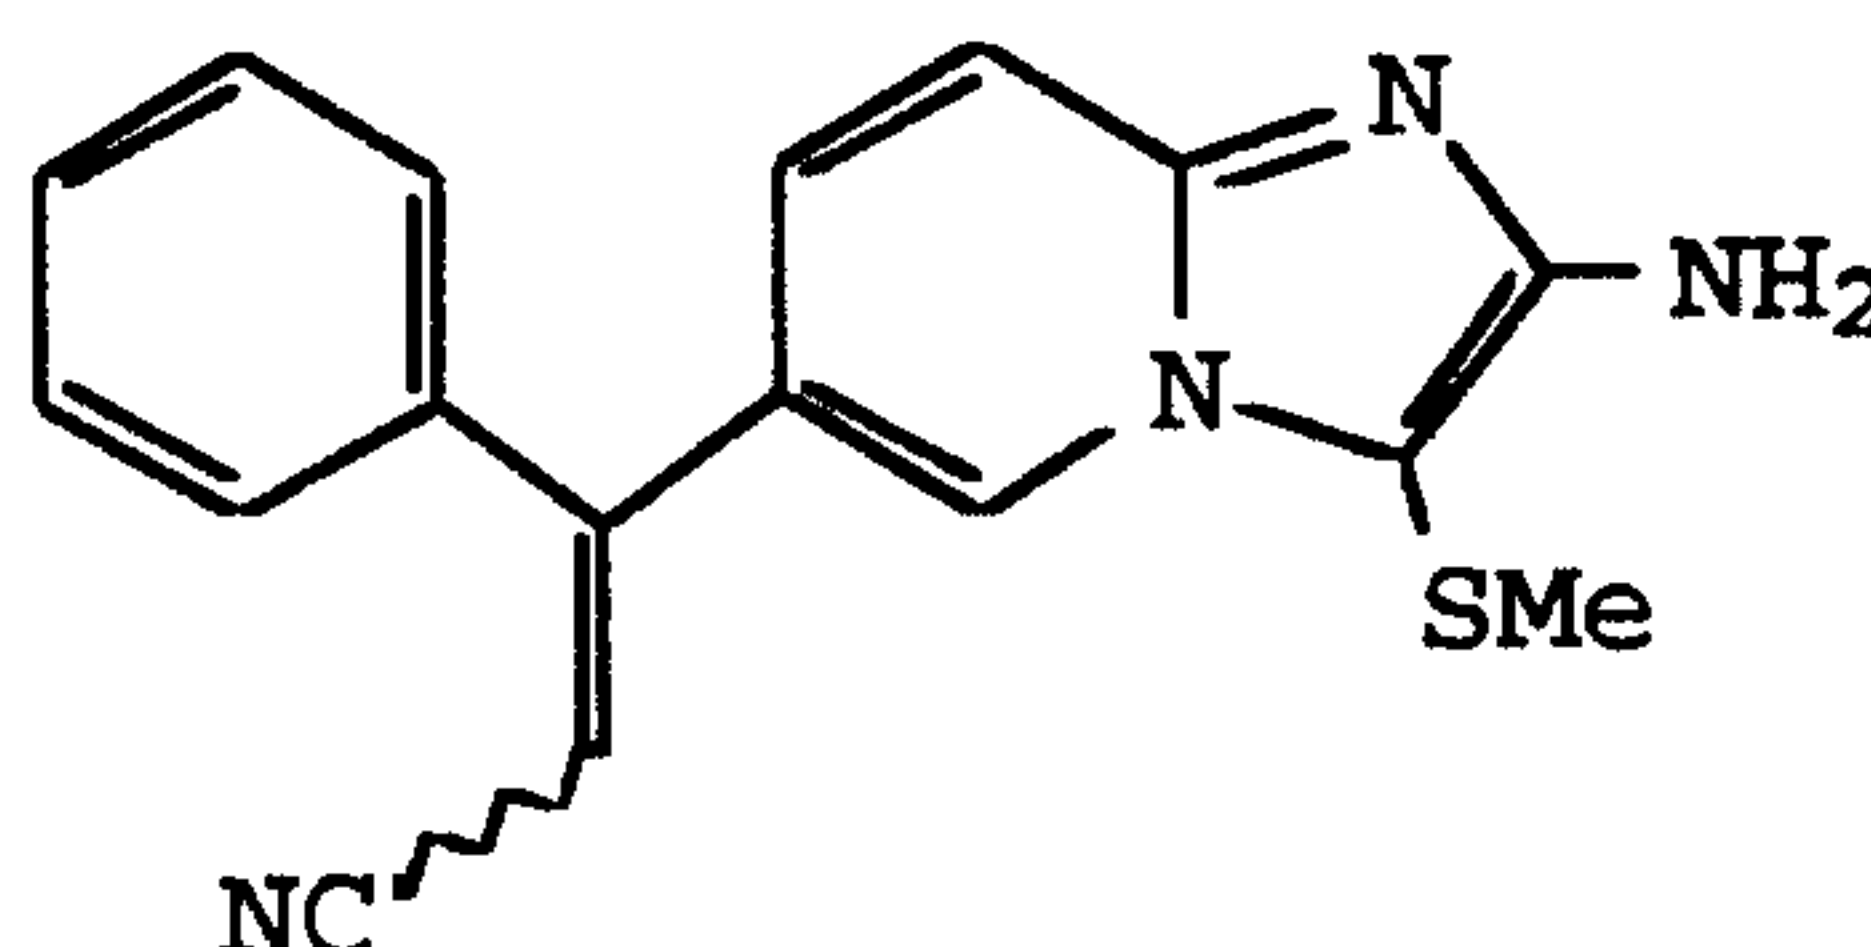

To a solution of 2-amino-3-methylthio-6-benzoyl-imidazo[1,2-a]pyridine (40 mg, 0.14 mmol) in 4 mL of dry THF was added diethyl phosphononitrile (265 mg, 1.5 mmol) dropwise at -78°C. An orange solid formed. Two ml of THF was added and the reaction mixture was stirred for 2 hours at -78°C. The reaction mixture was allowed to warm to RT over 3 hours. The solution turned green. The mixture was hydrolyzed with a drop of H₂O, the solvent was removed *in vacuo*, and the residue was subjected to column chromatography (EtOAc) to yield 23 mg, (51%), of the E-isomer, ¹H-NMR (200 MHz, CDCl₃) δ 2.22 (s, 3H, SMe), 4.43 (bs, 2H, NH₂), 5.75 (s, 1H, H_{vinilic}), 7.04 (dd, 1H, *J*₅₇ = 2.0, *J*₇₈ = 9.1, H₇), 7.32-7.50 (m, 6H, ArH + H₈), 8.54 (dd, *J*₅₈ = 0.9, *J*₅₇ = 2.0, H₅), and 14mg, (32%) of the Z-isomer, ¹H-NMR (200 MHz, CDCl₃) δ 2.10 (s, 3H,


-121-

SMe, 4.40 (bs, 2H, NH₂), 5.79 (s, 1H, H_{vinilic}), 7.13 (dd, 1H, J₅₇= 1.9, J₇₈= 9.2, H₇), 7.32 (dd, J₅₈= 0.8, J₇₈= 9.2, H₈), 7.47-7.53 (m, 5H, ArH), 8.07 (dd, J₅₈= 0.8, J₅₇= 1.9, H₅).

5

Example 146

2-Amino-3-methylsulfonyl-6-(1-phenyl-2-cyanovinyl)imidazo[1,2-a]pyridine

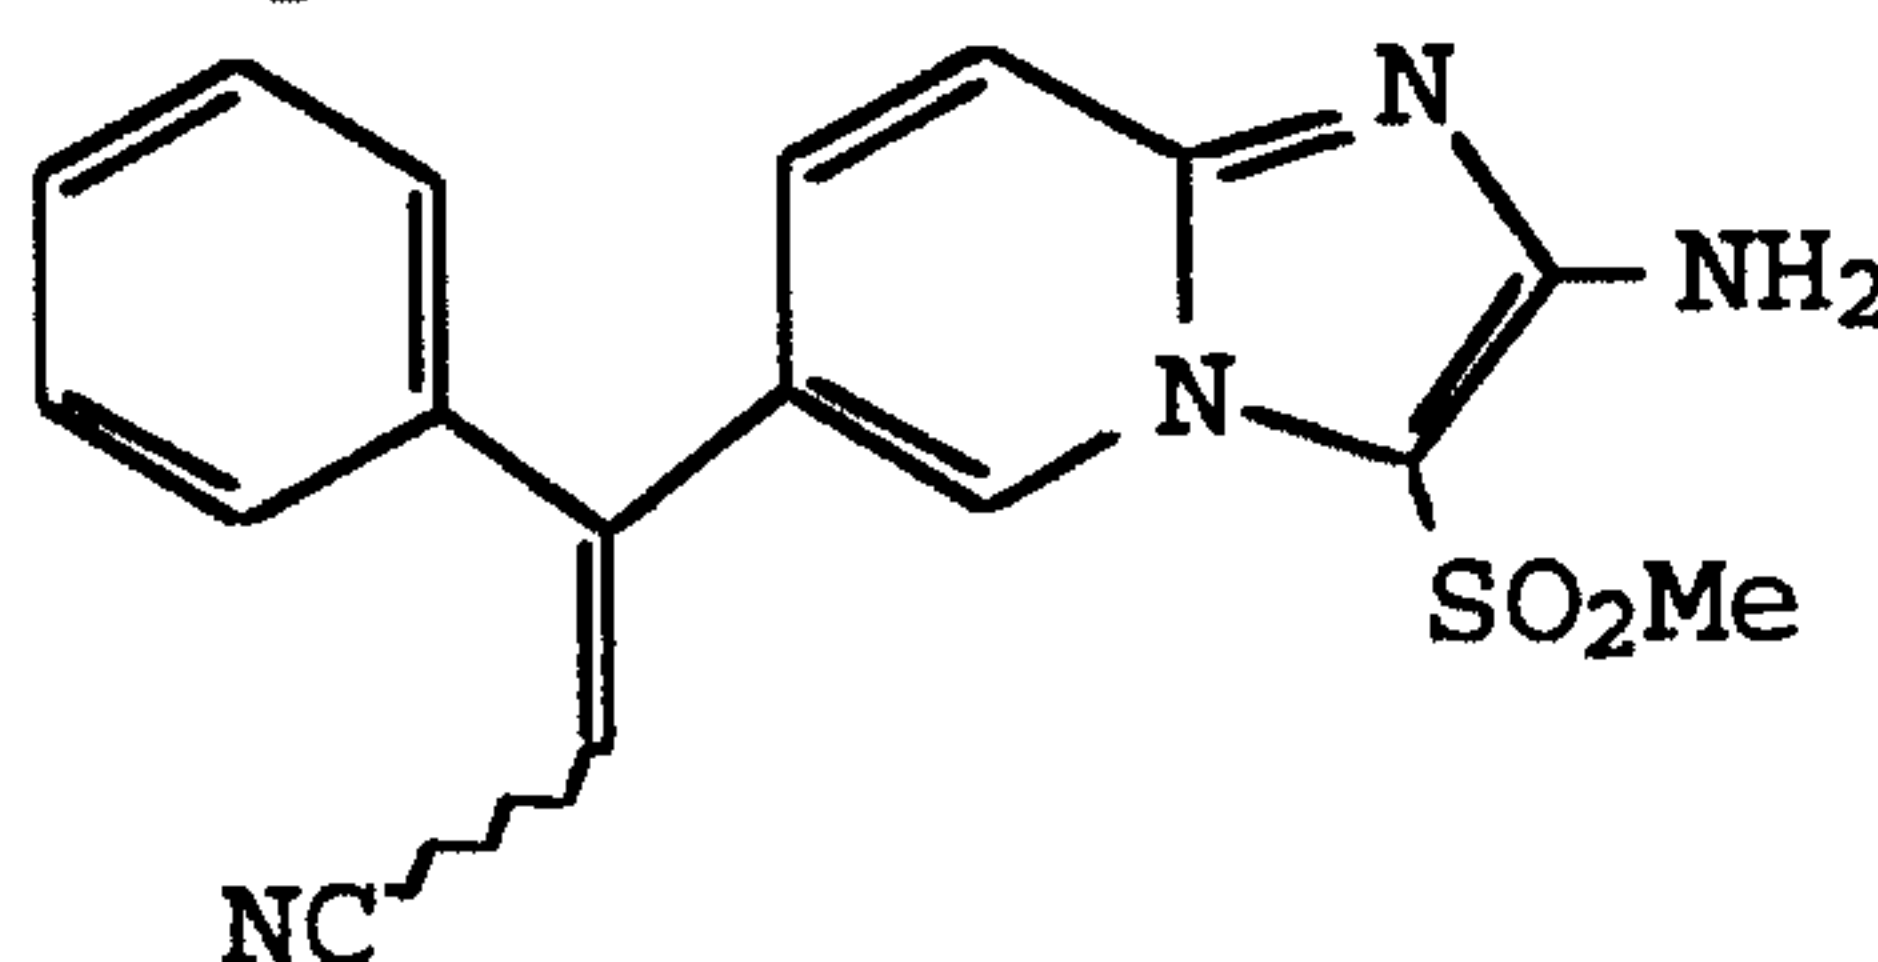


The 2-amino-6-benzoyl-3-(methylsulfonyl)imidazo[1,2-a]pyridine was converted to product in a manner substantially analogous to Example 145 to give the vinyl nitrile as a mixture of 2 isomers E:Z in 1:2 ratio and 77% global yield. The Z-isomer was isolated by column chromatography (isopropanol:EtOAc/3:7). ¹H-NMR (200 MHz, CDCl₃) δ 3.17 (s, 3H, SO₂Me), 4.66 (bs, 2H, NH₂), 5.77 (s, 1H, vinylic), 7.10 (dd, 1H, J₅₇= 1.8, J₇₈= 9.3, H₇), 7.30-7.46 (m, 6H, ArH + H₈), 8.82 (dd, J₅₈= 0.8, J₅₇=1.8, H₅).

20

Example 147

2-Amino-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

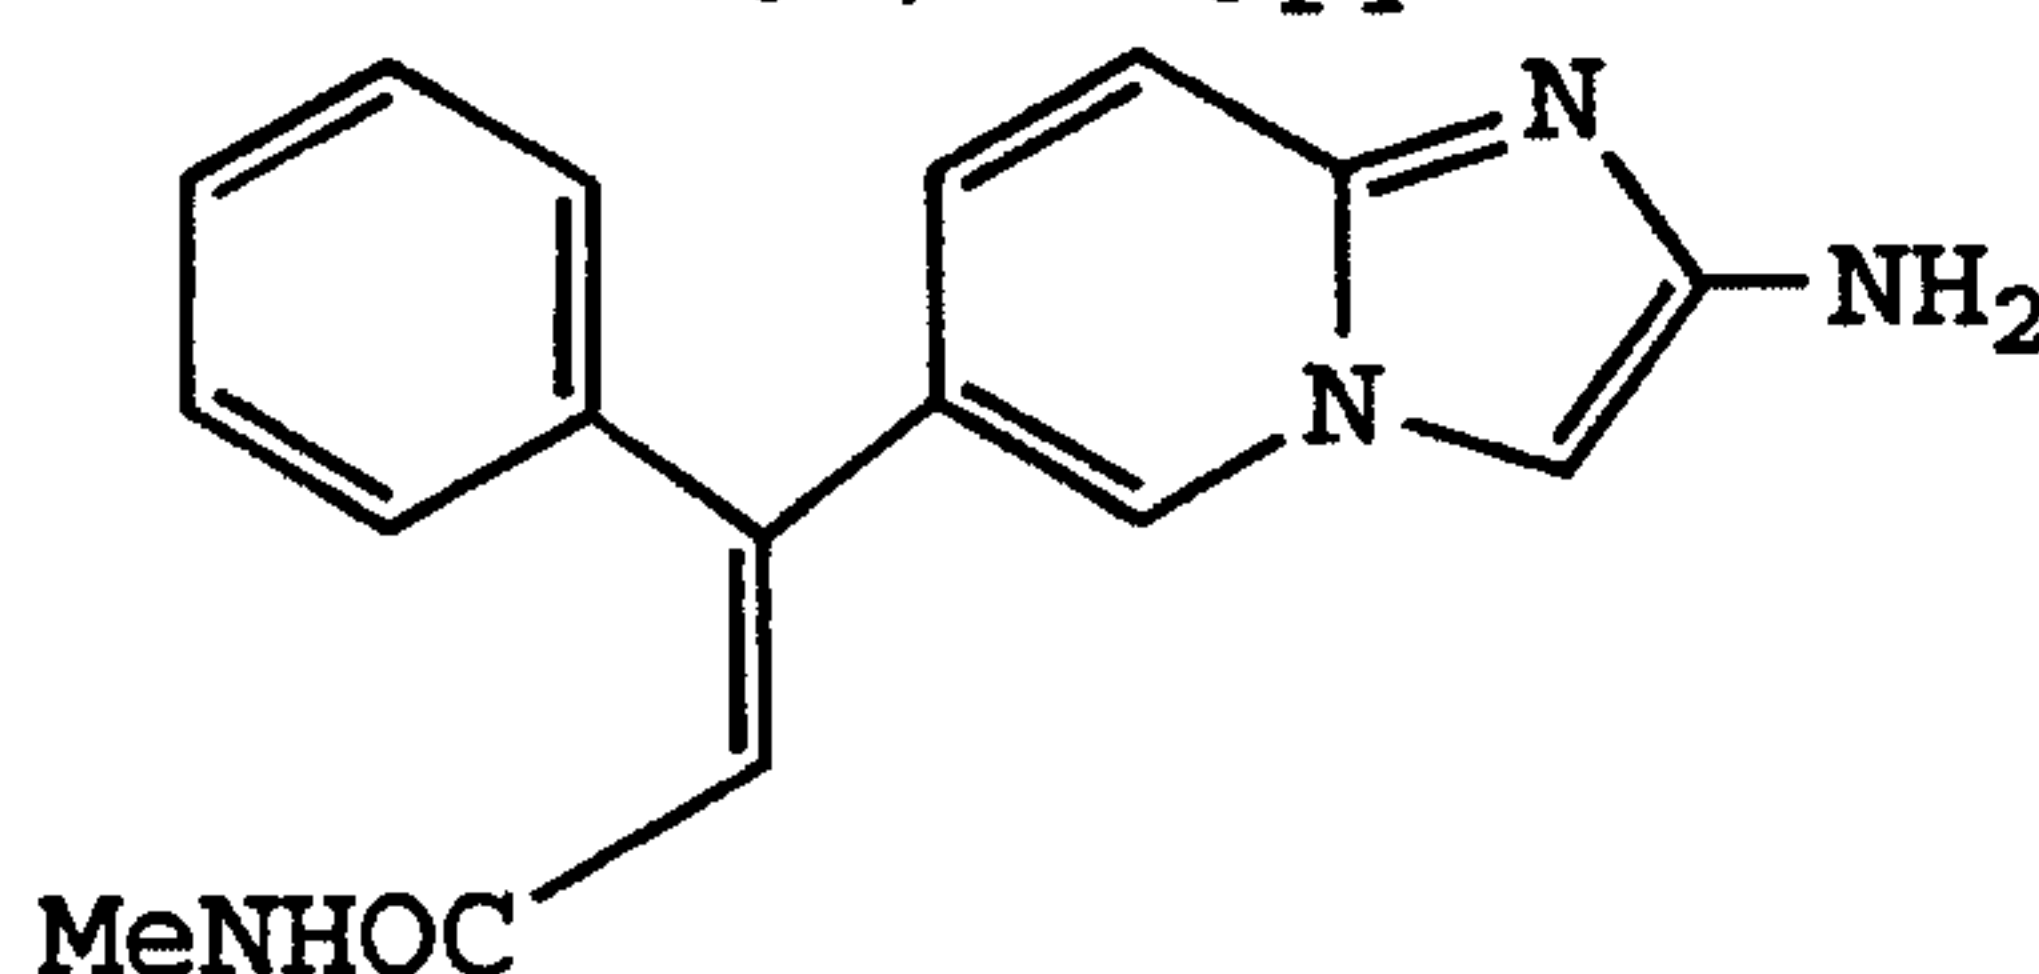


The 2-trifluoroacetamido-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine (300 mg, 0.77 mmol) was stirred in the presence of 0.5 N NaOH (17 ml) at RT for 5 hours. The solution was neutralized to pH = 7 with HCl (5% aqueous solution) and extracted with CHCl₃ (3 x 50 ml). The combined organic extracts were dried (Na₂SO₄) and the solvent was removed *in vacuo* to yield 130 mg (58%) of product as a light-brown solid.

M.P. 97-99°C, NMR (CDCl₃) d 7.61 (d, 1H, J = 1.4 Hz, H₅), 7.47-7.41 (m, 3H, Ar), 7.33-7.27 (m, 3H, Ar), 7.12 (dd, 1H, J = 9.3, 1.8 Hz, H₇ ó H₈), 6.77 (s, 1H, H₃), 6.36 (s, 1H, H vinyl), 5.13 (broad d, 1H, J = 4.9 Hz, NHMe), 3.90 (broad s, 2H, NH₂), 2.62 (d, 3H, J = 4.9 Hz, CH₃NH), EIMS m/z 292 M⁺(100), 262(32), 234(20), 223(15), 215(13), 178(8), 160(10), 117(6), 105(9), 77(9).

Example 148

2-Amino-3-isopropylthio-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

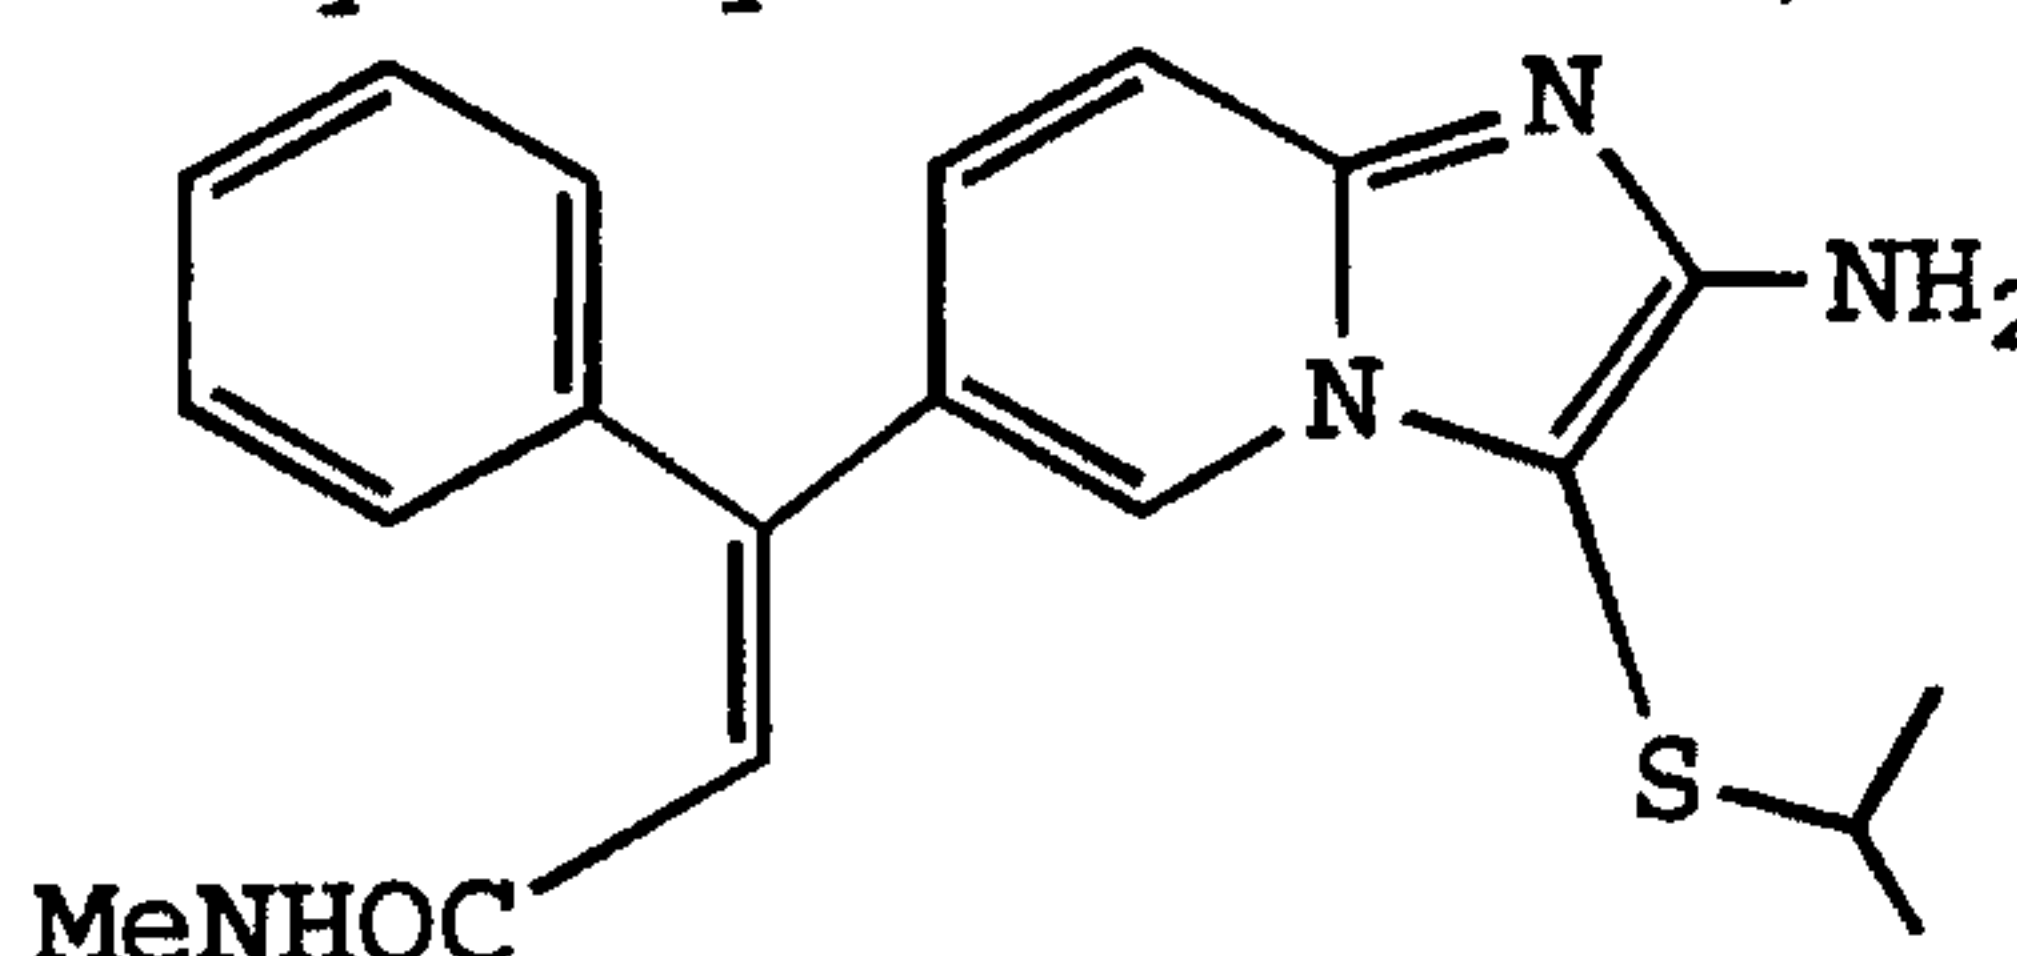


To a solution of 2-trifluoroacetamido-3-iodo-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine (72 mg, 0.15 mmol) in 5 ml of THF cooled to -78°C was added phenyl lithium (230 µl, 0.33 mmol) under an argon atmosphere. The reaction mixture was stirred for 3 minutes before injecting t-butyl lithium (310 µl, 0.38 mmol). After stirring for a 10 minute period, a solution of isopropyl isopropanethiol-sulfonate (109 mg, 0.600 mmol) in 5 ml of THF was added. The reaction mixture was stirred for 30 minutes at -78°C and then quenched with 2 drops of H₂O and 10 ml THF. Ethyl acetate (15 ml) was added and the mixture was allowed to warm to RT. The solution was filtered through celite and the solvents were removed in vacuo. Radial chromatography affords the isopropyl sulfide with the trifluoroacetyl group cleaved and the intermediate in pure form. The ratio of intermediate/product depends on the speed of the radial chromatography. The trifluoroacetyl material was mixed with silicagel in MeOH/CH₂Cl₂ and the cake was stirred for 2 days. After filtration the product was obtained in 73% global yield. EIMS m/z 366 M⁺(33), 323 (100), 293 (18), 237 (15), 196 (10), 178 (7), 102 (6), ¹H-NMR

-123-

(CDCl₃) d 8.01 (d, 1H, J = 1.5 Hz, H₅), 7.47-7.20 (m, 7H, Ar), 6.40 (s, 1H, H_{vinyl}), 5.20 (broad s, 1H, J = 4.9 Hz, NHMe), 4.26 (broad s, 2H, NH₂), 2.97 (hept, 1H, J = 6.8 Hz, CH(CH₃)₂), 2.65 (d, 3H, J = 4.9 Hz, CH₃NH), 1.13 (d, 6H, J = 6.8 Hz, (CH₃)₂CH).

Example 149


2-Amino-3-isopropylsulfonyl-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

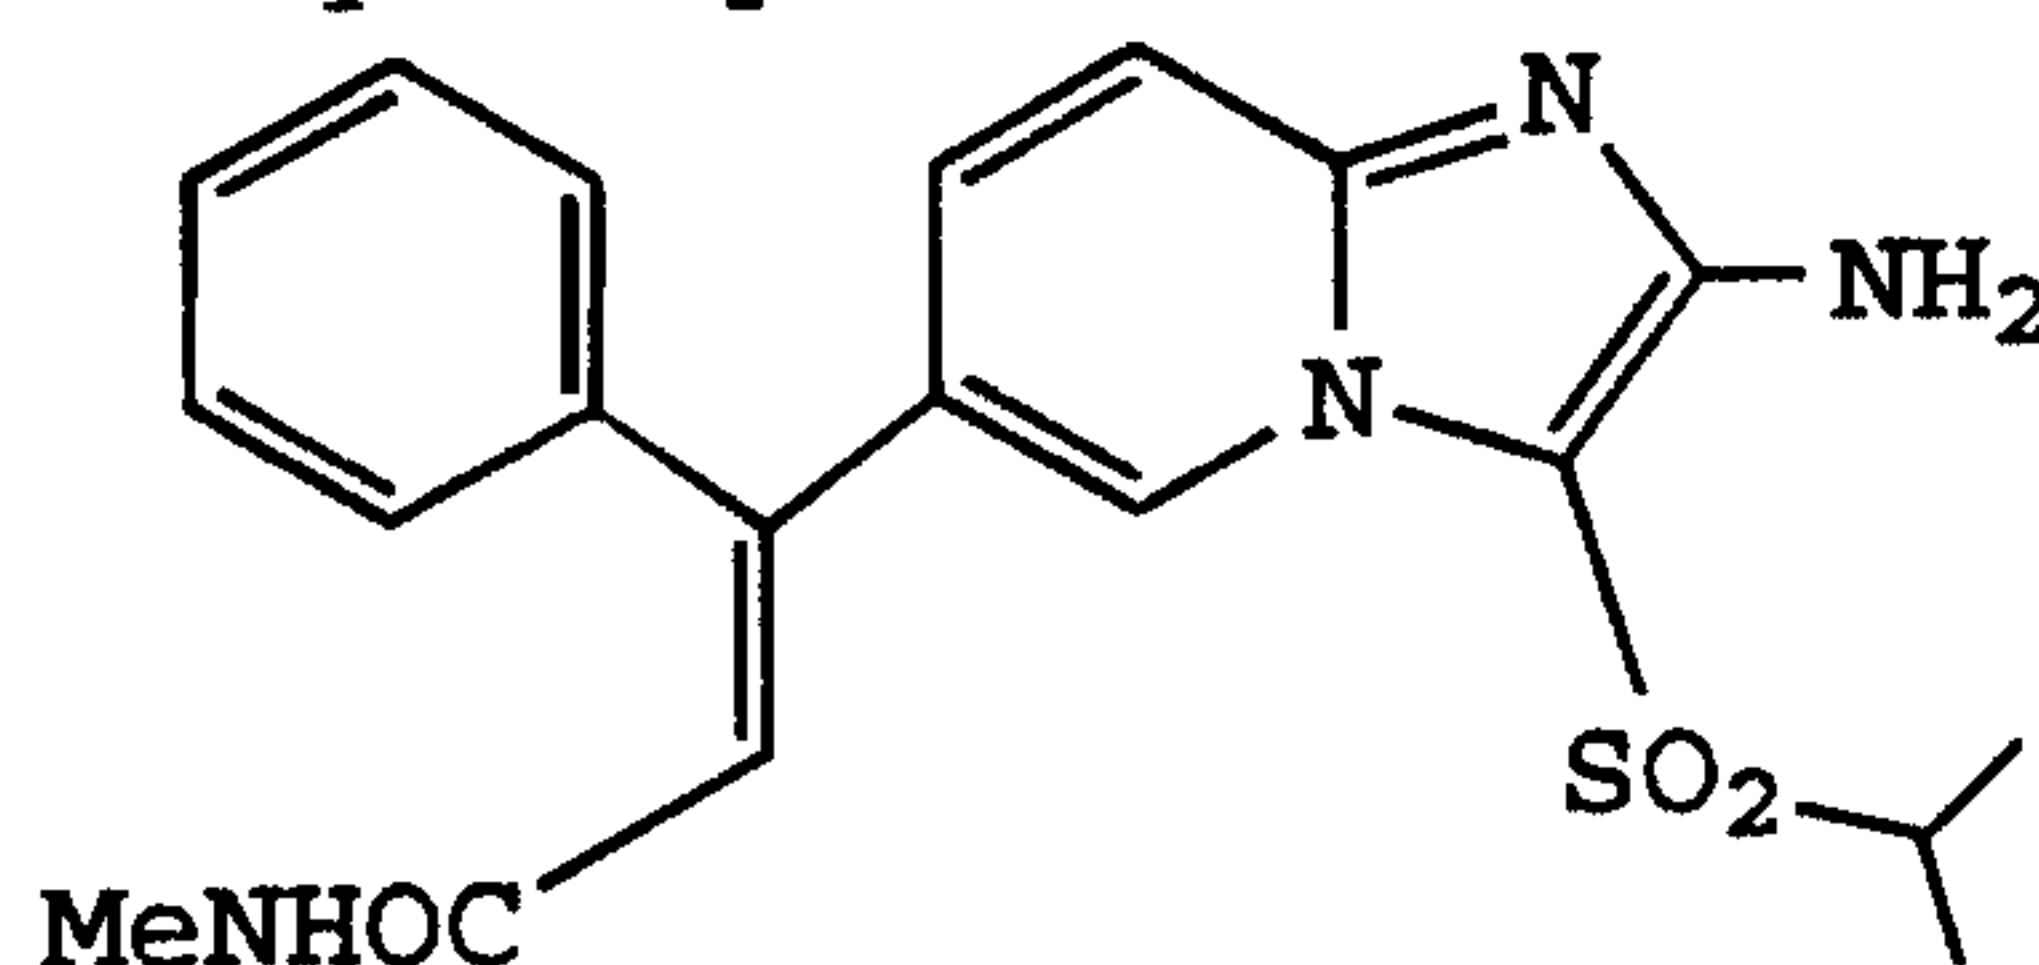

The 2-trifluoroacetamido-3-isopropylsulfonyl-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine (45 mg, 0.09 mmol) was dissolved in a 1:1 mixture of MeOH:CH₂Cl₂ and silica gel was added until a cake is obtained. The cake was vigorously stirred for 2 days. After filtration through celite, the product is obtained as a white solid. (33 mg, 89%). EIMS m/z 398 M⁺(44), 292 (100), 262 (27), 233 (15), 215 (9), 205 (8), 178 (7), 77 (6), 58 (8), NMR (CDCl₃) d 8.46 (s, 1H, H₅), 7.53-7.30 (m, 7H, Ar), 6.41 (s, 1H, H_{vinyl}), 5.30 (d, 1H, J = 4.8 Hz, NHMe), 5.17 (broad s, 2H, NH₂), 3.26 (hept, 1H, J = 7.0 Hz, CH(CH₃)₂), 2.12 (d, 3H, J = 4.8 Hz, CH₃NH), 1.34 (d, 6H, J = 7.0 Hz, (CH₃)₂CH).

Example 150

2-Amino-3-phenyl-6-(1-(2,3-difluorophenyl)oxime)-imidazo[1,2-a]pyridine

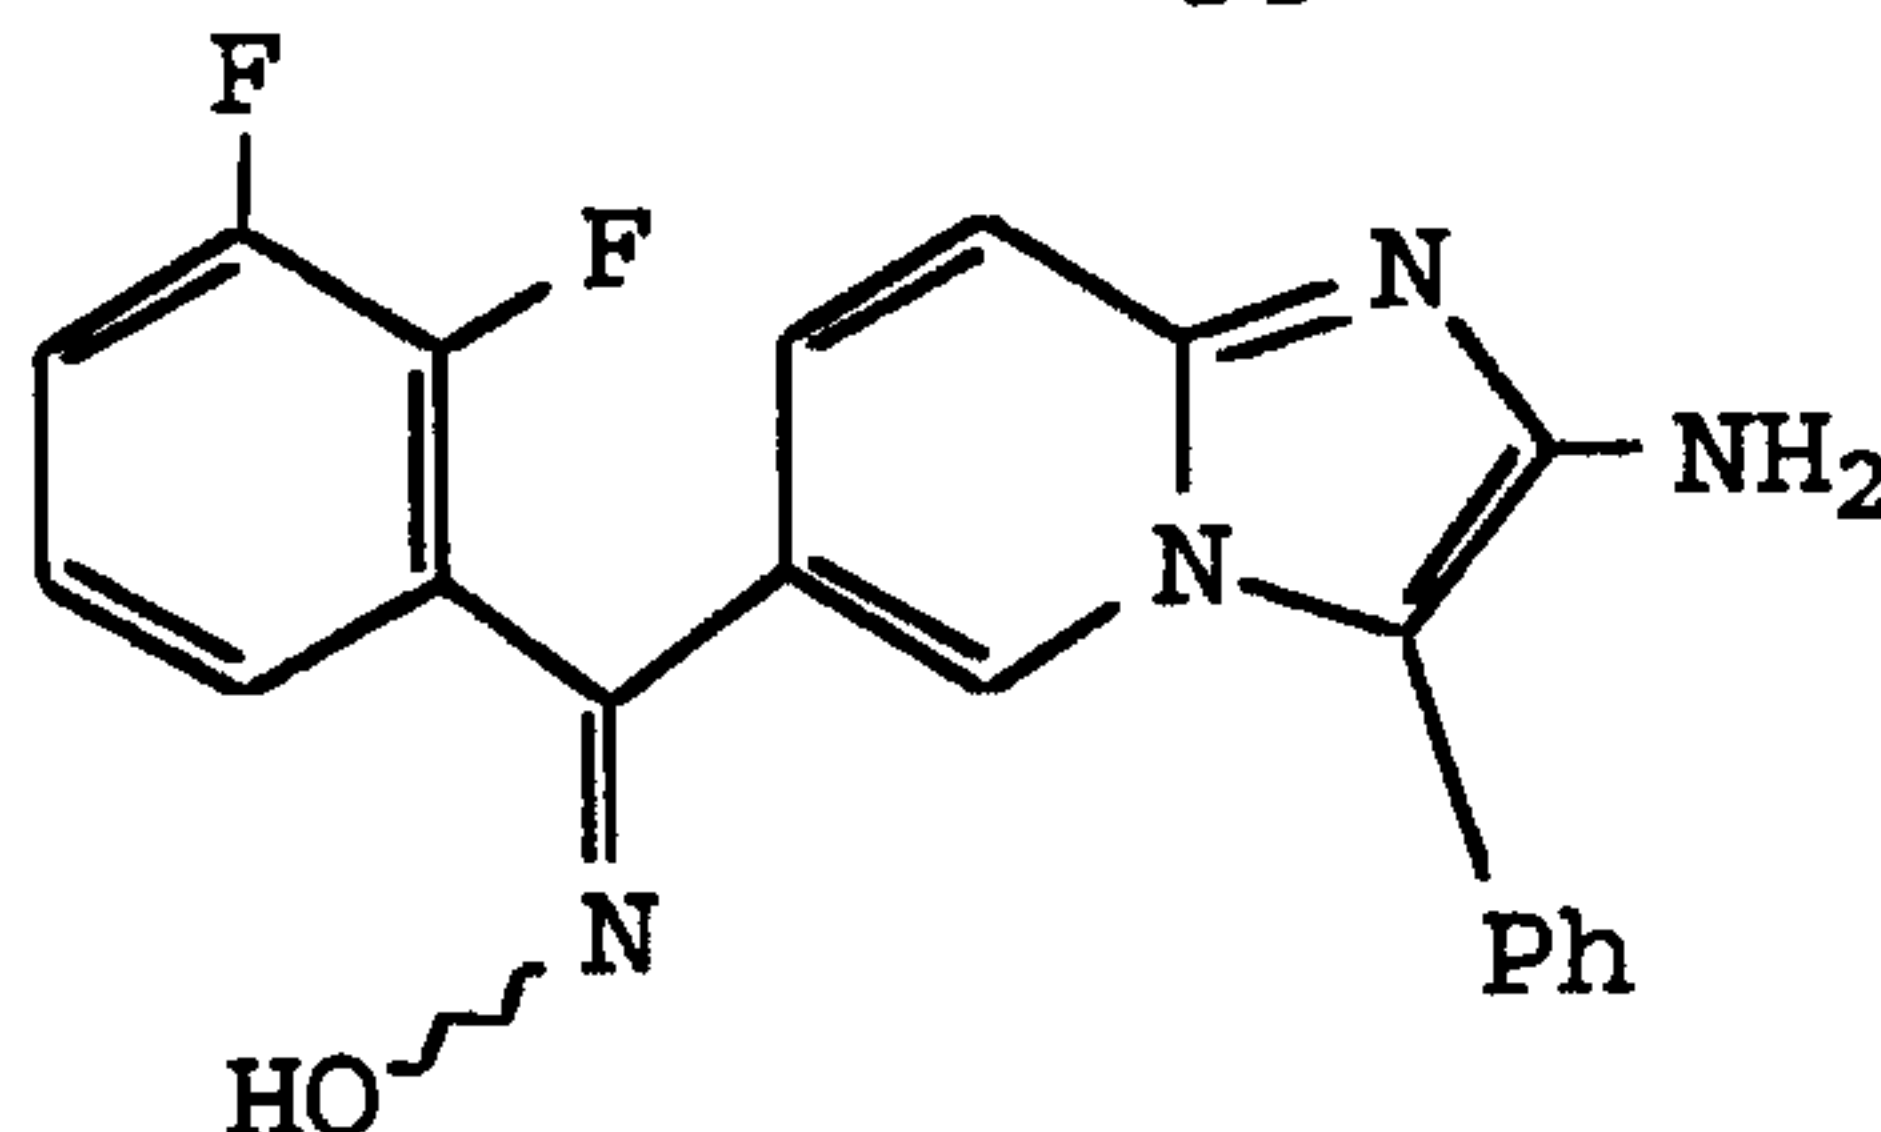


The 2-amino-3-phenyl-6-(2,3-difluorobenzoyl)-imidazo[1,2-a]pyridine (0.15 g, 0.43 mmol) was mixed with hydroxylamine hydrochloride (0.357 g, 5.16 mmol) and

-124-

NaOAc (0.424 g, 5.16 mmol) in an 80% solution of EtOH (9 mL). The reaction mixture was refluxed under argon for 20 hours. The solvents were removed *in vacuo* and the residue was taken up in EtOAc-H₂O. The organic layer was washed with saturated NaHCO₃ (2 x 20 mL) and brine (2 x 25 mL) then dried (Na₂SO₄), and evaporated to give the product quantitatively as a yellow solid. The ratio E:Z determined by NMR was found to be (2/1). NMR (200 MHz, DMSO-*d*₆) δ 5.34 (bs, NH₂ E), 5.38 (NH₂ Z), 8.04 (s, H₅ E), 8.91 (H₅ Z), 11.77 (s, OH E), 12.14 (s, OH Z).

Example 151

2-Amino-3-phenyl-6-(1-(2,3-difluorophenyl)-2-N-methylcarbamoylvinyl)-imidazo[1,2-a]pyridine

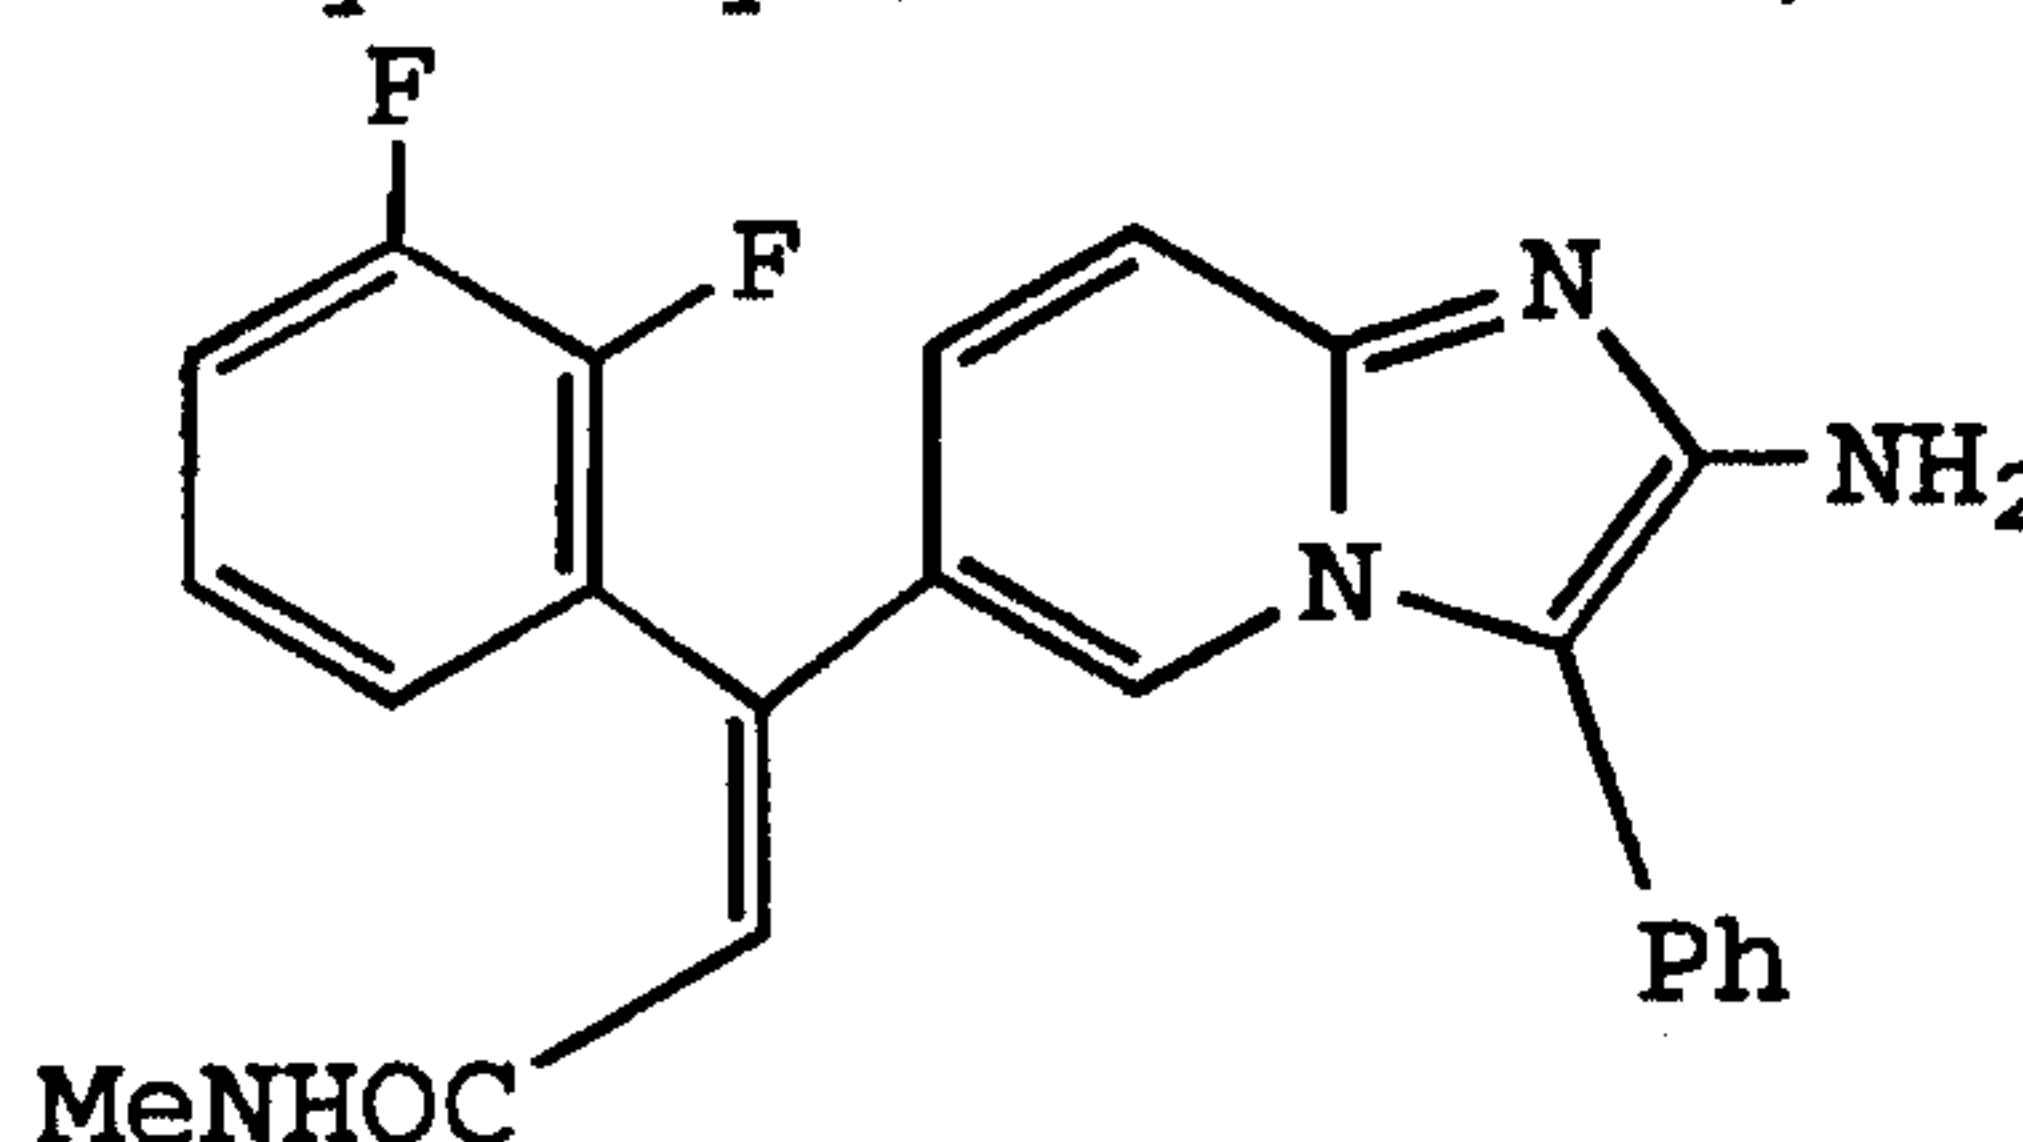


The 2-trifluoroacetamido-3-phenyl-6-[(E)-1-(2,3-difluorophenyl)-2-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine (0.13 g, 0.26 mmol) was dissolved in MeOH/diisopropylethylamine (4 mL 1/1 v/v) and refluxed under argon for 4 days. The solvents were removed *in vacuo* and the mixture was purified by column chromatography (CH₂Cl₂/CH₃CN/MeOH 55/40/5) to recover 27 mg (32.5%) of product. ¹H NMR (200 MHz, CDCl₃) δ 3.86 (d, J= 9.0, 3H, CONHCH₃), 4.15 (bs, 2H, NH), 6.64 (s, H_{vinilic}), 7.02-7.45 (m, 10H, F-ArH + ArH + H₇ + H₈), 8.14 (d, J₅₇= 1.5, H₅), ¹³C NMR (50 MHz, CDCl₃) δ 33.7, 114.6, 118.0, 118.4, 121.0, 121.6, 122.4, 122.6, 123.2, 124.2, 127.7, 127.7, 128.9, 129.7, 147.0, 148.7, 161.9.

Example 152

2-Amino-3-phenyl-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine


-125-

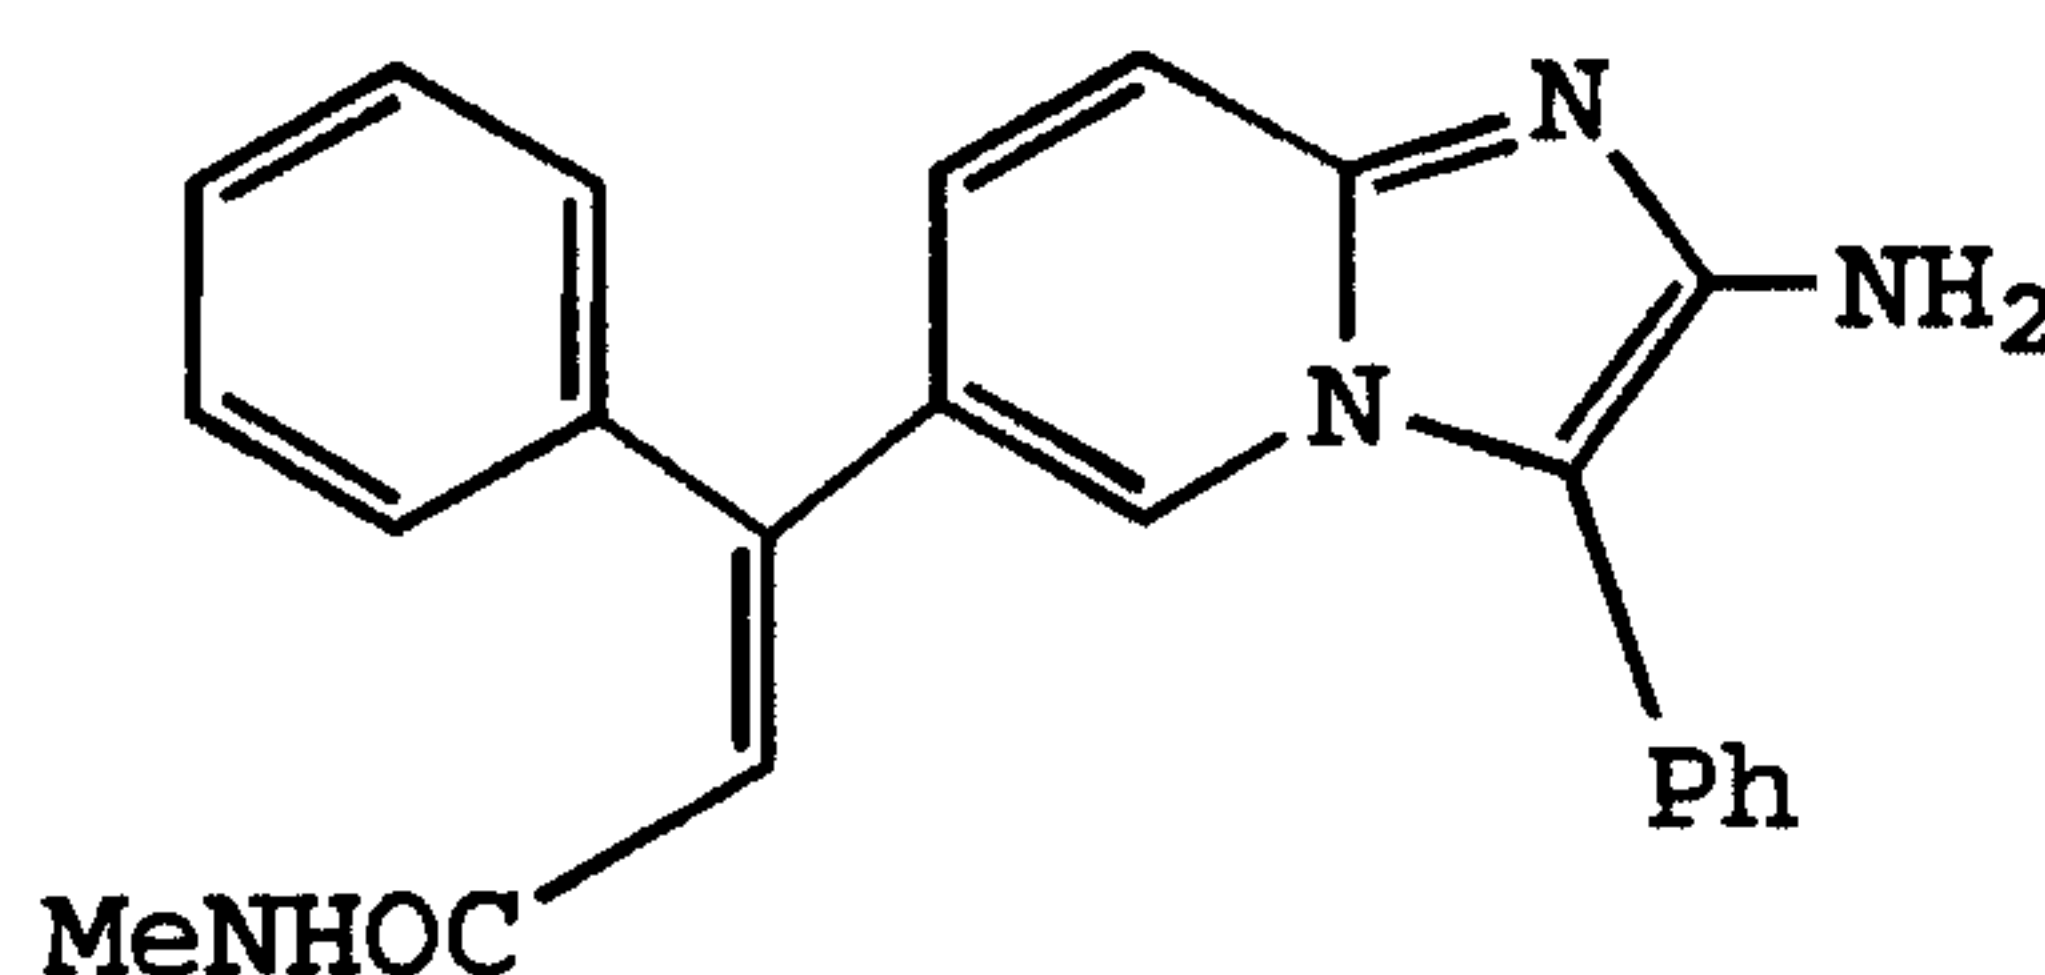

The 2-trifluoroacetamido-3-phenyl-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine (190 mg, 0.420 mmol) was converted to product in a manner substantially analogous to Example 151 to give 127 - 135 mg. (85-90%). NMR (200 MHz, CD3OD): δ 2.60 (s, 3H, NHCH3), 6.44 (s, 1H, H vinyl), 7.20-7.42 (m, 12H, ArH + H7 + H8), 7.91 (bs, 1H, H5).

Example 153

10 2-Amino-3-(2,5-difluorophenyl)-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

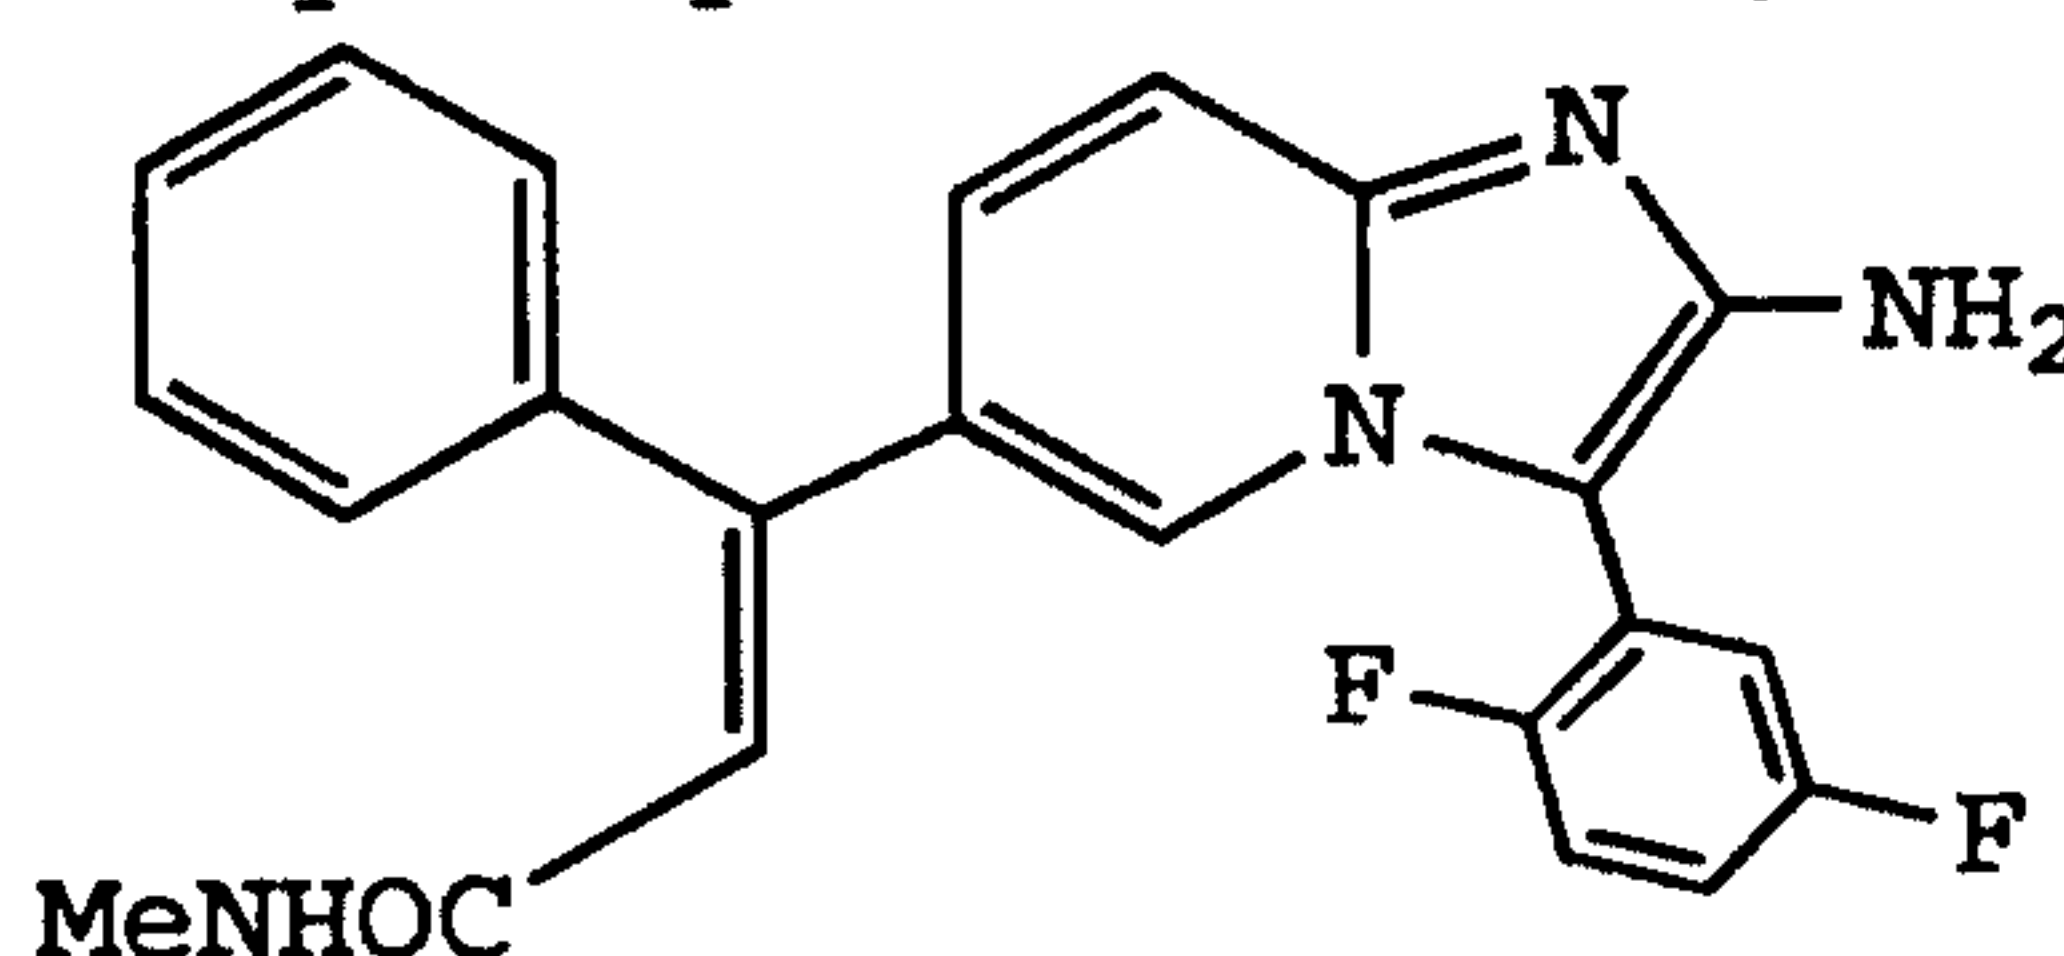


The 2-trifluoroacetamido-3-(2,5-difluorophenyl)-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine (333 mg, 0.682 mmol) was converted to product in a manner substantially analogous to Example 151 to give 227 - 241 mg. (85-90%). EIMS m/z 404 M^+ (100), 374(17), 345(12), 207(9), 152(7), 140(7), 105(7), 77(11), NMR (CDCl₃) δ 7.62 (dd, 1H, J = 2.1, 1.2 Hz, H5), 7.45-6.99 (m, 10H, Ar). 6.35 (s, 1H, H vinyl), 5.19 (d, 1H, J = 4.9 Hz, NH), 4.18 (broad s, 2H, NH₂), 2.63 (d, 3H, J = 5.0 Hz, CH₃).

Example 154

25 2-Amino-3-(2-trifluoromethyl-4-fluorophenyl)-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine


-126-

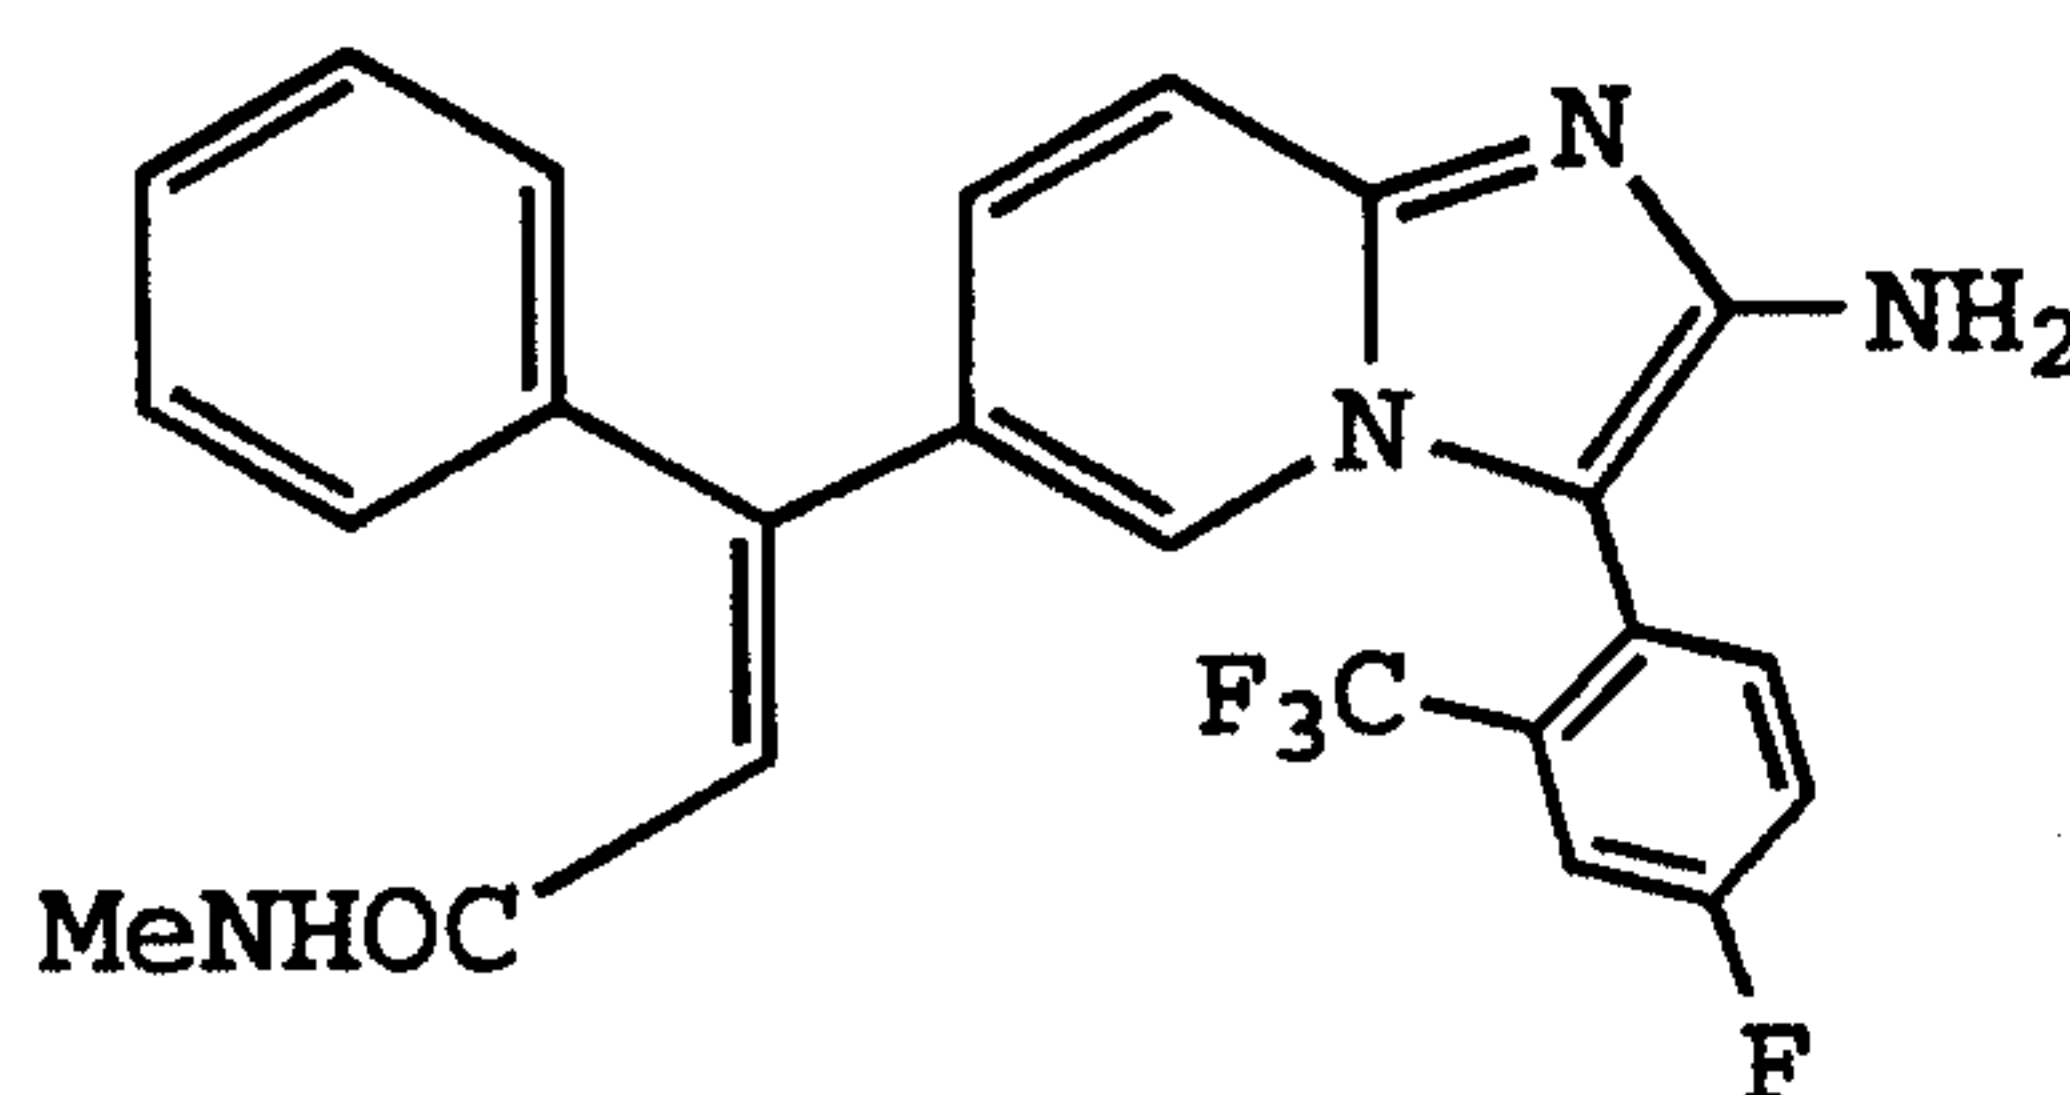

The 2-trifluoroacetamido-3-(2-trifluoromethyl-4-fluorophenyl)-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine (310 mg, 0.576 mmol) was converted to product in a manner substantially analogous to Example 151 to give 216 - 229 mg. (85-90%). MS(FD) (EI⁺) m/z 454 M⁺(100), 424(19), 395(12), 356(7), 279(10), 209(11), 77(9), NMR (CDCl₃) δ 7.52 (dd, 1H, J = 8.4 Hz, H₇ ó H₈), 7.47-7.16 (m, 9H, Ar), 6.94 (d, 1H, J = 8.9 Hz, H₇ ó H₈), 6.16 (s, 1H, H_{vinyl}), 5.39 (broad d, 1H, J = 4.6 Hz, NHMe), 3.92 (broad s, 2H, NH₂), 2.55 (d, 3H, J = 4.7 Hz, CH₃).

Example 155

2-Amino-3-(2,3,4-trifluorophenyl)-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

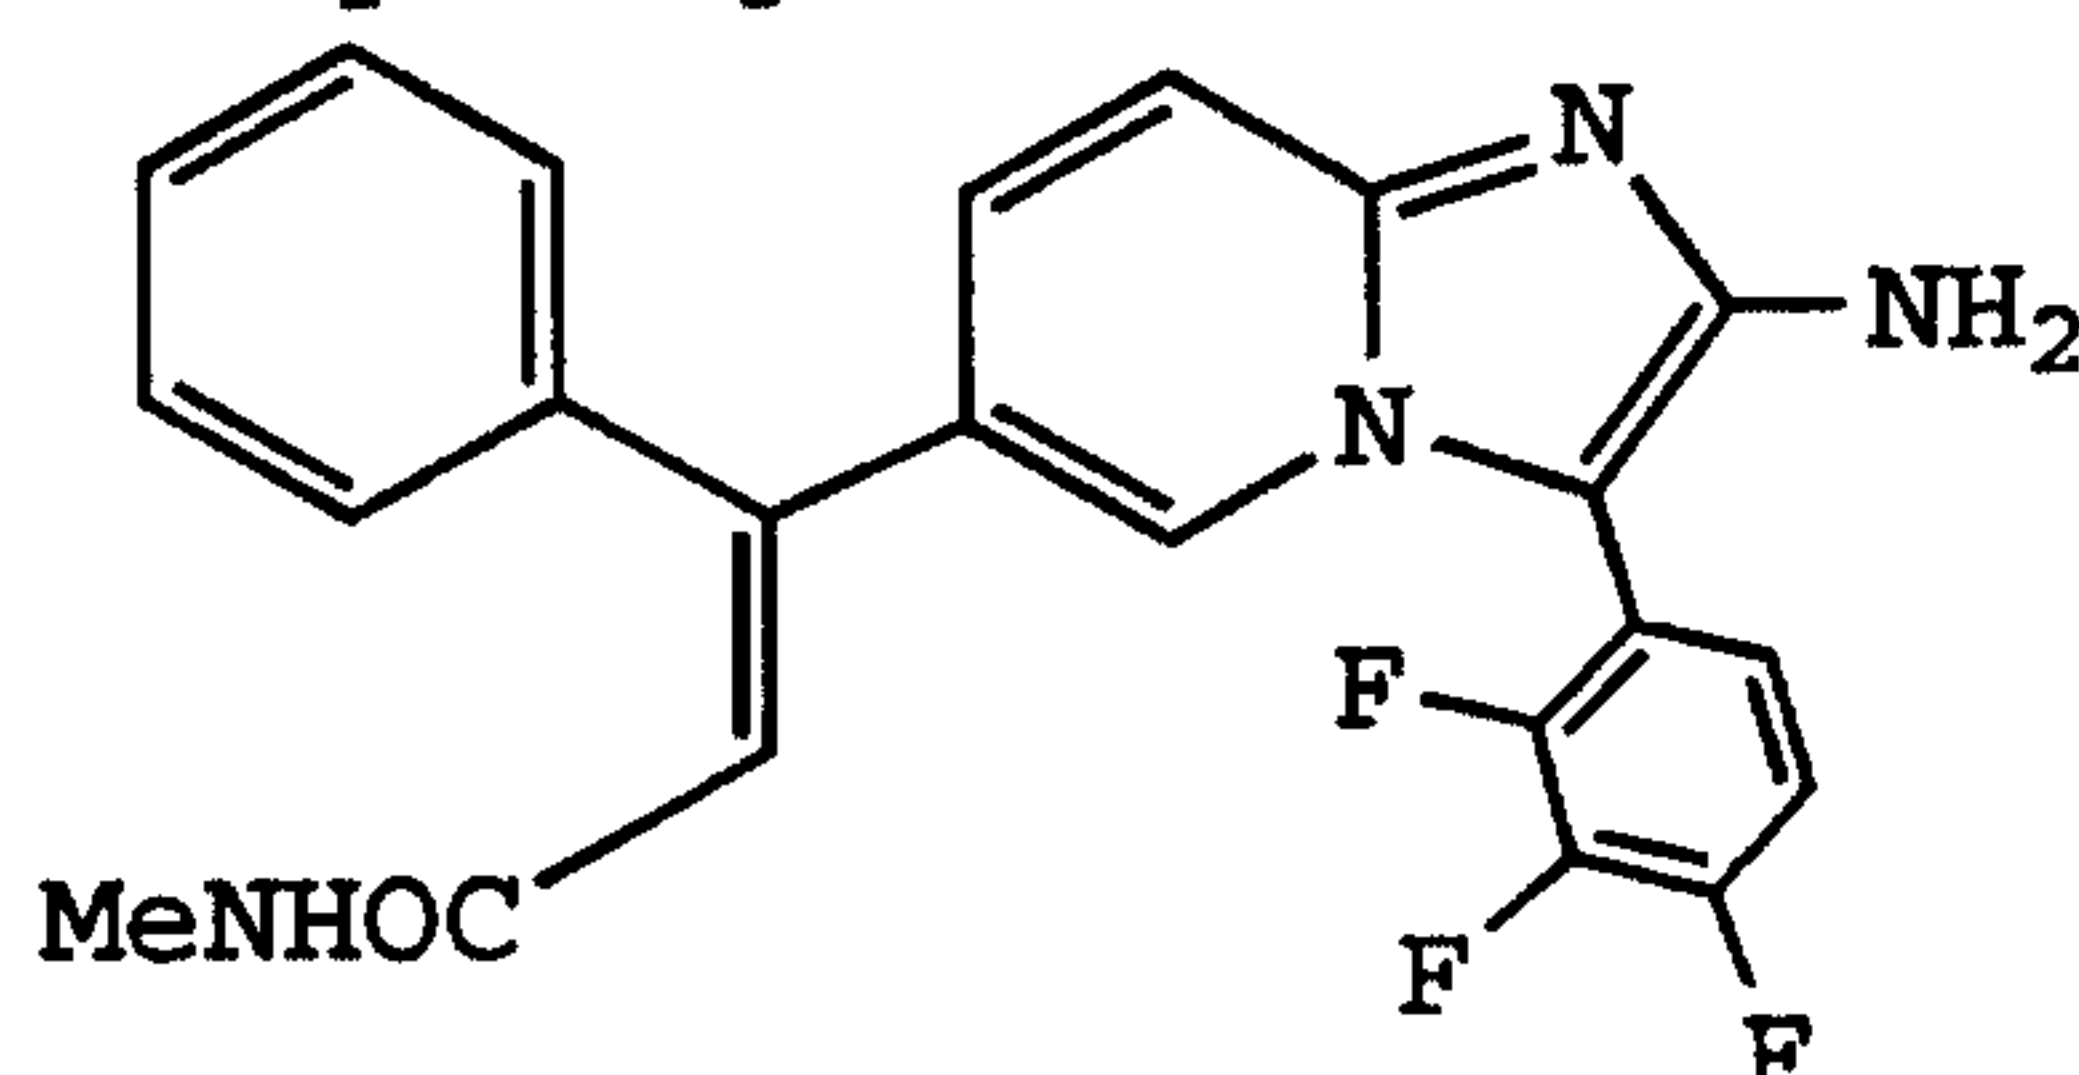


The 2-trifluoroacetamido-3-(2,3,4-trifluorophenyl)-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine (134 mg, 0.265 mmol) was converted to product in a manner substantially analogous to Example 151 to give 92.3- 97.7 mg. (85-90%). EIMS m/z 423 M⁺(6), 422 (25), 392 (6), 353 (14), 259 (14), 105 (16), 84 (100), NMR (CDCl₃) δ 7.70 (s, 1H, C₇H₃N₂), 7.44-7.00 (m, 9H, Ar), 6.63 (s, 1H, CH=C), 5.20 (s broad, 1H, NH-CH₃) 4.13 (s broad, 2H, NH₂), 2.62 (d, J = 4.9 Hz, 3H, NH-CH₃).

Example 156

2-Amino-3-(3,5-difluorophenyl)-6-(1-phenyl-2-N-methylcarbamoylvinyl)-imidazo[1,2-a]pyridine


-127-

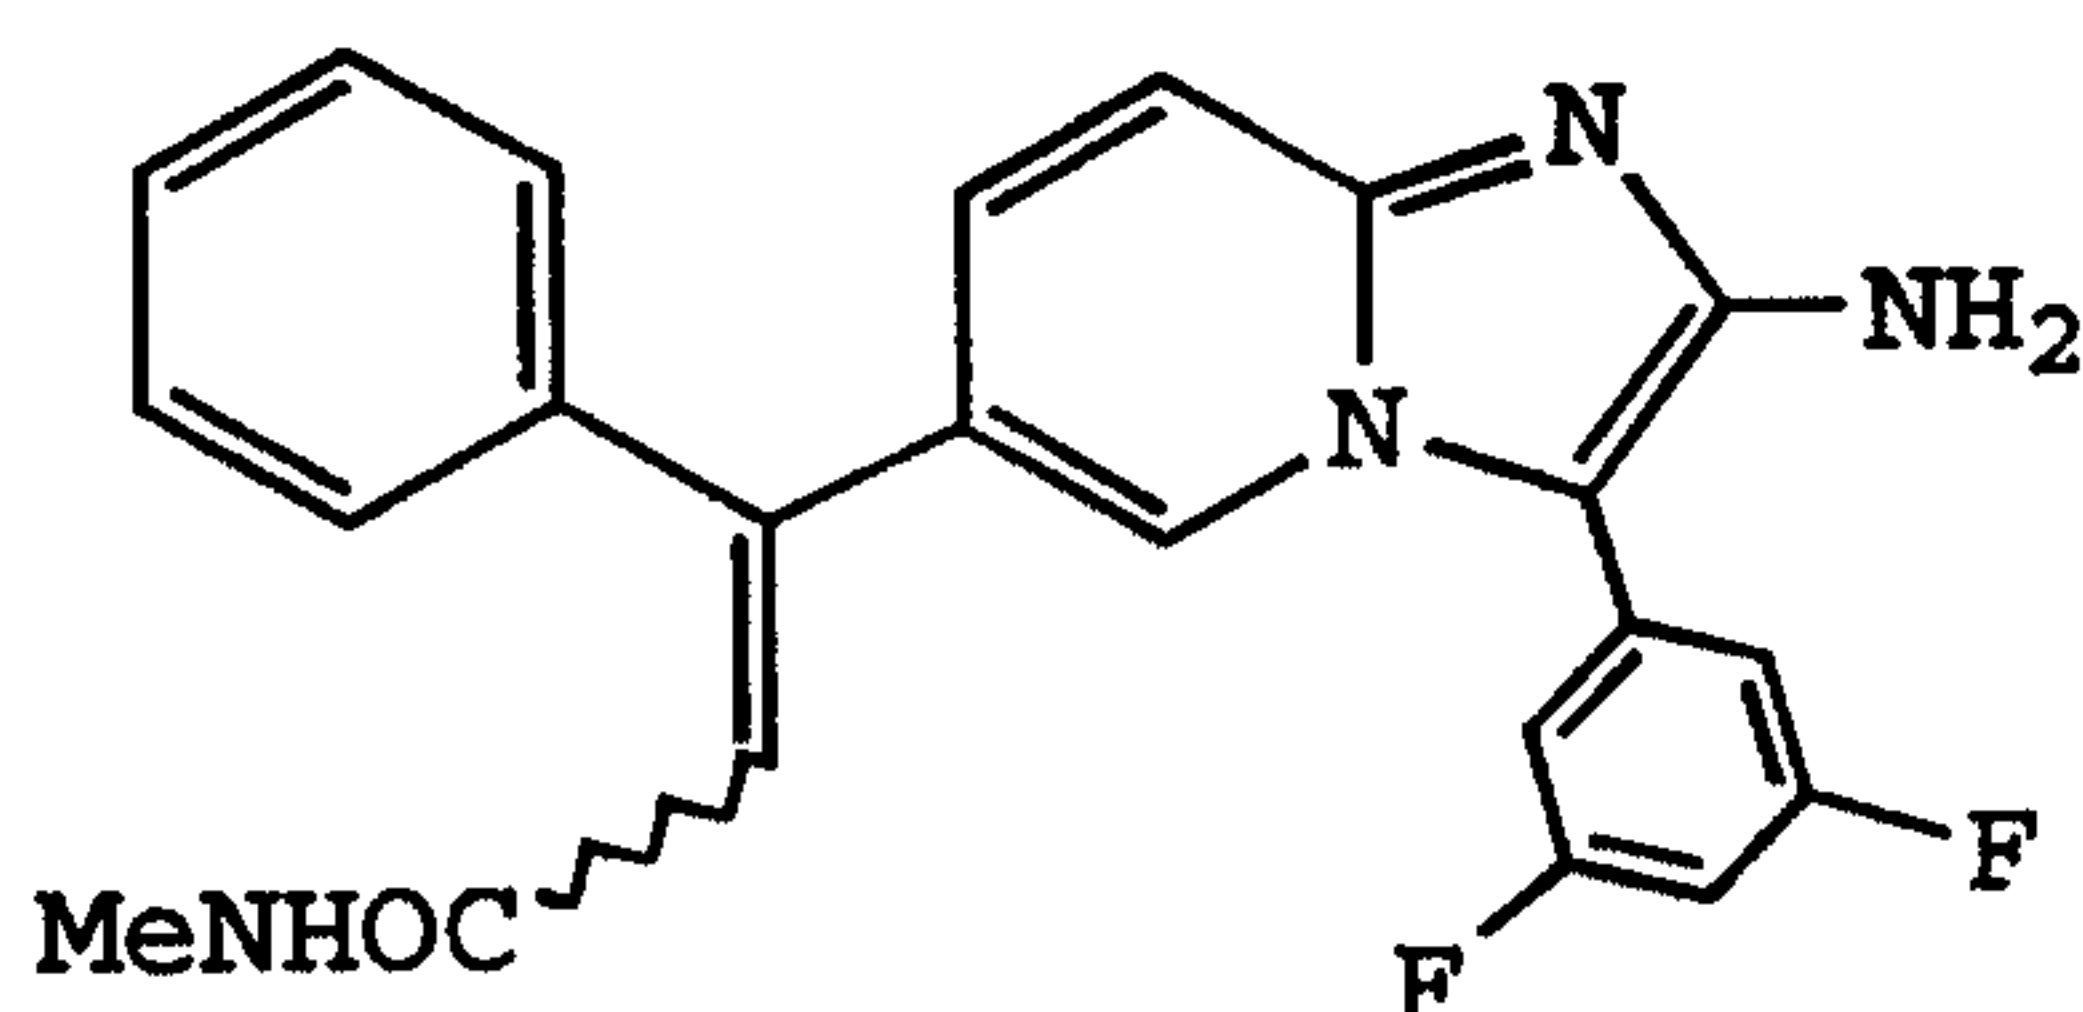

The 2-trifluoroacetamido-3-(3,5-difluorophenyl)-6-(1-phenyl-2-N-methylcarbamoylvinyl)-imidazo[1,2-a]pyridine (113 mg, 0.232 mmol) was converted to product in a manner substantially analogous to Example 151 to give 77.3 - 81.8. (85-90%). EIMS m/z 405 M⁺(34), 404 (100), 374 (22), 345 (17), 84 (14), NMR (CDCl₃) d 8.28 and 7.92 (s, 1H, C₇H₃N₂), 7.5-6.7 (m, 10H, Ar), 6.36 and 6.28 (s, 1H, CH=C), 5.71 y 5.24 (s broad, 1H, NH-CH₃) 4.22 (s broad, 2H, NH₂), 2.82 and 2.65 (d, J = 4.9 and 4.9 Hz, 3H, NH-CH₃).

Example 157

2-Amino-3-(3-trifluoromethylphenyl)-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

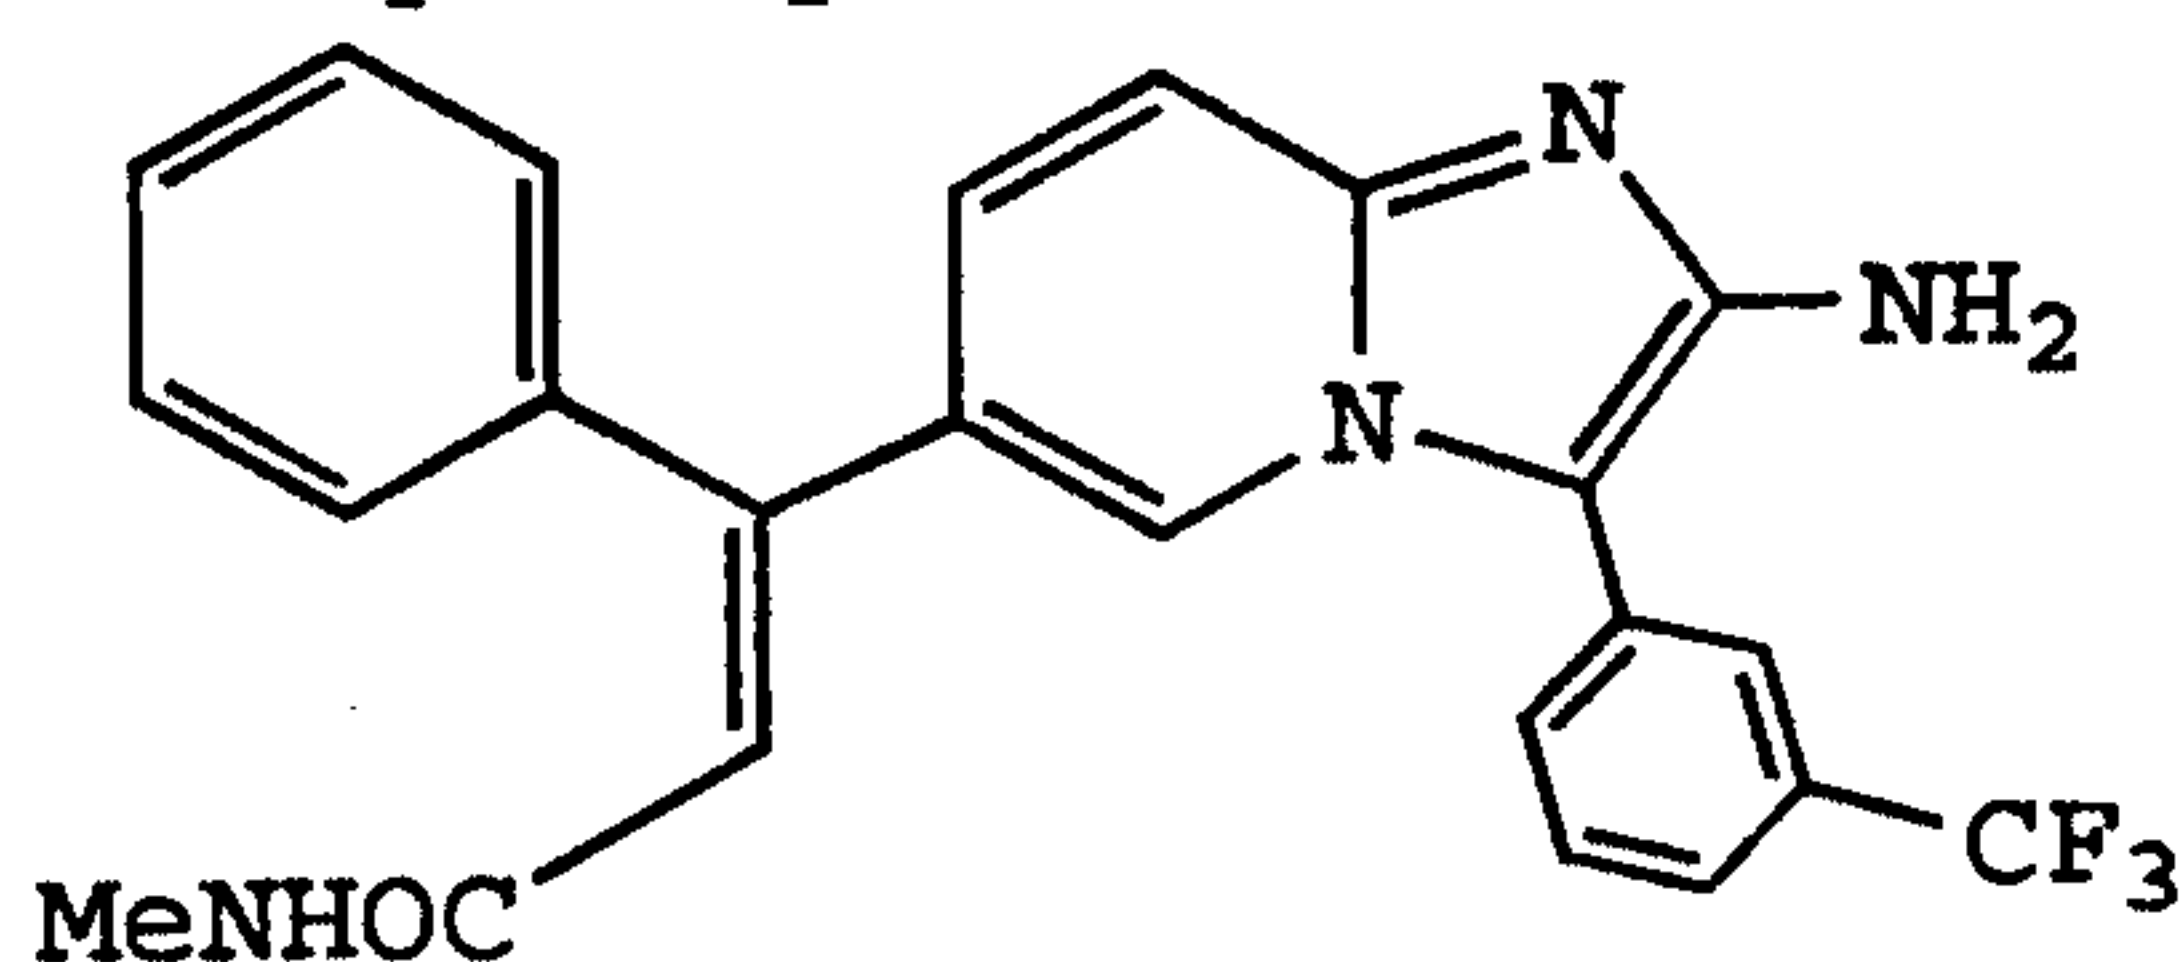

15


The 2-trifluoroacetamido-3-(3-trifluoromethylphenyl)-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine (142 mg, 0.273 mmol) was converted to product in a manner substantially analogous to Example 151 to give 98.4 - 104 mg. (85-90%). EIMS m/z 437 M⁺(36), 436 (100), 406 (18), 377 (16), 279 (10), 77 (6), NMR (CDCl₃) d 7.83 (s, 1H, C₇H₃N₂), 7.64 (m, 11H, Ar), 6.42 and 6.38 (s, 1H, CH=C), 5.13 (s broad, 1H, NH-CH₃) 4.11 (s broad, 2H, NH₂), 2.62 (d, J = 4.9 Hz, 3H, NH-CH₃)

25

Example 158

2-Amino-3-benzoyl-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine


- 128 -

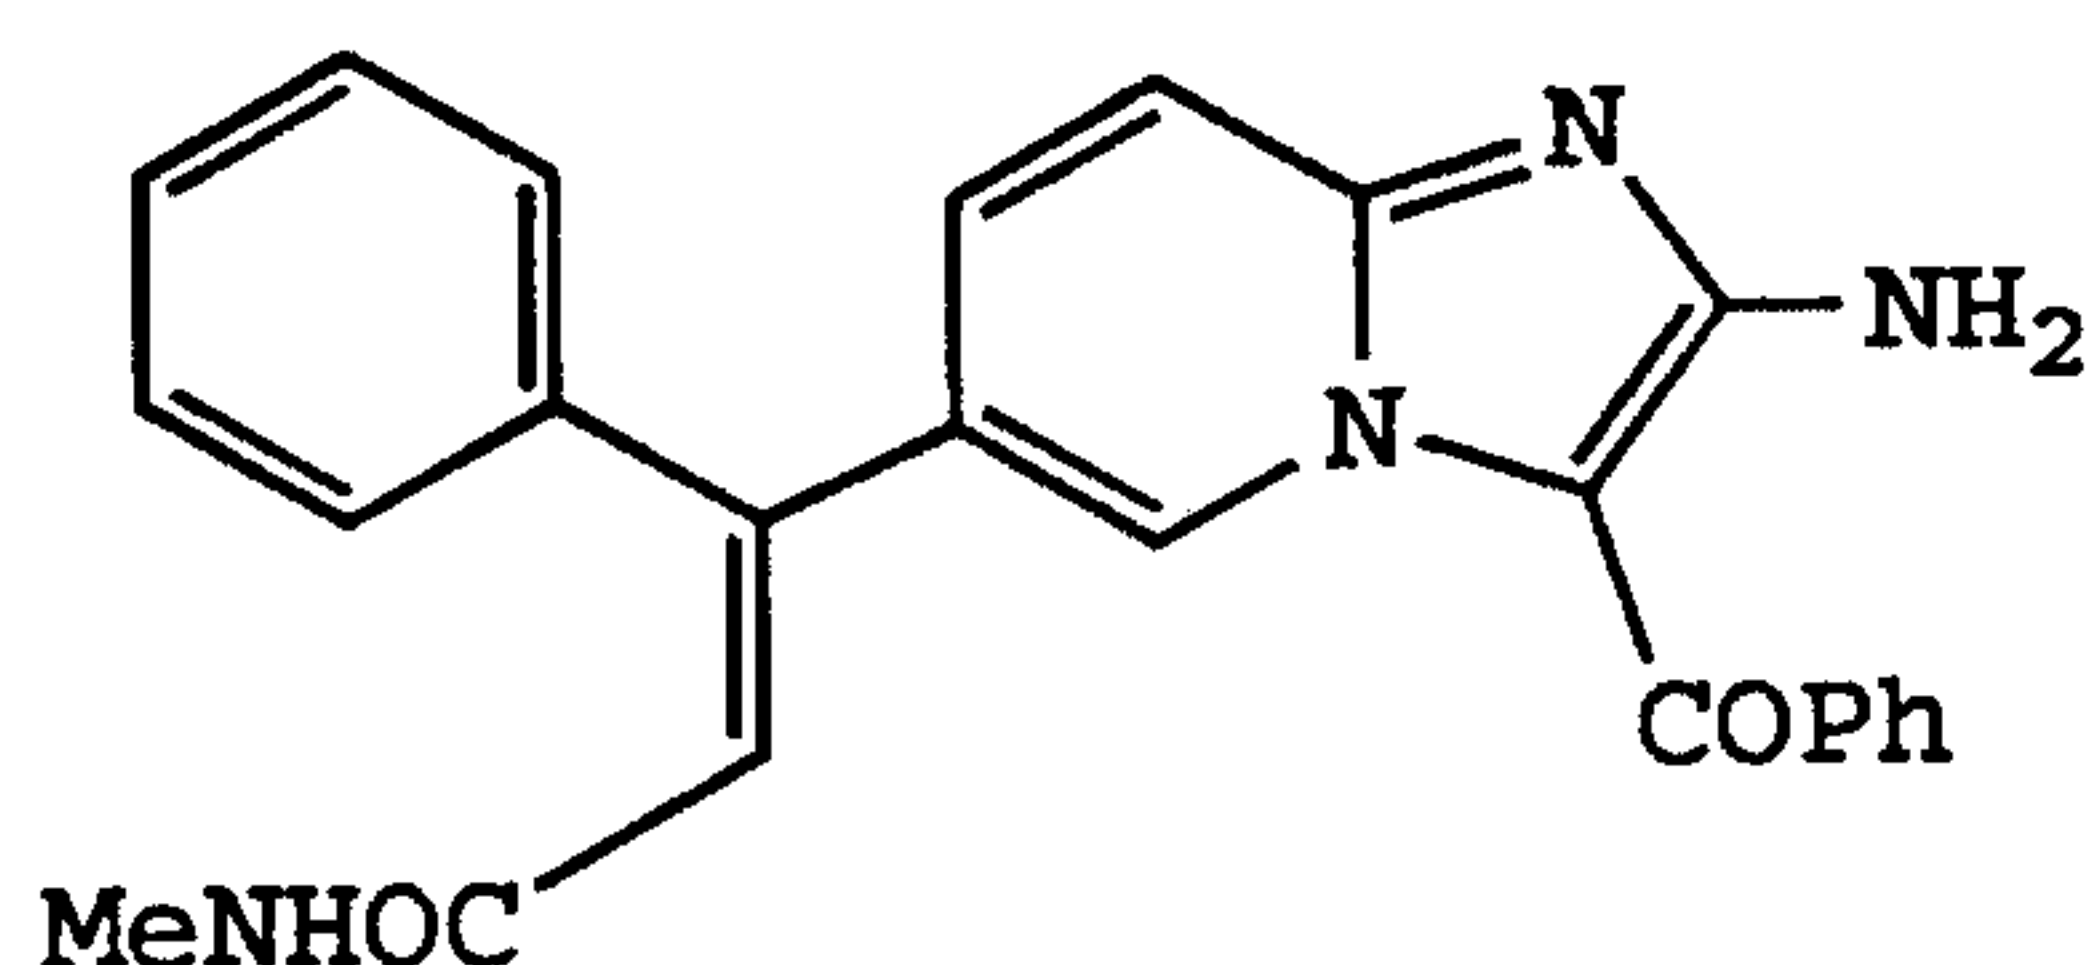

The 1-(2-oxo-2-phenylethyl)-2-chloro-5-[(E)-1-phenyl-2-methylcarbamoylvinyl]pyridinium iodide (0.250 g, 0.482 mmol) was mixed with aminonitrile (220 mg, 0.49 mmol) and K₂CO₃ (200 mg, 1.47 mmol) in 10 ml of CH₃CN. The reaction mixture was refluxed for 14 hours. After cooling to RT the mixture was filtered and the filter cake was washed with CH₃CN. The mother liquor was evaporated and the residue was purified by column chromatography (acetone/EtOAc 1:1) to give 62.8 mg of product as slightly colored solid in 39% yield. MS(HR), NMR.

Example 159

2-Amino-3-(4-fluorobenzoyl)-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

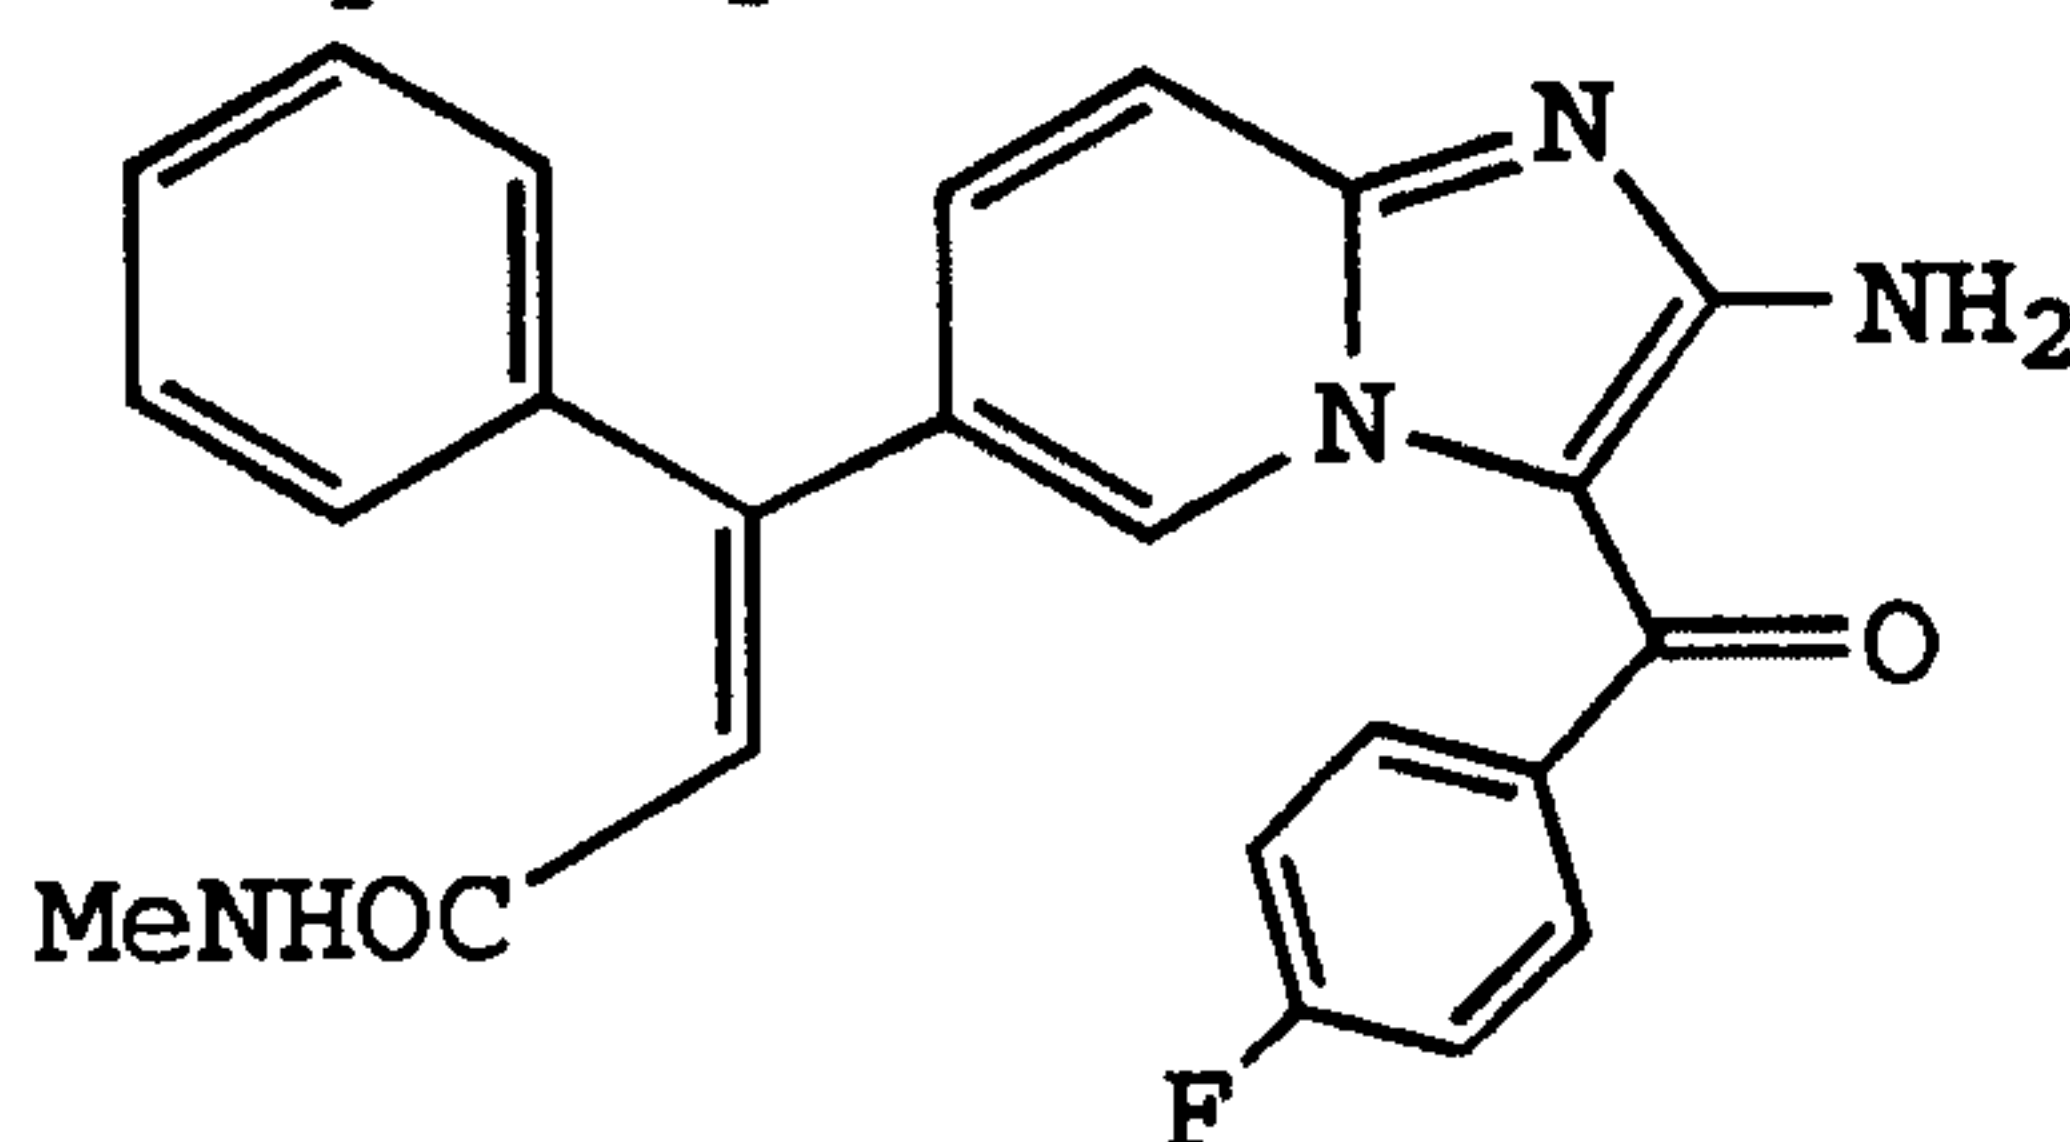


The 1-[2-oxo-2-(4-fluorophenyl)ethyl]-2-chloro-5-[(E)-1-phenyl-2-methylcarbamoylvinyl]pyridinium iodide (400 mg, 0.740 mmol) was converted to product in a manner substantially analogous to Example 158 to give 118 mg. (38%). IR (KBr) ν (cm⁻¹) 3676, 3457, 3283, 3102, 1735, 1640, 1640, 1448, 1352, 1154, 849, 700, NMR (300MHz, DMSO-d₆) δ 8.56 (s, 1H); 7.86 (d, 1H, J = 5, 12); 7.56-7.49 (m, 2H); 7.36 (d, 1H, J = 8, 79); 7.3-7.2 (m, 5H); 7.15 (m, 2H); 6.44 (s, 1H); 6 (s, 2H); 2.48 (s, 3H), MS(HR): calcd. for C₂₄H₁₉N₄O₂ 414.1492, found 414.1498.

Example 160

-129-

2-Amino-3-acetyl-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

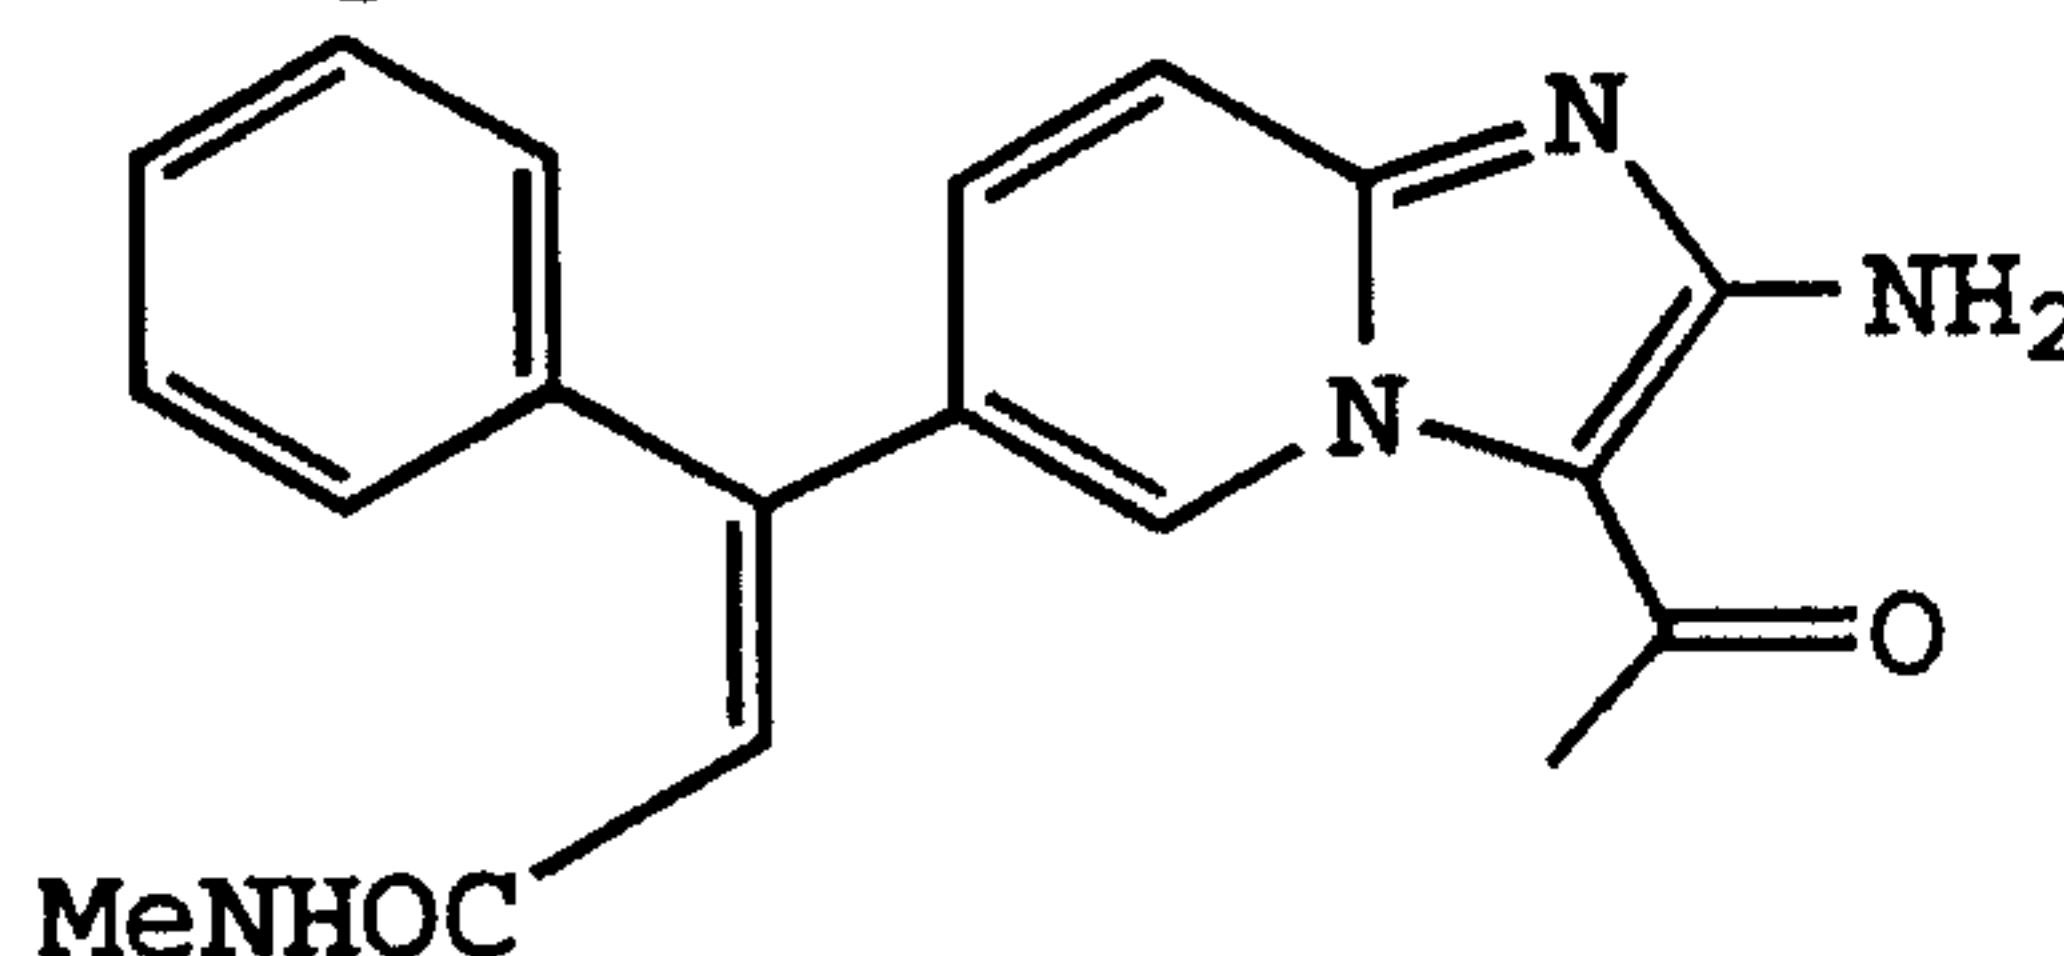


The 1-[2-oxopropyl]-2-chloro-5-[(E)-1-phenyl-2-methylcarbamoylvinyl]pyridinium iodide (400 mg, 0.870 mmol) was converted to product in a manner substantially analogous to Example 158 to give 118 mg. (40%). MS(HR): m/z calcd. for C₁₉H₁₈N₄O₂ 334,1430. found.334,1430, IR (KBr) u (cm⁻¹) 3440, 1614, 1530, 1458, 1348, 820.

10

Example 161

2-Amino-3-t-butylacetyl-6-[(E)-1-phenyl-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

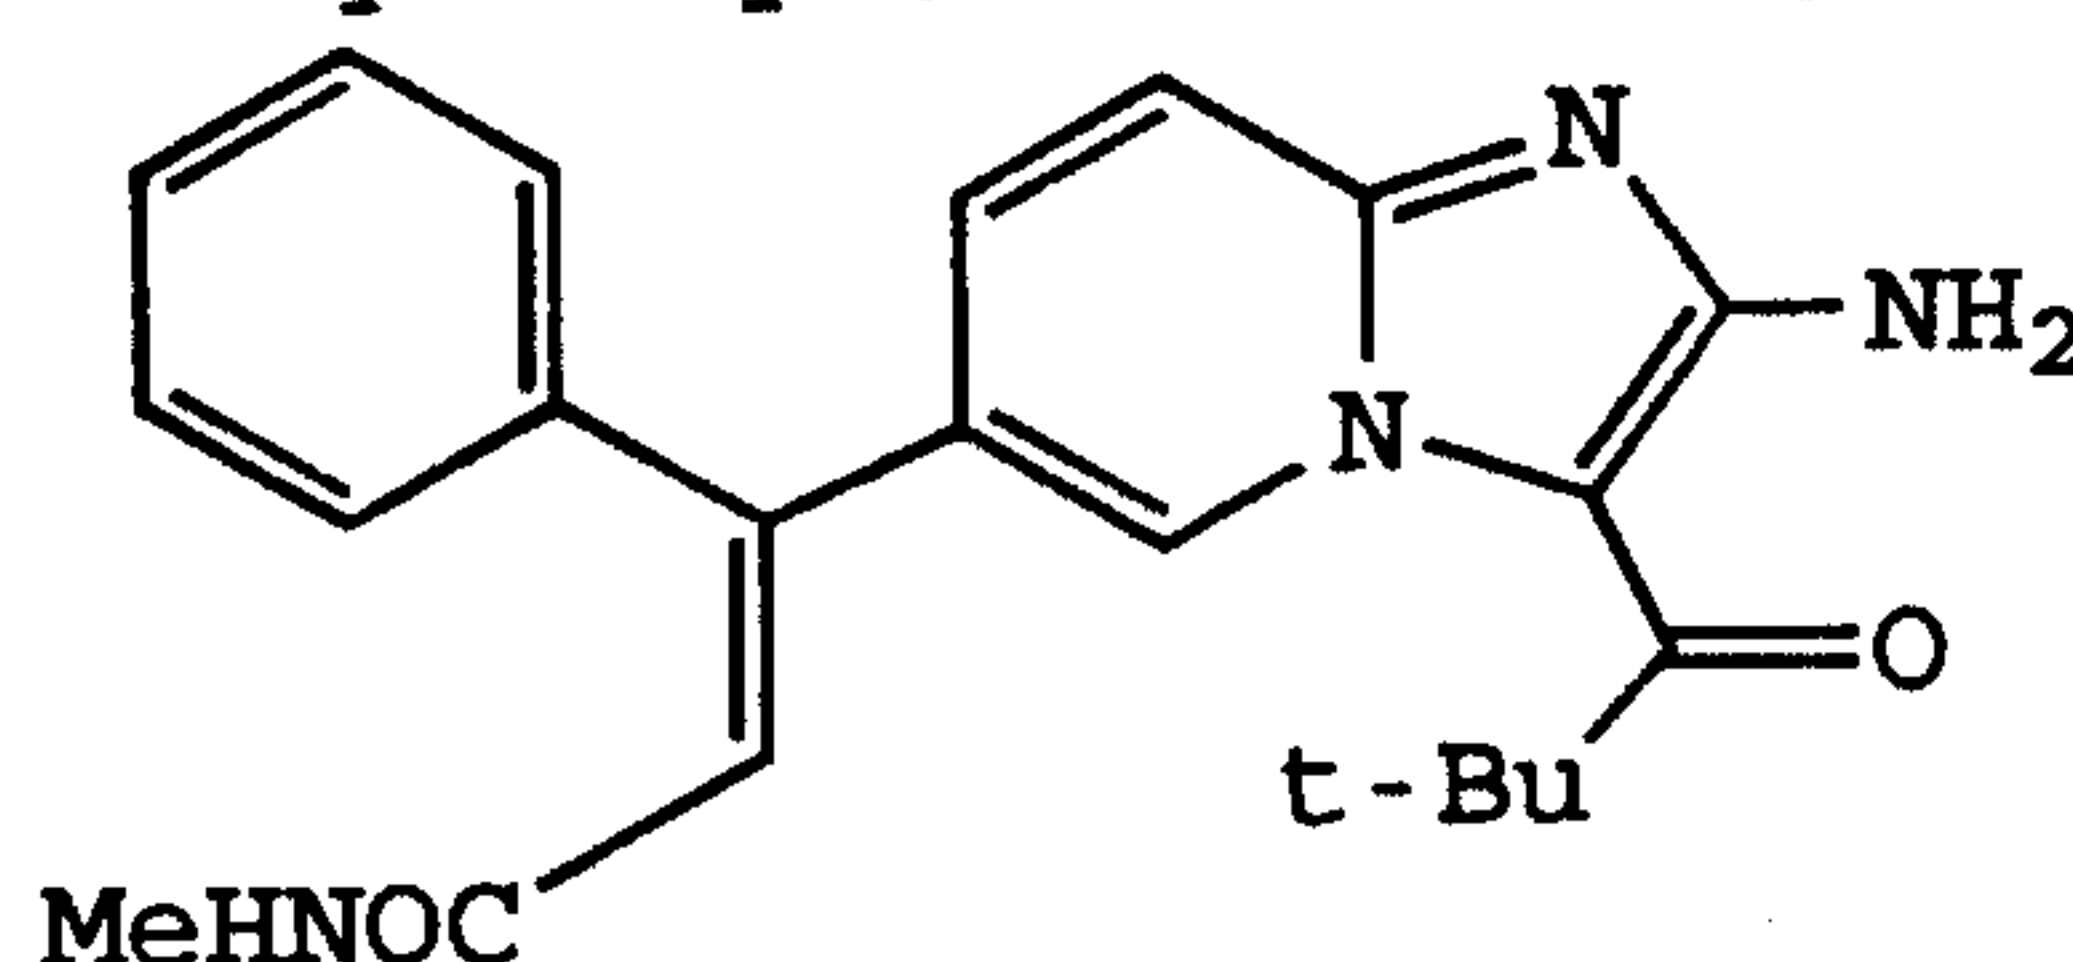


The 1-[2-oxo-3,3-dimethylbutyl]-2-chloro-5-[(E)-1-phenyl-2-methylcarbamoylvinyl]pyridinium iodide (140 mg, 0.280 mmol) was converted to product in a manner substantially analogous to Example 158 to give 31.9 mg. (30%). MS(HR): calcd. for C₂₂H₂₄N₄O₂ 376,1899 found 376,1900, NMR (300MHz, DMSO-d₆) d 9,22(s,1H); 7,8(d,1H,J= 4,4); 7,4-7,3(m,4H); 7,18(d,1H,J= 4); 7,16(d,1H,J=2,5); 6,43(s,1H); 6,35(sa,2H); 2,52(d,3H,J= 4,4); 1,17(s,9H).

20

Example 162

2-Amino-3-t-butylacetyl-6-[(E)-1-(2,3-difluorophenyl)-2-N-methylcarbamoylvinyl]-imidazo[1,2-a]pyridine

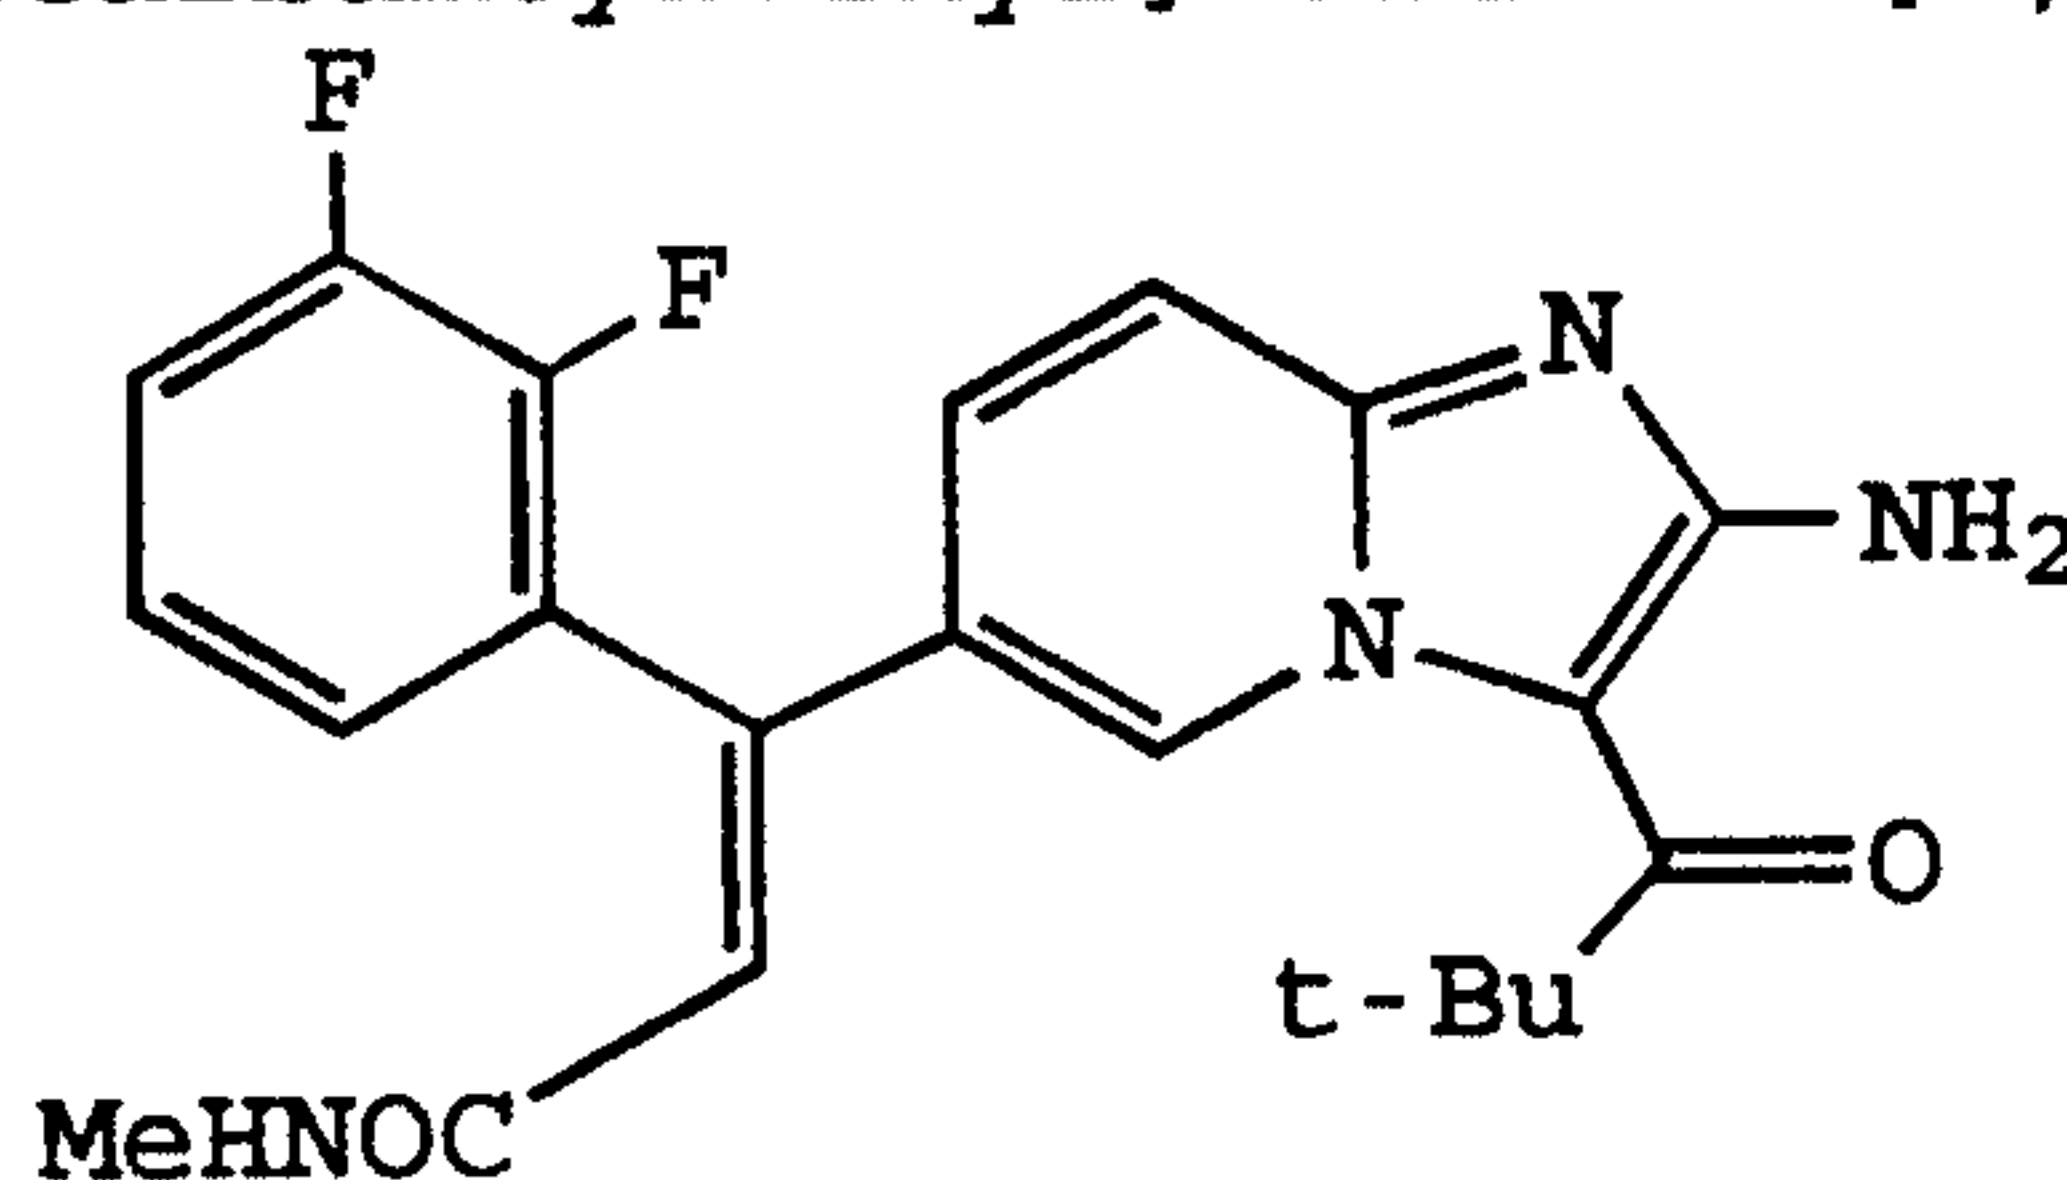

25

-130-

The 1-[2-oxo-3,3-dimethylbutyl]-2-chloro-5-[(E)-1-(2,3-difluorophenyl)-2-methylcarbamoylvinyl]pyridinium iodide (120 mg, 0.220 mmol) was converted to product in a manner substantially analogous to Example 158 to give 11.2 mg. (12%). MS(HR): calcd. for $C_{22}H_{22}N_4O_2F_2$ 412,1711, found. 412,1713, NMR (300MHz, $CDCl_3$) δ 9,4 (s, 1H); 7,28 (d, 1H, J= 1,1); 7,21-7,14 (m, 3H); 6,98 (m, 1H); 6,49 (s, 1H); 5,62 (sa, 1H); 5,35 (s, 2H); 2,78 (d, 3H, J= 4,76); 1,32 (s, 9H).

10 As described above, the compounds of the present invention are useful as antiviral agents. They show inhibitory activity against various strains of enterovirus and rhinovirus. An embodiment of the present invention is a method of treating or preventing
15 picornaviridae infection comprising administering to a host in need thereof an effective amount of a compound of Formula (I) or a pharmaceutically acceptable salt thereof.

The term "effective amount" as used herein, means an
20 amount of a compound of Formula (I) which is capable of inhibiting viral replication. The picornaviridae inhibition contemplated by the present method includes either therapeutic or prophylactic treatment, as appropriate. The specific dose of compound administered
25 according to this invention to obtain therapeutic or prophylactic effects will, of course, be determined by the particular circumstances surrounding the case, including, for example, the compound administered, the route of administration, the condition being treated and the
30 individual being treated. A typical daily dose will contain a dosage level of from about 0.01 mg/kg to about 50 mg/kg of body weight of an active compound of this invention. Preferred daily doses generally will be from about 0.05 mg/kg to about 20 mg/kg and ideally from about
35 0.1 mg/kg to about 10 mg/kg.

The compounds can be administered by a variety of routes including oral, rectal, transdermal, subcutaneous, intravenous, intramuscular and intranasal. The compounds

-131-

of the present invention are preferably formulated prior to administration. Therefore, another embodiment of the present invention is a pharmaceutical formulation comprising an effective amount of a compound of Formula (I) or a pharmaceutically acceptable salt thereof and a pharmaceutically acceptable carrier, diluent or excipient thereof.

The active ingredient in such formulations comprises from 0.1% to 99.9% by weight of the formulation. By "pharmaceutically acceptable" it is meant that the carrier, diluent or excipient is compatible with the other ingredients of the formulation and not deleterious to the recipient thereof.

The present pharmaceutical formulations are prepared by known procedures using well-known and readily available ingredients. In making the compositions of the present invention, the active ingredient will usually be admixed with a carrier, or diluted by a carrier, or enclosed within a carrier which may be in the form of a capsule, sachet, paper or other container. When the carrier serves as a diluent, it may be a solid, semi-solid or liquid material which acts as a vehicle, excipient or medium for the active ingredient. Thus, the compositions can be in the form of tablets, pills, powders, lozenges, sachets, cachets, elixirs, suspensions, emulsions, solutions, syrups, aerosols, (as a solid or in a liquid medium), ointments containing, for example, up to 10% by weight of the active compound, soft and hard gelatin capsules, suppositories, sterile injectable solutions, sterile packaged powders and the like.

The following formulation example is only illustrative and is not intended to limit the scope of the invention in any way.

Formulation 1

Hard gelatin capsules are prepared using the following ingredients:

Quantity
(mg/capsule)

WO 99/59587

PCT/US98/10299

-132-

Active ingredient	250
Starch, dried	200
Magnesium stearate	<u>10</u>
Total	460 mg

5

Test Methods

African green monkey kidney cells (BSC-1) or Hela cells (5-3) were grown in 25cc Falcon flasks at 37°C in medium 199 with 5 percent inactivated fetal bovine serum (FBS), penicillin (150 units 1 ml) and streptomycin (150 micrograms per milliliter ($\mu\text{g/ml}$)). When confluent monolayers were formed, the supernatant growth medium was removed and 0.3 ml of an appropriate dilution of virus (e.g. echo, Mengo, Cocksackie, polio or rhinovirus) were added to each flask. After absorption for one hour at room temperature, the virus infected cell sheet was overlaid with a medium comprising one part of 1 percent Ionagar No. 2 and one part double strength medium 199 with FBS, penicillin and streptomycin which contains drug at concentrations of 100, 50, 25, 12, 6, 3 and 0 $\mu\text{g/ml}$. The flask containing no drug served as the control for the test. The stock solutions of compounds were diluted with dimethylsulfoxide to a concentration of $10^4 \mu\text{g/ml}$. The flasks were then incubated for 72 hours at 37°C for polio, Cocksackie, echo and Mengo virus and 120 hours at 32°C for rhinovirus. Virus plaques were seen in those areas where the virus infected and reproduced in the cells. A solution of 10 percent formalin and 2 percent sodium acetate was added to each flask to inactivate the virus and fix the cell sheet to the surface of the flask. The virus plaques, irrespective of size, were counted after staining the surrounding cell areas with crystal violet. The plaque count was compared to the control count at each drug concentration. The activity of the test compound can be expressed as percentage plaque reduction, or percent inhibition. Alternatively, the drug concentration which inhibits plaque formation by 50

WO 99/59587


PCT/US98/10299

-133-

percent can be used as a measure of activity. The 50 percent inhibition value is denoted as the "IC₅₀". The compounds of the present invention displayed at least 30%, preferably 50% and most preferably over 85%
5 inhibition of plaque formation at a single dose of 50 μ mol. Dose response titrations on the compounds of the present invention reveal IC₅₀ values of < 10 μ M.

We Claim:

1. A compound of the Formula (I):

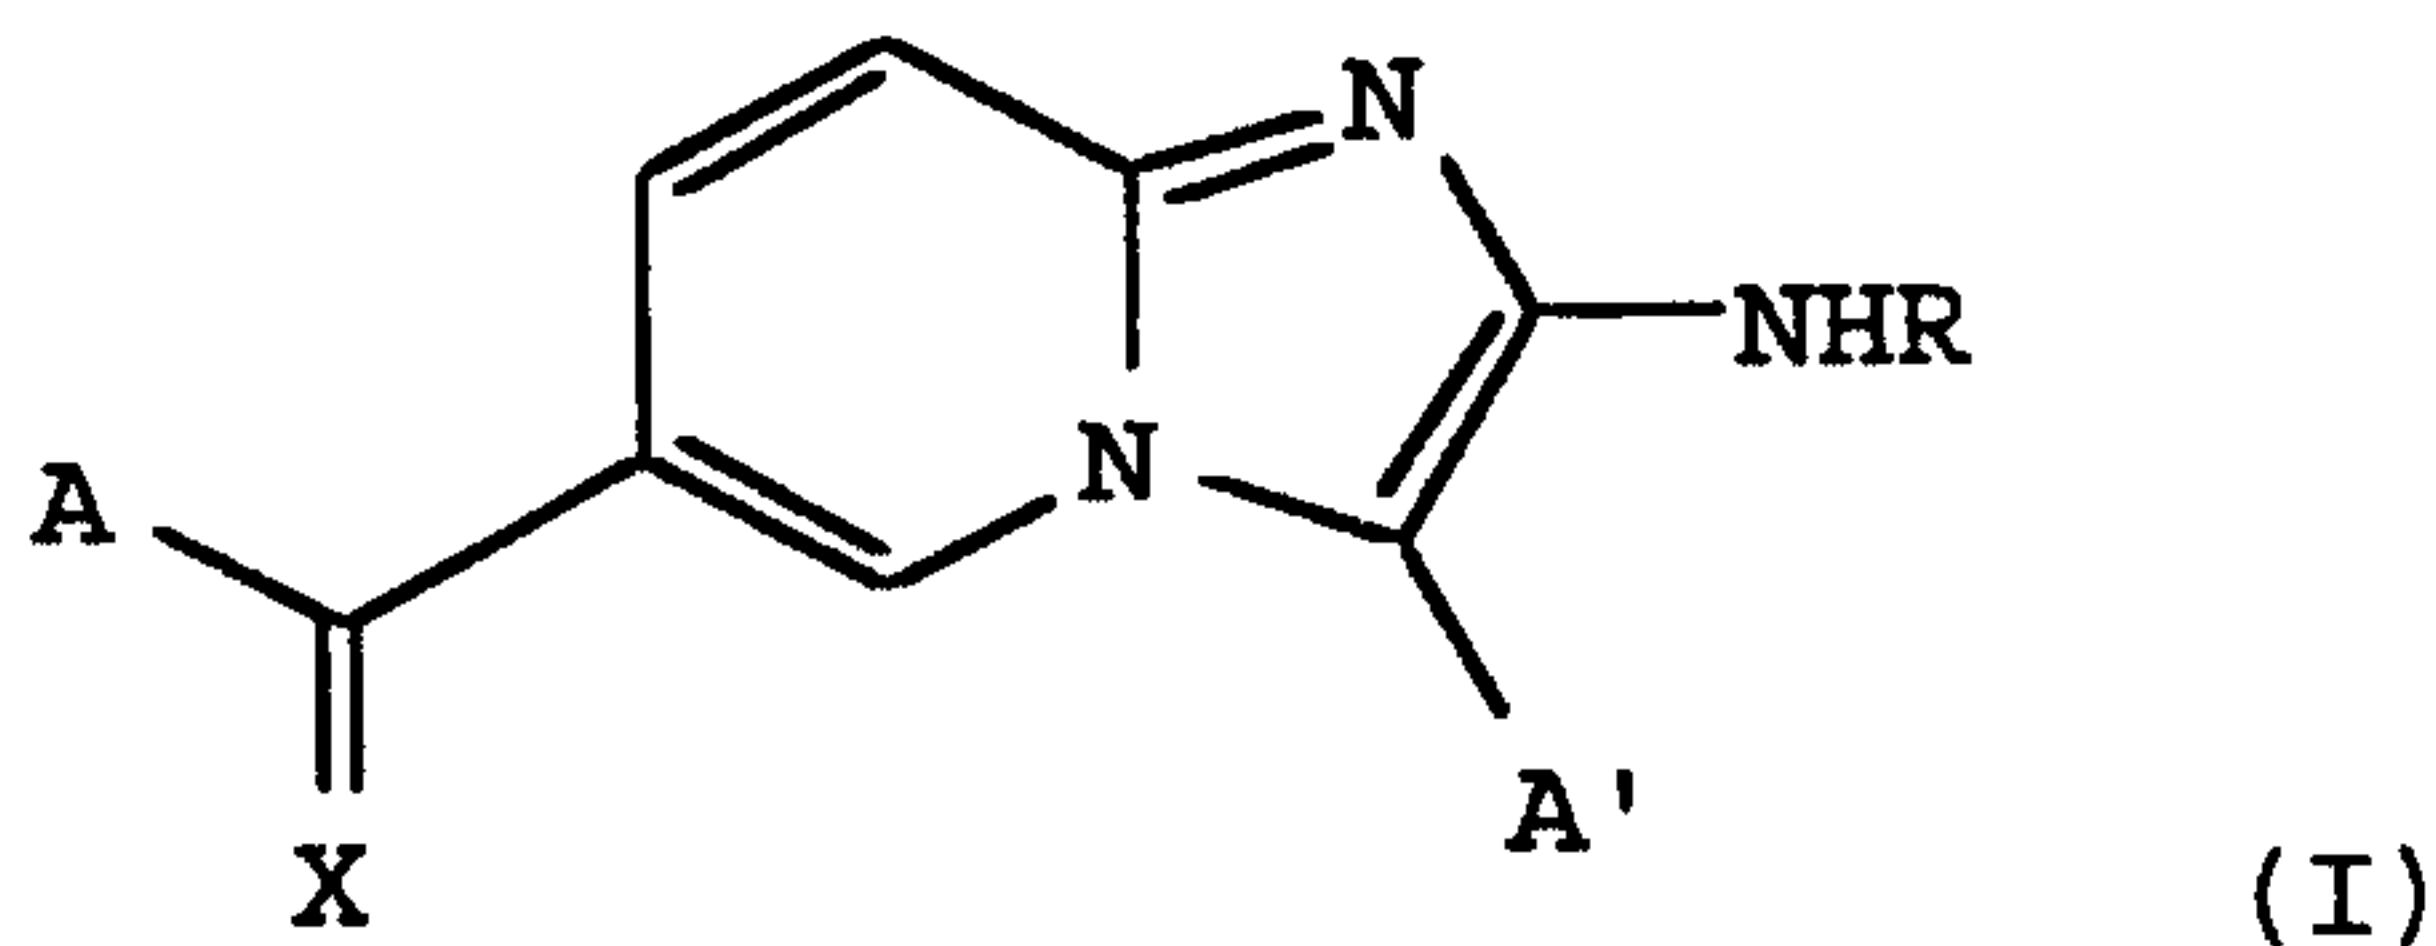

5 wherein:

A is phenyl, pyridyl, substituted phenyl, substituted pyridyl, or benzyl;

R is hydrogen, COR⁴, or COCF₃;


X is N-OH, O, or CHR¹;

10 R¹ is hydrogen, halo, CN, C₁-C₄ alkyl, -C≡CH, CO(C₁-C₄ alkyl), CO₂(C₁-C₄ alkyl), or CONR²R³;

R² and R³ are independently hydrogen or C₁-C₄ alkyl;

A' is hydrogen, halo, C₁-C₆ alkyl, benzyl, naphthyl, thienyl, furyl, pyridyl, pyrrollyl, COR⁴, S(O)_nR⁴, or a

15 group of the formula

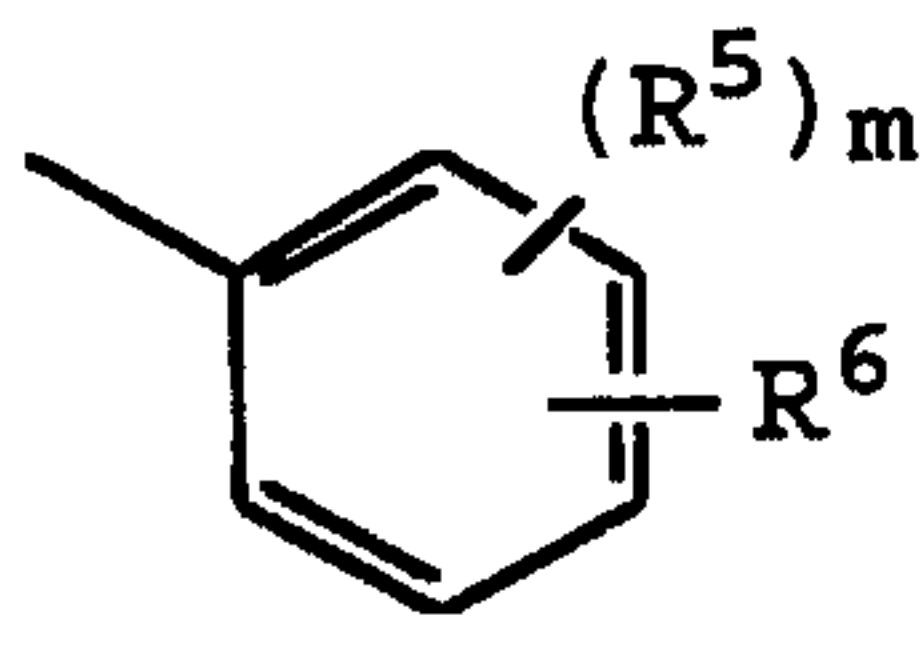

R⁴ is C₁-C₆ alkyl, phenyl, or substituted phenyl;

n is 0, 1, or 2;

20 R⁵ is independently at each occurrence hydrogen or halo;

m is 1, 2, 3, or 4; and

R⁶ is hydrogen, halo, CF₃, OH, CO₂H, NH₂, NO₂, CONHOCH₃, C₁-C₄ alkyl, or CO₂(C₁-C₄ alkyl), C₁-C₄ alkoxy; or pharmaceutically acceptable salts thereof.

25


2. A compound of claim 1 wherein R is hydrogen.

3. A compound of claim 2 wherein:

A is phenyl or substituted phenyl; and

-135-


A' is C₁-C₆ alkyl, COR⁴, S(O)_nR⁴, or a group of the formula

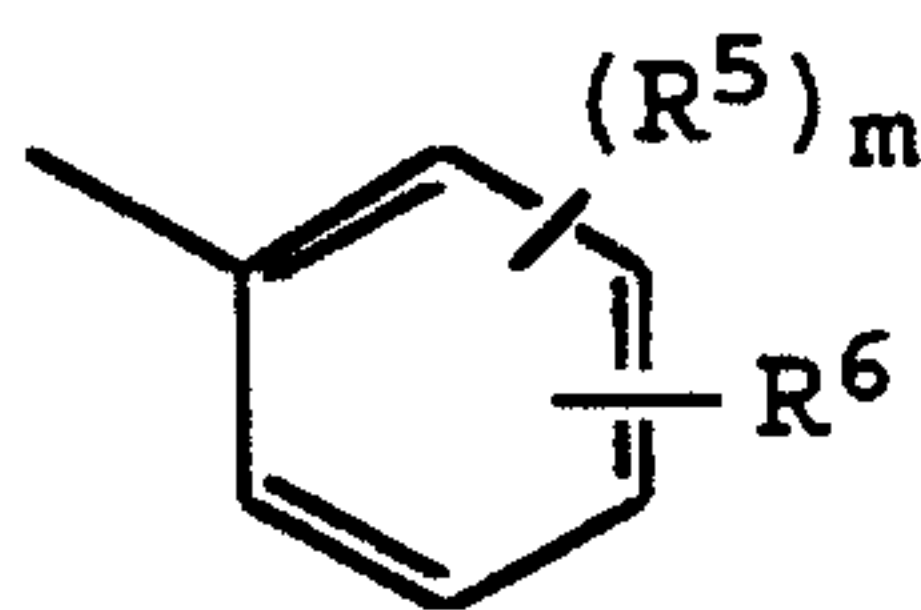

5 4. A compound of claim 1 wherein X is NOH or CHR¹.

5. A compound of claim 3 wherein X is NOH or CHR¹.

10 6. A compound of claim 5 wherein:
X is CHR¹;
R¹ is CN, CO(C₁-C₄ alkyl), or CONR²R³;
A is flouorophenyl or diflouorophenyl;
A' is a group of the formula

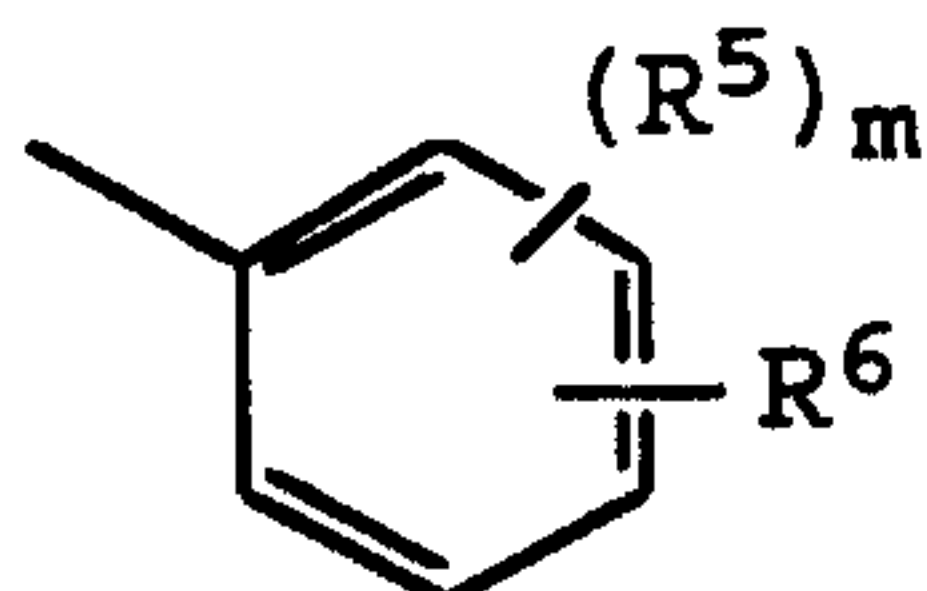


; and

15 R⁵ is halo.


7. A method for inhibiting a Hepatitis C virus comprising administering to a host in need thereof, an effective amount of a compound of any of claims 1 through
20 6.

8. A method for inhibiting a picornavirus comprising administering to a host in need thereof, an effective amount of a compound of any of claims 1 through
25 6.

9. A pharmaceutical formulation comprising as an active ingredient a compound of any of claims 1 through 6, associated with one or more pharmaceutically
30 acceptable carriers, excipients or diluents.

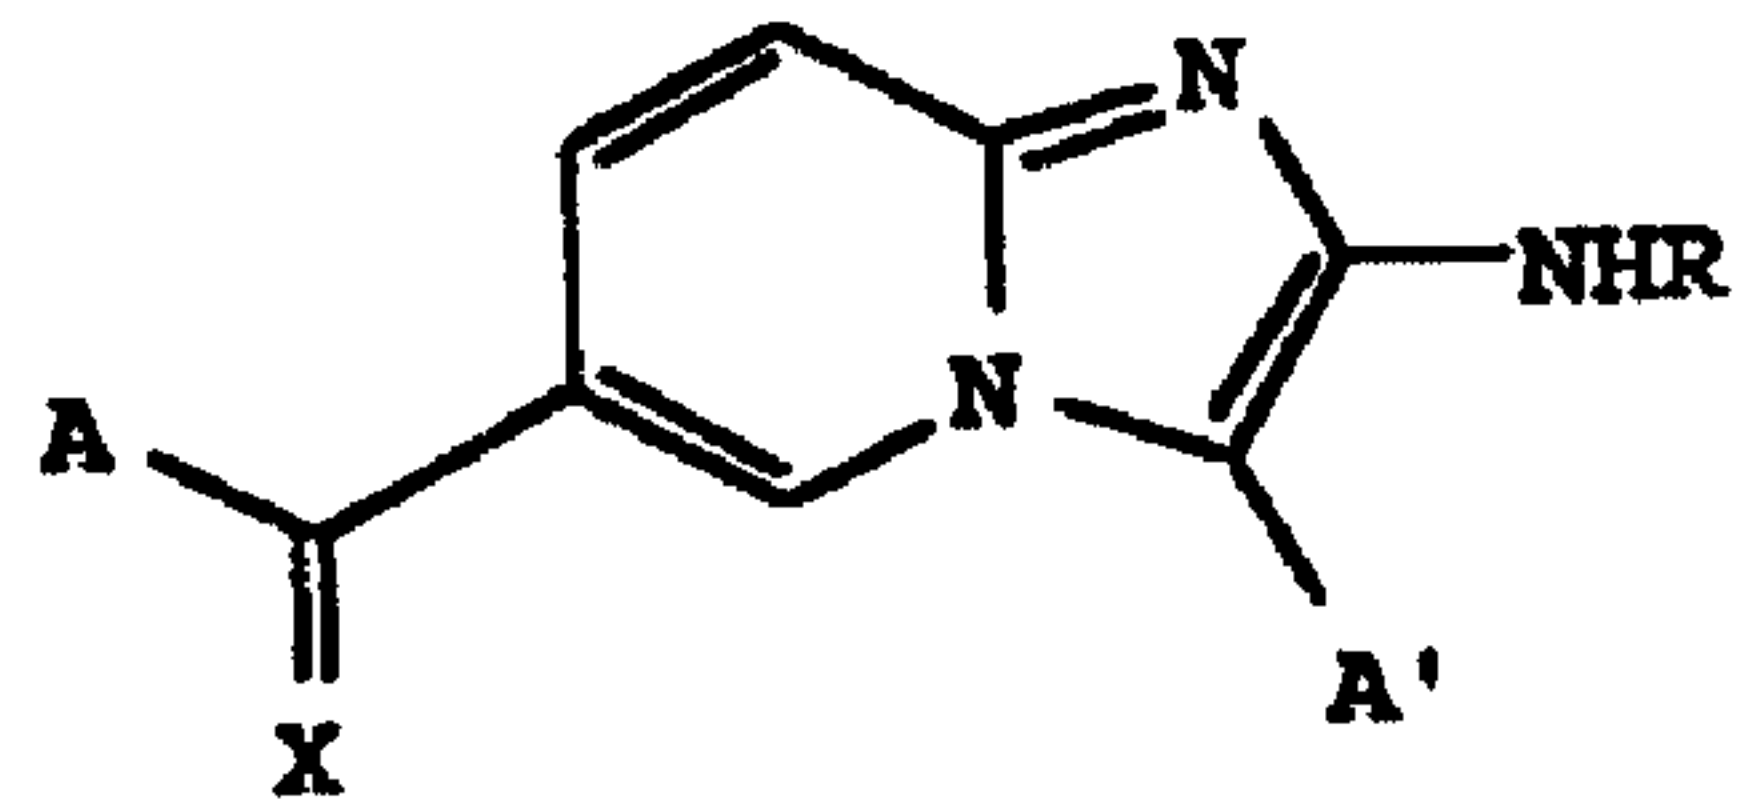

(I)

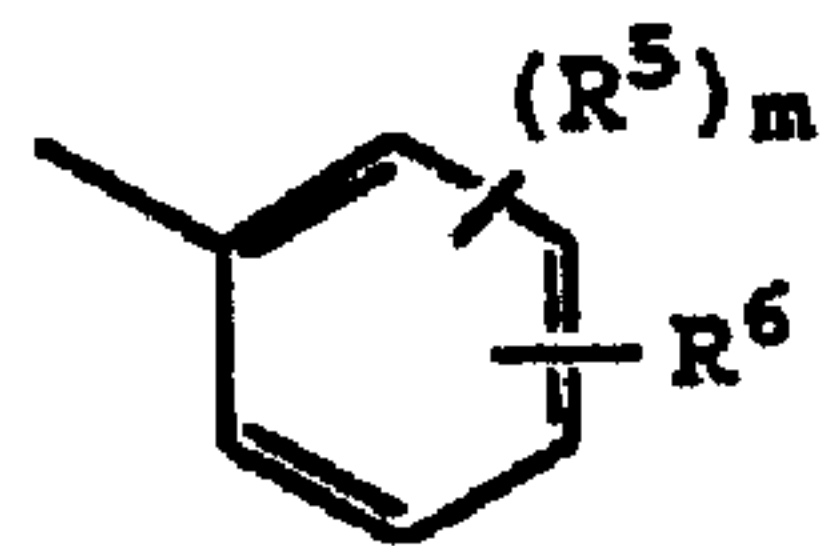

(II)