

Office de la Propriété Intellectuelle du Canada

Un organisme d'Industrie Canada Canadian
Intellectual Property
Office

An agency of Industry Canada

CA 2064828 C 2002/04/09

(11)(21) 2 064 828


(12) BREVET CANADIEN
CANADIAN PATENT

(13) **C**

- (86) Date de dépôt PCT/PCT Filing Date: 1991/06/17
- (87) Date publication PCT/PCT Publication Date: 1991/12/26
- (45) Date de délivrance/Issue Date: 2002/04/09
- (85) Entrée phase nationale/National Entry: 1992/02/11
- (86) N° demande PCT/PCT Application No.: AU 1991/000257
- (87) N° publication PCT/PCT Publication No.: 1991/019438
- (30) Priorité/Priority: 1990/06/15 (PK 0665) AU

- (51) Cl.Int.⁵/Int.Cl.⁵ A46B 9/10, A46B 5/02
- (72) Inventeur/Inventor: Humphries, Victor Alfred, AU
- (73) Propriétaire/Owner: Humphries, Victor Alfred, AU
- (74) Agent: CAMERON, NORMAN M.

(54) Titre: BROSSE A DENTS(54) Title: TOOTHBRUSH

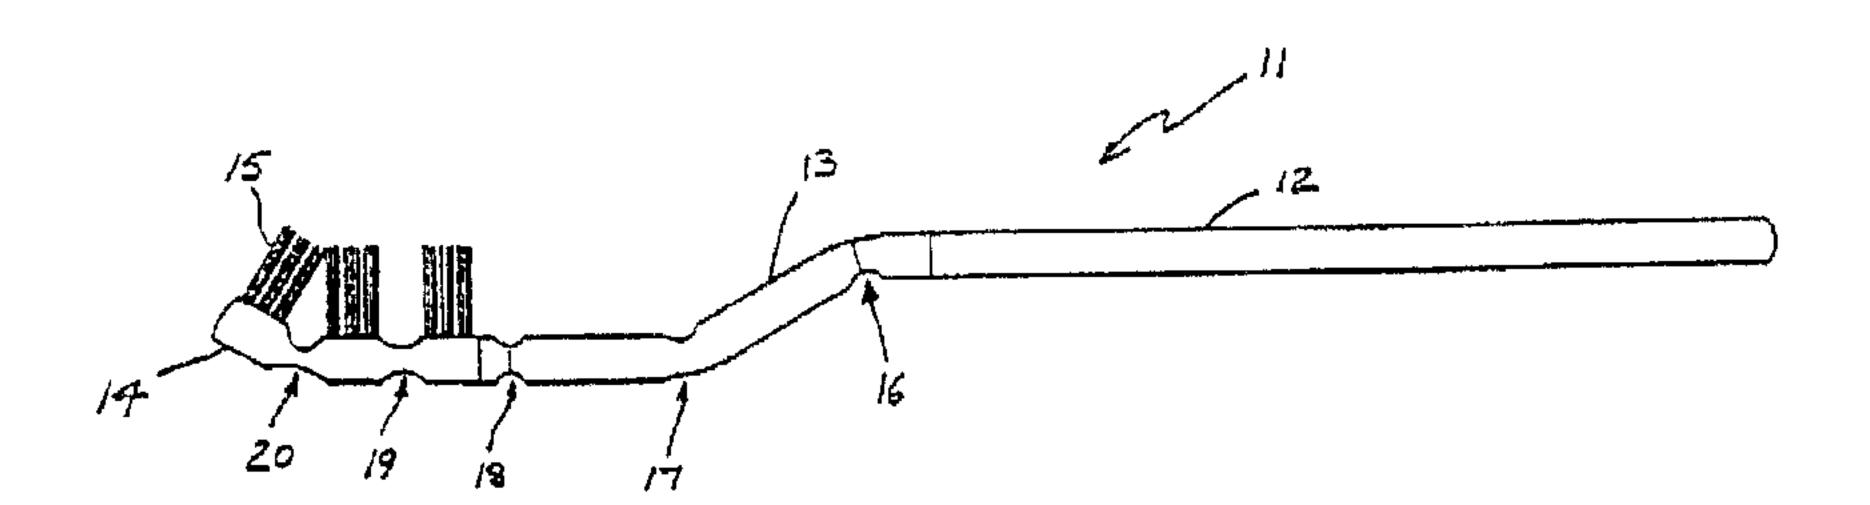

(57) Abrégé/Abstract:

A toothbrush (11) having an elongated handle part (12) and a head part (14) with bristles (15) projecting therefrom. A neck part (13) joins the handle part (12) to the head part (14). The head part (14) has at least one region thereof (19, 20) weakened so as to allow deformation in the head part (14) to suit the shape of the user's dental arches.





PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PALENT COUPERATION TREATY (PCT)

(51) International Patent Classification 5:

A1

(11) International Publication Number:

WO 91/19438

·A46B 9/10, 5/02

(43) International Publication Date:

26 December 1991 (26.12.91)

(21) International Application Number:

PCT/AU91/00257

(22) International Filing Date:

17 June 1991 (17.06.91)

(30) Priority data:

PK 0665

15 June 1990 (15.06.90)

AU

(71)(72) Applicant and Inventor: HUMPHRIES, Victor, Alfred [AU/AU]: 83 River Road, Emu Plains, NSW 2750 (AU).


(74) Agent: PETER MAXWELL & ASSOCIATES; Blaxland House, 5 Ross Street, North Parramatta, NSW 2151 (AU).

(81) Designated States: AT (European patent), AU, BE (European patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, LU (European patent), NL (European patent), SE (European patent),

Published

With international search report.

(54) Title: TOOTHBRUSH

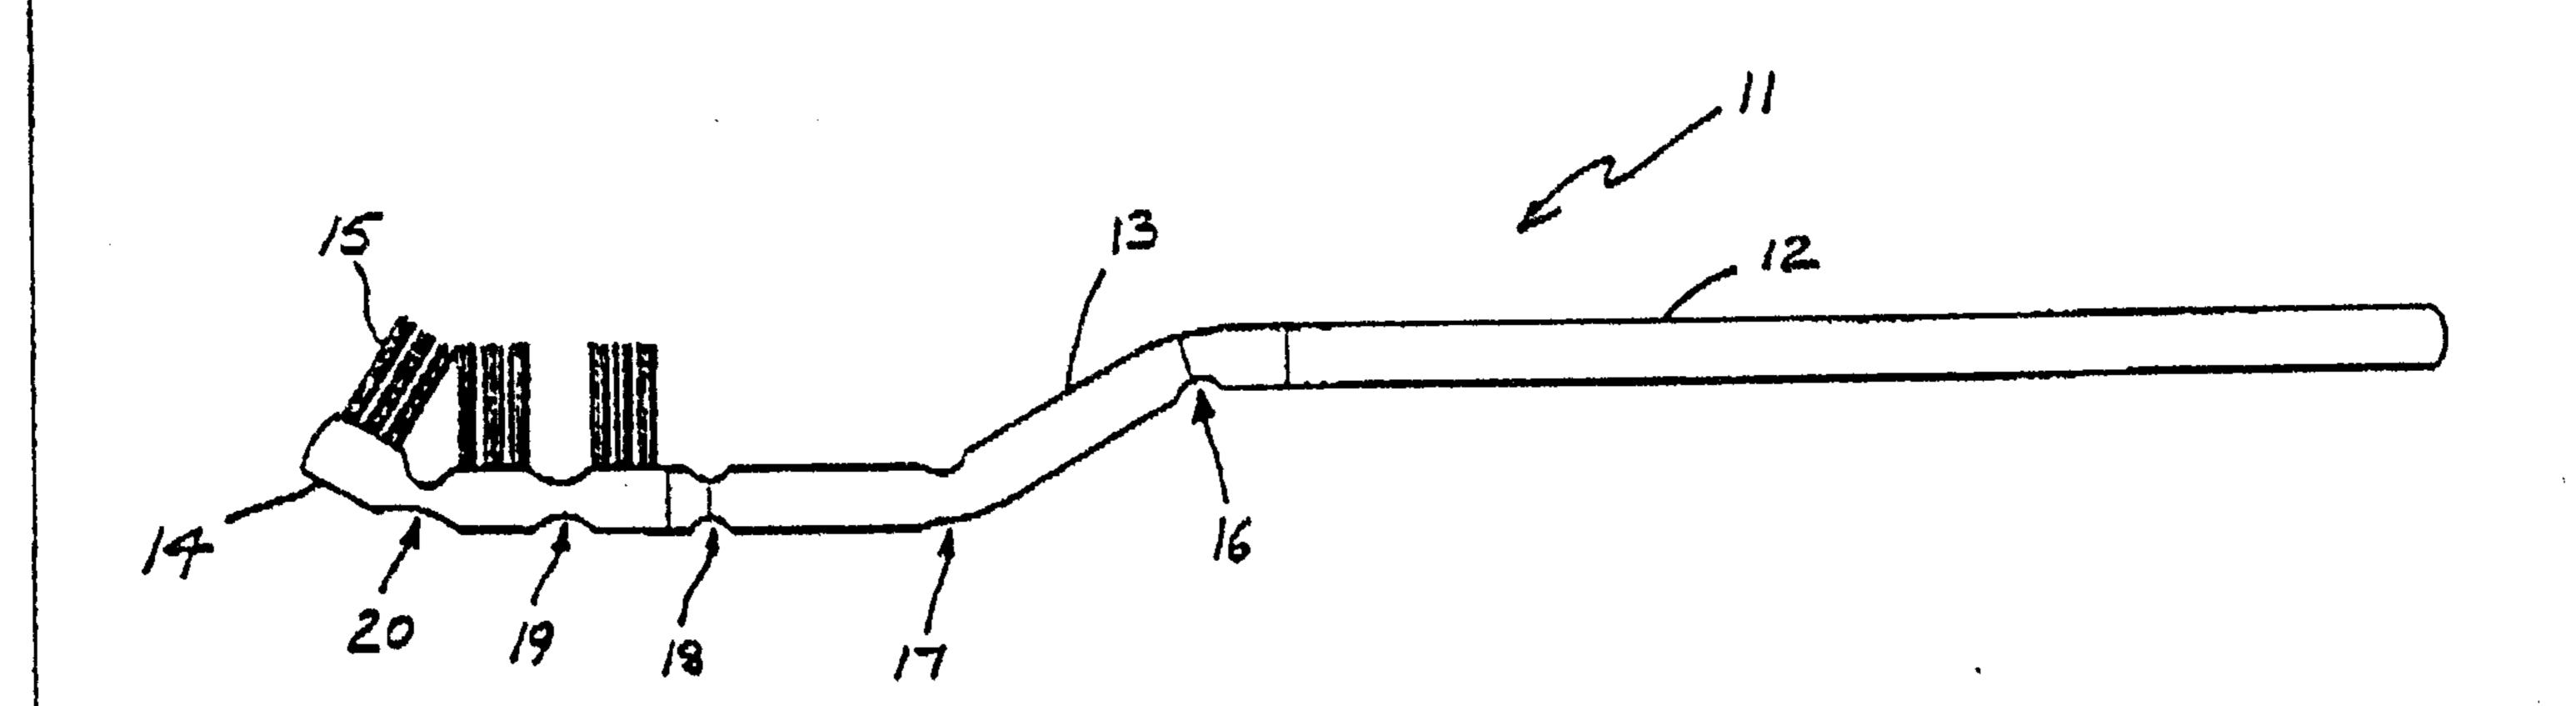

(57) Abstract

A toothbrush (11) having an elongated handle part (12) and a head part (14) with bristles (15) projecting therefrom. A neck part (13) joins the handle part (12) to the head part (14). The head part (14) has at least one region thereof (19, 20) weakened so as to allow deformation in the head part (14) to suit the shape of the user's dental arches.

WO 91/19438

10

15

20

25

-1-

PCT/AU91/00257

TOOTHBRUSH

FIELD OF INVENTION

The present invention relates to toothbrushes and in particular to a toothbrush that may be deformed to ouit the shape of the user's dental arches or for other purposes.

BACKGROUND ART

Deformable toothbrushes which are designed to bend or pivot in the neck part between the head and handle are known. For instance, Australian Patent No. 582.098 discloses a toothbrush incorporating a deformable plastic neck. The manner in which the neck deforms is continuous and gradual and the toothbrush is not adapted to be deformed in the head part. Toothbrushes that can discretely pivot in the neck part are disclosed in US Patent No. 3,868,742. However, the pivoting of the head part about the neck part is in a plane parallel to the upper surface of the handle.

Neither of these types of toothbrush have means whereby the head part of the toothbrush may be deformed. It is, therefore, an object of the present invention to provide a toothbrush in which the head part is deformable, either with or without the adjacent neck part being deformable, so that the shape of the toothbrush may be adjusted to suit the particular size and shape of the user's dental arches.

DISCLOSURE OF THE INVENTION

According to the invention, there is provided a toothbrush comprising an elongated handle part, a head part, and a neck part joining the handle part and the head part,

WO 91/19438

10

15

20

25

-2-

PCT/AU91/00257

said head part having bristles projecting from at least one side thereof and having at least one region thereof weakened co ac to allow deformation in the head part to suit the shape of the user's dental arches.

In a preferred form of the invention, the neck part is of smaller cross sectional area than the adjacent parts of the head part and handle part.

Preferably, the neck part includes at least one region thereof weakened so as to allow deformation in the neck part to suit the shape of the user's dental arches.

preferably, the region at which the deformation occurs comprises a localised narrowing in the cross section of the head or neck part. Pressure applied adjacent to the or each narrowed region results in a sharp and discrete deformation. Other means by which the structure may be weakened are contemplated by the invention, such as by provision at the weakened region of material that is less dense than the surrounding material.

BRIEF DESCRIPTION OF THE DRAWINGS

In order that the invention may be more readily understood and put into practical effect, reference will now be made to the accompanying drawings in which:-

Fig. 1 is a side view of a toothbrush according to one embodiment of the invention,

Fig. 2 is a top view of the toothbrush of Fig. 1,

Fig. 3 is a top view of a toothbrush according to a second embodiment of the invention,

WO 91/19438

15

20

25

-3-

PCT/AU91/00257

- Fig. 4 is a side view of the toothbrush of Fig. 1 that has been deformed to suit the shape of the dental archec of a particular first user,
- Fig. 5 is a side view of the toothbrush of Fig. 1 that has been deformed to suit the shape of the dental arches of a particular second user, and
- Pig. 6 is a side view of the teethbrush of Pig. 1 that has been deformed to suit the shape of the dental arches of a particular third user.

10 DESCRIPTION OF PREFERRED EMBODIMENT

The toothbrush 11 shown in Figs. 1 and 2 comprises a handle 12, a neck 13 and a head 14 having an array of bristles 15 attached thereto in any convenient way. The neck 13 has been weakened at regions or loci 16, 17 and 18 through a narrowing of the cross section of the neck at those sites. The head 14 has been weakened at regions 19 and 20 by narrowing the cross section of the head 14 at those regions. Rows of bristles are missing from each of the regions 19 and 20.

The toothbrush 21 show in Fig. 3 also comprises a handle 22, neck 23 and head 24 with an array of bristles 25 attached thereto in any convenient way. The neck 23 is narrowed at regions 26, 27 and 28 whilst the head 24 is narrowed at region 29. Rows of bristles are missing from region 29.

The weakness in structure arising from the narrowing of these regions in the neck and head of both toothbrushes of Fig. 1 and Fig. 3 allow these toothbrushes to be deformed at

WO 91/19438

10

15

20

-4-

PCT/AU91/00257

these sites. This deformation our be sharp and discrete at those sites.

The invention is not restricted to the weakening in the head part (and optionally the neck part) being a discrete narrowing in particular regions of these parts, and any manner of weakening is contemplated by the invention so long as it allows one or more deformations in the appropriate part to suit the shape of the user's dental arches, and whether or not it leads to a sharp and discrete deformation at the weakened regions. In some circumstances, it may be useful for only the head part or the neck part to have a weakened region.

The material from which the toothbrushes of Figs. 1 to 6 may be integrally senstructed are those commonly used in the manufacture of toothbrushes and which can withstand the pressure needed to deform the toothbrush to its required shape and to maintain that shape during use. Preferably, the material is a transparent or translucent hydrocarbon resin which can be readily manipulated and deformed at its weakened regions at room temperature or under hot water. The material used may also be an opaque styrene polymer or copolymer which can be manipulated at higher temperatures. Preferably, a plastic material commonly referred to as PETG is used.

Figs. 4 to 6 show three ways in which the toothbrush of fig. 1 may be deformed. The toothbrushes of the invention may be deformed at the weakened regions by manual or hand pressure applied by the user adjacent to the weakened region or by other means.

VO 91/19438

15

20

25

PCT/AU91/00257

-5-

In Fig. 4, the neck 13 has been deformed as shown at regions 10 and 17 to improve access of the nead part to the target teeth and the head 14 has been deformed upwardly at region 20. As a result, the bristles 15 of the head 14 provide a brushing surface that is slightly concave.

Fig. 5 shows the toothbrush 11 deformed according to Fig. 4 but having its head 14 deformed downwardly at region 20, rather than upwardly, thereby providing a brushing surface of bristles 15 that is slightly convex.

In Fig. 6, the toothbrush 11 has been deformed in the neck 13 at regions 16, 17 and 18 and the head 14 has been deformed at sites 19 and 20. As a result, the bristles 15 of the head 14 provide a brushing surface that is even more concave than that of the toothbrush deformed according to Fig. 4.

The particular arrangements of the neck 13 and head 14 shown in Figs 4 to 5 will be most effective in cleaning distal and mesial surfaces of teeth next to areas where teeth have been extracted.

It will be apparent that one advantage of the invention is that the shape of the toothbrush can be adjusted by a dentist in consultation with the user patient to suit the particular size and shape of the patient's dental arches and that the shape of the neck and head may he varied in many number of combinations. Although it is preferable for the adjustment to be done in consultation with the dentist, the present invention also allows the user to independently conduct the adjustment.

PCT/AU91/00257

10

15

20

2064828

-6-

WO 91/19438

By way of dimension only, the toothbrush of the invention may come in a small (junior) size for children or a large size for adults. In the junior model, preferably the head would measure approximately 20 millimetres in length with a row of bristles missing about 8 millimetres from the distal end. In the adult model, preferably the head would measure approximately 30 millimetres in length with a row of bristles missing about 8 millimetres from the distal end and another row missing about 8 millimetres from the distal end.

For large arches, the length of the neck together with the head should preferably be about 11 centimetres. The handle should preferably be 11 or 12 centimetres in length and be at least 13 millimetres wide for adequate grip.

Various modifications may be made in details of design and construction without departing from the scope or ambit of the present invention.

For instance, the handle part of the toothbrush of the invention may have at least one weakened region so as to allow deformation thereof to suit particular forms of grip, such as the grip of infants or arthritis sufferers.

I claim:

25

- A toothbrush comprising an elongated handle part having a longitudinal axis, a head part, and a neck part joining the handle part and head part, wherein said handle part, said head part, and said neck part are integrally constructed, said head part including a plurality of sides with bristles projecting from at least one of said sides thereof and having at least one region thereof weakened so as to allow deformation in the head part to suit the shape of the user's dental arches, the at least one weakened region comprising a localized narrowing in the cross-section of the head part that allows the deformation to be sharp and discrete and only at the localized narrowing, the 10 localized narrowing being integrally formed with the remainder of the head part and separating the bristles into at least two bristle carrying sections of the head part, each of the bristle carrying sections being movable independently of the other by the deformation at the localized narrowing, and wherein the at least one weakened region is so formed that it allows the deformation about an axis perpendicular to the 15 longitudinal axis of the elongated handle part and wherein said deformation of said head part remains generally stable during use.
- The toothbrush of claim 1 wherein the head part and the handle part each include adjacent parts connected to the neck part and wherein the neck part is of a smaller cross sectional area than the adjacent parts of the head part and the handle part.
 - 3. The toothbrush of claim 1 wherein the neck part includes at least one region thereof weakened so as to allow deformation in the neck part to suit the shape of the user's dental arches.
 - 4. The toothbrush of claim 1 wherein the toothbrush is made of translucent hydrocarbon resin that can be deformed at its at least one weakened region at room temperature or under hot water.
 - 5. The toothbrush of claim 1 wherein the toothbrush is made of an opaque styrene polymer.

- 6. The toothbrush of claim 1 wherein the head part has two weakened regions and the neck part has three weakened regions.
- 7. The toothbrush of claim 1 wherein the head part has one weakened region.
- 8. The toothbrush of claim 1 wherein the deformation at the at least one weakened region is by manual or hand pressure applied adjacent to the at least one weakened region.
- 10 9. The toothbrush of claim 1 wherein the toothbrush is made of a transparent hydrocarbon resin that can be deformed at its at least one weakened region at room temperature or under hot water.

- 10. The toothbrush of claim 1 wherein the toothbrush is made of an opaque styrene copolymer.
- A toothbrush comprising an elongated handle part having a longitudinal axis, a head 11. part having bristles projecting therefrom, and a neck part having one end thereof joined to the handle part and another end thereof joined to the head part, wherein said head part, said neck part, and said handle part are integrally constructed, said head 20 part also having at least one region thereof weakened so as to allow deformation in the head part to correspond to the shape of a user's dental arches, the at least one weakened region comprising a localized narrowing in the cross-section of the head part that allows the deformation to be sharp and discrete and only at the localized narrowing, the localized narrowing being integrally formed with the remainder of the 25 head part and separating the bristles into at least two bristle carrying sections of the head part, each of the bristle carrying sections being movable independently of the other by the deformation at the localized narrowing, and wherein the at least one weakened region is so formed that it allows the deformation about an axis perpendicular to the longitudinal axis of the elongated handle part and wherein said 30 deformation of said head part remains generally stable during use.

A toothbrush comprising an elongated handle part having a longitudinal axis, a head 12. part having bristles projecting therefrom, and a neck part having one end thereof joined to the handle part and another end thereof joined to the head part, wherein said head part, said neck part, and said handle part are integrally constructed, said head part also having at least one region thereof weakened so as to allow deformation in the head part to correspond to the shape of a user's dental arches, the at least one weakened region comprising a localized narrowing in the cross-section of the head part that allows the deformation to be sharp and discrete for forming a discretely angled brushing profile, the localized narrowing being integrally formed with the remainder of the head part and separating the bristles into at least two bristle carrying sections of the head part, each of the bristle carrying sections being movable independently of the other by the deformation at the localized narrowing, and wherein the at least one weakened region is so formed that it allows the deformation about an axis perpendicular to the longitudinal axis of the elongated handle part and wherein said deformation of said head part remains generally stable during use.

T2504.2040

10

15

FCT/AU91/0045/

WO 91/19438

PCT/AU91/00257

